

FCC Test Report

Product Name	SwiftCam M3s Mobile Stabilizer		
Model No.	SC-HG-M3S		
FCC ID.	2AEFC-M3S001A01		

Applicant	SwiftCam Technologies Group Co Ltd.
Address	8B, Block 2, Vigor Industrial Building, No. 49-53,
	Ta Chuen Ping Street, Kwai Chung, Hong Kong

Date of Receipt	Feb. 06, 2015
Issued Date	Mar. 04, 2015
Report No.	1520235R-RFUSP01V00-A
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.



Test Report

Issued Date: Mar. 04, 2015

Report No.: 1520235R-RFUSP01V00-A

QuieTek

Product Name	SwiftCam M3s Mobile Stabilizer			
Applicant	SwiftCam Technologies Group Co Ltd.			
Address	8B, Block 2, Vigor Industrial Building, No. 49-53, Ta Chuen Ping			
	Street, Kwai Chung, Hong Kong			
Manufacturer	SwiftCam Technologies Group Co Ltd.			
Model No.	SC-HG-M3S			
FCC ID.	2AEFC-M3S001A01			
EUT Rated Voltage	DC 11.1V (Power by Battery 3.7V*3)			
EUT Test Voltage	DC 11.1V (Power by Battery 3.7V*3)			
Trade Name	SwiftCam			
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2014			
	ANSI C63.4: 2014, ANSI C63.10: 2013			
Test Result	Complied			

Documented By	:	Jinn Chen
		(Senior Adm. Specialist / Jinn Chen)
Tested By	:	Dlan Chen
		(Engineer / Alan Chen)
Approved By	:	Stand 3
		(Director / Vincent Lin)



TABLE OF CONTENTS

Desc	ription	Page
1.	GENERAL INFORMATION	
1.1.	EUT Description	
1.2.	Operational Description	
1.3.	Tested System Details	
1.4.	Configuration of Tested System	S
1.5.	EUT Exercise Software	S
1.6.	Test Facility	C
2.	CONDUCTED EMISSION	
2.1.	Test Equipment	
2.1.	Test Setup	
2.2.	Limits	
2.3.	Test Procedure	
2.5.	Uncertainty	
2.5.	Test Result of Conducted Emission	11 12
3.	PEAK POWER OUTPUT	
3.1.	Test Equipment	
3.2.	Test Setup	
3.3.	Limit	
3.4.	Test Procedure	
3.5.	Uncertainty	
3.6.	Test Result of Peak Power Output	
4.	RADIATED EMISSION	
4.1.	Test Equipment	
4.2.	Test Setup	
4.3.	Limits	18
4.4.	Test Procedure	
4.5.	Uncertainty	19
4.6.	Test Result of Radiated Emission	20
5.	RF ANTENNA CONDUCTED TEST	28
5.1.	Test Equipment	
5.2.	Test Setup	
5.3.	Limits	28
5.4.	Test Procedure	28
5.5. 5.6.	Uncertainty Test Result of RF Antenna Conducted Test	<i>کا۔۔۔۔۔۔</i>
6.	BAND EDGE	
6.1.	Test Equipment	
6.2.	Test Setup	
6.3. 6.4.	Limit	
6.5.	Test Procedure	
6.6.	Uncertainty Test Result of Band Edge	
7. 7.1.	CHANNEL NUMBER	
	Test Equipment	
7.2.	Test Setup	
7.3.	Limit	
7.4.	Test Procedure	
7.5.	Uncertainty	5U
7.6.	Test Result of Channel Number	
8.	CHANNEL SEPARATION	
8.1.	Test Equipment	
8.2.	Test Setup	
8.3.	Limit	
8.4.	Test Procedure	
8.5.	Uncertainty	
8.6.	Test Result of Channel Separation	
9.	DWELL TIME	
9.1.	Test Equipment	58

Report No.: 1520235R-RFUSP01V00-A



9.2.	Test Setup	58
9.3.	Limit	58
9.4.	Test Procedure	58
9.5.	Uncertainty	58
9.6.	Test Result of Dwell Time	59
10.	OCCUPIED BANDWIDTH	63
10.1.	Test Equipment	63
10.2.	Test Setup	63
10.3.	Limits	63
10.4.	Test Procedure	
10.5.	Uncertainty	63
10.6.	Test Result of Occupied Bandwidth	64
11.	EMI REDUCTION METHOD DURING COMPLIANCE TESTING	

Attachment 1: EUT Test Photographs Attachment 2: EUT Detailed Photographs



1. GENERAL INFORMATION

1.1. EUT Description

Product Name	SwiftCam M3s Mobile Stabilizer
Trade Name	SwiftCam
Model No.	SC-HG-M3S
FCC ID.	2AEFC-M3S001A01
Frequency Range	2402 – 2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) /π/4DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna Type	Chip Antenna
Channel Control	Auto
Antenna Gain	Refer to the table "Antenna List"

Antenna List

No.	Manufacturer Part No.		Antenna Type	Peak Gain
1	ACX	AT3216 -B2R7HAA	Chip Antenna	0.5dBi for 2.4 GHz

- 1. The antenna of EUT is conform to FCC 15.203.
- 2. Only the higher gain antenna was tested and recorded in this report.



Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

- 1. The EUT is an SwiftCam M3s Mobile Stabilizer with a built-in Bluetooth.
- 2. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
- 3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test
- 4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
- 5. Bluetooth operation was evaluated at both 1Mb/s and 3Mb/s data rates. 2Mb/s data rate was found, through pre-testing, to produce emissions similar to those for 3Mb/s.

Test Mode	Mode 1: Transmit - 1Mbps (GFSK)
	Mode 2: Transmit - 3Mbps (8DPSK)




1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	PPT	N/A	Non-Shielded, 0.8m
2	Test Fixture	SwiftCam	N/A	N/A	N/A

Signal Cable Type		Signal cable Description
A	USB Cable	Shielded, 0.5m
В	Signal Cable	Non-Shielded, 0.3m

1.4. Configuration of Tested System

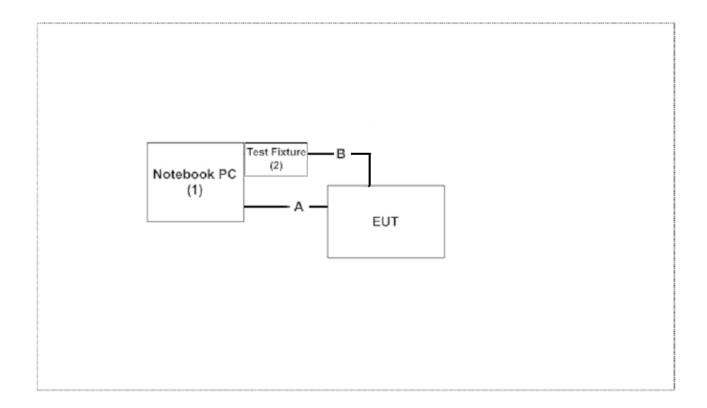

1.5. EUT Exercise Software

- 1 Setup the EUT as shown in Section 1.4.
- 2 Execute software "ISRT Ver.2.1.25.4149" on the Notebook PC.
- 3 Configure the test mode, the test channel, and the data rate.
- 4 Press "OK" to start the continuous Transmit.
- 5 Verify that the EUT works properly.



1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from QuieTek Corporation's Web Site: http://www.quietek.com/tw/ctg/cts/accreditations.htm
The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site: http://www.quietek.com/

Site Description: File on

Federal Communications Commission

FCC Engineering Laboratory 7435 Oakland Mills Road Columbia, MD 21046

Registration Number: 92195

Site Name: Quietek Corporation Site Address: No.5-22, Ruishukeng,

Linkou Dist. New Taipei City 24451,

Taiwan, R.O.C.

TEL: 886-2-8601-3788 / FAX: 886-2-8601-3789

E-Mail: service@quietek.com

FCC Accreditation Number: TW1014



2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2014	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2015	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2015	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2015	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2015	
	No.1 Shielded Room				

Note:

- 1. All equipments are calibrated every one year.
- 2. The test instruments marked by "X" are used to measure the final test results.

2.2. Test Setup

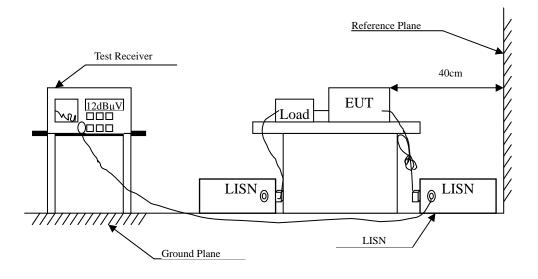



2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBμV) Limit				
Frequency	Limits			
MHz	QP	AV		
0.15 - 0.50	66-56	56-46		
0.50-5.0	56	46		
5.0 - 30	60	50		

Remarks: In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

2.5. Uncertainty

 $\pm 2.26 dB$



2.6. Test Result of Conducted Emission

Product : SwiftCam M3s Mobile Stabilizer

Test Item : Conducted Emission Test

Power Line : Line 1

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dΒμV	$dB\mu V$	dB	dΒμV
LINE 1					
Quasi-Peak					
0.154	9.670	40.210	49.880	-16.006	65.886
0.166	9.667	38.910	48.576	-16.967	65.543
0.189	9.660	37.080	46.740	-18.146	64.886
0.212	9.661	35.730	45.391	-18.838	64.229
0.283	9.665	28.260	37.925	-24.275	62.200
1.880	9.762	20.550	30.312	-25.688	56.000
Average					
0.154	9.670	16.140	25.810	-30.076	55.886
0.166	9.667	16.010	25.676	-29.867	55.543
0.189	9.660	18.600	28.260	-26.626	54.886
0.212	9.661	17.340	27.001	-27.228	54.229
0.283	9.665	10.120	19.785	-32.415	52.200
1.880	9.762	11.770	21.532	-24.468	46.000

- 1. All Reading Levels are Quasi-Peak and average value.
- 2. " means the worst emission level.
- 3. Measurement Level = Reading Level + Correct Factor



Product : SwiftCam M3s Mobile Stabilizer

Test Item : Conducted Emission Test

Power Line : Line 2

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	$dB\mu V$	$dB\mu V$	dB	dΒμV
LINE 2					_
Quasi-Peak					
0.177	9.663	36.680	46.343	-18.886	65.229
0.232	9.662	38.010	47.672	-15.985	63.657
0.357	9.669	31.540	41.209	-18.877	60.086
0.642	9.685	36.390	46.075	-9.925	56.000
0.927	9.700	31.740	41.440	-14.560	56.000
1.466	9.729	23.430	33.159	-22.841	56.000
Average					
0.177	9.663	25.890	35.553	-19.676	55.229
0.232	9.662	13.620	23.282	-30.375	53.657
0.357	9.669	19.440	29.109	-20.977	50.086
0.642	9.685	16.720	26.405	-19.595	46.000
0.927	9.700	9.650	19.350	-26.650	46.000
1.466	9.729	10.500	20.229	-25.771	46.000

- 1. All Reading Levels are Quasi-Peak and average value.
- 2. " means the worst emission level.
- 3. Measurement Level = Reading Level + Correct Factor



3. Peak Power Output


3.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2014
X	Power Sensor	Anritsu	MA2411B/0738448	Jun, 2014

Note: 1. All equipments are calibrated every one year.

2. The test instruments marked by "X" are used to measure the final test results.

3.2. Test Setup



3.3. Limit

The maximum peak power shall be less 1Watt.

3.4. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

3.5. Uncertainty

 $\pm 1.27 dB$



3.6. Test Result of Peak Power Output

Product : SwiftCam M3s Mobile Stabilizer

Test Item : Peak Power Output

Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Channel No.	Frequency	Measurement	Required Limit	Result
	(MHz)	(dBm)		
Channel 00	2402.00	2.26	1 Watt= 30 dBm	Pass
Channel 39	2441.00	2.31	1 Watt= 30 dBm	Pass
Channel 78	2480.00	2.36	1 Watt= 30 dBm	Pass

Page: 15 of 72



Product : SwiftCam M3s Mobile Stabilizer

Test Item : Peak Power Output

Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Channel No.	Frequency	Measurement	Required Limit	Result
	(MHz)	(dBm)		
Channel 00	2402.00	1.51	1 Watt= 30 dBm	Pass
Channel 39	2441.00	1.49	1 Watt= 30 dBm	Pass
Channel 78	2480.00	1.38	1 Watt= 30 dBm	Pass



4. Radiated Emission

4.1. Test Equipment

The following test equipments are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
⊠Site # 3	X	Magnetic Loop Antenna	Teseq	HLA6121/ 37133	Sep, 2014
	X	Bilog Antenna	Schaffner Chase	CBL6112B/ 2707	Jun, 2014
	X	EMI Test Receiver	R&S	ESCS 30/838251/ 001	Jun, 2014
	X	Coaxial Cable	QTK(Arnist)	RG 214/ LC003-RG	Jun, 2014
	X	Coaxial signal switch	Arnist	MP59B/ 6200798682	Jun, 2014


Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
⊠CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct, 2014
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar, 2015
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan, 2015
	X	Horn Antenna	TRC	AH-0801/95051	Aug, 2014
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan, 2015
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul, 2014
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul, 2014

Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

2. The test instruments marked with "X" are used to measure the final test results.

4.2. Test Setup


Below 1GHz

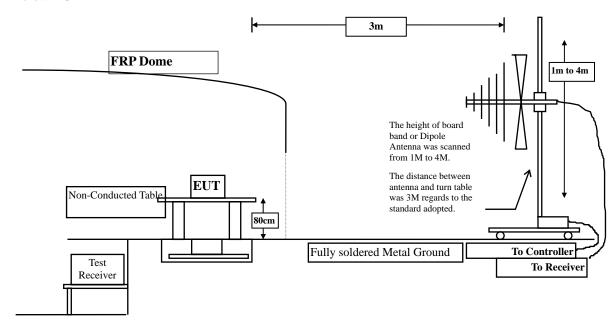

Page: 17 of 72



Above 1GHz

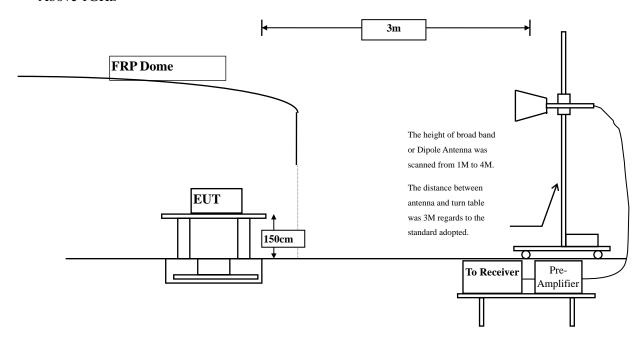

4.3. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits					
Frequency MHz	uV/m @3m	dBμV/m@3m			
30-88	100	40			
88-216	150	43.5			
216-960	200	46			
Above 960	500	54			

Remarks:

- 1. RF Voltage $(dB\mu V) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.



4.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.249 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range form 9kHz - 10th Harmonic of fundamental was investigated.

4.5. Uncertainty

± 3.9 dB above 1GHz

 \pm 3.8 dB below 1GHz



4.6. Test Result of Radiated Emission

Product : SwiftCam M3s Mobile Stabilizer
Test Item : Harmonic Radiated Emission

Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2402MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dΒμV	$dB\mu V/m$	dB	$dB\mu V/m$
Horizontal					
Peak Detector:					
4804.000	3.327	50.800	54.127	-19.873	74.000
7206.000	10.136	42.750	52.886	-21.114	74.000
9608.000	13.706	40.550	54.256	-19.744	74.000
Average					
Detector:					
4804.000	3.327	42.400	45.727	-8.273	54.000
9608.000	13.706	29.140	42.846	-11.154	54.000
Vertical					
Peak Detector:					
4804.000	6.638	47.480	54.117	-19.883	74.000
7206.000	11.005	40.850	51.855	-22.145	74.000
9608.000	14.103	39.830	53.933	-20.067	74.000
Average					
Detector:					
4804.000	6.638	38.940	45.577	-8.423	54.000

- 1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- 4. Measurement Level = Reading Level + Correct Factor.
- 5. Correct Factor = Antenna factor + Cable loss Amplifier gain.
- 6. The average measurement was not performed when the peak measured data under the limit of average detection.
- 7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dΒμV	$dB\mu V/m$	dB	$dB\mu V/m$
Horizontal					
Peak Detector:					
4882.000	3.001	50.450	53.451	-20.549	74.000
7323.000	11.846	41.240	53.087	-20.913	74.000
9764.000	12.563	40.850	53.413	-20.587	74.000
Average					
Detector:					
Vertical					
Peak Detector:					
4882.000	5.713	48.210	53.924	-20.076	74.000
7323.000	12.727	41.030	53.758	-20.242	74.000
9764.000	13.028	40.110	53.138	-20.862	74.000
Average					
Detector:					

- 1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- 4. Measurement Level = Reading Level + Correct Factor.
- 5. Correct Factor = Antenna factor + Cable loss Amplifier gain.
- 6. The average measurement was not performed when the peak measured data under the limit of average detection.
- 7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2480MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dΒμV	$dB\mu V/m$	dB	$dB\mu V/m$
Horizontal					
Peak Detector:					
4960.000	2.760	50.910	53.670	-20.330	74.000
7440.000	12.567	41.160	53.726	-20.274	74.000
9920.000	13.456	40.110	53.566	-20.434	74.000
Average					
Detector:					
Vertical					
Peak Detector:					
4960.000	5.557	48.370	53.927	-20.073	74.000
7440.000	13.426	40.410	53.835	-20.165	74.000
9920.000	13.958	39.630	53.588	-20.412	74.000
Average					
Detector:					

- 1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- 4. Measurement Level = Reading Level + Correct Factor.
- 5. Correct Factor = Antenna factor + Cable loss Amplifier gain.
- 6. The average measurement was not performed when the peak measured data under the limit of average detection.
- 7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)(2402MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dΒμV	$dB\mu V/m$	dB	$dB\mu V/m$
Horizontal					
Peak Detector:					
4804.000	3.327	49.340	52.667	-21.333	74.000
7206.000	10.136	41.640	51.776	-22.224	74.000
9608.000	13.706	38.820	52.526	-21.474	74.000
Average					
Detector:					
Vertical					
Peak Detector:					
4804.000	6.638	45.400	52.037	-21.963	74.000
7206.000	11.005	39.860	50.865	-23.135	74.000
9608.000	14.103	36.900	51.003	-22.997	74.000
Average					
Detector:					

- 1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- 4. Measurement Level = Reading Level + Correct Factor.
- 5. Correct Factor = Antenna factor + Cable loss Amplifier gain.
- 6. The average measurement was not performed when the peak measured data under the limit of average detection.
- 7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Test Site No.3 OATS

Test Mode Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dΒμV	$dB\mu V/m$	dB	$dB\mu V/m$
Horizontal					
Peak Detector:					
4882.000	3.001	48.970	51.971	-22.029	74.000
7323.000	11.846	40.050	51.897	-22.103	74.000
9764.000	12.563	38.140	50.703	-23.297	74.000
Average					
Detector:					
Vertical					
Peak Detector:					
4882.000	5.713	45.110	50.824	-23.176	74.000
7323.000	12.727	38.110	50.838	-23.162	74.000
9764.000	13.028	37.580	50.608	-23.392	74.000
Average					
Detector:					

- 1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- 4. Measurement Level = Reading Level + Correct Factor.
- 5. Correct Factor = Antenna factor + Cable loss Amplifier gain.
- 6. The average measurement was not performed when the peak measured data under the limit of average detection.
- 7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dΒμV	$dB\mu V/m$	dB	$dB\mu V/m$
Horizontal					
Peak Detector:					
4960.000	2.760	48.010	50.770	-23.230	74.000
7440.000	12.567	38.250	50.816	-23.184	74.000
9920.000	13.456	37.280	50.736	-23.264	74.000
Average					
Detector:					
Vertical					
Peak Detector:					
4960.000	5.557	44.830	50.387	-23.613	74.000
7440.000	13.426	36.220	49.645	-24.355	74.000
9920.000	13.958	36.480	50.438	-23.562	74.000
Average					
Detector:					

- 1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- 4. Measurement Level = Reading Level + Correct Factor.
- 5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
- 6. The average measurement was not performed when the peak measured data under the limit of average detection.
- 7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : SwiftCam M3s Mobile Stabilizer

Test Item : General Radiated Emission

Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dΒμV	$dB\mu V/m$	dB	$dB\mu V/m$
Horizontal					
121.180	-9.834	48.309	38.475	-5.025	43.500
239.520	-6.851	45.215	38.365	-7.635	46.000
400.540	-2.276	42.681	40.405	-5.595	46.000
499.480	0.048	37.584	37.632	-8.368	46.000
600.360	3.977	29.045	33.022	-12.978	46.000
838.980	5.131	32.121	37.252	-8.748	46.000
Vertical					
140.580	-6.241	37.303	31.062	-12.438	43.500
336.520	-4.630	36.919	32.289	-13.711	46.000
499.480	-0.852	36.321	35.469	-10.531	46.000
639.160	-3.538	33.385	29.847	-16.153	46.000
734.220	-0.271	29.903	29.632	-16.368	46.000
875.840	1.621	32.584	34.205	-11.795	46.000

- 1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- 4. Measurement Level = Reading Level + Correct Factor.
- 5. Correct Factor = Antenna factor + Cable loss Amplifier gain.
- 6. The average measurement was not performed when the peak measured data under the limit of average detection.
- 7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : SwiftCam M3s Mobile Stabilizer

Test Item : General Radiated Emission

Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dΒμV	$dB\mu V/m$	dB	$dB\mu V/m$
Horizontal					
117.300	-9.196	45.793	36.597	-6.903	43.500
249.220	-6.014	41.361	35.347	-10.653	46.000
365.620	-1.329	35.975	34.646	-11.354	46.000
499.480	0.048	38.026	38.074	-7.926	46.000
600.360	3.977	31.828	35.805	-10.195	46.000
875.840	5.271	34.105	39.376	-6.624	46.000
Vertical					
101.780	-0.021	35.343	35.321	-8.179	43.500
297.720	-7.143	39.354	32.212	-13.788	46.000
379.200	-1.505	26.477	24.971	-21.029	46.000
499.480	-0.852	34.797	33.945	-12.055	46.000
600.360	-2.833	26.553	23.720	-22.280	46.000
875.840	1.621	32.424	34.045	-11.955	46.000

- 1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- 4. Measurement Level = Reading Level + Correct Factor.
- 5. Correct Factor = Antenna factor + Cable loss Amplifier gain.
- 6. The average measurement was not performed when the peak measured data under the limit of average detection.
- 7. The emission levels of other frequencies are very lower than the limit and not show in test report.



5. RF Antenna Conducted Test


5.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A/MY48030495	Apr., 2014

Note: 1. All equipments are calibrated every one year.

2. The test instruments Marked "X" are used to measure the final test results.

5.2. Test Setup



5.3. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.4. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

5.5. Uncertainty

± 150Hz




5.6. Test Result of RF Antenna Conducted Test

Product : SwiftCam M3s Mobile Stabilizer
Test Item : RF Antenna Conducted Test

Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Figure Channel 00:

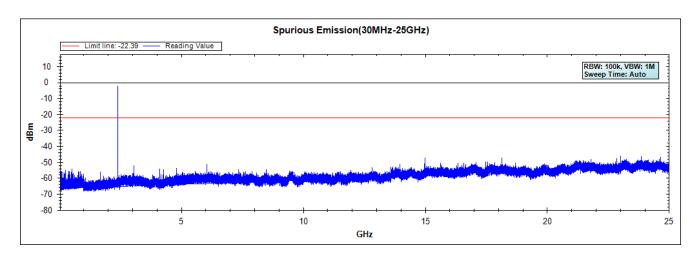




Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Figure Channel 39:

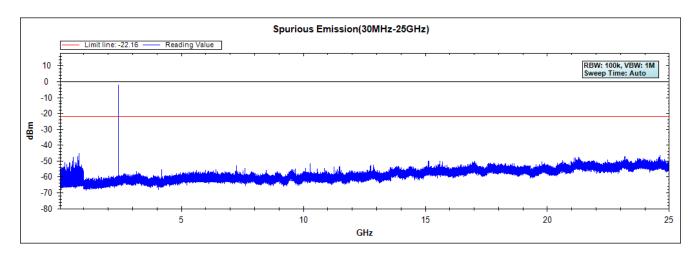




Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Figure Channel 78:

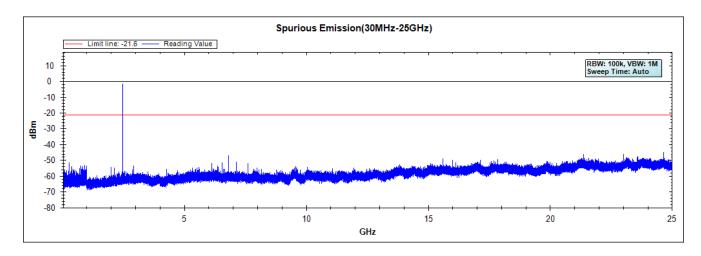




Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Figure Channel 00:

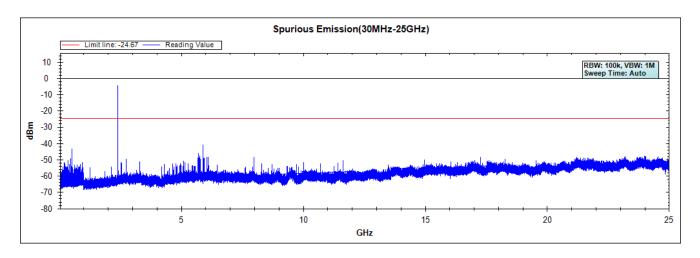




Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Figure Channel 39:

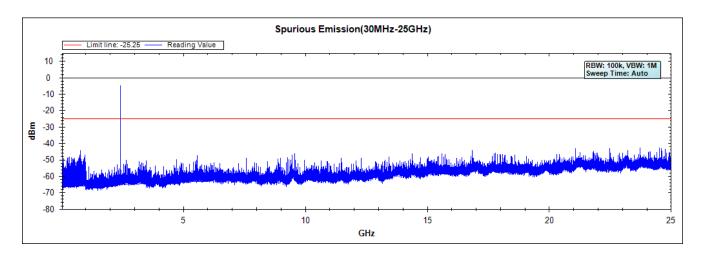




Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Figure Channel 78:

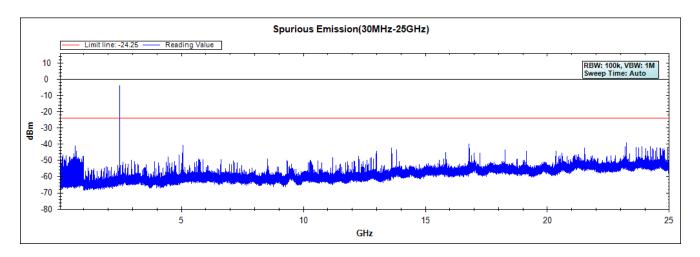



6. Band Edge

6.1. Test Equipment

RF Conducted Measurement

The following test equipments are used during the band edge tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A/MY48030495	Apr., 2014

RF Radiated Measurement:

The following test equipments are used during the band edge tests:

Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
⊠CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct, 2014
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar, 2015
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan, 2015
	X	Horn Antenna	TRC	AH-0801/95051	Aug, 2014
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan, 2015
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul, 2014
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul, 2014

Note: 1. All equipments are calibrated every one year.


2. The test instruments marked by "X" are used to measure the final test results.

Page: 35 of 72




6.2. Test Setup

RF Conducted Measurement



RF Radiated Measurement:

Above 1GHz

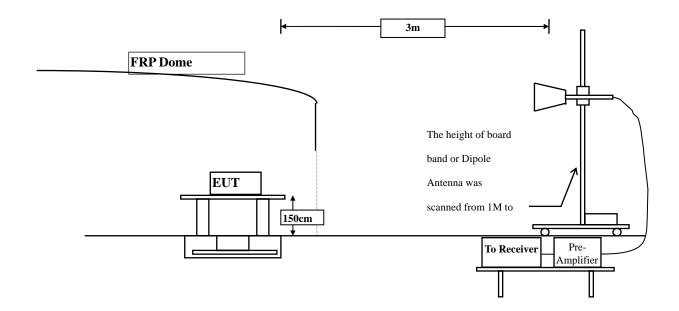



6.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.4. Test Procedure

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

6.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz



6.6. Test Result of Band Edge

Product : SwiftCam M3s Mobile Stabilizer

Test Item : Band Edge Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

RF Radiated Measurement (Horizontal):

		, ,					
Channel No.	Frequency	Correct Factor	Reading Level	Emission Level	Peak Limit	Average Limit	Result
Chamilei No.	(MHz)	(dB)	(dBµV)	$(dB\mu V/m)$	$(dB\mu V/m)$	$(dB\mu V/m)$	Kesuit
01 (Peak)	2389.200	-1.134	43.627	42.493	74.000	54.000	Pass
01 (Peak)	2390.000	-1.131	41.984	40.853	74.000	54.000	Pass
01 (Peak)	2402.200	-1.072	85.658	84.587			
01 (Average)	2386.000	-1.147	25.058	23.912	74.000	54.000	Pass
01 (Average)	2390.000	-1.131	24.209	23.078	74.000	54.000	Pass
01 (Average)	2402.000	-1.073	71.976	70.904			

Figure Channel 01:

Horizontal (Peak)


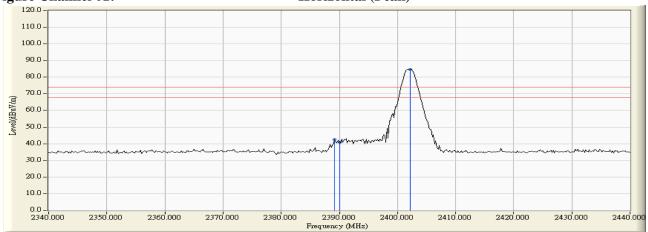


Figure Channel 01:

Horizontal (Average)



- 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
- 2. Peak measurements: RBW = 1MHz, VBW = 3MHz, Sweep: Auto.
- 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- 4. "*", means this data is the worst emission level.
- 5. Measurement Level = Reading Level + Correct Factor.
- 6. The average measurement was not performed when the peak measured data under the limit of average detection.

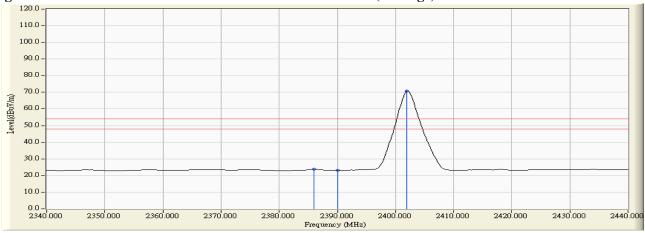

Test Item : Band Edge Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

RF Radiated Measurement (Vertical):

Channel No.	Frequency	Correct Factor	Reading Level	Emission Level	Peak Limit	Average Limit	Result
Chamie No.	(MHz)	(dB)	(dBµV)	$(dB\mu V/m)$	$(dB\mu V/m)$	$(dB\mu V/m)$	Kesuit
01 (Peak)	2389.200	-1.721	45.823	44.102	74.000	54.000	Pass
01 (Peak)	2390.000	-1.725	44.492	42.767	74.000	54.000	Pass
01 (Peak)	2402.200	-1.729	84.891	83.163		1	
01 (Average)	2390.000	-1.725	24.230	22.505	74.000	54.000	Pass
01 (Average)	2402.000	-1.729	71.301	69.572			



Vertical (Peak)


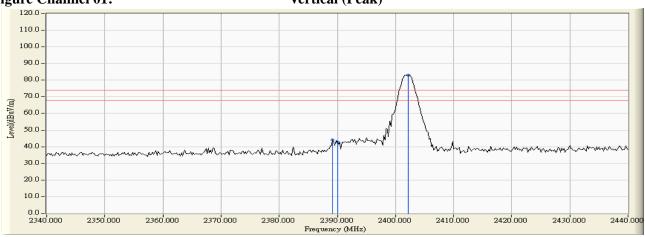


Figure Channel 01:

Vertical (Average)



- 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
- 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- 4. "*", means this data is the worst emission level.
- 5. Measurement Level = Reading Level + Correct Factor.
- 6. The average measurement was not performed when the peak measured data under the limit of average detection.

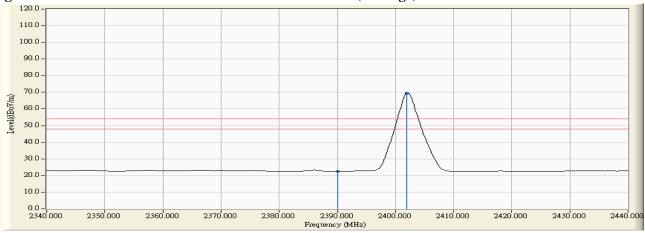

Test Item : Band Edge Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency	Correct Factor	Reading Level	Emission Level	Peak Limit	Average Limit	Result
Chamilei No.	(MHz)	(dB)	(dBµV)	$(dB\mu V/m)$	$(dB\mu V/m)$	$(dB\mu V/m)$	Kesuit
01 (Peak)	2480.100	-0.580	84.570	83.990			
01 (Peak)	2483.500	-0.558	48.106	47.548	74.000	54.000	Pass
01 (Average)	2480.100	-0.580	71.129	70.549			
01 (Average)	2483.500	-0.558	40.688	40.130	74.000	54.000	Pass

Figure Channel 01:

Horizontal (Peak)


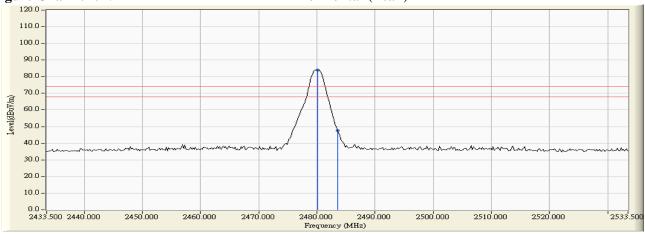


Figure Channel 01:

Horizontal (Average)



- 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
- 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- 4. "*", means this data is the worst emission level.
- 5. Measurement Level = Reading Level + Correct Factor.
- 6. The average measurement was not performed when the peak measured data under the limit of average detection.

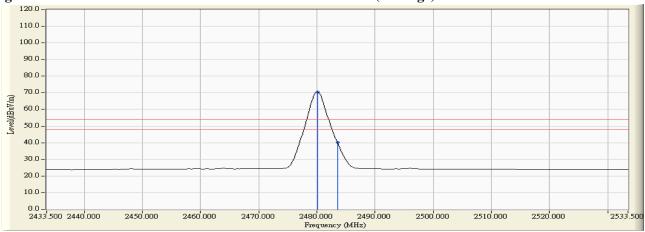

Test Item : Band Edge Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

RF Radiated Measurement (Vertical):

Channel No.	Frequency	Correct Factor	Reading Level	Emission Level	Peak Limit	Average Limit	Result
Chainlei No.	(MHz)	(dB)	(dBµV)	$(dB\mu V/m)$	$(dB\mu V/m)$	$(dB\mu V/m)$	Kesuit
01 (Peak)	2479.900	-1.325	78.333	77.008			
01 (Peak)	2483.500	-1.305	43.262	41.957	74.000	54.000	Pass
01 (Average)	2480.100	-1.324	66.368	65.044			
01 (Average)	2483.500	-1.305	35.873	34.568	74.000	54.000	Pass

Figure Channel 01:

Vertical (Peak)


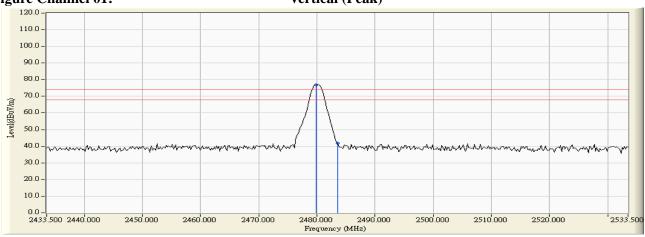


Figure Channel 01:

Vertical (Average)



- 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
- 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- 4. "*", means this data is the worst emission level.
- 5. Measurement Level = Reading Level + Correct Factor.
- 6. The average measurement was not performed when the peak measured data under the limit of average detection.

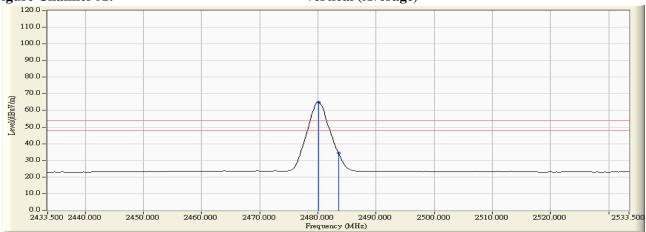

Test Item : Band Edge Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency	Correct Factor	Reading Level	Emission Level	Peak Limit	Average Limit	Result
Chainlei No.	(MHz)	(dB)	(dBµV)	$(dB\mu V/m)$	$(dB\mu V/m)$	$(dB\mu V/m)$	Kesuit
20 (Peak)	2390.000	-1.131	42.917	41.786	74.000	54.000	Pass
20 (Peak)	2402.200	-1.072	85.788	84.717			
20 (Average)	2390.000	-1.131	24.454	23.323	74.000	54.000	Pass
20 (Average)	2402.000	-1.073	70.730	69.658			

Figure Channel 20:

Horizontal (Peak)


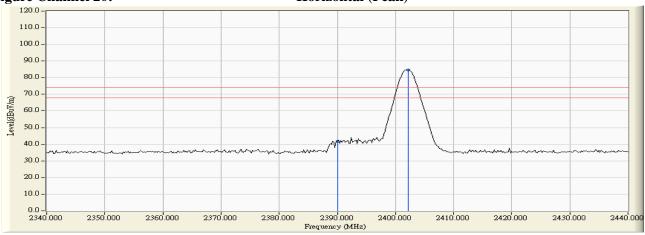


Figure Channel 20:

Horizontal (Average)



- 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
- 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- 4. "*", means this data is the worst emission level.
- 5. Measurement Level = Reading Level + Correct Factor.
- 6. The average measurement was not performed when the peak measured data under the limit of average detection.

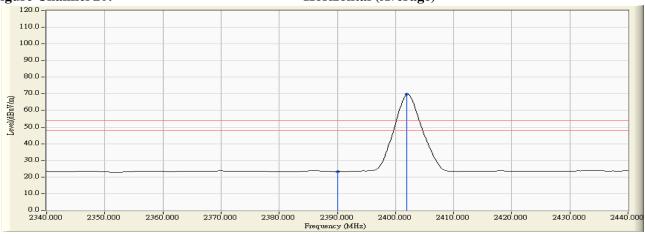

Test Item : Band Edge Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

RF Radiated Measurement (Vertical):

Channel No.	Frequency	Correct Factor	Reading Level	Emission Level	Peak Limit	Average Limit	Result
Chamie No.	(MHz)	(dB)	(dBµV)	$(dB\mu V/m)$	$(dB\mu V/m)$	$(dB\mu V/m)$	Kesuit
20 (Peak)	2389.200	-1.721	45.338	43.617	74.000	54.000	Pass
20 (Peak)	2390.000	-1.725	43.330	41.605	74.000	54.000	Pass
20 (Peak)	2402.200	-1.729	85.070	83.342			
20 (Average)	2390.000	-1.725	24.439	22.714	74.000	54.000	Pass
20 (Average)	2402.200	-1.729	70.153	68.425			



Vertical (Peak)


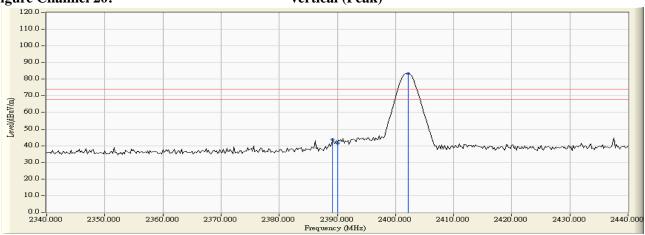


Figure Channel 20:

Vertical (Average)



- 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
- 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- 4. "*", means this data is the worst emission level.
- 5. Measurement Level = Reading Level + Correct Factor.
- 6. The average measurement was not performed when the peak measured data under the limit of average detection.

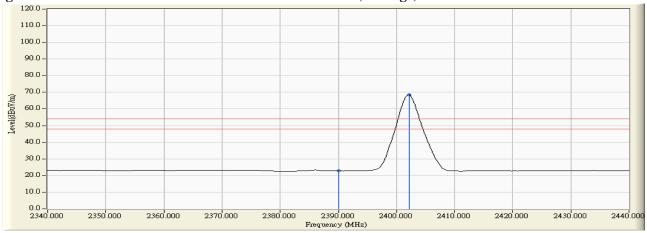

Test Item : Band Edge Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

RF Radiated Measurement (Horizontal):

		(
Channel No.	Frequency	Correct Factor	Reading Level	Emission Level	Peak Limit	Average Limit	Result
Chamilei No.	(MHz)	(dB)	(dBµV)	$(dB\mu V/m)$	$(dB\mu V/m)$	$(dB\mu V/m)$	Kesuit
20 (Peak)	2480.100	-0.580	84.566	83.986			
20 (Peak)	2483.500	-0.558	51.723	51.165	74.000	54.000	Pass
20 (Average)	2480.100	-0.580	69.685	69.105			
20 (Average)	2483.500	-0.558	40.606	40.048	74.000	54.000	Pass

Figure Channel 20:

Horizontal (Peak)


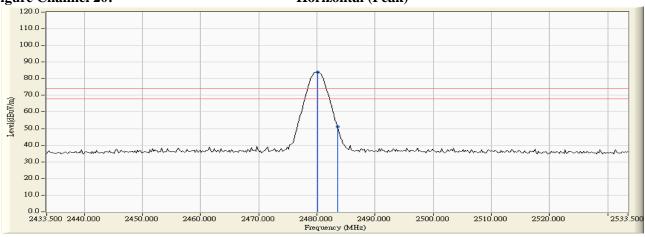


Figure Channel 20:

Horizontal (Average)



- 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
- 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- 4. "*", means this data is the worst emission level.
- 5. Measurement Level = Reading Level + Correct Factor.
- 6. The average measurement was not performed when the peak measured data under the limit of average detection.

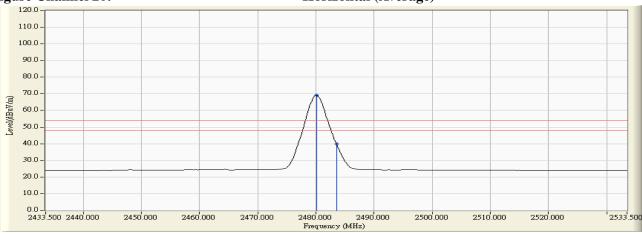

Test Item : Band Edge Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Peak Limit (dBµV/m)	Average Limit (dBµV/m)	Result
20 (Peak)	2479.700	-1.325	78.249	76.923			
20 (Peak)	2483.500	-1.305	45.305	44.000	74.000	54.000	Pass
20 (Average)	2480.100	-1.324	64.634	63.310			
20 (Average)	2483.500	-1.305	35.803	34.498	74.000	54.000	Pass

Figure Channel 20:

Vertical (Peak)


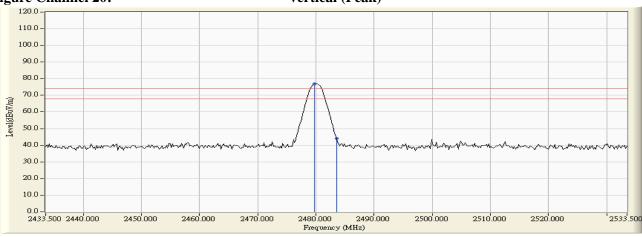


Figure Channel 20:

Vertical (Average)




- 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
- 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- 4. "*", means this data is the worst emission level.
- 5. Measurement Level = Reading Level + Correct Factor.
- 6. The average measurement was not performed when the peak measured data under the limit of average detection.

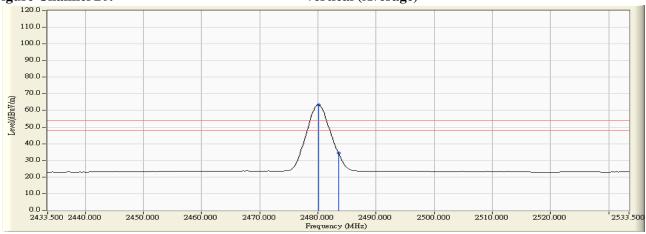

Test Item : Band Edge Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2402MHz)

Test Frequency	Measurement Level	Limit	Result
(MHz)	$\Delta \left(dB\right)$	Δ (dB)	
2400	38.61	>20	PASS

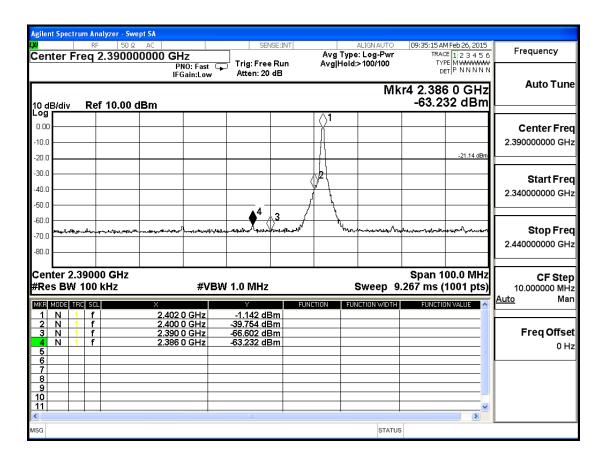




Test Item : Band Edge Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2480MHz)

Test Frequency	Measurement Level	Limit	Result
(MHz)	Δ (dB)	Δ (dB)	
2483.5	61.25	>20	PASS

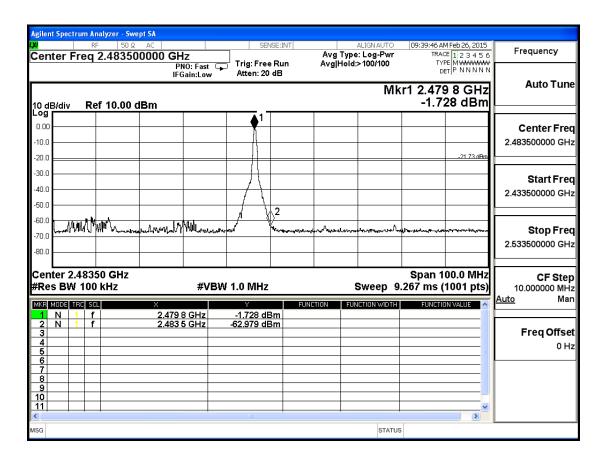




Test Item : Band Edge Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2402MHz)

Test Frequency	Measurement Level	Limit	Result
(MHz)	Δ (dB)	Δ (dB)	
2400	39.50	>20	PASS

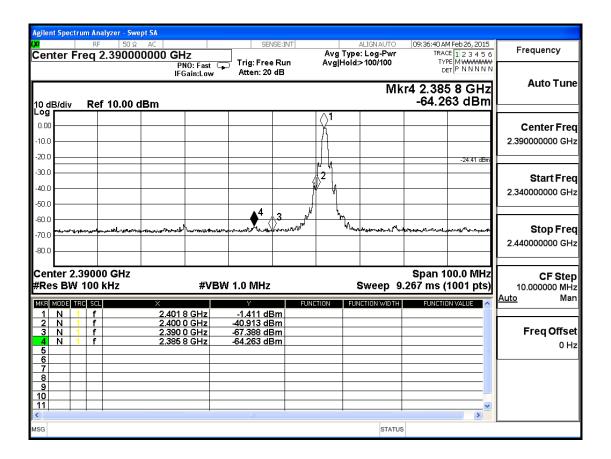




Test Item : Band Edge Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)

Test Frequency	Measurement Level	Limit	Result
(MHz)	$\Delta \left(\mathrm{dB}\right)$	Δ (dB)	
2483.5	53.17	>20	PASS

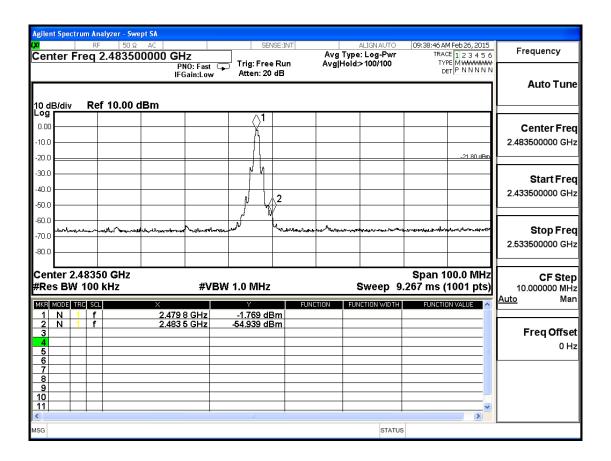



7. Channel Number


7.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note: 1. All equipments are calibrated every one year.

2. The test instruments marked by "X" are used to measure the final test results.

7.2. Test Setup



7.3. Limit

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.

7.4. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

7.5. Uncertainty

N/A



7.6. Test Result of Channel Number

Product : SwiftCam M3s Mobile Stabilizer

Test Item : Channel Number
Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Frequency Range	Measurement	Required Limit	Result	
(MHz)	(Hopping Channel)	(Hopping Channel)		
2402 ~ 2480 79		>75	Pass	


2402-2421MHz

2422-2441MHz



2442-2461MHz

2462-2480MHz

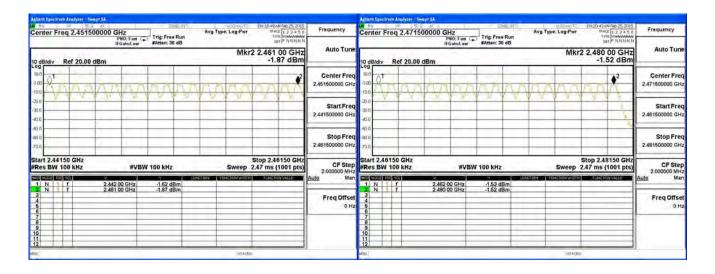




Test Item : Channel Number
Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Frequency Range	Measurement	Measurement Required Limit		
(MHz)	(Hopping Channel)	(Hopping Channel)	Result	
2402 ~ 2480 79		>75	Pass	


2402-2421MHz

2422-2441MHz

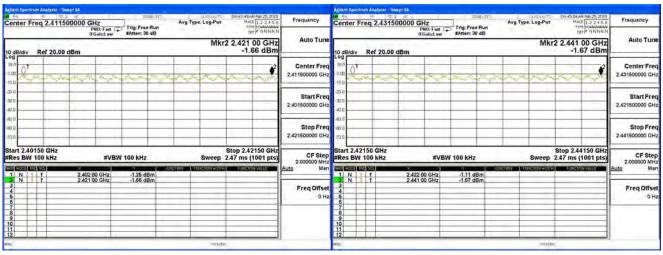

2442-2461MHz

2462-2480MHz

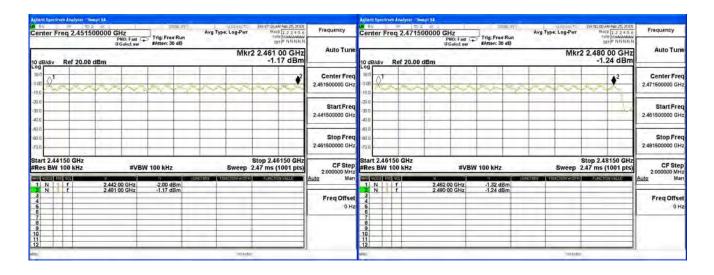



8. Channel Separation


8.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A/MY48030495	Apr., 2014

Note: 1. All equipments are calibrated every one year.

2. The test instruments mark by "X" are used to measure the final test results.

8.2. Test Setup



8.3. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

8.5. Uncertainty

 $\pm 150Hz$



8.6. Test Result of Channel Separation

Product : SwiftCam M3s Mobile Stabilizer

Test Item : Channel Separation


Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

	Fraguency	Measurement	Limit	Limit of (2/3)*20dB		
Channel No.	Frequency (MHz)	Level (kHz)	(kHz)	Bandwidth (kHz)	Result	
00	2402	1000	>25 kHz	780.0	Pass	
39	2441	1000	>25 kHz	780.0	Pass	
78	2480	1000	>25 kHz	766.7	Pass	


NOTE: The 20dB Bandwidth is refer to section 10.

Channel 00 2402MHz

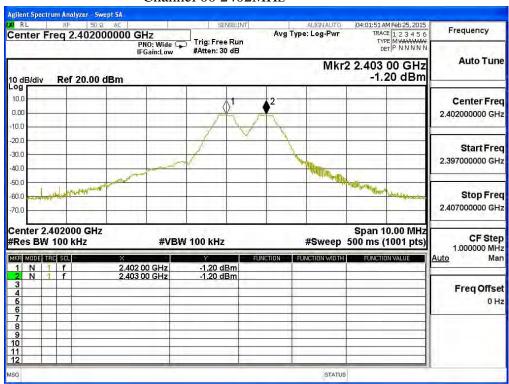




Channel 39 2441MHz

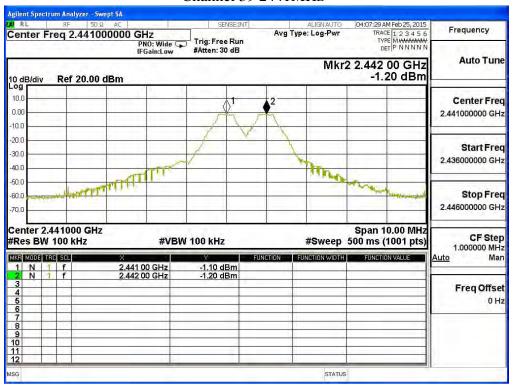

Channel 78 2480 MHz

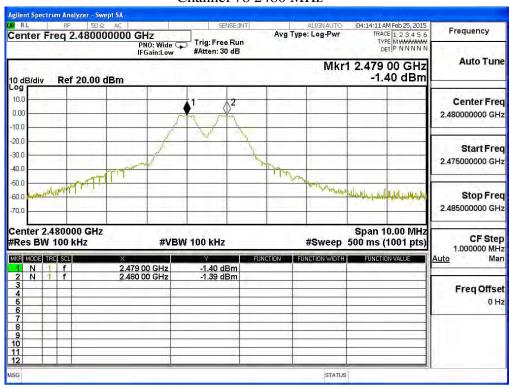



Test Item : Channel Separation


Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

	Eroguanov	Measurement	Limit	Limit of (2/3)*20dB	
Channel No.	Frequency (MHz)	Level	(kHz)	Bandwidth (kHz)	Result
		(kHz)	(KIIZ)	Dandwidth (KHZ)	
00	2402	1000	>25 kHz	986.7	Pass
39	2441	1000	>25 kHz	973.3	Pass
78	2480	1000	>25 kHz	960.0	Pass

NOTE: The 20dB Bandwidth is refer to section 10.

Channel 00 2402MHz

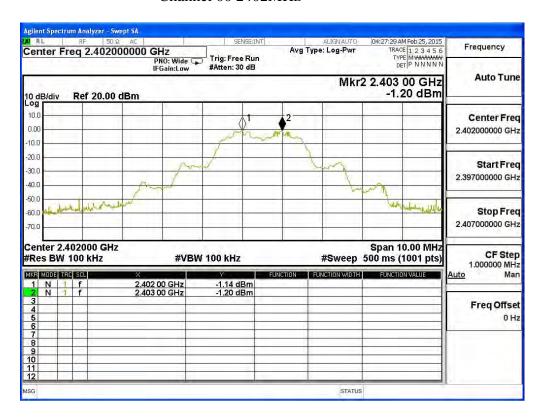




Channel 39 2441MHz



Channel 78 2480 MHz

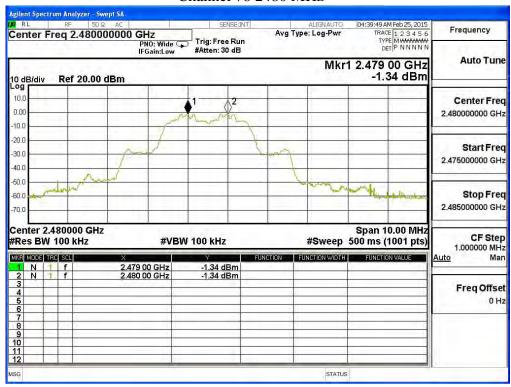



9. Dwell Time


9.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A/MY48030495	Apr., 2014

Note: 1. All equipments are calibrated every one year.

2. The test instruments marked by "X" are used to measure the final test results.

9.2. Test Setup



9.3. Limit

The dwell time shall be the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

9.4. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

9.5. Uncertainty

± 25msec



9.6. Test Result of Dwell Time

Product : SwiftCam M3s Mobile Stabilizer

Test Item : Dwell Time
Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (Channel 00,39,78 –DH5)


Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.900	13	50	0.75	0.302	0.4	Pass
2441	2.900	13	50	0.75	0.302	0.4	Pass
2480	2.900	14	50	0.81	0.325	0.4	Pass

Duty cycle =((Time slot length(ms)*Hopping of Number) / Sweep time (ms)

Dwell time = (Duty cycle /79) * (79*0.4)


CH 00 Time Interval between hops

CH 00 Transmission Time

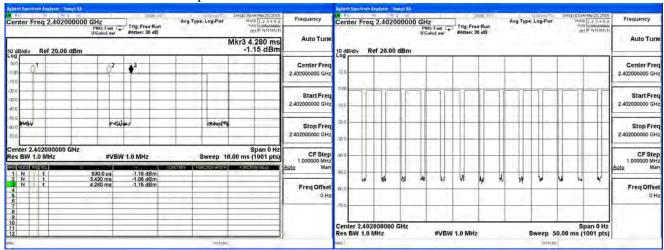

CH39 Time Interval between hops

CH 39Transmission Time

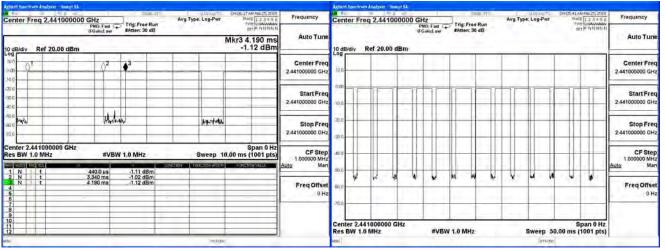


Page: 59 of 72



CH 78 Time Interval between hops

CH 78 Transmission Time

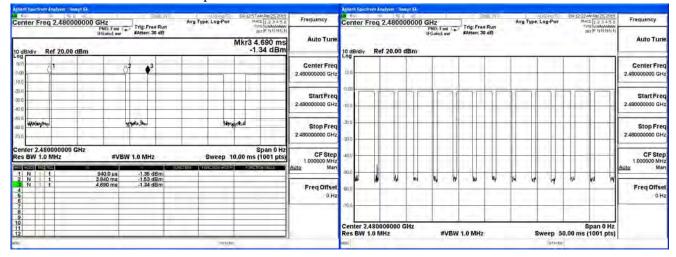

Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.



Test Item : Dwell Time Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (Channel 00,39,78 –DH5)


Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.910	14	50	0.81	0.326	0.4	Pass
2441	2.910	14	50	0.81	0.326	0.4	Pass
2480	2.910	13	50	0.76	0.303	0.4	Pass

Duty cycle =((Time slot length(ms)*Hopping of Number) / Sweep time (ms)

Dwell time = (Duty cycle /79) * (79*0.4)


CH 00 Time Interval between hops

CH 00 Transmission Time

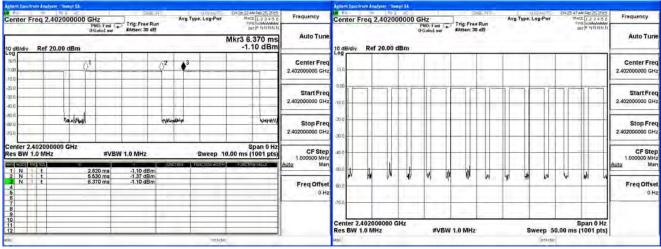

CH39 Time Interval between hops


CH 39Transmission Time

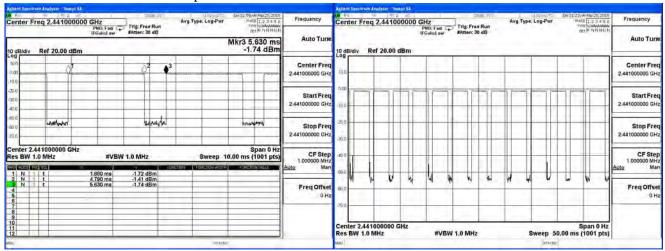



CH 78 Time Interval between hops

CH 78 Transmission Time

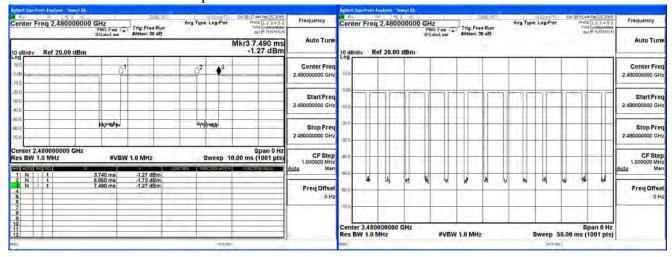

Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.



10. Occupied Bandwidth


10.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note: 1. All equipments are calibrated every one year.

2. The test instruments marked by "X" are used to measure the final test results.

10.2. Test Setup



10.3. Limits

N/A

10.4. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

10.5. Uncertainty

± 150Hz



10.6. Test Result of Occupied Bandwidth

Product : SwiftCam M3s Mobile Stabilizer


Test Item : Occupied Bandwidth Data

Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1170		NA

Figure Channel 00:

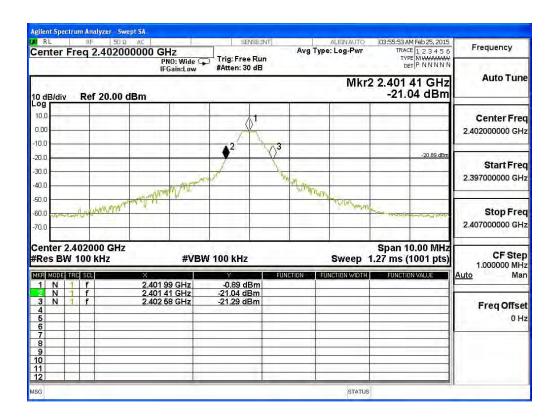




Test Item : Occupied Bandwidth Data

Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2441	1170		NA

Figure Channel 39:

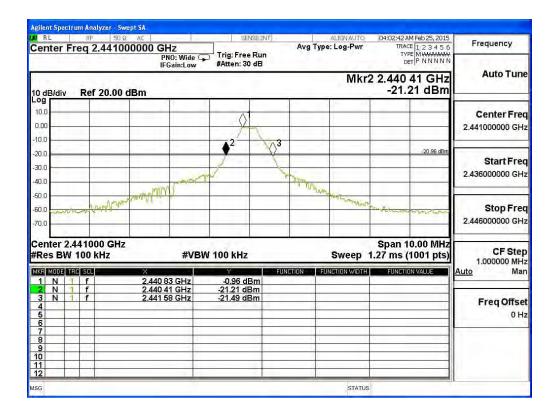




Test Item : Occupied Bandwidth Data

Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
78	2480	1150		NA

Figure Channel 78:

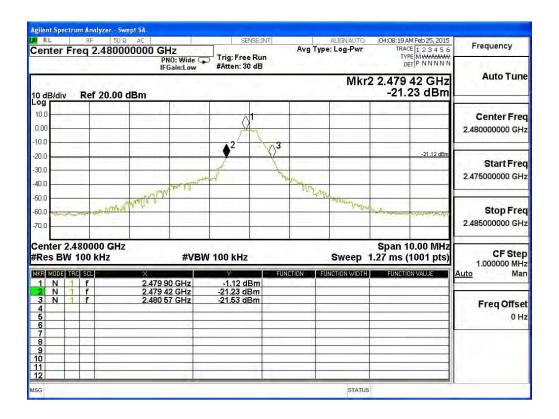




Test Item : Occupied Bandwidth Data

Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1480		NA

Figure Channel 00:

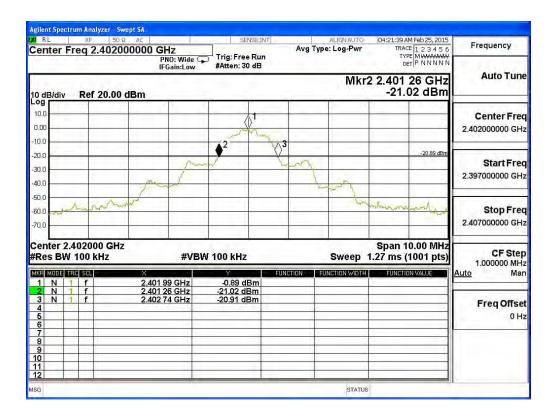




Test Item : Occupied Bandwidth Data

Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2441	1460		NA

Figure Channel 39:

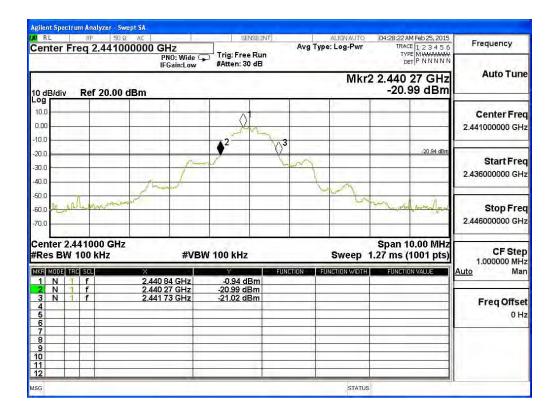




Test Item : Occupied Bandwidth Data

Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)(2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
78	2480	1440		NA

Figure Channel 78:

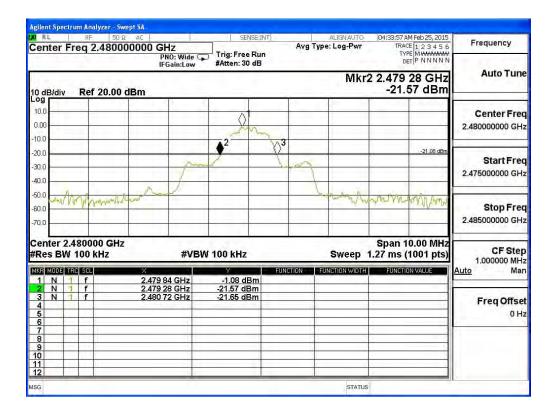



11. EMI Reduction Method During Compliance Testing

No modification was made during testing.