FCC Test Report

Report No.: AGC08551161101FE03

FCC ID : 2AEFH-MD001

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Mind-Batman Cerebral Combat Trainer

BRAND NAME : Soap Studio

MODEL NAME : MD-001

CLIENT : Soap Studio Company Limited

DATE OF ISSUE : Dec.05, 2016

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Rules

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report No.: AGC08551161101FE03 Page 2 of 75

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec.05, 2016	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
3. MEASUREMENT UNCERTAINTY	7
4. DESCRIPTION OF TEST MODES	7
5. SYSTEM TEST CONFIGURATION	9
5.1. CONFIGURATION OF EUT SYSTEM	9
5.2. EQUIPMENT USED IN EUT SYSTEM	9
5.3. SUMMARY OF TEST RESULTS	9
6. TEST FACILITY	10
7. ALL TEST EQUIPMENT LIST	10
8. RADIATED EMISSION	12
8.1TEST LIMIT	12
8.2. MEASUREMENT PROCEDURE	13
8.3. TEST SETUP	15
8.4. TEST RESULT	17
9. BAND EDGE EMISSION	46
9.1. MEASUREMENT PROCEDURE	46
9.2 TEST SETUP	46
9.3 RADIATED TEST RESULT	47
10. 20DB BANDWIDTH	55
10.1. MEASUREMENT PROCEDURE	55
10.2. TEST SET-UP	55
10.3. LIMITS AND MEASUREMENT RESULTS	55
11. FCC LINE CONDUCTED EMISSION TEST	64
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	64
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	64
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	65
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	65
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	65
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	66
APPENDIX B: PHOTOGRAPHS OF EUT	68

Page 4 of 75

1. VERIFICATION OF CONFORMITY

Applicant	Soap Studio Company Limited
Address	Room 1302, 13/F, Tai Sang Bank Building, 130-132 Des Voeux Road, Central, Hong Kong
Manufacturer	Shenzhen EEGSmart Technology Co.,Ltd
Address	Room 1107, Hangsheng, 6 Gaoxin Road South, High-Tech Industrial Park, Nanshan, Shenzhen, 518057
Product Designation	Mind-Batman Cerebral Combat Trainer
Brand Name	Soap Studio
Test Model	MD-001
Date of test	Nov.19, 2016 to Nov.22, 2016
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

Tested By	Service Liang	
-	Strive Liang(Liang Faqiang)	Nov.22, 2016
Reviewed By	Lowesto ce	
	Forrest Lei(Lei Yonggang)	Dec.05, 2016
Approved By	Solya shong	
· -	Solger Zhang(Zhang Hongyi) Authorized Officer	Dec.05, 2016

Page 5 of 75

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

2.402 GHz to 2.480GHz
3.69dBm(Max EIRP Power=Max radiation field-95.2)
V4.0
GFSK, π /4-DQPSK, 8DPSK for BR/EDR, GFSK for BLE
79 for BR/EDR, 40 for BLE
V1.3
5.2.3,20160930
PCB Antenna
1.5dBi
DC 3.7V

Note: 1. The USB port only used for charging and can't be used to transfer data with PC.

2. The BT function of EUT didn't work when charging.

2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR channel List

Frequency Band	Channel Number	Frequency
	0	2402MHz
	1	2403MHz
	:	:
	38	2440 MHz
2400~2483.5MHZ	39	2441 MHz
	40	2442 MHz
	••	·
	77	2479 MHz
	78	2480 MHz

Report No.: AGC08551161101FE03 Page 6 of 75

BLE Channel List

Frequency Band	Channel Number	Frequency
	0	2402MHz
	1	2404MHz
2400~2483.5MHZ	:	:
	38	2478 MHz
	39	2480 MHz

Page 7 of 75

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y $\pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 % \circ


No.	Item	Uncertainty
1	Conducted Emission Test	±3.18dB
2	All emissions,radiated	±3.91dB
3	Temperature	±0.5°C
4	Humidity	±2%

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION	
1	Low channel GFSK	
2	Middle channel GFSK	
3	High channel GFSK	
4	Low channel π /4-DQPSK	
5	Middle channel π /4-DQPSK	
6	High channel π /4-DQPSK	
7	Low channel 8DPSK	
8	Middle channel 8DPSK	
9	High channel 8DPSK	
10	BT Link	

Note:

- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.

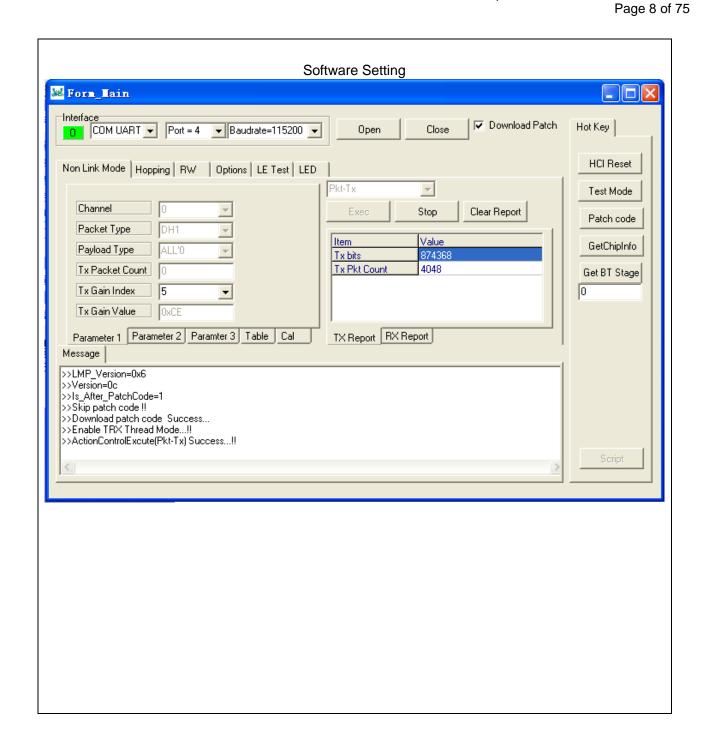

Page 9 of 75

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Mind-Batman Cerebral Combat Trainer	Soap Studio	MD-001	EUT
2	Battery	SL	802030	Accessory
3	PC	Sony	E1412AYCW	A.E
4	Control box	SERIAL	N/A	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a)	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	N/A
§15.215	Bandwidth	Compliant

Note: N/A means it's not applicable to this item.

Page 10 of 75

6. TEST FACILITY

Site Dongguan Precise Testing Service Co., Ltd.	
Location Building D,Baoding Technology Park,Guangming Road2,Dongcheng Did Dongguan, Guangdong, China,	
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.

TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013

7. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHz)

	Radiated Emission Test Site								
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration				
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101417	July 4, 2016	July 3, 2017				
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2016	July 3, 2017				
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2016	July 3, 2017				
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2016	July 3, 2017				
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017				
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A				
Active loop antenna (9K-30MHz)	SCHWARZBECK	FMZB1519	1519-038	June 6, 2016	June 5, 2017				
Spectrum analyzer	AGILENT	E4407B	MY46185649	June 6, 2016	June 5, 2017				
Radiation Cable 1	MXT	RS1	R005	June 6, 2016	June 5, 2017				
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017				

Report No.: AGC08551161101FE03 Page 11 of 75

FOR RADIATED EMISSION TEST (1GHz ABOVE)

TORTOLON (TEB EIVIIO	Radiated Emission Test Site								
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration				
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101417	July 4, 2016	July 3, 2017				
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2016	July 10, 2017				
Spectrum Analyzer	AGILENT	E4411B	MY4511453	July 4, 2016	July 3, 2017				
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2016	July 6, 2017				
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2016	July 7, 2017				
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017				
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A				
Horn Ant (18G-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	June 6, 2016	June 5, 2017				
Radiation Cable 1	MXT	RS1	R005	June 6, 2016	June 5, 2017				
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017				

Page 12 of 75

8. RADIATED EMISSION

8.1TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics
	(millivolts/meter)	(microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency	Distance	Field Stre	ngths Limit			
(MHz)	Meters	μ V/m	dB(μV)/m			
0.009 ~ 0.490	300	2400/F(kHz)				
0.490 ~ 1.705	30	24000/F(kHz)				
1.705 ~ 30	30	30				
30 ~ 88	3	100	40.0			
88 ~ 216	3	150	43.5			
216 ~ 960	3	200	46.0			
960 ~ 1000	3	500	54.0			
Above 1000	3	Other:74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average)				

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Page 13 of 75

8.2. MEASUREMENT PROCEDURE

1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)

- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- 3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak&AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

Report No.: AGC08551161101FE03 Page 14 of 75


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/10Hz for Average
Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Report No.: AGC08551161101FE03 Page 15 of 75

8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

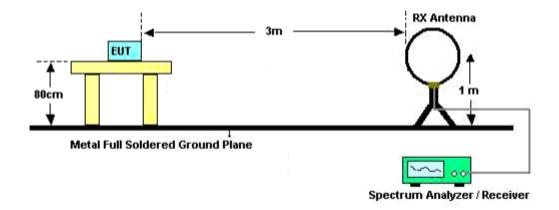

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

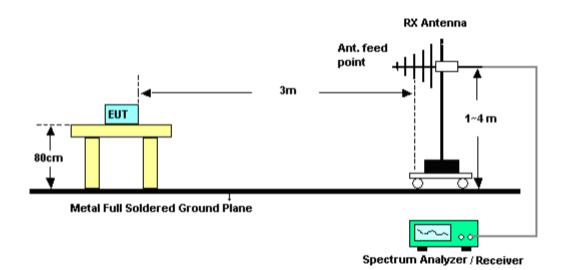

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

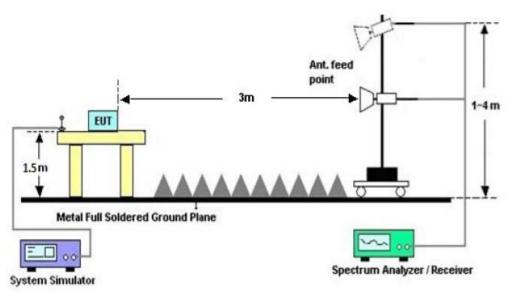

Report No.: AGC08551161101FE03 Page 17 of 75

8.4. TEST RESULT

(Worst modulation:GFSK)

FOR BR/EDR


RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

Page 18 of 75

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

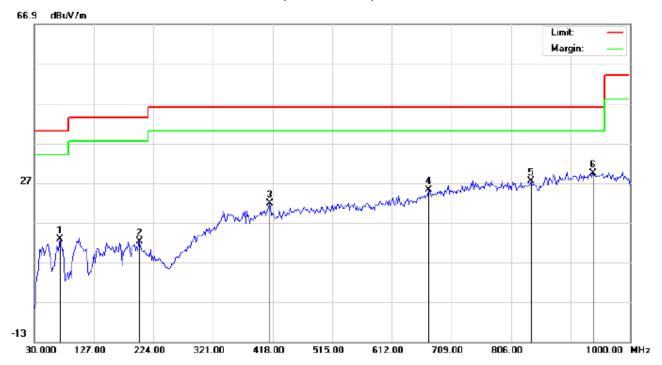

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Mind-Batman Cerebral Combat Trainer

M/N: MD-001

Mode:Low Channel TX

Note:


Polarization: *Horizontal* Temperature: 22.6 Power: Humidity: 53.6 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		72.0332	4.49	8.28	12.77	40.00	-27.23	peak			
2		201.3667	0.33	11.86	12.19	43.50	-31.31	peak			
3		413.1499	2.42	19.47	21.89	46.00	-24.11	peak			
4		671.8166	0.78	24.43	25.21	46.00	-20.79	peak			
5		838.3333	0.02	27.31	27.33	46.00	-18.67	peak			
6	*	940.1833	-0.30	29.73	29.43	46.00	-16.57	peak		·	

Page 19 of 75

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

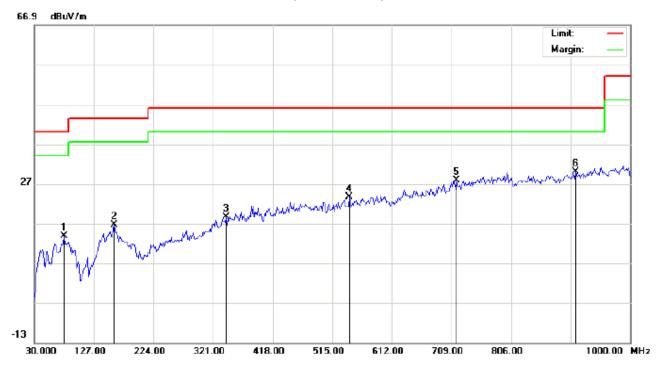

Site: site #1 Limit: FCC Class B 3M Radiation

Power:

Vertical

Polarization:

Temperature: 22.6 Humidity: 53.6 %

EUT: Mind-Batman Cerebral Combat Trainer

Distance:

M/N: MD-001

Mode:Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		78.5000	11.70	2.17	13.87	40.00	-26.13	peak			
2		159.3333	1.26	15.33	16.59	43.50	-26.91	peak			
3		342.0167	0.40	18.21	18.61	46.00	-27.39	peak			
4		542.4832	1.41	22.28	23.69	46.00	-22.31	peak			
5		717.0833	2.14	25.68	27.82	46.00	-18.18	peak			
6	*	911.0833	0.99	28.92	29.91	46.00	-16.09	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.

Temperature: 22.6

Humidity: 53.6 %

Page 20 of 75

RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

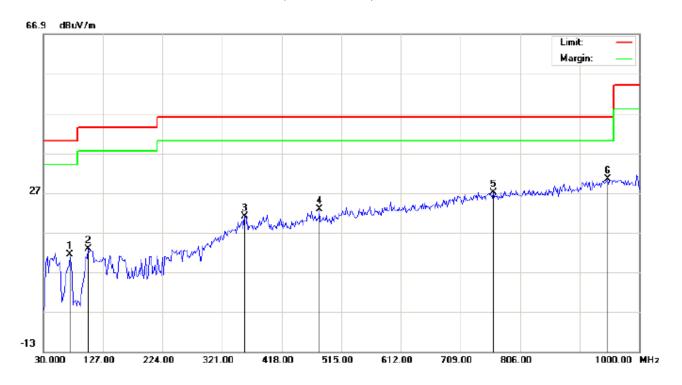

Polarization: Horizontal

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Mind-Batman Cerebral Combat Trainer

M/N: MD-001

Mode:Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		73.6500	4.62	6.70	11.32	40.00	-28.68	peak			
2		102.7500	2.96	9.84	12.80	43.50	-30.70	peak			
3		358.1831	2.17	18.79	20.96	46.00	-25.04	peak			
4		479.4331	1.80	20.91	22.71	46.00	-23.29	peak			
5		762.3500	0.30	26.80	27.10	46.00	-18.90	peak			
6	*	948.2667	0.44	29.95	30.39	46.00	-15.61	peak			

Power:


Distance:

Temperature: 22.6

Humidity: 53.6 %

Page 21 of 75

RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

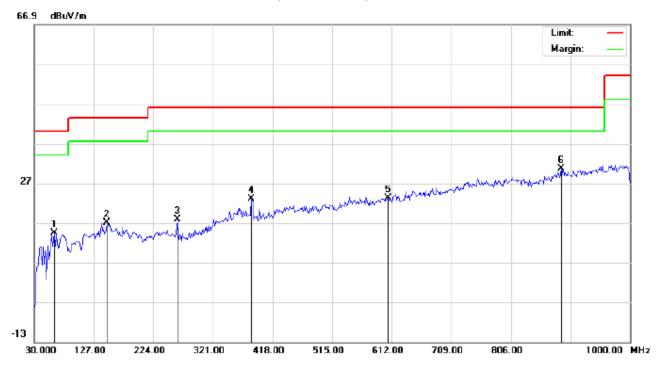

Polarization: Vertical

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Mind-Batman Cerebral Combat Trainer

M/N: MD-001

Mode:Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		62.3333	7.08	7.24	14.32	40.00	-25.68	peak			
2		148.0166	1.82	15.25	17.07	43.50	-26.43	peak			
3		262.8000	3.44	14.29	17.73	46.00	-28.27	peak			
4		384.0500	3.97	18.96	22.93	46.00	-23.07	peak			
5		605.5333	0.33	22.85	23.18	46.00	-22.82	peak			
6	*	888.4500	2.26	28.31	30.57	46.00	-15.43	peak			

Power:

Distance:

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 22 of 75

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL



Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Mind-Batman Cerebral Combat Trainer

M/N: MD-001

Mode:High Channel TX

Note:

Polarization: Horizontal Temperature: 22.6
Power: Humidity: 53.6 %

Distance:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu√/m	dBu√/m	dB		cm	degree	
1		73.6500	5.28	6.70	11.98	40.00	-28.02	peak			
2		138.3165	0.82	14.41	15.23	43.50	-28.27	peak			
3		219.1500	2.46	10.05	12.51	46.00	-33.49	peak			
4		359.8000	1.10	18.80	19.90	46.00	-26.10	peak			
5		720.3165	0.56	25.77	26.33	46.00	-19.67	peak			
6	*	924.0167	1.56	29.28	30.84	46.00	-15.16	peak			

Temperature: 22.6

Humidity: 53.6 %

Page 23 of 75

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

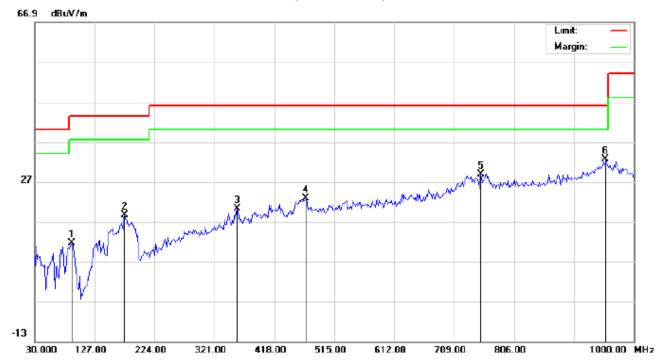

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Mind-Batman Cerebral Combat Trainer

M/N: MD-001

Mode:High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		89.8164	6.22	5.31	11.53	43.50	-31.97	peak	·	·	
2		175.5000	4.16	14.35	18.51	43.50	-24.99	peak			
3		358.1831	1.41	18.79	20.20	46.00	-25.80	peak			
4		469.7332	2.01	20.80	22.81	46.00	-23.19	peak			
5		752.6499	2.19	26.67	28.86	46.00	-17.14	peak		·	
6	*	954.7332	2.66	29.95	32.61	46.00	-13.39	peak			

Power:

Distance:

Polarization: Vertical

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 24 of 75


FOR BLE

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

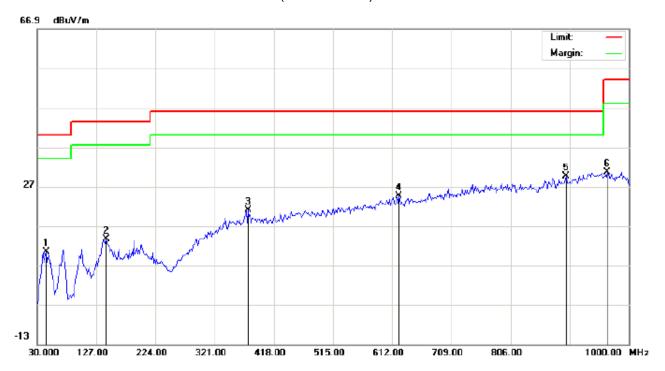

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Mind-Batman Cerebral Combat Trainer

M/N: MD-001

Mode:Low Channel TX

Note:

Polarization:	Horizontal	Temperature: 22.6
Power:		Humidity: 53.6 %


Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		44.5500	-1.11	11.60	10.49	40.00	-29.51	peak			
2		143.1667	-0.86	14.43	13.57	43.50	-29.93	peak			
3		375.9667	2.14	18.91	21.05	46.00	-24.95	peak			
4		623.3167	0.87	23.79	24.66	46.00	-21.34	peak			
5	*	896.5333	1.17	28.52	29.69	46.00	-16.31	peak			
6		964.4333	0.77	29.86	30.63	54.00	-23.37	peak			

Humidity: 53.6 %

Page 25 of 75

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

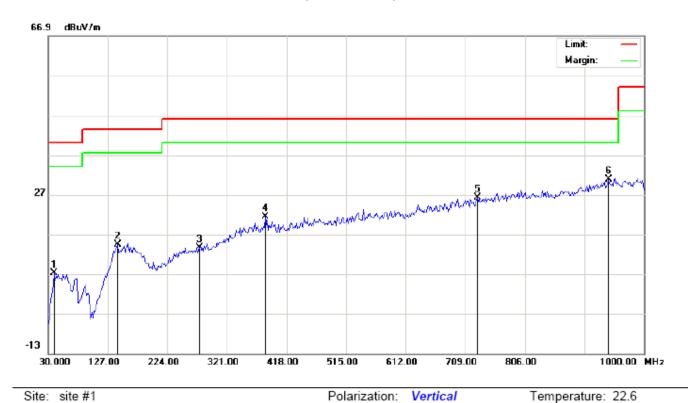

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Mind-Batman Cerebral Combat Trainer

M/N: MD-001

Mode:Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		39.7000	-1.29	8.51	7.22	40.00	-32.78	peak			
2		143.1667	-0.86	15.22	14.36	43.50	-29.14	peak			
3		275.7333	-1.07	14.68	13.61	46.00	-32.39	peak			
4		384.0500	2.48	18.96	21.44	46.00	-24.56	peak			
5		728.4000	0.15	26.01	26.16	46.00	-19.84	peak			
6	*	941.8000	1.05	29.77	30.82	46.00	-15.18	peak			

Power:

Distance:


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 26 of 75

RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

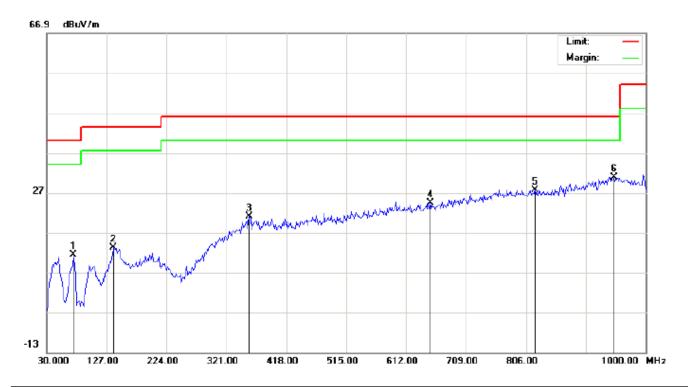

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Mind-Batman Cerebral Combat Trainer

M/N: MD-001

Mode:Middle Channel TX

Note:


Polarization: *Horizontal* Temperature: 22.6 Power: Humidity: 53.6 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		73.6500	4.62	6.70	11.32	40.00	-28.68	peak			
2		138.3167	-1.28	14.41	13.13	43.50	-30.37	peak			
3		358.1833	2.17	18.79	20.96	46.00	-25.04	peak			
4		650.8000	0.49	23.87	24.36	46.00	-21.64	peak			
5		820.5500	0.37	27.32	27.69	46.00	-18.31	peak			
6	*	948.2667	0.94	29.95	30.89	46.00	-15.11	peak			

Page 27 of 75

RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

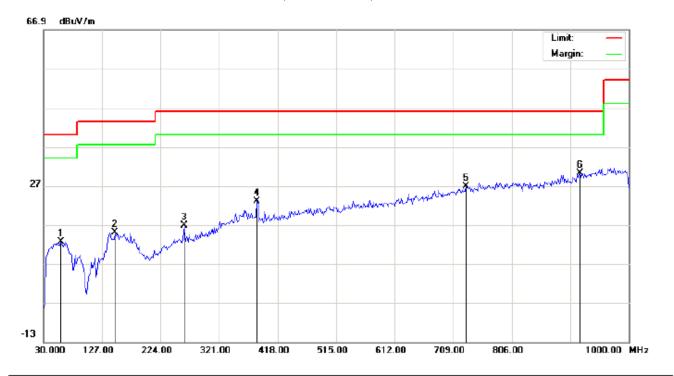

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Mind-Batman Cerebral Combat Trainer

M/N: MD-001

Mode:Middle Channel TX

Note:

Polarization: Ve	rtical Te	emperatur	e: 22.6
Power:	H	umidity: 5	53.6 %
Distance:			

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		59.1000	4.51	8.16	12.67	40.00	-27.33	peak			
2		148.0167	-0.18	15.25	15.07	43.50	-28.43	peak			
3		262.8000	2.44	14.29	16.73	46.00	-29.27	peak			
4		384.0500	3.97	18.96	22.93	46.00	-23.07	peak			
5		730.0167	0.70	26.05	26.75	46.00	-19.25	peak			
6	*	919.1667	1.16	29.14	30.30	46.00	-15.70	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 28 of 75

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

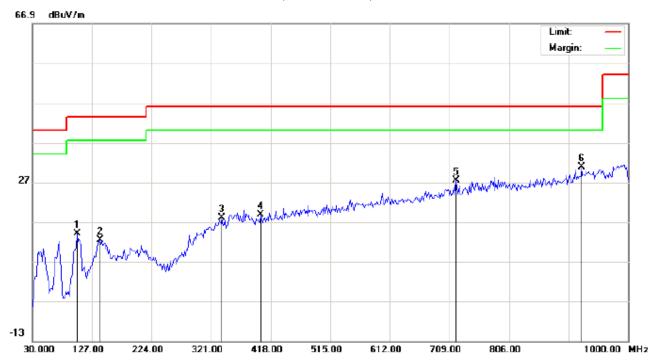

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Mind-Batman Cerebral Combat Trainer

M/N: MD-001

Mode:High Channel TX

Note:

Polarization: Horizontal Temperature: 22.6
Power: Humidity: 53.6 %

Distance:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		102.7500	4.19	9.84	14.03	43.50	-29.47	peak			
2		139.9333	-2.78	15.17	12.39	43.50	-31.11	peak			
3		338.7833	0.06	17.99	18.05	46.00	-27.95	peak			
4		401.8333	-0.42	19.13	18.71	46.00	-27.29	peak			
5		720.3167	1.55	25.78	27.33	46.00	-18.67	peak			
6	*	924.0167	1.56	29.28	30.84	46.00	-15.16	peak			

Temperature: 22.6

Humidity: 53.6 %

Page 29 of 75

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

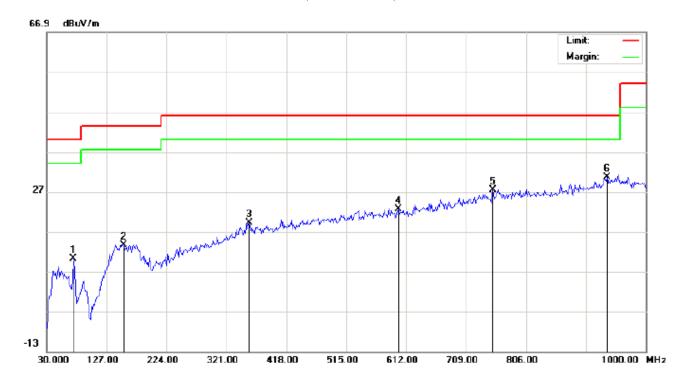

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Mind-Batman Cerebral Combat Trainer

M/N: MD-001

Mode:High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		73.6500	6.91	3.36	10.27	40.00	-29.73	peak			
2		154.4832	-1.62	15.29	13.67	43.50	-29.83	peak			
3		358.1833	0.41	18.79	19.20	46.00	-26.80	peak			
4		599.0667	-0.17	22.73	22.56	46.00	-23.44	peak			
5		752.6500	0.69	26.67	27.36	46.00	-18.64	peak			
6	*	936.9500	0.94	29.64	30.58	46.00	-15.42	peak		·	

Polarization:

Power:

Distance:

Vertical

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


Page 30 of 75

RADIATED EMISSION ABOVE 1GHz

(Worst modulation: GFSK)

FOR BR/EDR

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

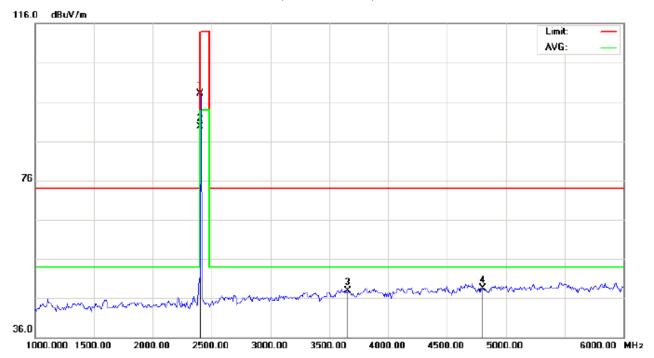

Site: site #1 Polarization: Horizontal Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 53.6 %

EUT:Mind-Batman Cerebral Combat Trainer Distance:

M/N: MD-001


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	87.71	10.32	98.03	114.00	-15.97	peak			
2	*	2402.000	79.33	10.32	89.65	94.00	-4.35	AVG	100	85	
3		3659.000	34.79	13.09	47.88	74.00	-26.12	peak			
4		4804.000	40.74	7.69	48.43	74.00	-25.57	peak			

Page 31 of 75

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

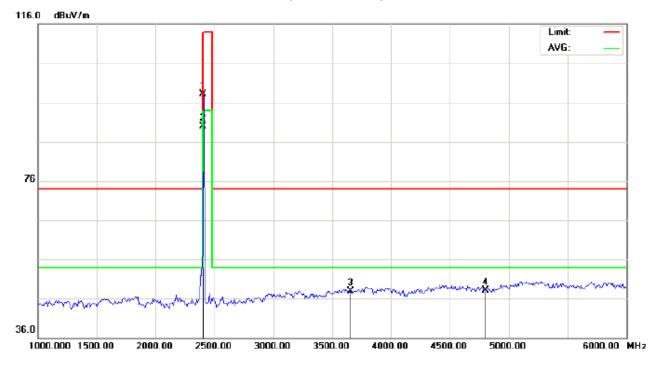

Site: site #1 Polarization: Vertical Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 53.6 %

EUT: Mind-Batman Cerebral Combat Trainer Distance:

M/N: MD-001


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	87.82	10.32	98.14	114.00	-15.86	peak			
2	*	2402.000	79.56	10.32	89.88	94.00	-4.12	AVG	100	83	
3		3659.000	34.90	13.09	47.99	74.00	-26.01	peak			
4		4804.000	40.38	7.69	48.07	74.00	-25.93	peak			

Page 32 of 75

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

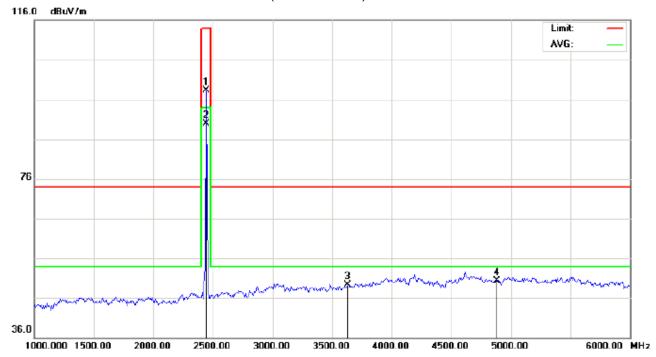

Site: site #1 Polarization: Horizontal Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 53.6 %

EUT: Mind-Batman Cerebral Combat Trainer Distance:

M/N: MD-001


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1		2441.000	87.99	10.36	98.35	114.00	-15.65	peak			
2	*	2441.000	79.56	10.36	89.92	94.00	-4.08	AVG	100	78	
3		3629.000	36.36	12.90	49.26	74.00	-24.74	peak			
4		4882.000	42.38	7.89	50.27	74.00	-23.73	peak			

Page 33 of 75

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

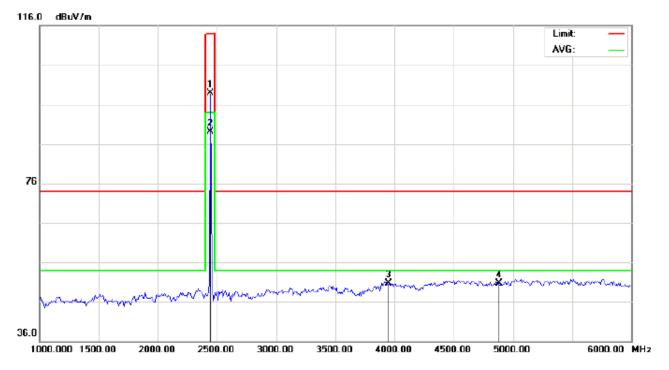

Site: site #1 Polarization: Vertical Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 53.6 %

EUT: Mind-Batman Cerebral Combat Trainer Distance:

M/N: MD-001


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2441.000	88.53	10.36	98.89	114.00	-15.11	peak			
2	*	2441.000	78.66	10.36	89.02	94.00	-4.98	AVG	100	82	
3		3953.000	35.78	14.90	50.68	74.00	-23.32	peak			
4		4882.000	42.81	7.89	50.70	74.00	-23.30	peak			

Page 34 of 75

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

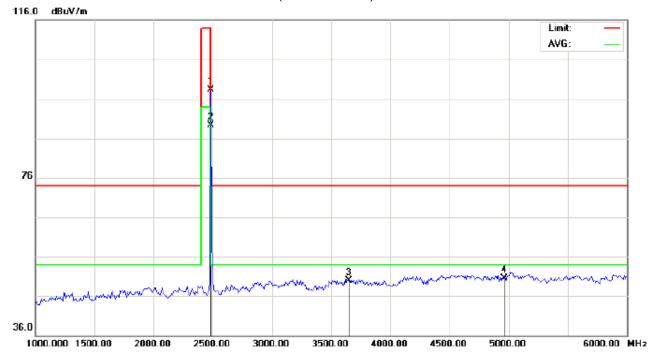

Site: site #1 Polarization: Horizontal Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 53.6 %

EUT:Mind-Batman Cerebral Combat Trainer Distance:

M/N: MD-001


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	87.97	10.41	98.38	114.00	-15.62	peak			
2	*	2480.000	78.80	10.41	89.21	94.00	-4.79	AVG	100	78	
3		3648.000	36.79	13.02	49.81	74.00	-24.19	peak			
4		4960.000	42.51	8.09	50.60	74.00	-23.40	peak			

Page 35 of 75

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

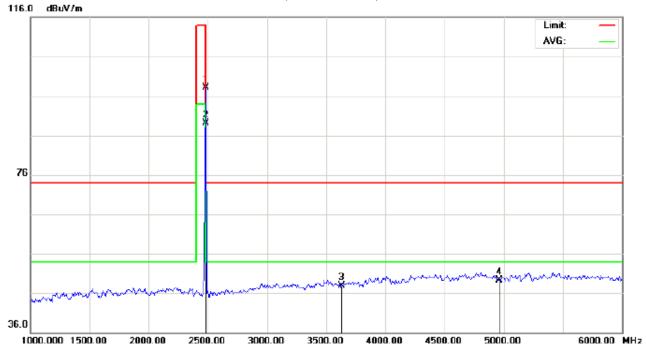

Temperature: 22.7 Site: site #1 Polarization: Vertical Limit: FCC Class B 3M Radiation above 1GHZ(PK)-Power: Humidity: 53.6 %

EUT:Mind-Batman Cerebral Combat Trainer

Distance:

M/N: MD-001

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	87.69	10.41	98.10	114.00	-15.90	peak			
2	*	2480.000	78.61	10.41	89.02	94.00	-4.98	AVG	100	86	
3		3629.000	34.91	12.90	47.81	74.00	-26.19	peak			
4		4960.000	41.16	8.09	49.25	74.00	-24.75	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Report No.: AGC08551161101FE03 Page 36 of 75

Field strength of the fundamental signal

1Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	87.71	10.32	98.03	114	-15.97	Horizontal
2402	87.82	10.32	98.14	114	-15.86	Vertical
2441	87.99	10.36	98.35	114	-15.65	Horizontal
2441	88.53	10.36	98.89	114	-15.11	Vertical
2480	87.97	10.41	98.38	114	-15.62	Horizontal
2480	87.69	10.41	98.10	114	-15.90	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	79.33	10.32	89.65	94	-4.35	Horizontal
2402	79.56	10.32	89.88	94	-4.12	Vertical
2441	79.56	10.36	89.92	94	-4.08	Horizontal
2441	78.66	10.36	89.02	94	-4.98	Vertical
2480	78.80	10.41	89.21	94	-4.79	Horizontal
2480	78.61	10.41	89.02	94	-4.98	Vertical

Report No.: AGC08551161101FE03 Page 37 of 75

2Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	87.66	10.32	97.98	114	-16.02	Horizontal	
2402	87.69	10.32	98.01	114	-15.99	Vertical	
2441	87.85	10.36	98.21	114	-15.79	Horizontal	
2441	88.50	10.36	98.86	114	-15.14	Vertical	
2480	87.74	10.41	98.15	114	-15.85	Horizontal	
2480	87.48	10.41	97.89	114	-16.11	Vertical	

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	78.94	10.32	89.26	94	-4.74	Horizontal	
2402	79.22	10.32	89.54	94	-4.46	Vertical	
2441	79.00	10.36	89.36	94	-4.64	Horizontal	
2441	79.31	10.36	89.67	94	-4.33	Vertical	
2480	78.70	10.41	89.11	94	-4.89	Horizontal	
2480	78.24	10.41	88.65	94	-5.35	Vertical	

Report No.: AGC08551161101FE03 Page 38 of 75

3Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	87.57	10.32	97.89	114	-16.11	Horizontal	
2402	87.85	10.32	98.17	114	-15.83	Vertical	
2441	87.87	10.36	98.23	114	-15.77	Horizontal	
2441	88.42	10.36	98.78	114	-15.22	Vertical	
2480	87.73	10.41	98.14	114	-15.86	Horizontal	
2480	87.44	10.41	97.85	114	-16.15	Vertical	


Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	79.21	10.32	89.53	94	-4.47	Horizontal	
2402	79.24	10.32	89.56	94	-4.44	Vertical	
2441	79.36	10.36	89.72	94	-4.28	Horizontal	
2441	79.26	10.36	89.62	94	-4.38	Vertical	
2480	78.97	10.41	89.38	94	-4.62	Horizontal	
2480	78.10	10.41	88.51	94	-5.49	Vertical	

Page 39 of 75

FOR BLE

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

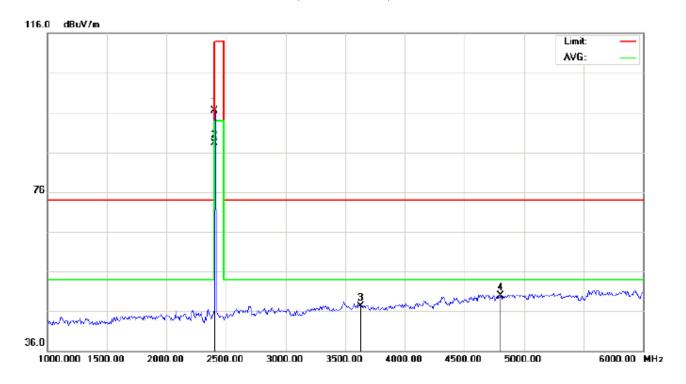

Site: site #1 Polarization: Horizontal Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 53.6 %

EUT: Mind-Batman Cerebral Combat Trainer Distance:

M/N: MD-001


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	86.21	10.32	96.53	114.00	-17.47	peak			
2	*	2402.000	78.00	10.32	88.32	94.00	-5.68	AVG	100	124	
3		3628.000	34.42	12.90	47.32	74.00	-26.68	peak			
4		4804.000	42.24	7.69	49.93	74.00	-24.07	peak			

Page 40 of 75

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

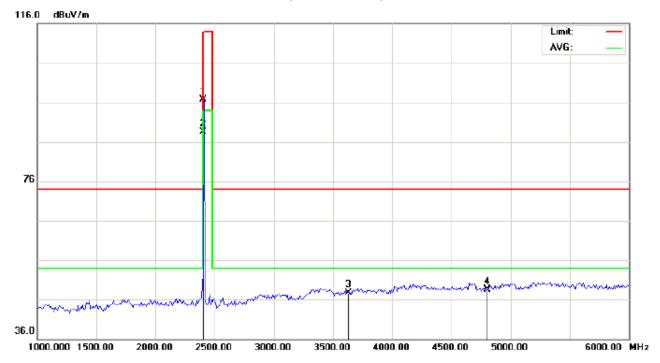

Site: site #1 Polarization: Vertical Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 53.6 %

EUT: Mind-Batman Cerebral Combat Trainer Distance:

M/N: MD-001


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2402.000	86.32	10.32	96.64	114.00	-17.36	peak			
2	*	2402.000	78.19	10.32	88.51	94.00	-5.49	AVG	100	118	
3		3628.000	34.83	12.90	47.73	74.00	-26.27	peak			
4		4804.000	40.88	7.69	48.57	74.00	-25.43	peak			

Page 41 of 75

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

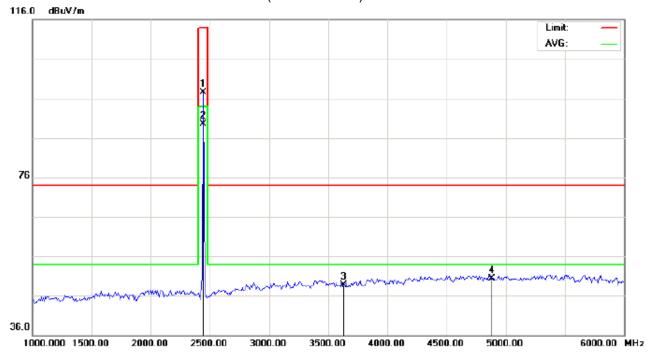

Site: site #1 Polarization: Horizontal Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 53.6 %

EUT: Mind-Batman Cerebral Combat Trainer Distance:

M/N: MD-001


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2440.000	87.24	10.36	97.60	114.00	-16.40	peak			
2	*	2440.000	79.15	10.36	89.51	94.00	-4.49	AVG	100	125	
3		3627.000	35.87	12.89	48.76	74.00	-25.24	peak			
4		4882.000	42.38	7.89	50.27	74.00	-23.73	peak			

Page 42 of 75

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

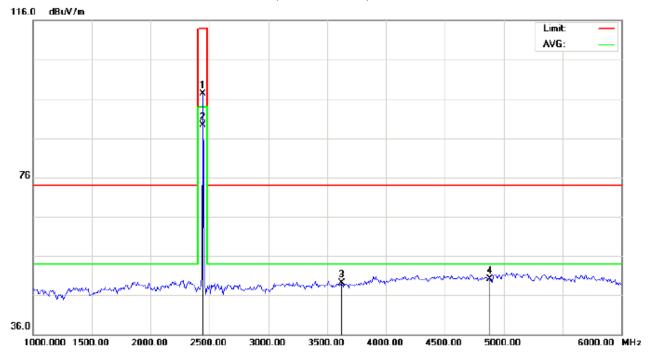

Site: site #1 Polarization: Vertical Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 53.6 %

EUT: Mind-Batman Cerebral Combat Trainer Distance:

M/N: MD-001


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2440.000	86.99	10.36	97.35	114.00	-16.65	peak			
2	*	2440.000	78.85	10.36	89.21	94.00	-4.79	AVG	100	127	
3		3625.000	36.16	12.88	49.04	74.00	-24.96	peak			
4		4882.000	42.31	7.89	50.20	74.00	-23.80	peak			

Page 43 of 75

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

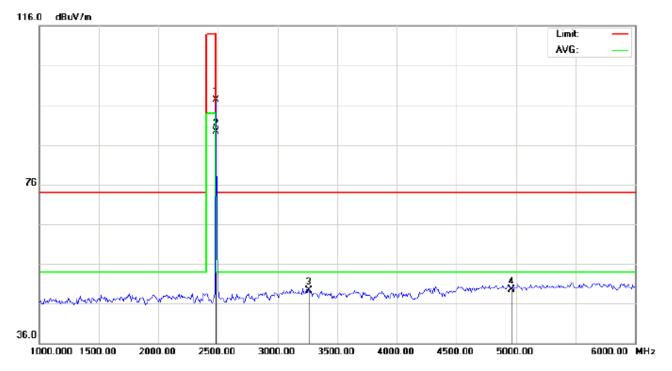

Site: site #1 Polarization: Horizontal Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 53.6 %

EUT: Mind-Batman Cerebral Combat Trainer Distance:

M/N: MD-001


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	86.97	10.41	97.38	114.00	-16.62	peak			
2	*	2480.000	78.81	10.41	89.22	94.00	-4.78	AVG	100	124	
3		3265.000	37.41	11.89	49.30	74.00	-24.70	peak			
4		4960.000	41.51	8.09	49.60	74.00	-24.40	peak			

Page 44 of 75

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

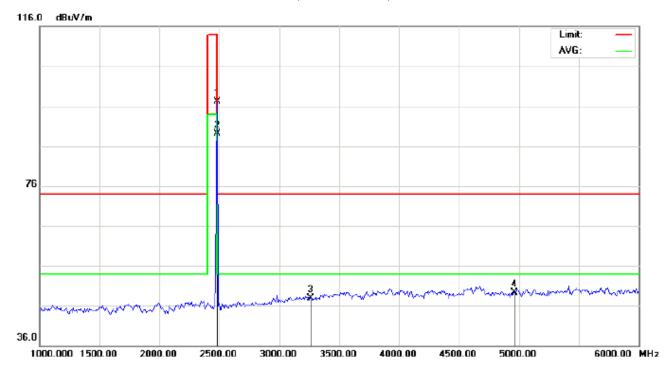

Site: site #1 Polarization: Vertical Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 53.6 %

EUT: Mind-Batman Cerebral Combat Trainer Distance:

M/N: MD-001

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	86.69	10.41	97.10	114.00	-16.90	peak			
2	*	2480.000	78.62	10.41	89.03	94.00	-4.97	AVG	100	123	
3		3265.000	36.06	11.89	47.95	74.00	-26.05	peak			
4		4960.000	41.16	8.09	49.25	74.00	-24.75	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Report No.: AGC08551161101FE03 Page 45 of 75

Field strength of the fundamental signal

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	86.21	10.32	96.53	114	-17.47	Horizontal
2402	86.32	10.32	96.64	114	-17.36	Vertical
2440	87.24	10.36	97.60	114	-16.40	Horizontal
2440	86.99	10.36	97.35	114	-16.65	Vertical
2480	86.97	10.41	97.38	114	-16.62	Horizontal
2480	86.69	10.41	97.10	114	-16.90	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	78.00	10.32	88.32	94	-5.68	Horizontal	
2402	78.19	10.32	88.51	94	-5.49	Vertical	
2440	79.15	10.36	89.51	94	-4.49	Horizontal	
2440	78.85	10.36	89.21	94	-4.79	Vertical	
2480	78.81	10.41	89.22	94	-4.78	Horizontal	
2480	78.62	10.41	89.03	94	-4.97	Vertical	

Page 46 of 75

9. BAND EDGE EMISSION

9.1. MEASUREMENT PROCEDURE


1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

2Max hold the trace of the setup 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission

9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

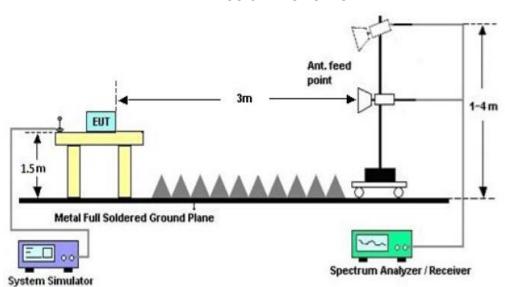


Page 47 of 75

9.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

FOR BR/EDR

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

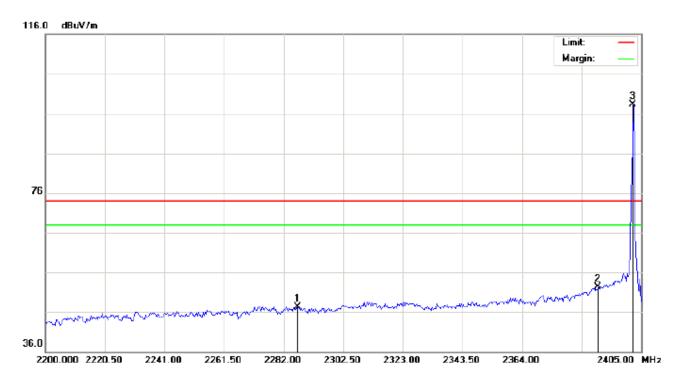

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Mind-Batman Cerebral Combat Trainer Distance:


M/N: MD-001

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2286.783	37.03	10.20	47.23	74.00	-26.77	peak			
2		2390.000	42.00	10.31	52.31	74.00	-21.69	peak			
3	*	2402.000	88.04	10.32	98.36	74.00	24.36	peak			

Page 48 of 75

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

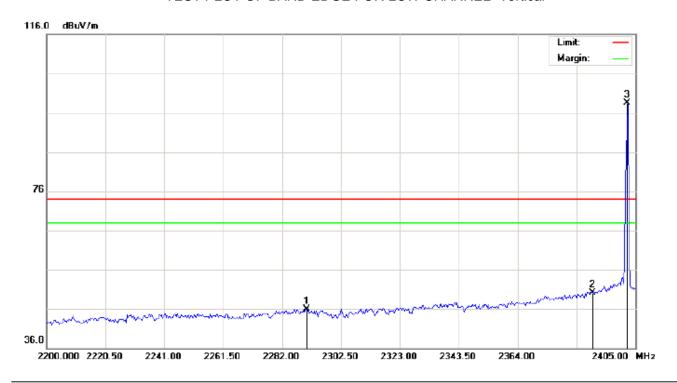

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Mind-Batman Cerebral Combat Trainer Distance:


M/N: MD-001

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2290.542	35.72	10.20	45.92	74.00	-28.08	peak			
2		2390.000	39.71	10.31	50.02	74.00	-23.98	peak			
3	*	2402.000	88.09	10.32	98.41	74.00	24.41	peak			

Page 49 of 75

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

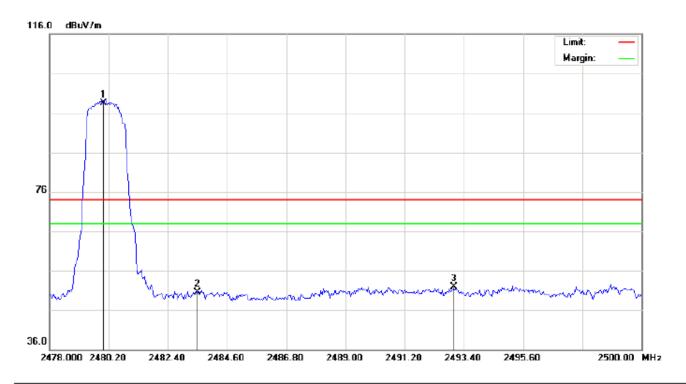

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Mind-Batman Cerebral Combat Trainer Distance:


M/N: MD-001

Mode: High Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB	dB	cm	degree	
1	*	2480.000	88.05	10.41	98.46	74.00	24.46	peak			
2		2483.500	40.19	10.41	50.60	74.00	-23.40	peak			
3		2493.033	41.47	10.42	51.89	74.00	-22.11	peak			

Page 50 of 75

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

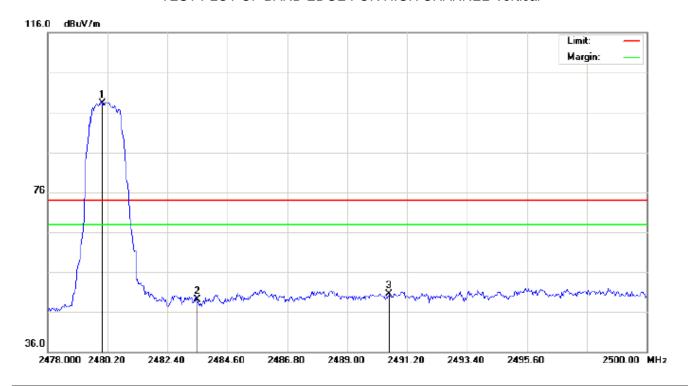

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 6
EUT: Mind-Batman Cerebral Combat Trainer Distance:

M/N: MD-001

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	87.83	10.41	98.24	74.00	24.24	peak			
2		2483.500	38.76	10.41	49.17	74.00	-24.83	peak			
3		2490.540	40.13	10.42	50.55	74.00	-23.45	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.


The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

Page 51 of 75

FOR BLE

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

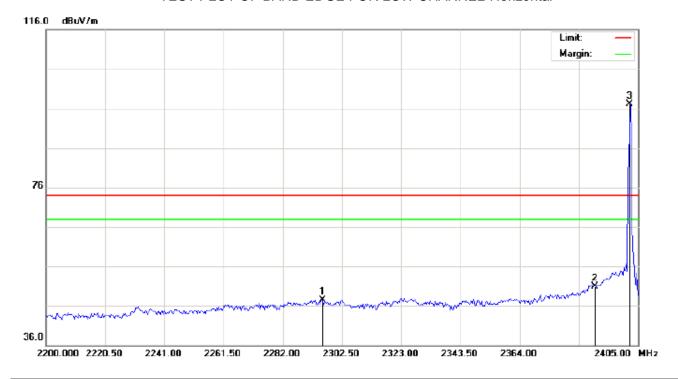

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Mind-Batman Cerebral Combat Trainer Distance:


M/N: MD-001

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2295.667	37.26	10.21	47.47	74.00	-26.53	peak			
2		2390.000	40.50	10.31	50.81	74.00	-23.19	peak			
3	*	2402.000	86.72	10.32	97.04	74.00	23.04	peak			

Page 52 of 75

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

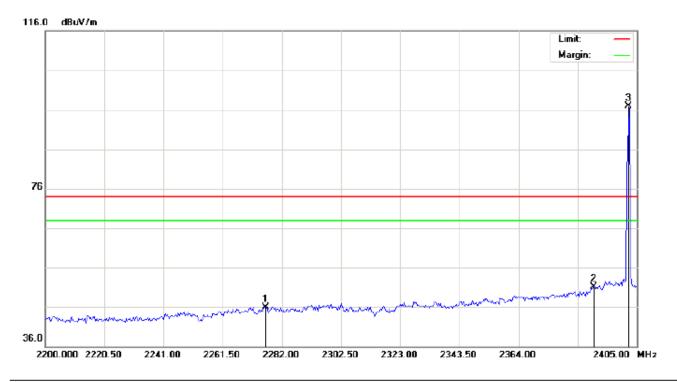

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Mind-Batman Cerebral Combat Trainer Distance:


M/N: MD-001

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2276.533	35.76	10.18	45.94	74.00	-28.06	peak			
2		2390.000	40.71	10.31	51.02	74.00	-22.98	peak			
3	*	2402.000	86.53	10.32	96.85	74.00	22.85	peak			

Page 53 of 75

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

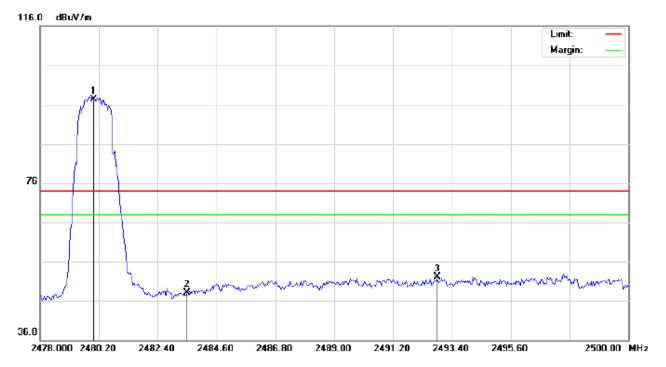

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Mind-Batman Cerebral Combat Trainer Distance:


M/N: MD-001

Mode: High Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	86.89	10.41	97.30	74.00	23.30	peak			
2		2483.500	37.69	10.41	48.10	74.00	-25.90	peak			
3		2492.850	41.63	10.42	52.05	74.00	-21.95	peak			

Page 54 of 75

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

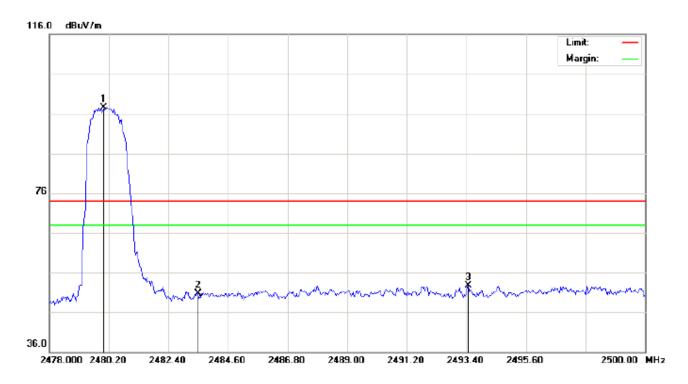

Site: site #1 Polarization: Vertical Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Mind-Batman Cerebral Combat Trainer Distance:

M/N: MD-001

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	87.01	10.41	97.42	74.00	23.42	peak			
2		2483.500	40.26	10.41	50.67	74.00	-23.33	peak			
3		2493.473	42.33	10.42	52.75	74.00	-21.25	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 55 of 75


10. 20DB BANDWIDTH

10.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP

(BLOCK DIAGRAM OF CONFIGURATION)

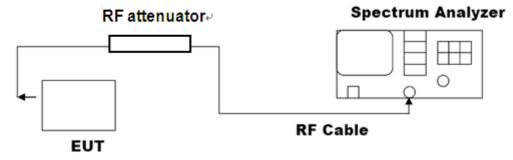

Note: The EUT has been used temporary antenna connector for testing.


10.3. LIMITS AND MEASUREMENT RESULTS

FOR BR/EDR


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT										
		Measurement Result								
Applicable Limits		Test Data (MHz)								
		Result								
	Low Channel	0.948	1.088	PASS						
N/A	Middle Channel	0.929	1.091	PASS						
	High Channel	0.931	1.080	PASS						

Page 56 of 75

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

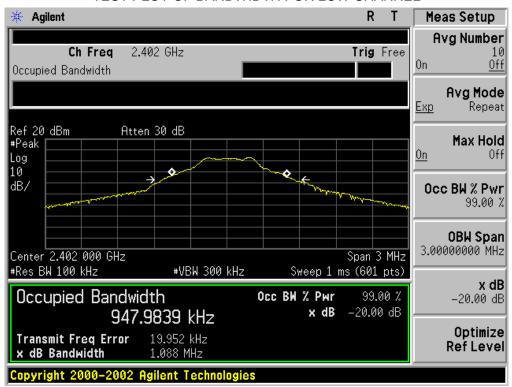


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

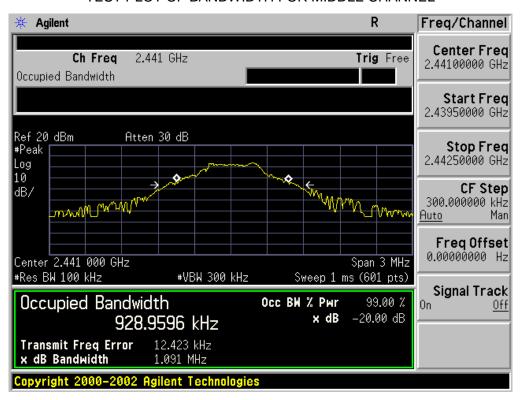

Page 57 of 75


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

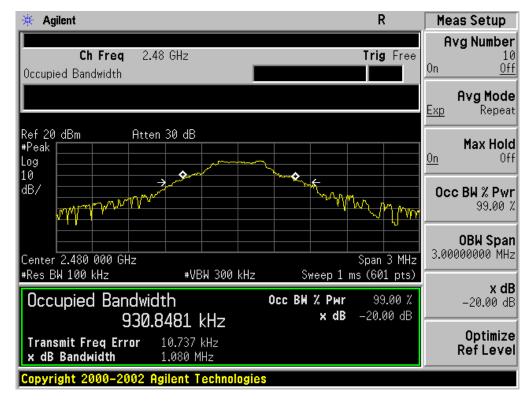

Report No.: AGC08551161101FE03 Page 58 of 75


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT										
	Measurement Result									
Applicable Limits		Doorle								
		99%OBW (MHz)	Result							
	Low Channel	1.196	1.337	PASS						
N/A	Middle Channel	1.208	1.345	PASS						
	High Channel	1.201	1.359	PASS						

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

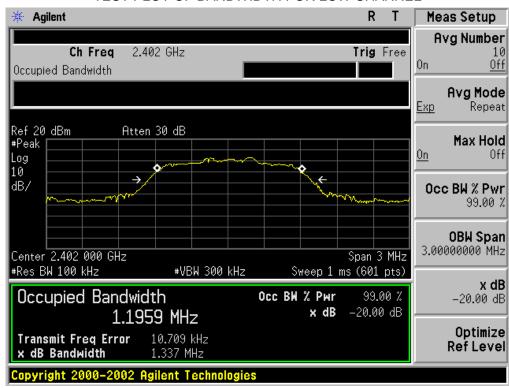


Page 59 of 75

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

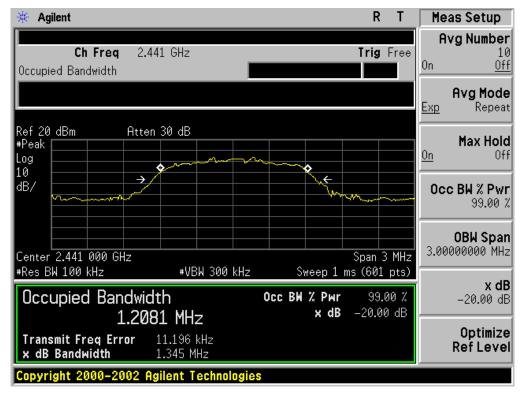

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

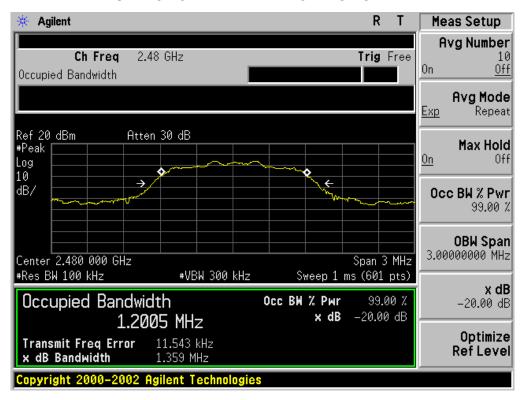

Report No.: AGC08551161101FE03 Page 60 of 75


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT										
	Measurement Result									
Applicable Limits		Result								
		99%OBW (MHz)	-20dB BW(MHz)	Result						
	Low Channel	1.201	1.363	PASS						
N/A	Middle Channel	1.206	1.363	PASS						
	High Channel	1.202	1.367	PASS						

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




Report No.: AGC08551161101FE03 Page 61 of 75

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

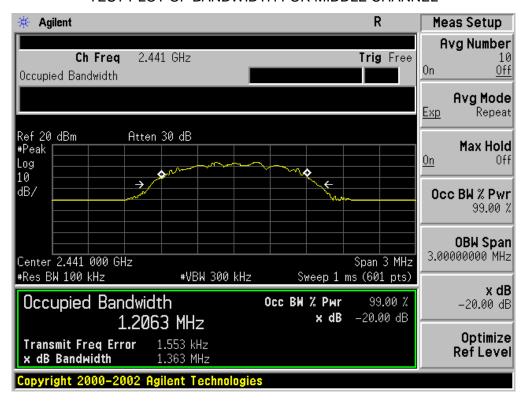

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

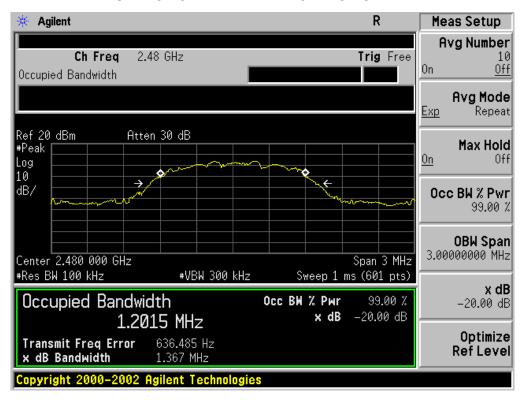


Page 62 of 75

FOR BLE


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT										
	Measurement Result									
Applicable Limits		Dooult								
		Result								
	Low Channel	1.076	1.201	PASS						
N/A	Middle Channel	1.070	1.188	PASS						
	High Channel	1.074	1.181	PASS						

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

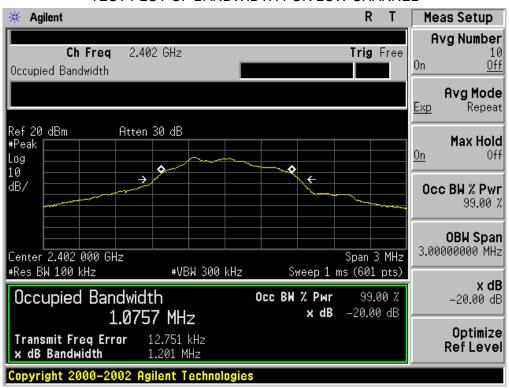


Page 63 of 75

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

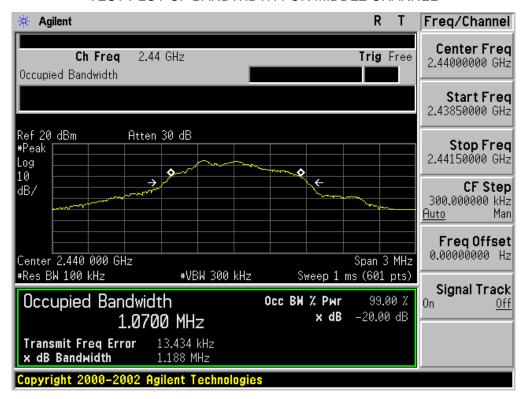

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

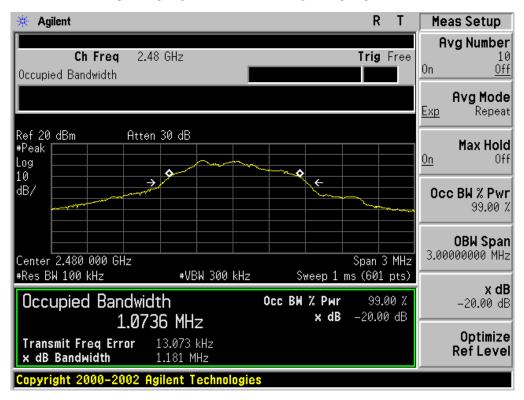

Page 64 of 75

11. FCC LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

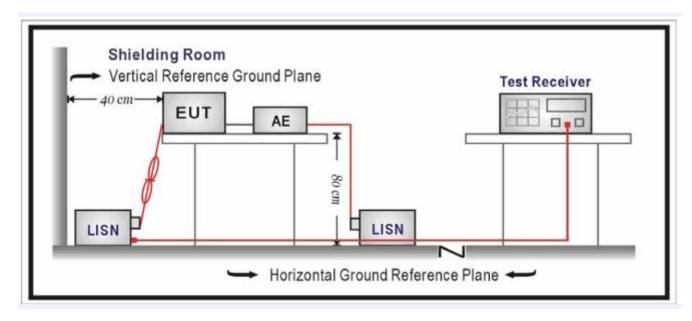

Page 65 of 75

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST


N/A


Note: The BT function of EUT didn't work when charging.


Report No.: AGC08551161101FE03 Page 66 of 75

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC RADIATED EMISSION TEST SETUP

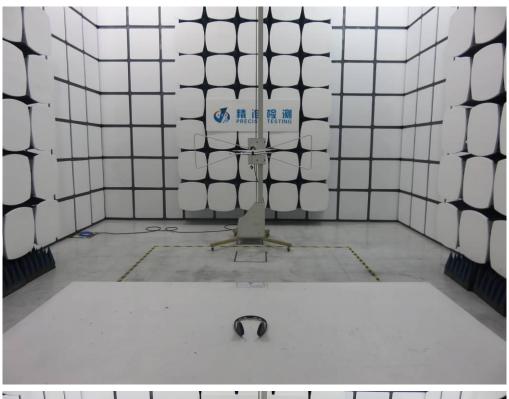

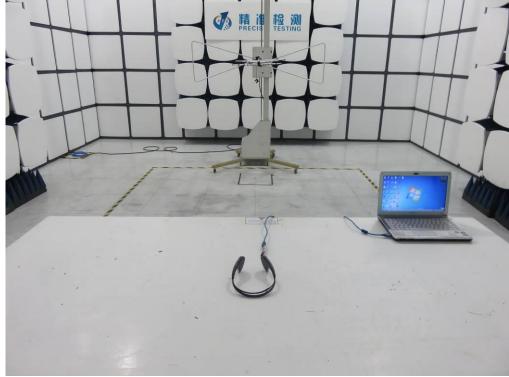

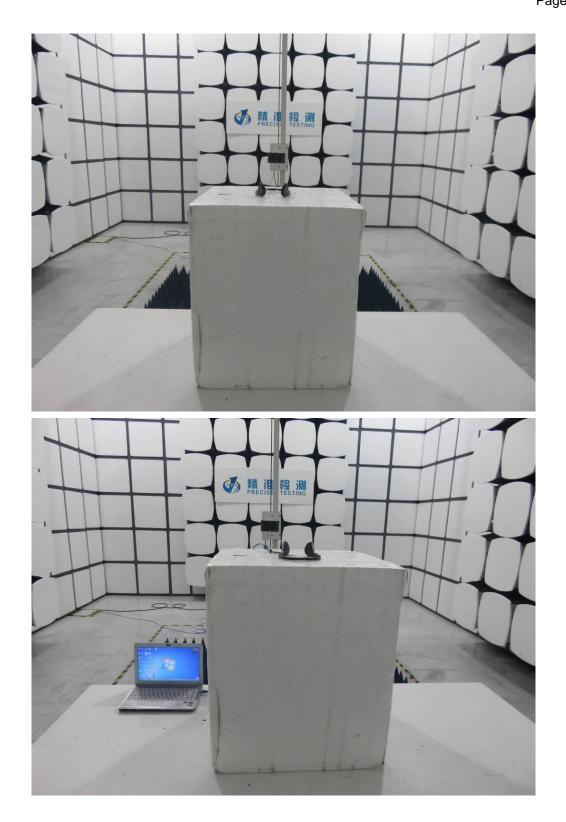

Page 68 of 75

APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



Report No.: AGC08551161101FE03 Page 71 of 75


VIEW OF EUT (PORT)




OPEN VIEW OF EUT




INTERNAL VIEW OF EUT-1

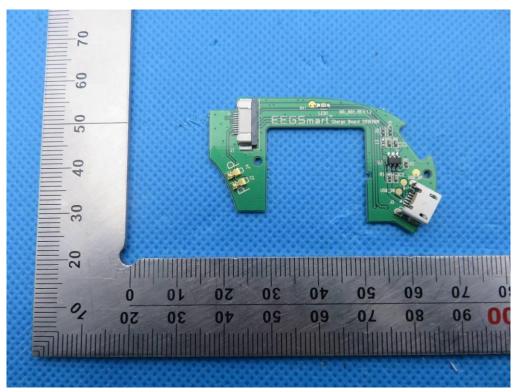


INTERNAL VIEW OF EUT-2

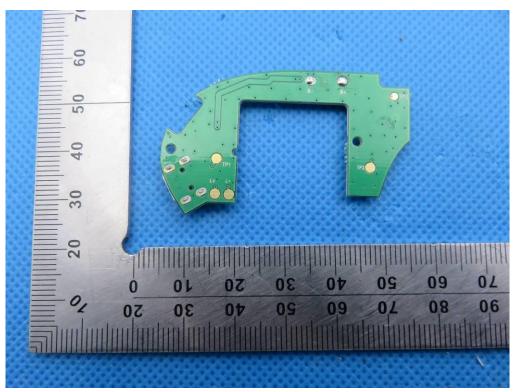


INTERNAL VIEW OF EUT-3

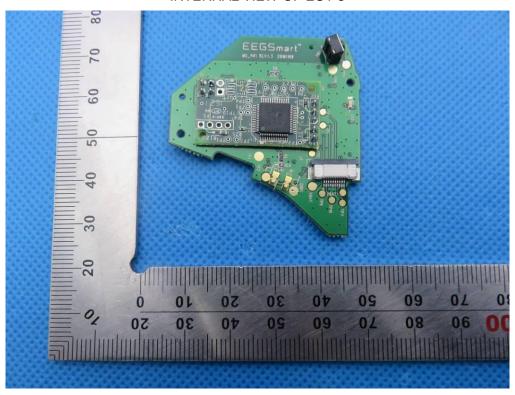


INTERNAL VIEW OF EUT-4

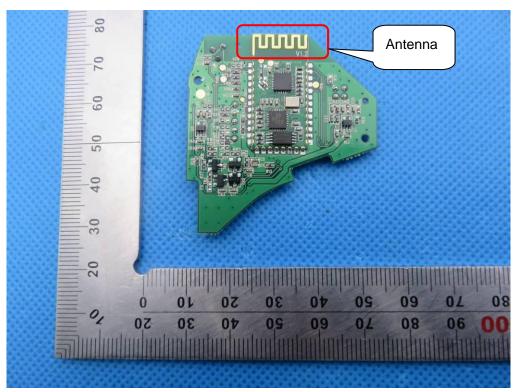


INTERNAL VIEW OF EUT-5

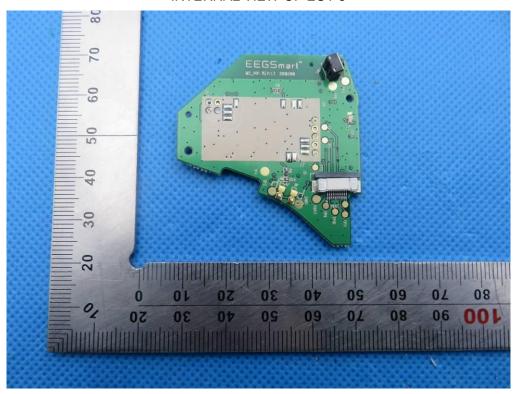


INTERNAL VIEW OF EUT-6

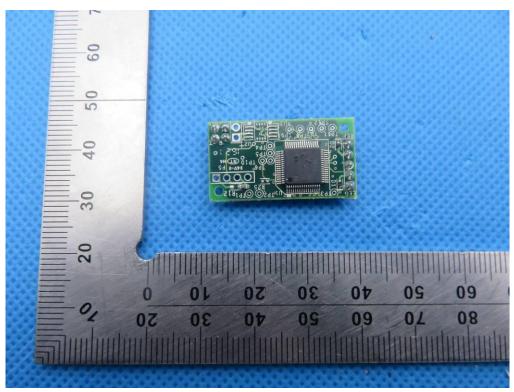

INTERNAL VIEW OF EUT-7

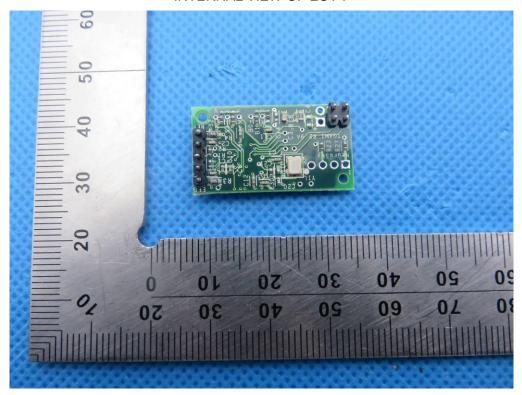

INTERNAL VIEW OF EUT-8

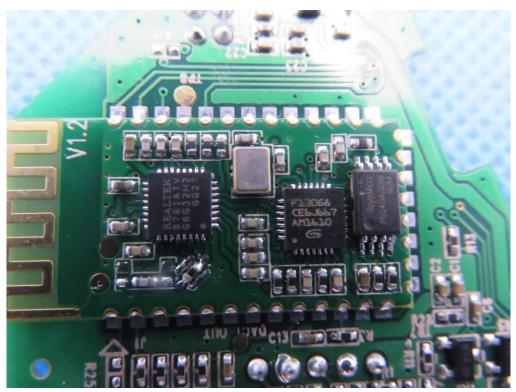

----END OF REPORT----