
## 3.2 x 1.6 x 0.5 WiFi/Bluetooth Ceramic Chip Antenna (AA055)

## 1. Explanation of Product Number

H 2 U 3 4 W G T Q W 0 1 0 0 (1) (2) (3) (4)

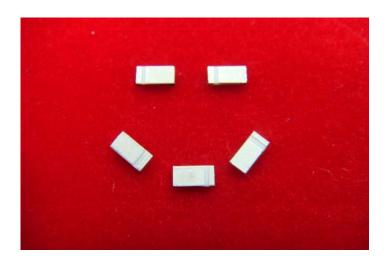

#### **Product Code:**

(1) Product Categories:

4: ceramic substrate chip antenna

(2) Dimensions and Polarization:

WG: 3.2x1.6x0.5(mm) / linear polarization

(3) Material / Working Frequency / Ground Plane Dimensions:

TQW: AS 6 / 2400~2500MHz / 80 x 40(mm)

(4) Antenna Series:

01: serial number

Tolerances (Unless other X: $\pm$ 1 X.X: $\pm$ 0.1 Angle: $\pm$	•	Unictr Technologies	Unictron Technologies Co Website: www.unictron	•
Scale :	Unit: mm	THIS SPECIFICAT	TION IS THE PROPERTY OF	UNICTRON
Prepared By : Meiping	Checked By :Chinling	TECHNOLOGIES CO	ORPORATION AND SHALL NOT BE REF	
Designed By : Andrew	Approved By :Herbert	OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PE		ERMISSION
TITLE: 3.2x1.6x0.5 WiFi/Bluetooth Ceramic		DOCUMENT	H2U34WGTQW0100	REV.
Chip Antenna (AA055)		NO.		F

#### 2. Features

- \*Stable and reliable in performances
- \*Low temperature coefficient of frequency
- \*Low profile, compact size
- \*RoHS compliance
- \*SMT processes compatible

### 3. Applications

- \*Bluetooth earphone systems
- \*Hand-held devices when Bluetooth/WiFi functions are needed, e.g., Smart phone.
- \*IEEE802.11 b/g/n
- \*ZigBee
- \*Wireless PCMCIA cards or USB dongle

### 4. Description

Unictron's chip antenna series are specially designed for Bluetooth/WiFi applications. Based on Unictron's proprietary design and processes, this chip antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

## 5. Electrical Specifications (80x40(mm) ground plane)


5-1.

	Characteristics	Specifications	Unit
Outline Dimensions		3.2x1.6x0.5	mm
Ground F	Plane	80x40	mm
Center F	requency*	2442	MHz
Bandwidth (under -10dB return loss)		100 min.	MHz
VSWR		2 max.	
Impedan	ce	50	Ω
Polarizat	ion	Linear Polarization	
Gain**	Peak	2.5 (typical)	dBi
Gairi	Efficiency	84 (typical)	%
Temperature Coefficient of Frequency		0±20 max (@ -40°C~85°C)	ppm/°C


<sup>\*</sup>Center frequency will be offset to working frequency according to the conditions of user's ground plane and radome.

<sup>\*\*</sup>The data was measured by A Test Lab Techno Corp.(CTIA Authorized Test Lab).

Tolerances (Unless other X: $\pm$ 1 X.X: $\pm$ 0. Angle: $\pm$	•	Unictr	Unictron Technologies Co Website: www.unictro	•
Scale :	Unit: mm	THIS SPECIFICA	TION IS THE PROPERTY OF	UNICTRON
Prepared By : Meiping	Checked By :Chinling	TECHNOLOGIES C	ORPORATION AND SHALL NOT BE REI	PRODUCED
Designed By : Andrew	Approved By :Herbert	OR USED IN ALL CI	RCUMSTANCES WITHOUT WRITTEN P	ERMISSION
TITLE: 3.2x1.6x0.5 WiFi/Bluetooth Ceramic		DOCUMENT	H2U34WGTQW0100	REV.
Chip Antenna (AA055)		NO.		F

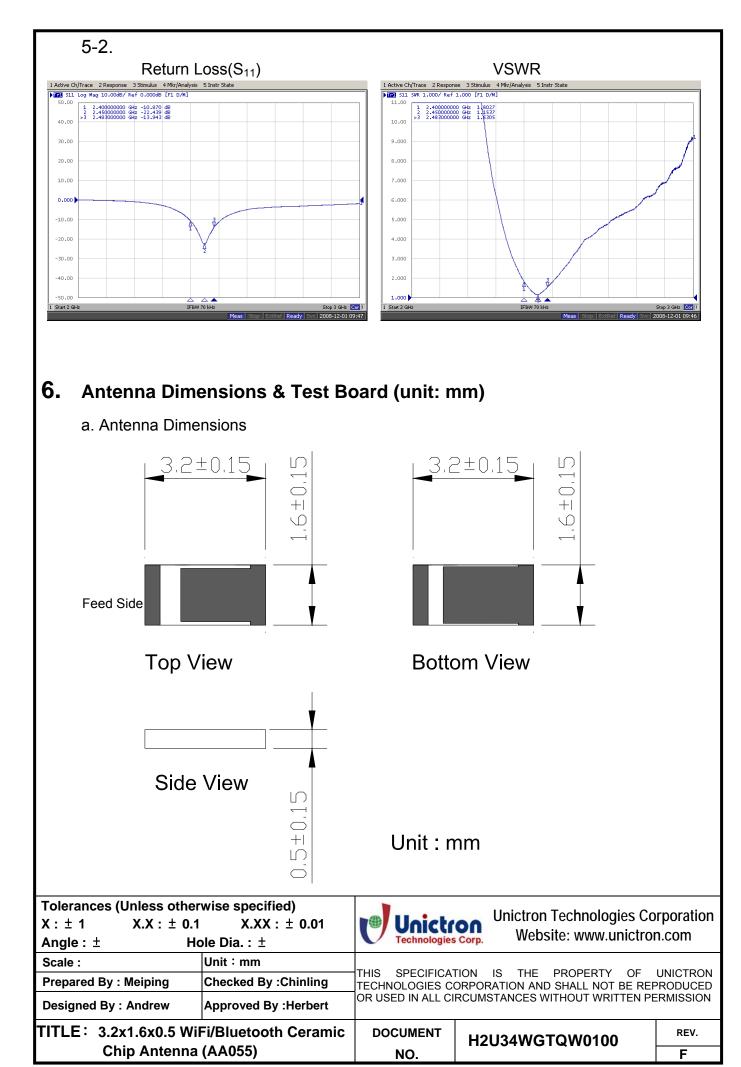

### b. Test Board with Antenna

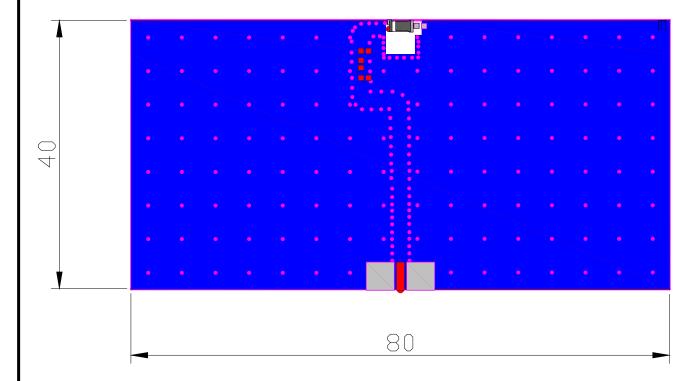



Unit: mm


Tolerances (Unless otherwise specified) $X: \pm 1$ $X.X: \pm 0.1$ $X.XX: \pm 0.01$ Angle: $\pm$ Hole Dia.: $\pm$		Unictr	Unictron Technologies Co Website: www.unictron	•
Scale :	Unit: mm	THIS SPECIFICAT	TION IS THE PROPERTY OF	UNICTRON
Prepared By : Meiping	Checked By :Chinling		ORPORATION AND SHALL NOT BE REF	
Designed By : Andrew	Approved By :Herbert	OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN F		RMISSION
TITLE: 3.2x1.6x0.5 WiFi/Bluetooth Ceramic		DOCUMENT	H2U34WGTQW0100	REV.
Chip Antenna (AA055)		NO.		F


## Radiation Pattern (80x40(mm) ground plane)

7-1. 3D Gain Pattern (at 2442 MHz)

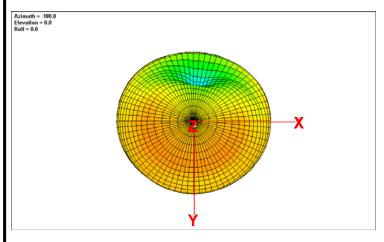

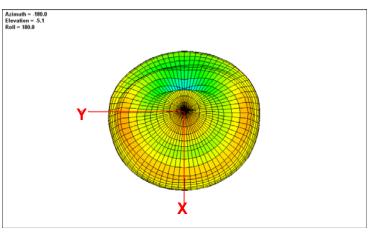

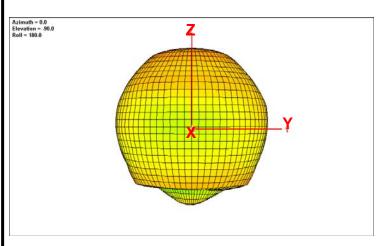




Tolerances (Unless other X: $\pm$ 1 X.X: $\pm$ 0.1 Angle: $\pm$	• •	Unictr	Unictron Technologies Co Website: www.unictro	•	
Scale :	Unit: mm	TILLE CDECIFICA	TION IS THE PROPERTY OF	LINICTDON	
Prepared By : Meiping Checked By : Chinling		THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED			
Designed By : Andrew	Approved By :Herbert	OR USED IN ALL CIRCUMSTANCES WITHOUT WRITT		ERMISSION	
TITLE: 3.2x1.6x0.5 WiFi/Bluetooth Ceramic Chip Antenna (AA055)		DOCUMENT	H2U34WGTQW0100	REV.	
		NO.		F	

## 7-2. Efficiency Table

Frequency(MHz)	2400	2410	2420	2430	2442	2450	2460	2470	2480	2490	2500
Efficiency(dB)	-1.38	-1.04	-0.85	-0.74	-0.73	-0.76	-0.86	-1.05	-1.18	-1.27	-1.40
Efficiency(%)	72.83	78.71	82.27	84.39	84.53	84.04	82.00	78.60	76.14	74.64	72.50
Gain(dBi)	1.47	1.81	2.10	2.40	2.50	2.50	2.37	2.10	1.90	1.87	1.75

## 7-3. Efficiency vs. Frequency

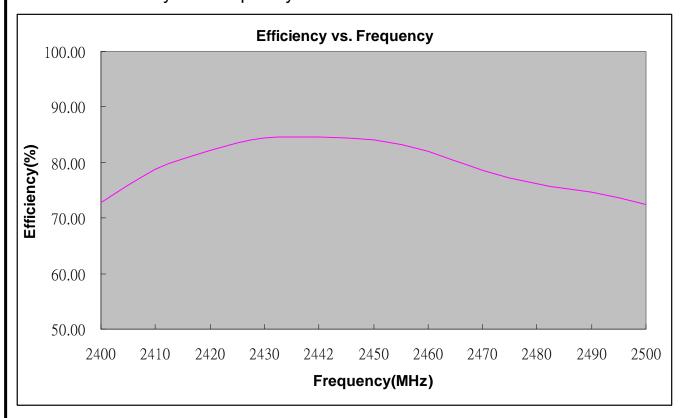


Tolerances (Unless other X: $\pm$ 1 X.X: $\pm$ 0.1 Angle: $\pm$	• •	Unictr Technologies	Unictron Technologies Co Website: www.unictron	•
Scale :	Unit: mm	THIS SPECIFICAT	TION IS THE PROPERTY OF	UNICTRON
Prepared By : Meiping		TECHNOLOGIES CO	ORPORATION AND SHALL NOT BE REF	PRODUCED
Designed By : Andrew	Approved By :Herbert	OR USED IN ALL CI	RCUMSTANCES WITHOUT WRITTEN PE	ERMISSION
TITLE: 3.2x1.6x0.5 WiFi/Bluetooth Ceramic Chip Antenna (AA055)		DOCUMENT	H2U34WGTQW0100	REV.
		NO.		F

#### 8. **Layout Guide:**

a. Solder Land Pattern:

Land pattern for soldering (gray marking areas) is as shown below. Depending on Customer's requirement, matching circuit as shown below is also recommended .




4.5 2.8-**Back View** 

Top View

Unit: mm

#### 9. Frequency tuning:


a. Chip antenna tuning scenario:

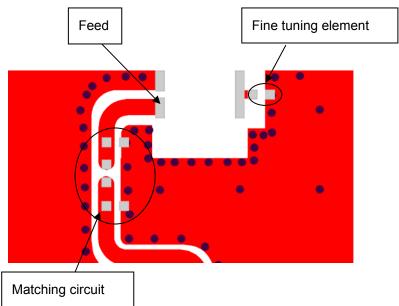

Tolerances (Unless other X: $\pm$ 1 X.X: $\pm$ 0.1 Angle: $\pm$		Unictr	Unictron Technologies Co Website: www.unictro	•
Scale :	Unit: mm	THIS SPECIFICA	TION IS THE PROPERTY OF	UNICTRON
Prepared By : Meiping	Checked By :Chinling		ORPORATION AND SHALL NOT BE REF	
Designed By : Andrew	Approved By :Herbert	OR USED IN ALL CI	RCUMSTANCES WITHOUT WRITTEN PE	ERMISSION
TITLE: 3.2x1.6x0.5 WiFi/Bluetooth Ceramic		DOCUMENT	H2U34WGTQW0100	REV.
Chip Antenna	(AA055)	NO.		F


## b. Matching circuit: (Center frequency is about 2442MHz at 80x40(mm) ground plane)

## Antenna



System Matching Circuit Component					
Location	Location Description				
1	N/A	-			
2	0Ω	(0402)			
3	N/A	-			
4	22pF	TDK(0402)			
Fine tuning element	8pF	TDK(0402)			

#### c. Fine tuning element vs. Center frequency

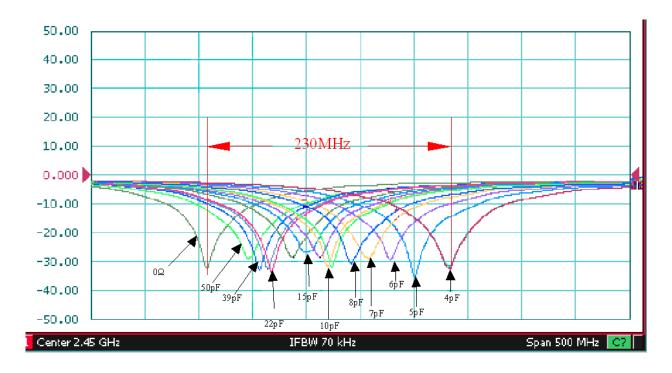

Tolerances (Unless othe X: $\pm$ 1 X.X: $\pm$ 0. Angle: $\pm$	• • • • • • • • • • • • • • • • • • • •	Unictr	Unictron Technologies Co Website: www.unictron	•
Scale :	Unit: mm	THIS SPECIFICAT	TION IS THE PROPERTY OF	UNICTRON
Prepared By : Meiping Checked By :Chinling		TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED		
Designed By : Andrew	Approved By :Herbert	OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERM		ERMISSION
TITLE: 3.2x1.6x0.5 WiFi/Bluetooth Ceramic		DOCUMENT	H2U34WGTQW0100	REV.
Chip Antenna (AA055)		NO.		F


# 10. Reliability test:

Test item	Test condition / Test method	Specification
Solderability	*Solder bath temperature : 260 ± 5°C	At least 95% of a surface of each
	*Immersion time : 2 ± 0.5 sec	terminal electrode must be covered by fresh solder.
Resistance to dissolution	*Solder bath temperature : 260 ± 5°C	Loss of metallization on the edges of
of metallization)	*Leaching immersion time: 30 ± 0.5 sec	each electrode shall not exceed 25%.
Drop Test	*1.8m drop on concrete with 150g	No mechanical damage.
	weight	Samples shall satisfy electrical
	*XYZ each 30 times	specification after test.
Bending test	Warp:2mm	No mechanical damage.
		Samples shall satisfy electrical
		specification after test.
Temperature cycle	-55°C/ 30min~125°C /30min	No mechanical damage.
	Total 1000 cycles	Samples shall satisfy electrical
		specification after test
High temperature	*Temperature: 125°C	No mechanical damage.
	*Test duration: 1000 hours	Samples shall satisfy electrical
		specification after test.
Low temperature	*Temperature: -55°C	No mechanical damage.
	*Test duration: 1000 hours	Samples shall satisfy electrical
		specification after test.
Adhesive Strength of	*Pressure:5N	No remarkable damage or removal of
Termination	*Duration: 10±1 sec	the termination.
Vibration	*Applied Frequency: 10-55-10Hz(1min)	No mechanical damage.
	*1.5 p-p amplitude for XYZ each	Samples shall satisfy electrical
	direction of 120min	specification after test
Damp heat	*Humidity:85%	No mechanical damage.
	*Temperature:85°C	Samples shall satisfy electrical
	*Time: 1000 hours	specification after test

Tolerances (Unless otherwise specified) $X: \pm 1$ $X.X: \pm 0.1$ $X.XX: \pm 0.01$ Angle: $\pm$ Hole Dia.: $\pm$		Unictron Technologies Corporation Website: www.unictron.com		
Scale :	Unit: mm	THIS SPECIFICAT	TION IS THE PROPERTY OF	UNICTRON
Prepared By : Meiping	Checked By :Chinling	TECHNOLOGIES CO	ORPORATION AND SHALL NOT BE REF	PRODUCED
Designed By : Andrew	Approved By :Herbert	OR USED IN ALL CI	RCUMSTANCES WITHOUT WRITTEN PE	ERMISSION
TITLE: 3.2x1.6x0.5 WiFi/Bluetooth Ceramic		DOCUMENT	H2U34WGTQW0100	REV.
Chip Antenna (AA055)		NO.		F

# 11. Soldering Conditions:

a. Typical Soldering Profile for Lead-free Process

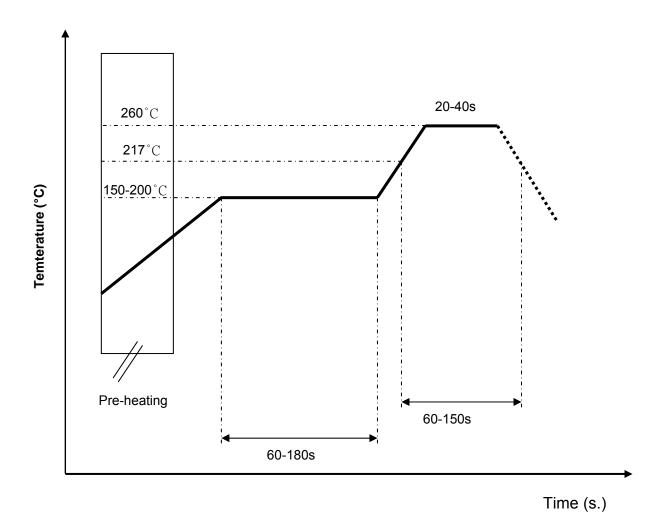

Tolerances (Unless otherwise specified)  X: ± 1		Unictron Technologies Corporation Website: www.unictron.com
	Unit: mm	THE OPERIOR IN THE OPERATION OF THE OPERATION
Prepared By : Meiping	Checked By :Chinling	THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED
Designed By : Andrew	Approved By :Herbert	OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE: 3.2x1.6x0.5 WiFi/Bluetooth Ceramic Chip Antenna (AA055)


DOCUMENT NO.

H2U34WGTQW0100 F

## 12. Packing:

(1) Quantity/Reel: 6000pcs/Reel

(2) Plastic tape:

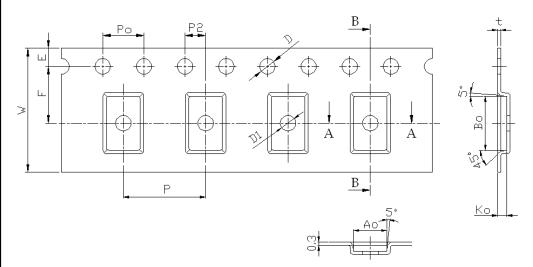

- 1. Cumulative tolerance of 10 sprocket hole pitch: ±0.20mm
- 2. Carrier camber not to exceed 1mm in 250mm
- 3. Ao and Bo measured on a plane above the inside bottom of the pocket.
- 4. Ko measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
- 5. All dimensions meet EIA-481-B requirements.
- 6. Material: □ Clear Non Anti-Static Polystyrene.
  - Black Conductive Polystyrene.

2.1 Tape Dimensions(unit: mm)

Feature	Specifications	Tolerances
W	12.00	±0.30
Р	8.00	±0.10
Е	1.75	±0.10
F	5.50	±0.10
P2	2.00	±0.10
D	1.50	+0.10
		-0.00
Po	4.00	±0.10
10Po	40.00	±0.20

## 13. Storage Conditions:

(1) Temperature: -25°C to 85°C

(2) Relative Humidity: 20% to 70%

2.2 Pocket Dimensions(unit: mm)

Feature	Specifications	Tolerances
Ao	1.90	+0.20
Во	3.50	-0.10
Ko	0.60	±0.10
t	0.30	±0.05

Tolerances (Unless other X: $\pm$ 1		Unictr	Unictron Technologies Co Website: www.unictron	
Scale :	Unit: mm	THIS SPECIFICA	TION IS THE PROPERTY OF	UNICTRON
Prepared By : Meiping	Checked By :Chinling	TECHNOLOGIES CO	ORPORATION AND SHALL NOT BE REF	PRODUCED
Designed By : Andrew	Approved By :Herbert	OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION		
TITLE: 3.2x1.6x0.5 WiFi/Bluetooth Ceramic		DOCUMENT	H2U34WGTQW0100	REV.
Chip Antenna (AA055)		NO.		F