

Zhuhai Pantum Electronics Co., Ltd.

TEST REPORT

SCOPE OF WORK

FCC TESTING – M6550NW Plus, M6551NW Plus, M6552NW Plus, M6553NW Plus,
M6554NW Plus, M6555NW Plus, M6556NW Plus, M6557NW Plus,
M6558NW Plus, M6559NW Plus, M6500NW Plus, M6501NW Plus,
M6502NW Plus, M6503NW Plus, M6504NW Plus, M6505NW Plus,
M6506NW Plus, M6507NW Plus, M6508NW Plus, M6509NW Plus,
M6510NW Plus

REPORT NUMBER

221009018SZN-002

ISSUE DATE

07 March 2023

[REVISED DATE]

[-----]

PAGES

24

DOCUMENT CONTROL NUMBER

FCC ID 249_C

© 2017 INTERTEK



Zhuhai Pantum Electronics Co., Ltd.

Application
For
Certification

FCC ID: 2AEGO2013MB15**Monochrome Laser Multifunction Printer**

**Model: M6550NW Plus, M6551NW Plus, M6552NW Plus, M6553NW Plus,
M6554NW Plus, M6555NW Plus, M6556NW Plus, M6557NW Plus, M6558NW Plus,
M6559NW Plus, M6500NW Plus, M6501NW Plus, M6502NW Plus, M6503NW Plus,
M6504NW Plus, M6505NW Plus, M6506NW Plus, M6507NW Plus, M6508NW Plus,
M6509NW Plus, M6510NW Plus**

Brand Name: PANTUM

2.4GHz Transceiver

Report No.: 221009018SZN-002

We hereby certify that the sample of the above item is considered to comply with the requirements
of FCC Part 15, Subpart C for Intentional Radiator,
mention 47 CFR [10-1-21]

Prepared and Checked by:

Jeff Liang
Project Engineer

Approved by:

Peter Kang
Senior Technical Supervisor
Date: 07 March 2023

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen, P.R. China
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

MEASUREMENT/TECHNICAL REPORT

This report concerns (check one:) Original Grant Class II Change

Equipment Type: DXX - Part 15 Low Power Communication Device Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes No

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-21 Edition] provision.

Report prepared by:

Jeff Liang
Intertek Testing Services Shenzhen Ltd. Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing
Community, GuanHu Subdistrict, LongHua District, Shenzhen,
P.R. China
Tel / Fax: 86-755-8614 0743/86-755-8601 6661

Table of Contents

1.	Summary of Test Result	4
2.	General Description	5
2.1	Product Description	5
2.2	Related Submittal(s) Grants	5
2.3	Test Methodology	5
2.4	Test Facility	5
3.	System Test Configuration	6
3.1	Justification	6
3.2	EUT Exercising Software	6
3.3	Special Accessories	6
3.4	Equipment Modification	6
3.5	Measurement Uncertainty	7
3.6	Support Equipment List and Description	7
4.	Emission Results	8
4.1	Radiated Test Results	8
4.1.1	Field Strength Calculation	8
4.1.2	Radiated Emission Configuration Photograph	9
4.1.3	Radiated Emissions	9
4.1.4	Transmitter Spurious Emissions (Radiated)	12
4.2	Conducted Emission Configuration Photograph	15
4.2.1	Conducted Emission	15
5.	Equipment Photographs	18
6.	Product Labelling	18
7.	Technical Specifications	18
8.	Instruction Manual	18
9.	Miscellaneous Information	19
9.1	Bandedge Plot	19
9.2	20dB bandwidth	21
9.3	Discussion of Pulse Desensitization	22
9.4	Calculation of Average Factor	22
9.5	Emissions Test Procedures	23
10.	Test Equipment List	24

1. Summary of Test Result

Applicant: Zhuhai Pantum Electronics Co., Ltd.

Applicant Address: Building 02, 06 and 08, No. 888 Shengping Avenue, Pingsha Town, Zhuhai City, Guangdong, China

Manufacturer: Zhuhai Pantum Electronics Co., Ltd.

Manufacturer Address: Building 02, 06 and 08, No. 888 Shengping Avenue, Pingsha Town, Zhuhai City, Guangdong, China

MODEL: M6550NW Plus, M6551NW Plus, M6552NW Plus, M6553NW Plus, M6554NW Plus, M6555NW Plus, M6556NW Plus, M6557NW Plus, M6558NW Plus, M6559NW Plus, M6500NW Plus, M6501NW Plus, M6502NW Plus, M6503NW Plus, M6504NW Plus, M6505NW Plus, M6506NW Plus, M6507NW Plus, M6508NW Plus, M6509NW Plus, M6510NW Plus

FCC ID: 2AEGO2013MB15

Test Specification	Reference	Results
Transmitter Radiated Emission	15.249 &15.209 &15.205	Pass
Conducted Emission	15.207	Pass
Bandedge	15.249 &15.209 &15.205	Pass
20dB Bandwidth	15.215(c)	Pass

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

2. General Description

2.1 Product Description

The equipment under test (EUT) is a Monochrome Laser Multifunction Printer with 2.4G Wi-Fi function operating at 2412-2462MHz for 802.11b/g/n HT20 and 2422-2452MHz for 802.11n HT40, Bluetooth function operating at 2402-2480MHz. The EUT is powered by AC120V/60Hz. For more detail information pls. refer to the user manual.

Antenna Type: Integral antenna

Modulation Type: GFSK

Antenna Gain: 3.55dBi Max

Bluetooth Version: 4.2 BLE (Single Mode)

Their electrical circuit design, layout, components used and internal wiring are identical. Only the below are different. Test with the M6550NW Plus model which has all the functions.

Model	Communication ports	Color
M6500NW Plus, M6501NW Plus, M6502NW Plus, M6503NW Plus, M6504NW Plus, M6505NW Plus, M6506NW Plus, M6507NW Plus, M6508NW Plus, M6509NW Plus, M6510NW Plus	USB, NET, Wi-Fi, Bluetooth	various
M6550NW Plus, M6551NW Plus, M6552NW Plus, M6553NW Plus, M6554NW Plus, M6555NW Plus, M6556NW Plus, M6557NW Plus, M6558NW Plus, M6559NW Plus	USB, NET, ADF, Wi-Fi, Bluetooth	

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

2.2 Related Submittal(s) Grants

This is an application for certification of a transceiver for the Monochrome Laser Multifunction Printer which has Bluetooth function.

For the 2.4G Wi-Fi function was tested and demonstrated in report 221009018SZN-001.

For the other function was tested and demonstrated in FCC SDoC report 221009017SZN-001.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst-case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen, P.R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

3. System Test Configuration

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by AC120V/60Hz during the test, only the worst data was reported in this report.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the bottom of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Section 4.

The EUT and transmitting antenna was centered on the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during testing was designed to exercise the various system components in a manner similar to a typical use.

Test software: Tera Term, Version: 4.73

3.3 Special Accessories

No special accessories used.

3.4 Equipment Modification

Any modifications installed previous to testing by Zhuhai Pantum Electronics Co., Ltd. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

3.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

3.6 Support Equipment List and Description

Description	Manufacturer	Remark
Portable computer (Provided by Intertek)	DELL	Latitude 3480
RJ45 Cable (Provided by Intertek)	/	Unshielded, 200cm
AC Cable	Zhuhai Pantum Electronics Co., Ltd.	Unshielded, 150cm
USB Cable	Zhuhai Pantum Electronics Co., Ltd.	Shielded, 150cm

4. Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

4.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

4.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 $\text{dB}\mu\text{V}$ is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 $\text{dB}\mu\text{V}/\text{m}$. This value in $\text{dB}\mu\text{V}/\text{m}$ was converted to its corresponding level in $\mu\text{V}/\text{m}$.

$RA = 62.0 \text{ dB}\mu\text{V}$

$AF = 7.4 \text{ dB}$

$CF = 1.6 \text{ dB}$

$AG = 29.0 \text{ dB}$

$PD = 0 \text{ dB}$

$AV = -10 \text{ dB}$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(42 \text{ dB}\mu\text{V}/\text{m})/20] = 125.9 \mu\text{V}/\text{m}$$

4.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

4.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission
at
373.412333 MHz

Judgement: Passed by 4.4 dB

TEST PERSONNEL:

Sign on file

Jeff Liang, Project Engineer
Typed/Printed Name

22 February 2023

Date


Applicant: Zhuhai Pantum Electronics Co., Ltd.

Model: M6550NW Plus

Date of Test: 22 February 2023

Worst Case Operating Mode: Simultaneous transmission (Wi-Fi+Bluetooth)

ANT Polarity: Horizontal

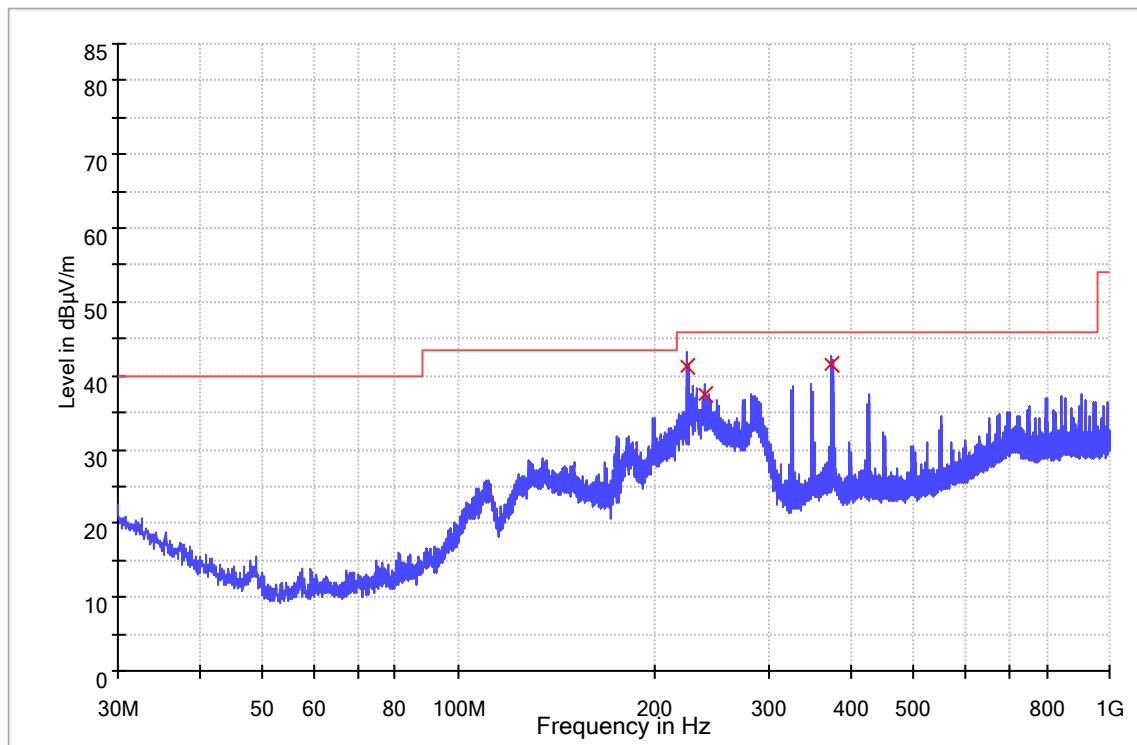

Frequency (MHz)	Quasi Peak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
224.160000	41.4	1000.0	120.000	H	19.7	4.6	46.0
239.099667	37.5	1000.0	120.000	H	19.9	8.5	46.0
373.412333	41.6	1000.0	120.000	H	23.8	4.4	46.0

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBµV/m) = Corr. (dB/m) + Read Level (dBµV)
3. Margin (dB) = Limit Line(dBµV/m) – Level (dBµV/m)


Applicant: Zhuhai Pantum Electronics Co., Ltd.

Model: M6550NW Plus

Date of Test: 22 February 2023

Worst Case Operating Mode: Simultaneous transmission (Wi-Fi+Bluetooth)

ANT Polarity: Vertical

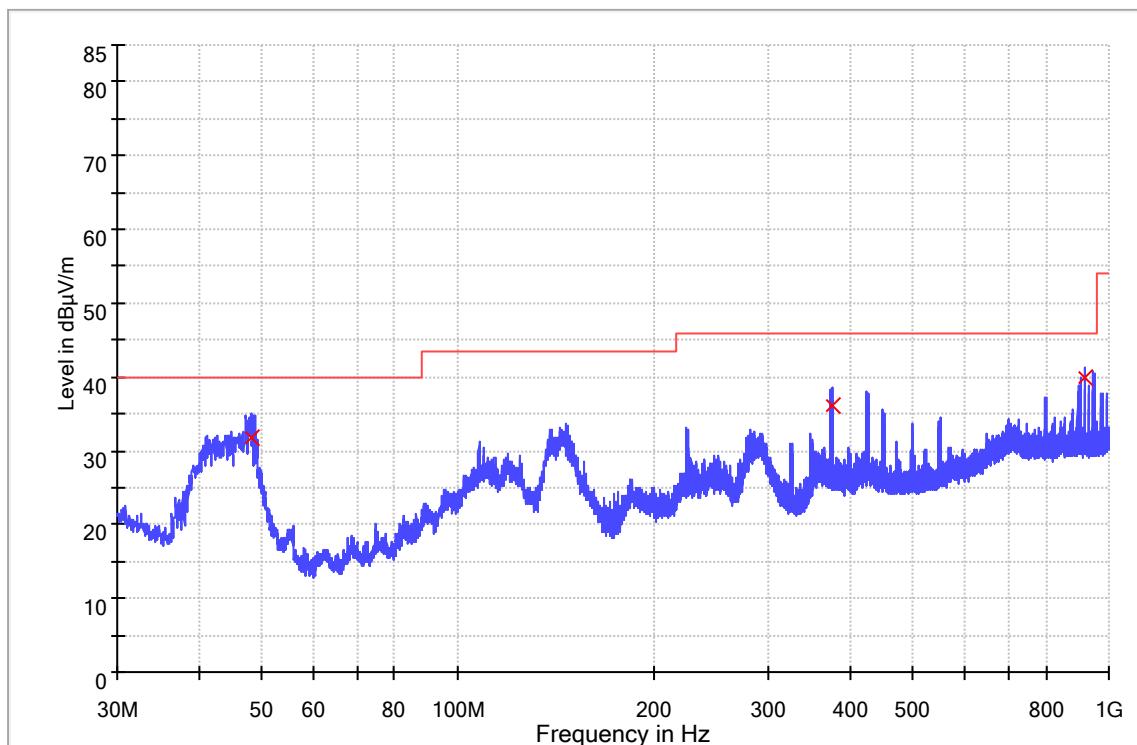

Frequency (MHz)	Quasi Peak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
48.120000	31.8	1000.0	120.000	V	13.8	8.2	40.0
376.581000	36.1	1000.0	120.000	V	24.0	9.9	46.0
921.042000	39.8	1000.0	120.000	V	32.0	6.2	46.0

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dB μ V/m) = Corr. (dB/m) + Read Level (dB μ V)
3. Margin (dB) = Limit Line(dB μ V/m) – Level (dB μ V/m)

4.1.4 Transmitter Spurious Emissions (Radiated)

Worst Case Radiated Emission
at
9608.000 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 8.2 dB

TEST PERSONNEL:

Sign on file

Jeff Liang, Project Engineer
Typed/Printed Name

22 February 2023

Date

Applicant: Zhuhai Pantum Electronics Co., Ltd.

Model: M6550NW Plus

Date of Test: 22 February 2023

Worst Case Operating Mode: Transmitting

Radiated Emissions

Table 1
(2402MHz)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2402.000	106.3	31.9	27.5	101.9	114.0	-12.1
Horizontal	4804.000	42.5	30.4	32.7	44.8	74.0	-29.2
Horizontal	7206.000	46.6	31.0	37.2	52.8	74.0	-21.2
Horizontal	9608.000	49.7	30.6	37.9	57.0	74.0	-17.0

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2402.000	106.3	31.9	27.5	85.0	94.0	-9.0
Horizontal	4804.000	42.5	30.4	32.7	36.8	54.0	-17.2
Horizontal	7206.000	46.6	31.0	37.2	40.6	54.0	-13.4
Horizontal	9608.000	49.7	30.6	37.9	45.8	54.0	-8.2

Table 2
(2440MHz)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2440.000	105.5	31.9	27.5	101.1	114.0	-12.9
Horizontal	4880.000	43.0	30.4	32.7	45.3	74.0	-28.7
Horizontal	7320.000	43.3	31.0	37.2	49.5	74.0	-24.5
Horizontal	9760.000	45.6	30.6	37.9	52.9	74.0	-21.1

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2440.000	105.5	31.9	27.5	84.5	94.0	-9.5
Horizontal	4880.000	43.0	30.4	32.7	35.5	54.0	-18.5
Horizontal	7320.000	43.3	31.0	37.2	40.2	54.0	-13.8
Horizontal	9760.000	45.6	30.6	37.9	45.1	54.0	-8.9

Table 3
(2480MHz)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2480.000	104.9	31.9	27.5	100.5	114.0	-13.5
Horizontal	4960.000	44.5	30.4	32.7	46.8	74.0	-27.2
Horizontal	7440.000	46.2	31.0	37.2	52.4	74.0	-21.6
Horizontal	9920.000	46.3	30.6	37.9	53.6	74.0	-20.4

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2480.000	104.9	31.9	27.5	82.1	94.0	-11.9
Horizontal	4960.000	44.5	30.4	32.7	37.5	54.0	-16.5
Horizontal	7440.000	46.2	31.0	37.2	41.5	54.0	-12.5
Horizontal	9920.000	46.3	30.6	37.9	45.1	54.0	-8.9

Notes:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Jeff Liang

4.2 Conducted Emission Configuration Photograph

For electronic filing, the worst case conducted emission configuration photographs are saved with filename: conducted photos.pdf.

4.2.1 Conducted Emission

Worst Case Conducted Configuration
at
0.534000MHz

Judgement: Passed by 8.2dB margin

TEST PERSONNEL:

Sign on file

Jeff Liang, Project Engineer
Typed/Printed Name

03 November 2022

Date


Applicant: Zhuhai Pantum Electronics Co., Ltd.

Model: M6550NW Plus

Date of Test: 03 November 2022

Worst Case Operating Mode: Simultaneous transmission

Phase: Live

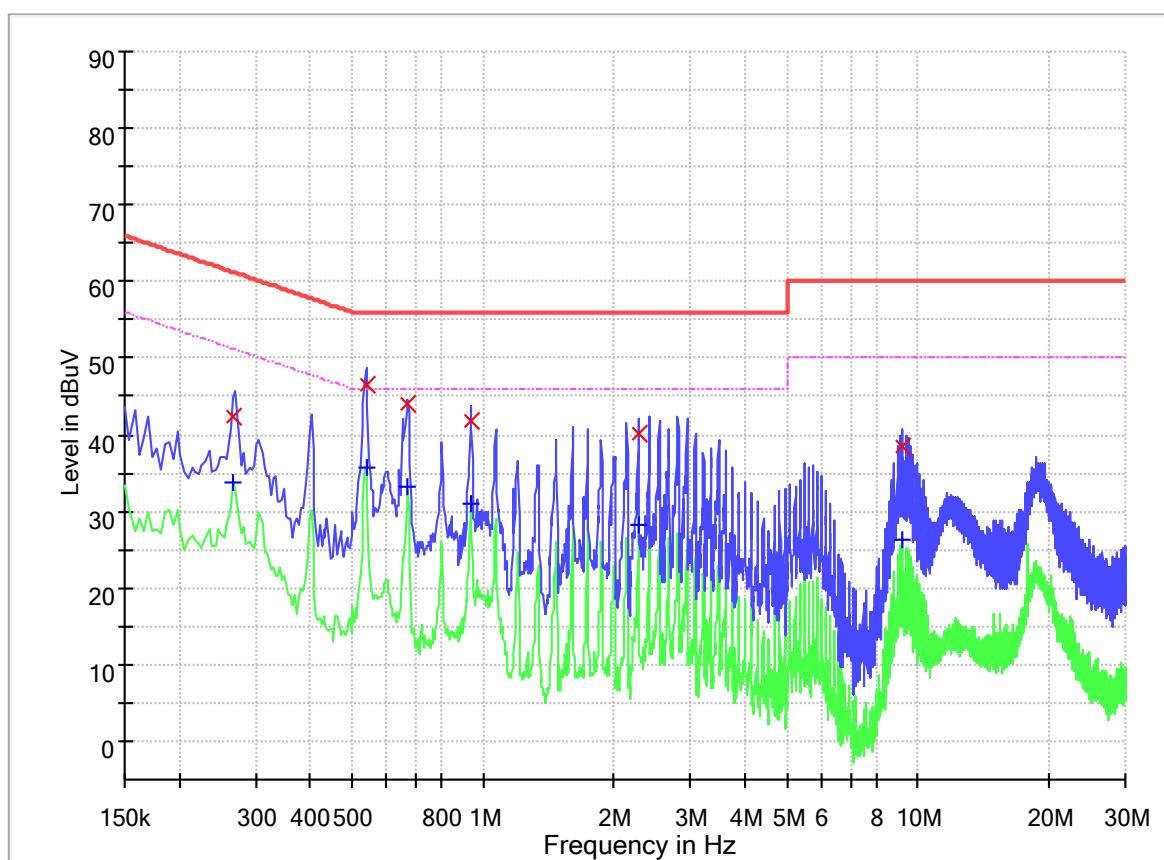Graphic / Data Table**Conducted Emissions
Pursuant to FCC 15.207: Emissions Requirement****Limit and Margin QP**

Frequency (MHz)	Quasi Peak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.266000	42.5	9.000	L1	9.6	18.7	61.2
0.538000	46.6	9.000	L1	9.6	9.4	56.0
0.670000	44.2	9.000	L1	9.6	11.8	56.0
0.938000	41.8	9.000	L1	9.7	14.2	56.0
2.274000	40.2	9.000	L1	9.7	15.8	56.0
9.238000	38.6	9.000	L1	9.9	21.4	60.0

Limit and Margin AV

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.266000	33.7	9.000	L1	9.6	17.5	51.2
0.538000	35.7	9.000	L1	9.6	10.3	46.0
0.670000	33.2	9.000	L1	9.6	12.8	46.0
0.938000	31.1	9.000	L1	9.7	14.9	46.0
2.274000	28.3	9.000	L1	9.7	17.7	46.0
9.238000	26.2	9.000	L1	9.9	23.8	50.0

Applicant: Zhuhai Pantum Electronics Co., Ltd.

Model: M6550NW Plus


Date of Test: 03 November 2022

Worst Case Operating Mode: Simultaneous transmission

Phase: Neutral

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

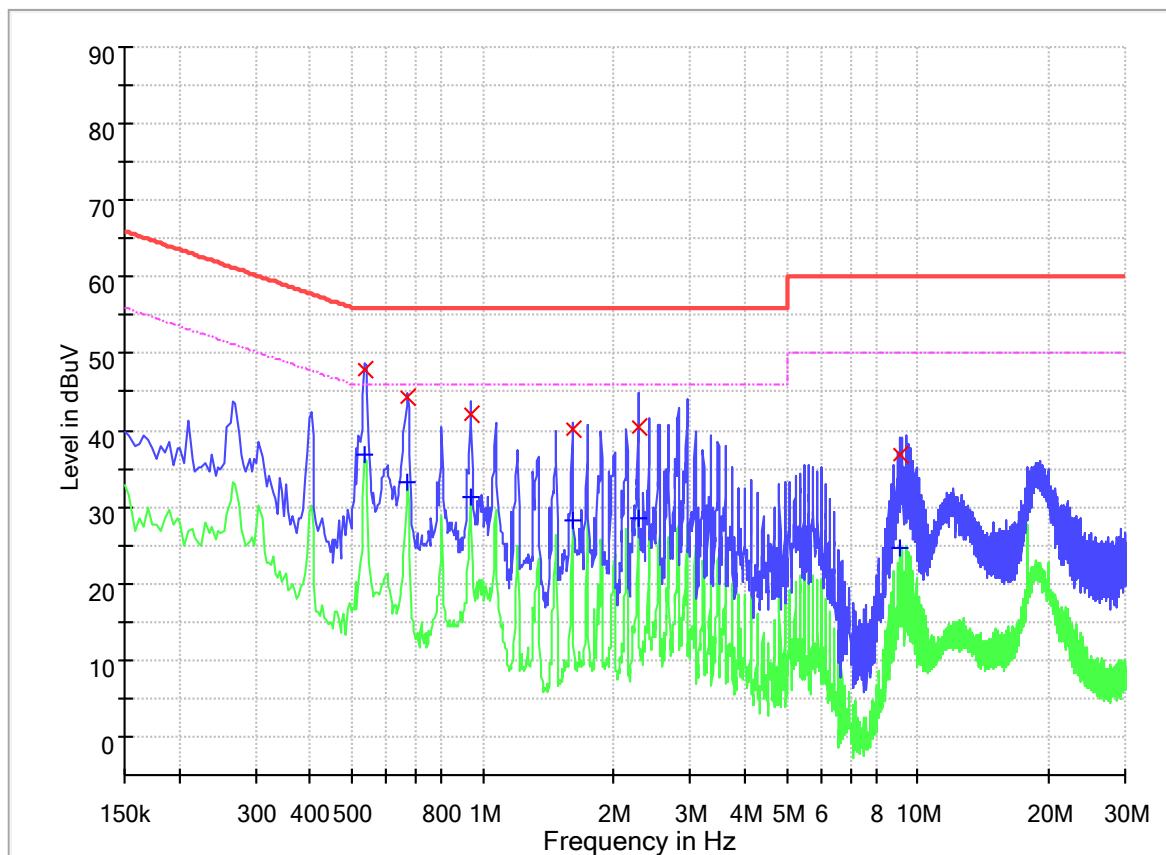

Limit and Margin QP

Frequency (MHz)	Quasi Peak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.534000	47.8	9.000	N	9.6	8.2	56.0
0.670000	44.2	9.000	N	9.6	11.8	56.0
0.938000	42.2	9.000	N	9.6	13.8	56.0
1.606000	40.1	9.000	N	9.6	15.9	56.0
2.274000	40.4	9.000	N	9.7	15.6	56.0
9.106000	36.9	9.000	N	9.9	23.1	60.0

Limit and Margin AV

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.534000	36.8	9.000	N	9.6	9.2	46.0
0.670000	33.2	9.000	N	9.6	12.8	46.0
0.938000	31.4	9.000	N	9.6	14.6	46.0
1.606000	28.3	9.000	N	9.6	17.7	46.0
2.274000	28.5	9.000	N	9.7	17.5	46.0
9.106000	24.7	9.000	N	9.9	25.3	50.0

5. Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

6. Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

7. Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

8. Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

9. Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, 20dB Bandwidth, the test procedure and calculation of factor such as pulse desensitization.

9.1 Bandedge Plot

The test plots are attached as below. From the below plots, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e (Bandedge Plot).

(i) Lowest frequency channel (2402MHz):

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

$$\begin{aligned} &= 101.90 \text{ dB}\mu\text{v/m} - 51.37 \text{ dB} \\ &= 50.53 \text{ dB}\mu\text{v/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the bandedge plot

$$\begin{aligned} &= 85.00 \text{ dB}\mu\text{v/m} - 51.37 \text{ dB} \\ &= 33.63 \text{ dB}\mu\text{v/m} \end{aligned}$$

(ii) Highest frequency channel (2480MHz)

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot


$$\begin{aligned} &= 100.50 \text{ dB}\mu\text{v/m} - 51.53 \text{ dB} \\ &= 48.97 \text{ dB}\mu\text{v/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the bandedge plot


$$\begin{aligned} &= 82.10 \text{ dB}\mu\text{v/m} - 51.53 \text{ dB} \\ &= 30.57 \text{ dB}\mu\text{v/m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dB μ v/m (Peak Limit) and 54dB μ v/m (Average Limit).

Lowest frequency Channel


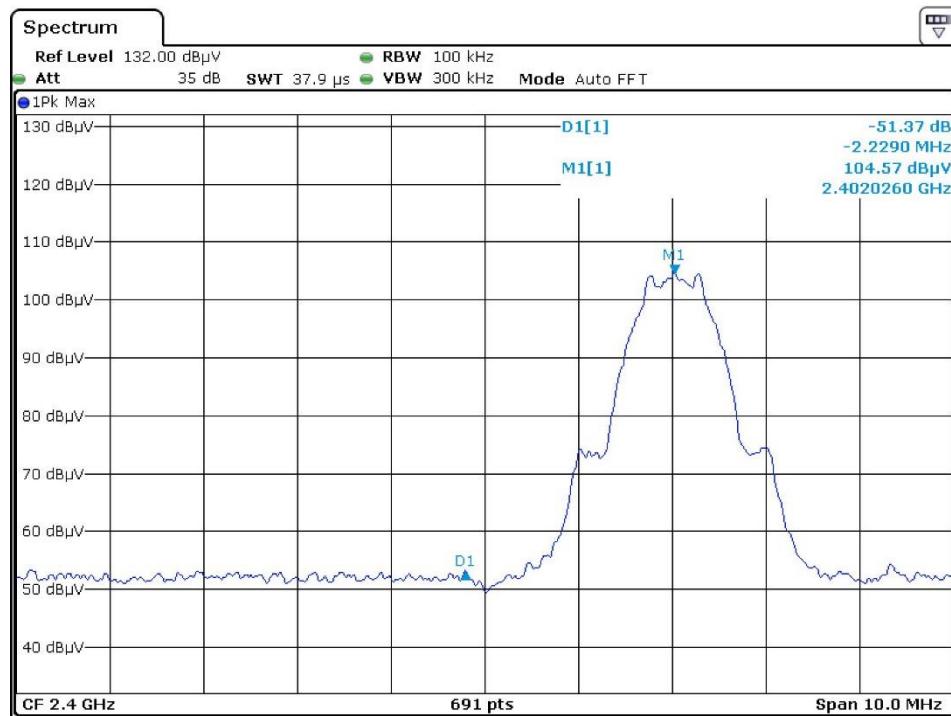


Highest frequency Channel

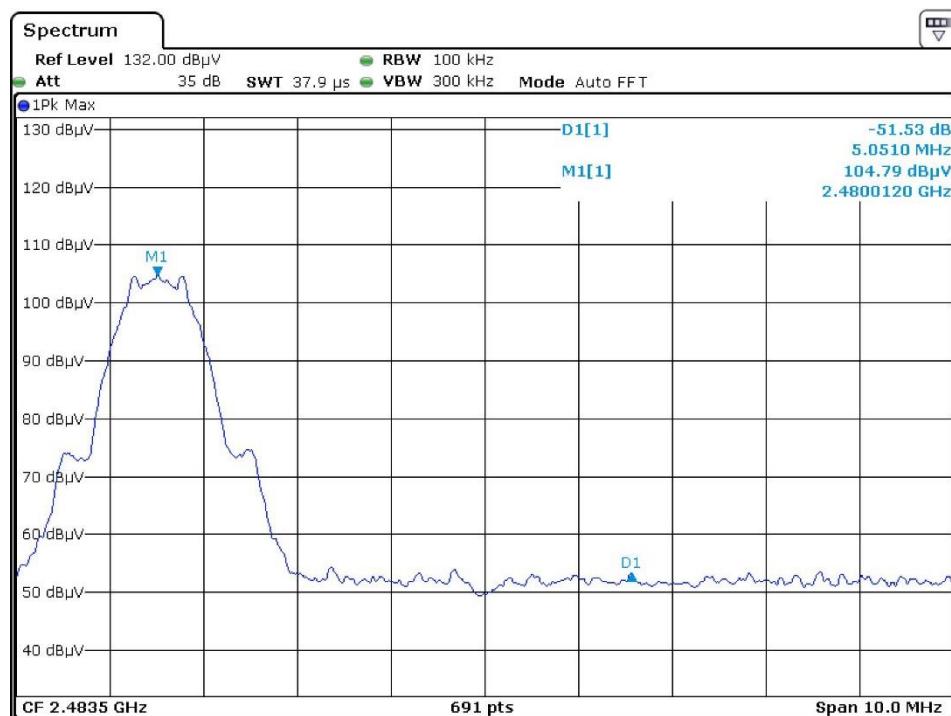

9.2 20dB bandwidth

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered. The test plots are reported as below.

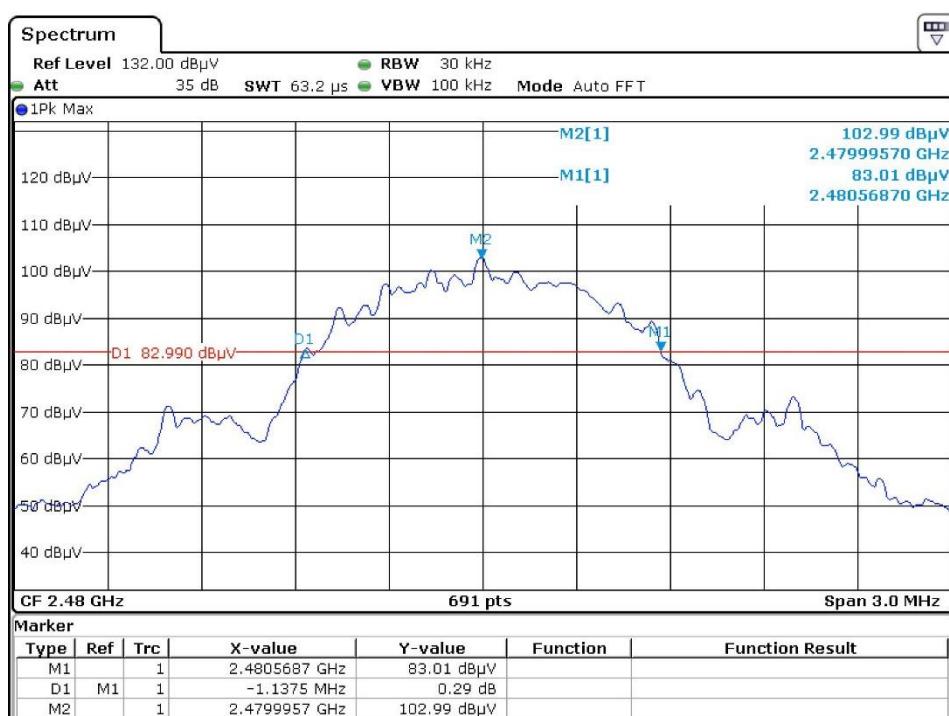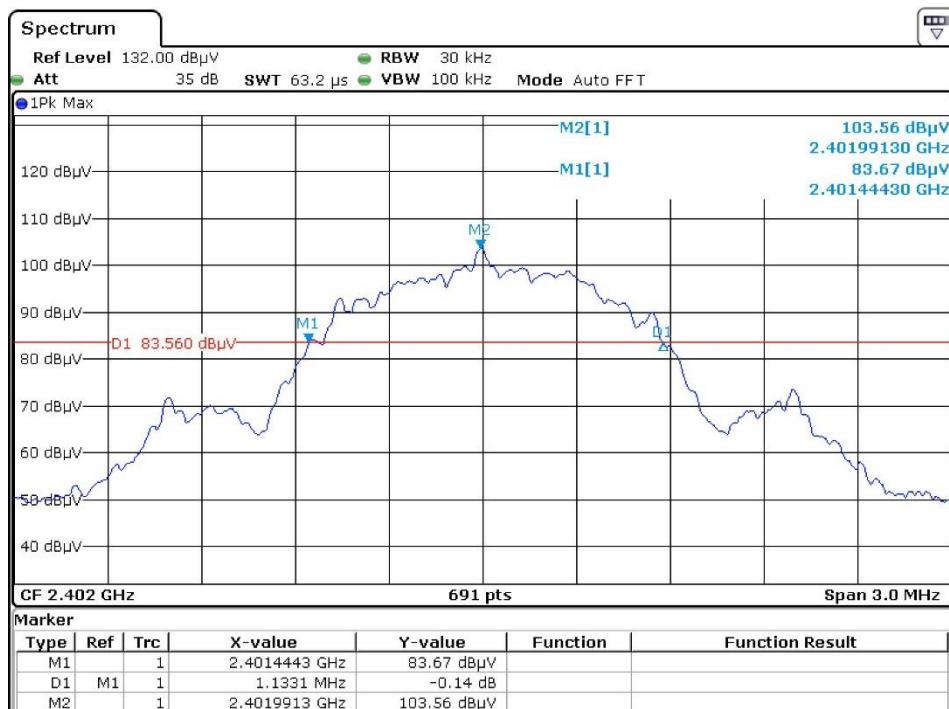

9.3 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device since the transmitter transmits the RF signal continuously.

9.4 Calculation of Average Factor

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEP function on the analyzer was set to ZERO SPAN. The Transmitter ON time was determined from the resultant time-amplitude display:

	See attached spectrum analyzer chart (s) for Transmitter timing
	See Transmitter timing diagram provided by manufacturer
x	Not applicable, duty cycle was not used.

9.5 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter up to 1GHz and 1.5 meter above 1GHz in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 9.4.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used (RBW 3MHz used for fundamental emission).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

10. Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	2022-10-19	2023-10-19
SZ062-10	RF Cable	Bedeau	RG 58	--	2022-10-01	2023-04-01
SZ056-08	Signal Analyzer	R&S	FSV 40	101430	2022-10-19	2023-10-19
SZ185-03	EMI Receiver	R&S	ESR7	101975	2022-10-26	2023-10-26
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	2021-05-18	2023-05-18
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	2021-08-04	2024-08-04
SZ061-09	Double-Ridged Waveguide Horn Antenna	ETS	3115	00092347	2022-10-14	2025-10-14
SZ181-08	Microwave System Amplifier	Agilent	83017A	MY57280108	2022-08-05	2023-08-05
SZ188-05	Anechoic Chamber	ETS	FACT 3-2.0	CT001880-Q1391	2021-05-25	2024-05-25
SZ062-23	RF Cable	RADIALL	SF104PE	MY4262/4PE	2022-10-17	2023-10-17
SZ062-35	RF Cable	Rebes	A50-3.5M3.5M-8M	19100879	2022-10-17	2023-10-17
SZ067-04	Notch Filter	Micro-Tronics	BRM50702-02	015	2022-05-17	2023-05-17
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	2022-07-08	2023-07-08
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	2022-10-24	2023-10-24
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	2022-05-09	2023-05-09
SZ188-03	Shielding Room	ETS	RFD-100	4100	2020-01-07	2023-01-07

***** End of Report *****