

Company: Iotera

Test of: Iota

To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)

Report No.: IOTA01-U7a 900 MHz Rev A



# CONDUCTED TEST REPORT

FROM



Test of: Iotera Iota

To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)

Test Report Serial No.: IOTA01-U7a 900 MHz Rev A

This report supersedes: NONE

Applicant: Iotera  
370 Convention Way # 220  
Redwood City, California 94063  
USA

Product Function: GPS tracker

Issue Date: 8<sup>th</sup> April 2015

## This Test Report is Issued Under the Authority of:

**MiCOM Labs, Inc.**  
575 Boulder Court  
Pleasanton California 94566  
USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

## Table of Contents

<b>1. ACCREDITATION, LISTINGS &amp; RECOGNITION.....</b>	<b>5</b>
1.1. TESTING ACCREDITATION.....	5
1.2. RECOGNITION .....	6
1.3. PRODUCT CERTIFICATION .....	7
<b>2. DOCUMENT HISTORY .....</b>	<b>8</b>
<b>3. TEST RESULT CERTIFICATE.....</b>	<b>9</b>
<b>4. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>	<b>10</b>
4.1. Normative References .....	10
4.2. Test and Uncertainty Procedure.....	11
<b>5. PRODUCT DETAILS AND TEST CONFIGURATIONS.....</b>	<b>12</b>
5.1. Technical Details .....	12
5.2. Scope Of Test Program.....	13
5.3. Equipment Model(s) and Serial Number(s).....	15
5.4. Antenna Details .....	15
5.5. Cabling and I/O Ports .....	15
5.6. Test Configurations.....	15
5.7. Equipment Modifications .....	16
5.8. Deviations from the Test Standard .....	16
<b>6. TEST SUMMARY .....</b>	<b>17</b>
<b>7. TEST EQUIPMENT CONFIGURATION(S) .....</b>	<b>18</b>
7.1. Conducted Testing.....	18
7.2. Radiated Testing.....	20
<b>8. MEASUREMENT AND PRESENTATION OF TEST DATA .....</b>	<b>22</b>
<b>9. TEST RESULTS .....</b>	<b>23</b>
9.1. 20 dB & 99% Bandwidth.....	23
9.2. 6 dB & 99% Bandwidth.....	26
9.3. Number Of Channels .....	28
9.4. Channel Spacing .....	30
9.5. Dwell Time & Channel Occupancy .....	32
9.6. Conducted Output Power .....	34
9.7. Conducted Emissions .....	39
9.7.1. <i>Conducted Spurious Emissions</i> .....	39
9.7.2. <i>Conducted Spurious Band-Edge Emissions</i> .....	43
9.8. Power Spectral Density .....	49
9.9. Radiated Emissions .....	51
9.9.1. <i>Radiated Spurious Emissions</i> .....	51
9.9.2. <i>Digital Emissions (0.03-1 GHz)</i> .....	61
9.10. ac Wireline Emissions .....	69

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

<b>10. APPENDIX .....</b>	<b>71</b>
10.1. 20 dB & 99% Bandwidth .....	71
10.2. 6 dB & 99% Bandwidth .....	77
10.3. Number of Channels .....	80
10.4. Channel Spacing .....	86
10.5. Dwell Time & Channel Occupancy .....	88
10.6. Emissions .....	92
10.6.1. <i>Conducted Emissions</i> .....	92
10.6.1.1. Conducted Spurious Emissions .....	92
10.6.1.2. Conducted Band-Edge Emissions .....	101
10.7. Power Spectral Density .....	107

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## **1. ACCREDITATION, LISTINGS & RECOGNITION**

### **1.1. TESTING ACCREDITATION**

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



*American Association for Laboratory Accreditation*

### ***Accredited Laboratory***

A2LA has accredited

**MICOM LABS**


*Pleasanton, CA*

for technical competence in the field of

**Electrical Testing**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-LAF Communiqué dated 8 January 2009).

Presented this 28<sup>th</sup> day of February 2014.

  
Peter M. Rizzo  
President & CEO  
For the Accreditation Council  
Certificate Number 2381.01  
Valid to November 30, 2015



*For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

### **1.3. PRODUCT CERTIFICATION**

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



**American Association for Laboratory Accreditation**

### ***Accredited Product Certification Body***

A2LA has accredited

**MICOM LABS**


*Pleasanton, CA*

for technical competence as a

**Product Certification Body**

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 - *Requirements for bodies certifying products, processes and services*. This accreditation demonstrates technical competence for a defined scope and the operation of a quality management system.

Presented this 28<sup>th</sup> day of February 2014.



President & CEO  
For the Accreditation Council  
Certificate Number 2381.02  
Valid to November 30, 2015



*For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation*

United States of America – Telecommunication Certification Body (TCB)  
Industry Canada – Certification Body, CAB Identifier – US0159  
Europe – Notified Body (NB), NB Identifier - 2280  
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## **2. DOCUMENT HISTORY**

Document History		
Revision	Date	Comments
Draft	1 <sup>st</sup> April 2015	
Rev A	8 <sup>th</sup> April 2015	Initial Release
.		
.		
.		
.		
.		

In the above table the latest report revision will replace all earlier versions.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### **3. TEST RESULT CERTIFICATE**

<b>Manufacturer:</b> Iotera 370 Convention Way # 220 Redwood City, California 94063 USA	<b>Tested By:</b> MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
<b>Model:</b> Iota	<b>Telephone:</b> +1 925 462 0304 <b>Fax:</b> +1 925 462 0306
<b>Type Of Equipment:</b> GPS tracker	
<b>S/N's:</b> Not Available	
<b>Test Date(s):</b> 25 <sup>th</sup> February – 2 <sup>nd</sup> March 2015	<b>Website:</b> <a href="http://www.micomlabs.com">www.micomlabs.com</a>


STANDARD(S)	TEST RESULTS
FCC CFR 47 Part 15 Subpart C 15.247 (DTS)	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.


**Notes:**

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

**Approved & Released for MiCOM Labs, Inc. by:**

  
Graeme Grieve  
Quality Manager MiCOM Labs, Inc.

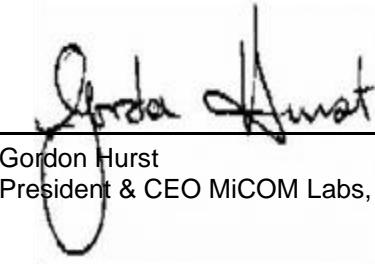

  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 4. REFERENCES AND MEASUREMENT UNCERTAINTY

### 4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 644545 D01 v01r02	Oct 31 2013	Guidance for IEEE 802.11ac Old rules.
II	KDB 662911	Oct 31 2013	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band
III	KDB 558074 D01	June 6,2014	DTS Meas Guidance v03r02 Guidance for performing compliance measurements on Digital Transmission Systems (DTS) operating under section 15.247.
IV	KDB 558074 D02	June 5,2014	DTS Part 15.247 Old Rule. Guidance for performing compliance measurements on Digital Transmission Systems (DTS) operating under section 15.247.
V	A2LA	April 2014	Reference to A2LA Accreditation Status – A2LA Advertising Policy
VI	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
VII	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VIII	CISPR 22	2008	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement
IX	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
X	FCC 47 CFR Part 15.247	2014	CFR Title 47 Part 15.247 – Radio Frequency Devices; Subpart C – Intentional Radiators
XI	ICES-003	Issue 5 2012	Spectrum Management and Telecommunications; Interference-Causing Equipment Standard. Information Technology Equipment (ITE) – Limits and methods of measurement.
XII	M 3003	Edition 3 Nov. 2012	Expression of Uncertainty and Confidence in Measurements
XIII	RSS-210 Annex 8	2010	Radio Standards Specification 210; License-exempt Radio Apparatus (All Frequency Bands): Category I Equipment
XIV	RSS-Gen	2010	General Requirements and Information for the Certification of Radiocommunication Equipment
XV	KDB 644545 D02 v01	June 7th 2012	Alternative Guidance for IEEE 802.11ac and pre-ac Device emissions testing, old rules.
XVI	KDB 644545 D03	August 14th 2014	Guidance for IEEE 802.11ac New Rules v01
XVII	FCC 47 CFR Part 2.1033	2014	FCC requirements and rules regarding photographs and test setup diagrams.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

#### **4.2. Test and Uncertainty Procedure**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

## 5. PRODUCT DETAILS AND TEST CONFIGURATIONS

### 5.1. Technical Details

Details	Description
Purpose:	Test of the Iotera Iota to FCC CFR 47 Part 15 Subpart C 15.247 (DTS).
Applicant:	Iotera 370 Convention Way # 220 Redwood City California 94063 USA
Manufacturer:	As Applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	IOTA01 - IOTA FCC IC
Date EUT received:	25 <sup>th</sup> February 2015
Standard(s) applied:	FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Dates of test (from - to):	25 <sup>th</sup> February – 2 <sup>nd</sup> March 2015
No of Units Tested:	2
Type of Equipment:	GPS Tracker
Product Family Name:	Iota
Model(s):	Iota
Location for use:	Indoor
Declared Frequency Range(s):	902 - 928 MHz; 2400 - 2483.5 MHz;
Primary function of equipment:	GPS Tracker
Secondary function of equipment:	None Provided
Type of Modulation:	Chirp Spread Spectrum
EUT Modes of Operation:	902 - 928 MHz: FH: 125 kHz; 250 kHz (FH – Frequency Hopping) 500kHz DSS
Declared Nominal Output Power (Ave):	902 - 928 MHz: 28.00 dBm: 125FH; 250FH; DSSS: +29 dBm
Transmit/Receive Operation:	Transceiver – Half Duplex
System Beam Forming:	This device has no beam-forming capability
Rated Input Voltage and Current:	3.6Vdc Battery (Lipo)
Operating Temperature Range:	Declared Range -20°C to 50°C
Equipment Dimensions:	40mm x 11mm x 22mm
Weight:	11 grams
Hardware Rev:	V1.0
Software Rev:	V1.0

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## **5.2. Scope Of Test Program**

### **Iotera Iota**

The scope of the test program was to test the Iotera Iota, GPS Tracker configurations in the frequency ranges 902 - 928 MHz; 2400 - 2483.5 MHz; for compliance against the following specification:

### **FCC CFR 47 Part 15 Subpart C 15.247 (DTS)**

### **Utilized Technologies**

The device utilizes three technologies;

a).. Proprietary 900 MHz (902 – 928 MHz)

The 900 MHz has three bandwidths 125 kHz, 250 kHz and 500 kHz. Within these bands there are two operational modes;

1. Frequency Hopping – 125 kHz and 250 kHz
2. DSS – 500 kHz

b).. Wi-Fi 2.4 GHz (previously certified module FCC ID: YOPGS2011MIPS)

c).. Bluetooth 2.4 GHz (2400 – 2483.5 MHz)

The test program exercised the 900 MHz and Bluetooth.



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### 5.3. Equipment Model(s) and Serial Number(s)

Type	Description	Manufacturer	Model	Serial no.	Delivery Date
EUT	Conducted Unit	Iotera	Iota	Unknown	2 <sup>nd</sup> March 2015
EUT	Radiated Unit	Iotera	Iota	Unknown	25 <sup>th</sup> February 2015

### 5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
Integral	Iotera	PCB Trace	PCB	3.0	-	360	-	902 - 928
Integral	Iotera	PCB Trace	PCB	3.0	-	360	-	2400 - 2483.5

BF Gain - Beamforming Gain  
 Dir BW - Directional BeamWidth  
 X-Pol - Cross Polarization

### 5.5. Cabling and I/O Ports

Port Type	Max Cable Length	# Of Ports	Screened	Conn Type	Data Type
None	--	--	--	--	--

### 5.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Operational Mode(s)	Data Rate with Highest Power Bit/s	Channel Frequency (MHz)		
		Low	Mid	High
<b>902 - 928 MHz</b>				
125FH	300	902.56	915.00	926.94
250FH	600	902.56	915.00	926.94
500DSS	1200	902.56	915.00	926.94

Results for the above configurations are provided in this report

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## **5.7. Equipment Modifications**

The following modifications were required to bring the equipment into compliance:

1. NONE

## **5.8. Deviations from the Test Standard**

The following deviations from the test standard were required in order to complete the test program:

1. NONE

## 6. TEST SUMMARY

### List of Measurements

Test Header	Result	Data Link
<b>Conducted Emissions</b>	Complies	--
15.247(a)(2) 20 dB & 99% Bandwidth	Complies	<a href="#">View Data</a>
15.247(a)(2) 6 dB & 99% Bandwidth	Complies	<a href="#">View Data</a>
15.247 Number of Channel	Complies	<a href="#">View Data</a>
15.247 Channel Spacing	Complies	<a href="#">View Data</a>
15.247 Dwell Time & Channel Occupancy	Complies	<a href="#">View Data</a>
15.247(b), 15.31(e) Conducted Output Power	Complies	<a href="#">View Data</a>
15.247(d) Emissions	Complies	-
(1) Conducted Emissions	Complies	-
(i) Conducted Spurious Emissions	Complies	<a href="#">View Data</a>
(ii) Conducted Band-Edge Emissions	Complies	<a href="#">View Data</a>
15.247(e) Power Spectral Density	Complies	<a href="#">View Data</a>
<b>Radiated Emissions</b>	Complies	
Radiated Spurious Emissions	Complies	<a href="#">View Data</a>
Digital Emissions (0.03 – 1 GHz)	Complies	<a href="#">View Data</a>
<b>ac Wireline Emissions</b>		
ac Wireline Emissions	Not Applicable*	--

Note: as the 6 dB bandwidth of the device was greater than 500 kHz the Home Base Bluetooth was tested as a DTS system.

\*Device is dc powered

## **7. TEST EQUIPMENT CONFIGURATION(S)**


### **7.1. Conducted Testing**

Conducted RF Emission Test Set-up(s) with Environmental Chamber

The following tests were performed using the conducted test set-up shown in the diagram below.

1. RF Output Power\*
2. Power Spectral Density
3. Occupied Channel Bandwidth
4. Transmitter Unwanted Emissions in the Spurious Domain (Conducted)

\*environmental chamber utilized

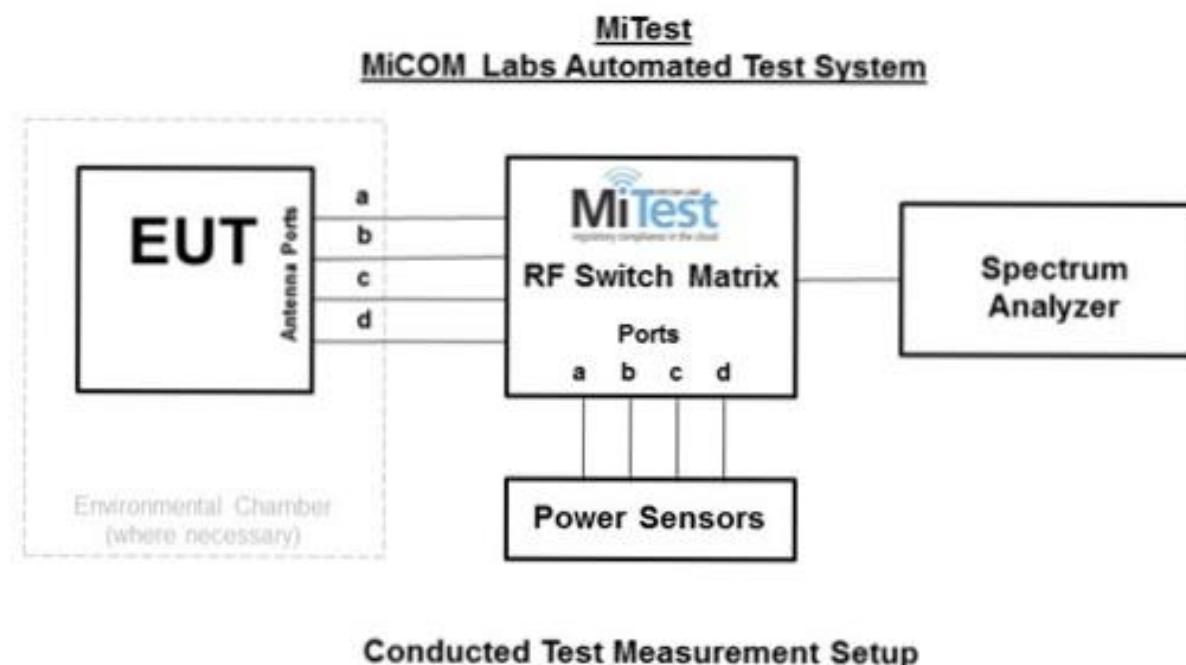

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.



**Title:** Iotera Iota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8<sup>th</sup> April 2015  
**Page:** 19 of 113

---

#### Assets Utilized for Conducted Testing

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
127	Power Supply	HP	6674A	US36370530	Cal when used
158	Barometer/Thermometer	Control Company	4196	E2846	04 Dec 2015
193	Receiver 20 Hz to 7 GHz	Rhode & Schwarz	ESI 7	838496/007	14 Jan 2016
248	Resistance Thermometer	Thermotronics	GR2105-02	9340 #1	30 Oct 2015
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	31 Jul 2015
376	USB 10MHz - 18GHz Average Power Sensor	Agilent	U2000A	MY51440005	28 Oct 2015
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	17 Jul 2015
381	4x4 RF Switch Box	MiCOM Labs	MiTest RF Switch Box	MIC002	30 Jun 2015
419	Laptop with Labview Software	Lenova	W520	TS02	Not Required
420	USB to GPIB Interface	National Instruments	GPIB-USB HS	1346738	Not Required
435	USB Wideband Power Sensor	Boonton	55006	8730	31 Jul 2015
436	USB Wideband Power Sensor	Boonton	55006	8731	31 Jul 2015
437	USB Wideband Power Sensor	Boonton	55006	8759	31 Jul 2015
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
460	Dell Computer with installation of MiTest executable.	Dell	Optiplex330	BC944G1	Not Required
74	Environmental Chamber Chamber 3	Tenney	TTC	12808-1	30 Sep 2015
RF#2 GPIB#1	GPIB cable to Power Supply	HP	GPIB	None	Not Required
RF#2 SMA#1	EUT to Mitest box port 1	Flexco	SMA Cable port1	None	30 Jun 2015
RF#2 SMA#2	EUT to Mitest box port 2	Flexco	SMA Cable port2	None	30 Jun 2015
RF#2 SMA#3	EUT to Mitest box port 3	Flexco	SMA Cable port3	None	30 Jun 2015
RF#2 SMA#4	EUT to Mitest box port 3	Flexco	SMA Cable port4	None	30 Jun 2015
RF#2 SMA#SA	Mitest box to SA	Flexco	SMA Cable SA	None	30 Jun 2015
RF#2 USB#1	USB Cable to Mitest Box	Dynex	USB Cable	None	Not Required

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


## 7.2. Radiated Testing

The following tests were performed using the radiated test set-up shown in the diagram below.

9.9.1 Radiated Spurious Emissions (1 – 10 GHz)

9.9.2 Radiated Digital Emissions (0.03 – 1 GHz)

### Radiated Emission Measurement Setup

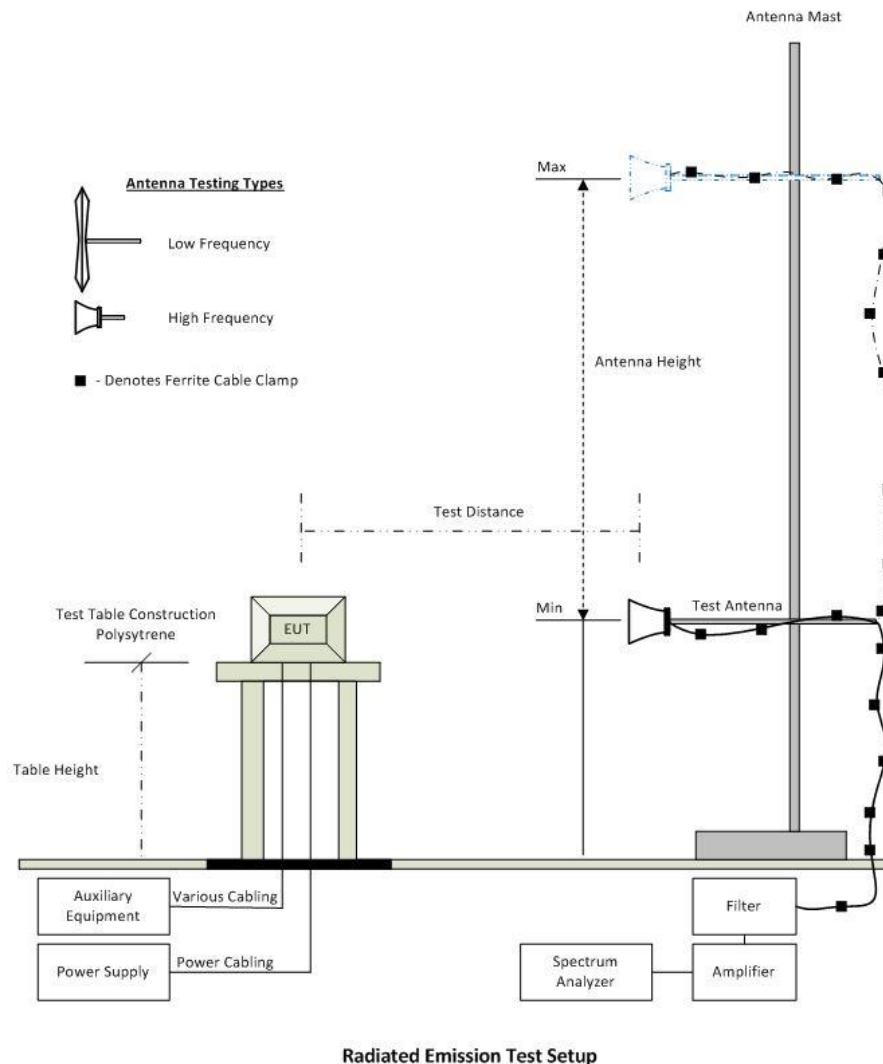


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### Assets Utilized for Radiated Emission Testing

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	04 Dec 2015
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CY101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	31 Jul 2015
301	5470 to 5725 MHz Notch Filter	Microtronics	RBC50704	001	08 Oct 2015
302	5150 to 5350 MHz Notch Filter	Microtronics	BRC50703	002	08 Oct 2015
303	5725 to 5875 MHz Notch filter	Microtronics	BRC50705	003	08 Oct 2015
310	SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001	30 Oct 2015
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	14 Aug 2015
342	2.4 GHz Notch Filter	EWT	EWT-14-0203	H1	08 Oct 2015
343	5.15 GHz Notch Filter	EWT	EWT-14-0200	H1	08 Oct 2015
344	5.35 GHz Notch Filter	EWT	EWT-14-0201	H1	08 Oct 2015
345	5.46 GHz Notch Filter	EWT	EWT-14-0202	H1	08 Oct 2015
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	08 Oct 2015
396	2.4 GHz Notch Filter	Microtronics	BRM50701	001	07 Oct 2015
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	23 Oct 2015
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	10 Oct 2015
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	30 May 2015
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
502	Test Software for Radiated Emissions	EMISoft	Vasona	Version 5 Build 59	Not Required
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## **8. MEASUREMENT AND PRESENTATION OF TEST DATA**

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by MiTest. MiTest is an automated test system developed by MiCOM Labs. MiTest is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "MiTest" Automated Test System" (Patent Pending)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 9. TEST RESULTS

### 9.1. 20 dB & 99% Bandwidth

Conducted Test Conditions for 20 dB and 99% Bandwidth			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	20 dB and 99 % Bandwidth	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (a)(2)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for 20 dB and 99% Bandwidth Measurement

The bandwidth at 20 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

#### Limits for 20 dB and 99% Bandwidth

- (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:
  - (2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and bands. The minimum 20 dB bandwidth shall not exceed 500 kHz.



**Title:** lotera lota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8<sup>th</sup> April 2015  
**Page:** 24 of 113

#### Equipment Configuration for 20 dB & 99% Bandwidth

<b>Variant:</b>	125FH	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	300 Bit/s	<b>Antenna Gain (dBi):</b>	3
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Test Frequency</b>	<b>Measured 20 dB Bandwidth (MHz)</b>				<b>20 dB Bandwidth (MHz)</b>		<b>Limit</b>	<b>Lowest Margin</b>
	<b>Port(s)</b>				<b>Highest</b>	<b>Lowest</b>		
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>			<b>KHz</b>	<b>MHz</b>
902.6	0.162	--	--	--	0.162	0.162	≤250.0	-0.88
915.1	0.162	--	--	--	0.162	0.162	≤250.0	-0.88
926.9	0.164	--	--	--	0.164	0.164	≤250.0	-0.86

<b>Test Frequency</b>	<b>Measured 99% Bandwidth (MHz)</b>				<b>Maximum 99% Bandwidth (MHz)</b>		
	<b>Port(s)</b>						
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>			
902.6	0.142	--	--	--	0.142		
915.1	0.142	--	--	--	0.142		
926.9	0.141	--	--	--	0.141		

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** lotera lota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8<sup>th</sup> April 2015  
**Page:** 25 of 113

#### Equipment Configuration for 20 dB & 99% Bandwidth

<b>Variant:</b>	250FH	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	600 Bit/s	<b>Antenna Gain (dBi):</b>	3
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Test Frequency</b>	<b>Measured 6 dB Bandwidth (MHz)</b>				<b>6 dB Bandwidth (MHz)</b>		<b>Limit</b>	<b>Lowest Margin</b>
	<b>Port(s)</b>				<b>Highest</b>	<b>Lowest</b>		
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>			<b>KHz</b>	<b>MHz</b>
902.6	0.306	--	--	--	0.306	0.306	≤500.0	-0.19
915.1	0.301	--	--	--	0.301	0.301	≤500.0	-0.20
926.9	0.300	--	--	--	0.300	0.300	≤500.0	-0.20

<b>Test Frequency</b>	<b>Measured 99% Bandwidth (MHz)</b>				<b>Maximum 99% Bandwidth (MHz)</b>		
	<b>Port(s)</b>						
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>			
902.6	0.269	--	--	--	0.269		
915.1	0.267	--	--	--	0.267		
926.9	0.268	--	--	--	0.268		

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## **9.2. 6 dB & 99% Bandwidth**

Conducted Test Conditions for 6 dB and 99% Bandwidth			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	6 dB and 99 % Bandwidth	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (a)(2)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

### Test Procedure for 6 dB and 99% Bandwidth Measurement

The bandwidth at 6 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

### **Limits for 6 dB and 99% Bandwidth**

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### Equipment Configuration for 6 dB & 99% Bandwidth

<b>Variant:</b>	500DSS	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	1.2 KBit/s	<b>Antenna Gain (dBi):</b>	3
<b>Modulation:</b>	DSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			KHz	MHz
902.6	0.770	--	--	--	0.770	0.770	≥500.0	-0.27
915.1	0.770	--	--	--	0.770	0.770	≥500.0	-0.27
926.9	0.790	--	--	--	0.790	0.790	≥500.0	-0.29

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
902.6	0.814	--	--	--	0.814		
915.1	0.818	--	--	--	0.818		
926.9	0.814	--	--	--	0.814		

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

### **9.3. Number Of Channels**

Conducted Test Conditions for Number Of Channels			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Number of Channels	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (a)(2)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure

The number of channels and channel occupancy is measured with a spectrum analyzer connected to the antenna terminal, while the EUT is operating in transmission mode at the appropriate center frequency and modulation.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

#### Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies.



**Title:** Iotera Iota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8<sup>th</sup> April 2015  
**Page:** 29 of 113

---

#### Equipment Configuration for Hopping Sequence

<b>Variant:</b>	125FH, 250FH	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	300 Bit/s, 600 Bit/s	<b>Antenna Gain (dBi):</b>	3
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Modulation</b>	<b>Frequency Range (MHz)</b>	<b>Number of Hopping Channels</b>	<b>Limit</b>	<b>Total Number of Hops</b>	<b>Results</b>
			<b>No of Hopping Channels</b>		
125FH	900.00 – 912.00	32	> 50	88	Pass
125FH	912.00 – 920.00	28	> 50	88	Pass
125FH	920.00 – 928.00	28	> 50	88	Pass
250FH	900.00 – 912.00	16	> 25	44	Pass
250FH	912.00 – 920.00	14	> 25	44	Pass
250FH	920.00 – 928.00	14	> 25	44	Pass

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## **9.4. Channel Spacing**

Conducted Test Conditions for 6 dB and 99% Bandwidth			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Channel Spacing	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (a)(2)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

### Test Procedure

The number of channels and channel occupancy is measured with a spectrum analyzer connected to the antenna terminal, while the EUT is operating in transmission mode at the appropriate center frequency and modulation.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

### Limit

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.



**Title:** Iotera Iota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8th April 2015  
**Page:** 31 of 113

---

#### Equipment Configuration for Channel Separation

<b>Variant:</b>	125FH, 250FH	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	300 Bit/s, 600 Bit/s	<b>Antenna Gain (dBi):</b>	3
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Center Frequency</b> <b>MHz</b>	<b>Packet Type</b>	<b>Chan Separation</b>	<b>Limit</b>	<b>Result</b>
		<b>MHz</b>	<b>MHz</b>	
902.125	125FH	0.251	> 0.162	Pass
902.25	250FH	0.503	> 0.306	Pass

#### Traceability to Industry Recognized Test Methodologies

Measurement Uncertainty:  $\pm 2.81$  dB (Spectrum/Amplitude),  $\pm 0.86$  ppm (Frequency)

Note: click the links in the above matrix to view the graphical image (plot).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## **9.5. Dwell Time & Channel Occupancy**

Conducted Test Conditions for 6 dB and 99% Bandwidth			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Dwell Time & Channel Occupancy	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (a)(2)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

### Test Procedure

The number of channels and channel occupancy is measured with a spectrum analyzer connected to the antenna terminal, while the EUT is operating in transmission mode at the appropriate center frequency and modulation.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

### Limit

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.



**Title:** Iotera Iota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8<sup>th</sup> April 2015  
**Page:** 33 of 113

---

#### Equipment Configuration for Dwell Time & Channel Occupancy

<b>Variant:</b>	125FH, 250FH	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	300 Bit/s, 600 Bit/s	<b>Antenna Gain (dBi):</b>	3
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Center Frequency MHz	Packet Type	Dwell Time (Single Channel)	Limit (Single Channel)	Channel Occupancy Limit	Result
		mS	mS	s	
902.125	125FH	398	400	20	Pass
902.25	250FH	398	400	10	Pass

#### Traceability to Industry Recognized Test Methodologies

Measurement Uncertainty: ±2.81 dB (Spectrum/Amplitude), ±0.86 ppm (Frequency)

Note: click the links in the above matrix to view the graphical image (plot).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 9.6. Conducted Output Power

Conducted Test Conditions for Fundamental Emission Output Power			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Output Power	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (b) & (c)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

Test Procedure for Fundamental Emission Output Power Measurement  
 In the case of average power measurements an average power sensor was utilized.

For peak power measurements the spectrum analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.

Testing was performed under ambient conditions at nominal voltage only. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured, summed ( $\Sigma$ ) and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Supporting Information

Calculated Power =  $A + G + Y + 10 \log (1/x)$  dBm

A = Total Power  $[10^{\log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})}]$

G = Antenna Gain

Y = Beamforming Gain

x = Duty Cycle (average power measurements only)

### Limits for Fundamental Emission Output Power

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following for non-frequency hopping systems:

- (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
- (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (c) Operation with directional antenna gains greater than 6 dBi.
  - (1) Fixed point-to-point operation:
    - (i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.
    - (ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.
    - (iii) Fixed, point-to-point operation, as used in paragraphs (c)(1)(i) and (c)(1)(ii) of this section, excludes the use of point-to-

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

(2) In addition to the provisions in paragraphs (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:

(i) Different information must be transmitted to each receiver.

(ii) If the transmitter employs an antenna system that emits multiple directional beams but does not do emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

(A) The directional gain shall be calculated as the sum of  $10 \log$  (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

(B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.

(iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.

(iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.



**Title:** lotera lota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8<sup>th</sup> April 2015  
**Page:** 36 of 113

#### Equipment Configuration for Average Output Power

<b>Variant:</b>	125FH	<b>Duty Cycle (%):</b>	100.0
<b>Data Rate:</b>	300 Bit/s	<b>Antenna Gain (dBi):</b>	3.0
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Test Frequency</b>	<b>Measured Output Power (dBm)</b>				<b>Calculated Total Power <math>\Sigma</math> Port(s) + DCCF (+0 dB)</b>	<b>Limit</b>	<b>Margin</b>	<b>EUT Power Setting</b>
	<b>Port(s)</b>							
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>	<b>dBm</b>	<b>dBm</b>	<b>dB</b>	
902.6	28.48	--	--	--	28.48	30.00	-1.52	2.00
915.1	28.37	--	--	--	28.37	30.00	-1.63	2.00
926.9	28.16	--	--	--	28.16	30.00	-1.84	2.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	1.33 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Iotera Iota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8th April 2015  
**Page:** 37 of 113

#### Equipment Configuration for Average Output Power

<b>Variant:</b>	250FH	<b>Duty Cycle (%):</b>	100.0
<b>Data Rate:</b>	600 Bit/s	<b>Antenna Gain (dBi):</b>	3.0
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Test Frequency</b>	<b>Measured Output Power (dBm)</b>				<b>Calculated Total Power <math>\Sigma</math> Port(s) + DCCF (+0 dB)</b>	<b>Limit</b>	<b>Margin</b>	<b>EUT Power Setting</b>
	<b>Port(s)</b>							
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>	<b>dBm</b>	<b>dBm</b>	<b>dB</b>	
<b>902.6</b>	28.41	--	--	--	28.41	30.00	-1.59	2.00
<b>915.1</b>	27.99	--	--	--	27.99	30.00	-2.01	2.00
<b>926.9</b>	27.36	--	--	--	27.36	30.00	-2.64	2.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	1.33 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Iotera Iota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8th April 2015  
**Page:** 38 of 113

#### Equipment Configuration for Average Output Power

<b>Variant:</b>	500DSS	<b>Duty Cycle (%):</b>	100.0
<b>Data Rate:</b>	1.2 KBit/s	<b>Antenna Gain (dBi):</b>	3.0
<b>Modulation:</b>	DSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Test Frequency</b>	<b>Measured Output Power (dBm)</b>				<b>Calculated Total Power <math>\Sigma</math> Port(s) + DCCF (+0 dB)</b>	<b>Limit</b>	<b>Margin</b>	<b>EUT Power Setting</b>
	<b>Port(s)</b>							
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>	<b>dBm</b>	<b>dBm</b>	<b>dB</b>	
<b>902.6</b>	27.79	--	--	--	27.79	30.00	-2.21	2.00
<b>915.1</b>	28.72	--	--	--	28.72	30.00	-1.28	2.00
<b>926.9</b>	28.92	--	--	--	28.92	30.00	-1.08	2.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	1.33 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## **9.7. Conducted Emissions**

### **9.7.1. Conducted Spurious Emissions**

Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Max Unwanted Emission Levels	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (d)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### **Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement**

Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 30 dBc (average detector) or 20 dBc (peak detector) below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

#### **Limits Transmitter Conducted Spurious and Band-Edge Emissions**

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).



**Title:** Iotera Iota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8<sup>th</sup> April 2015  
**Page:** 40 of 113

#### Equipment Configuration for Transmitter Conducted Spurious Emissions

<b>Variant:</b>	125FH	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	300 Bit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Test Frequency</b>	<b>Frequency Range</b>	<b>Transmitter Conducted Spurious Emissions (dBm)</b>							
		<b>Port a</b>		<b>Port b</b>		<b>Port c</b>		<b>Port d</b>	
<b>MHz</b>	<b>MHz</b>	<b>SE</b>	<b>Limit</b>	<b>SE</b>	<b>Limit</b>	<b>SE</b>	<b>Limit</b>	<b>SE</b>	<b>Limit</b>
902.6	30.0 - 26000.0	-49.043	-26.88	--	--	--	--	--	--
915.1	30.0 - 26000.0	-49.212	-26.77	--	--	--	--	--	--
926.9	30.0 - 26000.0	-49.014	-27.39	--	--	--	--	--	--

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	"<=40 GHz 2.37 dB, > 40 GHz 4.6 dB"

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Iotera Iota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8<sup>th</sup> April 2015  
**Page:** 41 of 113

#### Equipment Configuration for Transmitter Conducted Spurious Emissions

<b>Variant:</b>	250FH	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	600 Bit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Test Frequency</b>	<b>Frequency Range</b>	<b>Transmitter Conducted Spurious Emissions (dBm)</b>							
		<b>Port a</b>		<b>Port b</b>		<b>Port c</b>		<b>Port d</b>	
<b>MHz</b>	<b>MHz</b>	<b>SE</b>	<b>Limit</b>	<b>SE</b>	<b>Limit</b>	<b>SE</b>	<b>Limit</b>	<b>SE</b>	<b>Limit</b>
902.6	30.0 - 26000.0	-49.168	-26.75	--	--	--	--	--	--
915.1	30.0 - 26000.0	-49.112	-26.73	--	--	--	--	--	--
926.9	30.0 - 26000.0	-49.587	-27.31	--	--	--	--	--	--

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	"<=40 GHz 2.37 dB, > 40 GHz 4.6 dB"

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Iotera Iota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8<sup>th</sup> April 2015  
**Page:** 42 of 113

---

#### Equipment Configuration for Transmitter Conducted Spurious Emissions

<b>Variant:</b>	500DSS	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	1.2 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	DSS	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Test Frequency</b>	<b>Frequency Range</b>	<b>Transmitter Conducted Spurious Emissions (dBm)</b>							
		<b>Port a</b>		<b>Port b</b>		<b>Port c</b>		<b>Port d</b>	
<b>MHz</b>	<b>MHz</b>	<b>SE</b>	<b>Limit</b>	<b>SE</b>	<b>Limit</b>	<b>SE</b>	<b>Limit</b>	<b>SE</b>	<b>Limit</b>
902.6	30.0 - 26000.0	-51.820	-27.17	--	--	--	--	--	--
915.1	30.0 - 26000.0	-51.737	-26.46	--	--	--	--	--	--
926.9	30.0 - 26000.0	-51.774	-27.61	--	--	--	--	--	--

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	"<=40 GHz 2.37 dB, > 40 GHz 4.6 dB"

Note: click the links in the above matrix to view the graphical image (plot).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### 9.7.2. Conducted Spurious Band-Edge Emissions

#### Equipment Configuration for Conducted Low Band-Edge Emissions - Average

<b>Variant:</b>	125FH	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	300 Bit/s	<b>Antenna Gain (dBi):</b>	3
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Channel Frequency:</b>	902.6 MHz					
<b>Band-Edge Frequency:</b>	902.0 MHz					
<b>Test Frequency Range:</b>	850.0 - 915.0 MHz					
<b>Port(s)</b>	<b>Band-Edge Markers and Limit</b>	<b>Revised Limit</b>	<b>Margin</b>			
	<b>M1 Amplitude (dBm)</b>	<b>Plot Limit (dBm)</b>	<b>M2 Frequency (MHz)</b>	<b>Amplitude (dBm)</b>	<b>M2A Frequency (MHz)</b>	<b>(MHz)</b>
<b>a</b>	-36.62	-6.00	902.20	--	--	-0.200

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS		
Measurement Uncertainty:	"≤40 GHz 2.37 dB, > 40 GHz 4.6 dB"		

Note: click the links in the above matrix to view the graphical image (plot).



**Title:** lotera lota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8<sup>th</sup> April 2015  
**Page:** 44 of 113

---

#### Equipment Configuration for Conducted Low Band-Edge Emissions - Average

<b>Variant:</b>	250FH	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	600 Bit/s	<b>Antenna Gain (dBi):</b>	3
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Channel Frequency:</b>	902.6 MHz					
<b>Band-Edge Frequency:</b>	902.0 MHz					
<b>Test Frequency Range:</b>	850.0 - 915.0 MHz					
<b>Port(s)</b>	<b>Band-Edge Markers and Limit</b>			<b>Revised Limit</b>	<b>Margin</b>	
	<b>M1 Amplitude (dBm)</b>	<b>Plot Limit (dBm)</b>	<b>M2 Frequency (MHz)</b>	<b>Amplitude (dBm)</b>	<b>M2A Frequency (MHz)</b>	<b>(MHz)</b>
<b>a</b>	-33.52	-3.00	902.20	--	--	-0.200

#### Traceability to Industry Recognized Test Methodologies

<b>Work Instruction:</b>	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
<b>Measurement Uncertainty:</b>	"<=40 GHz 2.37 dB, > 40 GHz 4.6 dB"

Note: click the links in the above matrix to view the graphical image (plot).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Iotera Iota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8th April 2015  
**Page:** 45 of 113

---

#### Equipment Configuration for Conducted Low Band-Edge Emissions - Average

<b>Variant:</b>	500DSS	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	1.2 KBit/s	<b>Antenna Gain (dBi):</b>	3
<b>Modulation:</b>	DSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Channel Frequency:</b>	902.6 MHz					
<b>Band-Edge Frequency:</b>	902.0 MHz					
<b>Test Frequency Range:</b>	850.0 - 915.0 MHz					
<b>Port(s)</b>	<b>Band-Edge Markers and Limit</b>			<b>Revised Limit</b>	<b>Margin</b>	
	<b>M1 Amplitude (dBm)</b>	<b>Plot Limit (dBm)</b>	<b>M2 Frequency (MHz)</b>	<b>Amplitude (dBm)</b>	<b>M2A Frequency (MHz)</b>	<b>(MHz)</b>
<b>a</b>	-29.58	-10.00	902.10	--	--	-0.100

#### Traceability to Industry Recognized Test Methodologies

<b>Work Instruction:</b>	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS	
<b>Measurement Uncertainty:</b>	"≤-40 GHz 2.37 dB, > 40 GHz 4.6 dB"	

Note: click the links in the above matrix to view the graphical image (plot).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Iotera Iota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8th April 2015  
**Page:** 46 of 113

---

#### Equipment Configuration for Conducted High Band-Edge Emissions - Average

<b>Variant:</b>	125FH	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	300 Bit/s	<b>Antenna Gain (dBi):</b>	3
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Channel Frequency:</b>	926.9 MHz					
<b>Band-Edge Frequency:</b>	928.0 MHz					
<b>Test Frequency Range:</b>	915.0 - 975.0 MHz					
<b>Port(s)</b>	<b>Band-Edge Markers and Limit</b>			<b>Revised Limit</b>	<b>Margin</b>	
	<b>M3 Amplitude (dBm)</b>	<b>Plot Limit (dBm)</b>	<b>M2 Frequency (MHz)</b>	<b>Amplitude (dBm)</b>	<b>M2A Frequency (MHz)</b>	<b>(MHz)</b>
<b>a</b>	-43.29	-4.00	927.10	--	--	-0.900

#### Traceability to Industry Recognized Test Methodologies

<b>Work Instruction:</b>	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS	
<b>Measurement Uncertainty:</b>	"≤40 GHz 2.37 dB, > 40 GHz 4.6 dB"	

Note: click the links in the above matrix to view the graphical image (plot).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Iotera Iota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8th April 2015  
**Page:** 47 of 113

---

#### Equipment Configuration for Conducted High Band-Edge Emissions - Average

<b>Variant:</b>	250FH	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	600 Bit/s	<b>Antenna Gain (dBi):</b>	3
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Channel Frequency:</b>	926.9 MHz					
<b>Band-Edge Frequency:</b>	928.0 MHz					
<b>Test Frequency Range:</b>	915.0 - 975.0 MHz					
<b>Port(s)</b>	<b>Band-Edge Markers and Limit</b>			<b>Revised Limit</b>	<b>Margin</b>	
	<b>M3 Amplitude (dBm)</b>	<b>Plot Limit (dBm)</b>	<b>M2 Frequency (MHz)</b>	<b>Amplitude (dBm)</b>	<b>M2A Frequency (MHz)</b>	<b>(MHz)</b>
<b>a</b>	-43.98	-7.00	927.00	--	--	-1.000

#### Traceability to Industry Recognized Test Methodologies

<b>Work Instruction:</b>	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS		
<b>Measurement Uncertainty:</b>	"≤40 GHz 2.37 dB, > 40 GHz 4.6 dB"		

Note: click the links in the above matrix to view the graphical image (plot).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Iotera Iota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8th April 2015  
**Page:** 48 of 113

---

#### Equipment Configuration for Conducted High Band-Edge Emissions - Average

<b>Variant:</b>	500DSS	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	1.2 KBit/s	<b>Antenna Gain (dBi):</b>	3
<b>Modulation:</b>	DSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Channel Frequency:</b>	926.9 MHz					
<b>Band-Edge Frequency:</b>	928.0 MHz					
<b>Test Frequency Range:</b>	915.0 - 975.0 MHz					
<b>Port(s)</b>	<b>Band-Edge Markers and Limit</b>			<b>Revised Limit</b>	<b>Margin</b>	
	<b>M3 Amplitude (dBm)</b>	<b>Plot Limit (dBm)</b>	<b>M2 Frequency (MHz)</b>	<b>Amplitude (dBm)</b>	<b>M2A Frequency (MHz)</b>	<b>(MHz)</b>
<b>a</b>	-41.48	-7.00	927.30			-0.700

#### Traceability to Industry Recognized Test Methodologies

<b>Work Instruction:</b>	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS		
<b>Measurement Uncertainty:</b>	"≤40 GHz 2.37 dB, > 40 GHz 4.6 dB"		

Note: click the links in the above matrix to view the graphical image (plot).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 9.8. Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Power Spectral Density	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (e)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

### Test Procedure for Power Spectral Density

The transmitter output was connected to a spectrum analyzer and the measured made in a 3 kHz resolution bandwidth using the analyzer auto-coupled sweep-time. A peak value was found over the full emission bandwidth and the spectrum downloaded for post processing purposes.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. The Peak Power Spectral Density is the highest level found across the emission bandwidth. With multiple antenna port measurements the numerical analyzer data from each port is summed (â) and a link to this additional graphic is provided.

Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with multiple transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were post processed and the resulting numerical and graphical data presented.

### NOTE:

It may be observed that the spectrum in some antenna port plots break the limit line however this in itself does NOT constitute a failure. In all cases a spectrum summation plot is provided in order to prove compliance. A failure occurs only after the summation of all spectrum plots have been summed and are found to be greater than the limit line.

### Supporting Information

Calculated Power =  $A + 10 \log (1/x) \text{ dBm}$

$A = \text{Total Power Spectral Density} [10 \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$

$x = \text{Duty Cycle}$

### Limits Power Spectral Density

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.



**Title:** lotera lota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8<sup>th</sup> April 2015  
**Page:** 50 of 113

Equipment Configuration for Power Spectral Density - Average			
<b>Variant:</b>	500DSS	<b>Duty Cycle (%):</b>	100.0
<b>Data Rate:</b>	1.2 KBit/s	<b>Antenna Gain (dBi):</b>	3.00
<b>Modulation:</b>	DSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results						
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0 dB)	Margin
	Port(s) (dBm/3KHz)					
MHz	a	b	c	d	dBm/3KHz	dBm/3KHz
902.6	-3.030	--	--	--	-3.030	8.0
915.1	-3.134	--	--	--	-3.134	8.0
926.9	-3.049	--	--	--	-3.049	8.0

Traceability to Industry Recognized Test Methodologies						
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK					
Measurement Uncertainty:	2.81 dB					

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## **9.9. Radiated Emissions**

### **9.9.1. Radiated Spurious Emissions**

**Transmitter Radiated Spurious Emissions (above 1 GHz); Peak Field Strength Measurements; and Radiated Band Edge Measurements – Restricted Bands**

**FCC, Part 15 Subpart C §15.247(d) 15.205; 15.209**

**Industry Canada RSS-210 §A8.5, §2.2, §2.6**

**Industry Canada RSS-Gen §4.7**

#### **Test Procedure**

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

For example:

Given receiver input reading of 51.5 dB $\mu$ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu V/m))}$$


$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

**NOTE: KDB 662911 was implemented for Out-of-Band measurements. Where necessary Option (2) Measure and add 10 log (N) dB was implemented**

## Frequency Hopping Operation

Test Freq.	902.5 MHz, 125 KHz BW	Engineer	JMH
Variant	TX Spur on Tag	Temp (°C)	15
Freq. Range	1-10GHz	Rel. Hum.(%)	36
Power Setting	Maximum (+29 dBm)	Press. (mBars)	1013
Antenna	Integral		
Test Notes 1			
Test Notes 2	SN# PP01 Battery Powered 3.7V		

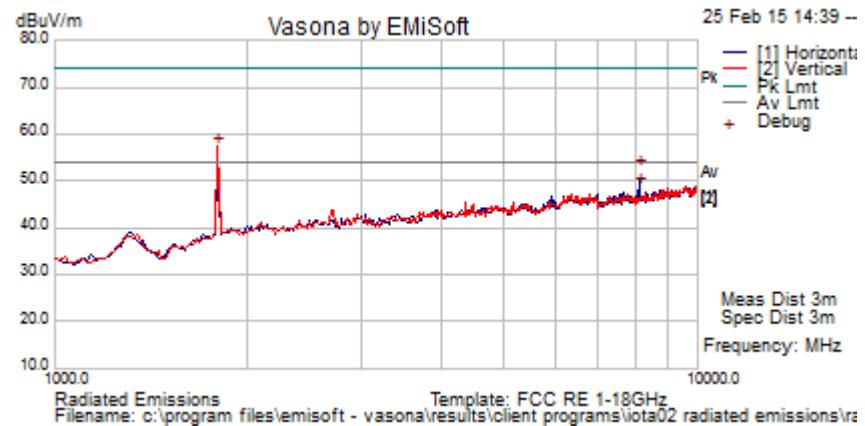


## Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1793.226	67.7	3.4	-13.8	57.2	Peak [Scan]	V					Pass	NRB
8123.046	52.3	7.7	-7.3	52.7	Peak.	H	134	-1	74.0	-21.3	Pass	RB
8123.046	48.2	7.7	-7.3	48.6	Average.	H	134	-1	54	-5.4	Pass	RB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

<b>Test Freq.</b>	915 MHz, 125 KHz	<b>Engineer</b>	JMH
<b>Variant</b>	TX Spur on Tag	<b>Temp (°C)</b>	15
<b>Freq. Range</b>	1-10GHz	<b>Rel. Hum.(%)</b>	36
<b>Power Setting</b>	Maximum (+29 dBm)	<b>Press. (mBars)</b>	1013
<b>Antenna</b>	Integral		
<b>Test Notes 1</b>			
<b>Test Notes 2</b>	SN# PP01 Battery Powered 3.7V		

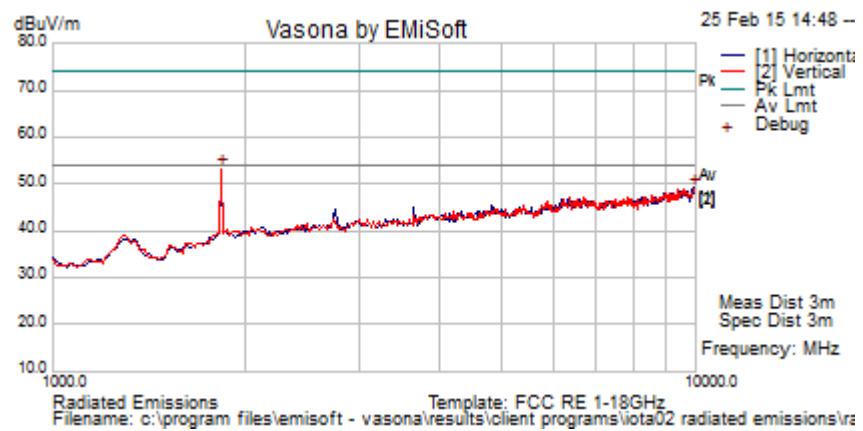


### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1829.659	63.4	3.4	-13.5	53.3	Peak [Scan]	V	100	0	54.0	-0.7	Pass	NRB
9927.85571	46.2	8.7	-5.5	49.3	Peak [Scan]	H	200	0	54.0	-4.7	Pass	NRB
Legend:		TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission										
		NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205										

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

<b>Test Freq.</b>	927 MHz, 125 KHz	<b>Engineer</b>	JMH
<b>Variant</b>	TX Spur on Tag	<b>Temp (°C)</b>	15
<b>Freq. Range</b>	1-10GHz	<b>Rel. Hum.(%)</b>	36
<b>Power Setting</b>	Maximum (+29 dBm)	<b>Press. (mBars)</b>	1013
<b>Antenna</b>	Integral		
<b>Test Notes 1</b>			
<b>Test Notes 2</b>	SN# PP01 Battery Powered 3.7V		

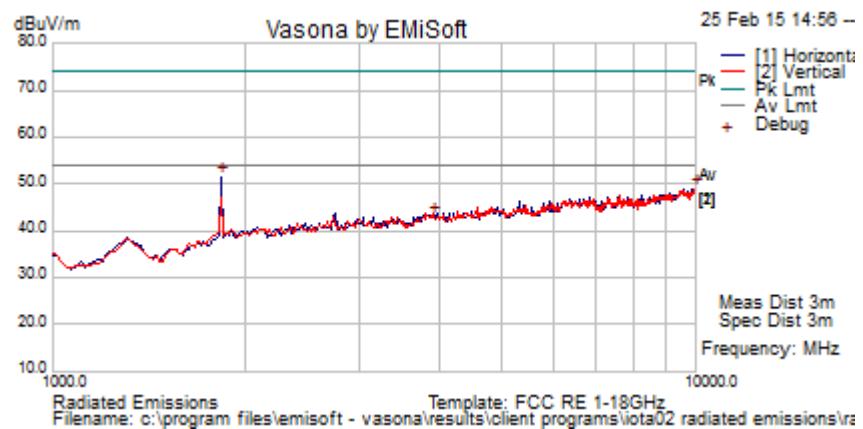


#### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1829.659	61.7	3.4	-13.5	51.5	Peak [Scan]	H	150	0	54.0	-2.5	Pass	
9963.92786	45.7	8.7	-5.3	49.0	Peak [Scan]	H	150	0	54.0	-5.0	Pass	
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### DSS Operation

Test Freq.	902.5 MHz, 500 KHz BW	Engineer	JMH
Variant	TX Spur on Tag	Temp (°C)	15
Freq. Range	1-10GHz	Rel. Hum.(%)	36
Power Setting	Maximum (+29 dBm)	Press. (mBars)	1013
Antenna	Integral		
Test Notes 1			
Test Notes 2	SN# PP01 Battery Powered 3.7V		

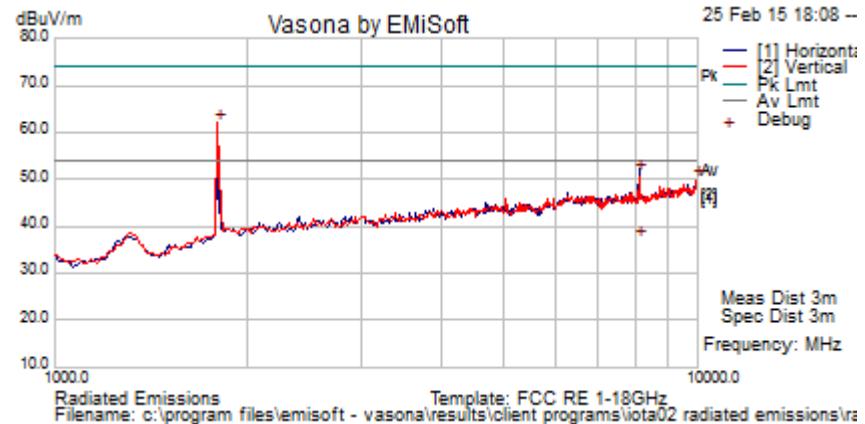


### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
8122.345	51.0	7.7	-7.3	51.4	Peak Max	H	99	268	74.0	-22.6	Pass	RB
8122.345	36.9	7.7	-7.3	37.2	Average Max	H	99	268	54.0	-16.8	Pass	RB
1793.587	72.5	3.4	-13.8	62.1	Peak [Scan]	V					Pass	NRB
9963.928	46.5	8.7	-5.3	49.8	Peak [Scan]	V					Pass	NRB

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


<b>Test Freq.</b>	915 MHz, 500 KHz BW	<b>Engineer</b>	0
<b>Variant</b>	TX Spur on Tag	<b>Temp (°C)</b>	15
<b>Freq. Range</b>	1-10GHz	<b>Rel. Hum.(%)</b>	36
<b>Power Setting</b>	Maximum (+29 dBm)	<b>Press. (mBars)</b>	1013
<b>Antenna</b>	Integral		
<b>Test Notes 1</b>	SN# PP01 Battery Powered 3.7V		
<b>Test Notes 2</b>			

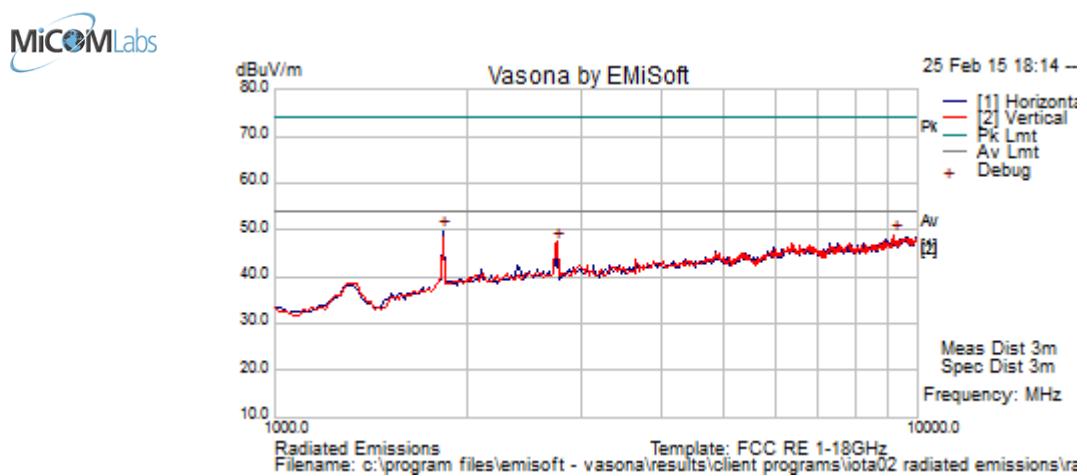

## Formally measured emission peaks

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

<b>Test Freq.</b>	927 MHz, 500 KHz	<b>Engineer</b>	JMH
<b>Variant</b>	TX Spur on Tag	<b>Temp (°C)</b>	15
<b>Freq. Range</b>	1-10GHz	<b>Rel. Hum.(%)</b>	36
<b>Power Setting</b>	Maximum (+29 dBm)	<b>Press. (mBars)</b>	1013
<b>Antenna</b>	Integral		
<b>Test Notes 1</b>	SN# PP01 Battery Powered 3.7V		
<b>Test Notes 2</b>			

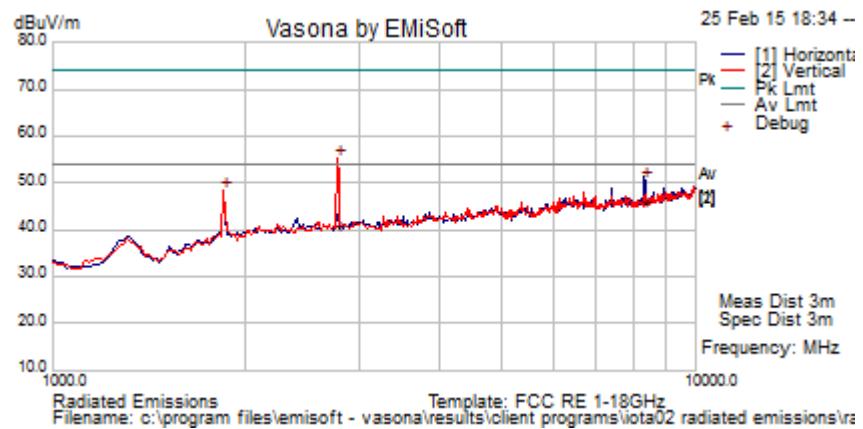

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2781.212	46.1	4.2	-11.3	39.0	Average.	V	147	75	54.0	-15.0	Pass	RB
2781.212	62.0	4.2	-11.3	54.9	Peak.	V	147	75	74.0	-19.1	Pass	RB
8342.358	43.4	7.8	-7.1	44.1	Average.	H	106	39	54	-9.9	Pass	RB
8342.358	49.6	7.8	-7.1	50.3	Peak.	H	106	39	74	-23.7	Pass	RB
1847.695	58.5	3.4	-13.5	48.4	Peak [Scan]	V						NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## Specification Limits

**FCC §15.247(d) and RSS-210 §A8.5** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

**FCC §15.247(d)**

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

**IC RSS-210 §A8.5** If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

**IC RSS-Gen §4.7**

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5<sup>th</sup> harmonic of the highest frequency generated without exceeding 40 GHz.

**FCC §15.205 (a)** Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

**FCC §15.205 (a)** Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**FCC §15.209 (a)** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.



**Title:** Iotera Iota  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** IOTA01-U7a 900 MHz Rev A  
**Issue Date:** 8th April 2015  
**Page:** 60 of 113

---

### §15.209 (a) Limit Matrix

Frequency( MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

### Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

### Traceability

Method
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### **9.9.2. Digital Emissions (0.03-1 GHz)**

#### **FCC, Part 15 Subpart C §15.205/ §15.209 Industry Canada RSS-210 §2.2**

##### **Test Procedure**

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet (POE). Both modes were tested for emissions below 1GHz.

##### **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB $\mu$ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$


Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

<b>Test Freq.</b>	902.5 MHz, 125 KHz BW	<b>Engineer</b>	JMH
<b>Variant</b>	TX Spur on Tag	<b>Temp (°C)</b>	15
<b>Freq. Range</b>	30 MHz - 1000 MHz	<b>Rel. Hum.(%)</b>	36
<b>Power Setting</b>	Maximum (+29 dBm)	<b>Press. (mBars)</b>	1013
<b>Antenna</b>	Integral		
<b>Test Notes 1</b>	SN# PP01 Battery Powered 3.7V		
<b>Test Notes 2</b>			

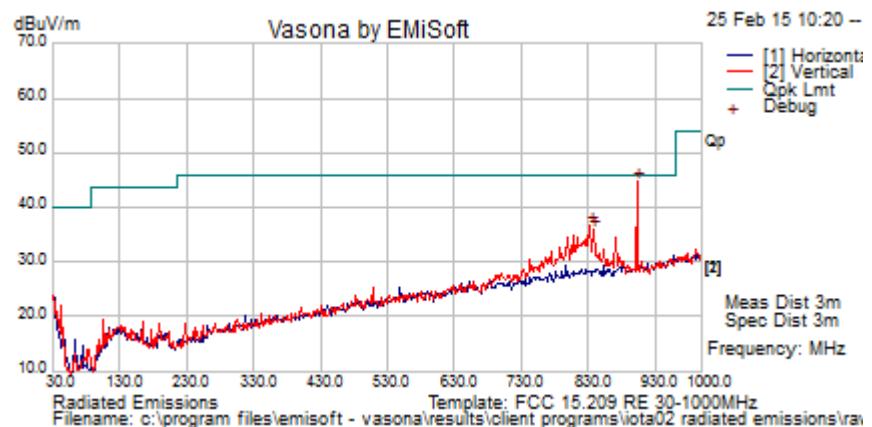


### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
902.806	45.9	6.3	-7.6	44.6	Peak [Scan]	V						FUND
832.869	38.5	6.2	-8.2	36.5	Peak [Scan]	V	98	361	46	-9.5	Pass	NRB
838.627	37.9	6.2	-8.3	35.8	Peak [Scan]	V	98	361	46	-10.2	Pass	NRB
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

<b>Test Freq.</b>	915 MHz, 125 KHz BW	<b>Engineer</b>	JMH
<b>Variant</b>	Tx Spur on Tag	<b>Temp (°C)</b>	15
<b>Freq. Range</b>	30 MHz - 1000 MHz	<b>Rel. Hum.(%)</b>	36
<b>Power Setting</b>	Maximum (+29 dBm)	<b>Press. (mBars)</b>	1013
<b>Antenna</b>	Integral		
<b>Test Notes 1</b>			
<b>Test Notes 2</b>	SN# PP01 Battery Powered 3.7V		

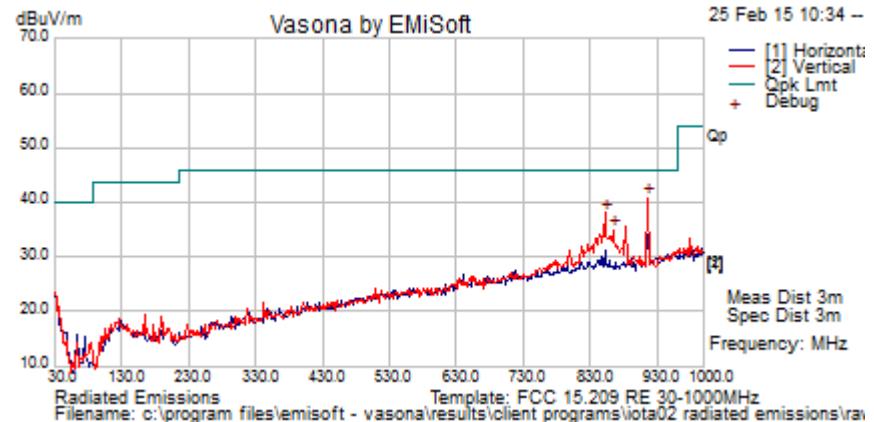


#### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
916.413	42.0	6.4	-7.6	40.8	Peak [Scan]	V						FUND
852.284	39.9	6.3	-8.1	38.0	Peak [Scan]	V	98	361	46.0	-8.0	Pass	NRB
863.958	36.8	6.3	-8.1	35.0	Peak [Scan]	V	98	361	46.0	-11.0	Pass	NRB
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

<b>Test Freq.</b>	927 MHz, 125 KHz BW	<b>Engineer</b>	JMH
<b>Variant</b>	Tx Spur on Tag	<b>Temp (°C)</b>	15
<b>Freq. Range</b>	30 MHz - 1000 MHz	<b>Rel. Hum.(%)</b>	36
<b>Power Setting</b>	Maximum (+29 dBm)	<b>Press. (mBars)</b>	1013
<b>Antenna</b>	Integral		
<b>Test Notes 1</b>	SN# PP01 Battery Powered 3.7V		
<b>Test Notes 2</b>			

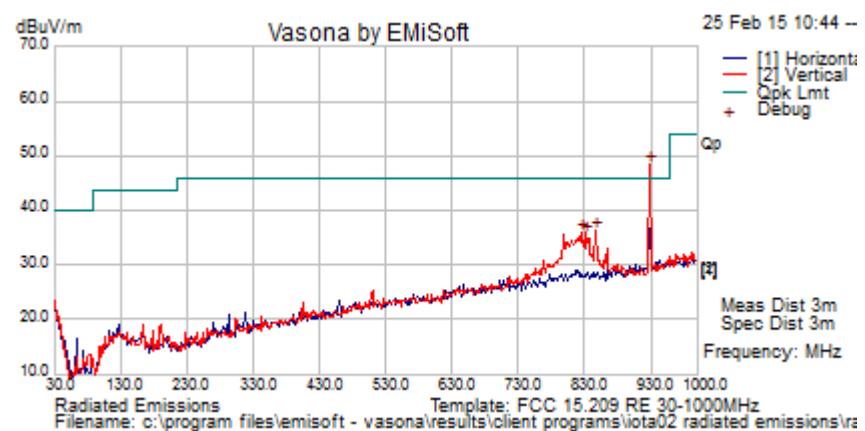


### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
928.076	49.3	6.4	-7.3	48.4	Peak [Scan]	V						FUND
846.539	38.1	6.3	-8.2	36.2	Peak [Scan]	V	98	361	46.0	-9.8	Pass	NRB
825.451	37.5	6.2	-8.1	35.6	Peak [Scan]	V	98	361	46.0	-10.4	Pass	NRB
831.131	37.5	6.2	-8.2	35.5	Peak [Scan]	V	98	361	46.0	-10.5	Pass	NRB
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### DSS Operation

Test Freq.	902.5 MHz, 500 KHz BW	Engineer	JMH
Variant	Tx Spur on Tag	Temp (°C)	15
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	36
Power Setting	Maximum (+29 dBm)	Press. (mBars)	1013
Antenna	Integral		
Test Notes 1	SN# PP01 Battery Powered 3.7V		
Test Notes 2			

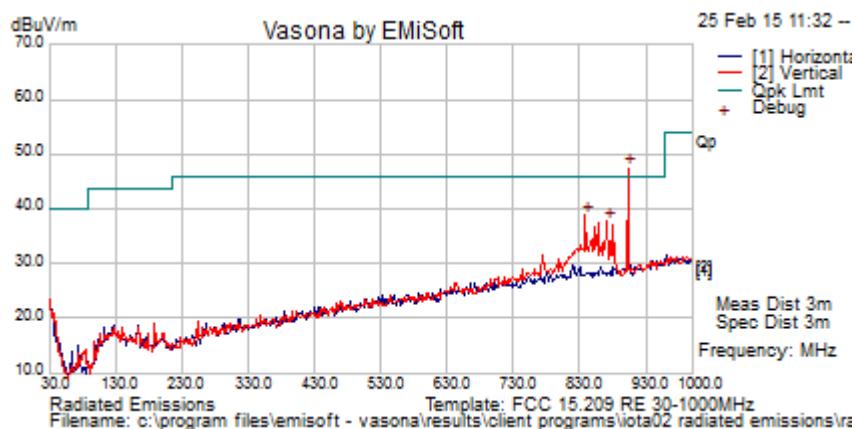


### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
902.806	48.7	6.3	-7.6	47.4	Peak [Scan]	V						FUND
838.670	40.9	6.2	-8.3	38.8	Peak [Scan]	V	98	361	46	-7.2	Pass	NRB
871.621	39.6	6.3	-8.1	37.8	Peak [Scan]	V	98	361	46	-8.3	Pass	NRB
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

<b>Test Freq.</b>	915 MHz, 500 KHz BW	<b>Engineer</b>	JMH
<b>Variant</b>	Tx Spur on Tag	<b>Temp (°C)</b>	15
<b>Freq. Range</b>	30 MHz - 1000 MHz	<b>Rel. Hum.(%)</b>	36
<b>Power Setting</b>	Maximum (+29 dBm)	<b>Press. (mBars)</b>	1013
<b>Antenna</b>	Integral		
<b>Test Notes 1</b>	SN# PP01 Battery Powered 3.7V		
<b>Test Notes 2</b>			

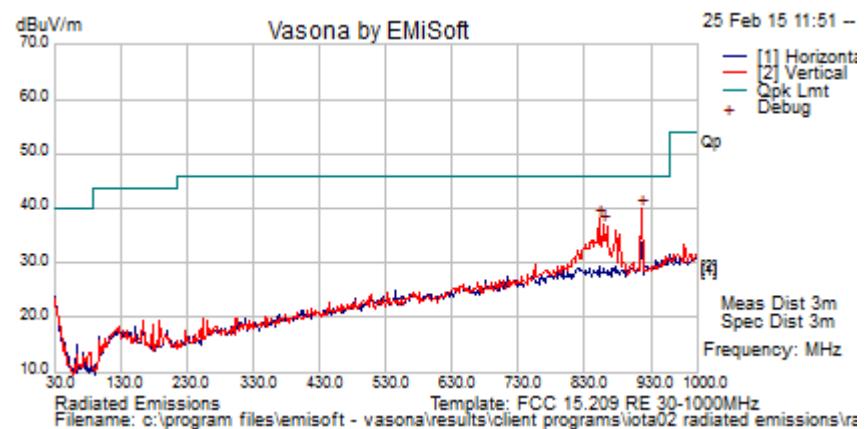


#### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
916.459	40.9	6.4	-7.6	39.7	Peak [Scan]	H						FUND
852.366	39.9	6.3	-8.1	38.0	Peak [Scan]	H	98	361	46.0	-8.0	Pass	NRB
858.198	38.7	6.2	-8.1	36.8	Peak [Scan]	H	98	361	46.0	-9.2	Pass	NRB
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency												
NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

<b>Test Freq.</b>	927 MHz, 500 KHz BW	<b>Engineer</b>	JMH
<b>Variant</b>	Tx Spur on Tag	<b>Temp (°C)</b>	15
<b>Freq. Range</b>	30 MHz - 1000 MHz	<b>Rel. Hum.(%)</b>	36
<b>Power Setting</b>	Maximum (+29 dBm)	<b>Press. (mBars)</b>	1013
<b>Antenna</b>	Integral		
<b>Test Notes 1</b>			
<b>Test Notes 2</b>	SN# PP01 Battery Powered 3.7V		

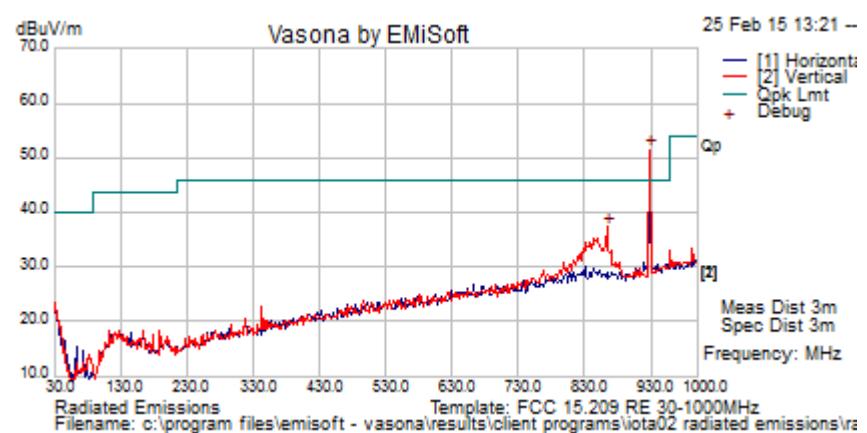

#### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
928.076	52.4	6.4	-7.3	51.5	Peak [Scan]	V						FUND
863.989	39.3	6.3	-8.1	37.4	Peak [Scan]	H	98	361	46.0	-8.6	Pass	NRB
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency												
NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## Specification

### Limits

**§15.205 (a)** Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

**§15.205 (a)** *Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.*

**§15.209 (a)** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

### §15.209 (a) and RSS-Gen §2.2 Limit Matrix

Frequency(MHz)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

### Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------


## **9.10. ac Wireline Emissions**

**FCC, Part 15 Subpart C §15.207**  
**Industry Canada RSS-Gen §7.2.2**

### **Test Procedure**

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

### **Test Measurement Set up**

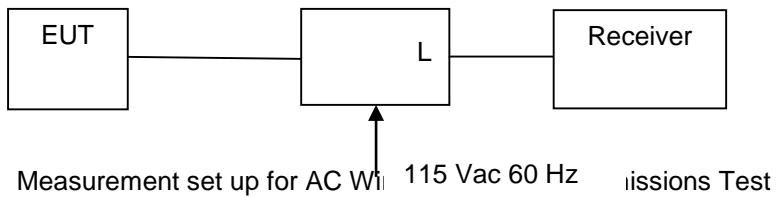

### **Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)**

**No testing required device was battery powered**

## Specification

### Limit

**§15.207 (a)** Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu\Omega$  line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

### §15.207 (a) Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


\* Decreases with the logarithm of the frequency

### Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	±2.64 dB
-------------------------	----------

## 10. APPENDIX


### 10.1. 20 dB & 99% Bandwidth

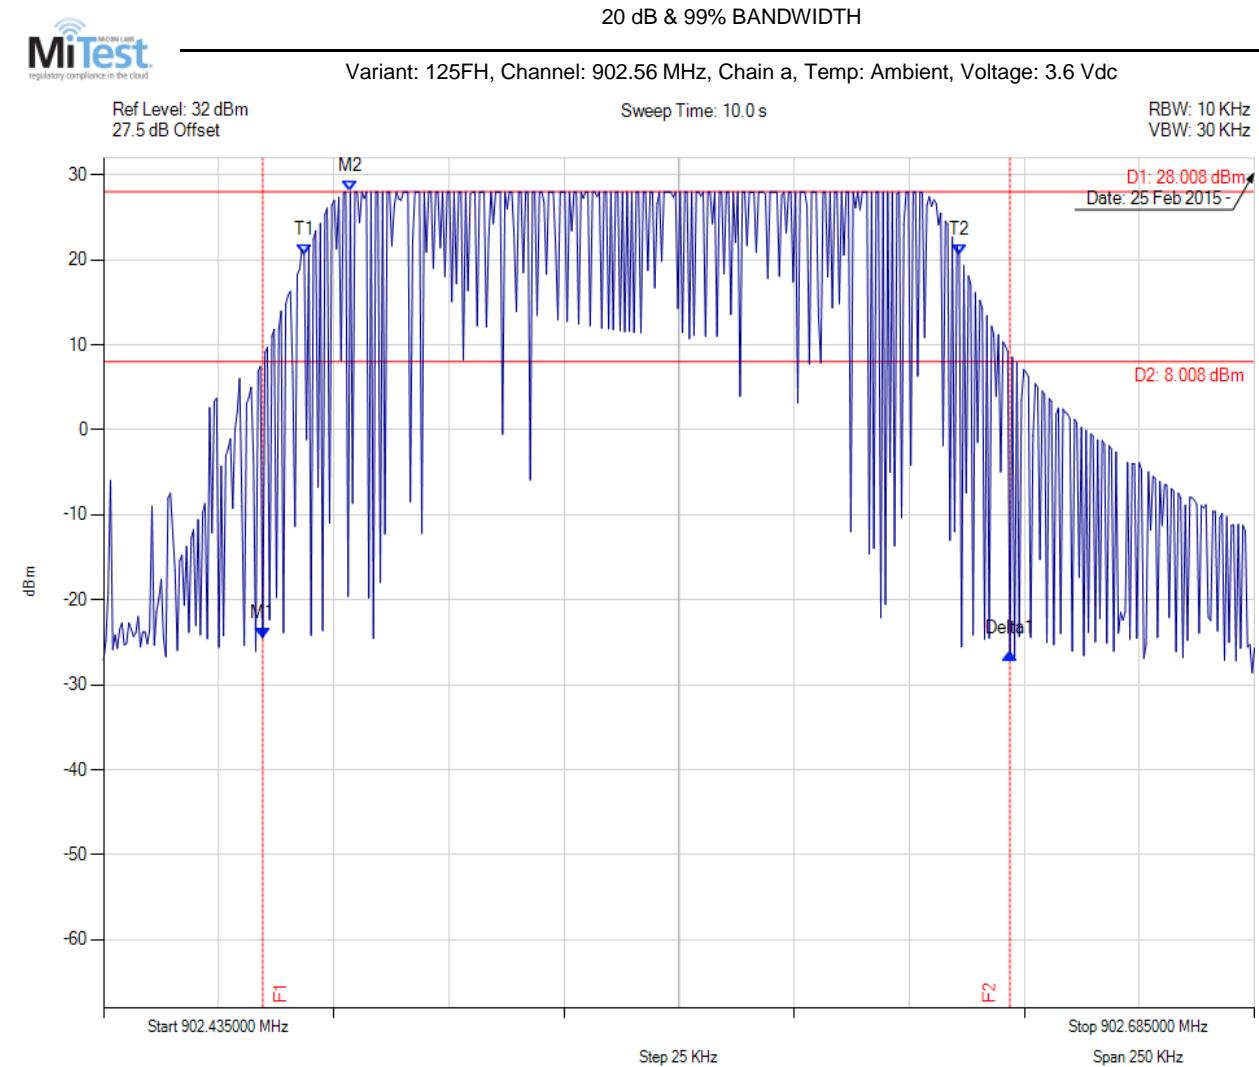

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 902.470 MHz : -24.471 dBm M2 : 902.489 MHz : 28.008 dBm Delta1 : 162 KHz : -1.812 dB T1 : 902.479 MHz : 20.593 dBm T2 : 902.621 MHz : 20.578 dBm OBW : 142 KHz	Measured 6 dB Bandwidth: 0.162 MHz Limit: ≥500.0 kHz Margin: 0.34 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

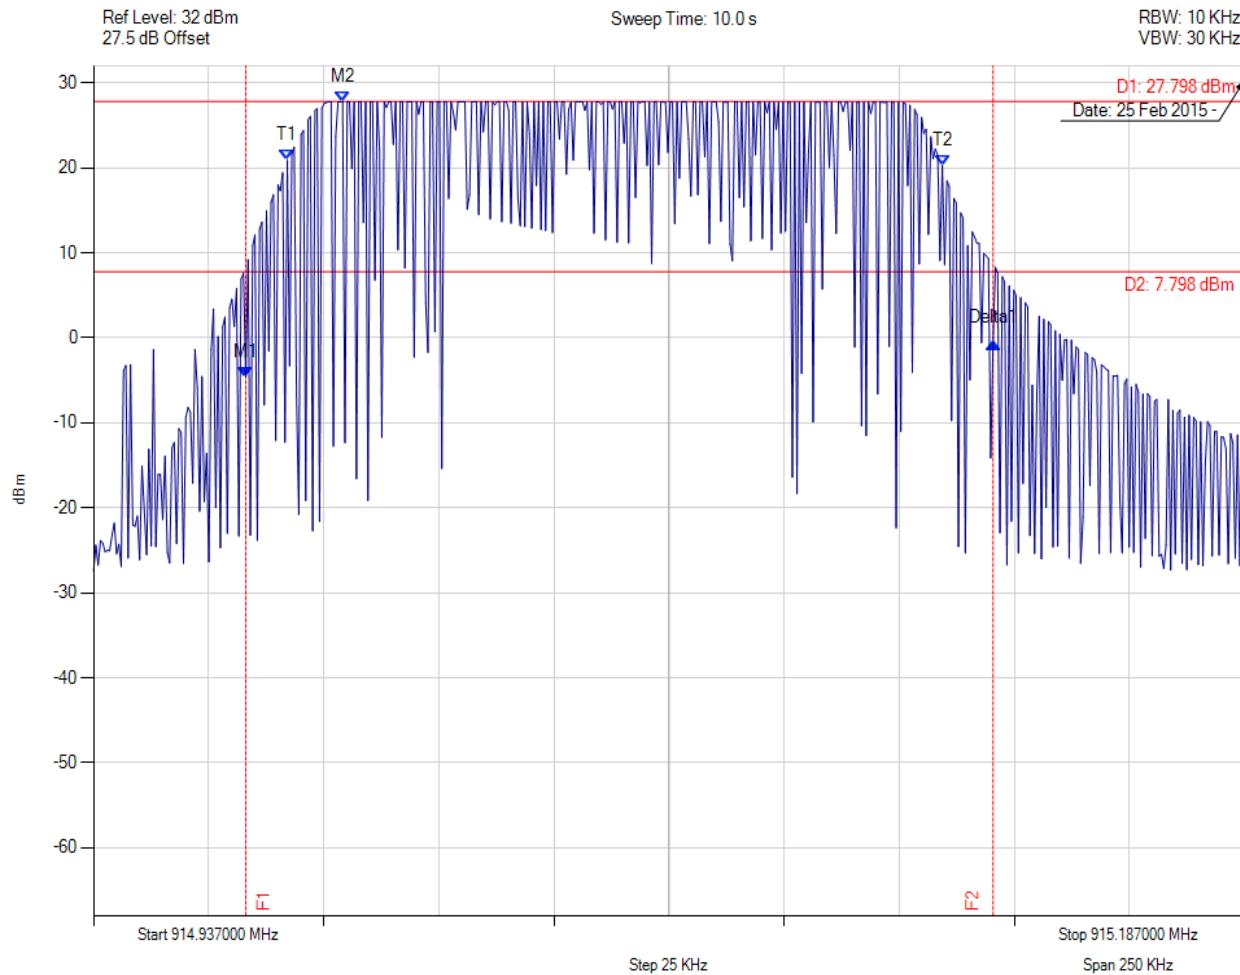

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 914.970 MHz : -4.650 dBm M2 : 914.991 MHz : 27.798 dBm Delta1 : 162 KHz : 4.045 dB T1 : 914.979 MHz : 20.886 dBm T2 : 915.121 MHz : 20.290 dBm OBW : 142 KHz	Measured 6 dB Bandwidth: 0.162 MHz Limit: $\geq$ 500.0 kHz Margin: 0.34 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

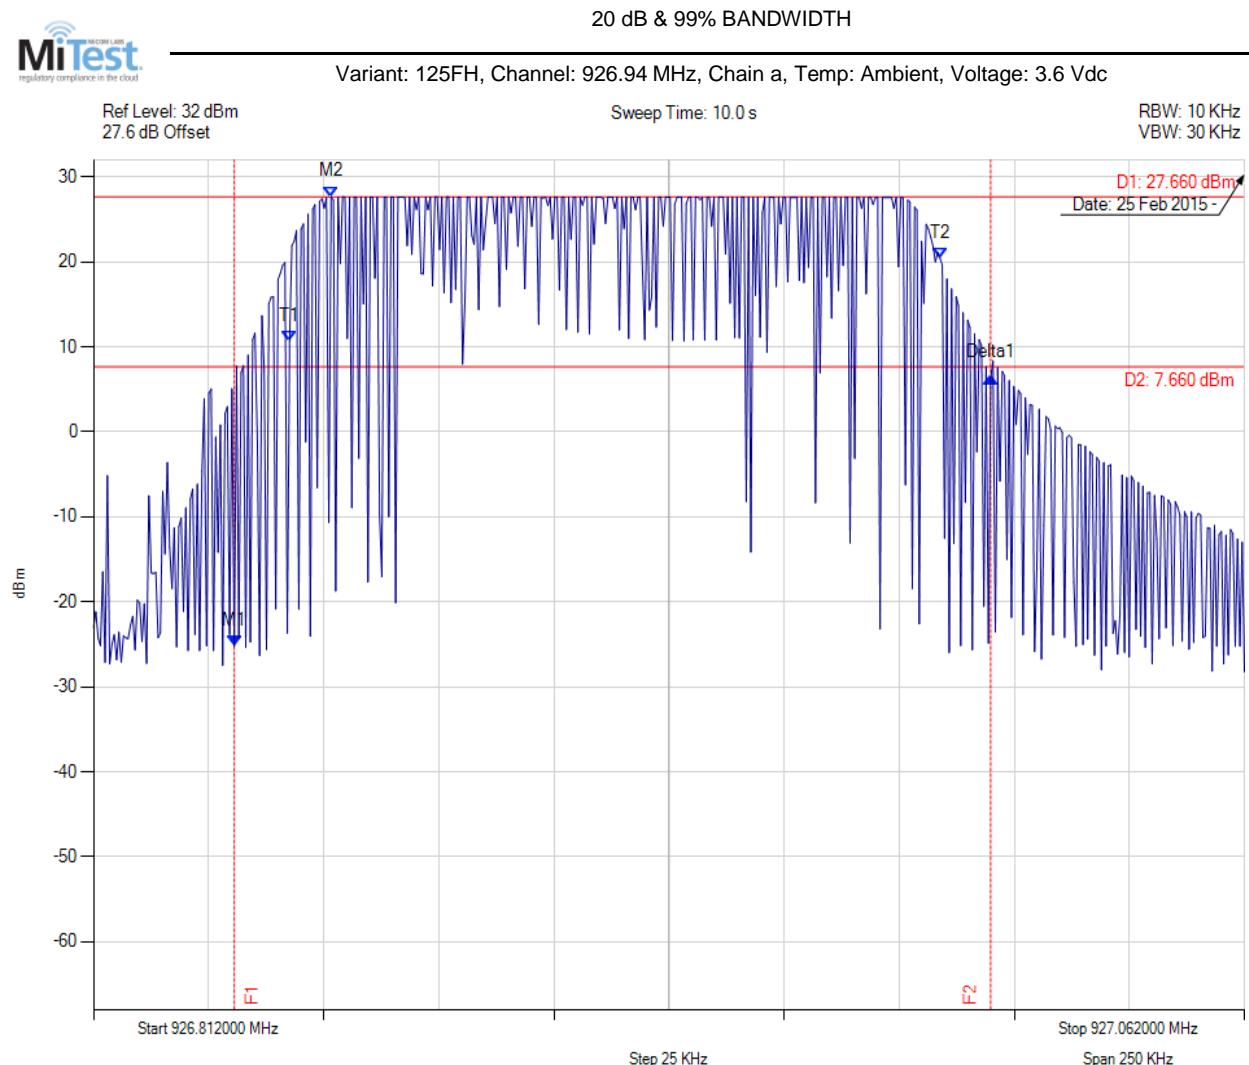


Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 926.843 MHz : -25.244 dBm M2 : 926.864 MHz : 27.660 dBm Delta1 : 164 KHz : 31.655 dB T1 : 926.855 MHz : 10.707 dBm T2 : 926.996 MHz : 20.450 dBm OBW : 141 KHz	Measured 6 dB Bandwidth: 0.164 MHz Limit: $\geq$ 500.0 kHz Margin: 0.34 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

20 dB & 99% BANDWIDTH

Variant: 250FH, Channel: 902.56 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

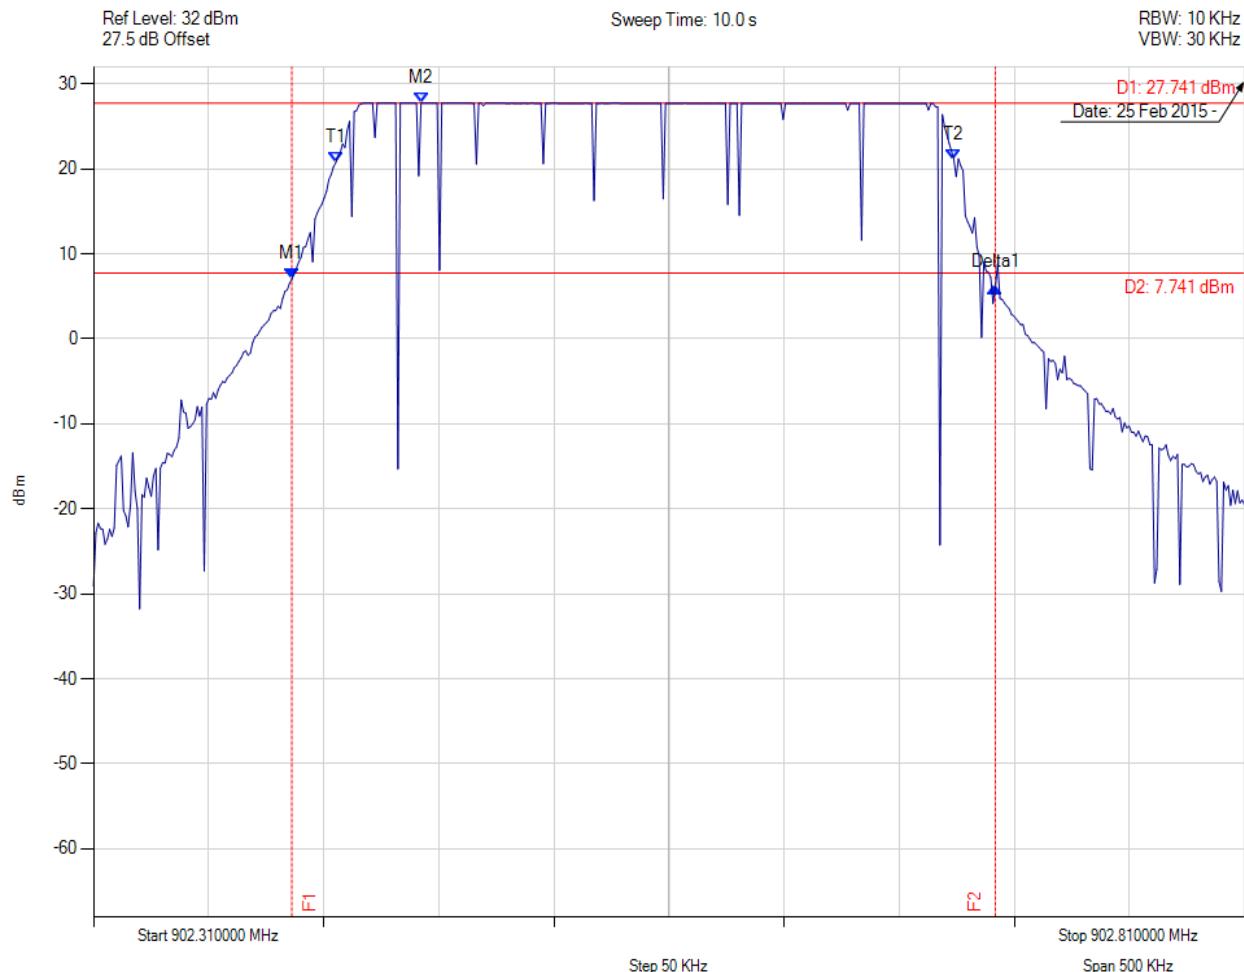


Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 902.396 MHz : 6.999 dBm M2 : 902.452 MHz : 27.741 dBm Delta1 : 306 KHz : -0.972 dB T1 : 902.415 MHz : 20.719 dBm T2 : 902.684 MHz : 21.099 dBm OBW : 269 KHz	Measured 6 dB Bandwidth: 0.306 MHz Limit: ≥500.0 kHz Margin: 0.19 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

20 dB & 99% BANDWIDTH


Variant: 250FH, Channel: 915.06 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

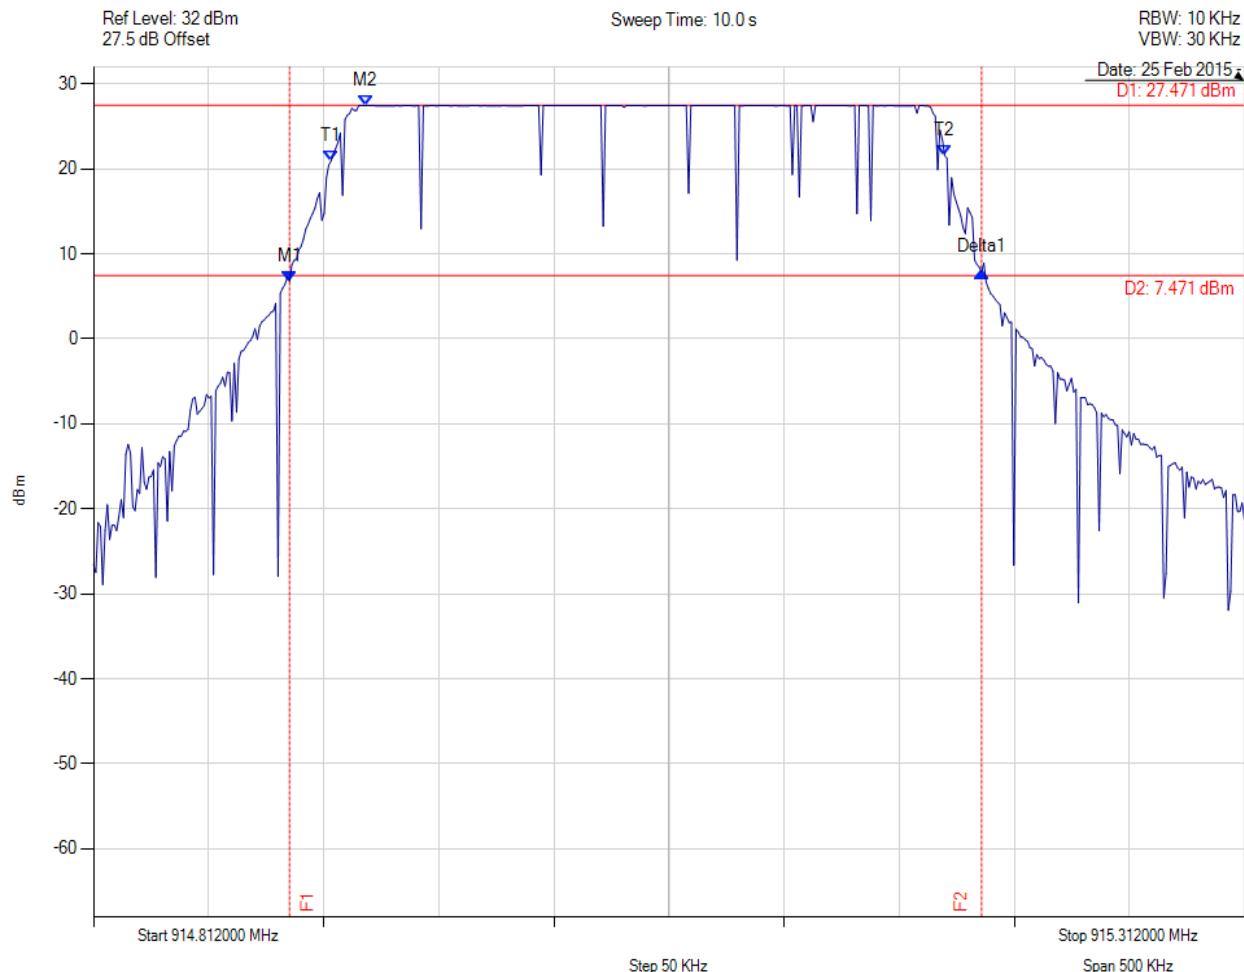

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 914.897 MHz : 6.755 dBm M2 : 914.930 MHz : 27.471 dBm Delta1 : 301 KHz : 1.131 dB T1 : 914.915 MHz : 20.943 dBm T2 : 915.182 MHz : 21.569 dBm OBW : 267 KHz	Measured 6 dB Bandwidth: 0.301 MHz Limit: ≥500.0 kHz Margin: 0.20 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

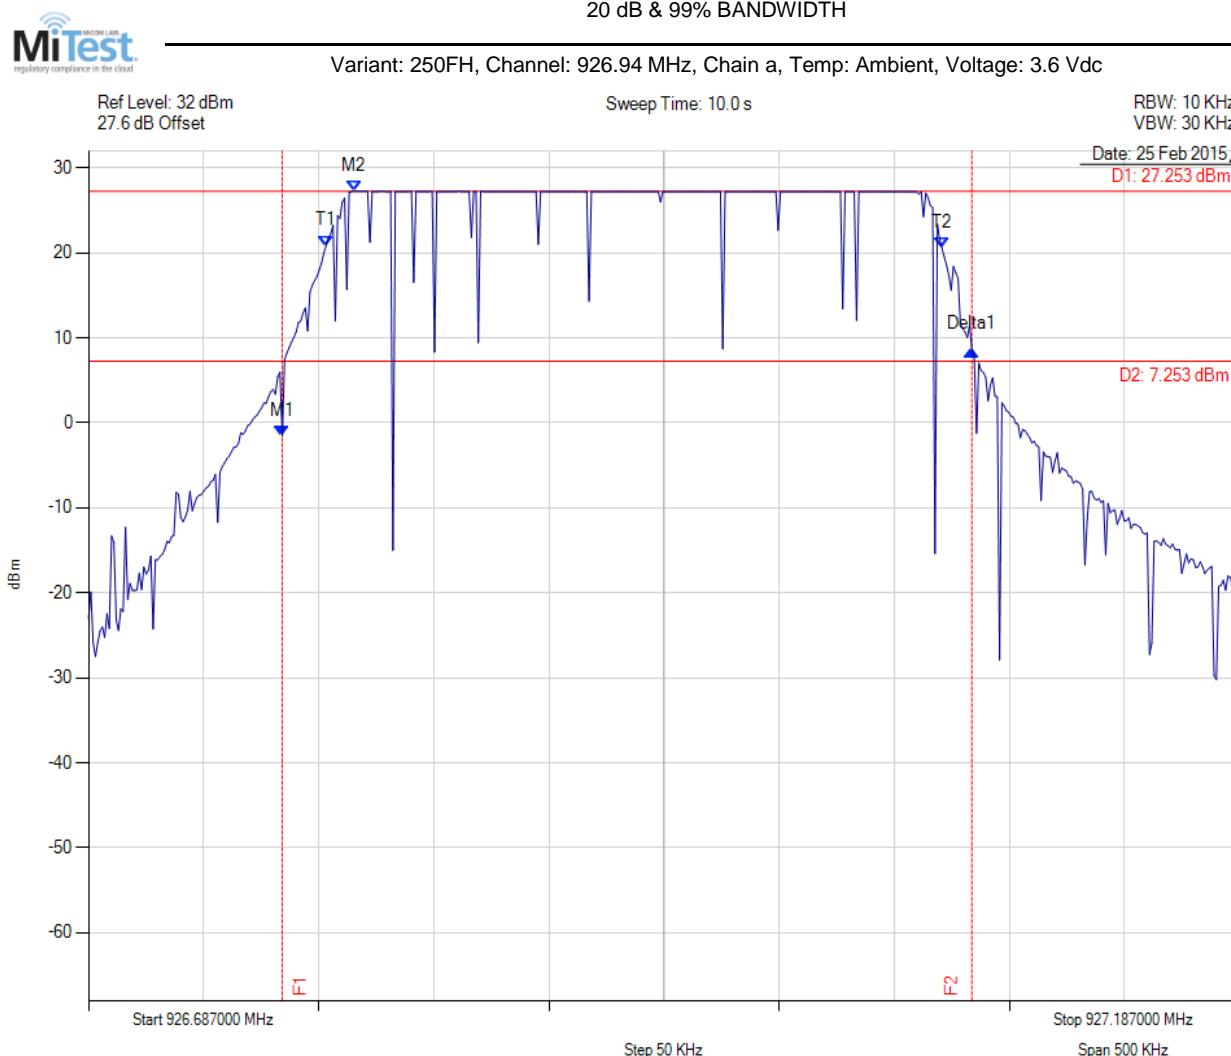


Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 926.771 MHz : -1.539 dBm M2 : 926.802 MHz : 27.253 dBm Delta1 : 300 KHz : 10.144 dB T1 : 926.790 MHz : 20.831 dBm T2 : 927.058 MHz : 20.566 dBm OBW : 268 KHz	Measured 6 dB Bandwidth: 0.300 MHz Limit: ≥500.0 kHz Margin: 0.20 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 10.2. 6 dB & 99% Bandwidth

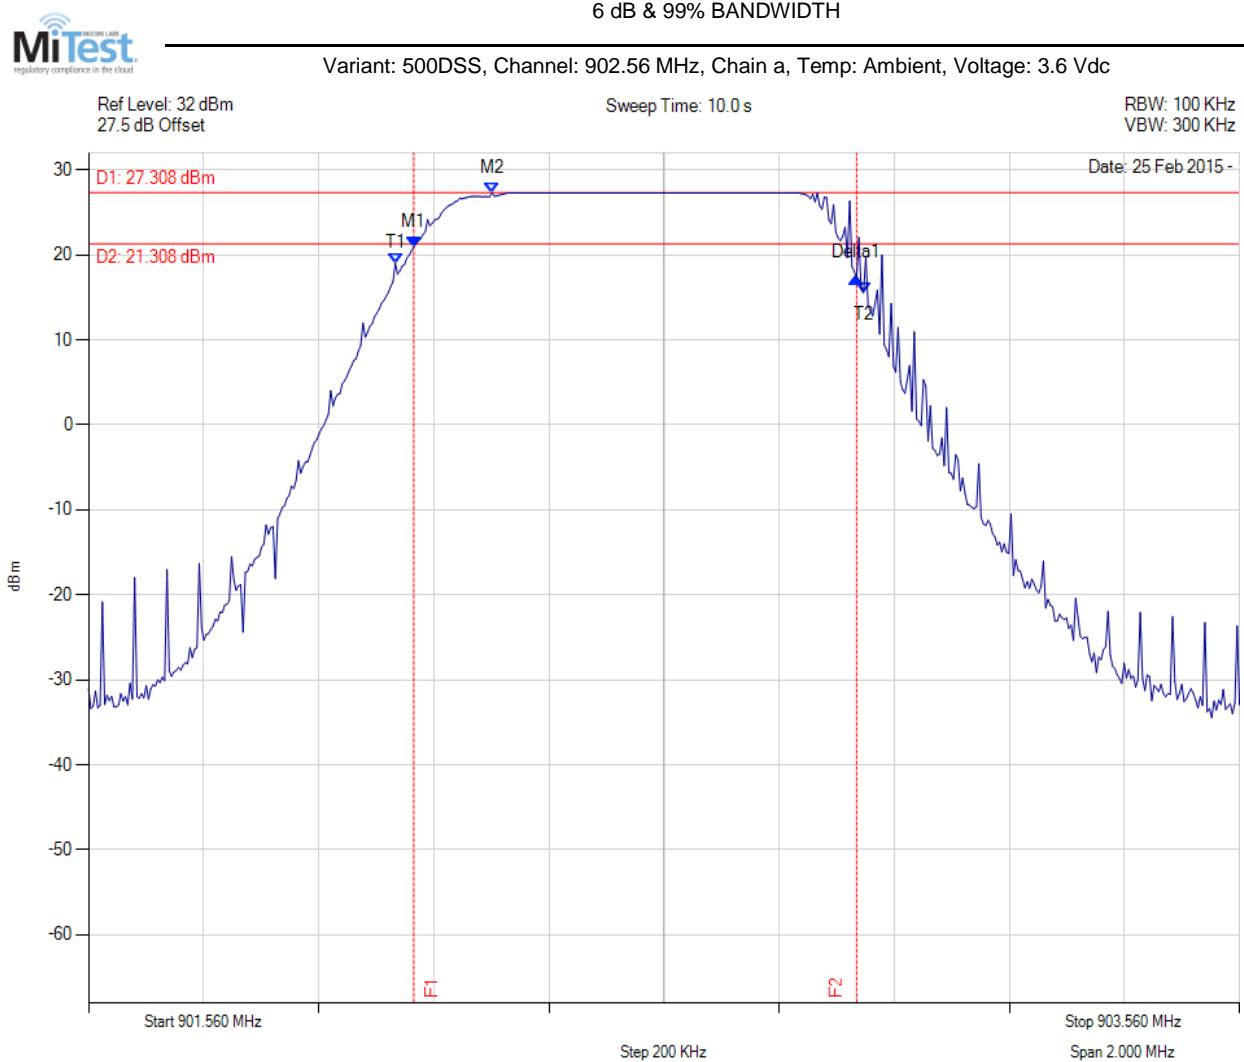


Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 902.125 MHz : 20.930 dBm M2 : 902.261 MHz : 27.308 dBm Delta1 : 770 KHz : -3.679 dB T1 : 902.093 MHz : 19.010 dBm T2 : 902.907 MHz : 15.519 dBm OBW : 814 KHz	Measured 6 dB Bandwidth: 0.770 MHz Limit: $\geq$ 500.0 kHz Margin: -0.27 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH  
 Variant: 500DSS, Channel: 915.06 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

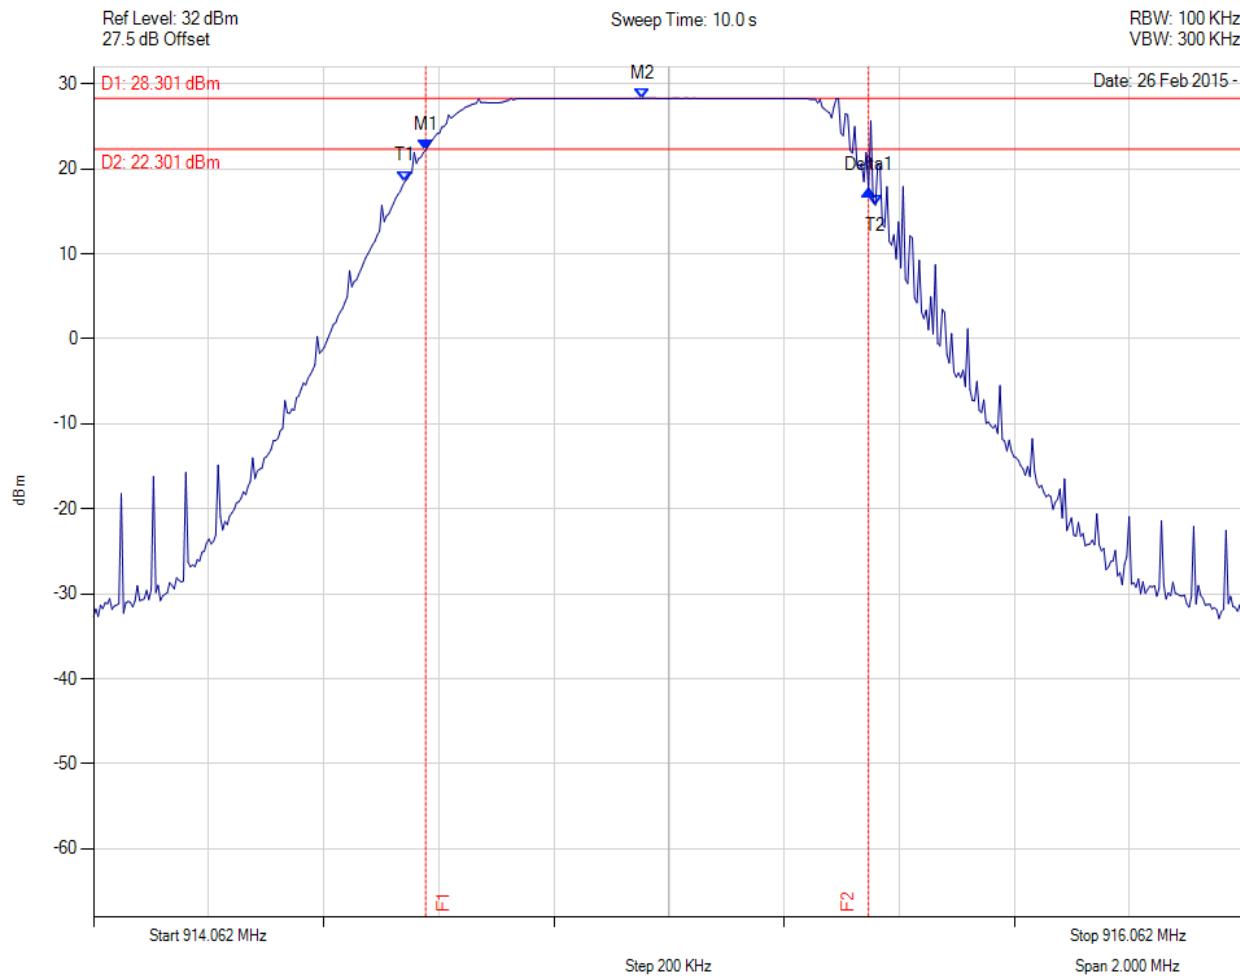


Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 914.639 MHz : 22.218 dBm M2 : 915.016 MHz : 28.301 dBm Delta1 : 770 KHz : -4.669 dB T1 : 914.603 MHz : 18.535 dBm T2 : 915.421 MHz : 15.732 dBm OBW : 818 KHz	Measured 6 dB Bandwidth: 0.770 MHz Limit: ≥500.0 kHz Margin: -0.27 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH  
 Variant: 500DSS, Channel: 926.94 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

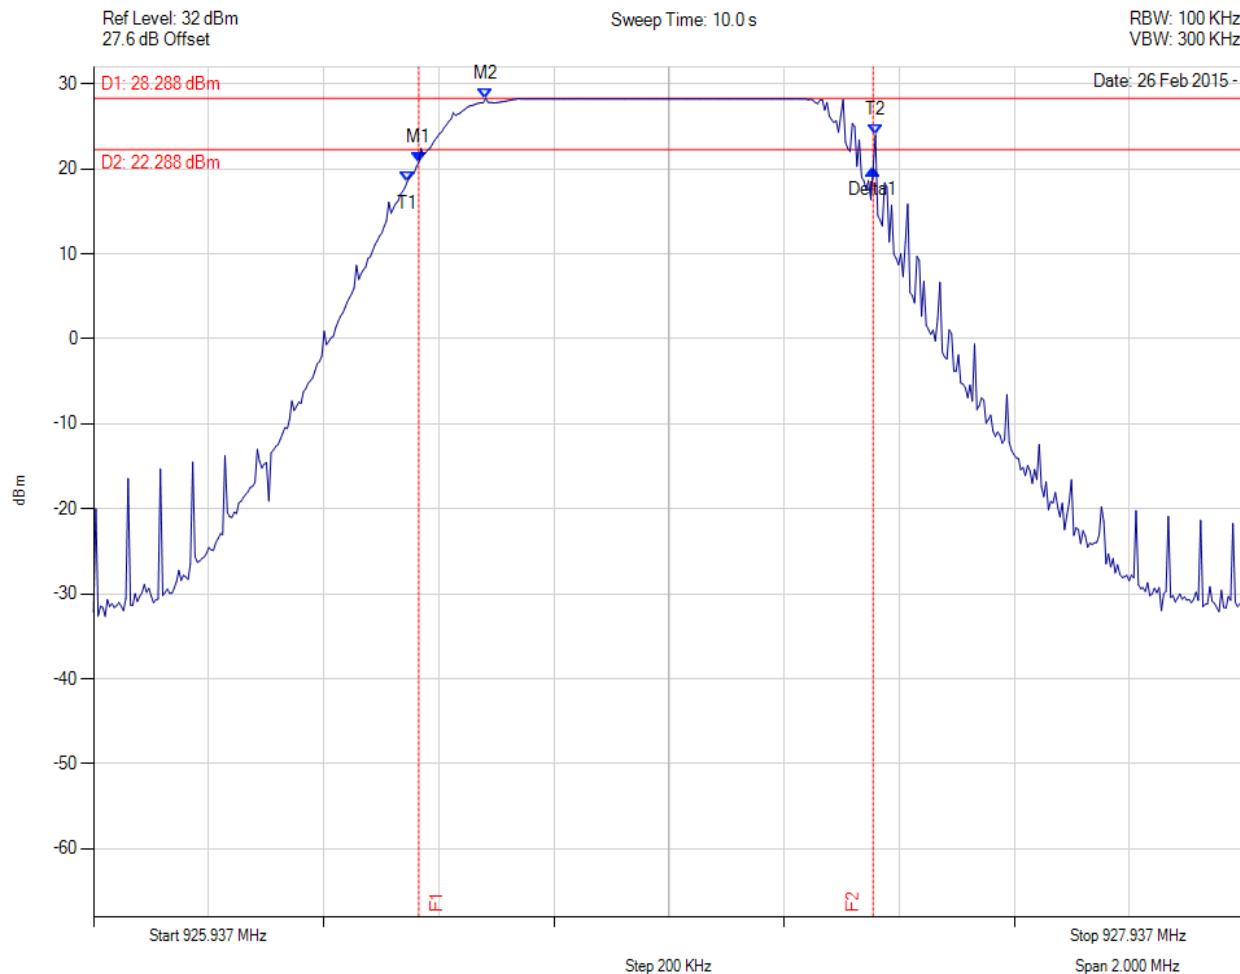


Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 926.502 MHz : 20.753 dBm M2 : 926.618 MHz : 28.288 dBm Delta1 : 790 KHz : -0.750 dB T1 : 926.482 MHz : 18.480 dBm T2 : 927.296 MHz : 24.005 dBm OBW : 814 KHz	Measured 6 dB Bandwidth: 0.790 MHz Limit: $\geq$ 500.0 kHz Margin: -0.29 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### 10.3. Number of Channels

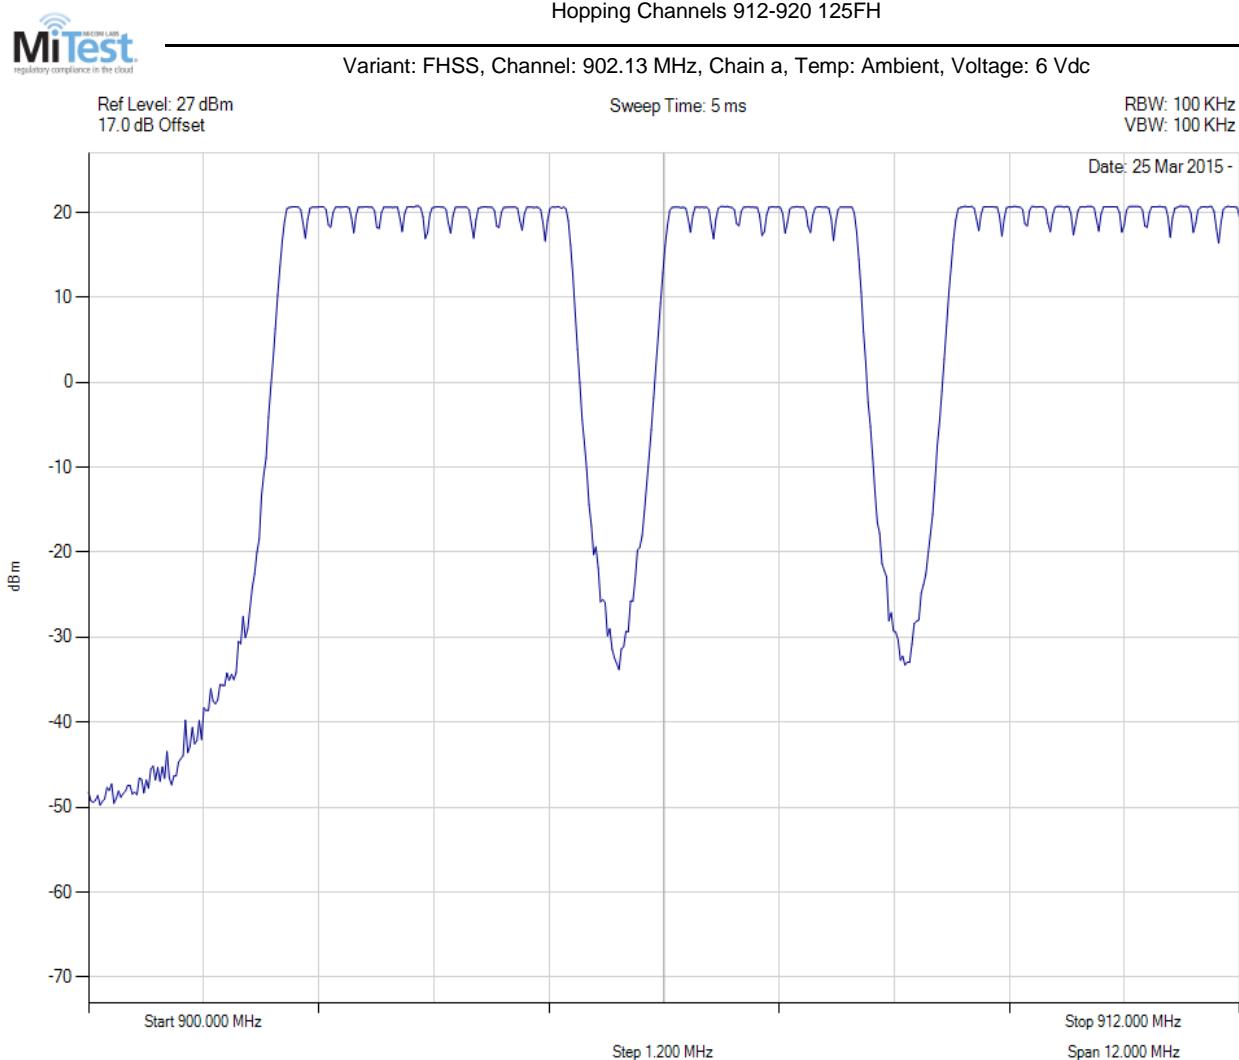

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW		No. Of Hops: 32


[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### Hopping Channels 912-920 125FH

Variant: FHSS, Channel: 902.13 MHz, Chain a, Temp: Ambient, Voltage: 6 Vdc

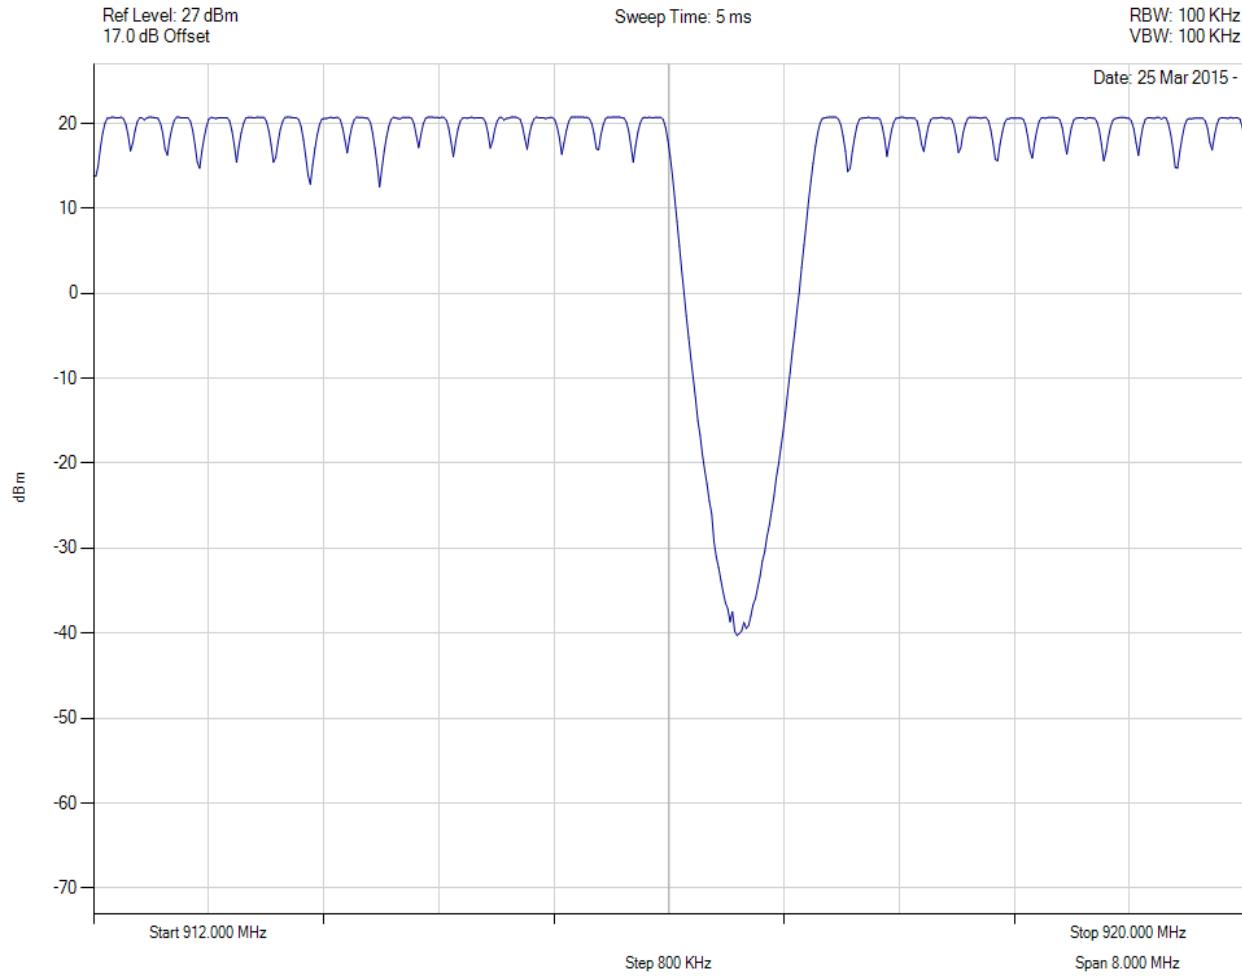

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW		No. Of Hops: 28


[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Hopping Channels 920-928 125FH

Variant: FHSS, Channel: 902.13 MHz, Chain a, Temp: Ambient, Voltage: 6 Vdc

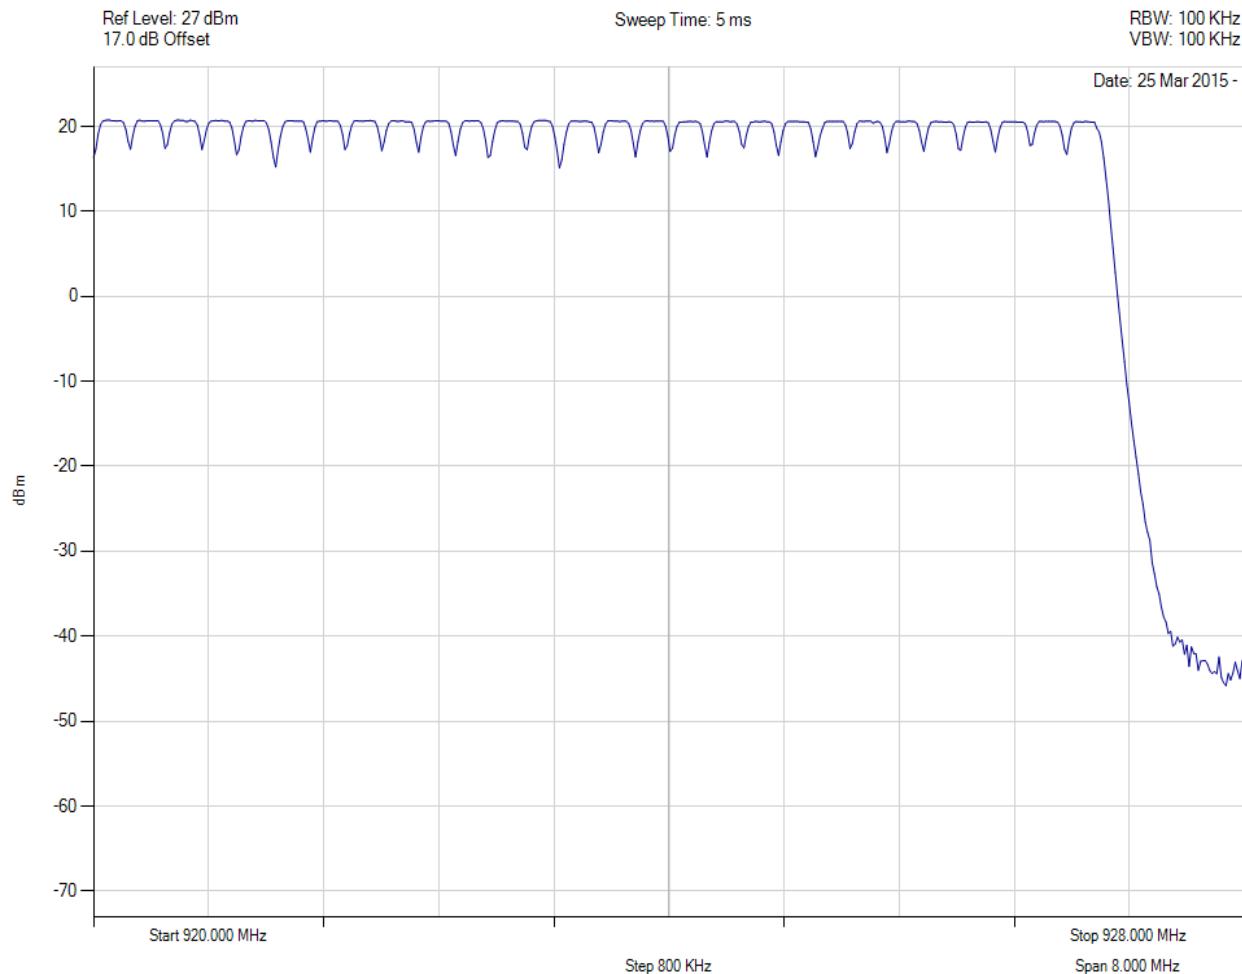

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW		No. of Hops: 28


[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Hopping Channels 900-912 250FH

Variant: FHSS, Channel: 902.25 MHz, Chain a, Temp: Ambient, Voltage: 6 Vdc

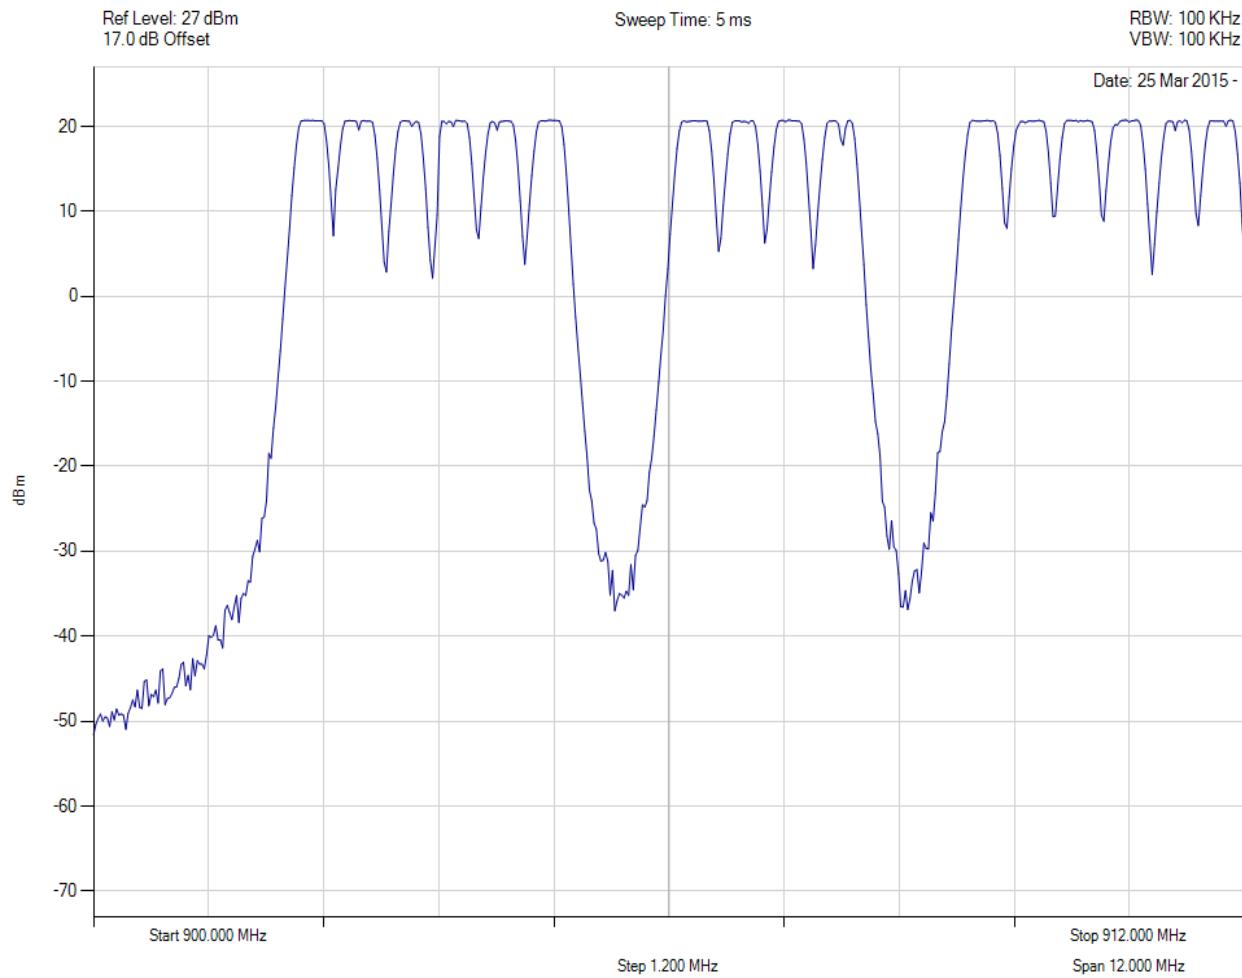

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW		No. Of Hops: 16


[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Hopping Channels 912-920 250FH

Variant: FHSS, Channel: 902.25 MHz, Chain a, Temp: Ambient, Voltage: 6 Vdc

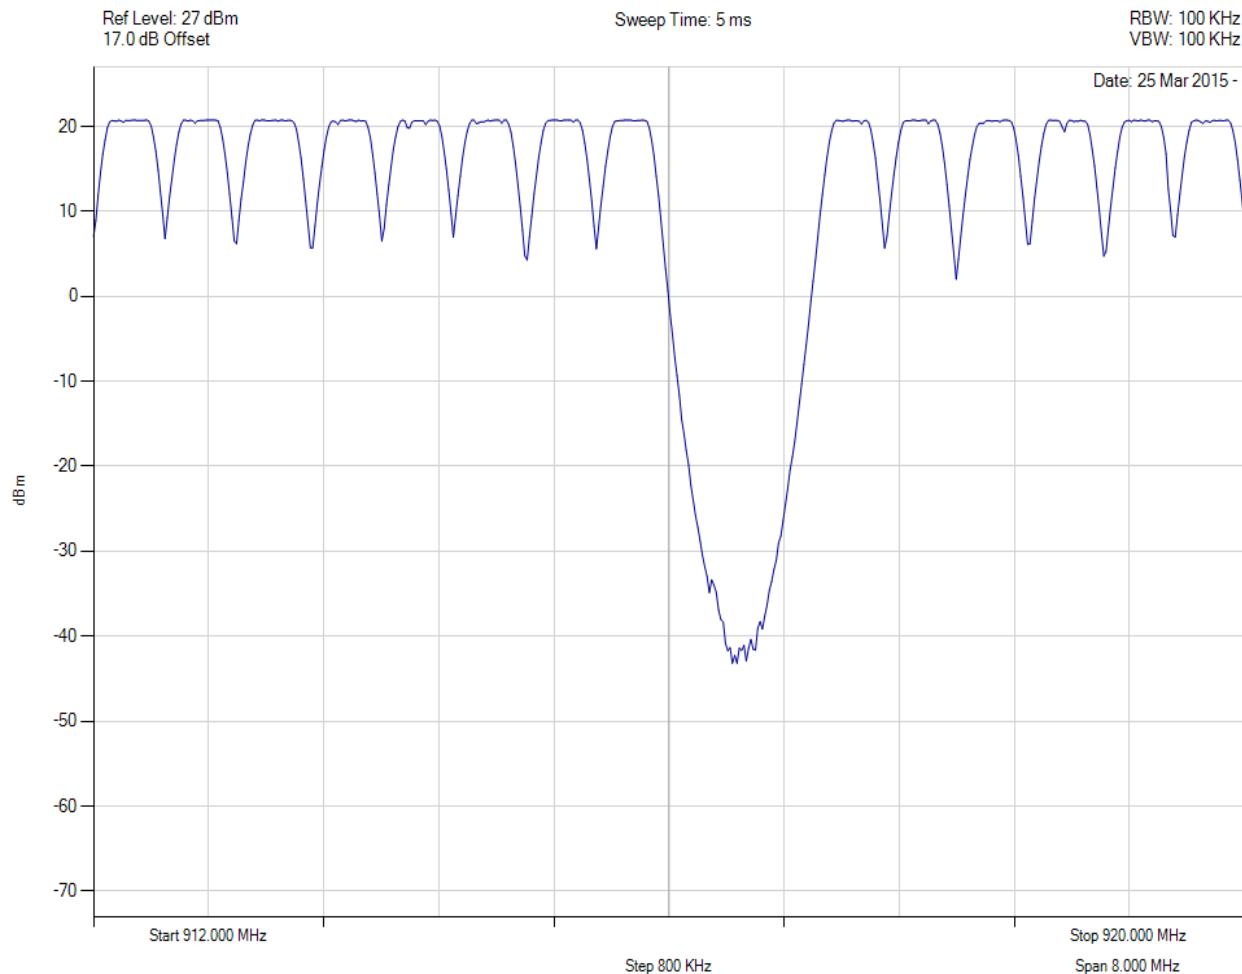

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW		No of Hops:14


[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Hopping Channels 920-928 250FH

Variant: FHSS, Channel: 902.25 MHz, Chain a, Temp: Ambient, Voltage: 6 Vdc

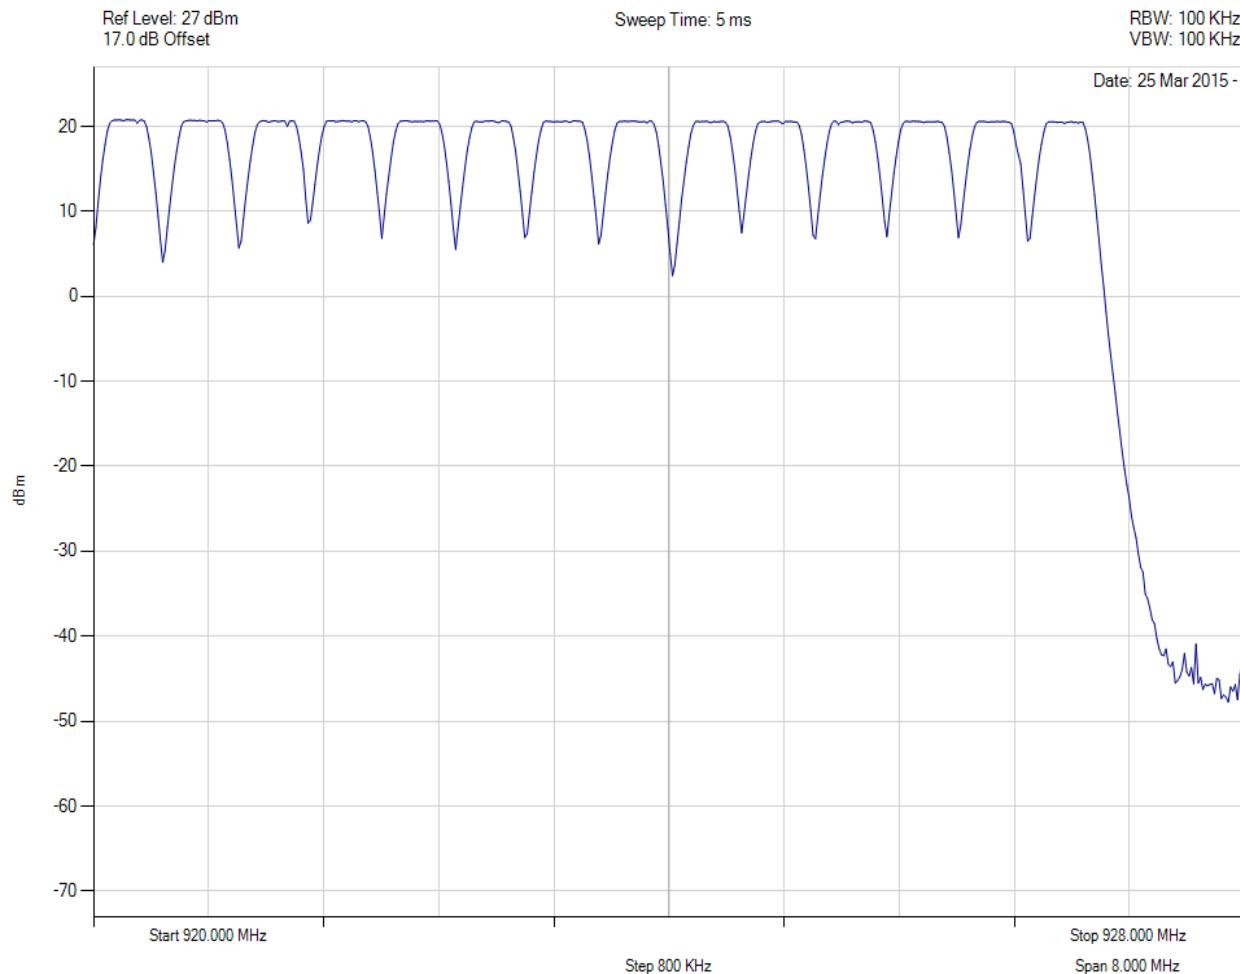


Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW		No. of hops: 14

[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 10.4. Channel Spacing

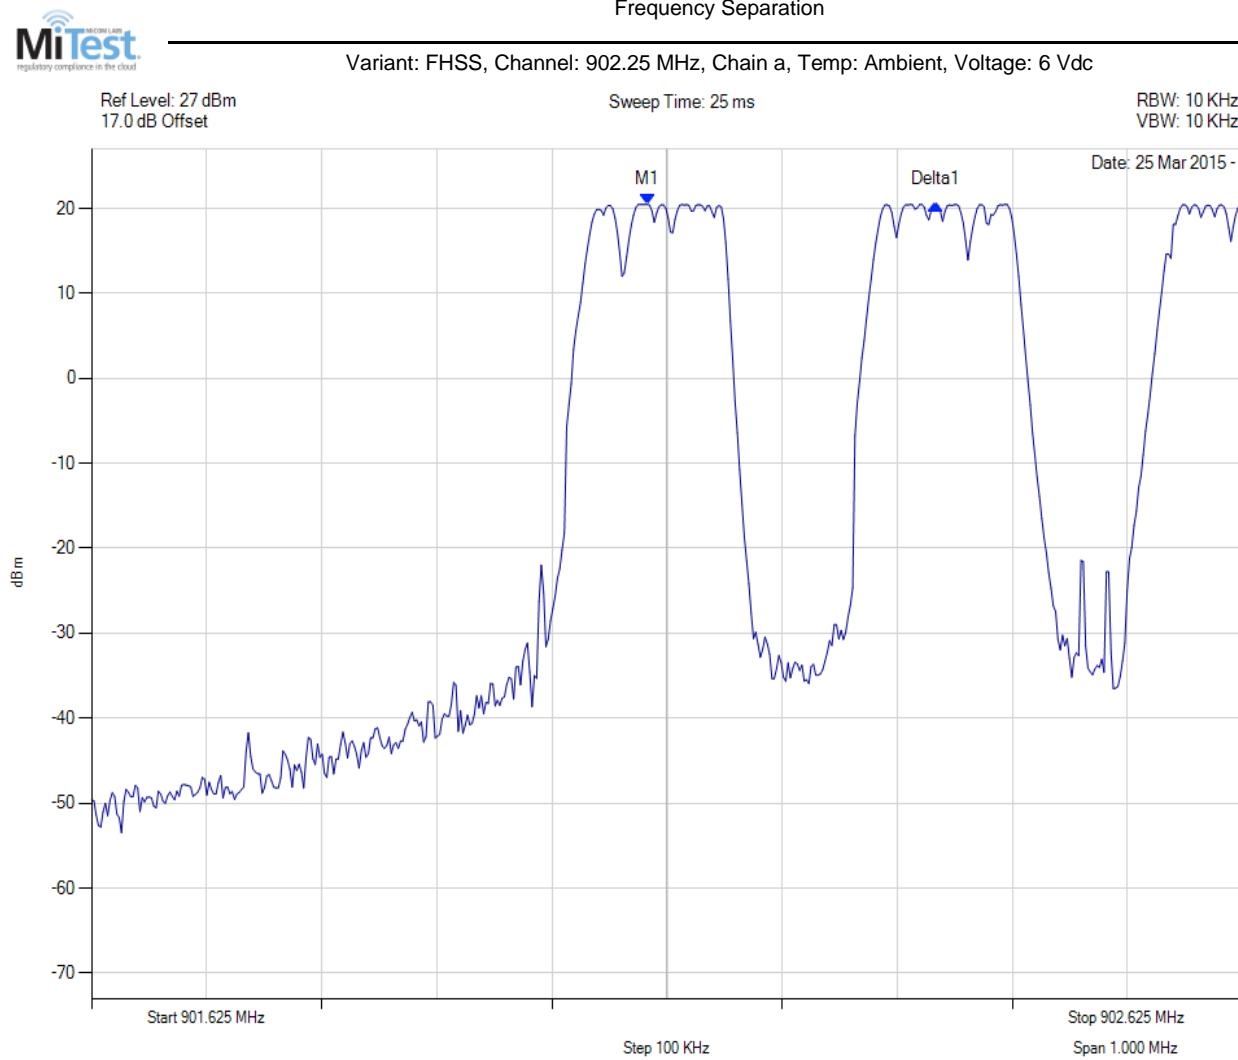

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 902.108 MHz : 20.480 dBm Delta1 : 251 KHz : -0.035 dB	Channel Frequency: 902.25 MHz


[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### Frequency Separation

Variant: FHSS, Channel: 902.25 MHz, Chain a, Temp: Ambient, Voltage: 6 Vdc

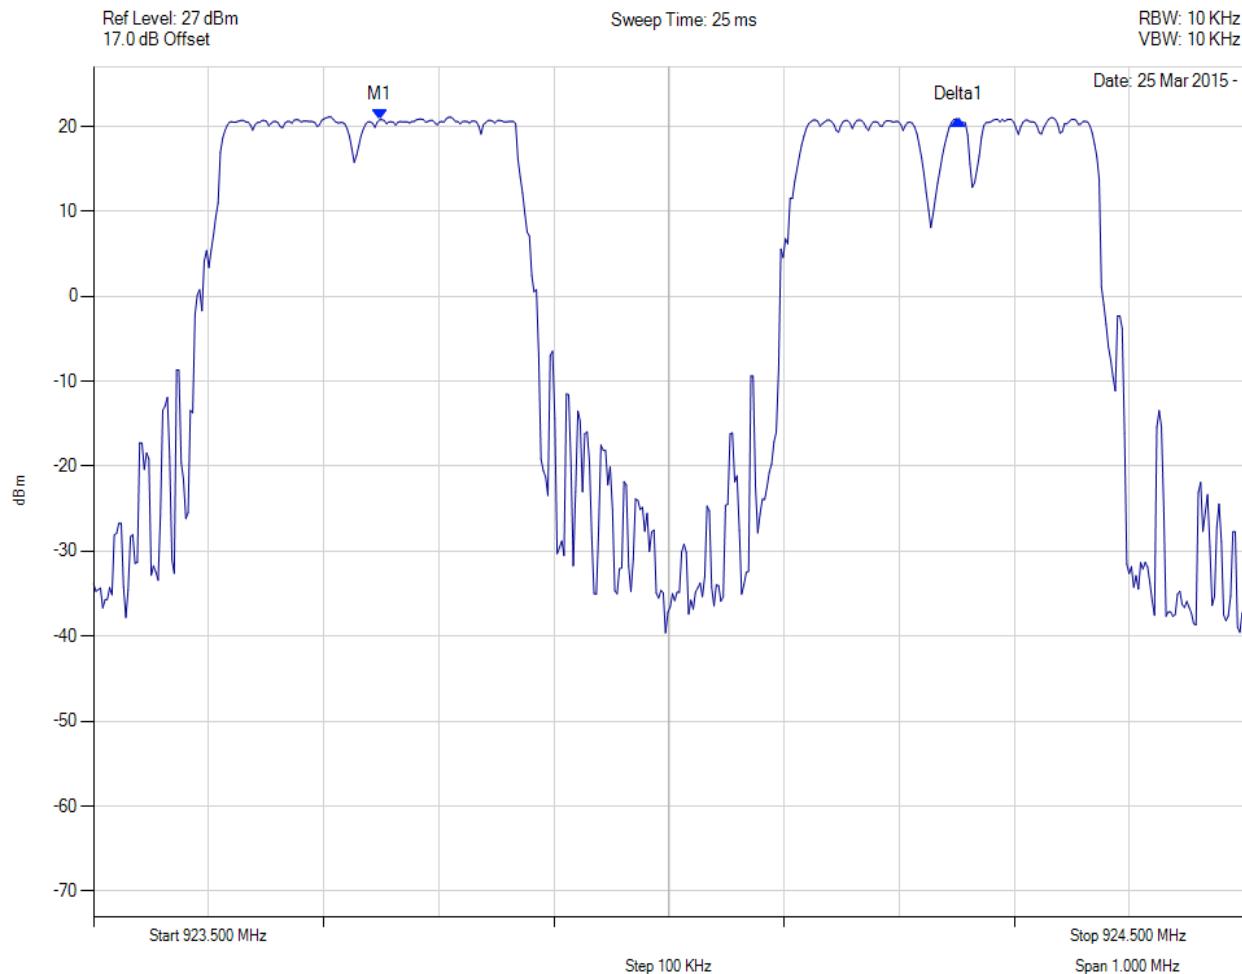


Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 923.748 MHz : 20.760 dBm Delta1 : 503 KHz : 0.031 dB	Channel Frequency: 902.25 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 10.5. Dwell Time & Channel Occupancy

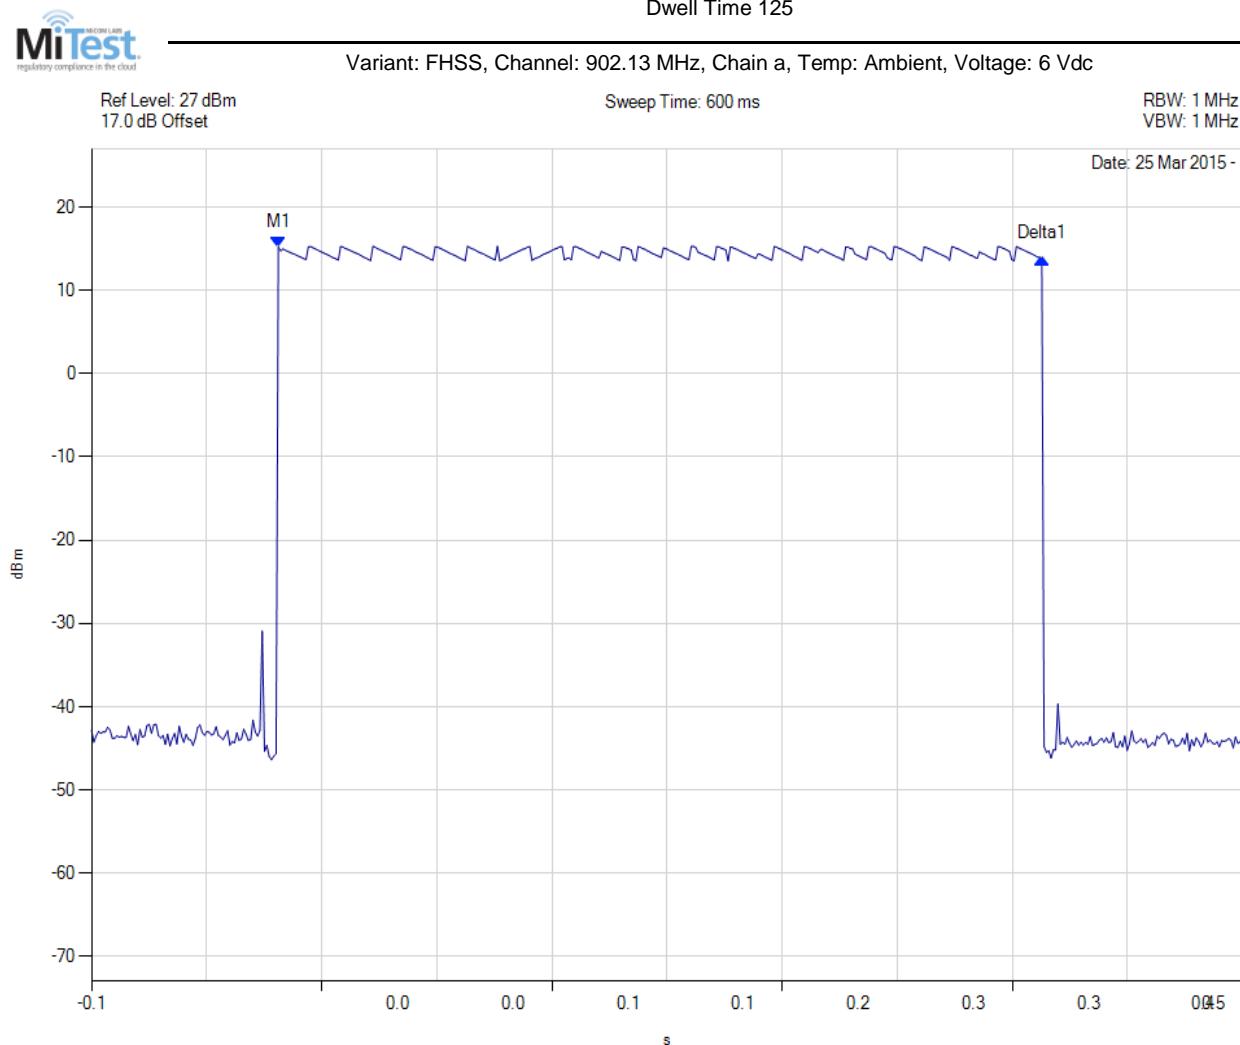


Analyser Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : -0.002 s : 15.212 dBm Delta1 : 0.398 s : -1.379 dB	Channel Frequency: 902.13 MHz

[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

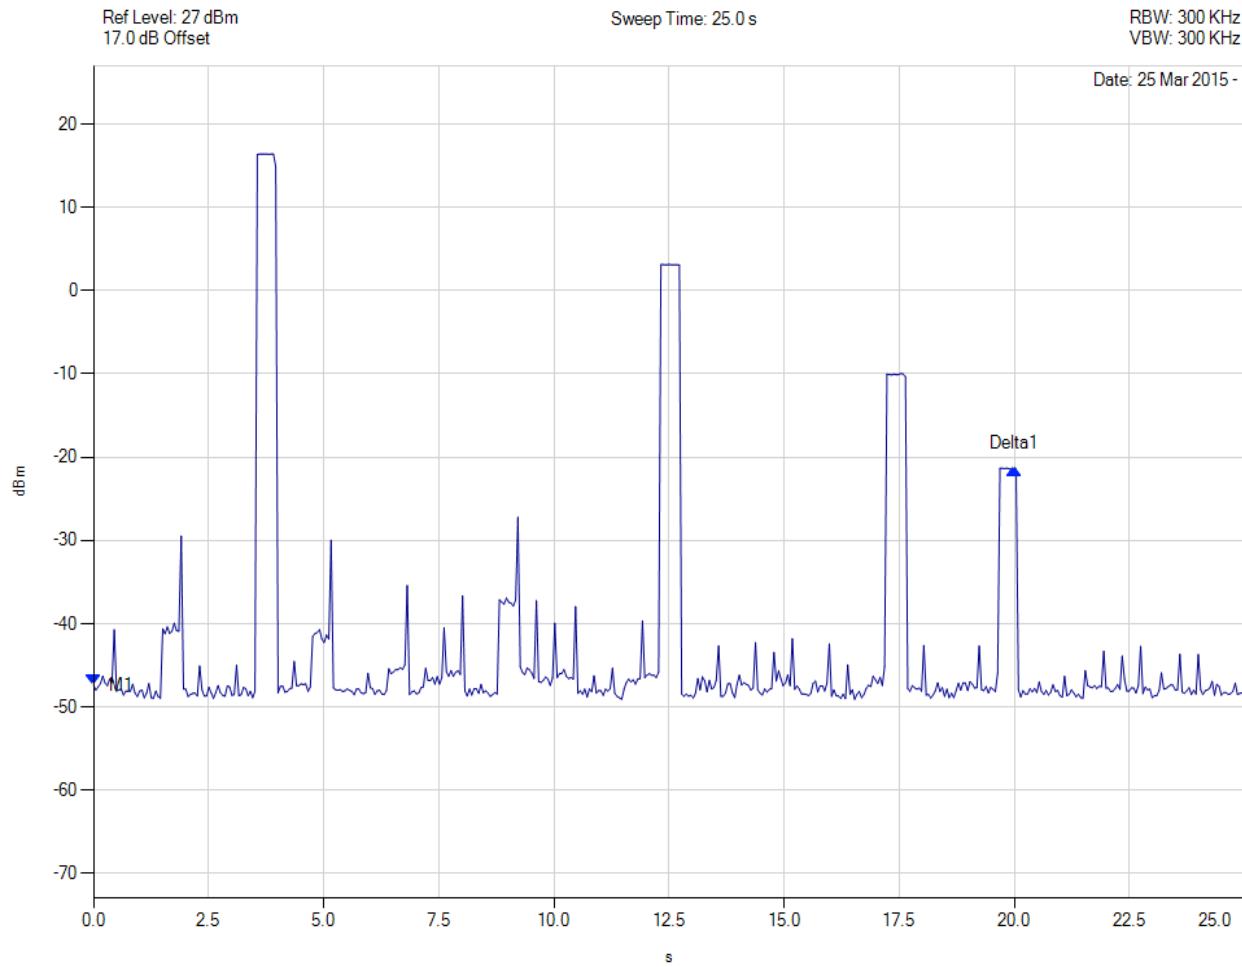


Analyser Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 0.000 s : -47.374 dBm Delta1 : 20.000 s : 25.965 dB	Channel Frequency: 902.13 MHz

[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

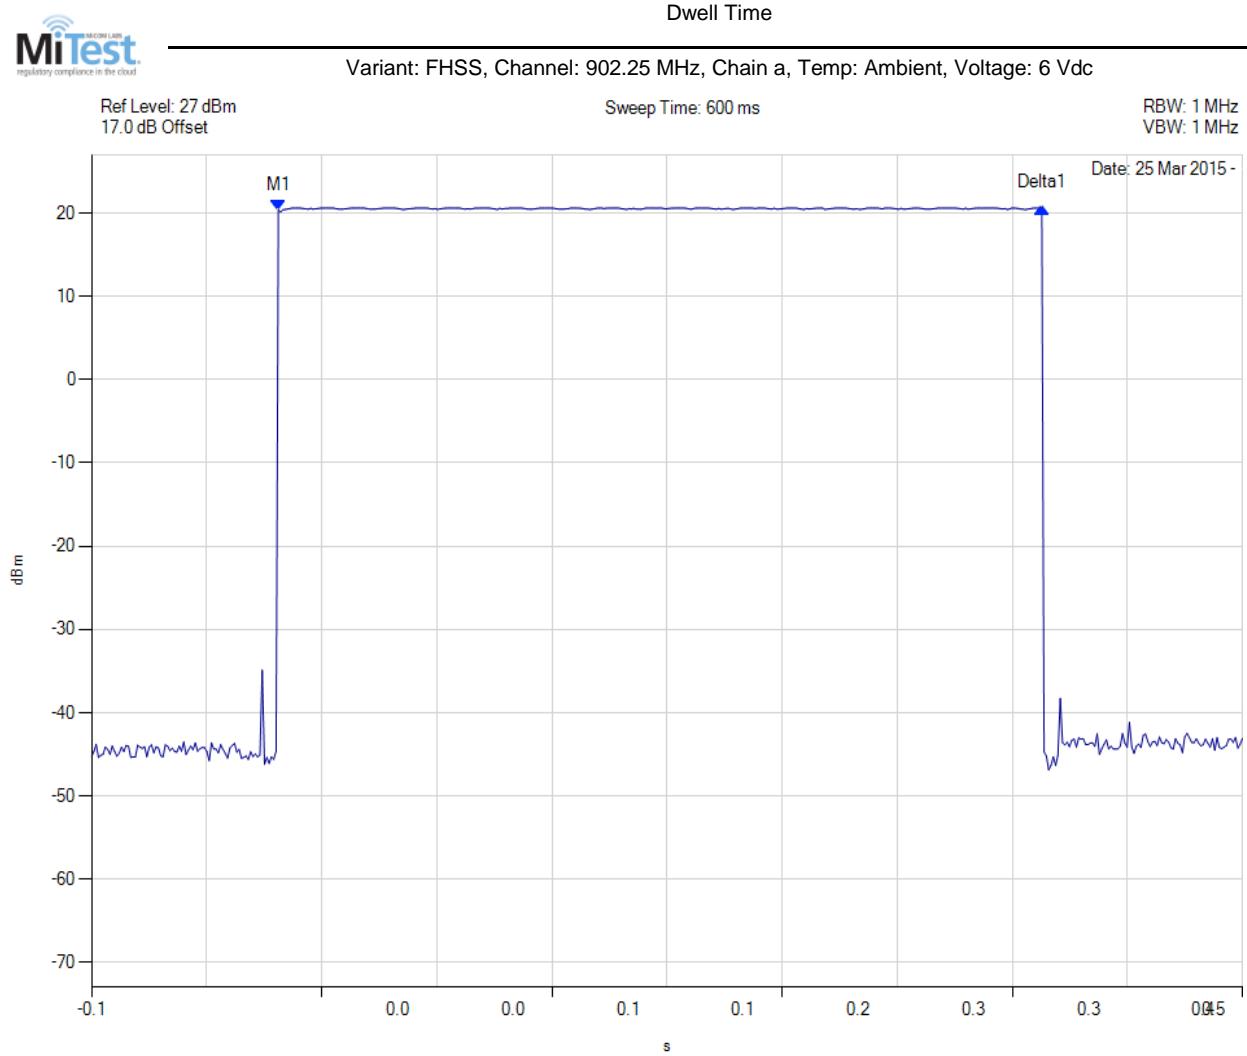


Analyser Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : -0.003 s : 20.380 dBm Delta1 : 0.398 s : 0.238 dB	Channel Frequency: 902.25 MHz

[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

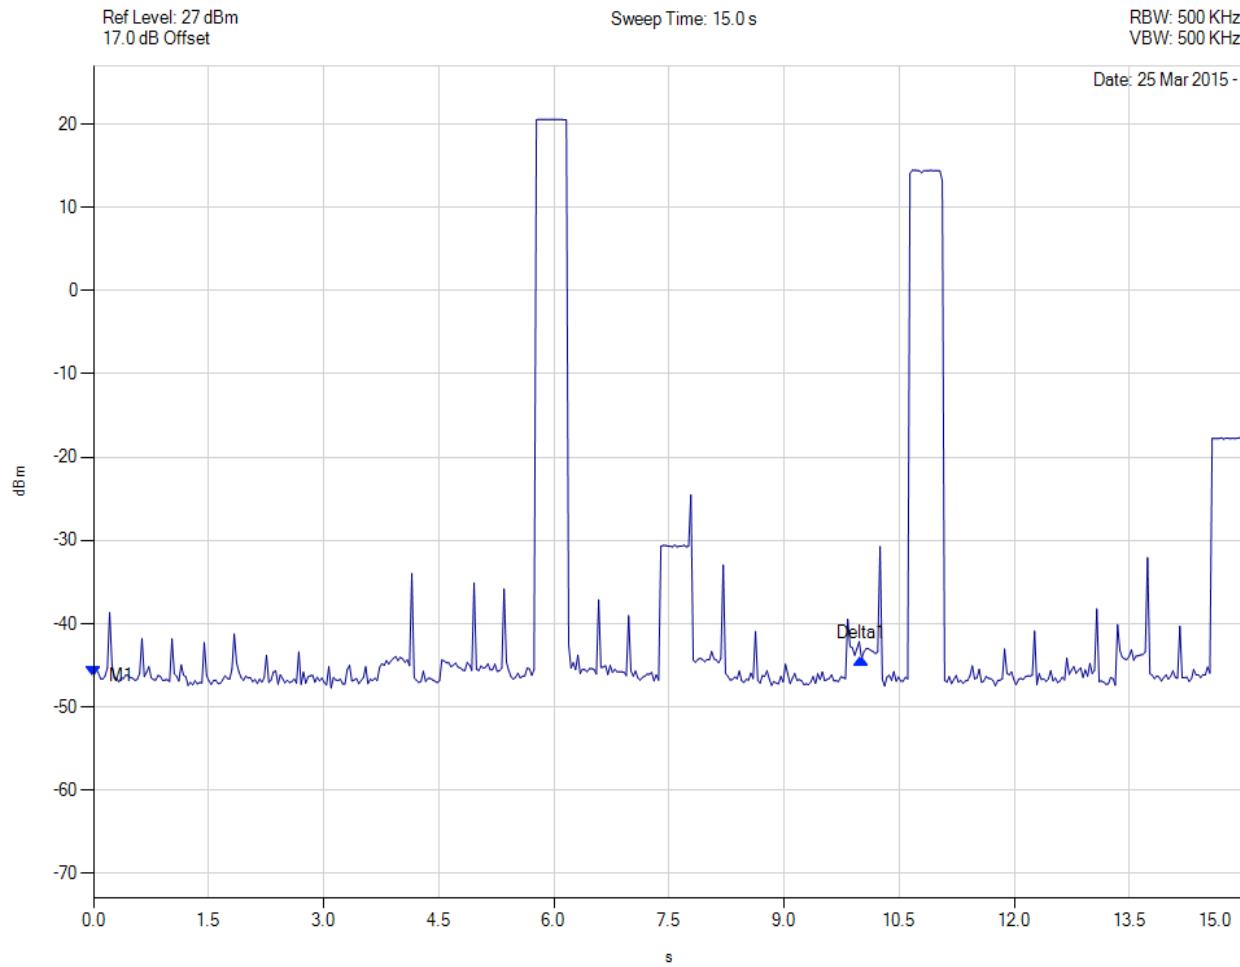


Analyser Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 0.000 s : -46.306 dBm Delta1 : 10.000 s : 2.095 dB	Channel Frequency: 902.25 MHz

[Back to Matrix](#)

## 10.6. Emissions

### 10.6.1. Conducted Emissions

#### 10.6.1.1. Conducted Spurious Emissions

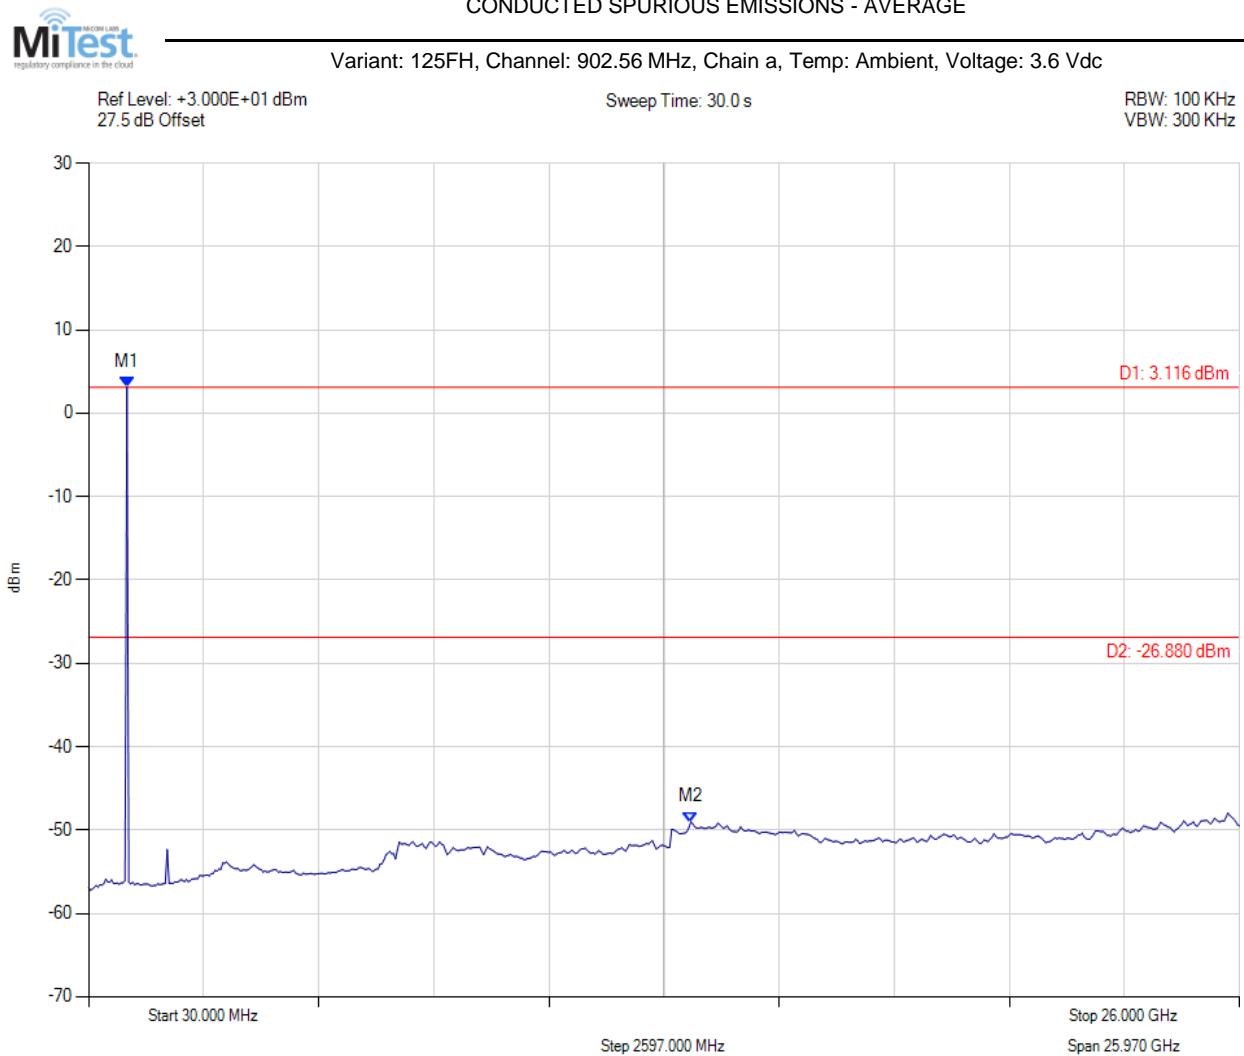

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 900.000 MHz : 3.116 dBm M2 : 13.620 GHz : -49.043 dBm	Limit: -26.88 dBm Margin: -22.16 dB


[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 125FH, Channel: 915.06 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

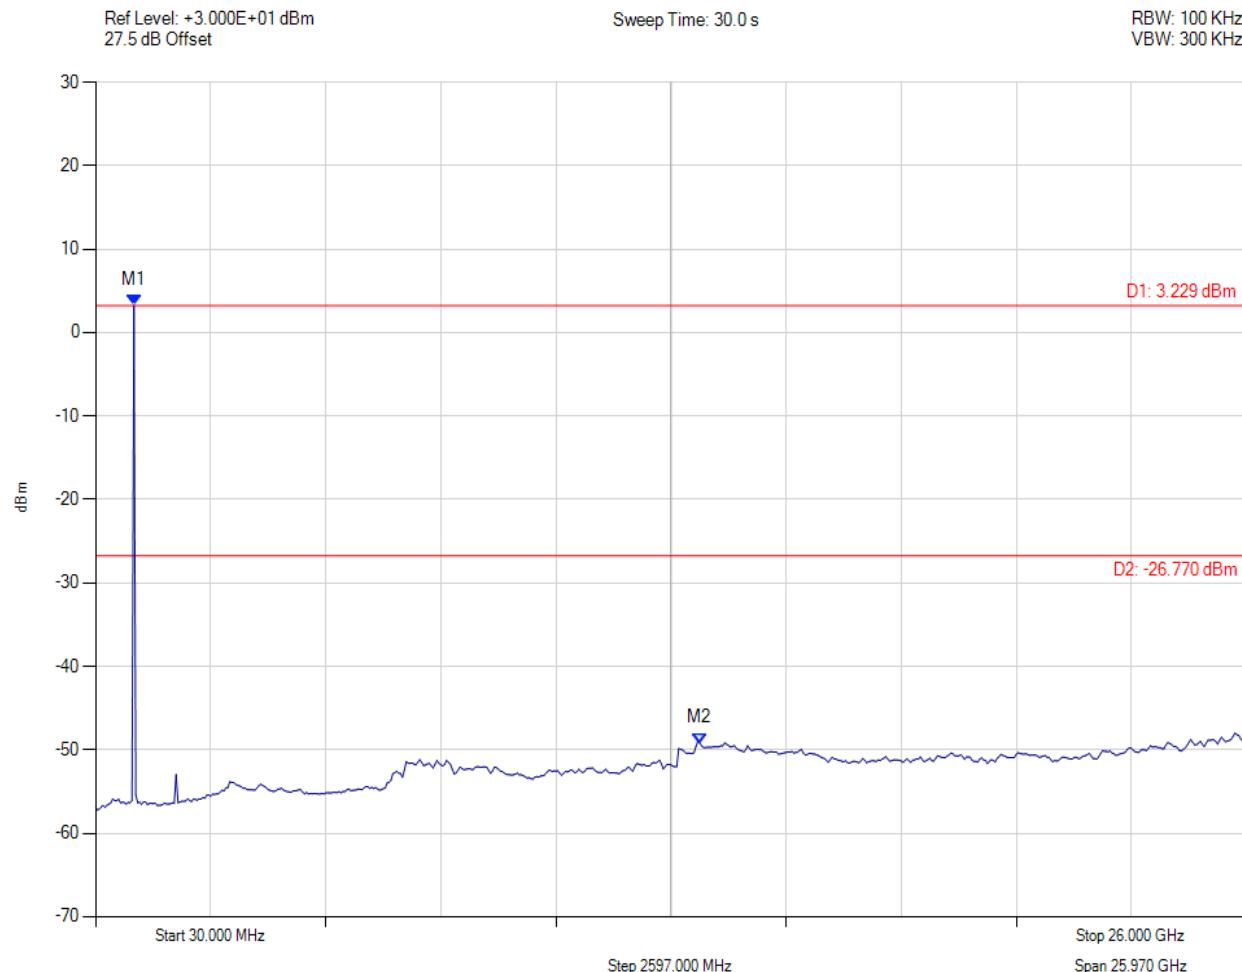

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 900.000 MHz : 3.229 dBm M2 : 13.660 GHz : -49.212 dBm	Limit: -26.77 dBm Margin: -22.44 dB


[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 125FH, Channel: 926.94 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

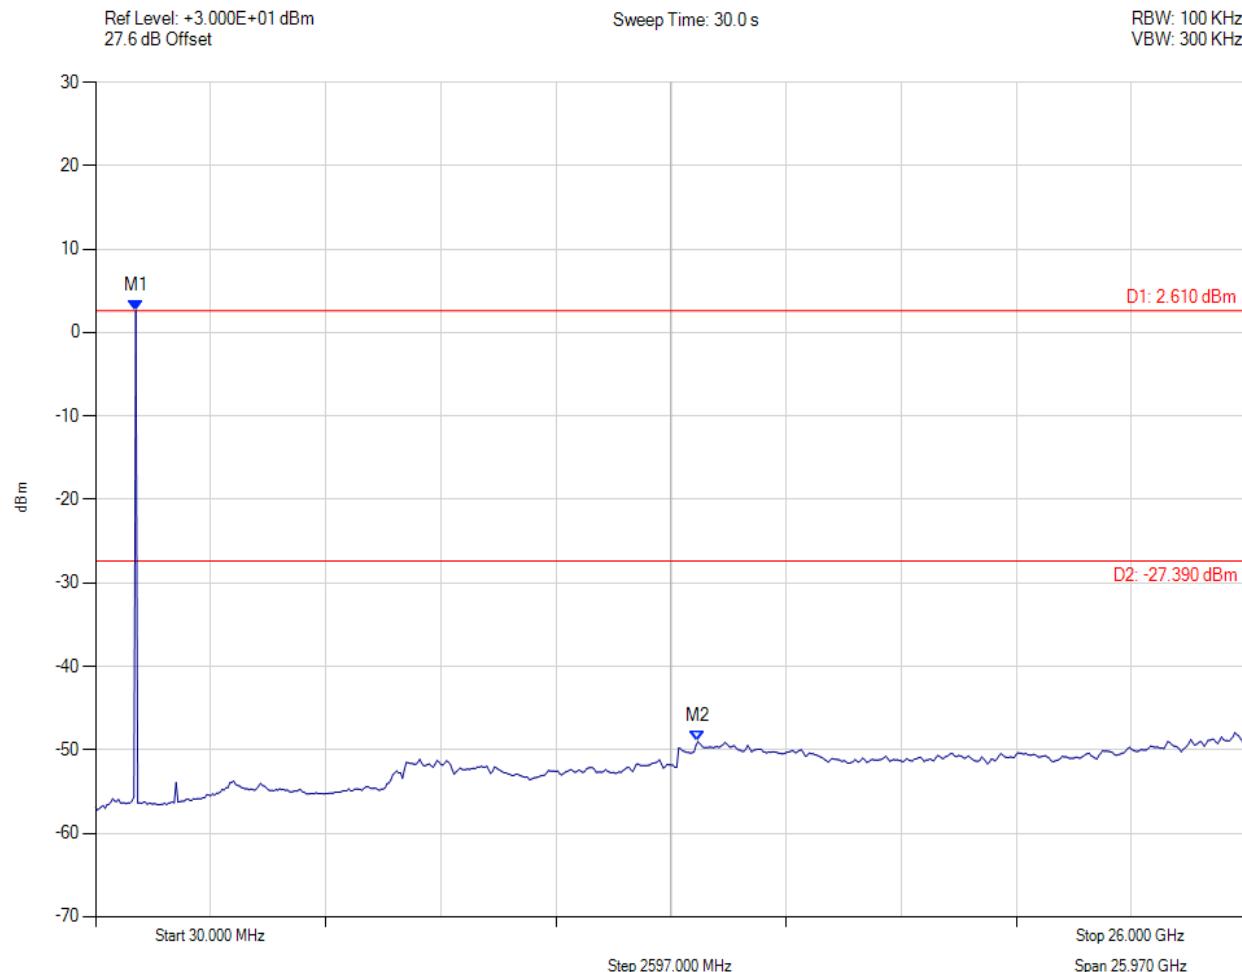

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 940.000 MHz : 2.610 dBm M2 : 13.620 GHz : -49.014 dBm	Limit: -27.39 dBm Margin: -21.62 dB


[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 250FH, Channel: 902.56 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

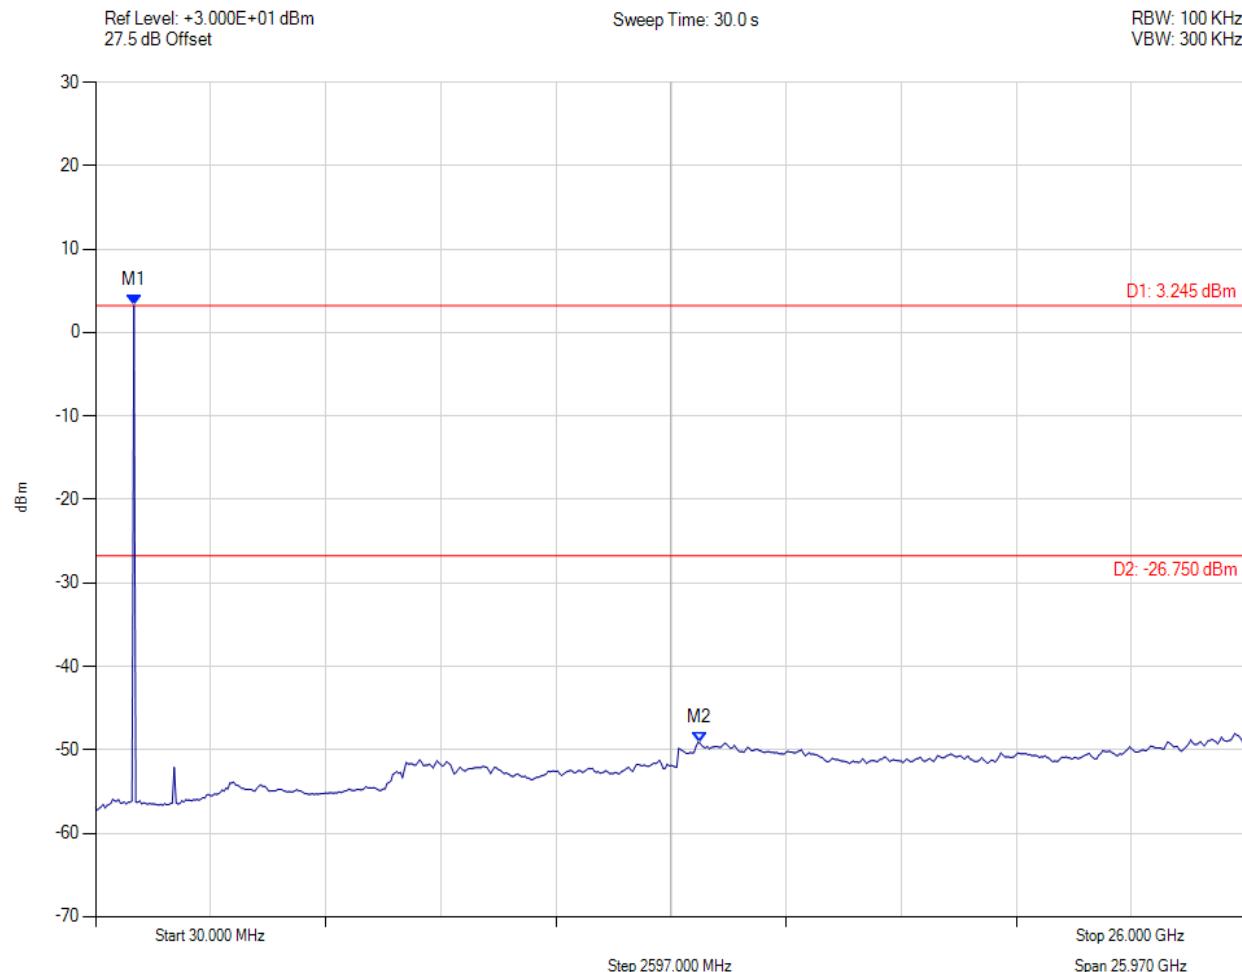

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 900.000 MHz : 3.245 dBm M2 : 13.660 GHz : -49.168 dBm	Limit: -26.75 dBm Margin: -22.42 dB


[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 250FH, Channel: 915.06 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

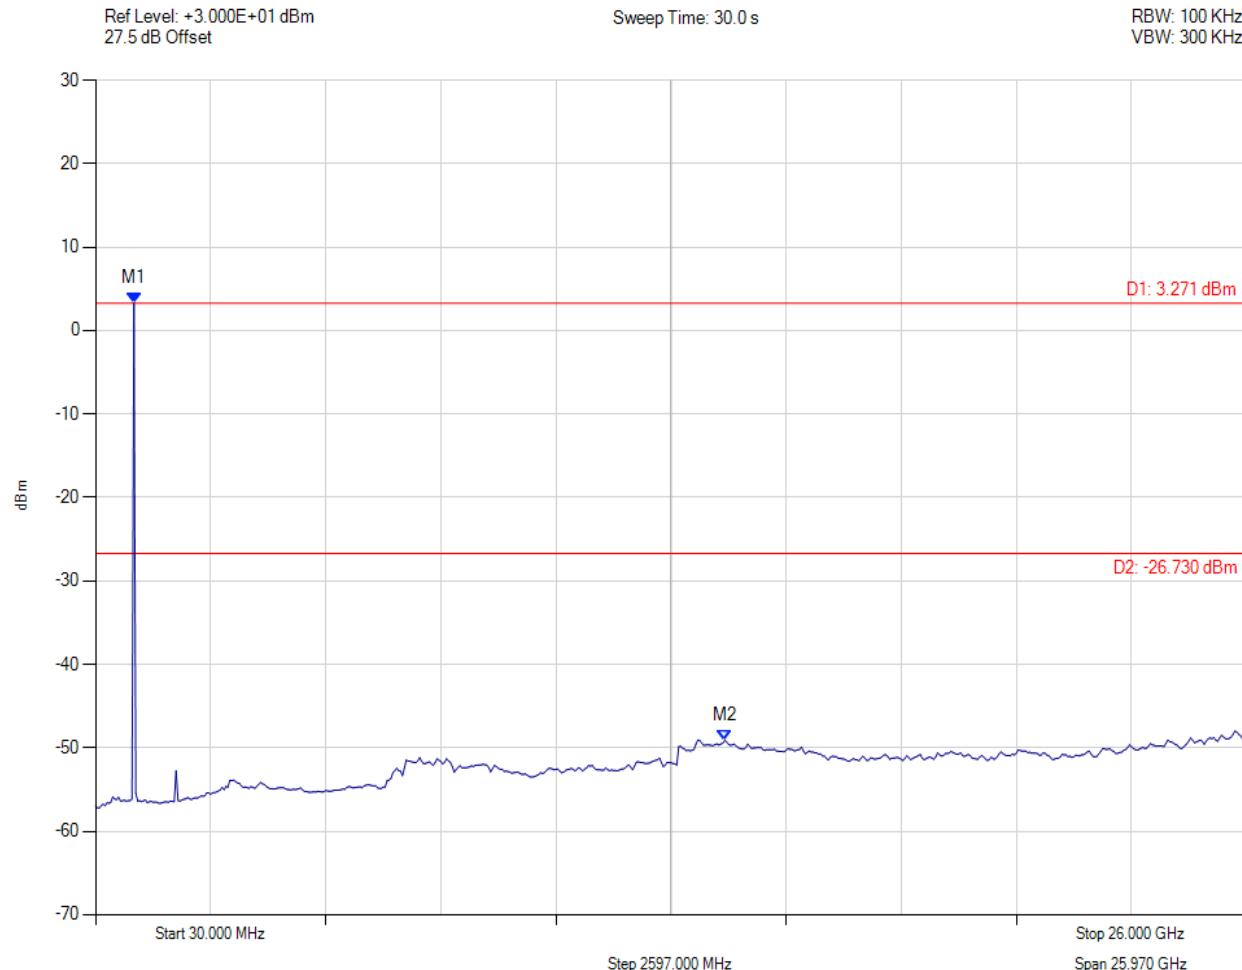

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 900.000 MHz : 3.271 dBm M2 : 14.230 GHz : -49.112 dBm	Limit: -26.73 dBm Margin: -22.38 dB

[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




### CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 250FH, Channel: 926.94 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

Ref Level: +3.000E+01 dBm  
27.6 dB Offset

Sweep Time: 30.0 s

RBW: 100 KHz  
VBW: 300 KHz

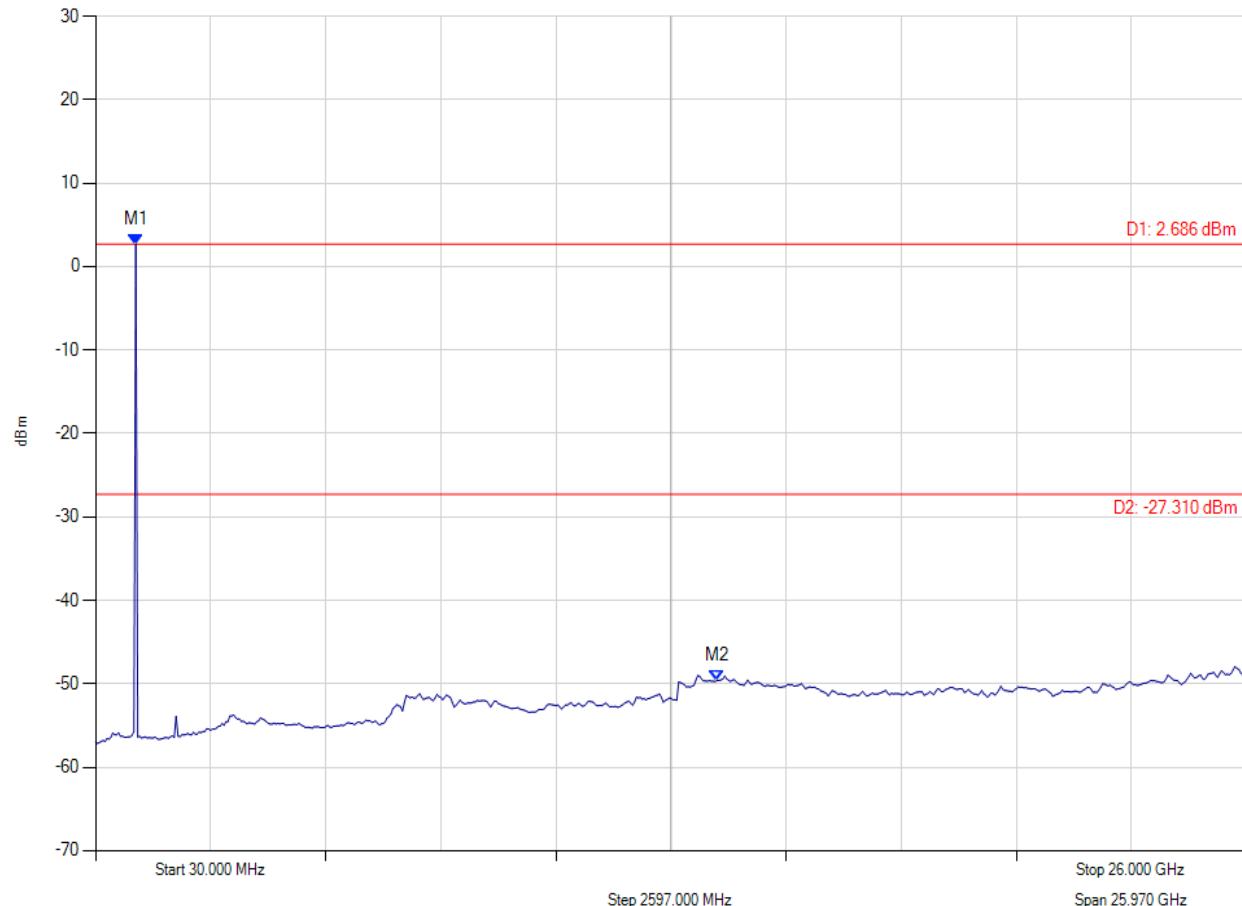

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 940.000 MHz : 2.686 dBm M2 : 14.050 GHz : -49.587 dBm	Limit: -27.31 dBm Margin: -22.28 dB

[Back to Matrix](#)


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 500DSS, Channel: 902.56 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

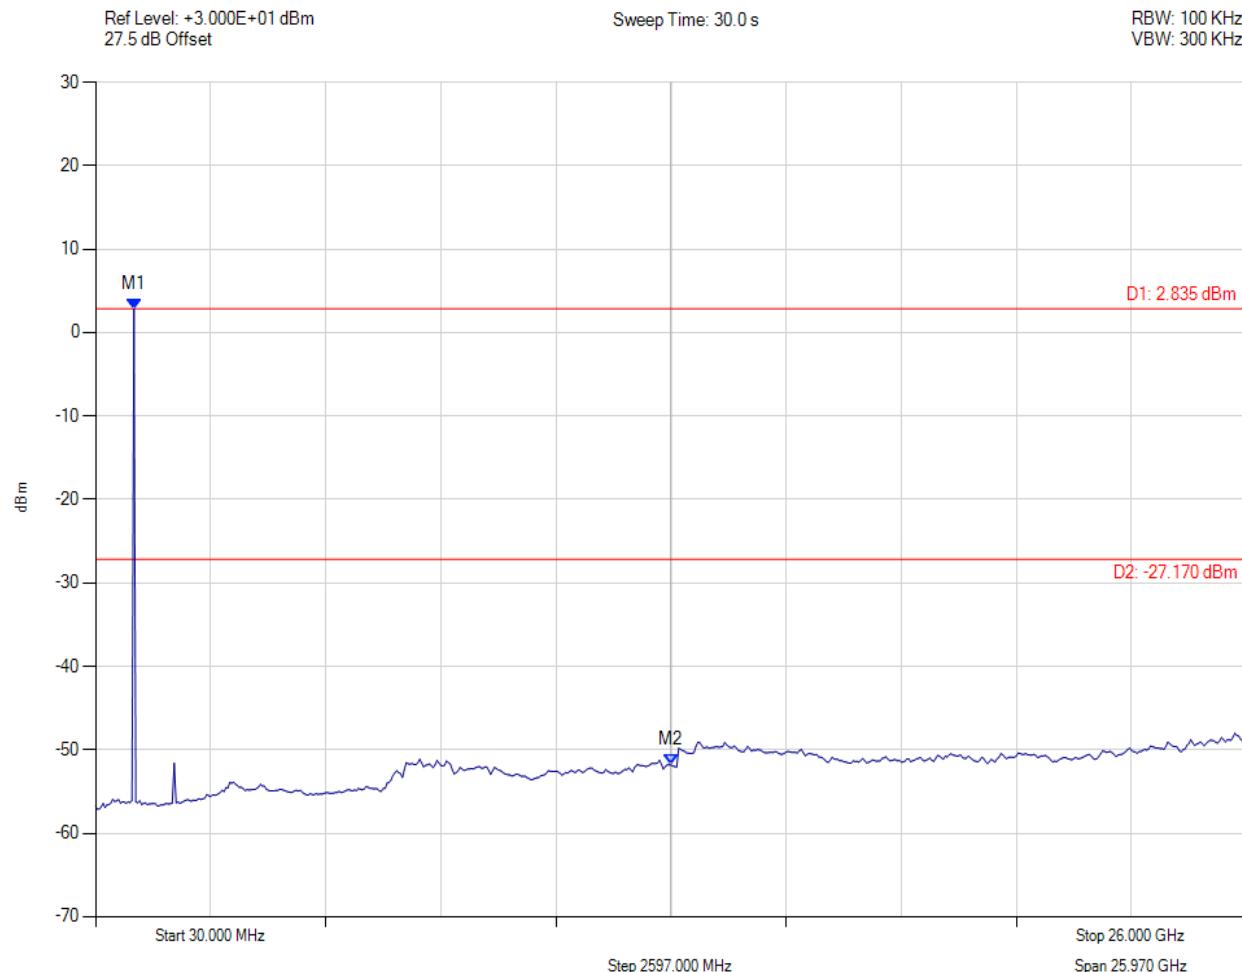

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 900.000 MHz : 2.835 dBm M2 : 13.020 GHz : -51.820 dBm	Limit: -27.17 dBm Margin: -24.65 dB


[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 500DSS, Channel: 915.06 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

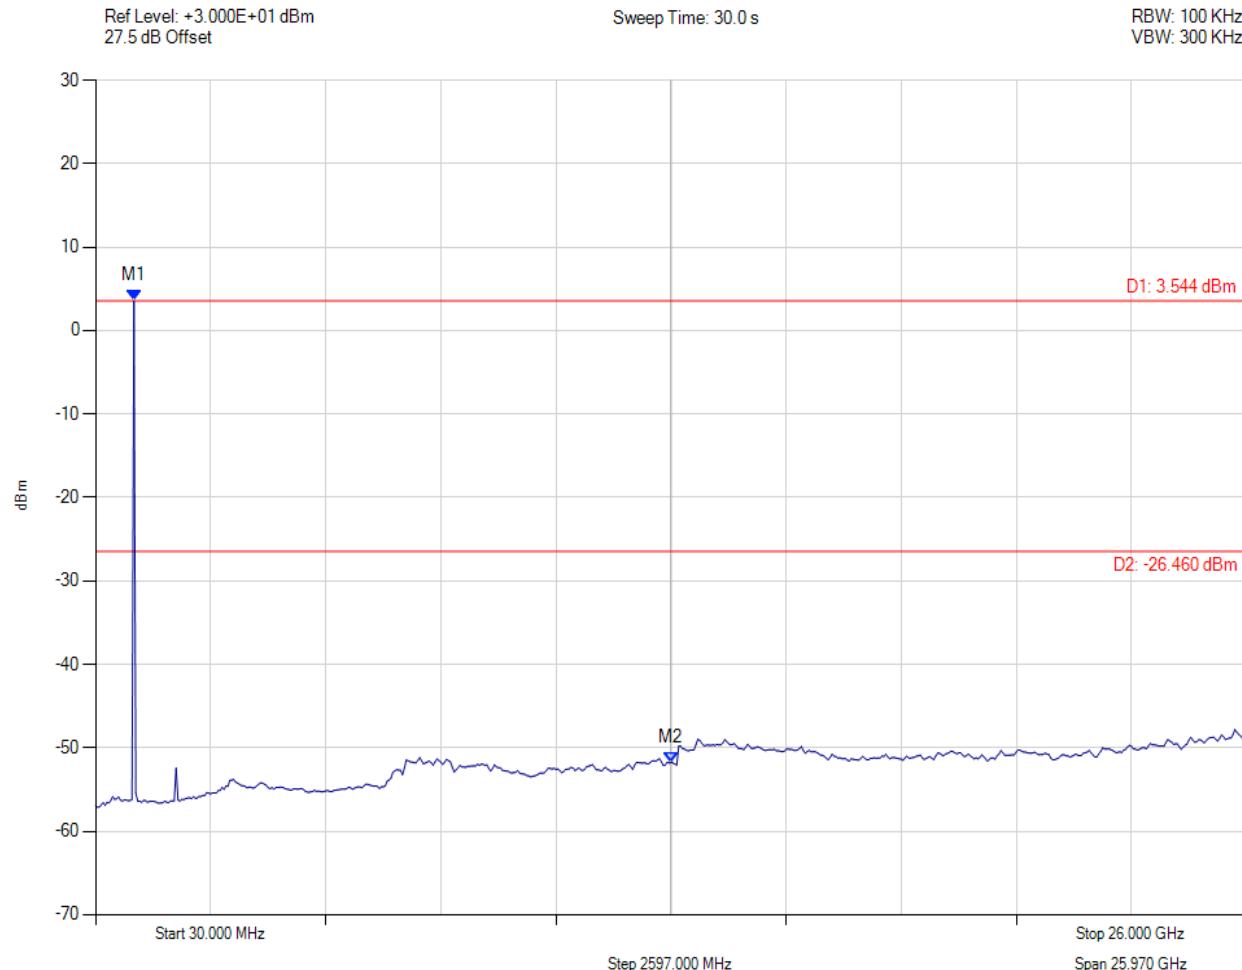

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 900.000 MHz : 3.544 dBm M2 : 13.020 GHz : -51.737 dBm	Limit: -26.46 dBm Margin: -25.28 dB

[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


### CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 500DSS, Channel: 926.94 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

Ref Level: +3.000E+01 dBm  
27.6 dB Offset

Sweep Time: 30.0 s

RBW: 100 KHz  
VBW: 300 KHz

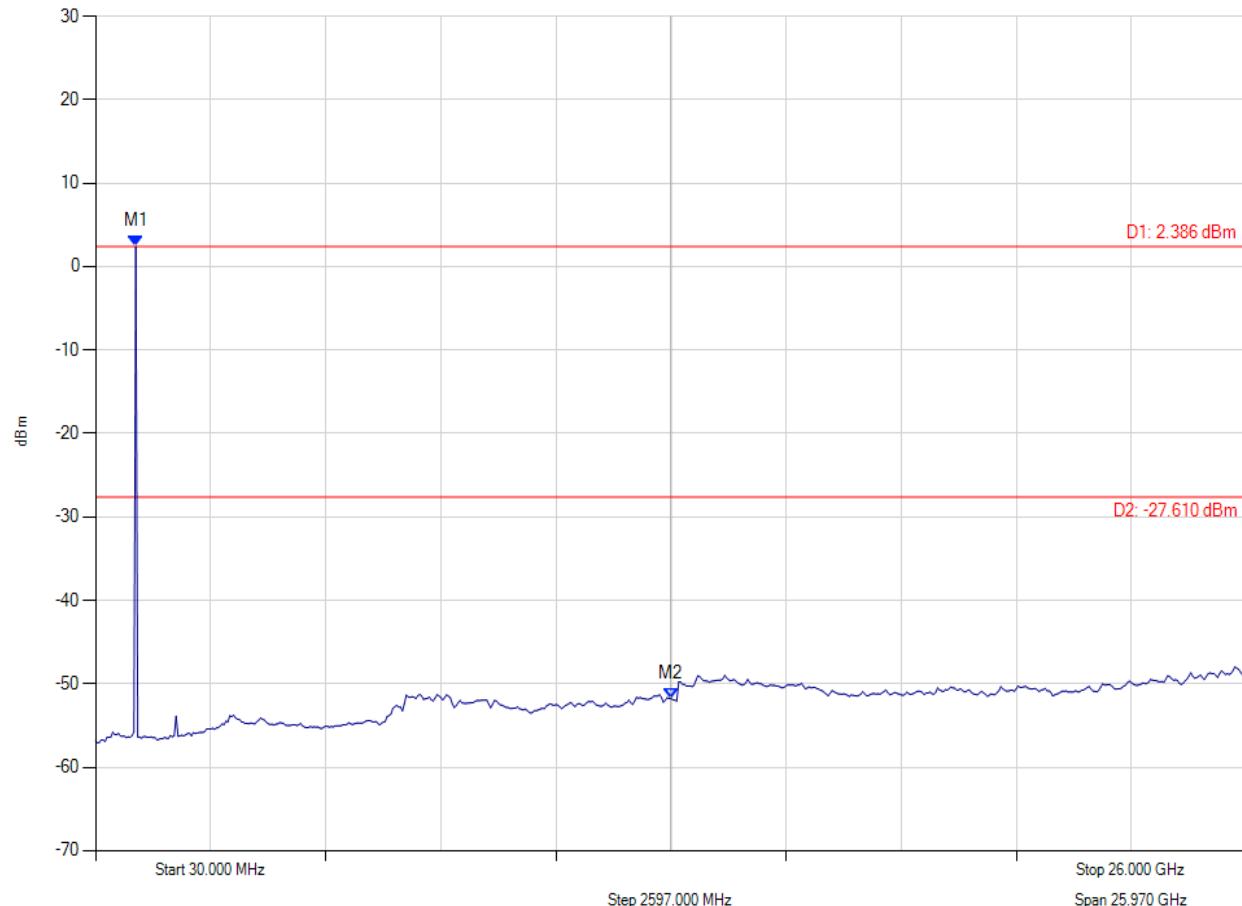


Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 940.000 MHz : 2.386 dBm M2 : 13.020 GHz : -51.774 dBm	Limit: -27.61 dBm Margin: -24.16 dB

[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### 10.6.1.2. Conducted Band-Edge Emissions

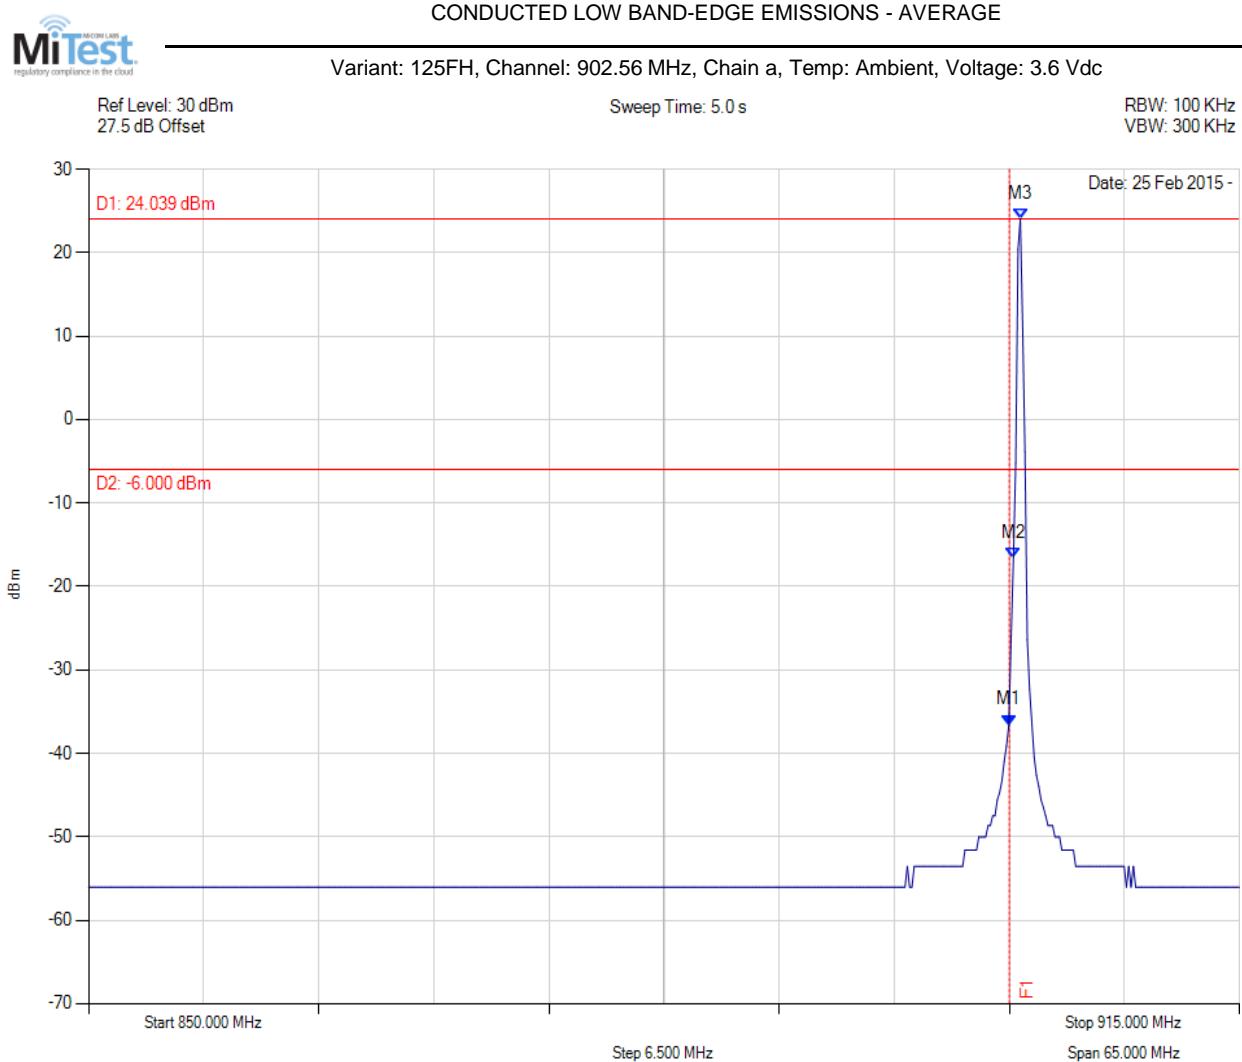


Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 902.000 MHz : -36.622 dBm M2 : 902.234 MHz : -16.560 dBm M3 : 902.625 MHz : 24.039 dBm	Channel Frequency: 902.56 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE

Variant: 250FH, Channel: 902.56 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

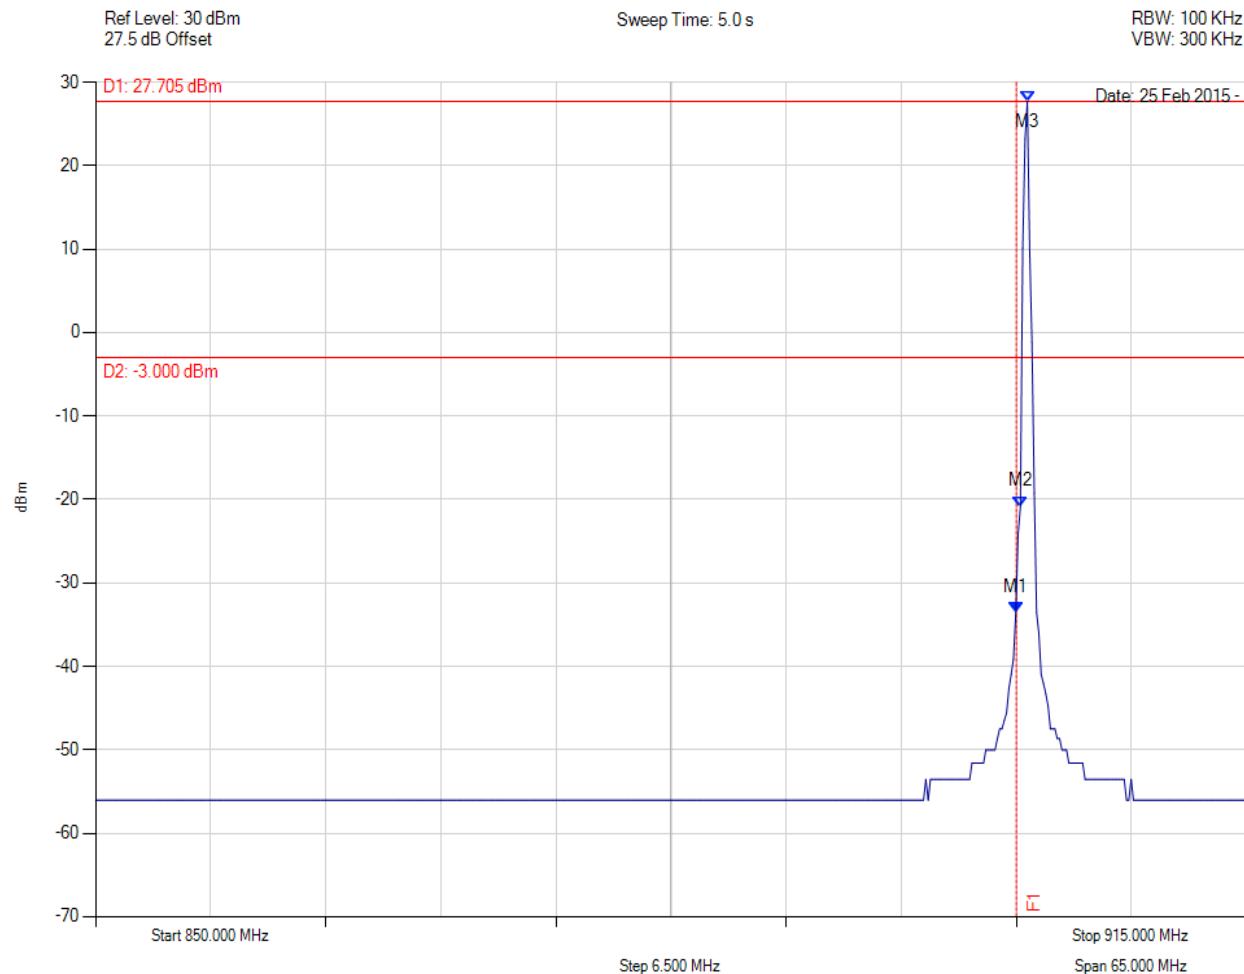

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 902.000 MHz : -33.524 dBm M2 : 902.234 MHz : -20.855 dBm M3 : 902.625 MHz : 27.705 dBm	Channel Frequency: 902.56 MHz

[Back to Matrix](#)


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 500DSS, Channel: 902.56 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

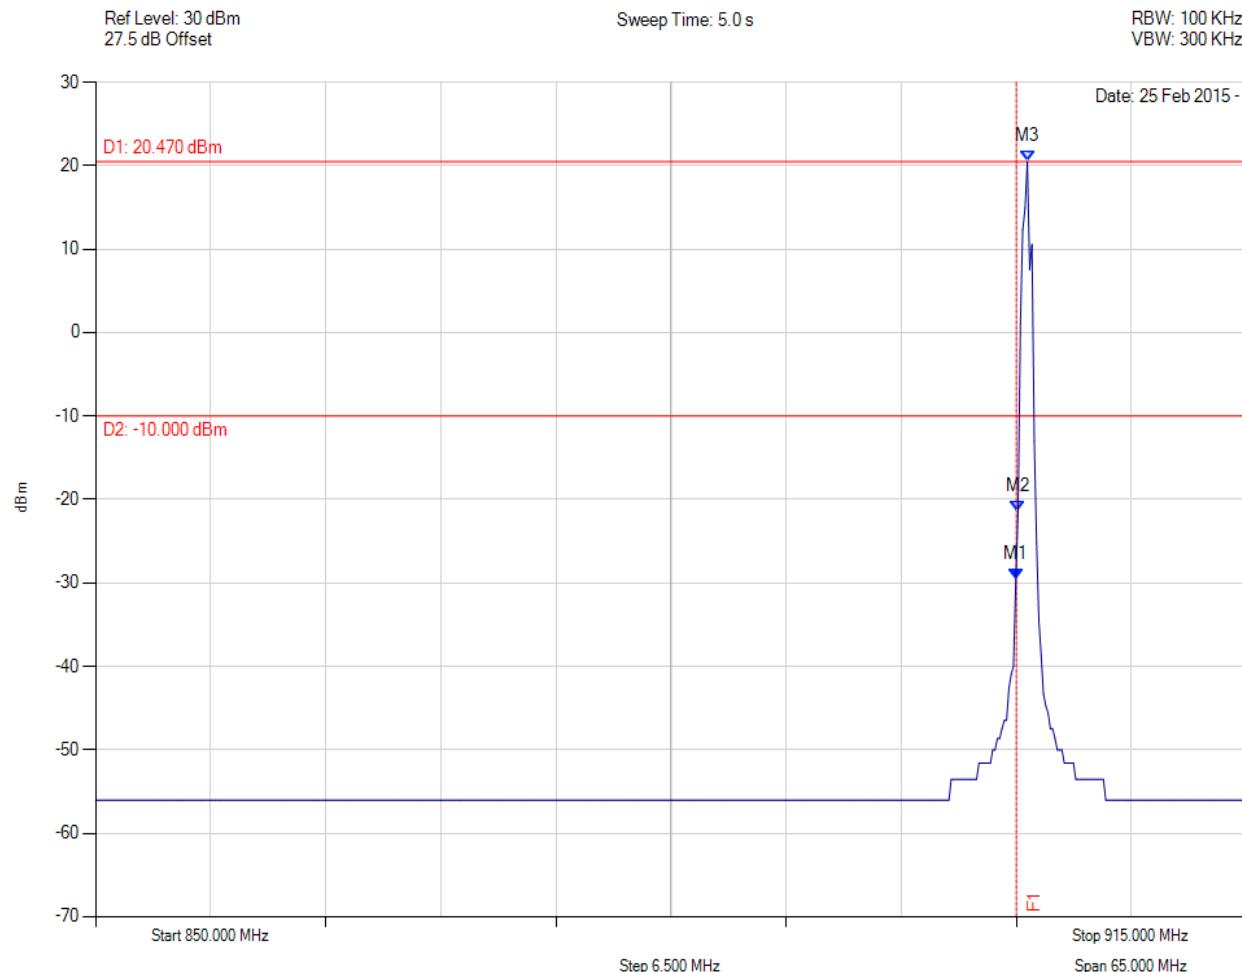

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 902.000 MHz : -29.579 dBm M2 : 902.104 MHz : -21.429 dBm M3 : 902.625 MHz : 20.470 dBm	Channel Frequency: 902.56 MHz

[Back to Matrix](#)


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 125FH, Channel: 926.94 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

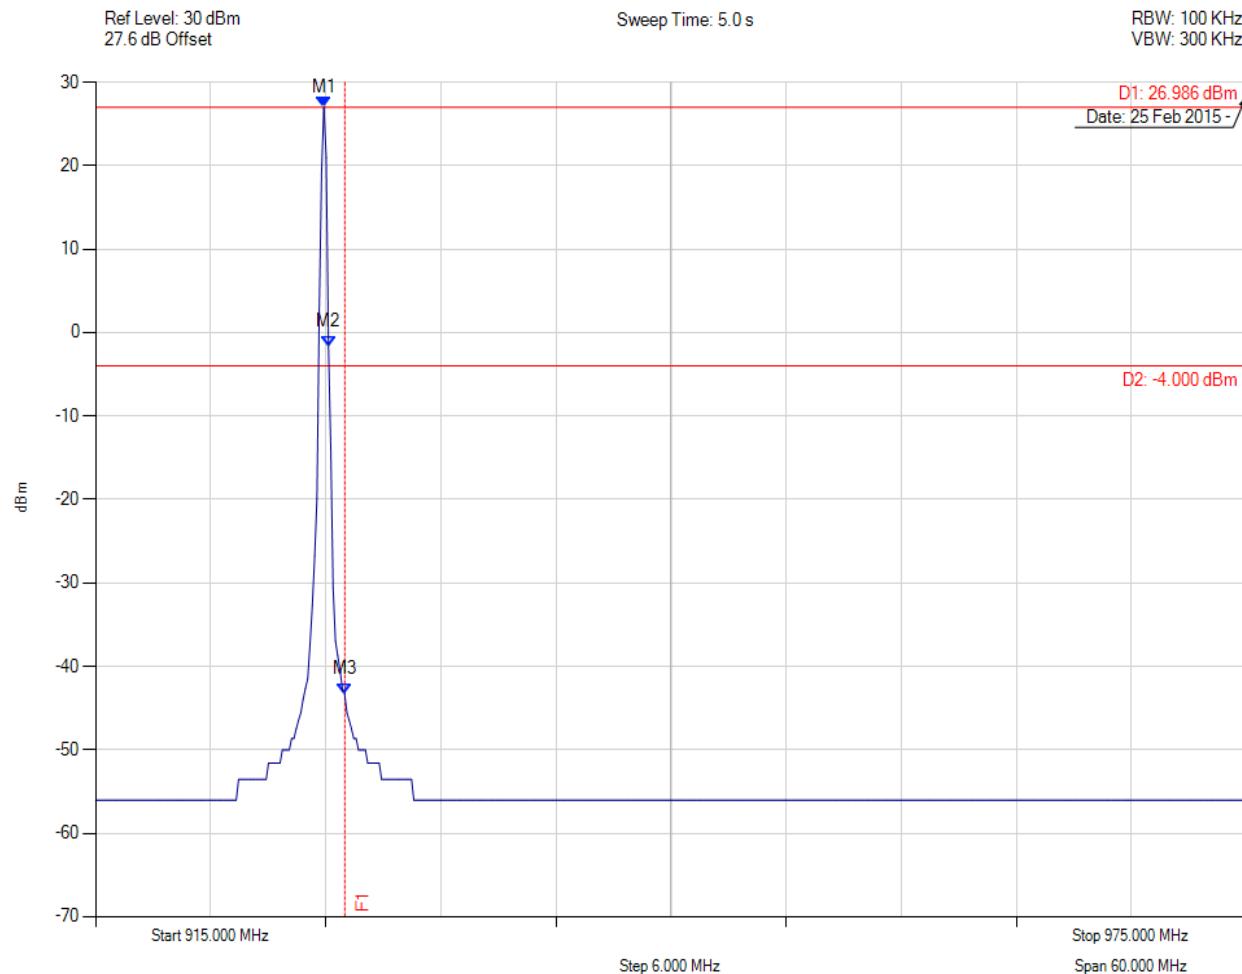

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 926.904 MHz : 26.986 dBm M2 : 927.144 MHz : -1.681 dBm M3 : 928.000 MHz : -43.286 dBm	Channel Frequency: 926.94 MHz


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 250FH, Channel: 926.94 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

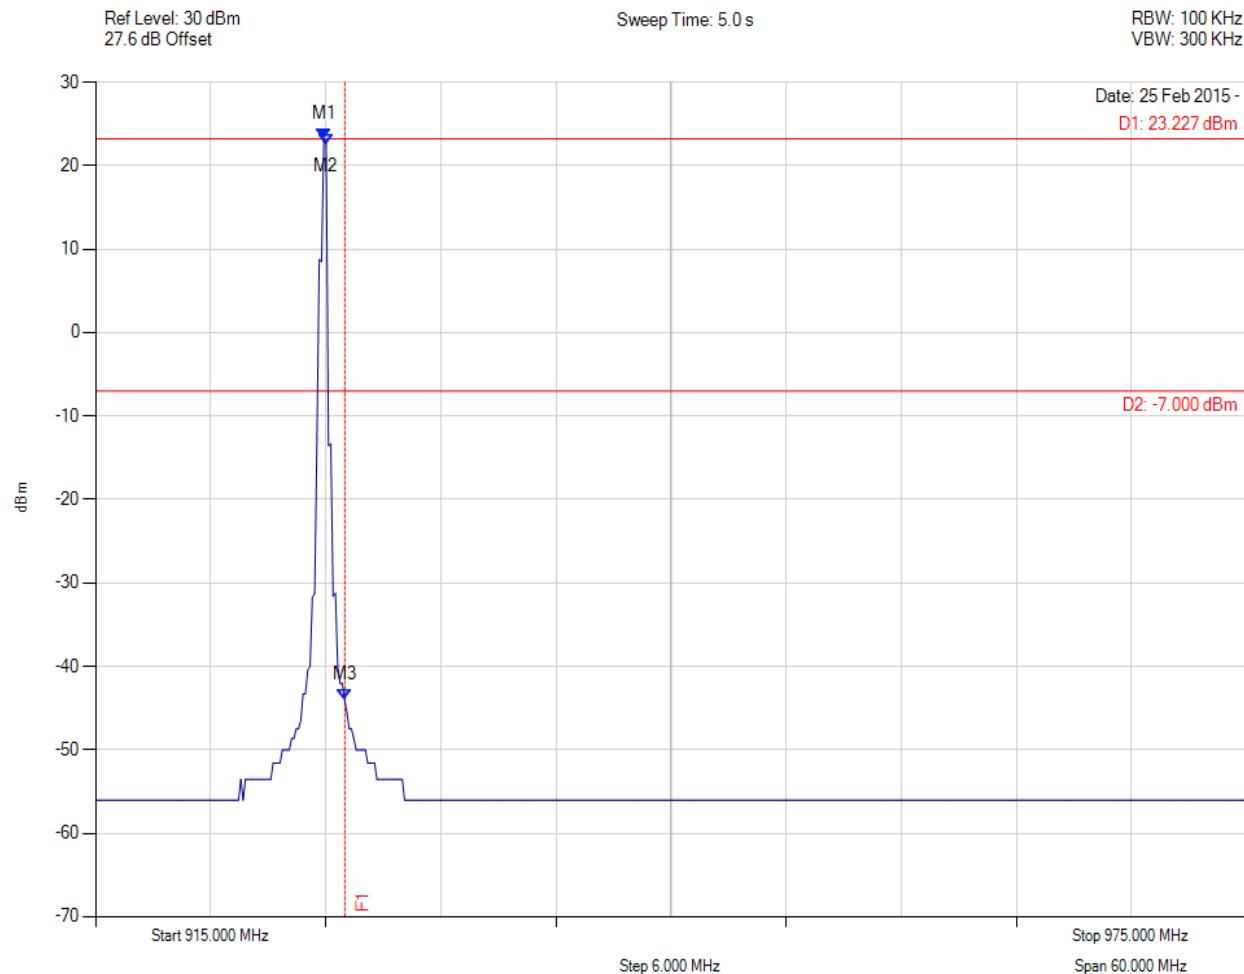

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 926.904 MHz : 23.227 dBm M2 : 927.024 MHz : 22.515 dBm M3 : 928.000 MHz : -43.982 dBm	Channel Frequency: 926.94 MHz


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 500DSS, Channel: 926.94 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

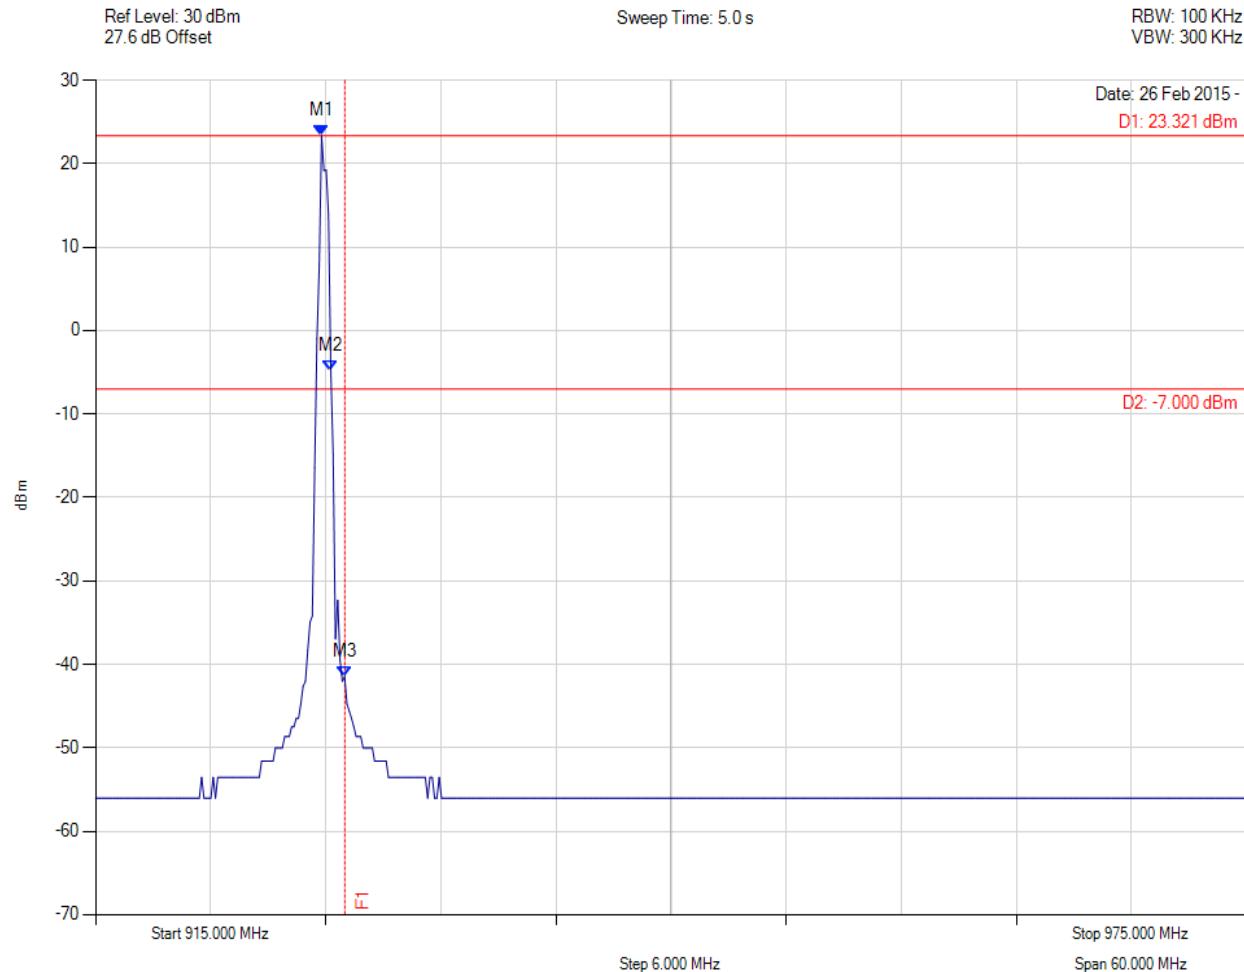


Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 926.784 MHz : 23.321 dBm M2 : 927.265 MHz : -4.801 dBm M3 : 928.000 MHz : -41.483 dBm	Channel Frequency: 926.94 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 10.7. Power Spectral Density

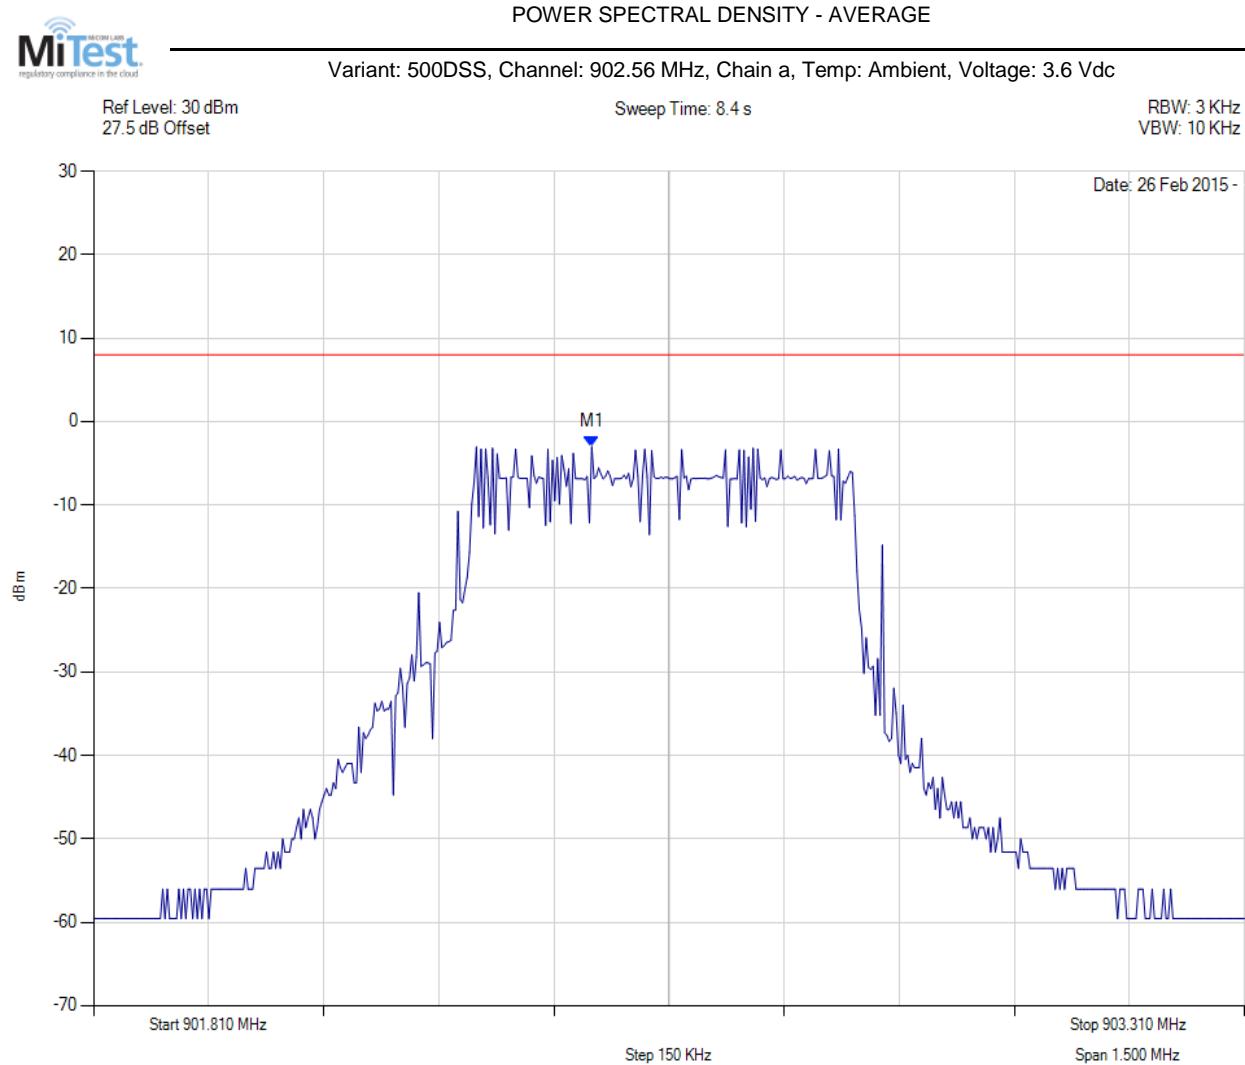

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 902.459 MHz : -3.030 dBm	Limit: ≤ 8.000 dBm

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

POWER SPECTRAL DENSITY - AVERAGE




Variant: 500DSS, Channel: 902.56 MHz, SUM, Temp: Ambient, Voltage: 3.6 Vdc

Ref Level: 30 dBm  
27.5 dB Offset

Sweep Time: 8.4 s

RBW: 3 KHz  
VBW: 10 KHz

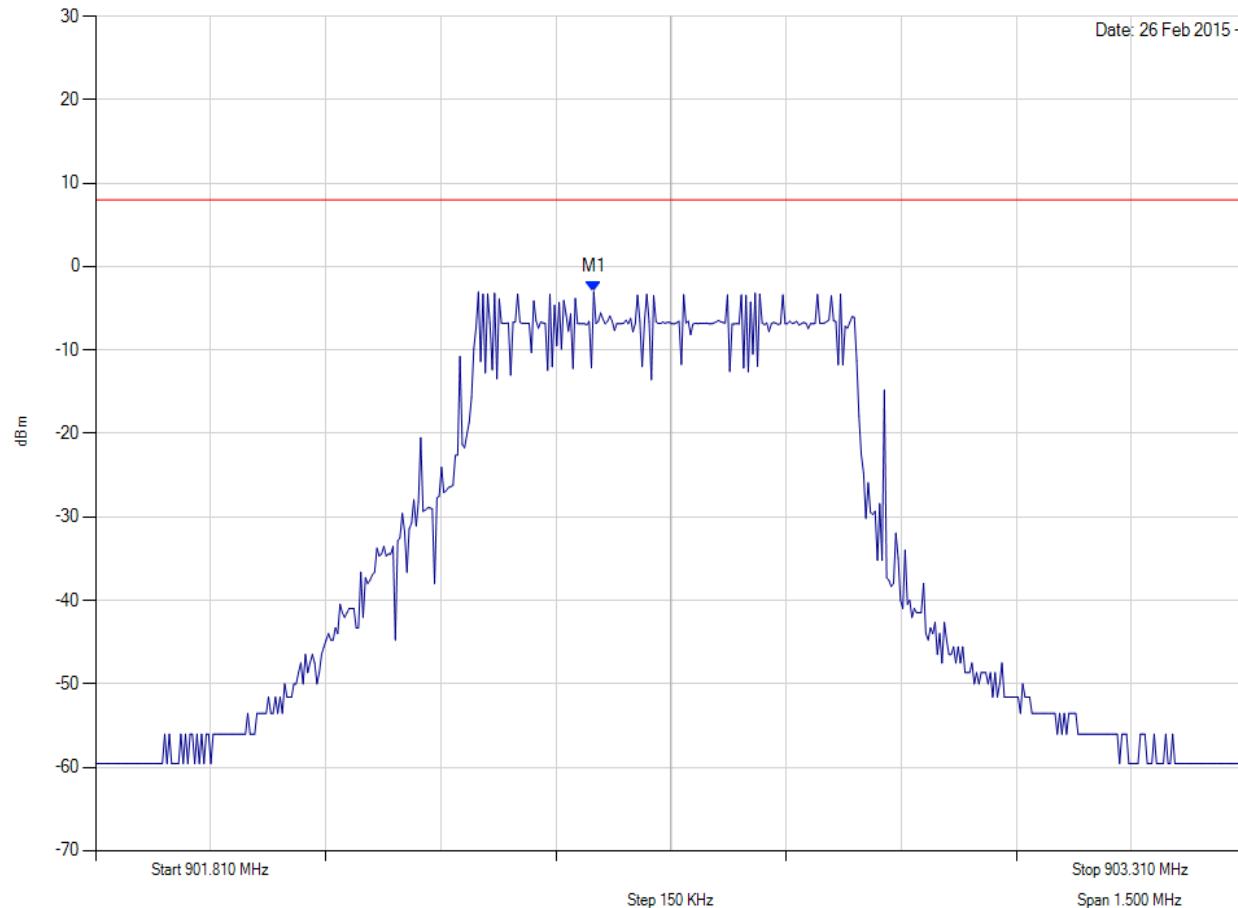

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 902.500 MHz : -3.030 dBm M1 + DCCF : 902.500 MHz : -3.030 dBm Duty Cycle Correction Factor : +0 dB	Limit: ≤ 8.0 dBm Margin: -11.0 dB

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


### POWER SPECTRAL DENSITY - AVERAGE

Variant: 500DSS, Channel: 915.06 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

Ref Level: 30 dBm  
27.5 dB Offset

Sweep Time: 8.4 s

RBW: 3 KHz  
VBW: 10 KHz

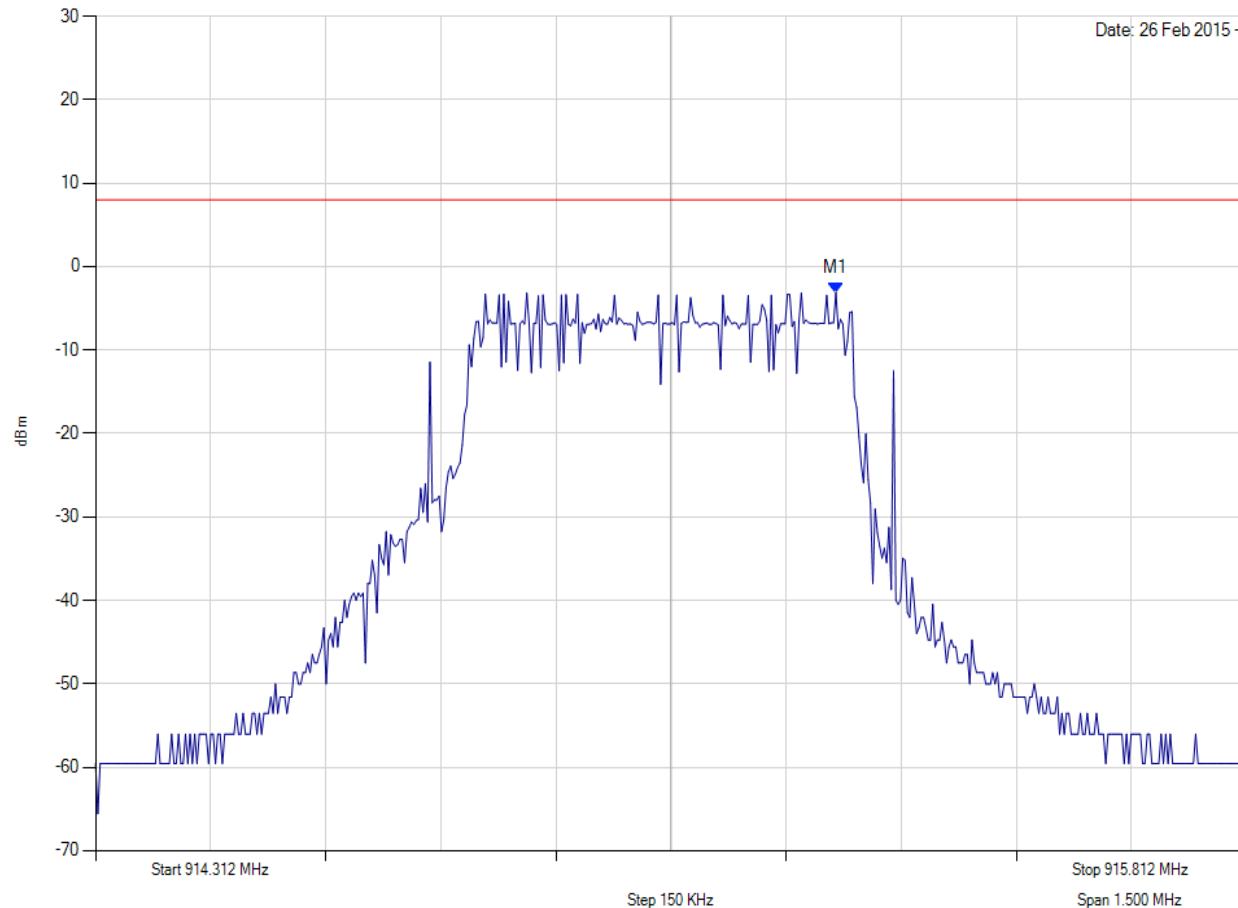

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 915.277 MHz : -3.134 dBm	Limit: ≤ 8.000 dBm

[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

POWER SPECTRAL DENSITY - AVERAGE




Variant: 500DSS, Channel: 915.06 MHz, SUM, Temp: Ambient, Voltage: 3.6 Vdc

Ref Level: 30 dBm  
27.5 dB Offset

Sweep Time: 8.4 s

RBW: 3 KHz  
VBW: 10 KHz

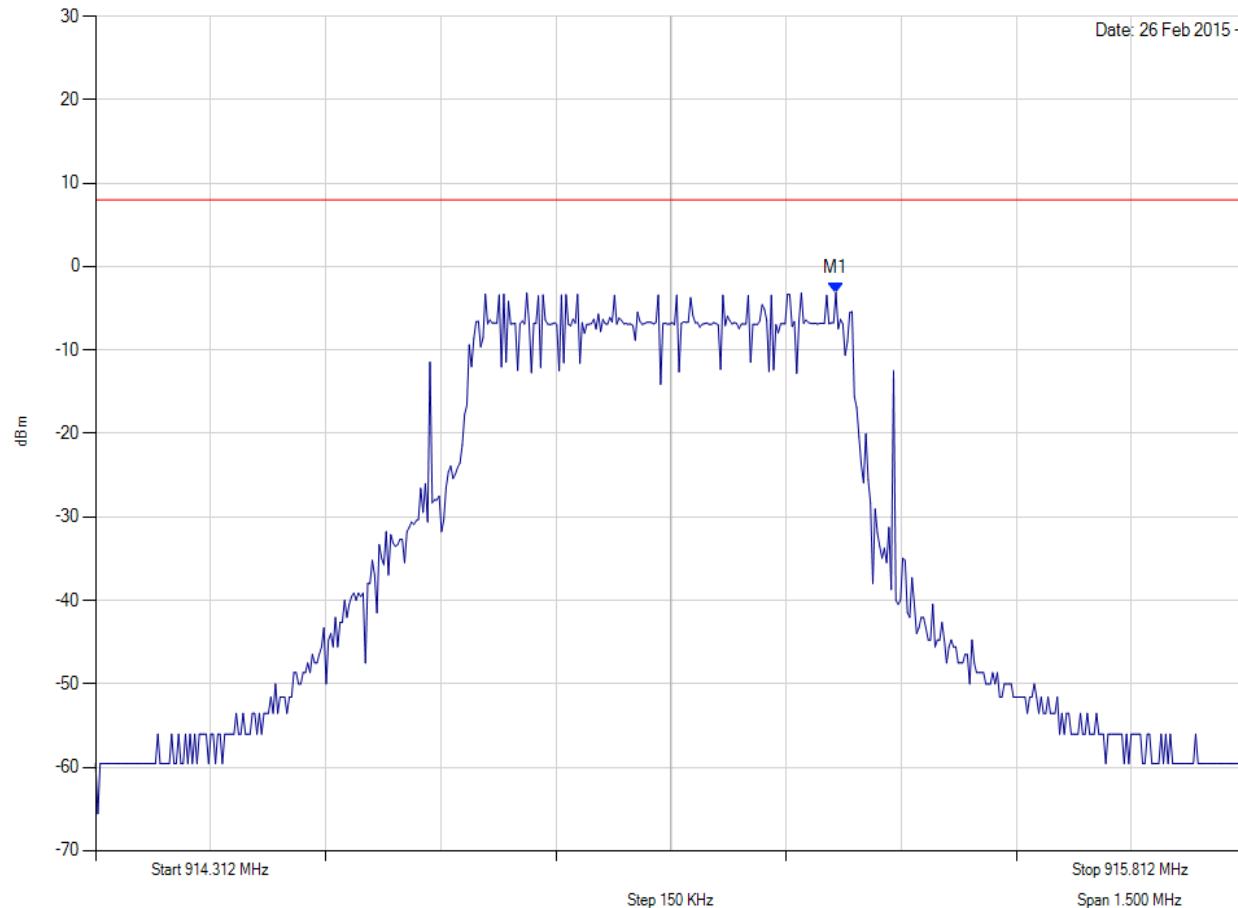


Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 915.300 MHz : -3.134 dBm M1 + DCCF : 915.300 MHz : -3.134 dBm Duty Cycle Correction Factor : +0 dB	Limit: ≤ 8.0 dBm Margin: -11.1 dB

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### POWER SPECTRAL DENSITY - AVERAGE

Variant: 500DSS, Channel: 926.94 MHz, Chain a, Temp: Ambient, Voltage: 3.6 Vdc

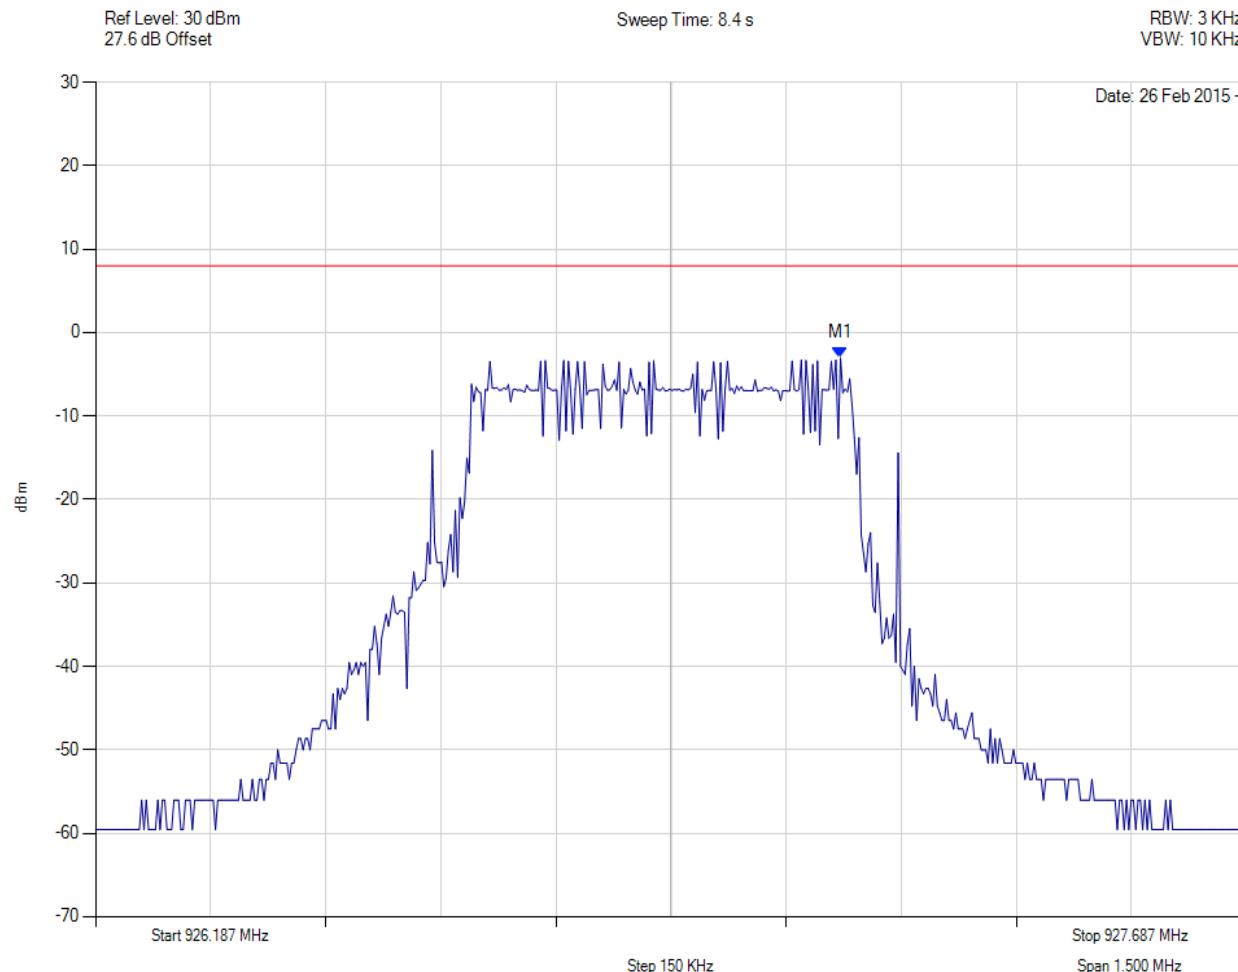

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 927.158 MHz : -3.049 dBm	Limit: ≤ 8.000 dBm


[Back to Matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### POWER SPECTRAL DENSITY - AVERAGE

Variant: 500DSS, Channel: 926.94 MHz, SUM, Temp: Ambient, Voltage: 3.6 Vdc

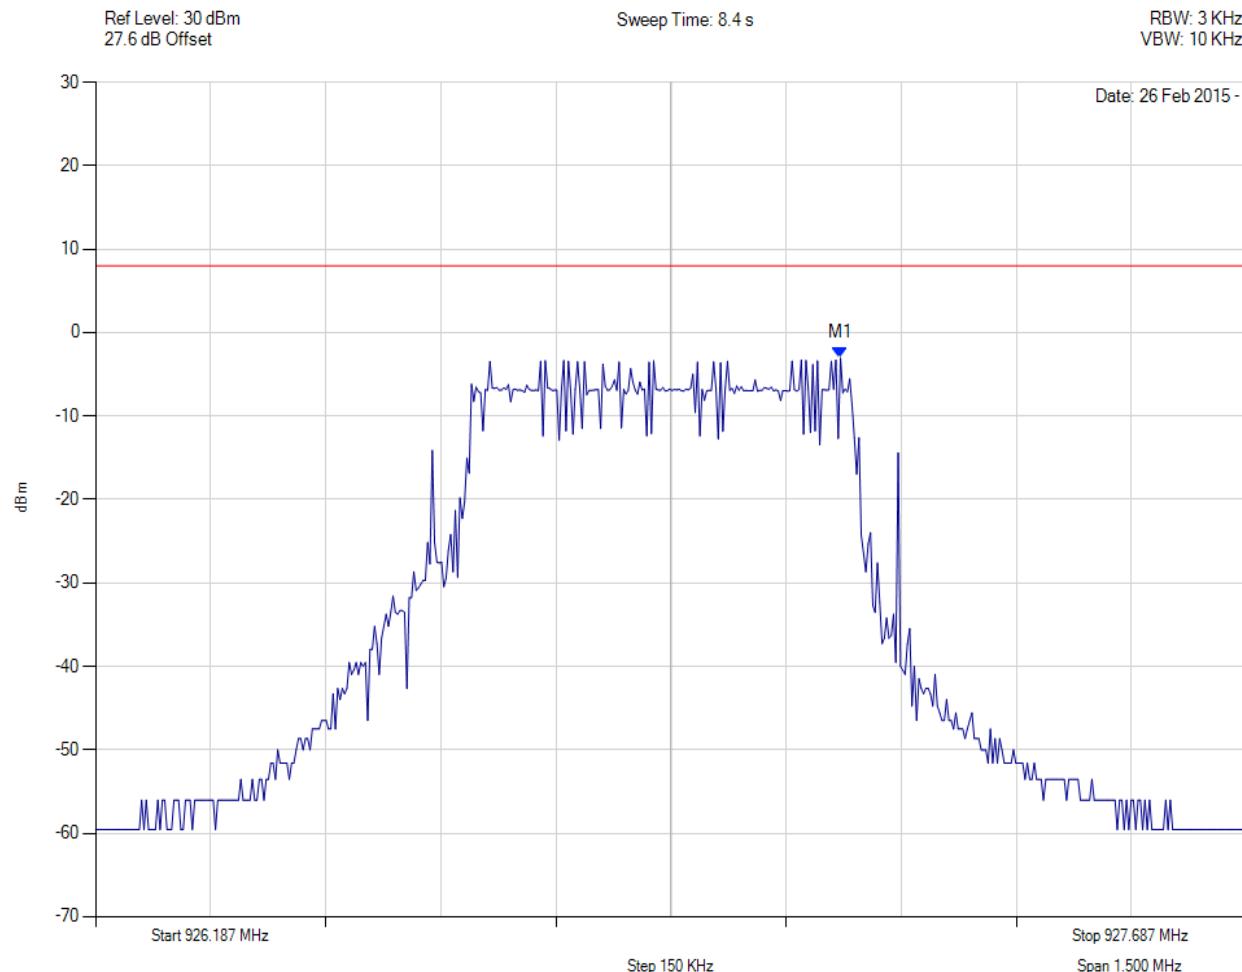

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 927.200 MHz : -3.049 dBm M1 + DCCF : 927.200 MHz : -3.049 dBm Duty Cycle Correction Factor : +0 dB	Limit: ≤ 8.0 dBm Margin: -11.0 dB

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: +1 (925) 462 0304  
Fax: +1 (925) 462 0306  
[www.micomlabs.com](http://www.micomlabs.com)