

TEST REPORT

Product: Tablet PC

Model No.: A1048

Additional Model No.: A7XX, A8XX, A9XX, A10XX, A11XX, A12XX, A13XX

Trade mark:

Report No.: TCT150401E011 Issued Date: Apr. 24, 2015

Issued for:

Azpen Shenzhen MingTel Digital Technology CO., LTD.

2nd F, 9th Building, DeTai Industrial Park, Longhua District, Shenzhen, China

Issued By:

Shenzhen Tongce Testing Lab

1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

TEL: +86-755-27673339 FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab This document may be altered or revised by Shenzhen Tongce Testing Lab personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Hotline: 400-6611-140 Tel: 86-755- 27673339 Fax: 86-755-27673332 http://www.tct-lab.com





TABLE OF CONTENTS

1.	TEST CERTIFICATION	3
2.	TEST RESULT SUMMARY	4
3.	EUT DESCRIPTION	5
4.	TEST METHODOLOGY	6
	4.1. DECISION OF FINAL TEST MODE	
	4.2. EUT SYSTEM OPERATION	6
5.	SETUP OF EQUIPMENT UNDER TEST	7
	5.1. DESCRIPTION OF SUPPORT UNITS	7
	5.2. CONFIGURATION OF SYSTEM UNDER TEST	7
6.	FACILITIES AND ACCREDITATIONS	8
	6.1. FACILITIES	8
	6.2. MEASUREMENT UNCERTAINTY	
7.	EMISSION TEST	9
	7.1. CONDUCTED EMISSION AT MAINS TERMINALS	9
	7.2 RADIATED EMISSION	13



1. Test Certification

Product:	Tablet PC	
Model No.:	A1048	
Additional Model No.:	A7XX, A8XX, A9XX, A10XX, A11XX, A12XX, A13XX	
Applicant:	Azpen Shenzhen MingTel Digital Technology CO., LTD.	
Address:	2nd F, 9th Building, DeTai Industrial Park, Longhua District, Shenzhen,China	
Manufacturer:	Azpen Shenzhen MingTel Digital Technology CO., LTD.	
Address:	2nd F, 9th Building, DeTai Industrial Park, Longhua District, Shenzhen, China	
Test Voltage:	AC 120V/60Hz	
Date of Test:	Apr. 1- Apr. 21, 2015	
Applicable Standards:	47 CFR FCC Part 15 Subpart B: 2014 ANSI C63.4: 2009	

The above equipment has been tested by Shenzhen Tongce Testing Lab and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: Date: Apr. 21, 2015

Beryl Zhaφ

Check By: _____ Date: ____ Apr. 24, 2015

Approved By: Tansin Date: Apr. 24, 2015

Tomsin



2. Test Result Summary

Emission				
Test Method	Item	Result		
FCC 47 CFR Part 15 Subpart B	Conducted Emission at Mains Terminals	Pass		
1 00 47 OF R Fair 10 Gabpair B	Radiated Emission	Pass		

Note:

- 1. Pass: Test item meets the requirement.
- 2. Fail: Test item does not meet the requirement.
- 3. N/A: Test case does not apply to the test object.
- 4. The test result judgment is decided by the limit of test standard.
- 5. The information of measurement uncertainty is available upon the customer's request.



3. EUT Description

Product Name:	Tablet PC		
Model No.:	A1048		
Additional Model No.:	A7XX, A8XX, A9XX, A10XX, A11XX, A12XX, A13XX		
CPU Frequency:	1.3GHz		
Product Parameter:	Rechargeable Li-ion Battery DC3.7V/7000mA Adapter Information: Model: WTA0502000USB1, WTA0502000USB2, FYA05010US, SAPA05010EUU Input: AC 100~240V, 50/60Hz, 0.3A Output: DC 5V/2A		
AC Mains:	☐ Shielded ☐ Unshielded, ☐ Detachable ☐ Un-detachable ☐ No applicable ☐ Length: 1m		
DC Line:	☐Shielded ☐Unshielded, ☐Detachable ☐Un-detachable ☐No applicable ☐Length:		
Control Line:	☐ Shielded ☐ Unshielded, ☐ Detachable ☐ Un-detachable ☐ No applicable ☐ Length:		

Model(s) List

Model	3) =:0:	
No.	Model Number	Tested With
1	A1048	
Other models		
Note1:	A1048 is tested model, other models are derivative mo	dels, The models are

Note1: A1048 is tested model, other models are derivative models, The models are identical in circuit and PCB layout, only different on the model names, So the test data of A1048 can represent the remaining models.

Note 2: WTA0502000USB1 is tested adapter model, other adapter models are identical in circuit and PCB layout, only different on the model names.



4. Test Methodology

4.1. Decision of Final Test Mode

The EUT was tested together with the thereinafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were assessed:

Test Mode

Mode 1: Charging + Playing+ Camera Recording

Mode 2: Data Transmission with PC

The following test mode was found to produce the highest emission level.

The Worst Test Mode			
Emission	Conducted Emission	Mode 2: Data Transmission with PC	
	Radiated Emission	Mode 2: Data Transmission with PC	

4.2. EUT System Operation

- 1. Set up EUT with the support equipments.
- 2. Make sure the EUT work normally during the test.



5. Setup of Equipment under Test

5.1. Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
PC	BM6620	D1PFCG008HP	/	ASUS
Monitor	VX239	VX239H	/	ASUS
Keyboard	PK1100UE	04G104180039DP	/	ASUS
Printer	L11121E	FE2-2902	/	CANON
Mouse	MOBTUO	04G125610170DP	/	ASUS
Earphone	MX80	/	/	Sennheiser

Note:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. Configuration of System Under Test

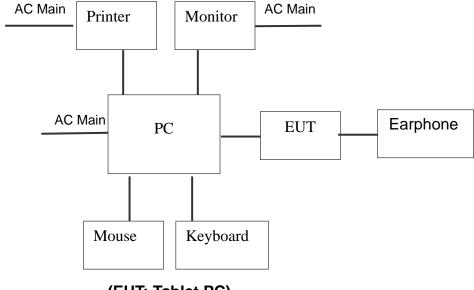

(EUT: Tablet PC)

6. Facilities and Accreditations

6.1. Facilities

All measurement facilities used to collect the measurement data are located at TCT Lab.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	Item	MU
1.	Temperature	±0.1℃
2.	Humidity	±1.0 %
3.	Spurious Emissions, Conducted	$\pm 2.56\mathrm{dB}$
4.	All Emissions, Radiated	\pm 4.28 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.



7. Emission Test

7.1. Conducted Emission at Mains Terminals

7.1.1. Test Specification

Test Requirement:	FCC 47 CFR Part 15 Subpart B
Test Method:	ANSI C63.4:2009
Frequency Range:	150 kHz to 30 MHz

7.1.2. Limits

Frequency	equency Class A dB(uV)		Class	B dB(uV)
(MHz)	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 – 56 ^a	56 – 46 ^a
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50
a Decreases with the logarithm of the frequency				

a. Decreases with the logarithm of the frequency

7.1.3. Test Instruments

Conducted Emission Shielding Room Test Site (843)					
Equipment	Manufacturer	Model	Serial Number	Calibration Due	
EMI Test Receiver	R&S	ESCS30	100139	Sep. 16, 2015	
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 29, 2015	
LISN	AFJ	LS16C	16010947251	Sep. 29, 2015	
Coax cable	TCT	CE-05	N/A	Sep.15, 2015	


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.1.4. Test Method

The AMN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane. This distance was between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the AMN. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on mains lines were made at the output of the AMN



7.1.5. Block Diagram of Test Setup

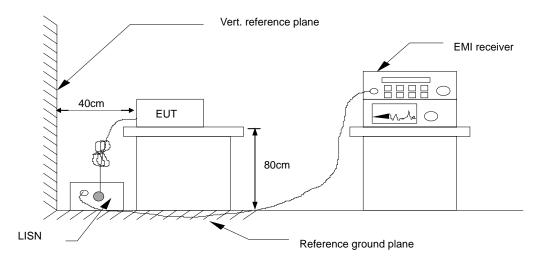

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.6. Test Results

Test Environment:	Temp.: 22 ℃ Humid.: 54 % Press.: 96 kPa		
Test Mode:	Mode 2		
Test Voltage:	AC 120V/60Hz		
Test Result:	Pass		

Note:

L1 = Live Line / N = Neutral Line

"---" denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.

Freq. = Emission frequency in MHz

Reading level $dB(\mu V)$ = Receiver reading

Corr. Factor (dB) = Attenuator factor + Cable loss


Level $dB(\mu V)$ = Reading level $dB(\mu V)$ + Corr. Factor (dB)

Limit $dB(\mu V)$ = Limit stated in standard

Margin (dB) = Level dB(μ V) – Limits dB(μ V)


Q.P. =Quasi-Peak

AVG=Average





Please refer to following diagram for individual

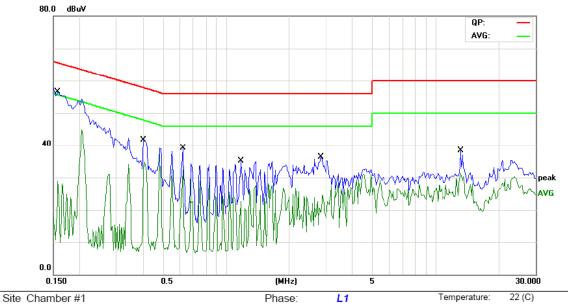

Limit: FCC PART 15 Conduction QP


 Phase:
 L1
 Temperature:
 22 (C

 Power:
 AC 120V/60Hz
 Humidity:
 54 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1578	37.87	11.49	49.36	65.57	-16.21	QP	
2		0.1578	8.07	11.49	19.56	55.57	-36.01	AVG	
3		0.4039	25.38	11.35	36.73	57.77	-21.04	QP	
4		0.4039	10.93	11.35	22.28	47.77	-25.49	AVG	
5		0.6227	26.74	11.25	37.99	56.00	-18.01	QP	
6	*	0.6227	20.54	11.25	31.79	46.00	-14.21	AVG	
7		1.1773	20.89	11.26	32.15	56.00	-23.85	QP	
8		1.1773	13.69	11.26	24.95	46.00	-21.05	AVG	
9		2.8258	9.42	11.39	20.81	56.00	-35.19	QP	
10		2.8258	0.44	11.39	11.83	46.00	-34.17	AVG	
11		13.1875	21.75	11.44	33.19	60.00	-26.81	QP	
12		13.1875	13.28	11.44	24.72	50.00	-25.28	AVG	





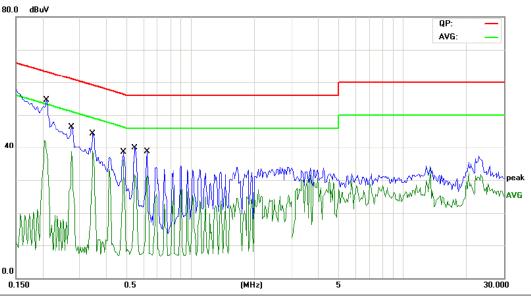

Site Chamber #1 Phase: N Temperature: 22 (C)
Limit: FCC PART 15 Conduction QP Power: AC 120V/60Hz Humidity: 54 %

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.2086	39.59	11.48	51.07	63.26	-12.19	QP	
2 *	0.2086	30.47	11.48	41.95	53.26	-11.31	AVG	
3	0.2750	30.17	11.44	41.61	60.96	-19.35	QP	
4	0.2750	22.14	11.44	33.58	50.96	-17.38	AVG	
5	0.3453	27.37	11.41	38.78	59.07	-20.29	QP	
6	0.3453	18.93	11.41	30.34	49.07	-18.73	AVG	
7	0.4820	24.86	11.32	36.18	56.30	-20.12	QP	
8	0.4820	20.23	11.32	31.55	46.30	-14.75	AVG	
9	0.5445	26.46	11.29	37.75	56.00	-18.25	QP	
10	0.5445	18.06	11.29	29.35	46.00	-16.65	AVG	
11	0.6227	26.48	11.25	37.73	56.00	-18.27	QP	
12	0.6227	20.65	11.25	31.90	46.00	-14.10	AVG	



7.2. Radiated Emission

7.2.1. Test Specification

Test Requirement:	FCC 47 CFR Part 15 Subpart B					
Test Method:	ANSI C63.4:2009					
Frequency Range:	30 MHz to 6500 MHz					
Measurement Distance:	3 m					
Antenna Polarization:	Horizontal & Vertical					

7.2.2. Limits

Fraguency (MU=)	Class A (at 3m)	Class B (at 3m)		
Frequency (MHz)	dBuV/m	dBuV/m		
30 ~ 88	49.0	40.0		
88 ~ 216	53.5	43.5		
216 ~ 960	56.4	46.0		
960 ~ 1000	59.5	54.0		

Fraguency (MHz)	Peak (at 3m)	Average (at 3m)
Frequency (MHz)	dBuV/m	dBuV/m
Above1000	74.0	54.0

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $dB(\mu V/m) = 20 \log Emission level (\mu V/m)$.

7.2.3. Test Instruments

	Radiated Em	ission Test Site	e (966)		
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due	
EMI Test Receiver	R&S	ESVD	100008	Sep. 16, 2015	
Spectrum Analyzer	R&S	FSEM	848597-001	Sep. 16, 2015	
Amplifier	HP	8447D	2727A05017	Sep. 16, 2015	
Amplifier	EM	EM30265	07032613	Sep. 16, 2015	
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 17, 2015	

Page 13 of 19

Hotline: 400-6611-140 Tel: 86-755- 27673339 Fax: 86-755-27673332 http://www.tct-lab.com




Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 17, 2015
Antenna Mater	ccs	CC-A-4M	N/A	Sep.15 , 2015
Coax cable	TCT	RE-low-01	N/A	Sep.15 , 2015
Coax cable	ТСТ	RE-high-02	N/A	Sep.15 , 2015
Coax cable	тст	RE-low-03	N/A	Sep.15 , 2015
Coax cable	TCT	RE-high-04	N/A	Sep.15 , 2015

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.2.4. Test Method


Measurements were made in a 3-meter semi-anechoic chamber or Open Area Test Site that complies to CISPR 16. Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3 meter. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (quasi-peak) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity where applicable. Block Diagram of Test Setup.

7.2.5. Block Diagram of Test Settip ble & Turntable

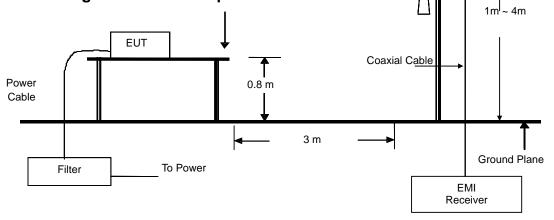

(30MHz to 1GHz)



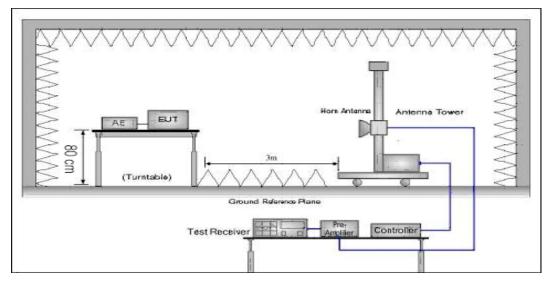

(Above 1GHz)

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

7.2.6. Test Results

Test Environment:	Temp.:	23 ℃	Humid.:	53%	Press.:	96 kPa
Test Mode:	Mode 2					
Test Voltage:	AC 120V/	/60Hz				
Test Result:	Pass					
Remark:	The CPU is up to 6.	•	cy of the EU	Γ is 1.3G	Hz, So the te	st frequency

Note:

Freq. = Emission frequency in MHz

Reading level $dB(\mu V)$ = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement $dB(\mu V/m) = Reading level dB(\mu V) + Corr. Factor (dB)$

Limit $dB(\mu V/m) = Limit$ stated in standard


Margin (dB) = Measurement dB(μ V/m) – Limits dB(μ V/m)

Q.P. =Quasi-Peak





Please refer to following diagram for individual

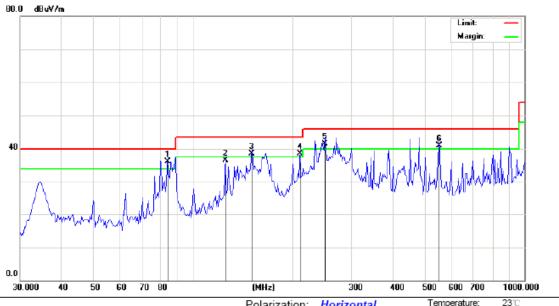

Limit: FCC Part 15B Class B RE_3 m


Polarization: Horizontal

Temperature:

Power: AC 120V/60Hz Humidity: 53 %

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∀	dB	dBu∀/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	83.6937	51.27	-15.10	36.17	40.00	-3.83	QP		0	
2		124.9248	50.78	-14.33	36.45	43.50	-7.05	QP		0	
3	İ	149.9676	53.71	-15.16	38.55	43.50	-4.95	QP		0	
4	ļ	210.1294	49.85	-11.33	38.52	43.50	-4.98	QP		0	
5	İ	250.4858	51.40	-9.94	41.46	46.00	-4.54	QP		0	
6	ļ	554.1707	43.37	-2.41	40.96	46.00	-5.04	QP		0	



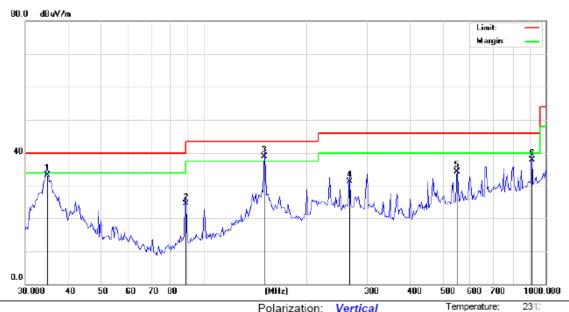

Limit: FCC Part 15B Class B RE_3 m

Site

Polarization: Vertical Power: AC 120V/60Hz


Humidity:

53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∀	dB	dBu∀/m	dBu∀/m	dB	Detector	cm	degree	Comment
1		34.7704	46.40	-13.13	33.27	40.00	-6.73	QP		0	
2		88.5336	37.95	-13.47	24.48	43.50	-19.02	QP		0	
3	*	149.9676	54.15	-15.16	38.99	43.50	-4.51	QP		0	
4		266.8394	40.60	-9.38	31.22	46.00	-14.78	QP		0	
5		550.2902	36.80	-2.45	34.35	46.00	-11.65	QP		0	
6		912.6951	34.73	3.10	37.83	46.00	-8.17	QP		0	





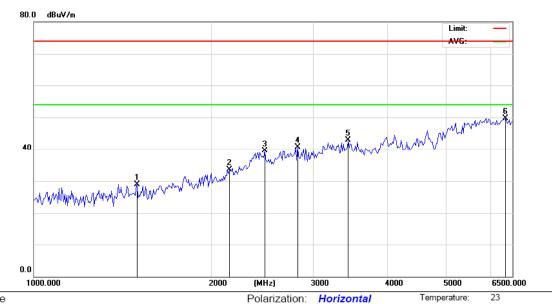


Limit: FCC Part 15B Class B RE_3 m Above 1G Power: AC 120V/60Hz Humidity: 53 %

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		1499.482	29.00	0.00	29.00	74.00	-45.00	peak		0	
2		2149.479	33.60	0.00	33.60	74.00	-40.40	peak		0	
3		2469.502	39.59	0.00	39.59	74.00	-34.41	peak		0	
4		2805.423	40.69	0.00	40.69	74.00	-33.31	peak		0	
5		3422.472	42.89	0.00	42.89	74.00	-31.11	peak		0	
6	*	6331.546	49.75	0.00	49.75	74.00	-24.25	peak		0	





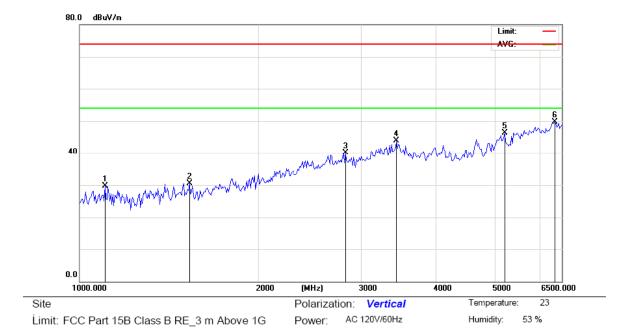

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	1	102.443	29.75	0.00	29.75	74.00	-44.25	peak		0	
2	1	1533.612	30.53	0.00	30.53	74.00	-43.47	peak		0	
3	2	2805.423	40.19	0.00	40.19	74.00	-33.81	peak		0	
4	3	3422.472	43.90	0.00	43.90	74.00	-30.10	peak		0	
5	5	5209.516	46.28	0.00	46.28	74.00	-27.72	peak		0	
6	* 6	331.546	49.75	0.00	49.75	74.00	-24.25	peak		0	

*****END OF REPORT****