



## Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640  
Fax: +86-755-26648637  
Website: [www.cqa-cert.com](http://www.cqa-cert.com)

Report Template Version: V03  
Report Template Revision Date: Mar.1st, 2017

# Test Report

**Report No. :** CQASZ20190200042E-01  
**Applicant:** Azpen Shenzhen MingTel Digital Technology CO., LTD.  
**Address of Applicant:** 2nd F, 9th Building, DeTai Industrial Park, Longhua District, Shenzhen, China  
**Manufacturer:** Azpen Shenzhen MingTel Digital Technology CO., LTD.  
**Address of Manufacturer:** 2nd F, 9th Building, DeTai Industrial Park, Longhua District, Shenzhen, China  
**Equipment Under Test (EUT):**  
**Product:** 10.1"Quad Core Dual SIM 4G Calling Tablet  
**All Model No.:** G1058A, G1058, G1058B, G1058H, G1058S, G7XX, G8XX, G9XX, G10XX, A7XX, A8XX, A9XX, A10XX (X represents 0 to 9,A to Z Blank)  
**Test Model No.:** G1058A  
**Brand Name:** N/A  
**FCC ID:** 2AEHNG1058  
**Standards:** 47 CFR PART 15, Subpart B  
**Date of Test:** 2019-03-04 to 2019-06-04  
**Date of Issue:** 2019-06-04  
**Test Result :** PASS\*

Tested By:

(Daisy Qin)

Reviewed By:

(Aaron Ma)

Approved By:

(Jack Ai)



\* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.



Shenzhen Huaxia Testing Technology Co., Ltd

Report No.: CQASZ20190200042E-01

### Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20190200042E-01	Rev.01	Initial report	2019-06-04

## 1 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 25GHz)	47 CFR PART 15,Subpart B	ANSI C63.4:2014	Class B	PASS
Conducted Emission (150kHz to 30MHz)	47 CFR PART 15,Subpart B	ANSI C63.4:2014	Class B	PASS

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement Range (MHz)
Below 1.705	30
1.705 to 108	1000
108 to 500	2000
500 to 1000	5000
Above 1000	5th harmonic of the highest frequency or 40GHz, whichever is lower

Note:

All model: G1058A, G1058, G1058B, G1058H, G1058S, G7XX, G8XX, G9XX, G10XX, A7XX, A8XX, A9XX, A10XX (X represents 0 to 9,A to Z Blank)

Only the model G1058A was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance and model name.

The highest frequency of the internal sources of the EUT is 2480 MHz.

## 2 Contents

	Page
<b>1 TEST SUMMARY .....</b>	<b>3</b>
<b>2 CONTENTS .....</b>	<b>4</b>
<b>3 GENERAL INFORMATION .....</b>	<b>5</b>
3.1 DETAILS OF E.U.T .....	5
3.2 DESCRIPTION OF SUPPORT UNITS .....	5
3.3 MEASUREMENT UNCERTAINTY .....	6
3.4 TEST LOCATION .....	7
3.5 TEST FACILITY .....	7
<b>4 EQUIPMENT LIST .....</b>	<b>8</b>
<b>5 TEST RESULTS .....</b>	<b>9</b>
5.1 CONDUCTED EMISSIONS MAINS TERMINALS, 150KHZ TO 30MHZ .....	9
5.1.1 <i>E.U.T. Operation</i> .....	10
5.1.2 <i>Measurement Data</i> .....	11
5.2 RADIATED EMISSIONS, 30MHZ TO 25GHZ .....	13
5.2.1 <i>E.U.T. Operation</i> .....	13
5.2.2 <i>Measurement Data</i> .....	14
<b>6 PHOTOGRAPHS .....</b>	<b>18</b>
6.1 CONDUCTED EMISSION TEST SETUP .....	18
6.2 RADIATED EMISSION TEST SETUP .....	18
6.3 EUT CONSTRUCTIONAL DETAILS .....	20

### 3 General Information

#### 3.1 Details of E.U.T.

Power Supply: Adapter:  
Model: K-T100502000U  
Input: AC100-240V 50/60Hz 0.35A(Max)  
Output: DC5V 2000mA  
lithium battery: DC3.7V 6000mA

#### 3.2 Description of Support Units

The EUT has been tested with associated equipment below.

1) support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
PC	Lenovo	ThinkPad E450c	FCC ID and DOC	CQA
Adapter	Lenovo	ADLX65NLC3A	DOC	CQA
Adapter	BESTGK	K-T100502000U	DOC	Client

2) cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
1	USB cable	MingTel	With the shield cable for 100cm	Client
2	AC cable	Lenovo	Unshielded cable for 80cm	CQA

### 3.3 Measurement Uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for **CQA** laboratory is reported:

Test	Range	Uncertainty	Notes
Radiated Emission	Below 1GHz	±5.12dB	(1)
Radiated Emission	Above 1GHz	±4.60dB	(1)
Conducted Disturbance	0.15~30MHz	±3.34dB	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### **3.4 Test Location**

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

### **3.5 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- ISED Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

## 4 Equipment List


<b>Radiated Emission</b>						
Item	Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
1	Loop antenna	SCHWARZBECK	FMZB 1516	CQA-060	2018/9/26	2020/9/25
2	Horn Antenna	R&S	BBHA 9170	CQA-088	2018/9/26	2020/9/25
3	Horn Antenna	R&S	HF906	CQA-012	2018/9/26	2020/9/25
4	Bilog Antenna	R&S	HL562	CQA-011	2018/9/26	2020/9/25
5	EMI Test Receiver	R&S	ESR7	CQA-005	2018/10/28	2019/10/27
6	Spectrum analyzer	R&S	FSU26	CQA-038	2018/10/28	2019/10/27
7	Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2018/9/26	2019/9/25
8	Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2018/11/2	2019/11/1
9	Coaxial cable (1GHz~40GHz)	CQA	N/A	C019	2018/9/26	2019/9/25
10	Coaxial cable (9KHz~1GHz)	CQA	N/A	C020	2018/9/26	2019/9/25

<b>Conducted Emission</b>						
Item	Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
1	EMI Test Receiver	R&S	ESPI3	CQA-013	2018/9/26	2019/9/25
2	LISN	R&S	ENV216	CQA-003	2018/11/5	2019/11/4
3	Coaxial cable (9KHz~300MHz)	CQA	N/A	C009	2018/9/26	2019/9/25

## 5 Test Results

## 5.1 Conducted Emissions Mains Terminals, 150kHz to 30MHz

Test Requirement: 47 CFR PART 15,Subpart B  
Test Method: ANSI C63.4  
Frequency Range: 150kHz to 30MHz  
Class / Severity: Class B  
Limit:  
0.15M-0.5MHz 66dB(dB $\mu$ V)-56dB(dB $\mu$ V) quasi-peak, 56dB(dB $\mu$ V)-46dB(dB $\mu$ V) average  
0.5M-5MHz 56dB(dB $\mu$ V) quasi-peak, 46dB(dB $\mu$ V) average  
5M-30MHz 60dB(dB $\mu$ V) quasi-peak, 50dB(dB $\mu$ V) average  
Test Setup: 

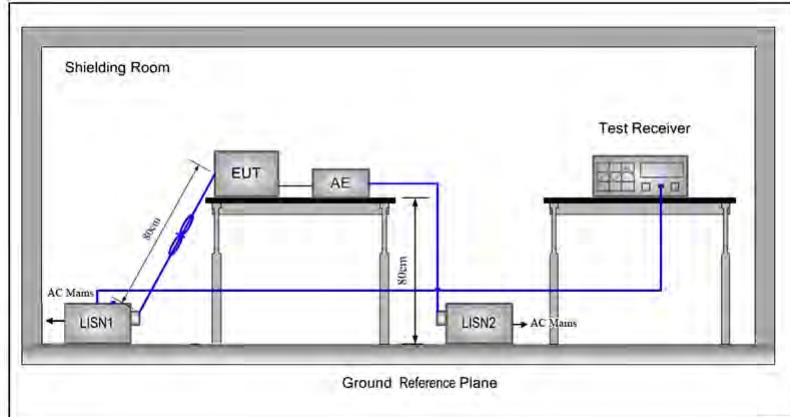

### Test Procedure:

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

### Detector:

### Peak for pre-scan (9kHz Resolution Bandwidth)

Quasi-Peak if maximised peak within 6dB of Quasi-Peak limit

### 5.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.0 °C      Humidity: 55 % RH      Atmospheric Pressure: 1015 mbar

EUT Operation: Mode a: Adapter+GPS+WIFI+ GSM850 (Traffic)

Mode b: Adapter+GPS+Camera+ GSM1900 (Traffic)

Mode c: Adapter+GPS+MP4+ WCDMA Band 5(Traffic)

Mode d: Adapter+GPS+BT+ LTE Band 5(Traffic)

Mode e: Adapter+GPS+WIFI+ Telecom Idle


Test Status: Pretest the EUT at different test mode and found the Mode a which is worst case, the test worst case mode is recorded in the report.

### 5.1.2 Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line

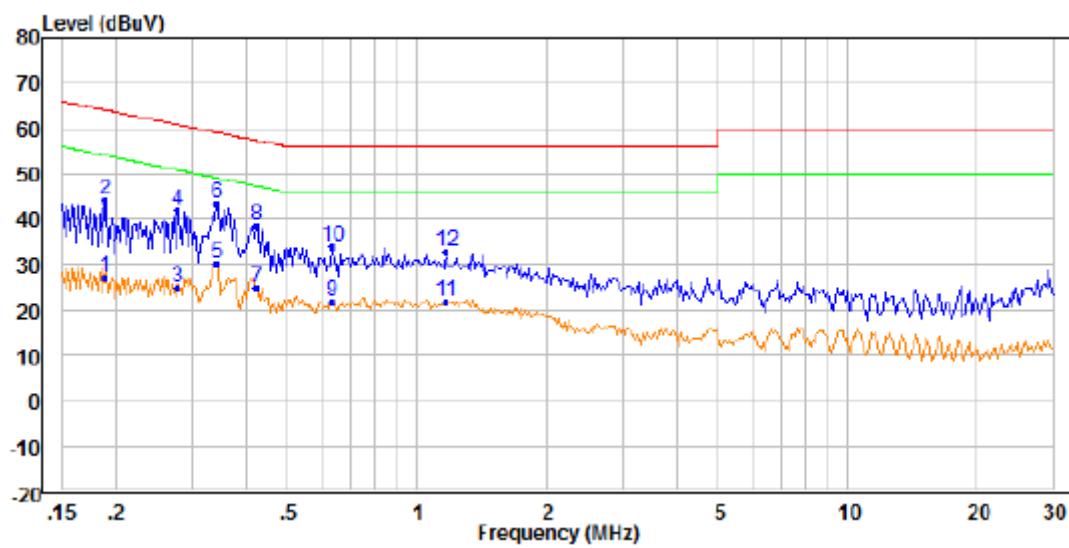

Freq	Read		Limit	Over	Remark	Pol/Phase	
	Freq	Level					
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.189	17.57	9.49	27.06	54.10	-27.04	Average Line
2	0.189	34.85	9.49	44.34	64.10	-19.76	Peak Line
3	0.278	15.22	9.49	24.71	50.88	-26.17	Average Line
4	0.278	32.43	9.49	41.92	60.88	-18.96	Peak Line
5	AV	20.66	9.50	30.16	49.15	-18.99	Average Line
6	PP	34.18	9.50	43.68	59.15	-15.47	Peak Line
7	0.422	15.51	9.51	25.02	47.41	-22.39	Average Line
8	0.422	29.18	9.51	38.69	57.41	-18.72	Peak Line
9	0.634	12.22	9.76	21.98	46.00	-24.02	Average Line
10	0.634	24.14	9.76	33.90	56.00	-22.10	Peak Line
11	1.163	12.23	9.53	21.76	46.00	-24.24	Average Line
12	1.163	23.14	9.53	32.67	56.00	-23.33	Peak Line

Neutral line

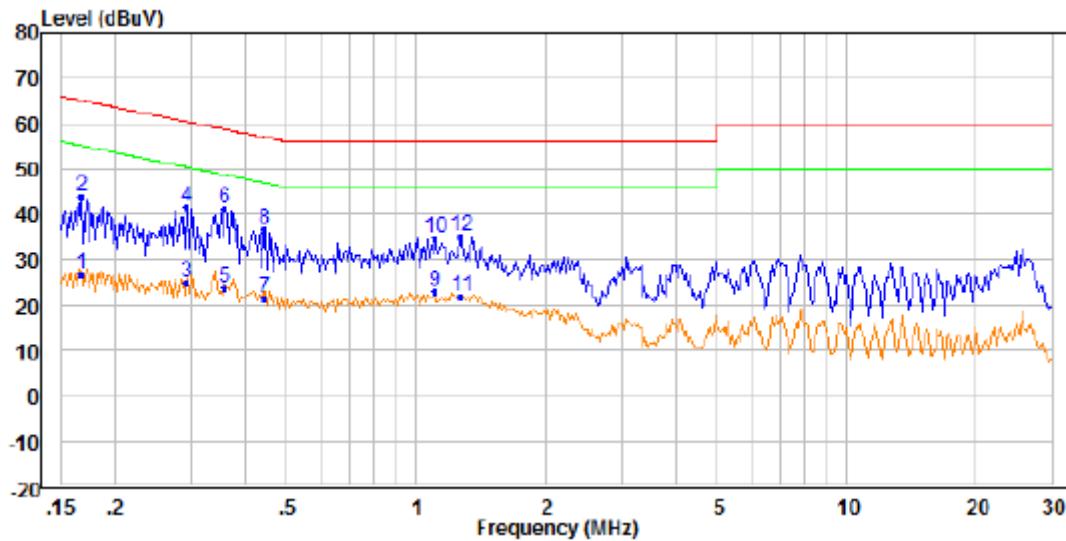

	Read		Limit		Over		Pol/Phase	
	Freq	Level	Factor	Level	Line	Limit	Remark	
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.167	17.24	9.48	26.72	55.09	-28.37	Average	Neutral
2	0.167	34.23	9.48	43.71	65.09	-21.38	Peak	Neutral
3	0.292	15.29	9.48	24.77	50.47	-25.70	Average	Neutral
4	0.292	32.04	9.48	41.52	60.47	-18.95	Peak	Neutral
5	0.360	14.37	9.52	23.89	48.73	-24.84	Average	Neutral
6 PP	0.360	31.75	9.52	41.27	58.73	-17.46	Peak	Neutral
7	0.443	11.98	9.56	21.54	47.00	-25.46	Average	Neutral
8	0.443	27.04	9.56	36.60	57.00	-20.40	Peak	Neutral
9 AV	1.106	13.30	9.72	23.02	46.00	-22.98	Average	Neutral
10	1.106	25.18	9.72	34.90	56.00	-21.10	Peak	Neutral
11	1.271	12.01	9.71	21.72	46.00	-24.28	Average	Neutral
12	1.271	25.31	9.71	35.02	56.00	-20.98	Peak	Neutral

**Remark:**

1. The following Peak, Quasi-Peak and Average measurements were performed on the EUT:
2. Correct Factor= LISN Factor + Cable Loss
3. Final Test Level =Receiver Reading + Correct Factor.
4. Over Limit= Final Test Level - Limit

## 5.2 Radiated Emissions, 30MHz to 25GHz

Test Requirement:	47 CFR PART 15,Subpart B
Test Method:	ANSI C63.4
Frequency Range:	30MHz to 25GHz
Measurement Distance:	3m
Class:	Class B
Limit:	40.0 dB $\mu$ V/m between 30MHz & 88MHz 43.5 dB $\mu$ V/m between 88MHz & 216MHz 46.0 dB $\mu$ V/m between 216MHz & 960MHz /54.0 dB $\mu$ V/m above 960MHz
The highest frequency:	74 dB $\mu$ V/m above 960MHz for peak 54 dB $\mu$ V/m above 960MHz for average

Test Setup:

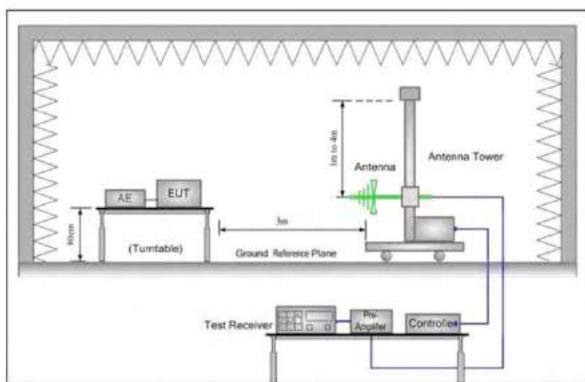


Figure 1. 30MHz to 1GHz

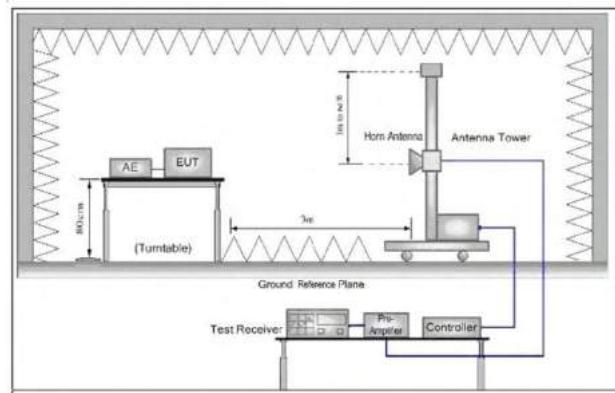


Figure 2. Above 1 GHz

Test Procedure:

- 1) The radiated emissions were tested in a semi-anechoic chamber.
- 2) The EUT is placed on a turntable, which is 0.8m above ground plane.
- 3) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 4) EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
- 5) Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6) And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7) Repeat above procedures until the measurements for all frequencies are complete.

Detector:

Peak for pre-scan (120kHz resolution bandwidth)

Quasi-Peak if maximised peak within 6dB of limit

### 5.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22.0 °C      Humidity: 54% RH      Atmospheric Pressure: 1015 mbar

EUT Operation: Mode a: Adapter+GPS+WIFI+ GSM850 (Traffic)

Mode b: Adapter+GPS+Camera+ GSM1900 (Traffic)

Mode c: Adapter+GPS+MP4+ WCDMA Band 5(Traffic)

Mode d: Adapter+GPS+BT+ LTE Band 5(Traffic)


Mode e: Adapter+GPS+WIFI+ Telecom Idle

Mode f: EUT exchange data with USB of PC.

Test Status: Pretest the EUT at different test mode and found the Mode f which is worst case, the test worst case mode is recorded in the report.

### 5.2.2 Measurement Data

Vertical

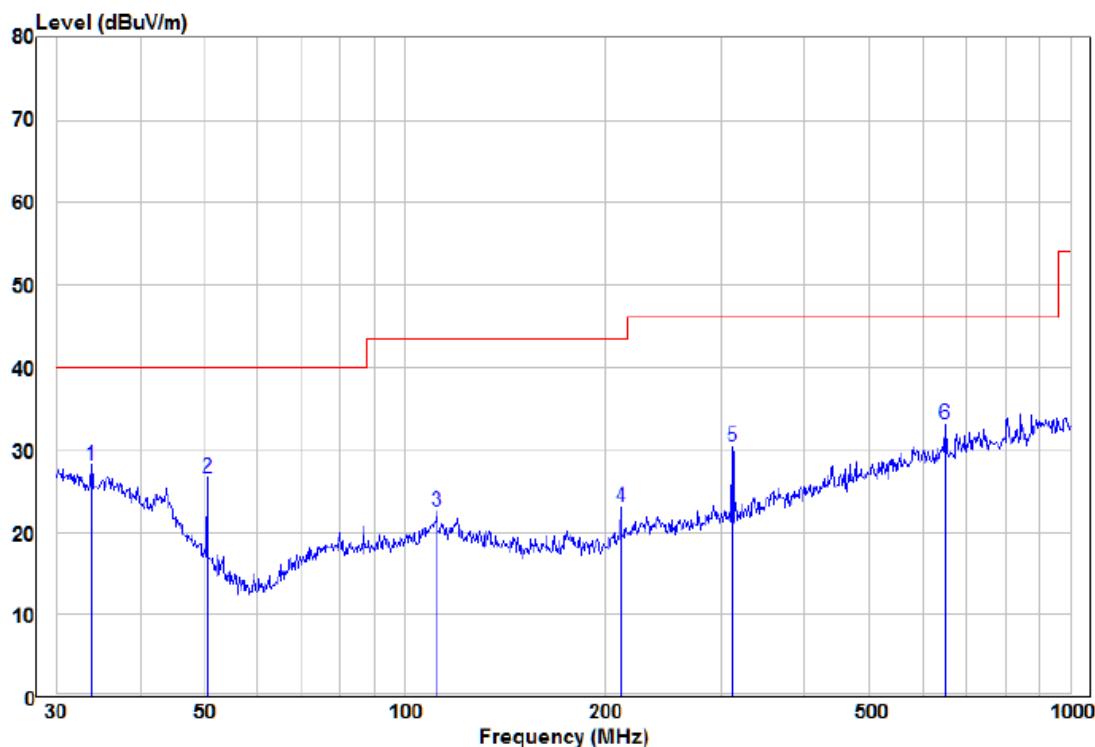

Freq	Read		Limit		Over		Pol/Phase
	Freq	Level	Factor	Level	Line	Limit	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 pp	33.80	11.09	17.04	28.13	40.00	-11.87	Peak VERTICAL
2	50.59	17.83	8.85	26.68	40.00	-13.32	Peak VERTICAL
3	111.74	12.30	10.27	22.57	43.50	-20.93	Peak VERTICAL
4	211.53	14.25	8.86	23.11	43.50	-20.39	Peak VERTICAL
5	311.09	18.43	12.00	30.43	46.00	-15.57	Peak VERTICAL
6	649.66	13.88	19.17	33.05	46.00	-12.95	Peak VERTICAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic


equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Horizontal

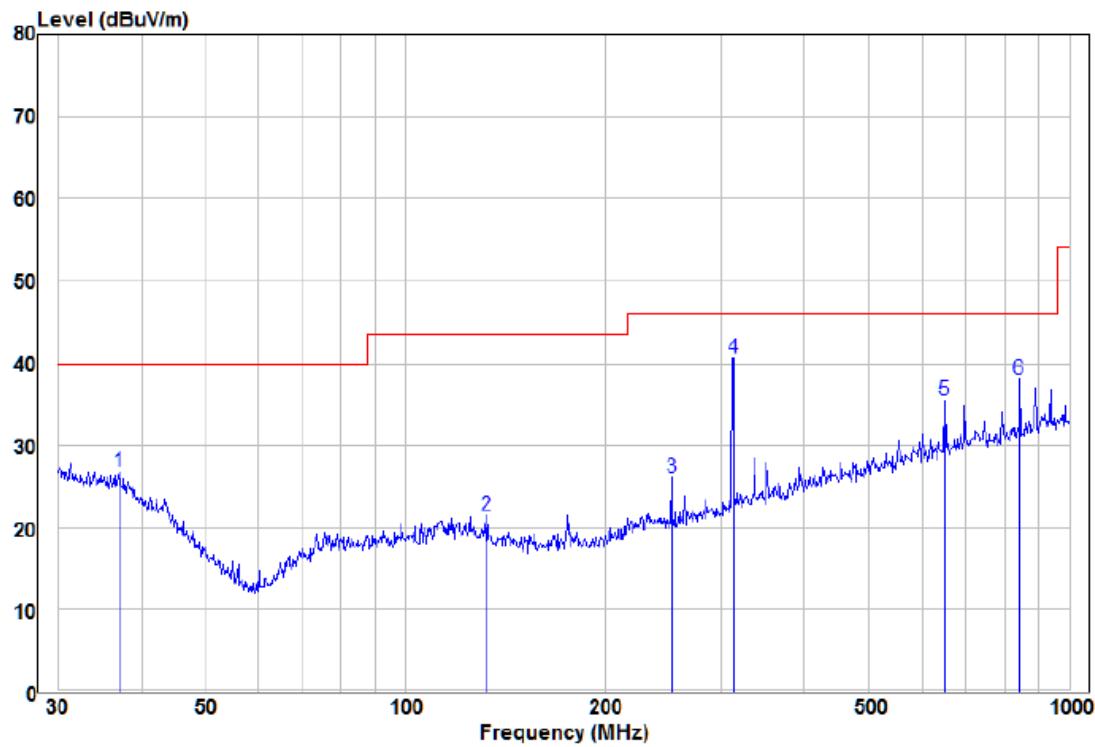

Freq	Read		Limit	Over	Pol/Phase		
	Level	Factor					
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	37.15	9.82	16.98	26.80	40.00	-13.20	Peak HORIZONTAL
2	132.69	11.08	10.43	21.51	43.50	-21.99	Peak HORIZONTAL
3	252.06	14.35	11.83	26.18	46.00	-19.82	Peak HORIZONTAL
4 pp	312.18	26.89	13.75	40.64	46.00	-5.36	Peak HORIZONTAL
5	649.66	15.42	20.12	35.54	46.00	-10.46	Peak HORIZONTAL
6	842.13	15.64	22.35	37.99	46.00	-8.01	Peak HORIZONTAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic


equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,


Over Limit=Level-Limit Line.

Vertical

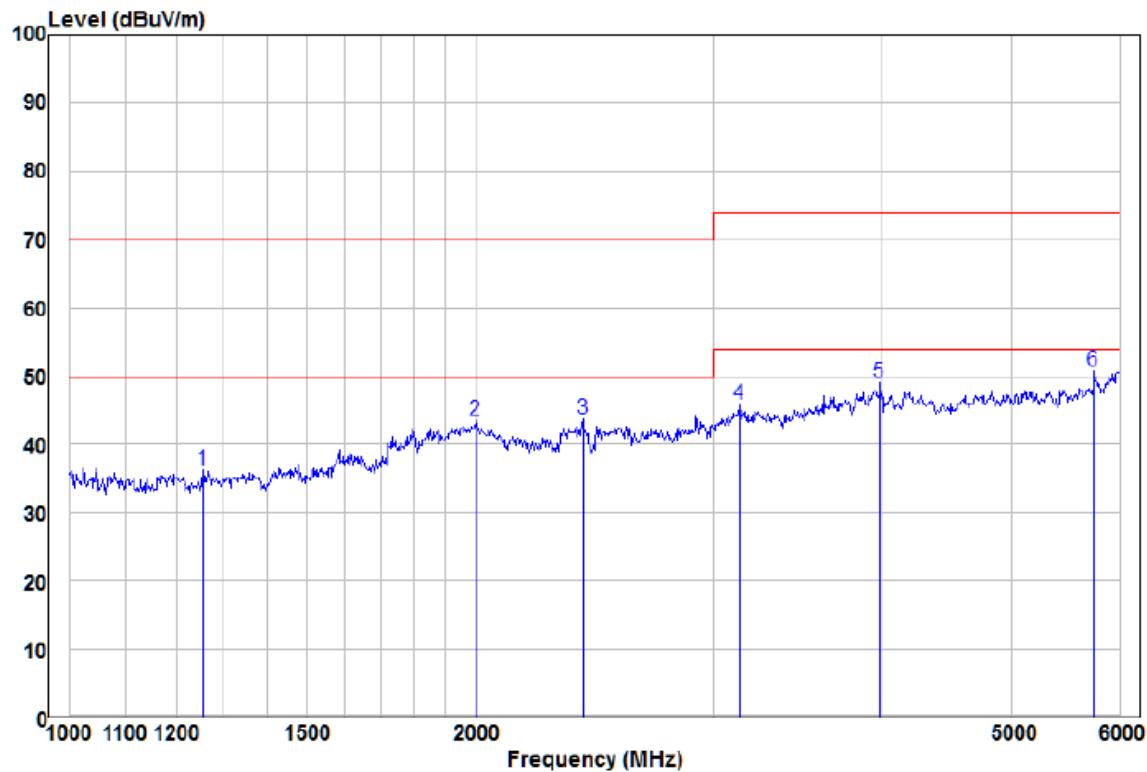

Freq	Read			Limit Line	Over Limit	Remark	Pol/Phase
	Level	Factor	Level				
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	1255.53	51.34	-15.07	36.27	70.00	-33.73	Peak VERTICAL
2	2000.53	50.98	-7.43	43.55	70.00	-26.45	Peak VERTICAL
3	2401.69	52.75	-9.13	43.62	70.00	-26.38	Peak VERTICAL
4	3136.61	51.20	-5.42	45.78	74.00	-28.22	Peak VERTICAL
5	3987.79	50.83	-1.74	49.09	74.00	-24.91	Peak VERTICAL
6 pp	5747.46	47.85	2.87	50.72	74.00	-23.28	Peak VERTICAL

Horizontal

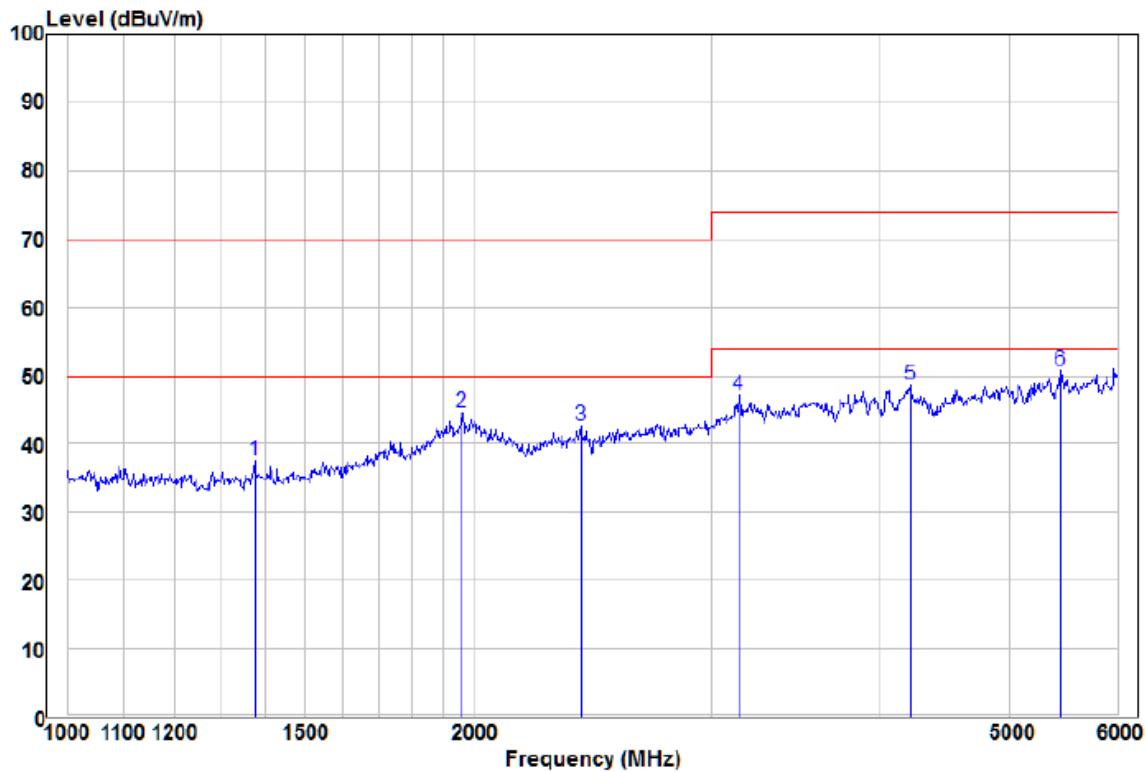

Freq	Read		Limit	Over	Remark	Pol/Phase	
	Level	Factor					
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	1375.66	51.99	-14.44	37.55	70.00	-32.45	Peak HORIZONTAL
2	1957.97	52.55	-7.88	44.67	70.00	-25.33	Peak HORIZONTAL
3	2401.69	51.88	-9.13	42.75	70.00	-27.25	Peak HORIZONTAL
4	3142.24	52.56	-5.35	47.21	74.00	-26.79	Peak HORIZONTAL
5	4215.56	50.35	-1.83	48.52	74.00	-25.48	Peak HORIZONTAL
6 pp	5456.44	49.24	1.60	50.84	74.00	-23.16	Peak HORIZONTAL

Remark:


1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 1GHz to 25GHz, the disturbance above 6GHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

## 6 Photographs


### 6.1 Conducted Emission Test Setup

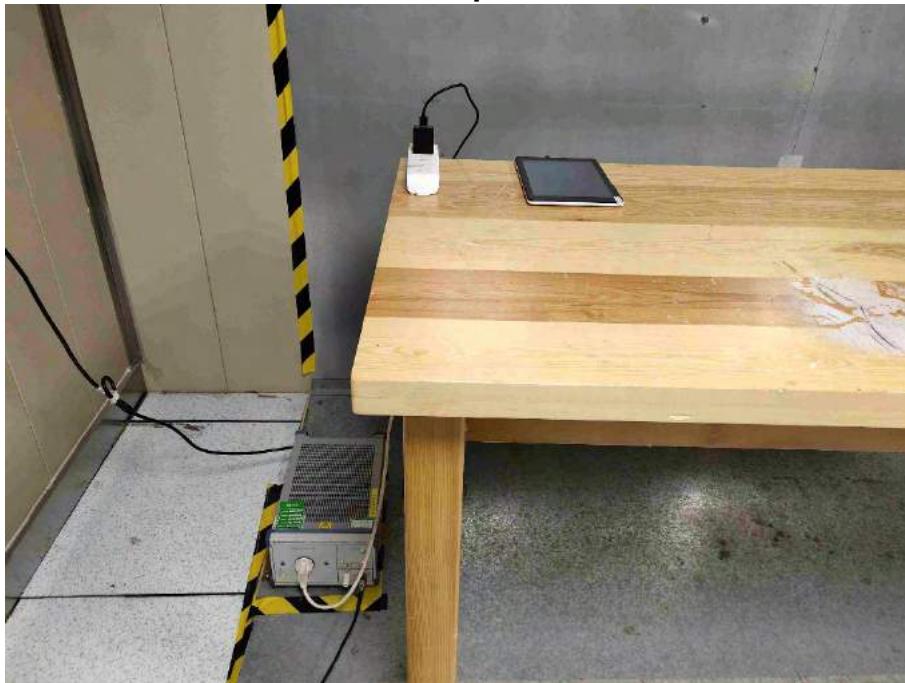


### 6.2 Radiated Emission Test Setup





Above 1G

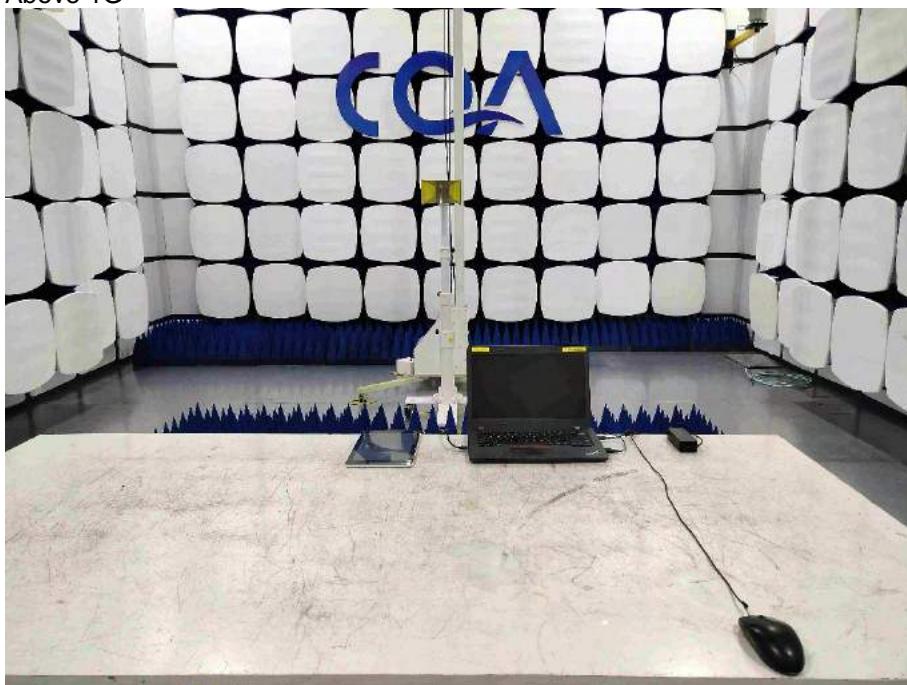



### 6.3 EUT Constructional Details


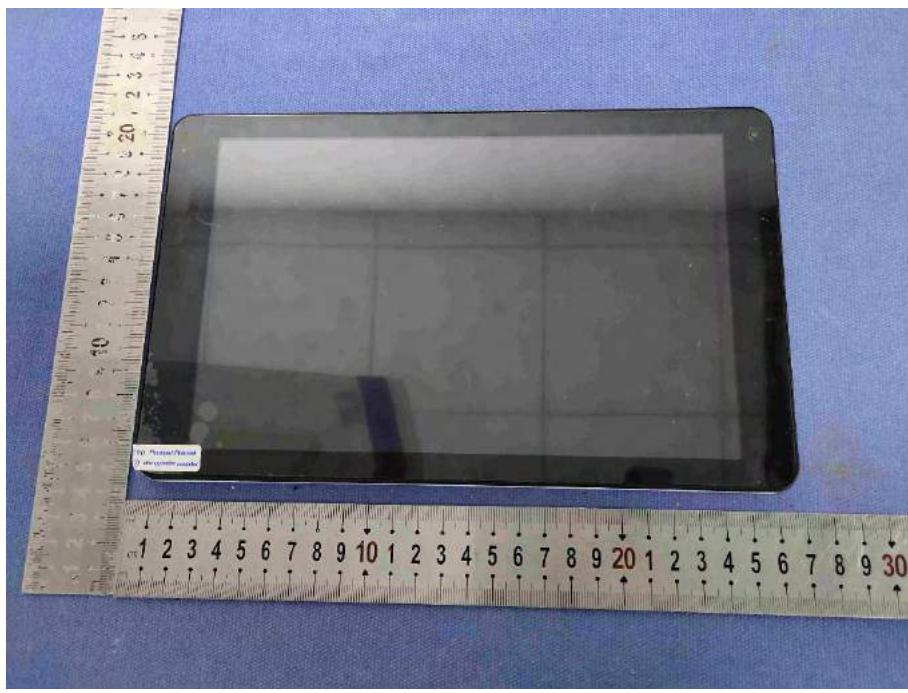



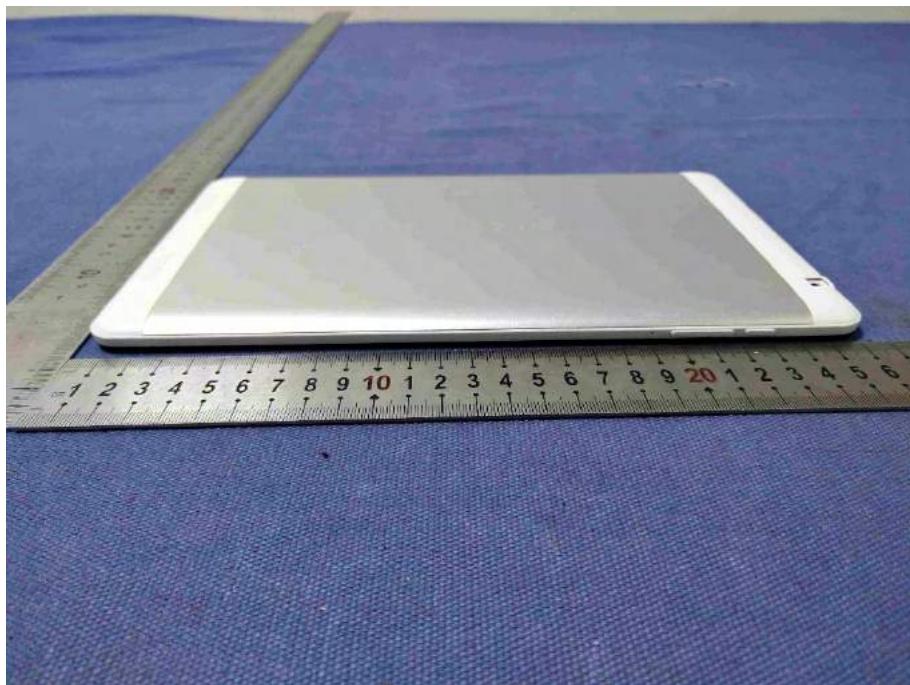



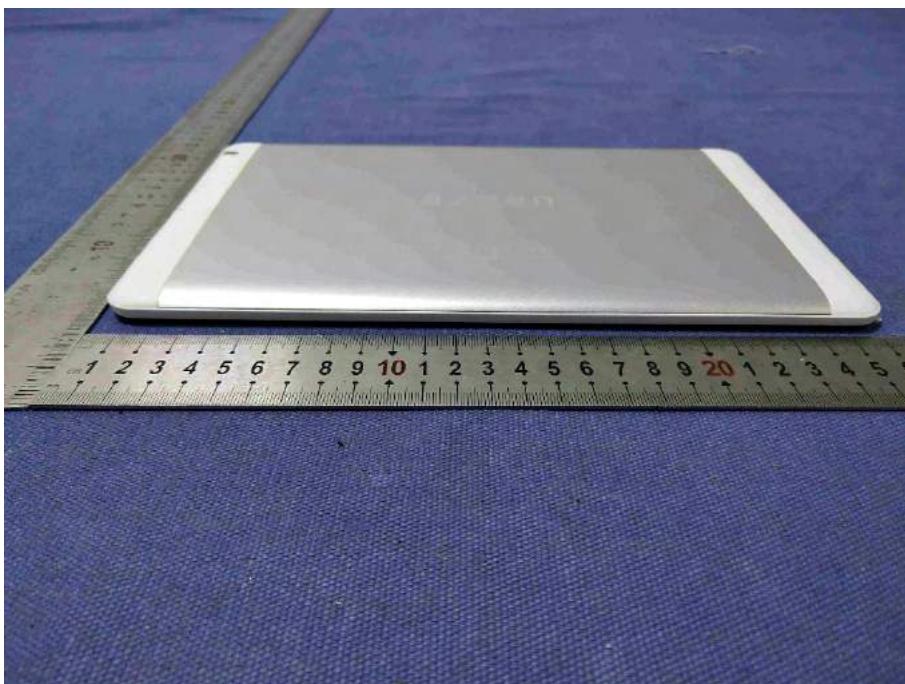






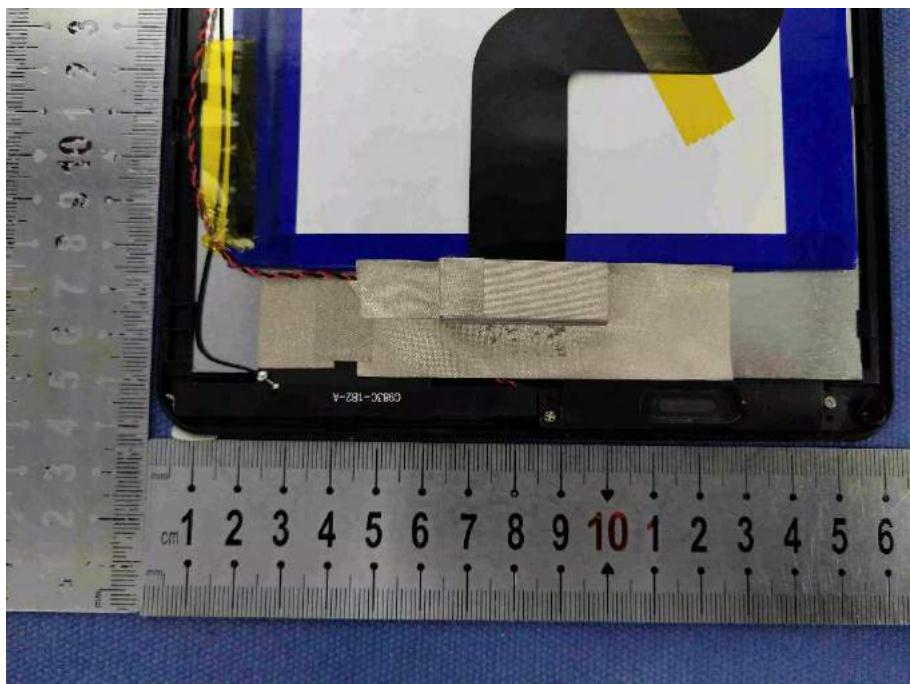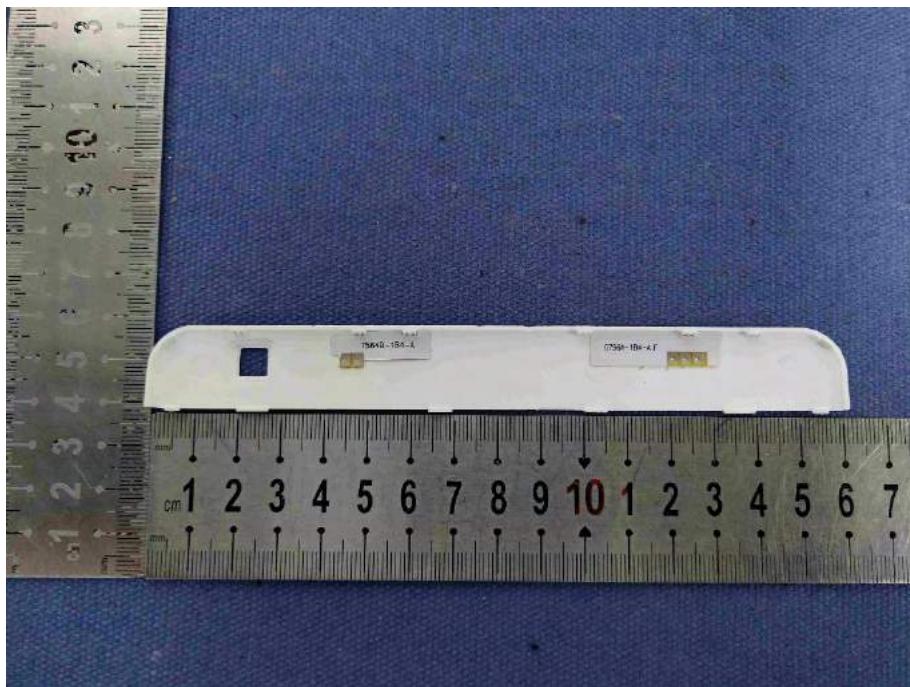

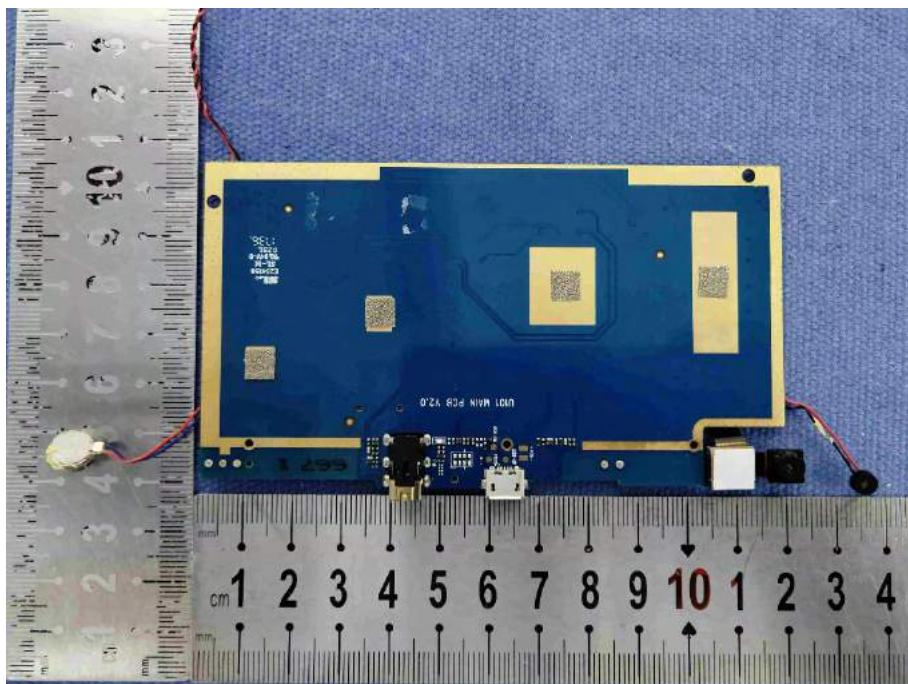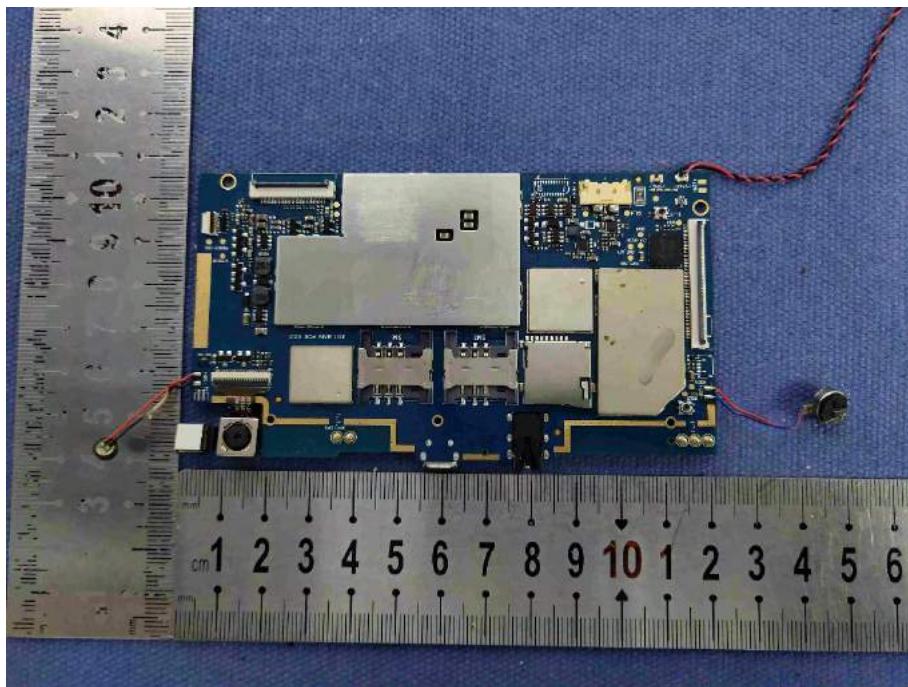

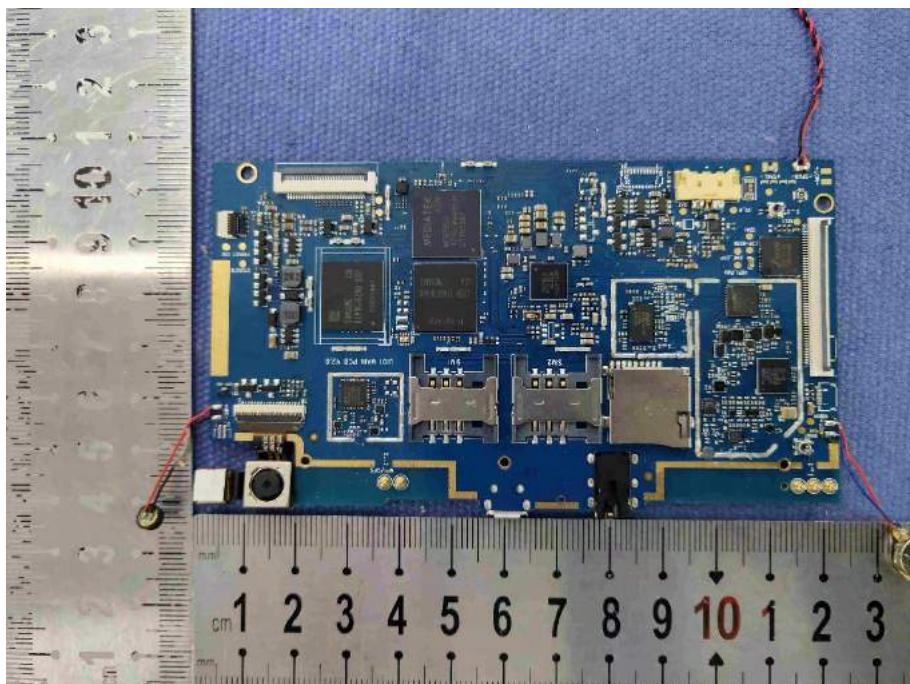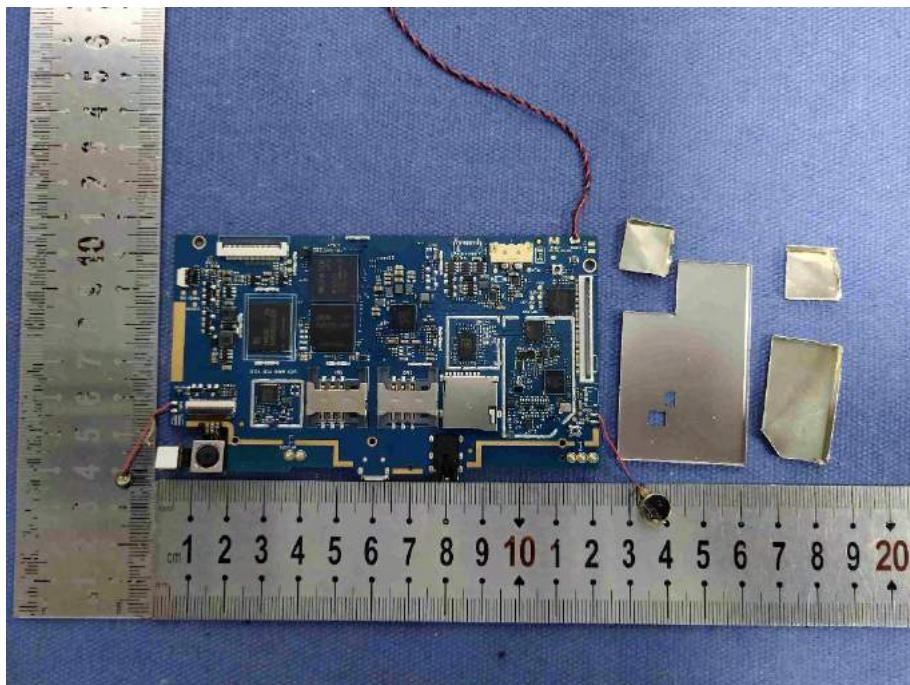

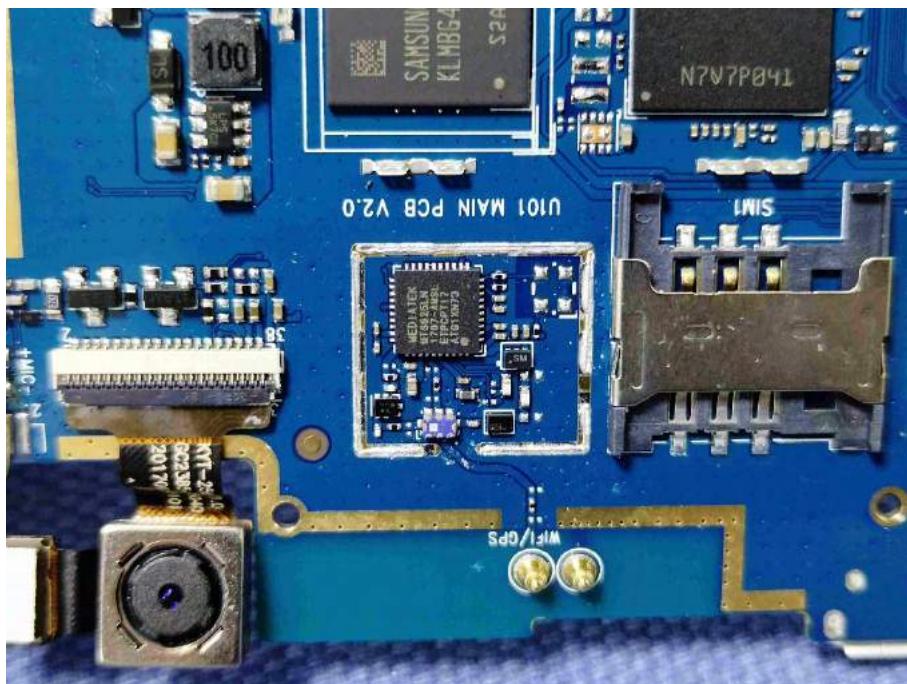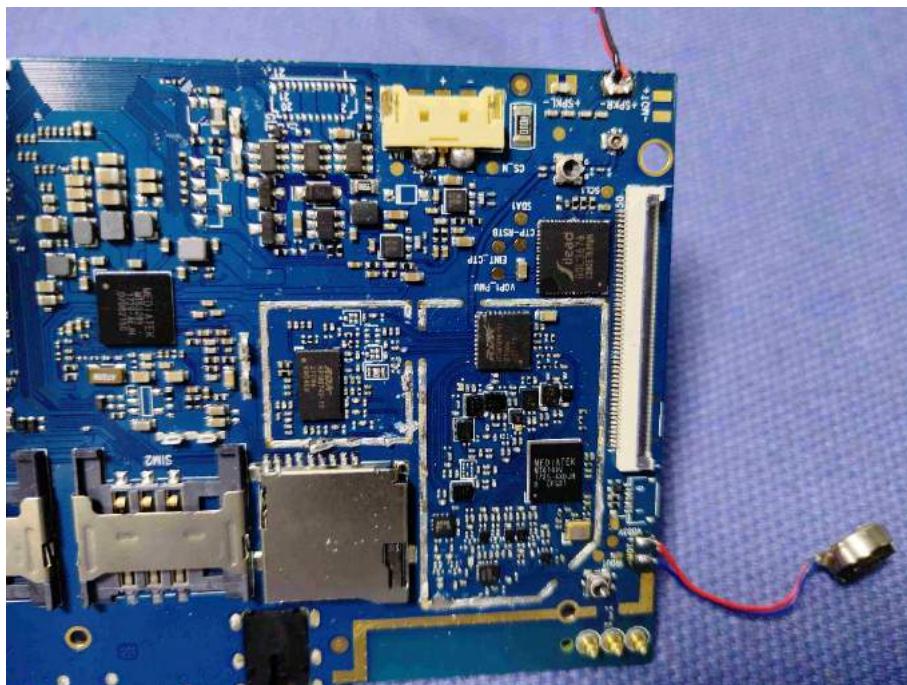

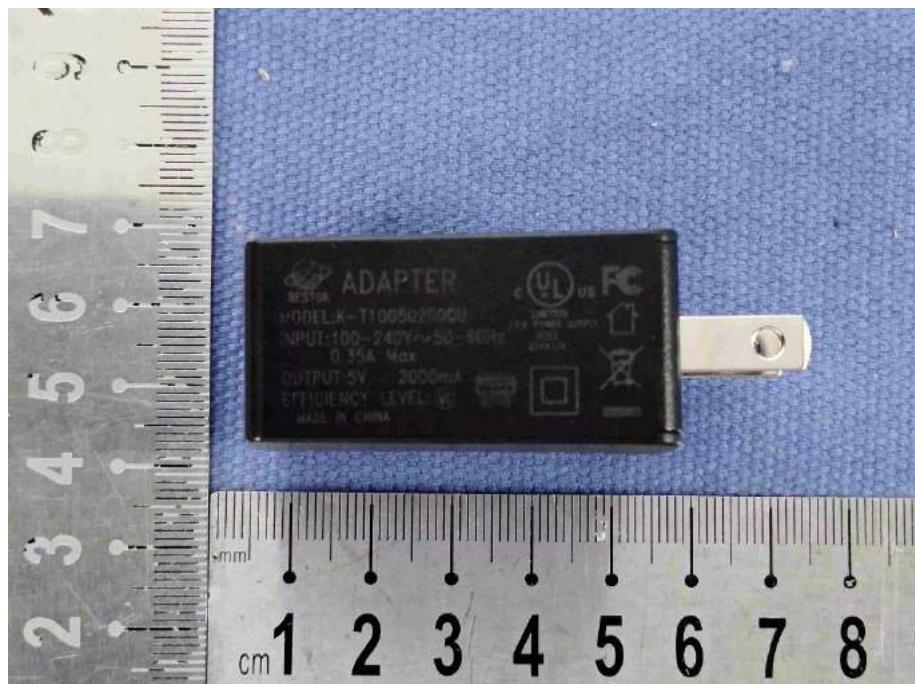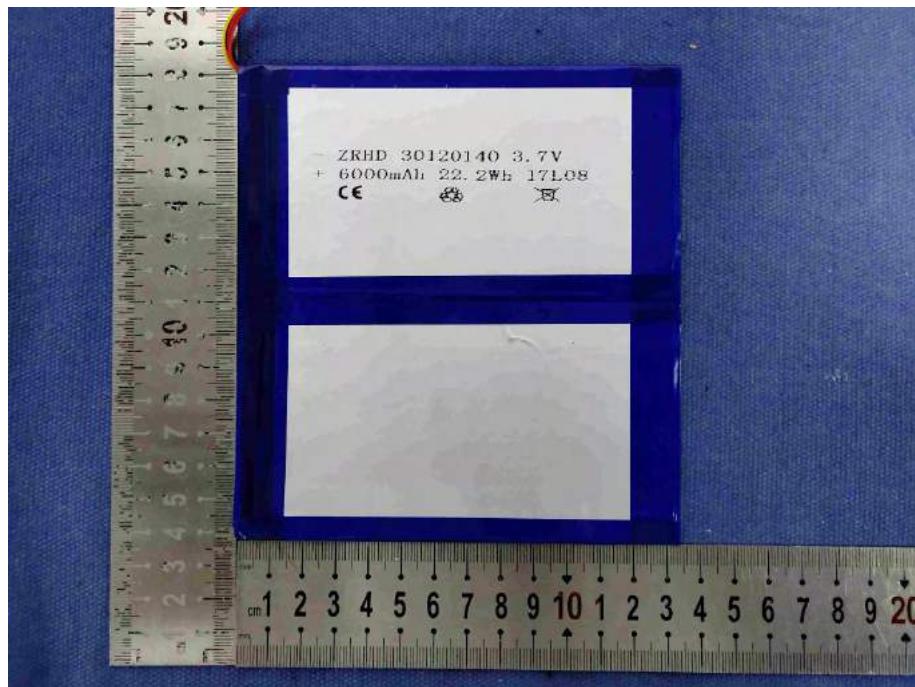

**END OF THE REPORT**