

FCC PART 15.249 TEST REPORT

For

Dongguan Hiee Electronic CO., LTD

2f/YongchangBuilding, Baotang Road, QiaotouTown, Dongguan City

FCC ID: 2AEHTHIEETS25

Report Type:		Product Type:	
Original Report		wireless transmitte	r
Test Engineer:	Jay Li	Jay 2i	
Report Number:	RSZ150304006-	00	
Report Date:	2015-03-31		
Reviewed By:	Jimmy Xiao RF Engineer	Jimmy	xiao
Prepared By:	6/F, the 3rd Phas	320018 320008	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

Report No.: RSZ150304006-00

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
TEST FACILITY	
SYSTEM TEST CONFIGURATION	
JUSTIFICATION	
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	
FCC§15.203 - ANTENNA REQUIREMENT	
APPLICABLE STANDARD	
APPLICABLE STANDARD	
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	
APPLICABLE STANDARD	
MEASUREMENT UNCERTAINTYEUT SETUP	
EMI TEST RECEIVER SETUP	
Test Procedure	
TEST EQUIPMENT LIST AND DETAILS	9
CORRECTED FACTOR & MARGIN CALCULATION	
TEST RESULTS SUMMARY	
TEST DATA	
FCC§15.205, §15.209 & §15.249 - RADIATED EMISSIONS	
APPLICABLE STANDARD	
MEASUREMENT UNCERTAINTY	
TEST EQUIPMENT SETUPEUT SETUP	
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST EQUIPMENT LIST AND DETAILS	15
TEST RESULTS SUMMARY	
TEST DATA	
FCC§15.215(C) - 20DB EMISSION BANDWIDTH	
APPLICABLE STANDARD	
Test Procedure	
TEST DATA	

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Dongguan Hiee Electronic CO., LTD* 's product, model number: *TS25(FCC ID:2AEHTHIEETS25)* or the "EUT" in this report was a *wireless presenter*, transmitter was measured approximately:28mm (L) x21mm (W) x 8.2 mm (H), rated input voltage: DC 12V.

Report No.: RSZ150304006-00

*All measurement and test data in this report was gathered from production sample serial number: 1503024 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2015-03-04.

Objective

This type approval report is prepared on behalf of *Dongguan Hiee Electronic CO.*, *LTD* in accordance with Part 2-Subpart J, and Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.249 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz.and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC Part 15.249 Page 3 of 21

SYSTEM TEST CONFIGURATION

Justification

The system was configured in a testing mode which provided by manufacturer

Input signal information as follows, which is declared by manufacturer

1.0 kHz FM modulation, input level is 1000mV.

Equipment Modifications

No modifications were made to the unit tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	
Clarigo	AC Adapter	NLA050120W1A1	C25Q150301A	
HP Agilent	RF Communication Test Set	8920A	3325U00859	

Report No.: RSZ150304006-00


Support Cable Descriptions

Cable Description	Length (m)	From Port	То
Un-Shielding Un-detachable adapter DC Line	1.8	Adapter	EUT
Shielding Detachable Signal cable	0.2	EUT	8920A

FCC Part 15.249 Page 4 of 21

Report No.: RSZ150304006-00

Block Diagram of Test Setup

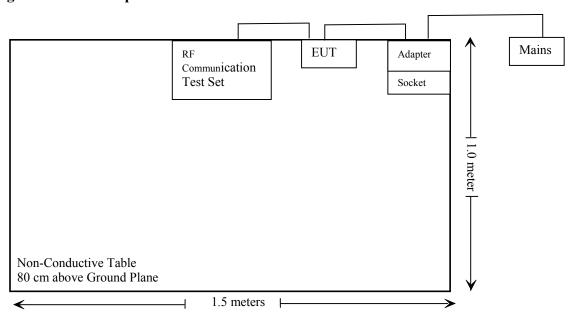

FCC Part 15.249 Page 5 of 21

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conduction Emissions	Compliance
15.205, §15.209, §15.249	Radiated Emissions	Compliance
§15.215(c)	20dB Emission Bandwidth	Compliance

Report No.: RSZ150304006-00

FCC Part 15.249 Page 6 of 21

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Report No.: RSZ150304006-00

Antenna Connector Construction

The EUT has one external RP-SMA port antenna, the antenna gain is 2 dBi; fulfill the requirement of this section. Please refer to the external photos.

Result: Compliant.

FCC Part 15.249 Page 7 of 21

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

Measurement Uncertainty


Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Report No.: RSZ150304006-00

Port	Expanded Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup

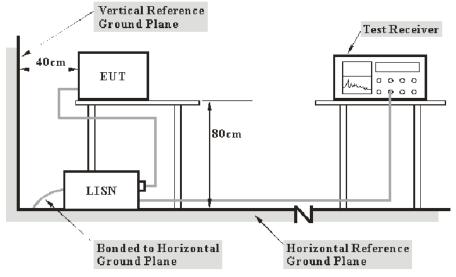

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2009. The related limit was specified in FCC Part 15.207.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

FCC Part 15.249 Page 8 of 21

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W	
150 kHz – 30 MHz	9 kHz	

Report No.: RSZ150304006-00

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2014-06-17	2015-06-17
Rohde & Schwarz	LISN	ENV216	3560.6650.12- 101613-Yb	2014-05-07	2015-05-07
Rohde & Schwarz	LISN	ESH2-Z5	892107/021	2014-08-22	2015-08-22
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2014-10-15	2015-10-15
Rohde & Schwarz	CE Test software	EMC 32	V8.53	NCR	NCR

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

Correction Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

FCC Part 15.249 Page 9 of 21

Test Results Summary

According to the recorded data in following table, the EUT complied with the <u>FCC Part 15.207</u>, the worst margin reading as below:

Report No.: RSZ150304006-00

15.7 dB at 0.529830 MHz in the Line conducted mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL., $U_{(Lm)}$ is less than U_{cispr} , if L_{m} is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	23 ℃
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Jay Li on 2015-03-27.


EUT operation mode: Transmitting

FCC Part 15.249 Page 10 of 21

AC 120V/60 Hz, Line

EMI Auto Test L

Report No.: RSZ150304006-00

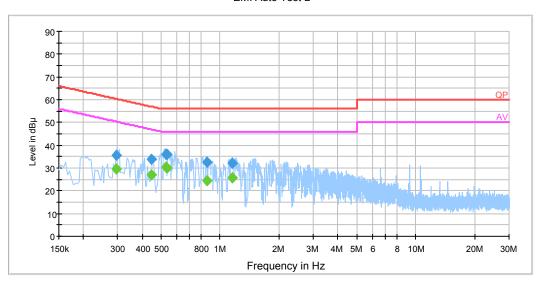


Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.293500	35.7	19.2	60.4	24.7	QP
0.293500	29.7	19.2	50.4	20.7	Ave.
0.447250	33.7	19.2	56.9	23.2	QP
0.447250	27.2	19.2	46.9	19.7	Ave.
0.529830	36.0	19.3	56.0	20.0	QP
0.529830	30.3	19.3	46.0	15.7	Ave.
0.533870	35.9	19.3	56.0	20.1	QP
0.533870	30.2	19.3	46.0	15.8	Ave.
0.861250	32.4	19.3	56.0	23.6	QP
0.861250	24.6	19.3	46.0	21.4	Ave.
1.160690	32.1	19.4	56.0	23.9	QP
1.160690	25.6	19.4	46.0	20.4	Ave.

FCC Part 15.249 Page 11 of 21

AC 120V/60 Hz, Neutral

EMI Auto Test N

Report No.: RSZ150304006-00

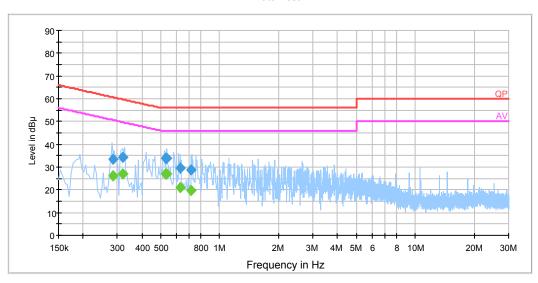

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.285500	33.5	19.2	60.7	27.2	QP
0.285500	26.3	19.2	50.7	24.4	Ave.
0.321110	34.4	19.2	59.7	25.3	QP
0.321110	26.8	19.2	49.7	22.9	Ave.
0.529830	33.9	19.2	56.0	22.1	QP
0.529830	26.8	19.2	46.0	19.2	Ave.
0.533930	33.9	19.2	56.0	22.1	QP
0.533930	26.8	19.2	46.0	19.2	Ave.
0.627270	29.4	19.3	56.0	26.6	QP
0.627270	21.0	19.3	46.0	25.0	Ave.
0.715170	28.6	19.3	56.0	27.4	QP
0.715170	19.8	19.3	46.0	26.2	Ave.

Note:

- Correction Factor =LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
 Corrected Amplitude = Reading + Correction Factor
 Margin = Limit Corrected Amplitude

FCC Part 15.249 Page 12 of 21

FCC§15.205, §15.209 & §15.249 - RADIATED EMISSIONS

Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter) Field strength of harmonics (microvolts/meter)	
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

Report No.: RSZ150304006-00

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.91 dB for 30MHz-1GHz, 4.92 dB for above 1GHz, and it will not be taken into consideration for the test data recorded in the report

Test Equipment Setup

The spectrum analyzer or receiver is set as:

Below 1000MHz:


RBW = 100 kHz / VBW = 300 kHz / Sweep = Auto

Above 1000MHz:

Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

FCC Part 15.249 Page 13 of 21

EUT Setup

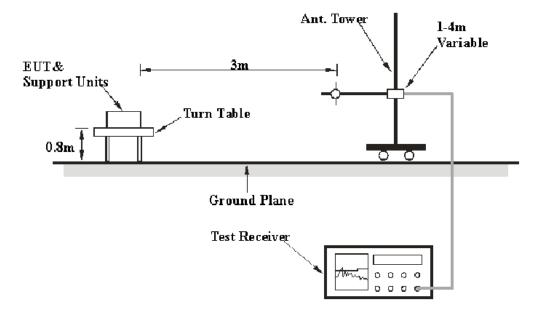

Report No.: RSZ150304006-00

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 mete, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

FCC Part 15.249 Page 14 of 21

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
НР	Amplifier	HP8447E	1937A01046	2014-09-30	2015-09-30
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2014-11-12	2015-11-12
Sunol Sciences	Broadband Antenna	ЈВ3	A111513	2014-06-18	2017-06-17
A.H. System	Horn Antenna	SAS-200/571	135	2015-02-10	2018-02-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-11-12	2015-11-12
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2014-04-03	2015-04-03
DUCOMMUN	Pre-amplifier	ALN- 22093530-01	991373-01	2014-08-03	2015-08-03
the electro- Mechanics Co.	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
Agilent	Spectrum Analyzer	8564E	3943A01781	2013-05-09	2016-05-08
Rohde & Schwarz	Auto test Software	EMC32	V9.10	NCR	NCR

Report No.: RSZ150304006-00

Test Results Summary

According to the data in the following table, the worst margin reading as below:

5.38 dB at 11732.00MHz in the Vertical polarization for High Channel

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	23 ℃
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Jay Li on 2015-03-27 to 2015-03-30.

Test Mode: Transmitting

FCC Part 15.249 Page 15 of 21

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

30 MHz to 40 GHz:

Frequency	Receiver		Turntable	Rx Antenna				FCC Part 15.249/15.205/15.209	
(MHz)	Reading (dBµV)	Detector (PK/QP/Ave.)	Degree	Height (m)	Polar (H/V)	Factor (dB)	Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Low Channel(5733MHz)								
273.10	47.28	QP	27	1.5	Н	-14.8	32.48	46	13.52
5733.00	74.79	PK	110	2.4	Н	15.24	90.03	114	23.97
5733.00	63.25	Ave.	110	2.4	Н	15.24	78.49	94	15.51
5733.00	83.35	PK	211	2.4	V	15.44	98.79	114	15.21
5733.00	72.75	Ave.	211	2.4	V	15.44	88.19	94	5.81
2926.17	37.81	PK	127	1.2	V	8.56	46.37	74	27.63
2926.17	22.73	Ave.	127	1.2	V	8.56	31.29	54	22.71
4596.82	36.33	PK	353	2.1	V	14.14	50.47	74	23.53
4596.82	21.38	Ave.	353	2.1	V	14.14	35.52	54	18.48
5406.85	38.29	PK	182	2.0	V	16.37	54.66	74	19.34
5406.85	24.78	Ave.	182	2.0	V	16.37	41.15	54	12.85
7432.33	42.99	PK	343	2.5	V	23.40	66.39	74	7.61
7432.33	20.52	Ave.	343	2.5	V	23.40	43.92	54	10.08
8777.22	34.09	PK	26	2.3	V	22.09	56.18	74	17.82
8777.22	23.99	Ave.	26	2.3	V	22.09	46.08	54	7.92
11466.00	35.52	PK	61	1.9	V	25.92	61.44	74	12.56
11466.00	21.43	Ave.	61	1.9	V	25.92	47.35	54	6.65
			Middle	Channe	l(5800N	(Hz)			
273.10	47.71	QP	27	1.5	Н	-14.8	32.91	46	13.09
5800.00	74.34	PK	177	1.4	Н	14.89	89.23	114	24.77
5800.00	63.16	Ave.	177	1.4	Н	14.89	78.05	94	15.95
5800.00	82.39	PK	155	1.3	V	15.09	97.48	114	16.52
5800.00	72.26	Ave.	155	1.3	V	15.09	87.35	94	6.65
2968.34	37.60	PK	118	2.1	V	11.28	48.88	74	25.12
2968.34	21.55	Ave.	118	2.1	V	11.28	32.83	54	21.17
4745.82	34.81	PK	17	2.3	V	14.37	49.18	74	24.82
4745.82	21.19	Ave.	17	2.3	V	14.37	35.56	54	18.44
5406.16	38.56	PK	187	1.6	Н	16.37	54.93	74	19.07
5406.16	24.90	Ave.	187	1.6	Н	16.37	41.27	54	12.73
7423.98	42.78	PK	319	1.9	Н	23.40	66.18	74	7.82
7423.98	20.52	Ave.	319	1.9	Н	23.40	43.92	54	10.08
8735.50	35.90	PK	291	1.8	V	22.18	58.08	74	15.92
8735.50	23.82	Ave.	291	1.8	V	22.18	46.00	54	8.00
11600.00	36.82	PK	349	1.4	V	26.52	63.34	74	10.66
11600.00	22.04	Ave.	349	1.4	V	26.52	48.56	54	5.44

Report No.: RSZ150304006-00

FCC Part 15.249 Page 16 of 21

High Channel(5866 MHz)									
273.10	47.33	QP	27	1.5	Н	-14.8	32.53	46	13.47
5866.00	75.27	PK	62	1.7	Н	14.93	90.20	114	23.80
5866.00	64.36	Ave.	62	1.7	Н	14.93	79.29	94	14.71
5866.00	84.49	PK	290	1.7	V	15.13	99.62	114	14.38
5866.00	73.47	Ave.	290	1.7	V	15.13	88.60	94	5.40
2931.05	37.45	PK	167	1.8	V	8.56	46.01	74	27.99
2931.05	21.18	Ave.	167	1.8	V	8.56	29.74	54	24.26
4801.12	34.50	PK	165	1.9	V	14.41	48.91	74	25.09
4801.12	20.83	Ave.	165	1.9	V	14.41	35.24	54	18.76
5408.66	37.65	PK	18	1.4	Н	16.37	54.02	74	19.98
5408.66	23.88	Ave.	18	1.4	Н	16.37	40.25	54	13.75
7428.77	42.15	PK	206	1.6	Н	23.40	65.55	74	8.45
7428.77	20.52	Ave.	206	1.6	Н	23.40	43.92	54	10.08
8919.13	34.65	PK	144	1.7	Н	22.09	56.74	74	17.26
8919.13	22.08	Ave.	144	1.7	Н	22.09	44.17	54	9.83
11732.00	36.76	PK	158	1.6	V	26.52	63.28	74	10.72
11732.00	22.10	Ave.	158	1.6	V	26.52	48.62	54	5.38

Report No.: RSZ150304006-00


Note:

Corrected Amplitude = Corrected Factor + Reading Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor Margin = Limit – Corrected Amplitude


FCC Part 15.249 Page 17 of 21

Band edge -Left Side

Report No.: RSZ150304006-00

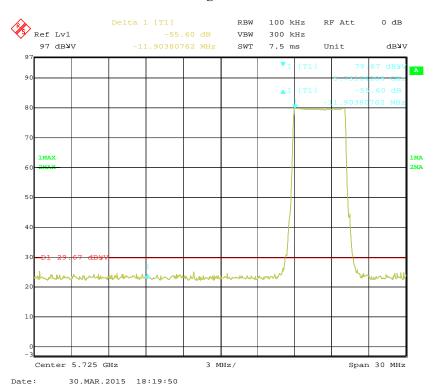

Band edge -Right Side

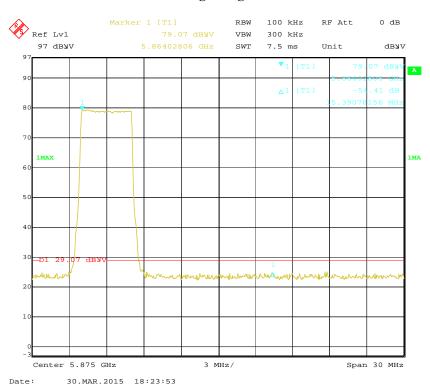

FCC Part 15.249 Page 18 of 21

FCC§15.215(c) - 20dB EMISSION BANDWIDTH

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Report No.: RSZ150304006-00

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that indicated 20dB bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2014-08-22	2015-08-22

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24 ℃	
Relative Humidity:	50 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Jay Li on 2015-03-28

Test Mode: Transmitting


Pleas refer to the following table and plots.

FCC Part 15.249 Page 19 of 21

Channel	Frequency (MHz)	20dB Bandwidth (MHz)		
Low Channel	5733	4.429		
Mid Channel	5800	4.309		
High Channel	5866	4.329		

Report No.: RSZ150304006-00


Low Channel

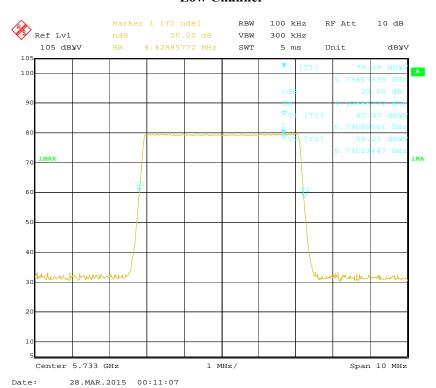


FCC Part 15.249 Page 20 of 21

Middle Channel

Report No.: RSZ150304006-00

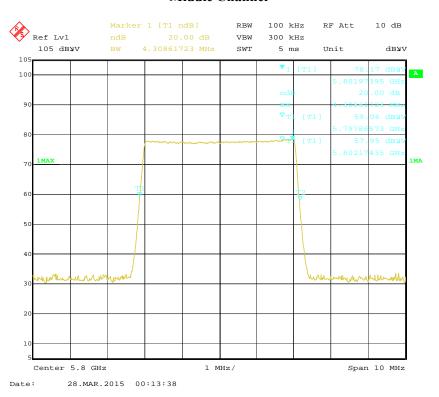

High Channel

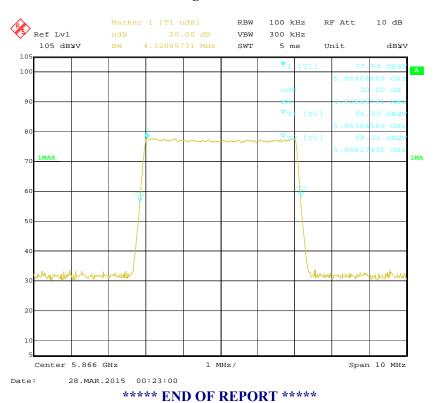

FCC Part 15.249 Page 21 of 21