

# WaveLynx Technologies Corporation

## REVISED TEST REPORT FOR 97757-40

### Ethos

**Models: ET20-2, ET20-3, ET20-6, ET20-7,  
ET25-2, ET25-3, ET25-6 and ET25-7**

**Tested to The Following Standards:**

**FCC Part 15 Subpart C Section(s)**

**15.207 & 15.225  
(13.110-14.010 MHz)**

**Report No.: 97757-40A**

**Date of issue: January 18, 2018**



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of EMC testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

## TABLE OF CONTENTS

Administrative Information .....	3
Test Report Information .....	3
Revision History .....	3
Report Authorization .....	3
Test Facility Information .....	4
Software Versions .....	4
Site Registration & Accreditation Information .....	4
Summary of Results .....	5
Modifications During Testing .....	5
Conditions During Testing .....	5
Equipment Under Test .....	6
General Product Information .....	9
FCC Part 15 Subpart C .....	10
15.215(c) Occupied Bandwidth (20dB BW) .....	10
15.225(a)-(c) Field Strength of Fundamental .....	17
15.225(e) Frequency Stability .....	42
15.225(d) Radiated Emissions .....	47
15.207 AC Conducted Emissions .....	87
APPENDIX A: Test Date 12/13-15/2017 .....	101
Summary of Results .....	101
Modifications During Testing .....	101
Conditions During Testing .....	101
Equipment Under Test .....	102
General Product Information .....	102
15.225(a)-(c) Field Strength of Fundamental .....	103
15.225(d) Radiated Emissions .....	107
Supplemental Information .....	114
Measurement Uncertainty .....	114
Emissions Test Details .....	114



## ADMINISTRATIVE INFORMATION

### Test Report Information

**REPORT PREPARED FOR:**

WaveLynx Technologies Corporation  
100 Technology Drive, Suite B150  
Broomfield, CO 80021

Representative: Daniel Field  
Customer Reference Number: CKPO111017

**REPORT PREPARED BY:**

Dianne Dudley  
CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

Project Number: 100602

**DATE OF EQUIPMENT RECEIPT:**

April 20, 2016

**DATE(S) OF TESTING:**

April 20 - May 21, 2016  
December 13 - 15, 2017

### Revision History

**Original:** Testing of the Ethos, models ET20-2, ET20-3, ET20-6, ET20-7, ET25-2, ET25-3, ET25-6 and ET25-7 to FCC Part 15 Subpart C Sections 15.207 & 15.225.

**Revision A:** Partial testing of ET25-7 to FCC Part 15 Subpart C Section 15.225. For new test data see Appendix A.

### Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the sample equipment tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.

A handwritten signature in black ink, appearing to read 'Steve Behm', is written over a horizontal line.

*Steve Behm*  
Director of Quality Assurance & Engineering Services  
CKC Laboratories, Inc.

## Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):  
CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

## Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.02
EMITest Emissions	5.03.11

## Site Registration & Accreditation Information

Location	CB #	TAIWAN	CANADA	FCC	JAPAN
Mariposa D, CA	US0103	SL2-IN-E-1147R	3082A-1	784962	A-0136

## SUMMARY OF RESULTS

### Standard / Specification: FCC Part 15 Subpart C - 15.225

Test Procedure	Description	Modifications	Results
15.215(c)	Occupied Bandwidth	NA	Pass
15.225(a)-(c)	Field Strength of Fundamental	NA	Pass
15.225(e)	Frequency Stability	NA	Pass
15.225(d)	Field Strength of Spurious Emissions	NA	Pass
15.207	AC Conducted Emissions	NA	Pass

NA = Not Applicable

### Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

#### Summary of Conditions

No modifications were made during testing.

Modifications listed above must be incorporated into all production units.

### Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

#### Summary of Conditions

None

## EQUIPMENT UNDER TEST (EUT)

During testing numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

### Configuration 1

*Equipment Tested:*

Device	Manufacturer	Model #	S/N
Ethos	WaveLynx Technologies Corporation	ET20-3	NA

*Support Equipment:*

Device	Manufacturer	Model #	S/N
DC Power Supply	HP	6205C	2228A01775

### Configuration 2

*Equipment Tested:*

Device	Manufacturer	Model #	S/N
Ethos	WaveLynx Technologies Corporation	ET20-2	NA

*Support Equipment:*

Device	Manufacturer	Model #	S/N
DC Power Supply	HP	6205C	2228A01775

### Configuration 3

*Equipment Tested:*

Device	Manufacturer	Model #	S/N
Ethos	WaveLynx Technologies Corporation	ET20-7	NA

*Support Equipment:*

Device	Manufacturer	Model #	S/N
DC Power Supply	HP	6205C	2228A01775

### Configuration 4

*Equipment Tested:*

Device	Manufacturer	Model #	S/N
Ethos	WaveLynx Technologies Corporation	ET20-6	NA

*Support Equipment:*

Device	Manufacturer	Model #	S/N
DC Power Supply	HP	6205C	2228A01775

### Configuration 5

*Equipment Tested:*

Device	Manufacturer	Model #	S/N
Ethos	WaveLynx Technologies Corporation	ET25-3	NA

*Support Equipment:*

Device	Manufacturer	Model #	S/N
DC Power Supply	HP	6205C	2228A01775

## Configuration 6

### *Equipment Tested:*

Device	Manufacturer	Model #	S/N
Ethos	WaveLynx Technologies Corporation	ET25-2	NA

### *Support Equipment:*

Device	Manufacturer	Model #	S/N
DC Power Supply	HP	6205C	2228A01775

## Configuration 7

### *Equipment Tested:*

Device	Manufacturer	Model #	S/N
Ethos	WaveLynx Technologies Corporation	ET25-7	NA

### *Support Equipment:*

Device	Manufacturer	Model #	S/N
DC Power Supply	HP	6205C	2228A01775

## Configuration 8

### *Equipment Tested:*

Device	Manufacturer	Model #	S/N
Ethos	WaveLynx Technologies Corporation	ET25-6	NA

### *Support Equipment:*

Device	Manufacturer	Model #	S/N
DC Power Supply	HP	6205C	2228A01775

## Configuration 12

### *Equipment Tested:*

Device	Manufacturer	Model #	S/N
Ethos	WaveLynx Technologies Corporation	ET20-6	NA
Ethos	WaveLynx Technologies Corporation	ET20-7	NA

### *Support Equipment:*

Device	Manufacturer	Model #	S/N
DC Power Supply	HP	6205C	2228A01775

## Configuration 14

### *Equipment Tested:*

Device	Manufacturer	Model #	S/N
Ethos	WaveLynx Technologies Corporation	ET25-6	NA
Ethos	WaveLynx Technologies Corporation	ET25-7	NA

### *Support Equipment:*

Device	Manufacturer	Model #	S/N
DC Power Supply	HP	6205C	2228A01775



## Configuration 15

### Equipment Tested:

Device	Manufacturer	Model #	S/N
Ethos	WaveLynx Technologies Corporation	ET20-2	NA
Ethos	WaveLynx Technologies Corporation	ET20-3	NA
Ethos	WaveLynx Technologies Corporation	ET20-6	NA
Ethos	WaveLynx Technologies Corporation	ET20-7	NA

### Support Equipment:

Device	Manufacturer	Model #	S/N
DC Power Supply	HP	6205C	2228A01775

## Configuration 16

### Equipment Tested:

Device	Manufacturer	Model #	S/N
Ethos	WaveLynx Technologies Corporation	ET25-2	NA
Ethos	WaveLynx Technologies Corporation	ET25-3	NA
Ethos	WaveLynx Technologies Corporation	ET25-6	NA
Ethos	WaveLynx Technologies Corporation	ET25-7	NA

### Support Equipment:

Device	Manufacturer	Model #	S/N
DC Power Supply	HP	6205C	2228A01775

## Configuration 11

### Equipment Tested:

Device	Manufacturer	Model #	S/N
Ethos	WaveLynx Technologies Corporation	ET20-2	NA
Ethos	WaveLynx Technologies Corporation	ET20-3	NA

### Support Equipment:

Device	Manufacturer	Model #	S/N
DC Power Supply	HP	6205C	2228A01775

## Configuration 13

### Equipment Tested:

Device	Manufacturer	Model #	S/N
Ethos	WaveLynx Technologies Corporation	ET25-2	NA
Ethos	WaveLynx Technologies Corporation	ET25-3	NA

### Support Equipment:

Device	Manufacturer	Model #	S/N
DC Power Supply	HP	6205C	2228A01775

## General Product Information:

---

Product Information	Manufacturer-Provided Details
Equipment Type: (All 8 EUTs)	Stand-Alone Equipment
Modulation Type(s): (All 8 EUTs)	ASK with 847kHz subcarrier
Maximum Duty Cycle: (Measured)	Configuration 1 = 2.58% Configuration 2 and Configuration 8 = 2.81% Configuration 3 and Configuration 6 = 3.08% Configuration 4 = 3.09% Configuration 5 = 3.05% Configuration 7 = 2.82%
Antenna Type(s) and Gain:	Configuration 15 and Configuration 16 = PCB Trace 65mm x 110mm
Antenna Connection Type: (All 8 EUTs)	Integral
Nominal Input Voltage: (All 8 EUTs)	12VDC
Firmware / Software used for Test: (All 8 EUTs)	Wallmount Reader FCC LF Version 1

## FCC Part 15 Subpart C

### 15.215(c) Occupied Bandwidth (20dB BW)

Test Setup/Conditions			
Test Location:	Mariposa Lab D	Test Engineer:	Benny Lovan / Skip Doyle
Test Method:	ANSI C63.10 (2013)	Test Date(s):	4/20/2016, 04/25/16 – 04/27/16
Configuration:	1, 2, 3, 4, 5, 6, 7 and 8		
Test Setup:	Modulation: ASK 847kHz Subcarrier Antenna Type: Integral Antenna Gain 2 dBi EUT Orientation: Y-Axis  The EUT is powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright (Y-axis) orientation. The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.		


Environmental Conditions			
Temperature (°C)	10 – 14.2	Relative Humidity (%):	48-76

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
ANSITED 3M	Cable	None	None	11/15/2014	11/15/2016
ANP06884	Cable	TMS	LMR195-FR-4	10/27/2015	10/27/2017
AN00226	Loop Antenna	EMCO	6502	4/4/2016	4/4/2018


## Test Data Summary

Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
Configuration 1 13.559	Integral	ASK with 847kHz subcarrier	.007381	None	NA
Configuration 2 13.559	Integral	ASK with 847kHz subcarrier	.007386	None	NA
Configuration 3 13.559	Integral	ASK with 847kHz subcarrier	.007386	None	NA
Configuration 4 13.560	Integral	ASK with 847kHz subcarrier	.007386	None	NA
Configuration 5 13.560	Integral	ASK with 847kHz subcarrier	.007384	None	NA
Configuration 6 13.559	Integral	ASK with 847kHz subcarrier	.007386	None	NA
Configuration 7 13.560	Integral	ASK with 847kHz subcarrier	.007386	None	NA
Configuration 8 13.559	Integral	ASK with 847kHz subcarrier	.007384	None	NA


## Plots

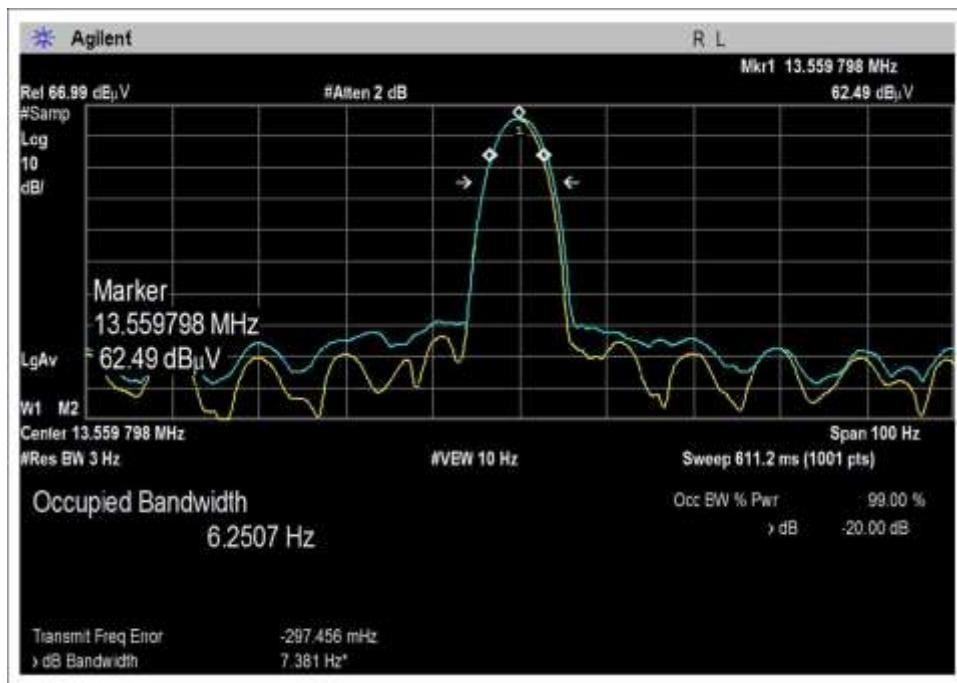


## Configuration 1

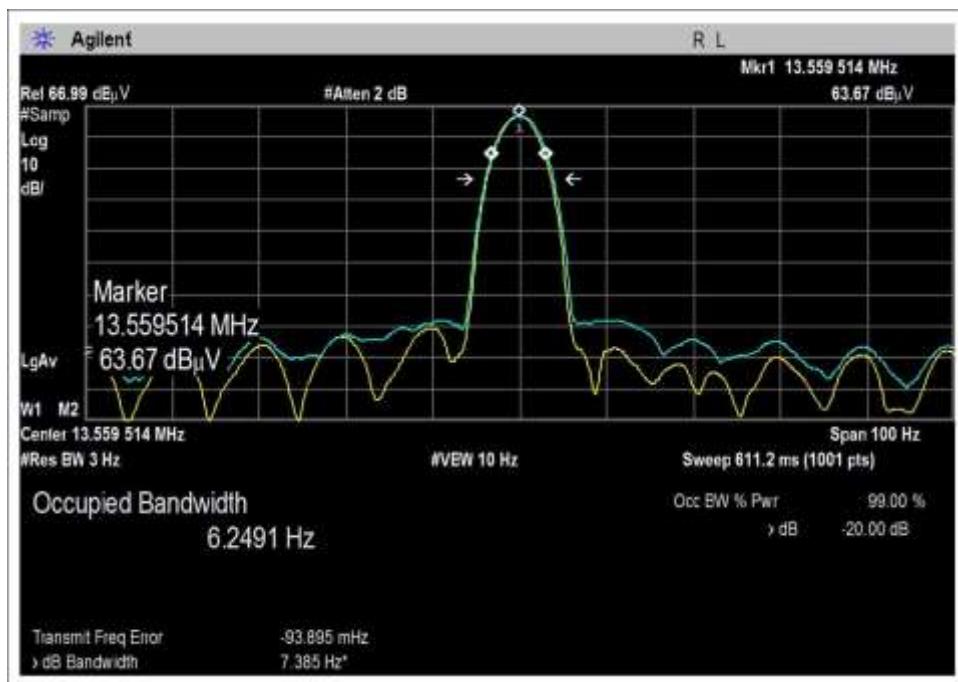


Configuration 2

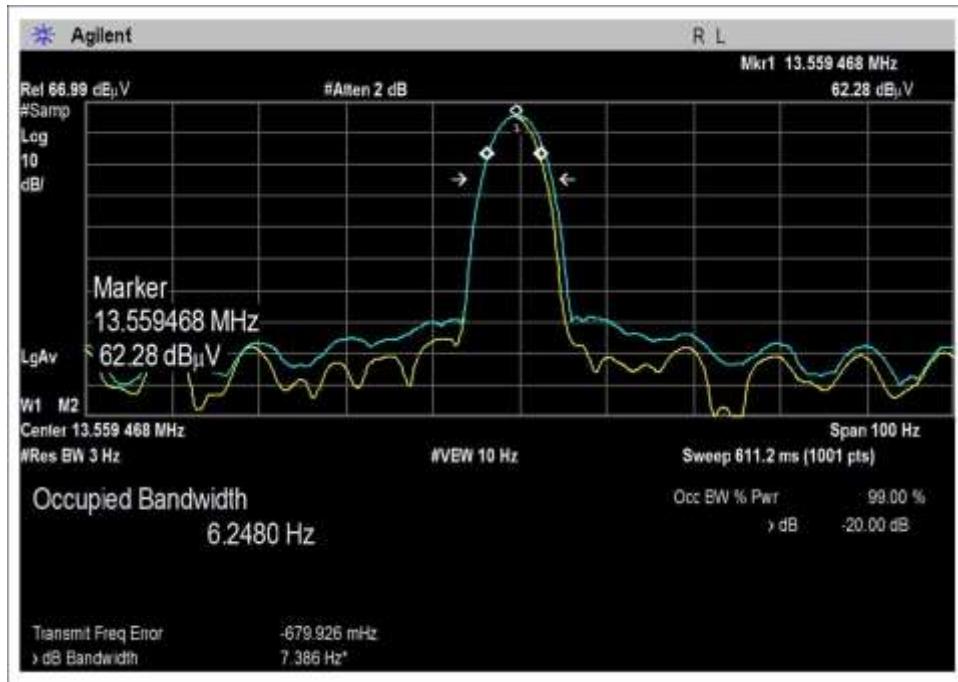


Configuration 3

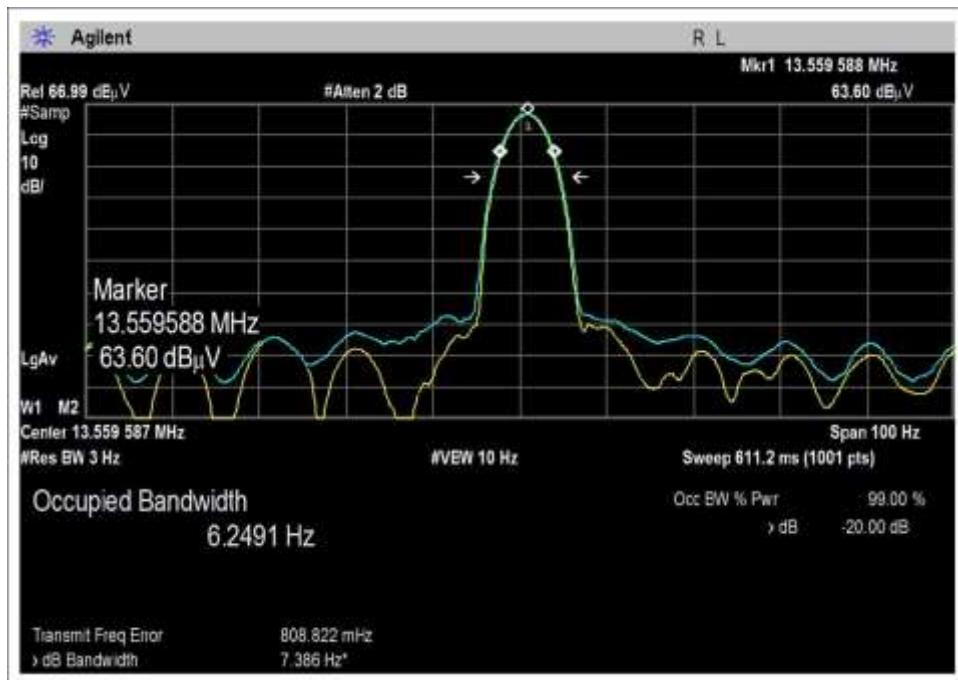


Configuration 4

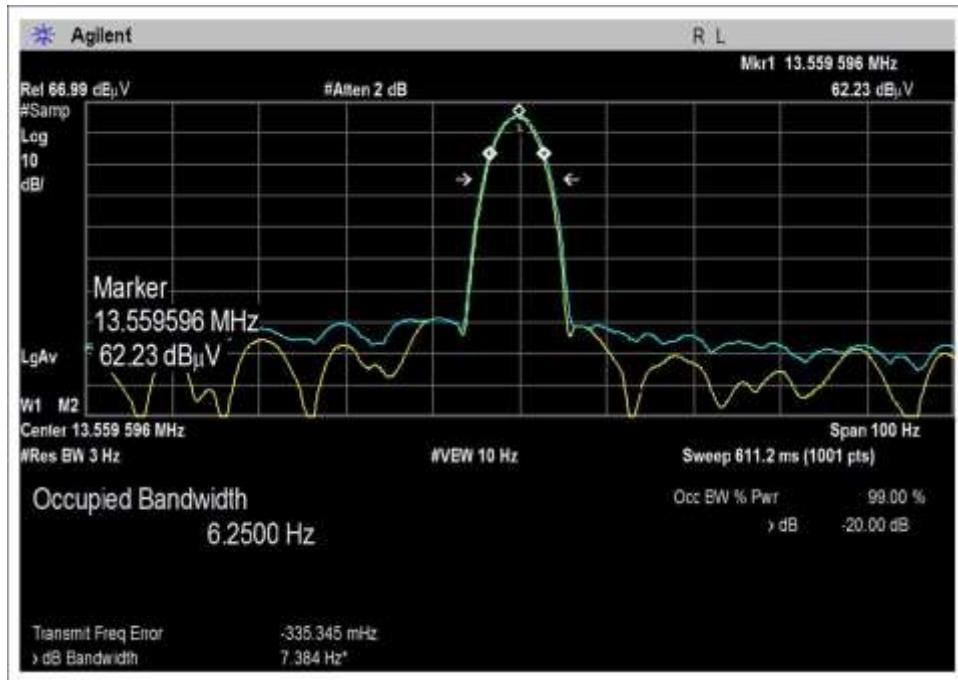


Configuration 5

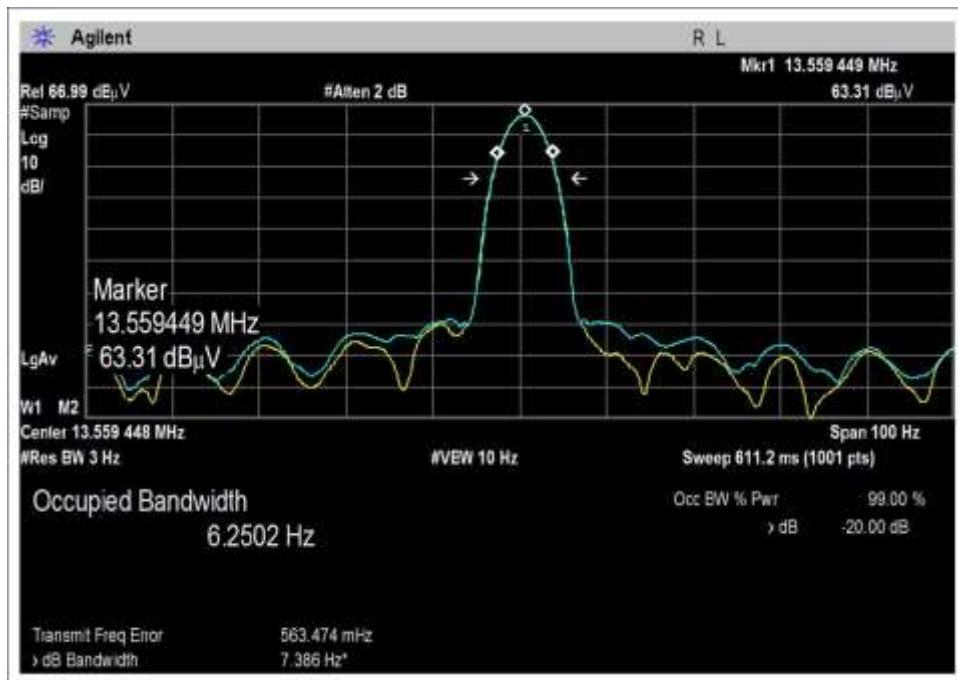

Configuration 6

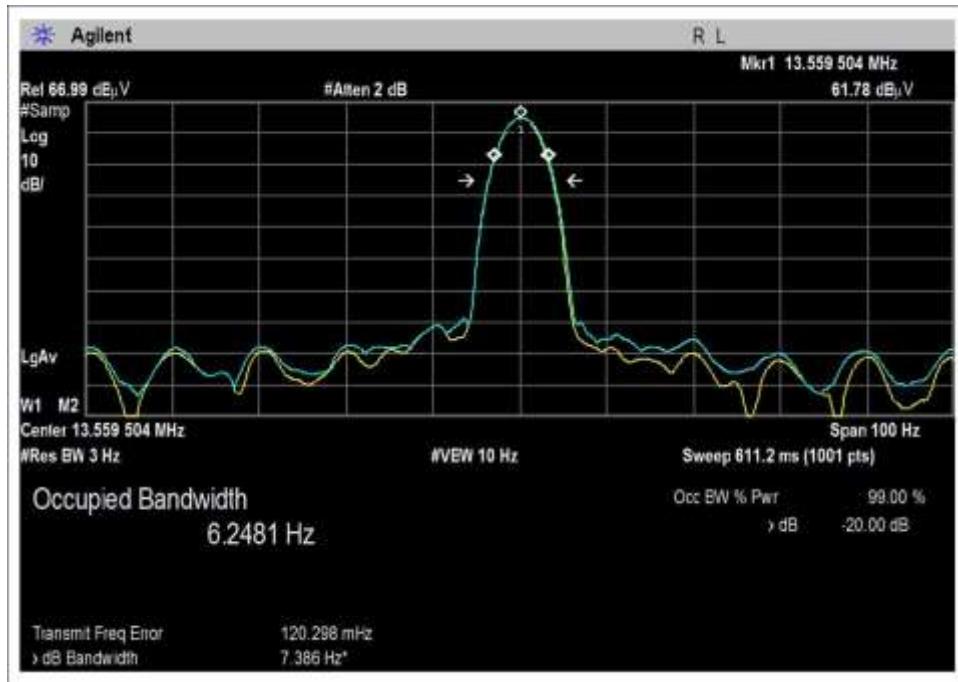

Configuration 7

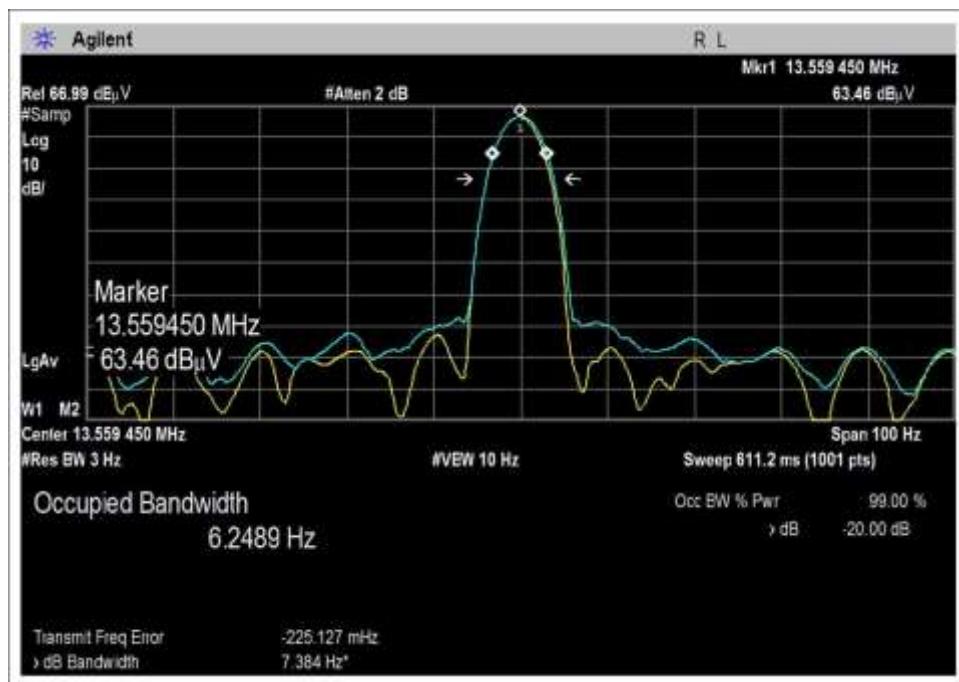

Configuration 8

Test Setup Photo



## 15.225(a)-(c) Field Strength of Fundamental

Test Data Summary - Voltage Variations					
Frequency (MHz)	Modulation / Ant Port	V <sub>Minimum</sub> (dBuV/m)	V <sub>Nominal</sub> (dBuV/m)	V <sub>Maximum</sub> (dBuV/m)	Max Deviation from V <sub>Nominal</sub> (dB)
<b>Configuration 1</b>					
13.560 Parallel	ASK with 847kHz subcarrier / Integral Antenna	32.9	32.9	32.8	0.1
13.56 Perpendicular	ASK with 847kHz subcarrier / Integral Antenna	30.2	30.1	30.1	0.1
<b>Configuration 2</b>					
13.559 Parallel	ASK with 847kHz subcarrier / Integral Antenna	34.1	34.1	34.1	0.0
13.560 Perpendicular	ASK with 847kHz subcarrier / Integral Antenna	31.1	31.0	31.1	0.1
<b>Configuration 3</b>					
13.559 Parallel	ASK with 847kHz subcarrier / Integral Antenna	32.7	32.8	32.7	0.1
13.560 Perpendicular	ASK with 847kHz subcarrier / Integral Antenna	29.1	29.1	29.1	0.0
<b>Configuration 4</b>					
13.56 Parallel	ASK with 847kHz subcarrier / Integral Antenna	34.1	34.0	34.1	0.1
13.56 Perpendicular	ASK with 847kHz subcarrier / Integral Antenna	29.7	29.8	29.7	0.1
<b>Configuration 5</b>					
13.560 Parallel	ASK with 847kHz subcarrier / Integral Antenna	32.6	32.7	32.6	0.1
13.560 Perpendicular	ASK with 847kHz subcarrier / Integral Antenna	28.8	28.8	28.8	0.0
<b>Configuration 6</b>					
13.559 Parallel	ASK with 847kHz subcarrier / Integral Antenna	33.7	33.7	33.7	0.0
13.559 Perpendicular	ASK with 847kHz subcarrier / Integral Antenna	30.3	30.3	30.3	0.0
<b>Configuration 7</b>					
13.559 Parallel	ASK with 847kHz subcarrier / Integral Antenna	32.3	32.2	32.3	0.1
13.560 Perpendicular	ASK with 847kHz subcarrier / Integral Antenna	29.4	29.4	29.4	0.0
<b>Configuration 8</b>					
13.559 Parallel	ASK with 847kHz subcarrier / Integral Antenna	33.9	33.9	33.9	0.0
13.560 Perpendicular	ASK with 847kHz subcarrier / Integral Antenna	30.3	30.3	30.3	0.0

Test performed using operational mode with the highest output power, representing worst case.

**Parameter Definitions:**


 Measurements performed at input voltage Vnominal  $\pm$  15%.

Parameter	Value
VNominal:	12 VDC
VMinimum:	10.2 VDC
VMaximum:	13.8 VDC


Test Data Summary – Radiated Field Strength Measurement					
Frequency (MHz)	Modulation	Ant. Type	Measured (dBuV/m @ 30m)	Limit (dBuV/m @ 30m)	Results
<b>Configuration 1</b>					
13.560 Parallel	ASK with 847kHz subcarrier	Integral	32.9	$\leq$ 84	Pass
13.560 Perpendicular	ASK with 847kHz subcarrier	Integral	30.1	$\leq$ 84	Pass
<b>Configuration 2</b>					
13.559 Parallel	ASK with 847kHz subcarrier	Integral	34.1	$\leq$ 84	Pass
13.560 Perpendicular	ASK with 847kHz subcarrier	Integral	31.0	$\leq$ 84	Pass
<b>Configuration 3</b>					
13.560 Parallel	ASK with 847kHz subcarrier	Integral	32.8	$\leq$ 84	Pass
13.560 Perpendicular	ASK with 847kHz subcarrier	Integral	29.1	$\leq$ 84	Pass
<b>Configuration 4</b>					
13.560 Parallel	ASK with 847kHz subcarrier	Integral	34.0	$\leq$ 84	Pass
13.560 Perpendicular	ASK with 847kHz subcarrier	Integral	29.8	$\leq$ 84	Pass
<b>Configuration 5</b>					
13.560 Parallel	ASK with 847kHz subcarrier	Integral	32.7	$\leq$ 84	Pass
13.560 Perpendicular	ASK with 847kHz subcarrier	Integral	28.8	$\leq$ 84	Pass

**Test Data Summary – Radiated Field Strength Measurement**


Frequency (MHz)	Modulation	Ant. Type	Measured (dB $\mu$ V/m @ 30m)	Limit (dB $\mu$ V/m @ 30m)	Results
<b>Configuration 6</b>					
13.559 Parallel	ASK with 847kHz subcarrier	Integral	33.7	≤84	Pass
13.559 Perpendicular	ASK with 847kHz subcarrier	Integral	30.3	≤84	Pass
<b>Configuration 7</b>					
13.559 Parallel	ASK with 847kHz subcarrier	Integral	32.2	≤84	Pass
13.560 Perpendicular	ASK with 847kHz subcarrier	Integral	29.4	≤84	Pass
<b>Configuration 8</b>					
13.559 Parallel	ASK with 847kHz subcarrier	Integral	33.9	≤84	Pass
13.560 Perpendicular	ASK with 847kHz subcarrier	Integral	30.3	≤84	Pass

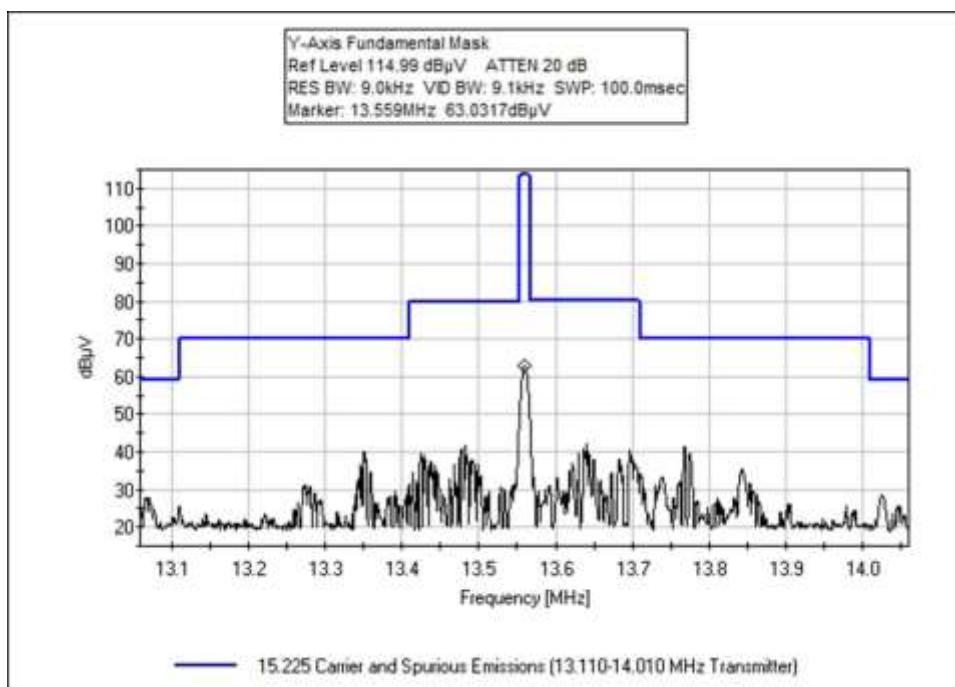**Emissions Mask Data**


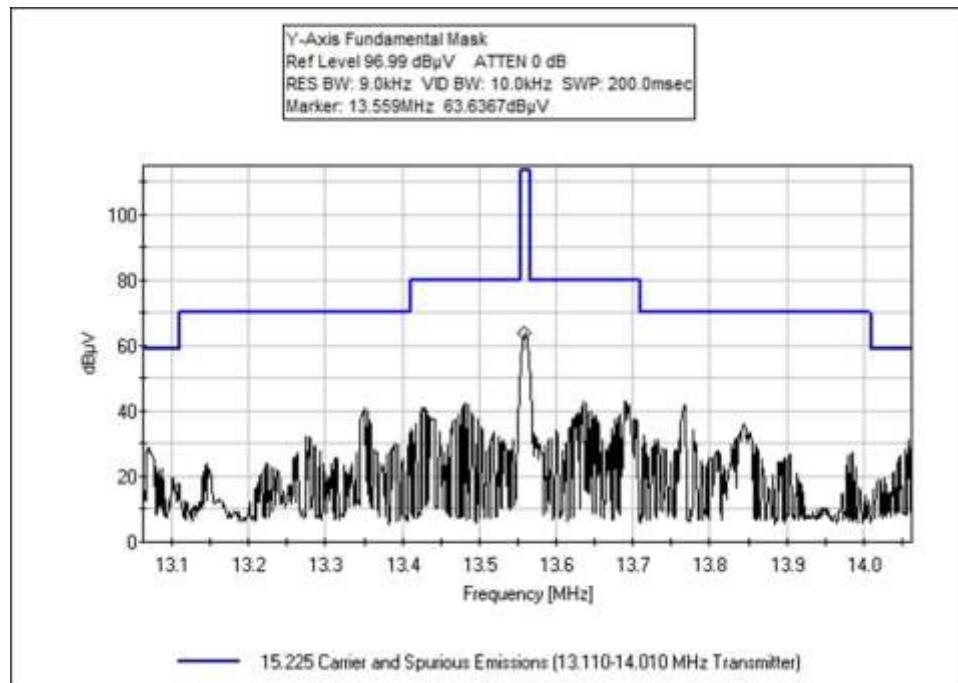
Configuration 1

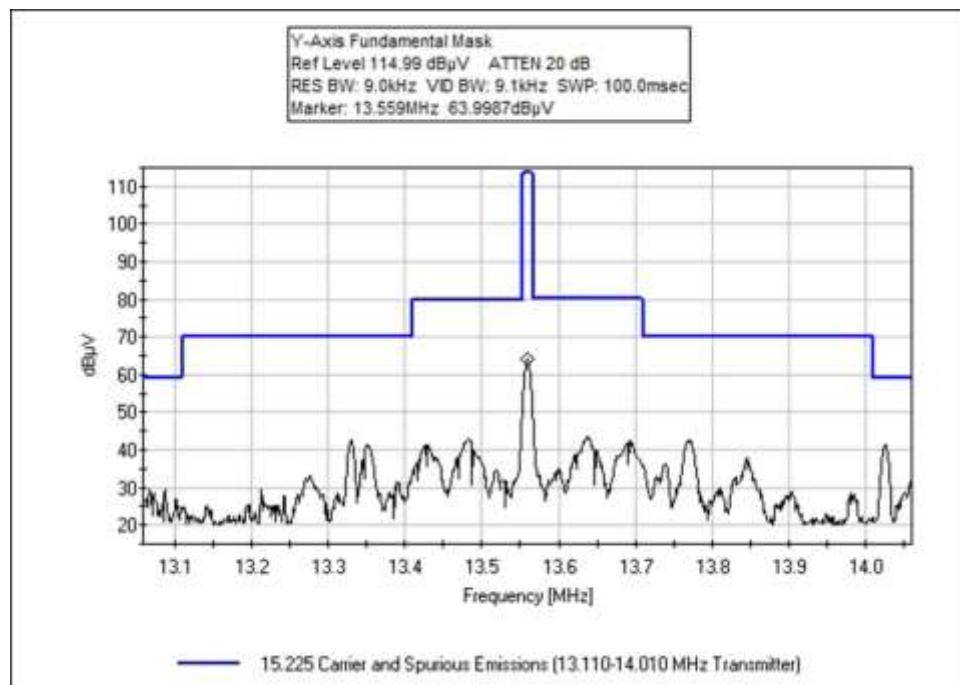


Configuration 2

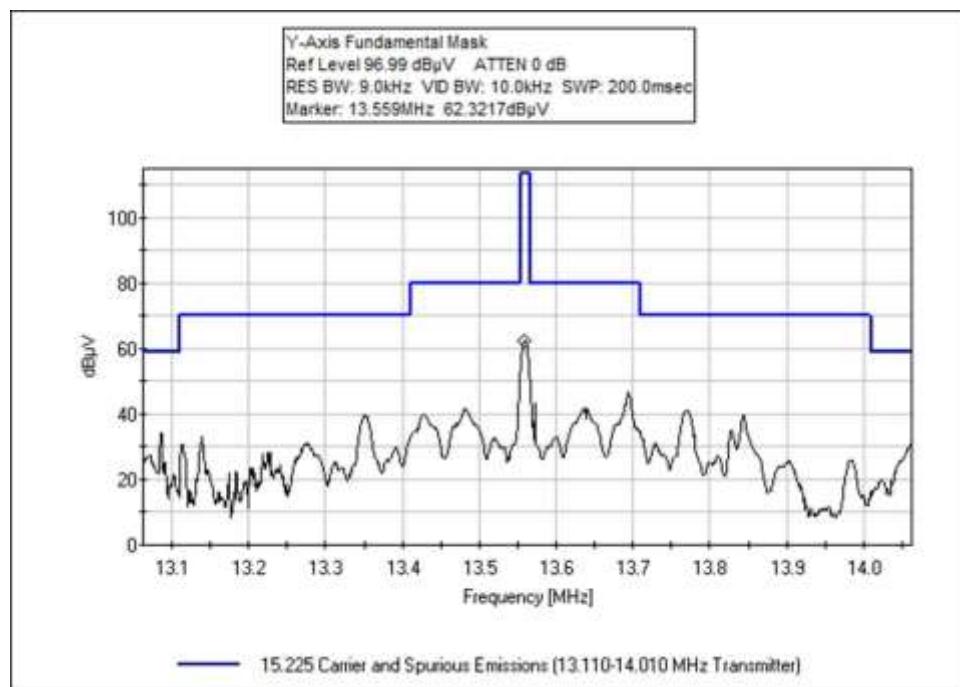


Configuration 3




Configuration 4

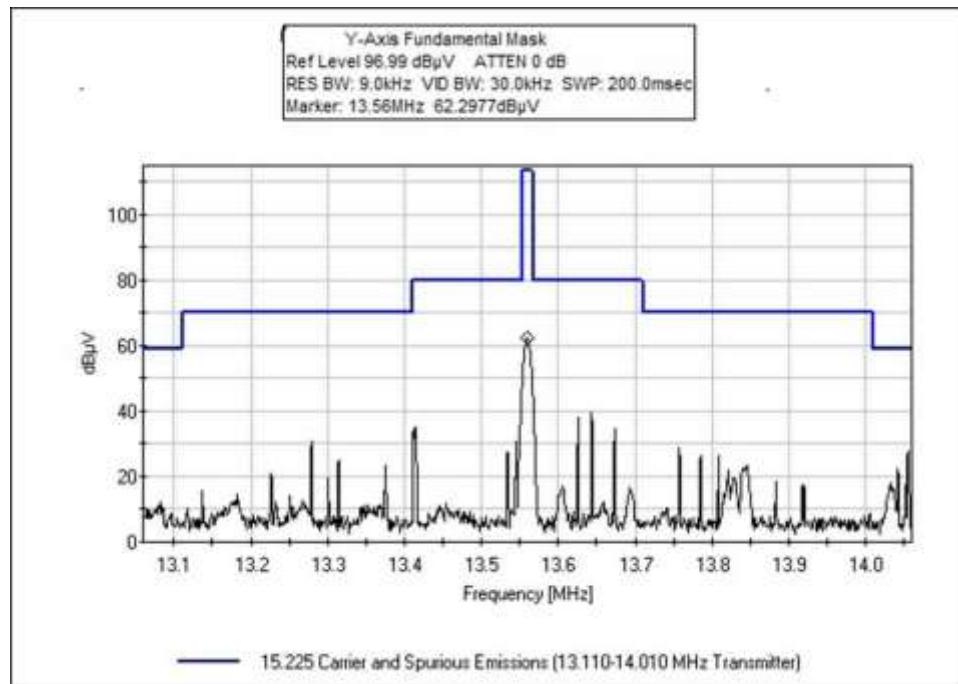


Configuration 5

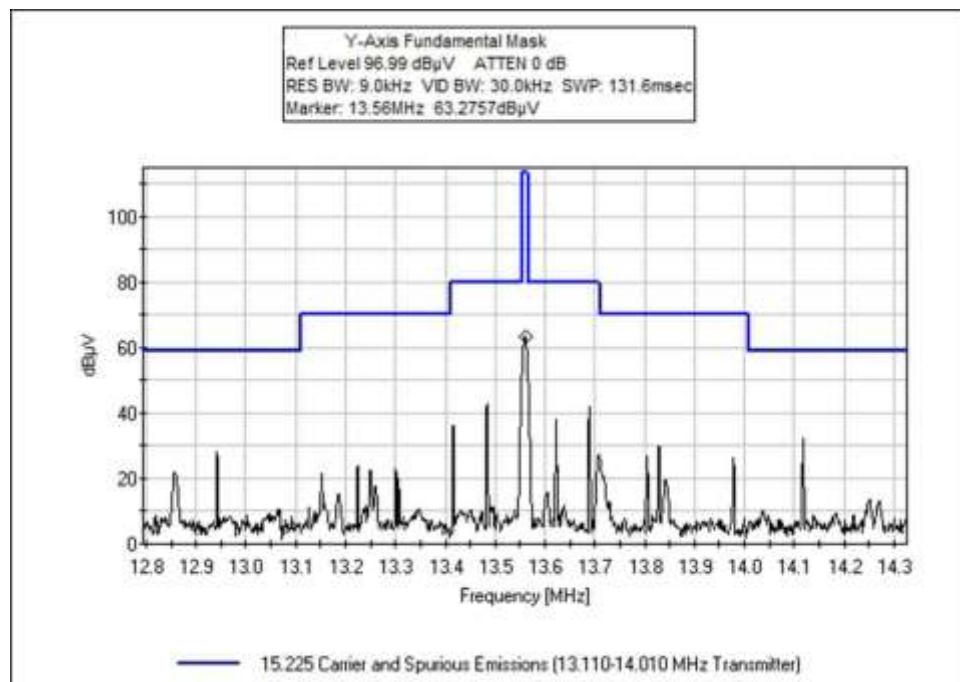

Configuration 6

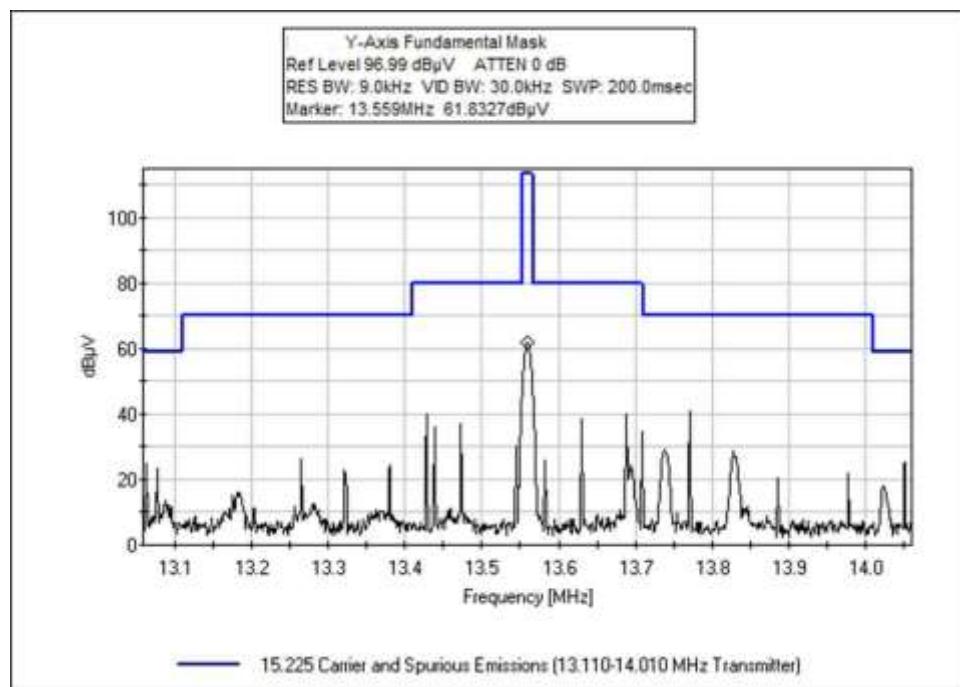

Configuration 7

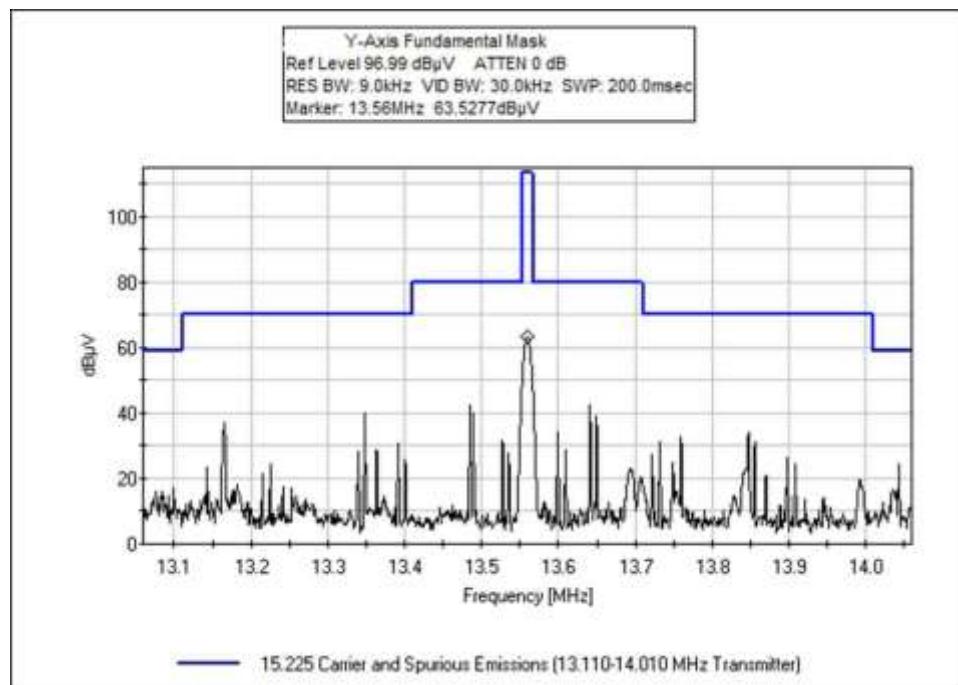

Configuration 8

## Test Setup / Conditions / Data

Test Location: CKC Laboratories Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
 Customer: **WaveLynx Technologies Corporation**  
 Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
 Work Order #: **97757** Date: 4/20/2016  
 Test Type: **Radiated Scan** Time: 17:38:17  
 Tested By: Benny Lovan Sequence#: 1  
 Software: EMITest 5.03.02

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Test Conditions / Notes:***

Radiated Emissions Fundamental Measurements

Temperature: 20°C

Humidity: 40%

Atmospheric Pressure: 97.4 kPa

Method: ANSI C63.10 2013

Modulation: ASK 847kHz Subcarrier


Antenna Type: Integral

Antenna Gain 2 dBi

The EUT is powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.

Measurements will be made in both polarities as well as with the voltage variation of 10.2VDC and 13.8VDC (+/- 15% of nominal).

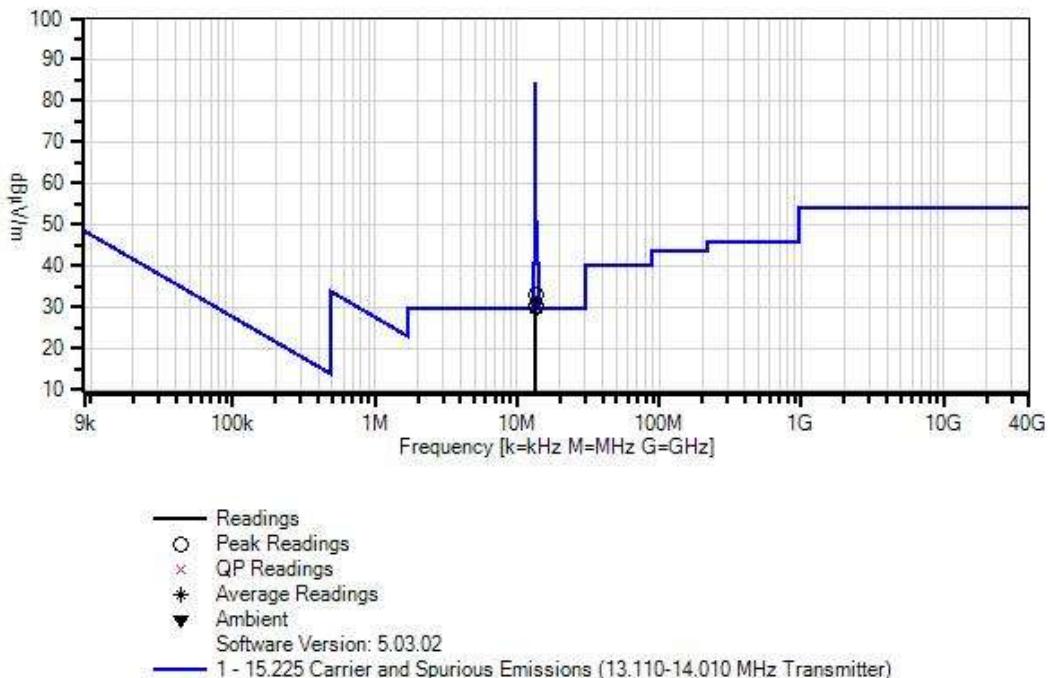WaveLynx Technologies Corporation WO#: 97757 Sequence#: 1 Date: 4/20/2016  
 15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Perpendicular

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02668	Spectrum Analyzer	E4446A	8/14/2015	8/14/2016
T1	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T2	ANSITED 3M	Cable		11/15/2014	11/15/2016
T3	AN00226	Loop Antenna	6502	4/4/2016	4/4/2018

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dBµV	T1 dB	T2 dB	T3 dB	Dist Table	Corr dBµV/m	Spec dBµV/m	Margin dB	Polar
1	13.560M	62.5	+0.1	+0.7	+9.6	-40.0	32.9	84.0	-51.1	Paral 10.2VDC, Y- Axis
2	13.560M	62.5	+0.1	+0.7	+9.6	-40.0	32.9	84.0	-51.1	Paral Nominal 12VDC, Y- Axis
3	13.560M	62.4	+0.1	+0.7	+9.6	-40.0	32.8	84.0	-51.2	Paral 13.8VDC, Y- Axis
4	13.560M	59.8	+0.1	+0.7	+9.6	-40.0	30.2	84.0	-53.8	Perpe 10.2VDC, Y- Axis
5	13.560M	59.7	+0.1	+0.7	+9.6	-40.0	30.1	84.0	-53.9	Perpe Nominal 12VDC, Y- Axis
6	13.560M	59.7	+0.1	+0.7	+9.6	-40.0	30.1	84.0	-53.9	Perpe 13.8VDC, Y- Axis



Test Location: CKC Laboratories Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 4/20/2016  
Test Type: **Radiated Scan** Time: 16:37:24  
Tested By: Benny Lovan Sequence#: 2  
Software: EMITest 5.03.02

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 2			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 2			

***Test Conditions / Notes:***

Radiated Emissions Fundamental Measurements

Temperature: 20°C

Humidity: 40%

Atmospheric Pressure: 97.4 kPa

Method: ANSI C63.10 2013

Modulation: ASK 847kHz Subcarrier


Antenna Type: Integral

Antenna Gain 2 dBi

The EUT is powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.

Measurements will be made in both polarities as well as with the voltage variation of 10.2VDC and 13.8VDC (+/- 15% of nominal).

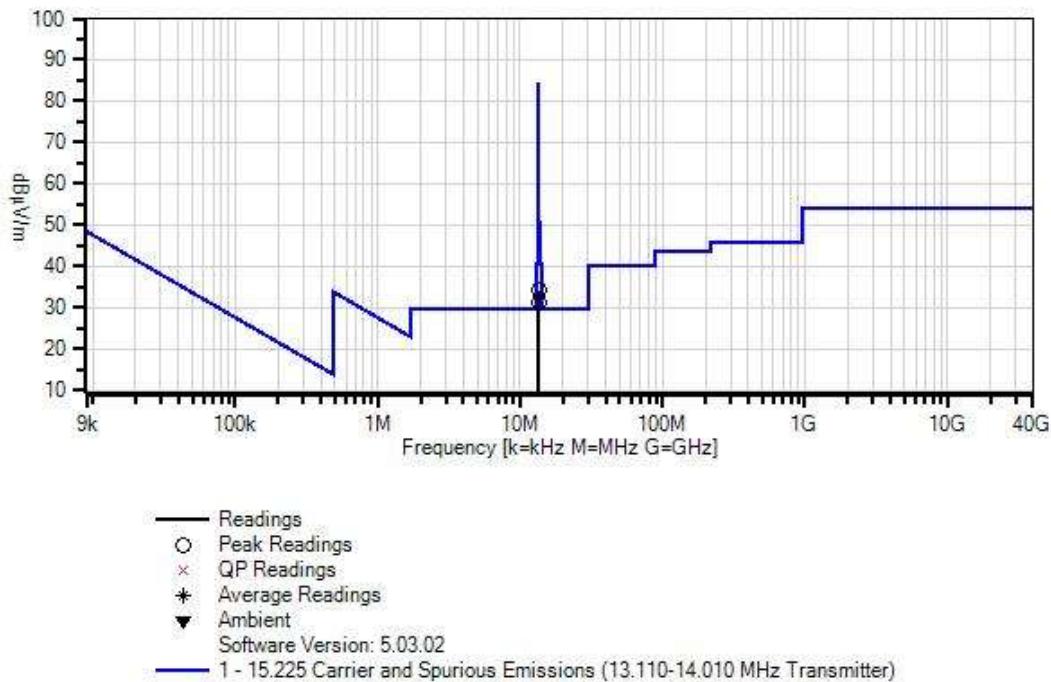WaveLynx Technologies Corporation WO#: 97757 Sequence#: 2 Date: 4/20/2016  
 15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Perpendicular

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02668	Spectrum Analyzer	E4446A	8/14/2015	8/14/2016
T1	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T2	ANSITED 3M	Cable		11/15/2014	11/15/2016
T3	AN00226	Loop Antenna	6502	4/4/2016	4/4/2018

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	13.559M	63.7	+0.1	+0.7	+9.6	-40.0	34.1	84.0	-49.9	Paral 13.8VDC, Y- Axis
2	13.560M	63.7	+0.1	+0.7	+9.6	-40.0	34.1	84.0	-49.9	Paral 10.2VDC, Y- Axis
3	13.559M	63.7	+0.1	+0.7	+9.6	-40.0	34.1	84.0	-49.9	Paral Nominal 12VDC, Y- Axis
4	13.559M	60.7	+0.1	+0.7	+9.6	-40.0	31.1	84.0	-52.9	Perpe 10.2VDC, Y- Axis
5	13.559M	60.7	+0.1	+0.7	+9.6	-40.0	31.1	84.0	-52.9	Perpe 13.8VDC, Y- Axis
6	13.560M	60.6	+0.1	+0.7	+9.6	-40.0	31.0	84.0	-53.0	Perpe Nominal 12VDC, Y- Axis



Test Location: CKC Laboratories Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 4/25/2016  
Test Type: **Radiated Scan** Time: 14:44:38  
Tested By: Benny Lovan Sequence#: 3  
Software: EMITest 5.03.02

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 3			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 3			

***Test Conditions / Notes:***

Radiated Emissions Fundamental Measurements

Temperature: 13°C

Humidity: 76%

Atmospheric Pressure: 97.3 kPa

Method: ANSI C63.10 2013

Modulation: ASK 847kHz Subcarrier

Antenna Type: Integral


Antenna Gain 2 dBi

The EUT is powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.

Measurements will be made in both polarities as well as with the voltage variation of 10.2VDC and 13.8VDC (+/- 15% of nominal).

WaveLynx Technologies Corporation WO#: 97757 Sequence#: 3 Date: 4/25/2016  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Parallel

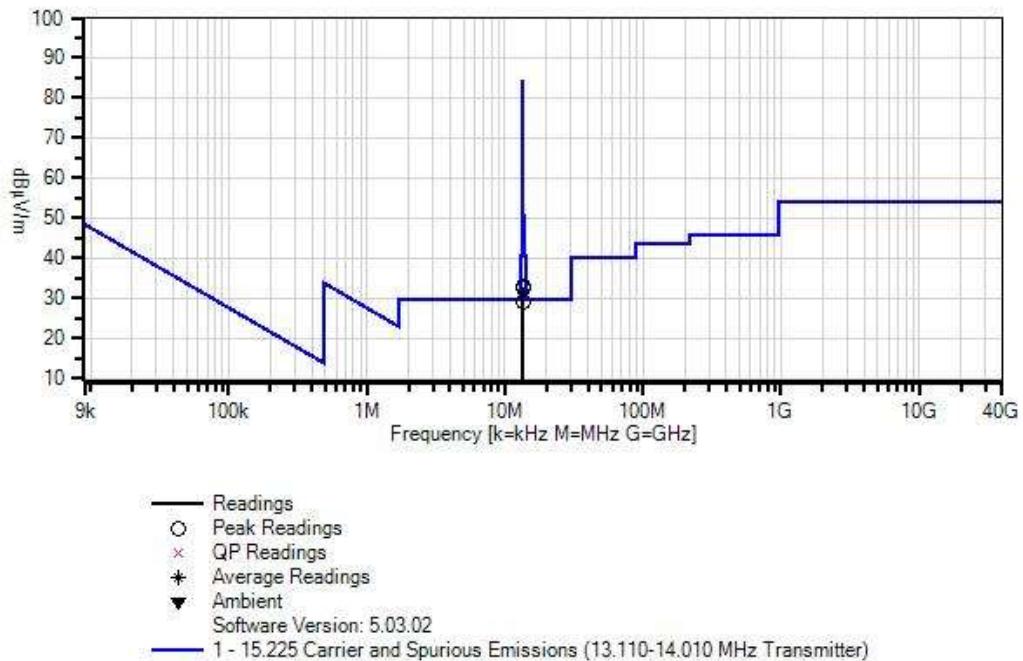

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02668	Spectrum Analyzer	E4446A	8/14/2015	8/14/2016
T1	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T2	ANSITED 3M	Cable		11/15/2014	11/15/2016
T3	AN00226	Loop Antenna	6502	4/4/2016	4/4/2018

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	13.559M	62.4	+0.1	+0.7	+9.6	-40.0	32.8	84.0	-51.2	Paral Nominal 12VDC, Parallel, Y-Axis
2	13.559M	62.3	+0.1	+0.7	+9.6	-40.0	32.7	84.0	-51.3	Paral 10.2VDC, Parallel, Y-Axis
3	13.559M	62.3	+0.1	+0.7	+9.6	-40.0	32.7	84.0	-51.3	Paral 13.8VDC, Parallel, Y-Axis
4	13.559M	58.7	+0.1	+0.7	+9.6	-40.0	29.1	84.0	-54.9	Perpe 13.8VDC, Parallel, Y-Axis
5	13.560M	58.7	+0.1	+0.7	+9.6	-40.0	29.1	84.0	-54.9	Perpe Nominal 12VDC, Parallel, Y-Axis
6	13.560M	58.7	+0.1	+0.7	+9.6	-40.0	29.1	84.0	-54.9	Perpe 10.2VDC, Parallel, Y-Axis



Test Location: CKC Laboratories Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 4/25/2016  
Test Type: **Radiated Scan** Time: 11:50:37  
Tested By: Benny Lovan Sequence#: 4  
Software: EMITest 5.03.02

**Equipment Tested:**


Device	Manufacturer	Model #	S/N
Configuration 4			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 4			

**Test Conditions / Notes:**

Radiated Emissions Fundamental Measurements
Temperature: 13°C
Humidity: 76%
Atmospheric Pressure: 97.3 kPa
Method: ANSI C63.10 2013
Modulation: ASK 847kHz Subcarrier
Antenna Type: Integral
Antenna Gain 2 dBi
The EUT is powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.
The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.
Measurements will be made in both polarities as well as with the voltage variation of 10.2VDC and 13.8VDC (+/- 15% of nominal).

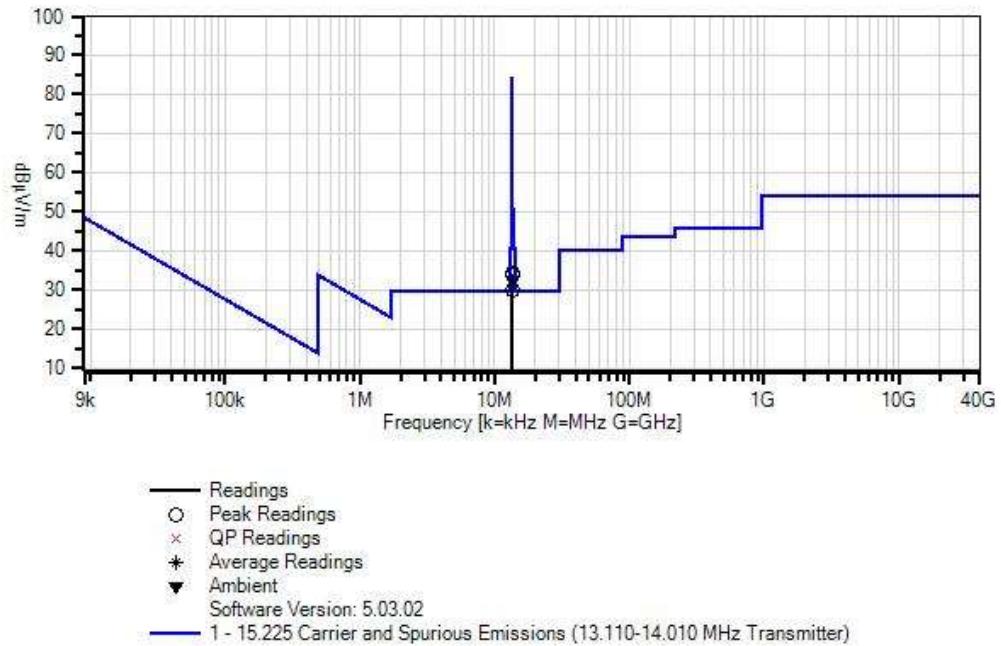WaveLynx Technologies Corporation WO#: 97757 Sequence#: 4 Date: 4/25/2016  
 15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Parallel

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02668	Spectrum Analyzer	E4446A	8/14/2015	8/14/2016
T1	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T2	ANSITED 3M	Cable		11/15/2014	11/15/2016
T3	AN00226	Loop Antenna	6502	4/4/2016	4/4/2018

**Measurement Data:**

Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	13.560M	63.7	+0.1	+0.7	+9.6	-40.0	34.1	84.0	-49.9	Paral 13.8VDC, Y- Axis
2	13.560M	63.7	+0.1	+0.7	+9.6	-40.0	34.1	84.0	-49.9	Paral 10.2VDC, Y- Axis
3	13.560M	63.6	+0.1	+0.7	+9.6	-40.0	34.0	84.0	-50.0	Paral Nominal 12VDC, Y- Axis
4	13.560M	59.4	+0.1	+0.7	+9.6	-40.0	29.8	84.0	-54.2	Perpe Nominal 12VDC, Y- Axis
5	13.560M	59.3	+0.1	+0.7	+9.6	-40.0	29.7	84.0	-54.3	Perpe 13.8VDC, Y- Axis
6	13.560M	59.3	+0.1	+0.7	+9.6	-40.0	29.7	84.0	-54.3	Perpe 10.2VDC, Y- Axis



Test Location: CKC Laboratories Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 4/27/2016  
Test Type: **Radiated Scan** Time: 11:53:42  
Tested By: Benny Lovan Sequence#: 5  
Software: EMITest 5.03.02

**Equipment Tested:**


Device	Manufacturer	Model #	S/N
Configuration 5			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 5			

**Test Conditions / Notes:**

Radiated Emissions Fundamental Measurements
Temperature: 13°C
Humidity: 76%
Atmospheric Pressure: 97.3 kPa
Method: ANSI C63.10 2013
Modulation: ASK 847kHz Subcarrier
Antenna Type: Integral
Antenna Gain 2 dBi
The EUT is powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.
The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.
Measurements will be made in both polarities as well as with the voltage variation of 10.2VDC and 13.8VDC (+/- 15% of nominal).

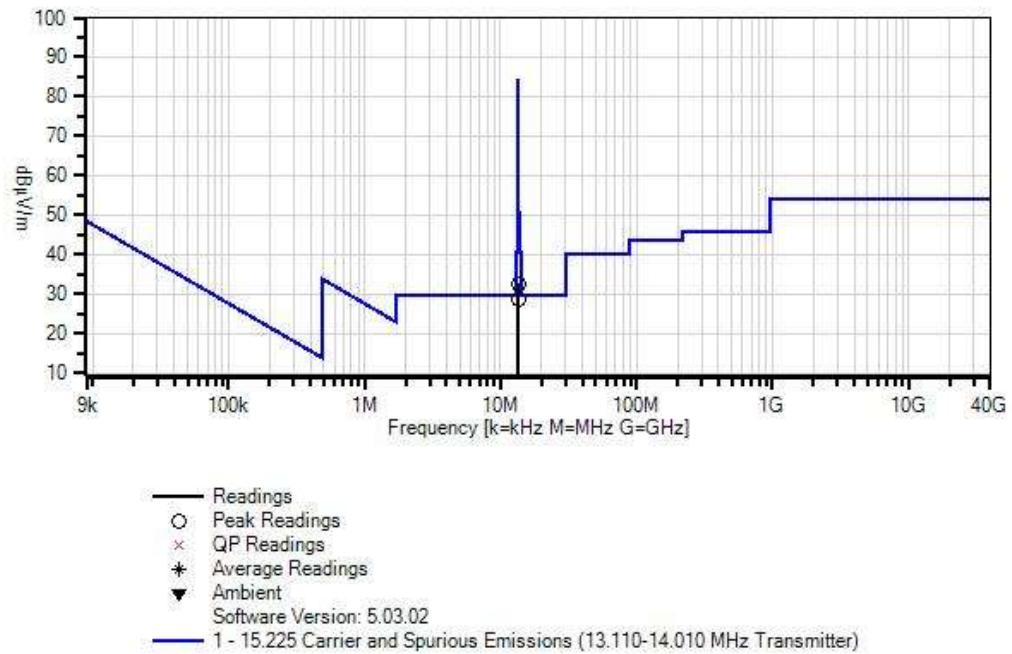WaveLynx Technologies Corporation WO#: 97757 Sequence#: 5 Date: 4/27/2016  
 15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Perpendicular

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02668	Spectrum Analyzer	E4446A	8/14/2015	8/14/2016
T1	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T2	ANSITED 3M	Cable		11/15/2014	11/15/2016
T3	AN00226	Loop Antenna	6502	4/4/2016	4/4/2018

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	13.560M	62.3	+0.1	+0.7	+9.6	-40.0	32.7	84.0	-51.3	Paral Nominal 12VDC, Y- Axis
2	13.560M	62.2	+0.1	+0.7	+9.6	-40.0	32.6	84.0	-51.4	Paral 13.8VDC, Y- Axis
3	13.560M	62.2	+0.1	+0.7	+9.6	-40.0	32.6	84.0	-51.4	Paral 10.2VDC, Y- Axis
4	13.560M	58.4	+0.1	+0.7	+9.6	-40.0	28.8	84.0	-55.2	Perpe Nominal 12VDC, Y- Axis
5	13.560M	58.4	+0.1	+0.7	+9.6	-40.0	28.8	84.0	-55.2	Perpe 10.2VDC, Y- Axis
6	13.560M	58.4	+0.1	+0.7	+9.6	-40.0	28.8	84.0	-55.2	Perpe 13.8VDC, Y- Axis



Test Location: CKC Laboratories Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 4/25/2016  
Test Type: **Radiated Scan** Time: 16:06:43  
Tested By: Benny Lovan Sequence#: 6  
Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 6			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 6			

**Test Conditions / Notes:**

Radiated Emissions Fundamental Measurements

Temperature: 13°C

Humidity: 76%

Atmospheric Pressure: 97.3 kPa

Method: ANSI C63.10 2013

Modulation: ASK 847kHz Subcarrier


Antenna Type: Integral

Antenna Gain 2 dBi

The EUT is powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.

Measurements will be made in both polarities as well as with the voltage variation of 10.2VDC and 13.8VDC (+/- 15% of nominal).

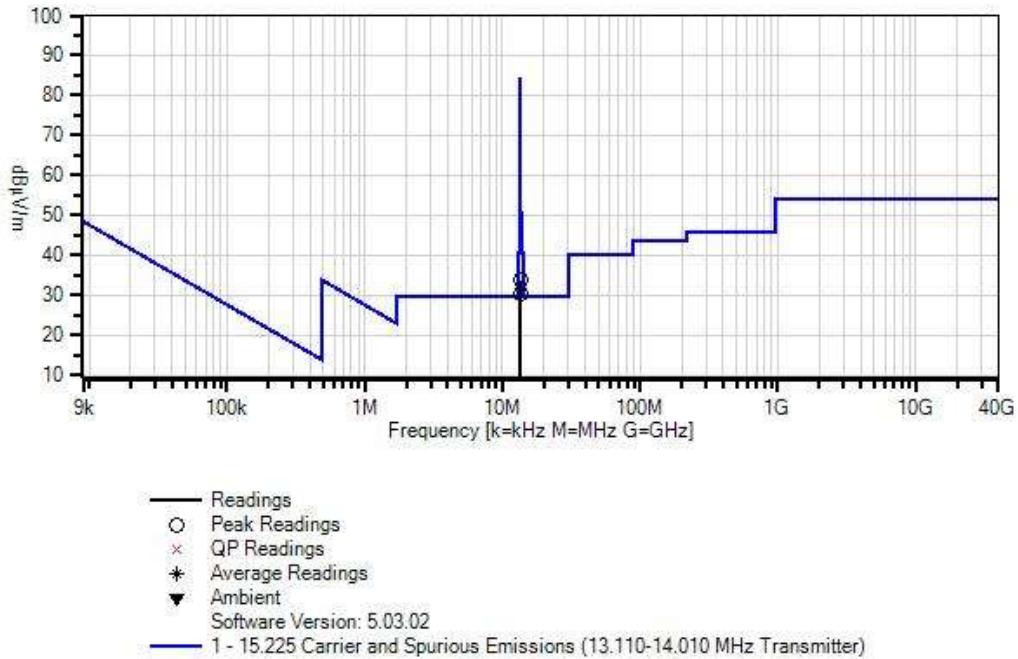WaveLynx Technologies Corporation WO#: 97757 Sequence#: 6 Date: 4/25/2016  
 15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Parallel

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02668	Spectrum Analyzer	E4446A	8/14/2015	8/14/2016
T1	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T2	ANSITED 3M	Cable		11/15/2014	11/15/2016
T3	AN00226	Loop Antenna	6502	4/4/2016	4/4/2018

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	13.560M	63.3	+0.1	+0.7	+9.6	-40.0	33.7	84.0	-50.3	Paral 13.8VDC, Y- Axis
2	13.559M	63.3	+0.1	+0.7	+9.6	-40.0	33.7	84.0	-50.3	Paral 10.2VDC, Y- Axis
3	13.559M	63.3	+0.1	+0.7	+9.6	-40.0	33.7	84.0	-50.3	Paral Nominal 12VDC, Y- Axis
4	13.559M	59.9	+0.1	+0.7	+9.6	-40.0	30.3	84.0	-53.7	Perpe Nominal 12VDC, Y- Axis
5	13.560M	59.9	+0.1	+0.7	+9.6	-40.0	30.3	84.0	-53.7	Perpe 10.2VDC, Y- Axis
6	13.560M	59.9	+0.1	+0.7	+9.6	-40.0	30.3	84.0	-53.7	Perpe 13.8VDC, Y- Axis



Test Location: CKC Laboratories Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 4/27/2016  
Test Type: **Radiated Scan** Time: 13:57:32  
Tested By: Benny Lovan Sequence#: 7  
Software: EMITest 5.03.02

**Equipment Tested:**


Device	Manufacturer	Model #	S/N
Configuration 7			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 7			

**Test Conditions / Notes:**

Radiated Emissions Fundamental Measurements
Temperature: 16.2°C
Humidity: 36%
Atmospheric Pressure: 97.3 kPa
Method: ANSI C63.10 2013
Modulation: ASK 847kHz Subcarrier
Antenna Type: Integral
Antenna Gain 2 dBi
The EUT is powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.
The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.
Measurements will be made in both polarities as well as with the voltage variation of 10.2VDC and 13.8VDC (+/- 15% of nominal).

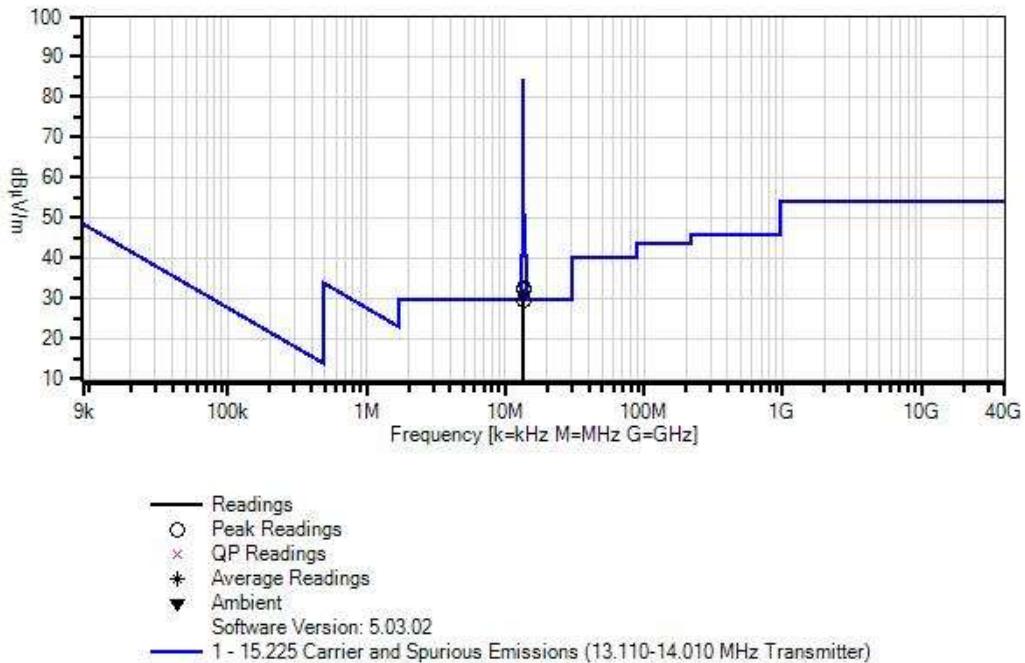WaveLynx Technologies Corporation WO#: 97757 Sequence#: 7 Date: 4/27/2016  
 15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Parallel

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02668	Spectrum Analyzer	E4446A	8/14/2015	8/14/2016
T1	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T2	ANSITED 3M	Cable		11/15/2014	11/15/2016
T3	AN00226	Loop Antenna	6502	4/4/2016	4/4/2018

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	13.560M	61.9	+0.1	+0.7	+9.6	-40.0	32.3	84.0	-51.7	Paral 13.8Vdc, Y-Axis
2	13.559M	61.9	+0.1	+0.7	+9.6	-40.0	32.3	84.0	-51.7	Paral 10.2Vdc, Y-Axis
3	13.559M	61.8	+0.1	+0.7	+9.6	-40.0	32.2	84.0	-51.8	Paral Nominal 12.0Vdc, Y-Axis
4	13.560M	59.0	+0.1	+0.7	+9.6	-40.0	29.4	84.0	-54.6	Perpe Nominal 12.0Vdc, Y-Axis
5	13.560M	59.0	+0.1	+0.7	+9.6	-40.0	29.4	84.0	-54.6	Perpe 13.8Vdc, Y-Axis
6	13.560M	59.0	+0.1	+0.7	+9.6	-40.0	29.4	84.0	-54.6	Perpe 10.2Vdc, Y-Axis



Test Location: CKC Laboratories Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 4/27/2016  
Test Type: **Radiated Scan** Time: 12:47:11  
Tested By: Benny Lovan Sequence#: 8  
Software: EMITest 5.03.02

**Equipment Tested:**


Device	Manufacturer	Model #	S/N
Configuration 8			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 8			

**Test Conditions / Notes:**

Radiated Emissions Fundamental Measurements
Temperature: 16.2°C
Humidity: 42%
Atmospheric Pressure: 97.3 kPa
Method: ANSI C63.10 2013
Modulation: ASK 847kHz Subcarrier
Antenna Type: Integral
Antenna Gain 2 dBi
The EUT is powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.
The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.
Measurements will be made in both polarities as well as with the voltage variation of 10.2VDC and 13.8VDC (+/- 15% of nominal).

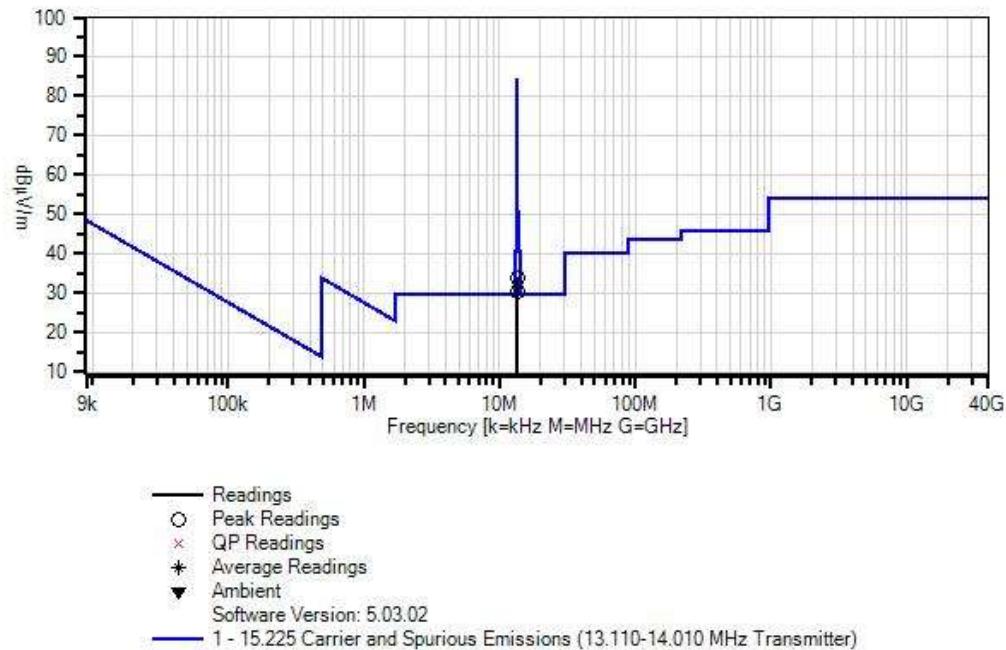WaveLynx Technologies Corporation WO#: 97757 Sequence#: 8 Date: 4/27/2016  
 15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Parallel

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02668	Spectrum Analyzer	E4446A	8/14/2015	8/14/2016
T1	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T2	ANSITED 3M	Cable		11/15/2014	11/15/2016
T3	AN00226	Loop Antenna	6502	4/4/2016	4/4/2018

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	13.560M	63.5	+0.1	+0.7	+9.6		-40.0	33.9	84.0	-50.1	Paral 13.8VDC, Y- Axis
2	13.559M	63.5	+0.1	+0.7	+9.6		-40.0	33.9	84.0	-50.1	Paral 10.2VDC, Y- Axis
3	13.559M	63.5	+0.1	+0.7	+9.6		-40.0	33.9	84.0	-50.1	Paral Nominal 12VDC, Y- Axis
4	13.560M	59.9	+0.1	+0.7	+9.6		-40.0	30.3	84.0	-53.7	Perpe Nominal 12VDC, Y- Axis
5	13.559M	59.9	+0.1	+0.7	+9.6		-40.0	30.3	84.0	-53.7	Perpe 10.2VDC, Y- Axis
6	13.559M	59.9	+0.1	+0.7	+9.6		-40.0	30.3	84.0	-53.7	Perpe 13.8VDC, Y- Axis

Test Setup Photo



## 15.225(e) Frequency Stability

Test Setup/Conditions			
Test Location:	Mariposa Lab A	Test Engineer:	Benny Lovan and Skip Doyle
Test Method:	ANSI C63.10 (2013)	Test Date(s):	5/12/2016
Configuration:	3, 4, 7 and 8		
Test Setup:	Configurations 4 and 8 were tested simultaneously within the temperature chamber. Once testing was complete, the two units were replaced with Configurations 3 and 7. The manufacturer declares that Configurations 3, 4, 7 and 8 are worse case and testing performed on these would satisfy the testing for configurations 1, 2, 5 and 6.		

Environmental Conditions			
Temperature (°C)	19	Relative Humidity (%):	59

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
03197	Multimeter	Extech	MM570A	9/14/2014	9/14/2016
02668	Spectrum Analyzer	Agilent	E4446A	8/14/2015	8/14/2016
01879	Temperature Chamber	Thermotron	S-1.2 Min.	12/5/2014	12/5/2016
00170	Loop Antenna	Solar	7334-1	NCR	NCR

NCR = No Calibration Required

**Test Data Summary – Configuration 3**

Temperature (°C)	Voltage	Frequency (MHz)	Deviation (%)	Limit (%)	Results
-20	V <sub>Nominal</sub>	13.5598	-0.00147	±0.01	Pass
-10	V <sub>Nominal</sub>	13.5599	-0.00074	±0.01	
0	V <sub>Nominal</sub>	13.5598	-0.00147	±0.01	
10	V <sub>Nominal</sub>	13.5597	-0.00221	±0.01	
20	V <sub>Minimum</sub>	13.5598	-0.00147	±0.01	
20	V <sub>Nominal</sub>	13.5598	-0.00147	±0.01	
20	V <sub>Maximum</sub>	13.5598	-0.00147	±0.01	
30	V <sub>Nominal</sub>	13.5598	-0.00147	±0.01	
40	V <sub>Nominal</sub>	13.5597	-0.00221	±0.01	
50	V <sub>Nominal</sub>	13.5598	-0.00147	±0.01	
Nominal Frequency:		13.560000			

**Test Data Summary – Configuration 4**

Temperature (°C)	Voltage	Frequency (MHz)	Deviation (%)	Limit (%)	Results
-20	V <sub>Nominal</sub>	13.5597	-0.00221	±0.01	Pass
-10	V <sub>Nominal</sub>	13.5597	-0.00221	±0.01	
0	V <sub>Nominal</sub>	13.5596	-0.00295	±0.01	
10	V <sub>Nominal</sub>	13.5597	-0.00221	±0.01	
20	V <sub>Minimum</sub>	13.5596	-0.00295	±0.01	
20	V <sub>Nominal</sub>	13.5595	-0.00369	±0.01	
20	V <sub>Maximum</sub>	13.5596	-0.00295	±0.01	
30	V <sub>Nominal</sub>	13.5596	-0.00295	±0.01	
40	V <sub>Nominal</sub>	13.5595	-0.00369	±0.01	
50	V <sub>Nominal</sub>	13.5595	-0.00369	±0.01	
Nominal Frequency:		13.560000			

**Test Data Summary – Configuration 7**

Temperature (°C)	Voltage	Frequency (MHz)	Deviation (%)	Limit (%)	Results
-20	V <sub>Nominal</sub>	13.5597	-0.00221	±0.01	Pass
-10	V <sub>Nominal</sub>	13.5597	-0.00221	±0.01	
0	V <sub>Nominal</sub>	13.5596	-0.00295	±0.01	
10	V <sub>Nominal</sub>	13.5596	-0.00295	±0.01	
20	V <sub>Minimum</sub>	13.5595	-0.00369	±0.01	
20	V <sub>Nominal</sub>	13.5596	-0.00295	±0.01	
20	V <sub>Maximum</sub>	13.5596	-0.00295	±0.01	
30	V <sub>Nominal</sub>	13.5596	-0.00295	±0.01	
40	V <sub>Nominal</sub>	13.5595	-0.00369	±0.01	
50	V <sub>Nominal</sub>	13.5594	-0.00442	±0.01	
Nominal Frequency:		13.560000			

**Test Data Summary – Configuration 8**

Temperature (°C)	Voltage	Frequency (MHz)	Deviation (%)	Limit (%)	Results
-20	V <sub>Nominal</sub>	13.5596	-0.00295	±0.01	Pass
-10	V <sub>Nominal</sub>	13.5596	-0.00295	±0.01	
0	V <sub>Nominal</sub>	13.5596	-0.00295	±0.01	
10	V <sub>Nominal</sub>	13.5594	-0.00442	±0.01	
20	V <sub>Minimum</sub>	13.5595	-0.00369	±0.01	
20	V <sub>Nominal</sub>	13.5595	-0.00369	±0.01	
20	V <sub>Maximum</sub>	13.5594	-0.00442	±0.01	
30	V <sub>Nominal</sub>	13.5594	-0.00442	±0.01	
40	V <sub>Nominal</sub>	13.5594	-0.00442	±0.01	
50	V <sub>Nominal</sub>	13.5594	-0.00442	±0.01	
Nominal Frequency:		13.560000			

**Parameter Definitions:**

 Measurements performed at input voltage V<sub>Nominal</sub> ± 15%.

Parameter	Value
V <sub>Nominal</sub> :	12VDC
V <sub>Minimum</sub> :	10.2VDC
V <sub>Maximum</sub> :	13.8VDC

**Test Setup Photos**





## 15.225(d) Radiated Emissions

### Test Setup / Conditions / Data

Test Location: CKC Laboratories Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
 Customer: **WaveLynx Technologies Corporation**  
 Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
 Work Order #: **97757** Date: 5/4/2016  
 Test Type: **Radiated Scan** Time: 16:37:07  
 Tested By: Benny Lovan Sequence#: 9  
 Software: EMITest 5.03.02

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 11			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 11			

***Test Conditions / Notes:***

Radiated Spurious Emissions Measurements

Temperature: 22°C

Humidity: 41%

Atmospheric Pressure: 97.1 kPa

Frequency Range: 9kHz – 30MHz

Modulation: ASK with an 847kHz Subcarrier

Antenna Type: Integral


Antenna Gain 2 dBi

Transmit Frequency: 13.56MHz

The EUTs are powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz

WaveLynx Technologies Corporation WO#: 97757 Sequence#: 9 Date: 5/4/2016  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Perpendicular

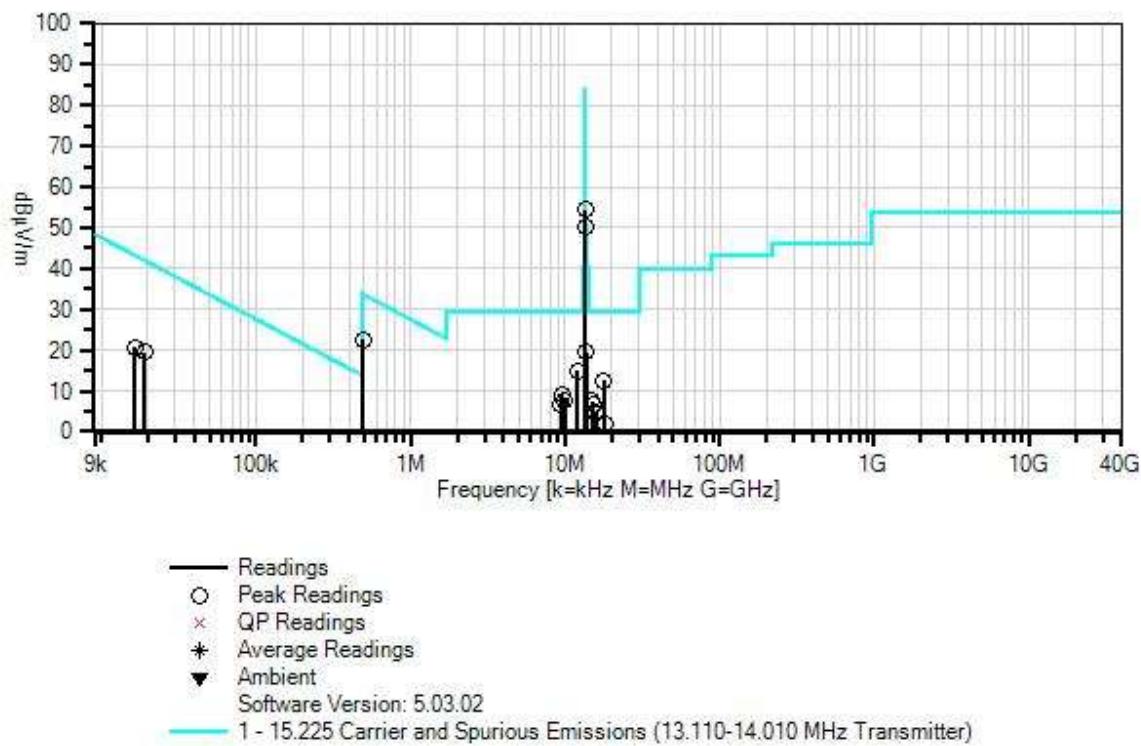

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T2	AN00226	Loop Antenna	6502	4/4/2016	4/4/2018
	AN02111	Spectrum Analyzer	8593EM	6/4/2015	6/4/2016
T3	ANMD3M	Cable		3/17/2016	3/17/2018
T4	ANP06229	Cable	CXTA04A-50	3/17/2016	3/17/2018

**Measurement Data:** Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	494.600k	32.6	+0.0	+9.7	+0.1	+0.1	-20.0	22.5	33.7	-11.2	Perpe
2	11.954M	24.4	+0.1	+9.7	+0.4	+0.3	-20.0	14.9	29.5	-14.6	Paral
3	17.739M	22.9	+0.1	+8.7	+0.5	+0.4	-20.0	12.6	29.5	-16.9	Paral
4	9.477M	18.6	+0.1	+9.8	+0.3	+0.3	-20.0	9.1	29.5	-20.4	Paral
5	9.981M	17.2	+0.1	+9.8	+0.4	+0.3	-20.0	7.8	29.5	-21.7	Paral
6	15.002M	17.1	+0.1	+9.6	+0.4	+0.4	-20.0	7.6	29.5	-21.9	Paral
7	16.400k	46.7	+0.0	+14.1	+0.0	+0.0	-40.0	20.8	43.3	-22.5	Perpe
8	18.900k	45.9	+0.0	+13.5	+0.0	+0.0	-40.0	19.4	42.1	-22.7	Paral
9	9.352M	16.1	+0.1	+9.8	+0.3	+0.3	-20.0	6.6	29.5	-22.9	Paral
10	15.232M	16.1	+0.1	+9.5	+0.4	+0.4	-20.0	6.5	29.5	-23.0	Paral
11	15.790M	14.7	+0.1	+9.3	+0.4	+0.4	-20.0	4.9	29.5	-24.6	Perpe
12	17.930M	12.0	+0.1	+8.7	+0.5	+0.4	-20.0	1.7	29.5	-27.8	Perpe
13	13.559M	64.0	+0.1	+9.6	+0.4	+0.4	-20.0	54.5	84.0	-29.5	Paral
											Fundamental
14	13.652M	29.0	+0.1	+9.6	+0.4	+0.4	-20.0	19.5	50.5	-31.0	Perpe
15	13.560M	59.6	+0.1	+9.6	+0.4	+0.4	-20.0	50.1	84.0	-33.9	Perpe
											Fundamental



Test Location: CKC Laboratories Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 5/4/2016  
Test Type: **Radiated Scan** Time: 17:06:55  
Tested By: Benny Lovan Sequence#: 10  
Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 12			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 12			

**Test Conditions / Notes:**

Radiated Spurious Emissions Measurements

Temperature: 22°C

Humidity: 41%

Atmospheric Pressure: 97.1 kPa

Frequency Range: 9kHz – 30MHz

Modulation: ASK with an 847kHz Subcarrier

Antenna Type: Integral


Antenna Gain 2 dBi

Transmit Frequency: 13.56MHz

The EUTs are powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz

WaveLynx Technologies Corporation WO#: 97757 Sequence#: 10 Date: 5/4/2016  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Parallel

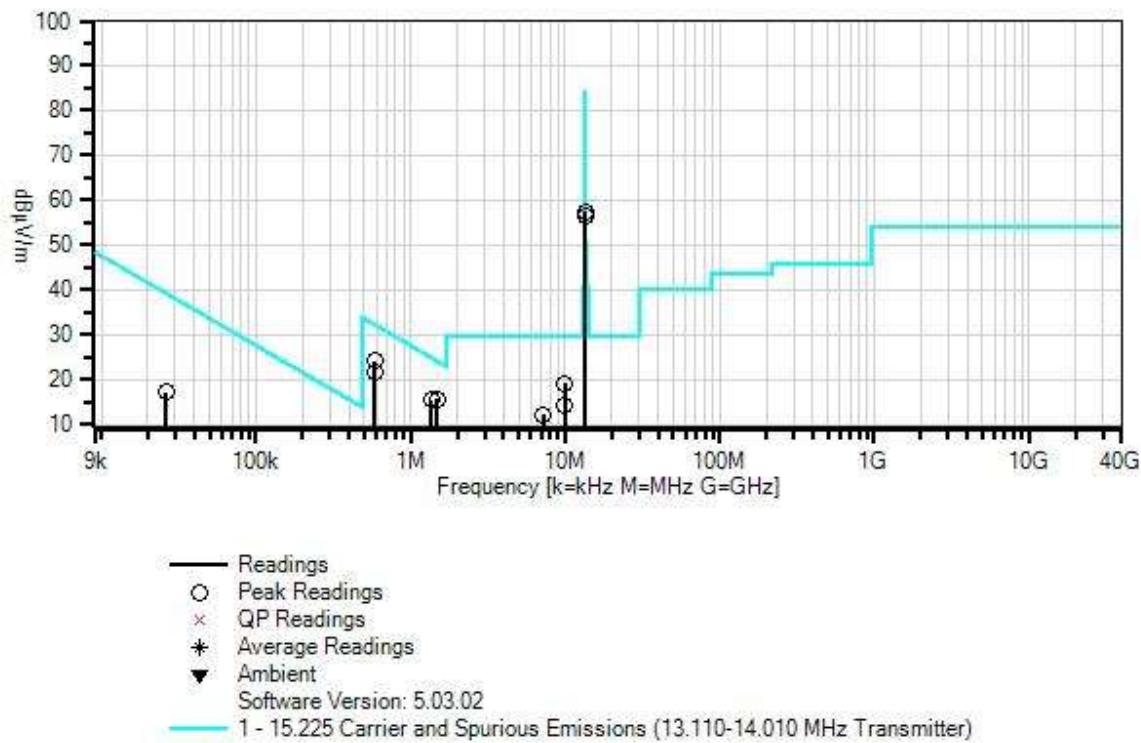

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T2	AN00226	Loop Antenna	6502	4/4/2016	4/4/2018
	AN02111	Spectrum Analyzer	8593EM	6/4/2015	6/4/2016
T3	ANMD3M	Cable		3/17/2016	3/17/2018
T4	ANP06229	Cable	CXTA04A-50	3/17/2016	3/17/2018

**Measurement Data:** Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	586.300k	34.0	+0.0	+10.0	+0.1	+0.1	-20.0	24.2	32.2	-8.0	Perpe
2	1.484M	25.4	+0.0	+10.1	+0.1	+0.1	-20.0	15.7	24.1	-8.4	Perpe
3	1.365M	25.2	+0.0	+10.1	+0.1	+0.1	-20.0	15.5	24.8	-9.3	Perpe
4	10.003M	28.5	+0.1	+9.8	+0.4	+0.3	-20.0	19.1	29.5	-10.4	Paral
5	586.300k	31.5	+0.0	+10.0	+0.1	+0.1	-20.0	21.7	32.2	-10.5	Paral
6	10.008M	23.8	+0.1	+9.8	+0.4	+0.3	-20.0	14.4	29.5	-15.1	Perpe
7	9.987M	23.6	+0.1	+9.8	+0.4	+0.3	-20.0	14.2	29.5	-15.3	Perpe
8	7.191M	21.5	+0.1	+9.9	+0.3	+0.3	-20.0	12.1	29.5	-17.4	Paral
9	7.210M	17.7	+0.1	+9.9	+0.3	+0.3	-20.0	8.3	29.5	-21.2	Perpe
10	26.300k	44.8	+0.0	+12.4	+0.0	+0.0	-40.0	17.2	39.2	-22.0	Perpe
11	7.234M	15.3	+0.1	+9.9	+0.3	+0.3	-20.0	5.9	29.5	-23.6	Perpe
12	13.560M	67.0	+0.1	+9.6	+0.4	+0.4	-20.0	57.5	84.0	-26.5	Paral
Fundamental											
13	13.560M	66.0	+0.1	+9.6	+0.4	+0.4	-20.0	56.5	84.0	-27.5	Perpe
Fundamental											



Test Location: CKC Laboratories Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 5/4/2016  
Test Type: **Radiated Scan** Time: 14:44:50  
Tested By: Benny Lovan Sequence#: 11  
Software: EMITest 5.03.02

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 13			


***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 13			

***Test Conditions / Notes:***

Radiated Spurious Emissions Measurements
Temperature: 20°C
Humidity: 52%
Atmospheric Pressure: 97.31 kPa
Frequency Range: 9kHz – 30MHz
Modulation: ASK with an 847kHz Subcarrier
Antenna Type: Integral
Antenna Gain 2 dBi
Transmit Frequency: 13.56MHz
The EUTs are powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.
The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz

WaveLynx Technologies Corporation WO#: 97757 Sequence#: 11 Date: 5/4/2016  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Parallel

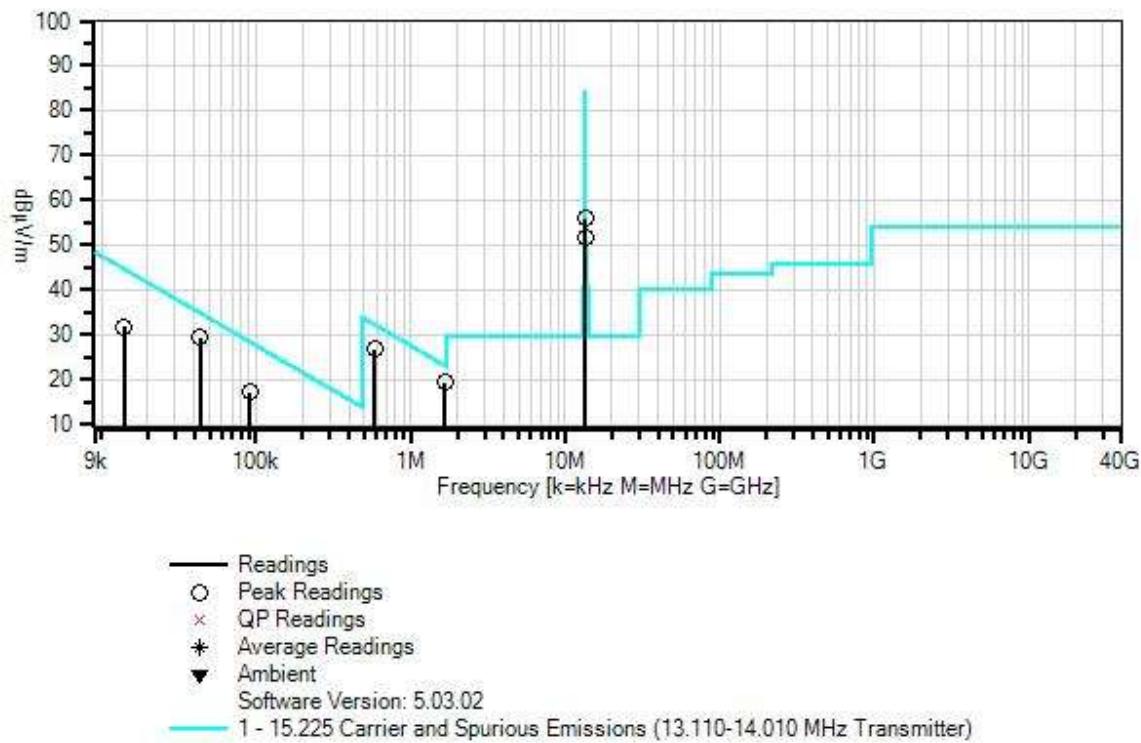


**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T2	AN00226	Loop Antenna	6502	4/4/2016	4/4/2018
	AN02111	Spectrum Analyzer	8593EM	6/4/2015	6/4/2016
T3	ANMD3M	Cable		3/17/2016	3/17/2018
T4	ANP06229	Cable	CXTA04A-50	3/17/2016	3/17/2018

**Measurement Data:** Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	1.667M	29.0	+0.0	+10.1	+0.1	+0.1	-20.0	19.3	23.1	-3.8	Paral
2	586.300k	36.5	+0.0	+10.0	+0.1	+0.1	-20.0	26.7	32.2	-5.5	Perpe
3	43.700k	58.2	+0.0	+11.1	+0.0	+0.0	-40.0	29.3	34.8	-5.5	Perpe
4	90.800k	46.9	+0.0	+10.2	+0.0	+0.0	-40.0	17.1	28.4	-11.3	Perpe
5	14.000k	56.8	+0.0	+14.8	+0.0	+0.0	-40.0	31.6	44.7	-13.1	Perpe
6	13.560M	65.5	+0.1	+9.6	+0.4	+0.4	-20.0	56.0	84.0	-28.0	Paral Fundamental
7	13.560M	61.0	+0.1	+9.6	+0.4	+0.4	-20.0	51.5	84.0	-32.5	Perpe Fundamental



Test Location: CKC Laboratories Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 5/4/2016  
Test Type: **Radiated Scan** Time: 14:18:34  
Tested By: Benny Lovan Sequence#: 12  
Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 14			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 14			

**Test Conditions / Notes:**

Radiated Spurious Emissions Measurements

Temperature: 20°C

Humidity: 52%

Atmospheric Pressure: 97.31 kPa

Frequency Range: 9kHz – 30MHz

Modulation: ASK with an 847kHz Subcarrier

Antenna Type: Integral


Antenna Gain 2 dBi

Transmit Frequency: 13.56MHz

The EUTs are powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz

WaveLynx Technologies Corporation WO#: 97757 Sequence#: 12 Date: 5/4/2016  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Perpendicular

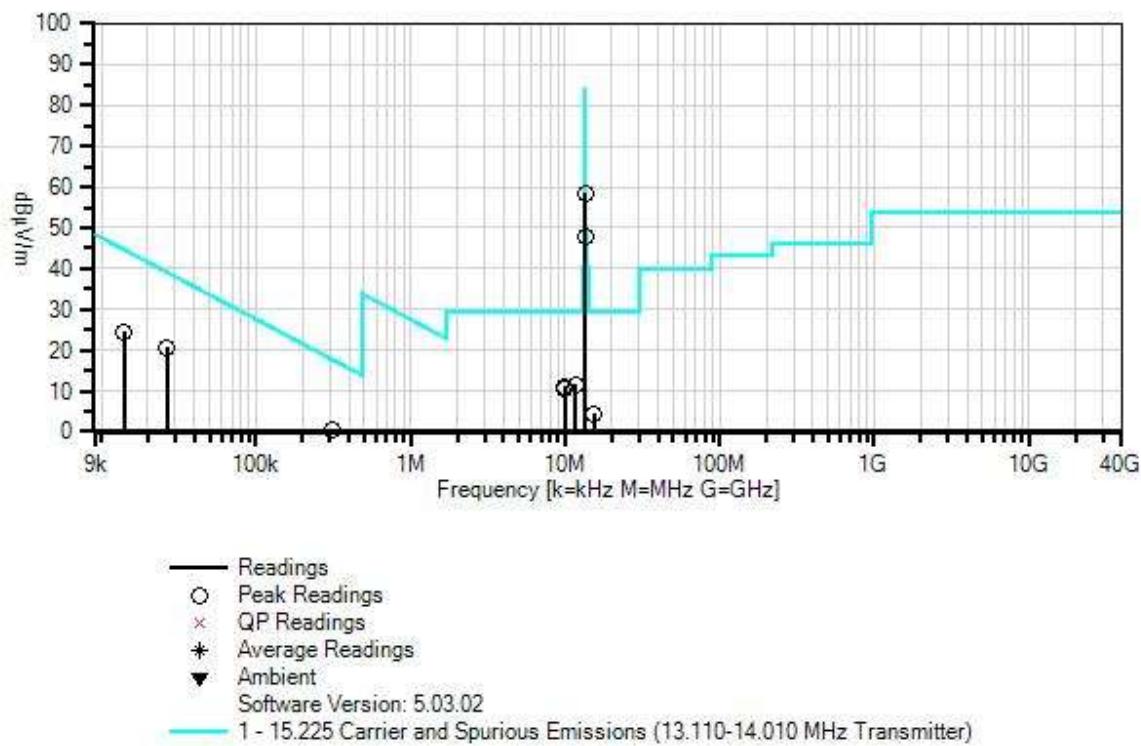

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T2	AN00226	Loop Antenna	6502	4/4/2016	4/4/2018
	AN02111	Spectrum Analyzer	8593EM	6/4/2015	6/4/2016
T3	ANMD3M	Cable		3/17/2016	3/17/2018
T4	ANP06229	Cable	CXTA04A-50	3/17/2016	3/17/2018

**Measurement Data:** Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	307.400k	30.4	+0.0	+9.8	+0.1	+0.0	-40.0	0.3	17.8	-17.5	Paral
2	11.636M	21.1	+0.1	+9.7	+0.4	+0.3	-20.0	11.6	29.5	-17.9	Perpe
3	347.600k	28.9	+0.0	+9.8	+0.1	+0.1	-40.0	-1.1	16.8	-17.9	Paral
4	9.934M	20.5	+0.1	+9.8	+0.4	+0.3	-20.0	11.1	29.5	-18.4	Paral
5	26.600k	48.3	+0.0	+12.4	+0.0	+0.0	-40.0	20.7	39.1	-18.4	Paral
6	10.000M	20.0	+0.1	+9.8	+0.4	+0.3	-20.0	10.6	29.5	-18.9	Perpe
7	14.000k	49.6	+0.0	+14.8	+0.0	+0.0	-40.0	24.4	44.7	-20.3	Perpe
8	15.480M	14.2	+0.1	+9.4	+0.4	+0.4	-20.0	4.5	29.5	-25.0	Perpe
9	13.559M	68.0	+0.1	+9.6	+0.4	+0.4	-20.0	58.5	84.0	-25.5	Paral
Fundamental											
10	15.444M	8.0	+0.1	+9.4	+0.4	+0.4	-20.0	-1.7	29.5	-31.2	Paral
11	13.559M	57.3	+0.1	+9.6	+0.4	+0.4	-20.0	47.8	84.0	-36.2	Perpe
Fundamental											



Test Location: CKC Laboratories, Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 5/6/2016  
Test Type: **Radiated Scan** Time: 14:55:56  
Tested By: Skip Doyle Sequence#: 13  
Software: EMITest 5.03.02

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 1			


***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Test Conditions / Notes:***

Radiated Spurious Emissions Measurements
Temperature: 12°C
Humidity: 69%
Atmospheric Pressure: 97.0 kPa
Frequency Range: 30MHz -1GHz
Modulation: ASK with an 847kHz Subcarrier
Antenna Type: Integral
Antenna Gain 2 dBi
Transmit Frequency: 13.56MHz
The EUTs are powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.
The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.

WaveLynx Technologies Corporation WO#: 97757 Sequence#: 13 Date: 5/6/2016  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Vert

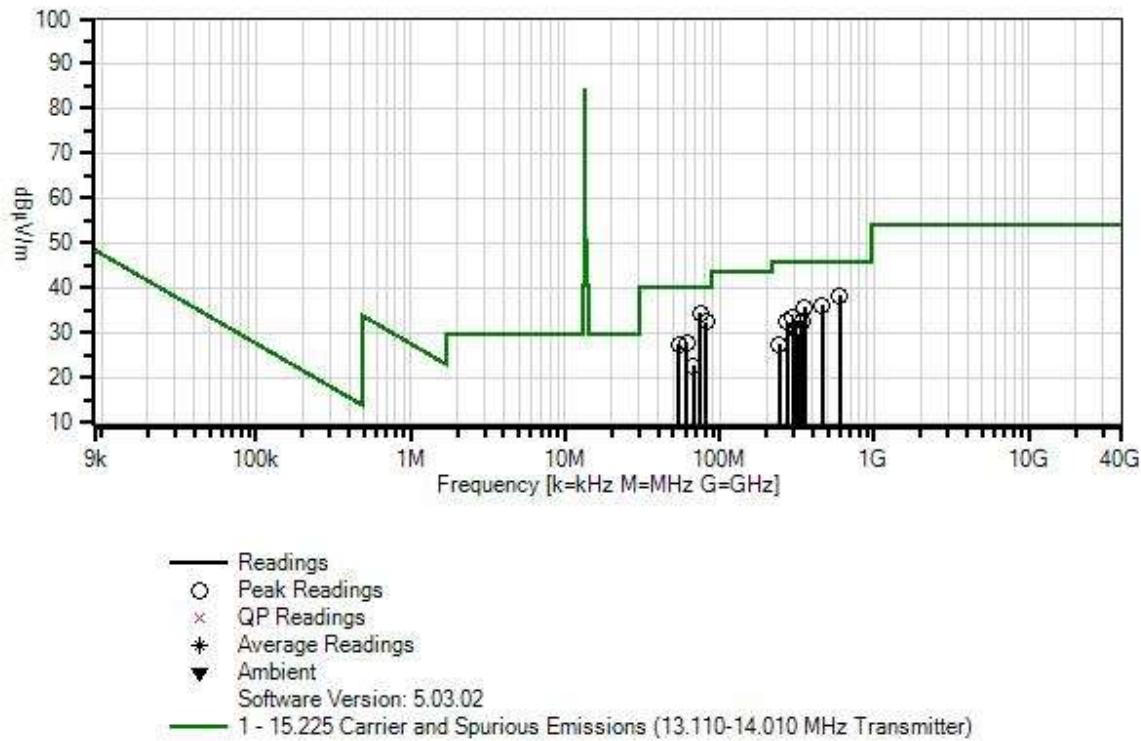

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02111	Spectrum Analyzer	8593EM	6/4/2015	6/4/2016
T1	AN01991	Biconilog Antenna	CBL6111C	3/11/2016	3/11/2018
T2	ANMD3M	Cable		3/17/2016	3/17/2018
T3	ANP06229	Cable	CXTA04A-50	3/17/2016	3/17/2018
T4	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T5	ANP06885	Cable	P06885	10/27/2015	10/27/2017
T6	ANP05657	Attenuator	PE7004-6	12/22/2015	12/22/2017
T7	AN00282	Preamp	8447D	4/7/2016	4/7/2018

**Measurement Data:** Reading listed by margin. Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7	Table					
	MHz	dB $\mu$ V	dB	dB	dB	dB	Table	dB $\mu$ V/m	dB $\mu$ V/m	dB	Ant
1	74.680M	46.9	+7.0	+0.9	+0.9	+0.2	+0.0	34.3	40.0	-5.7	Vert
			+0.2	+6.0	-27.8						
2	81.430M	44.8	+7.2	+1.0	+0.9	+0.2	+0.0	32.5	40.0	-7.5	Vert
			+0.2	+6.0	-27.8						
3	596.661M	34.3	+19.9	+2.7	+2.8	+0.4	+0.0	38.3	46.0	-7.8	Vert
			+0.5	+6.0	-28.4						
4	461.061M	35.3	+17.3	+2.3	+2.5	+0.4	+0.0	36.2	46.0	-9.8	Vert
			+0.5	+6.0	-28.1						
5	352.581M	37.0	+14.9	+2.1	+2.1	+0.4	+0.0	35.6	46.0	-10.4	Vert
			+0.4	+6.0	-27.3						
6	61.050M	41.8	+5.9	+0.8	+0.8	+0.1	+0.0	27.8	40.0	-12.2	Vert
			+0.2	+6.0	-27.8						
7	54.180M	40.0	+7.3	+0.8	+0.8	+0.1	+0.0	27.4	40.0	-12.6	Vert
			+0.2	+6.0	-27.8						
8	298.300M	36.3	+13.4	+1.9	+1.9	+0.4	+0.0	33.3	46.0	-12.7	Vert
			+0.4	+6.0	-27.0						
9	339.050M	34.4	+14.5	+2.0	+2.1	+0.4	+0.0	32.6	46.0	-13.4	Vert
			+0.4	+6.0	-27.2						
10	271.221M	36.2	+12.8	+1.8	+1.8	+0.3	+0.0	32.4	46.0	-13.6	Horiz
			+0.4	+6.0	-26.9						
11	311.930M	33.4	+13.8	+1.9	+2.0	+0.3	+0.0	30.8	46.0	-15.2	Vert
			+0.4	+6.0	-27.0						
12	325.430M	32.1	+14.2	+2.0	+2.0	+0.3	+0.0	29.9	46.0	-16.1	Vert
			+0.4	+6.0	-27.1						
13	67.821M	35.6	+6.8	+0.9	+0.9	+0.1	+0.0	22.7	40.0	-17.3	Horiz
			+0.2	+6.0	-27.8						
14	244.101M	32.5	+11.9	+1.7	+1.7	+0.3	+0.0	27.5	46.0	-18.5	Horiz
			+0.4	+6.0	-27.0						



Test Location: CKC Laboratories, Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 5/6/2016  
Test Type: **Radiated Scan** Time: 15:12:29  
Tested By: Skip Doyle Sequence#: 14  
Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 2			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 2			

**Test Conditions / Notes:**

Radiated Spurious Emissions Measurements

Temperature: 12°C

Humidity: 69%

Atmospheric Pressure: 97.0 kPa

Frequency Range: 30MHz -1GHz

Modulation: ASK with an 847kHz Subcarrier

Antenna Type: Integral


Antenna Gain 2 dBi

Transmit Frequency: 13.56MHz

The EUTs are powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.

WaveLynx Technologies Corporation WO#: 97757 Sequence#: 14 Date: 5/6/2016  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Vert

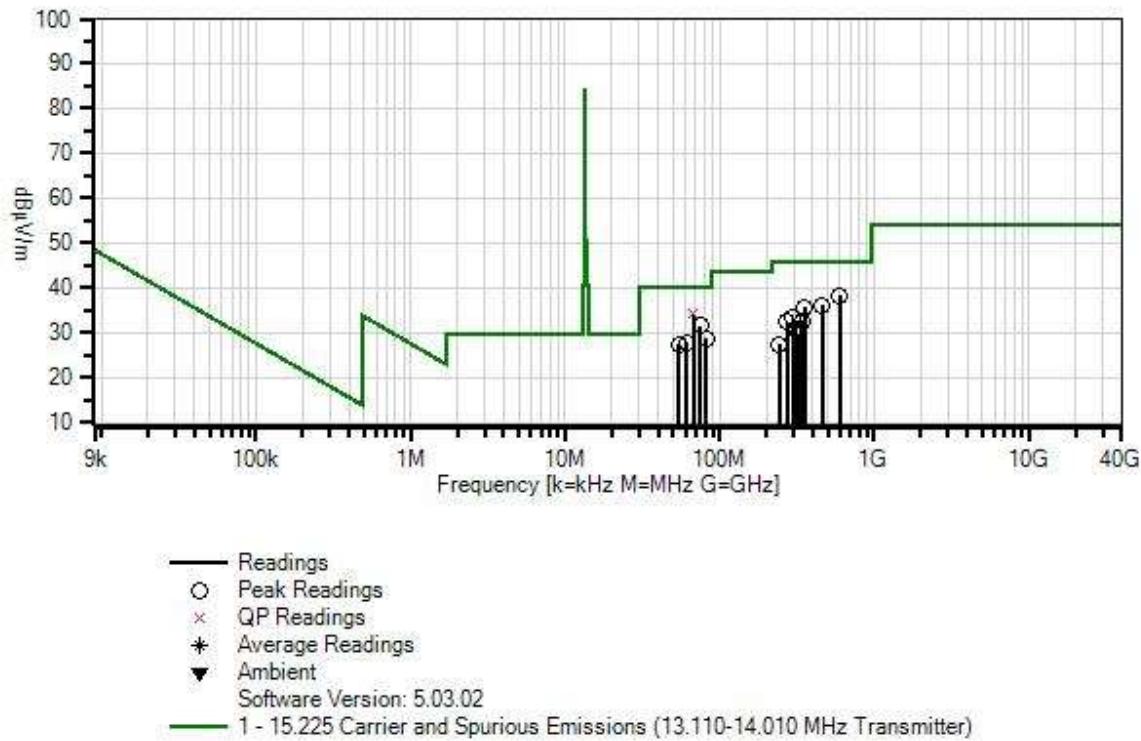

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02111	Spectrum Analyzer	8593EM	6/4/2015	6/4/2016
T1	AN01991	Biconilog Antenna	CBL6111C	3/11/2016	3/11/2018
T2	ANMD3M	Cable		3/17/2016	3/17/2018
T3	ANP06229	Cable	CXTA04A-50	3/17/2016	3/17/2018
T4	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T5	ANP06885	Cable	P06885	10/27/2015	10/27/2017
T6	ANP05657	Attenuator	PE7004-6	12/22/2015	12/22/2017
T7	AN00282	Preamp	8447D	4/7/2016	4/7/2018

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7		Table	dB $\mu$ V/m	dB $\mu$ V/m		
			MHz	dB $\mu$ V	dB	dB				dB	Ant
1	67.812M	47.0	+6.8	+0.9	+0.9	+0.1	+0.0	34.1	40.0	-5.9	Vert
	QP		+0.2	+6.0	-27.8						
^	67.810M	47.8	+6.8	+0.9	+0.9	+0.1	+0.0	34.9	40.0	-5.1	Vert
			+0.2	+6.0	-27.8						
3	596.661M	34.3	+19.9	+2.7	+2.8	+0.4	+0.0	38.3	46.0	-7.8	Vert
			+0.5	+6.0	-28.4						
4	74.593M	44.1	+7.0	+0.9	+0.9	+0.2	+0.0	31.5	40.0	-8.5	Vert
			+0.2	+6.0	-27.8						
5	461.061M	35.3	+17.3	+2.3	+2.5	+0.4	+0.0	36.2	46.0	-9.8	Vert
			+0.5	+6.0	-28.1						
6	352.581M	37.0	+14.9	+2.1	+2.1	+0.4	+0.0	35.6	46.0	-10.4	Vert
			+0.4	+6.0	-27.3						
7	81.376M	41.0	+7.2	+1.0	+0.9	+0.2	+0.0	28.8	40.0	-11.3	Vert
			+0.2	+6.0	-27.8						
8	61.050M	41.8	+5.9	+0.8	+0.8	+0.1	+0.0	27.8	40.0	-12.2	Vert
			+0.2	+6.0	-27.8						
9	54.180M	40.0	+7.3	+0.8	+0.8	+0.1	+0.0	27.4	40.0	-12.6	Vert
			+0.2	+6.0	-27.8						
10	298.300M	36.3	+13.4	+1.9	+1.9	+0.4	+0.0	33.3	46.0	-12.7	Vert
			+0.4	+6.0	-27.0						
11	339.050M	34.4	+14.5	+2.0	+2.1	+0.4	+0.0	32.6	46.0	-13.4	Vert
			+0.4	+6.0	-27.2						
12	271.221M	36.2	+12.8	+1.8	+1.8	+0.3	+0.0	32.4	46.0	-13.6	Horiz
			+0.4	+6.0	-26.9						
13	311.930M	33.4	+13.8	+1.9	+2.0	+0.3	+0.0	30.8	46.0	-15.2	Vert
			+0.4	+6.0	-27.0						
14	325.430M	32.1	+14.2	+2.0	+2.0	+0.3	+0.0	29.9	46.0	-16.1	Vert
			+0.4	+6.0	-27.1						
15	244.101M	32.5	+11.9	+1.7	+1.7	+0.3	+0.0	27.5	46.0	-18.5	Horiz
			+0.4	+6.0	-27.0						



Test Location: CKC Laboratories, Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 5/6/2016  
Test Type: **Radiated Scan** Time: 16:33:48  
Tested By: Skip Doyle Sequence#: 15  
Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 3			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 3			

**Test Conditions / Notes:**

Radiated Spurious Emissions Measurements

Temperature: 12°C

Humidity: 69%

Atmospheric Pressure: 97.0 kPa

Frequency Range: 30MHz -1GHz

Modulation: ASK with an 847kHz Subcarrier

Antenna Type: Integral


Antenna Gain 2 dBi

Transmit Frequency: 13.56MHz

The EUTs are powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.

WaveLynx Technologies Corporation WO#: 97757 Sequence#: 15 Date: 5/6/2016  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Vert

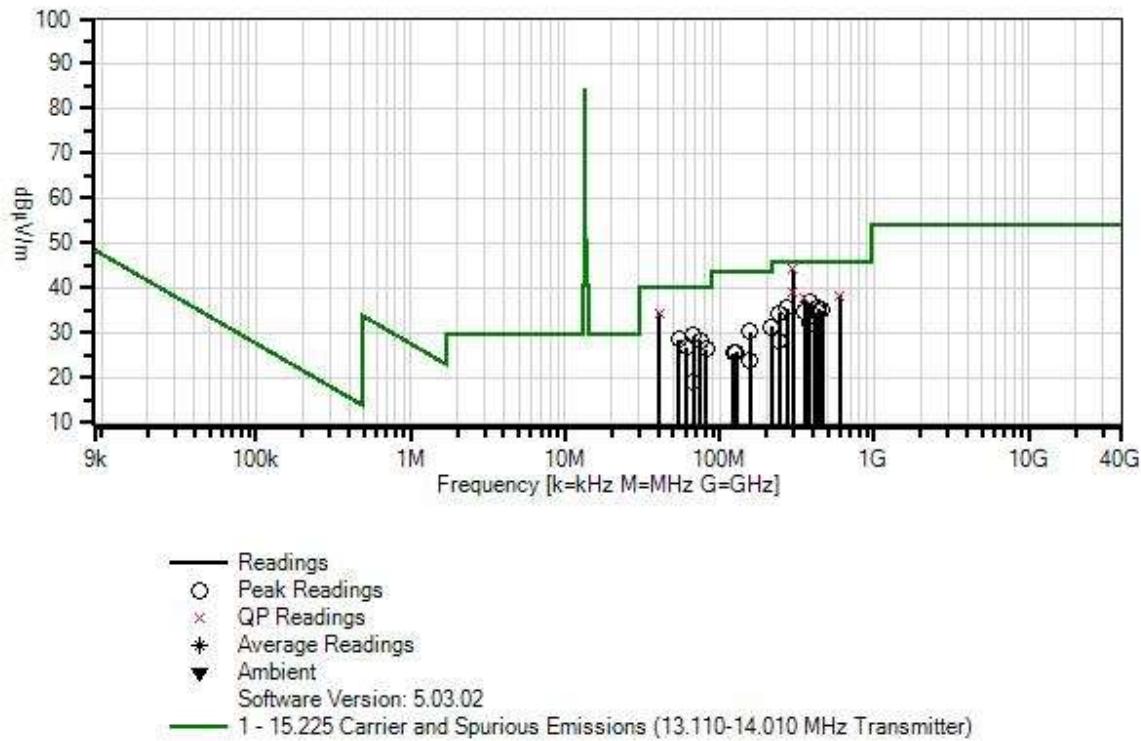

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02111	Spectrum Analyzer	8593EM	6/4/2015	6/4/2016
T1	AN01991	Biconilog Antenna	CBL6111C	3/11/2016	3/11/2018
T2	ANMD3M	Cable		3/17/2016	3/17/2018
T3	ANP06229	Cable	CXTA04A-50	3/17/2016	3/17/2018
T4	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T5	ANP06885	Cable	P06885	10/27/2015	10/27/2017
T6	ANP05657	Attenuator	PE7004-6	12/22/2015	12/22/2017
T7	AN00282	Preamp	8447D	4/7/2016	4/7/2018

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7		Table	dB $\mu$ V/m	dB $\mu$ V/m		
			MHz	dB $\mu$ V	dB	dB				dB	Ant
1	298.324M	47.2	+13.4	+1.9	+1.9	+0.4	+0.0	44.2	46.0	-1.8	Vert
	QP		+0.4	+6.0	-27.0						
^	298.341M	48.4	+13.4	+1.9	+1.9	+0.4	+0.0	45.4	46.0	-0.6	Vert
			+0.4	+6.0	-27.0						
3	40.694M	40.6	+14.0	+0.7	+0.7	+0.1	+0.0	34.4	40.0	-5.6	Vert
	QP		+0.2	+6.0	-27.9						
^	40.692M	42.9	+14.0	+0.7	+0.7	+0.1	+0.0	36.7	40.0	-3.3	Vert
			+0.2	+6.0	-27.9						
5	298.323M	42.0	+13.4	+1.9	+1.9	+0.4	+0.0	39.0	46.0	-7.0	Horiz
	QP		+0.4	+6.0	-27.0						
^	298.317M	42.7	+13.4	+1.9	+1.9	+0.4	+0.0	39.7	46.0	-6.3	Horiz
			+0.4	+6.0	-27.0						
7	596.635M	34.3	+19.9	+2.7	+2.8	+0.4	+0.0	38.2	46.0	-7.8	Vert
	QP		+0.5	+6.0	-28.4						
^	596.639M	35.5	+19.9	+2.7	+2.8	+0.4	+0.0	39.4	46.0	-6.6	Vert
			+0.5	+6.0	-28.4						
9	352.563M	39.1	+14.9	+2.1	+2.1	+0.4	+0.0	37.7	46.0	-8.3	Vert
	QP		+0.4	+6.0	-27.3						
^	352.564M	41.3	+14.9	+2.1	+2.1	+0.4	+0.0	39.9	46.0	-6.1	Vert
			+0.4	+6.0	-27.3						
11	379.679M	37.6	+15.6	+2.1	+2.2	+0.4	+0.0	36.8	46.0	-9.2	Vert
			+0.4	+6.0	-27.5						
12	271.167M	39.3	+12.8	+1.8	+1.8	+0.3	+0.0	35.5	46.0	-10.5	Horiz
			+0.4	+6.0	-26.9						
13	433.919M	35.0	+16.8	+2.3	+2.4	+0.4	+0.0	35.5	46.0	-10.6	Vert
			+0.5	+6.0	-27.9						
14	67.807M	42.3	+6.8	+0.9	+0.9	+0.1	+0.0	29.4	40.0	-10.6	Vert
			+0.2	+6.0	-27.8						
15	461.039M	34.2	+17.3	+2.3	+2.5	+0.4	+0.0	35.1	46.0	-10.9	Vert
			+0.5	+6.0	-28.1						
16	433.917M	34.4	+16.8	+2.3	+2.4	+0.4	+0.0	34.9	46.0	-11.1	Horiz
			+0.5	+6.0	-27.9						
17	352.557M	36.0	+14.9	+2.1	+2.1	+0.4	+0.0	34.6	46.0	-11.4	Horiz
			+0.4	+6.0	-27.3						
18	54.273M	41.0	+7.3	+0.8	+0.8	+0.1	+0.0	28.4	40.0	-11.6	Vert
			+0.2	+6.0	-27.8						

19	244.086M	39.3	+11.9 +0.4	+1.7 +6.0	+1.7 -27.0	+0.3	+0.0	34.3	46.0	-11.7	Vert
20	74.592M	40.8	+7.0 +0.2	+0.9 +6.0	+0.9 -27.8	+0.2	+0.0	28.2	40.0	-11.8	Vert
21	406.799M	34.1	+16.2 +0.4	+2.2 +6.0	+2.3 -27.7	+0.4	+0.0	33.9	46.0	-12.1	Vert
22	155.952M	37.8	+10.8 +0.3	+1.3 +6.0	+1.4 -27.5	+0.2	+0.0	30.3	43.5	-13.2	Vert
23	61.027M	40.8	+5.9 +0.2	+0.8 +6.0	+0.8 -27.8	+0.1	+0.0	26.8	40.0	-13.3	Vert
24	81.372M	38.7	+7.2 +0.2	+1.0 +6.0	+0.9 -27.8	+0.2	+0.0	26.4	40.0	-13.6	Vert
25	379.677M	33.0	+15.6 +0.4	+2.1 +6.0	+2.2 -27.5	+0.4	+0.0	32.2	46.0	-13.8	Horiz
26	216.973M	38.3	+10.1 +0.4	+1.6 +6.0	+1.6 -27.1	+0.3	+0.0	31.2	46.0	-14.8	Vert
27	128.832M	32.6	+11.7 +0.3	+1.2 +6.0	+1.2 -27.6	+0.2	+0.0	25.6	43.5	-17.9	Vert
28	244.083M	33.1	+11.9 +0.4	+1.7 +6.0	+1.7 -27.0	+0.3	+0.0	28.1	46.0	-17.9	Horiz
29	122.052M	32.5	+11.6 +0.3	+1.2 +6.0	+1.2 -27.6	+0.2	+0.0	25.4	43.5	-18.1	Vert
30	155.943M	31.4	+10.8 +0.3	+1.3 +6.0	+1.4 -27.5	+0.2	+0.0	23.9	43.5	-19.6	Horiz
31	67.803M	31.9	+6.8 +0.2	+0.9 +6.0	+0.9 -27.8	+0.1	+0.0	19.0	40.0	-21.0	Horiz



Test Location: CKC Laboratories, Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 5/6/2016  
Test Type: **Radiated Scan** Time: 15:49:55  
Tested By: Skip Doyle Sequence#: 16  
Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 4			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 4			

**Test Conditions / Notes:**

Radiated Spurious Emissions Measurements

Temperature: 12°C

Humidity: 69%

Atmospheric Pressure: 97.0 kPa

Frequency Range: 30MHz -1GHz

Modulation: ASK with an 847kHz Subcarrier

Antenna Type: Integral


Antenna Gain 2 dBi

Transmit Frequency: 13.56MHz

The EUTs are powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.

WaveLynx Technologies Corporation WO#: 97757 Sequence#: 16 Date: 5/6/2016  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Horiz

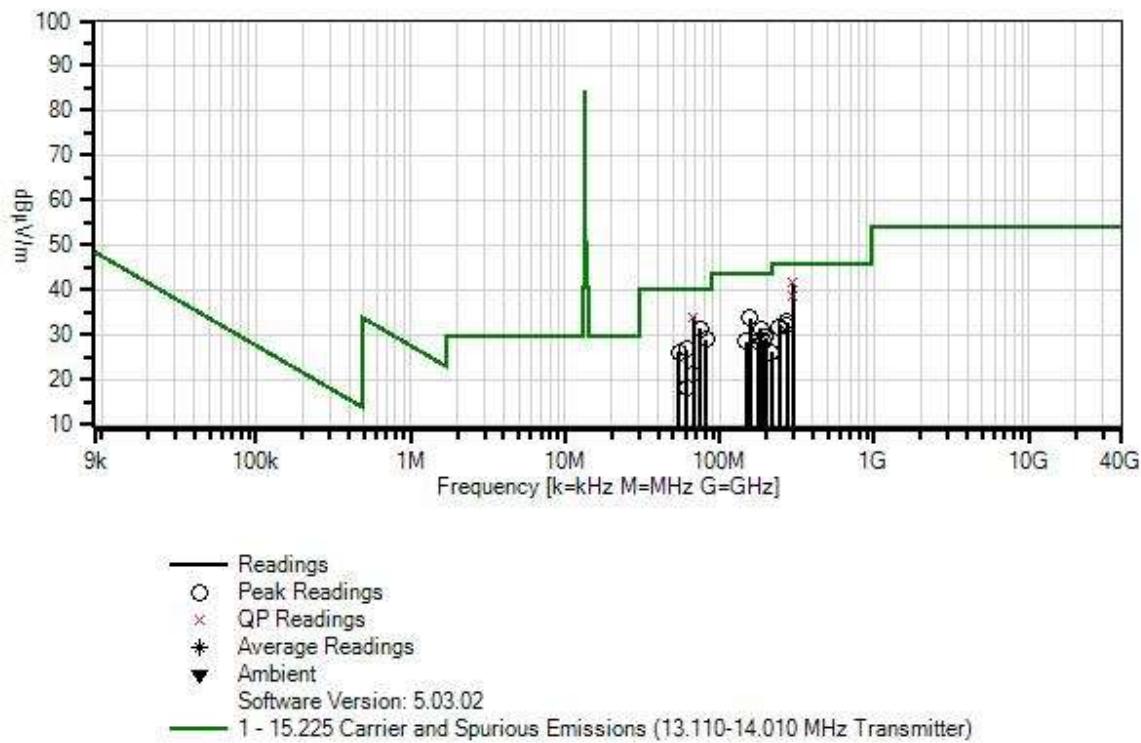

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02111	Spectrum Analyzer	8593EM	6/4/2015	6/4/2016
T1	AN01991	Biconilog Antenna	CBL6111C	3/11/2016	3/11/2018
T2	ANMD3M	Cable		3/17/2016	3/17/2018
T3	ANP06229	Cable	CXTA04A-50	3/17/2016	3/17/2018
T4	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T5	ANP06885	Cable	P06885	10/27/2015	10/27/2017
T6	ANP05657	Attenuator	PE7004-6	12/22/2015	12/22/2017
T7	AN00282	Preamp	8447D	4/7/2016	4/7/2018

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7		Table	dB $\mu$ V/m	dB $\mu$ V/m		
			MHz	dB $\mu$ V	dB	dB				dB	Ant
1	298.327M	44.6	+13.4	+1.9	+1.9	+0.4	+0.0	41.6	46.0	-4.4	Vert
	QP		+0.4	+6.0	-27.0						
^	298.319M	45.2	+13.4	+1.9	+1.9	+0.4	+0.0	42.2	46.0	-3.8	Vert
			+0.4	+6.0	-27.0						
3	67.813M	46.8	+6.8	+0.9	+0.9	+0.1	+0.0	33.9	40.0	-6.1	Vert
	QP		+0.2	+6.0	-27.8						
^	67.814M	48.0	+6.8	+0.9	+0.9	+0.1	+0.0	35.1	40.0	-4.9	Vert
			+0.2	+6.0	-27.8						
5	298.326M	41.7	+13.4	+1.9	+1.9	+0.4	+0.0	38.7	46.0	-7.3	Horiz
	QP		+0.4	+6.0	-27.0						
^	298.322M	43.8	+13.4	+1.9	+1.9	+0.4	+0.0	40.8	46.0	-5.2	Horiz
			+0.4	+6.0	-27.0						
7	74.584M	43.8	+7.0	+0.9	+0.9	+0.2	+0.0	31.2	40.0	-8.8	Vert
			+0.2	+6.0	-27.8						
8	155.959M	41.1	+10.8	+1.3	+1.4	+0.2	+0.0	33.6	43.5	-9.9	Vert
			+0.3	+6.0	-27.5						
9	81.365M	41.3	+7.2	+1.0	+0.9	+0.2	+0.0	29.0	40.0	-11.0	Vert
			+0.2	+6.0	-27.8						
10	183.081M	40.0	+9.2	+1.5	+1.5	+0.2	+0.0	31.4	43.5	-12.1	Vert
			+0.3	+6.0	-27.3						
11	61.022M	40.8	+5.9	+0.8	+0.8	+0.1	+0.0	26.8	40.0	-13.2	Vert
			+0.2	+6.0	-27.8						
12	271.195M	36.6	+12.8	+1.8	+1.8	+0.3	+0.0	32.8	46.0	-13.2	Vert
			+0.4	+6.0	-26.9						
13	54.251M	38.7	+7.3	+0.8	+0.8	+0.1	+0.0	26.1	40.0	-13.9	Vert
			+0.2	+6.0	-27.8						



14	271.207M	35.9	+12.8 +0.4	+1.8 +6.0	+1.8 -26.9	+0.3	+0.0	32.1	46.0	-13.9	Horiz
15	196.636M	38.1	+8.9 +0.3	+1.5 +6.0	+1.5 -27.2	+0.3	+0.0	29.4	43.5	-14.1	Vert
16	244.089M	36.4	+11.9 +0.4	+1.7 +6.0	+1.7 -27.0	+0.3	+0.0	31.4	46.0	-14.6	Vert
17	189.845M	37.5	+9.0 +0.3	+1.5 +6.0	+1.5 -27.3	+0.3	+0.0	28.8	43.5	-14.7	Vert
18	176.285M	37.2	+9.3 +0.3	+1.4 +6.0	+1.4 -27.4	+0.2	+0.0	28.4	43.5	-15.1	Vert
19	149.170M	35.6	+11.2 +0.3	+1.3 +6.0	+1.3 -27.5	+0.2	+0.0	28.4	43.5	-15.1	Vert
20	67.806M	33.9	+6.8 +0.2	+0.9 +6.0	+0.9 -27.8	+0.1	+0.0	21.0	40.0	-19.0	Horiz
21	216.959M	33.2	+10.1 +0.4	+1.6 +6.0	+1.6 -27.1	+0.3	+0.0	26.1	46.0	-19.9	Vert
22	61.019M	32.3	+5.9 +0.2	+0.8 +6.0	+0.8 -27.8	+0.1	+0.0	18.3	40.0	-21.7	Horiz



Test Location: CKC Laboratories, Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 5/6/2016  
Test Type: **Radiated Scan** Time: 17:32:57  
Tested By: Skip Doyle Sequence#: 17  
Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 5			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 5			

**Test Conditions / Notes:**

Radiated Spurious Emissions Measurements

Temperature: 12°C

Humidity: 69%

Atmospheric Pressure: 97.0 kPa

Frequency Range: 30MHz -1GHz

Modulation: ASK with an 847kHz Subcarrier

Antenna Type: Integral


Antenna Gain 2 dBi

Transmit Frequency: 13.56MHz

The EUTs are powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.

WaveLynx Technologies Corporation WO#: 97757 Sequence#: 17 Date: 5/6/2016  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Vert

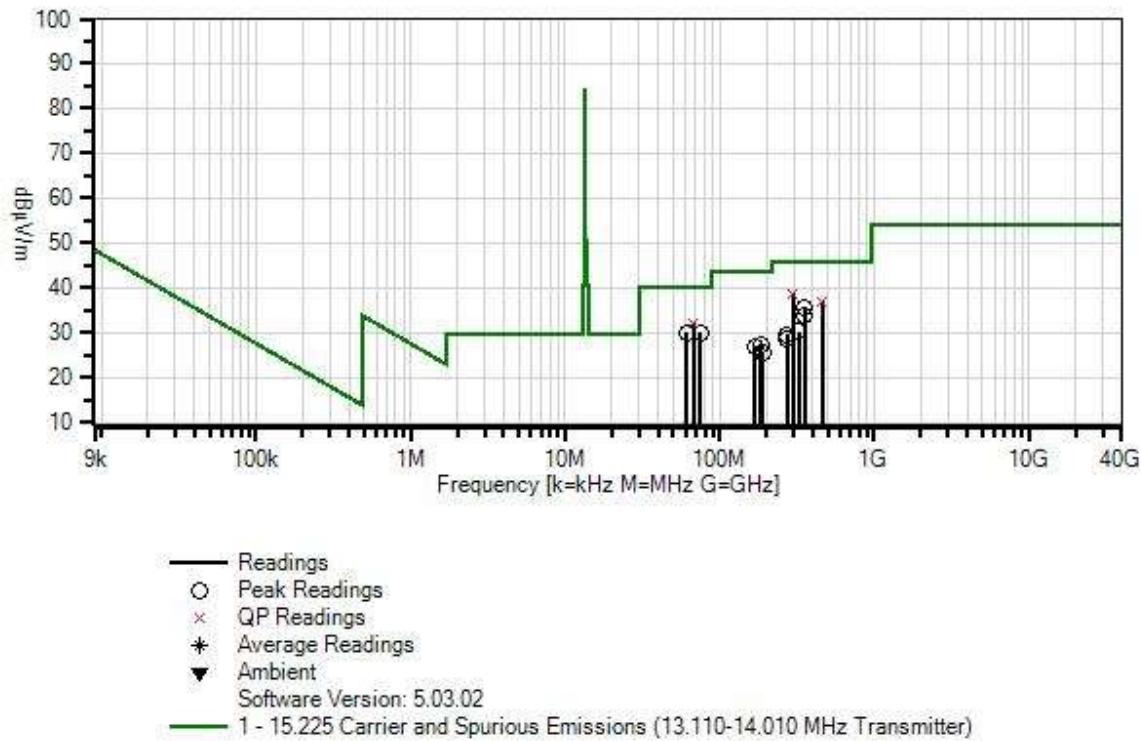

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02111	Spectrum Analyzer	8593EM	6/4/2015	6/4/2016
T1	AN01991	Biconilog Antenna	CBL6111C	3/11/2016	3/11/2018
T2	ANMD3M	Cable		3/17/2016	3/17/2018
T3	ANP06229	Cable	CXTA04A-50	3/17/2016	3/17/2018
T4	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T5	ANP06885	Cable	P06885	10/27/2015	10/27/2017
T6	ANP05657	Attenuator	PE7004-6	12/22/2015	12/22/2017
T7	AN00282	Preamp	8447D	4/7/2016	4/7/2018

**Measurement Data:** Reading listed by margin. Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7		Table	dB $\mu$ V/m	dB $\mu$ V/m		
			MHz	dB $\mu$ V	dB	dB				dB	Ant
1	298.328M	41.7	+13.4	+1.9	+1.9	+0.4	+0.0	38.7	46.0	-7.3	Horiz
	QP		+0.4	+6.0	-27.0						
^	298.323M	42.3	+13.4	+1.9	+1.9	+0.4	+0.0	39.3	46.0	-6.7	Horiz
			+0.4	+6.0	-27.0						
3	67.815M	45.2	+6.8	+0.9	+0.9	+0.1	+0.0	32.3	40.0	-7.7	Vert
	QP		+0.2	+6.0	-27.8						
^	67.798M	46.2	+6.8	+0.9	+0.9	+0.1	+0.0	33.3	40.0	-6.7	Vert
			+0.2	+6.0	-27.8						
5	461.041M	36.0	+17.3	+2.3	+2.5	+0.4	+0.0	37.0	46.0	-9.0	Vert
	QP		+0.5	+6.0	-28.1						
^	461.044M	37.4	+17.3	+2.3	+2.5	+0.4	+0.0	38.3	46.0	-7.7	Vert
			+0.5	+6.0	-28.1						
7	74.595M	42.7	+7.0	+0.9	+0.9	+0.2	+0.0	30.1	40.0	-9.9	Vert
			+0.2	+6.0	-27.8						
8	61.035M	44.1	+5.9	+0.8	+0.8	+0.1	+0.0	30.1	40.0	-9.9	Vert
			+0.2	+6.0	-27.8						
9	352.558M	37.0	+14.9	+2.1	+2.1	+0.4	+0.0	35.6	46.0	-10.4	Vert
			+0.4	+6.0	-27.3						
10	352.559M	35.2	+14.9	+2.1	+2.1	+0.4	+0.0	33.8	46.0	-12.2	Horiz
			+0.4	+6.0	-27.3						
11	325.435M	32.5	+14.2	+2.0	+2.0	+0.3	+0.0	30.3	46.0	-15.7	Vert
			+0.4	+6.0	-27.1						
12	183.066M	35.9	+9.2	+1.5	+1.5	+0.2	+0.0	27.3	43.5	-16.2	Vert
			+0.3	+6.0	-27.3						
13	271.224M	33.5	+12.8	+1.8	+1.8	+0.3	+0.0	29.6	46.0	-16.4	Horiz
			+0.4	+6.0	-26.9						
14	169.519M	35.3	+9.8	+1.4	+1.4	+0.2	+0.0	27.0	43.5	-16.5	Vert
			+0.3	+6.0	-27.4						
15	271.206M	32.4	+12.8	+1.8	+1.8	+0.3	+0.0	28.6	46.0	-17.4	Vert
			+0.4	+6.0	-26.9						
16	189.860M	34.3	+9.0	+1.5	+1.5	+0.3	+0.0	25.6	43.5	-17.9	Horiz
			+0.3	+6.0	-27.3						



Test Location: CKC Laboratories, Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 5/6/2016  
Test Type: **Radiated Scan** Time: 17:10:55  
Tested By: Skip Doyle Sequence#: 18  
Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 6			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 6			

**Test Conditions / Notes:**

Radiated Spurious Emissions Measurements

Temperature: 12°C

Humidity: 69%

Atmospheric Pressure: 97.0 kPa

Frequency Range: 30MHz -1GHz

Modulation: ASK with an 847kHz Subcarrier

Antenna Type: Integral


Antenna Gain 2 dBi

Transmit Frequency: 13.56MHz

The EUTs are powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.

WaveLynx Technologies Corporation WO#: 97757 Sequence#: 18 Date: 5/6/2016  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Horiz

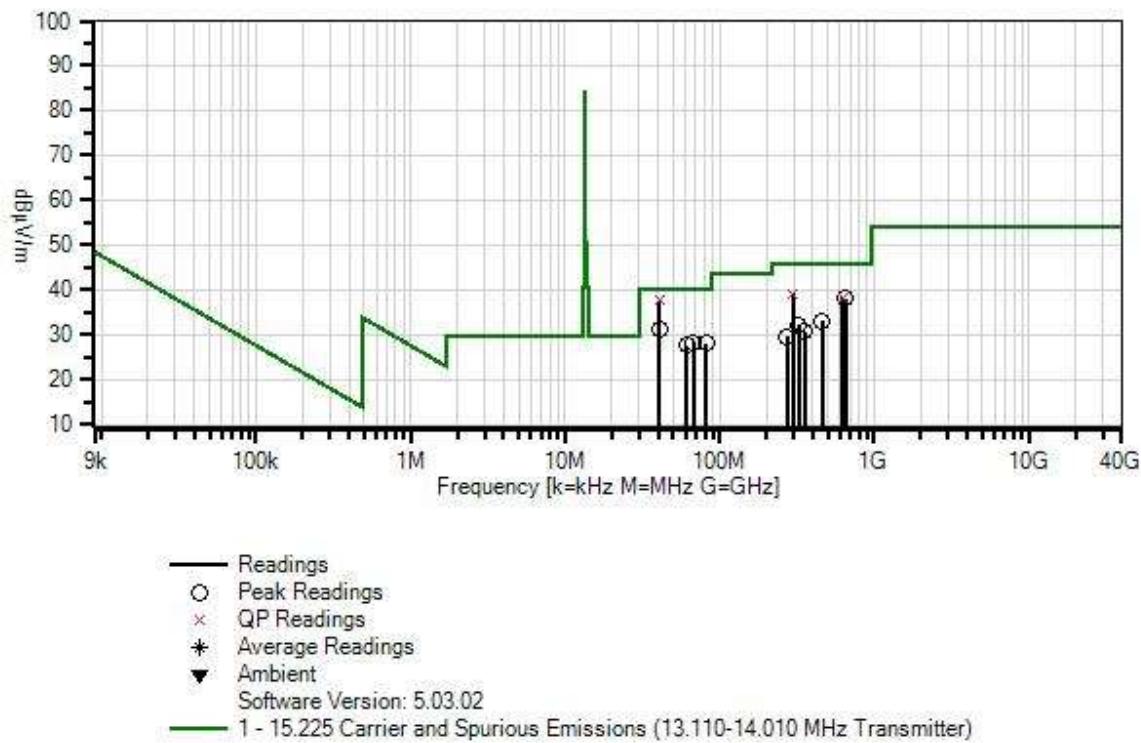

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02111	Spectrum Analyzer	8593EM	6/4/2015	6/4/2016
T1	AN01991	Biconilog Antenna	CBL6111C	3/11/2016	3/11/2018
T2	ANMD3M	Cable		3/17/2016	3/17/2018
T3	ANP06229	Cable	CXTA04A-50	3/17/2016	3/17/2018
T4	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T5	ANP06885	Cable	P06885	10/27/2015	10/27/2017
T6	ANP05657	Attenuator	PE7004-6	12/22/2015	12/22/2017
T7	AN00282	Preamp	8447D	4/7/2016	4/7/2018

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7		Table	dB $\mu$ V/m	dB $\mu$ V/m		
			MHz	dB $\mu$ V	dB	dB				dB	Ant
1	40.696M	43.7	+14.0	+0.7	+0.7	+0.1	+0.0	37.5	40.0	-2.5	Vert
	QP		+0.2	+6.0	-27.9						
^	40.685M	45.1	+14.1	+0.7	+0.7	+0.1	+0.0	39.0	40.0	-1.0	Vert
			+0.2	+6.0	-27.9						
3	298.325M	42.1	+13.4	+1.9	+1.9	+0.4	+0.0	39.1	46.0	-6.9	Vert
	QP		+0.4	+6.0	-27.0						
^	298.325M	43.4	+13.4	+1.9	+1.9	+0.4	+0.0	40.4	46.0	-5.6	Vert
			+0.4	+6.0	-27.0						
5	298.324M	41.9	+13.4	+1.9	+1.9	+0.4	+0.0	38.9	46.0	-7.1	Horiz
	QP		+0.4	+6.0	-27.0						
^	298.326M	42.3	+13.4	+1.9	+1.9	+0.4	+0.0	39.3	46.0	-6.7	Horiz
			+0.4	+6.0	-27.0						
7	623.754M	33.9	+20.3	+2.7	+2.9	+0.4	+0.0	38.3	46.0	-7.7	Vert
	QP		+0.5	+6.0	-28.4						
^	623.754M	35.3	+20.3	+2.7	+2.9	+0.4	+0.0	39.7	46.0	-6.3	Vert
			+0.5	+6.0	-28.4						
9	650.879M	32.9	+20.7	+2.8	+3.0	+0.5	+0.0	38.0	46.0	-8.0	Vert
			+0.5	+6.0	-28.4						
10	40.685M	37.1	+14.1	+0.7	+0.7	+0.1	+0.0	31.0	40.0	-9.0	Horiz
			+0.2	+6.0	-27.9						
11	67.805M	41.2	+6.8	+0.9	+0.9	+0.1	+0.0	28.3	40.0	-11.7	Vert
			+0.2	+6.0	-27.8						
12	81.365M	40.3	+7.2	+1.0	+0.9	+0.2	+0.0	28.0	40.0	-12.0	Vert
			+0.2	+6.0	-27.8						
13	61.025M	41.7	+5.9	+0.8	+0.8	+0.1	+0.0	27.7	40.0	-12.3	Vert
			+0.2	+6.0	-27.8						
14	461.036M	32.1	+17.3	+2.3	+2.5	+0.4	+0.0	33.0	46.0	-13.0	Vert
			+0.5	+6.0	-28.1						
15	325.429M	34.2	+14.2	+2.0	+2.0	+0.3	+0.0	32.0	46.0	-14.0	Vert
			+0.4	+6.0	-27.1						
16	352.556M	32.1	+14.9	+2.1	+2.1	+0.4	+0.0	30.7	46.0	-15.3	Vert
			+0.4	+6.0	-27.3						
17	271.204M	33.3	+12.8	+1.8	+1.8	+0.3	+0.0	29.5	46.0	-16.5	Horiz
			+0.4	+6.0	-26.9						



Test Location: CKC Laboratories, Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 5/6/2016  
Test Type: **Radiated Scan** Time: 18:25:30  
Tested By: Skip Doyle Sequence#: 19  
Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 7			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 7			

**Test Conditions / Notes:**

Radiated Spurious Emissions Measurements

Temperature: 12°C

Humidity: 69%

Atmospheric Pressure: 97.0 kPa

Frequency Range: 30MHz -1GHz

Modulation: ASK with an 847kHz Subcarrier

Antenna Type: Integral


Antenna Gain 2 dBi

Transmit Frequency: 13.56MHz

The EUTs are powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.

WaveLynx Technologies Corporation WO#: 97757 Sequence#: 19 Date: 5/6/2016  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Vert

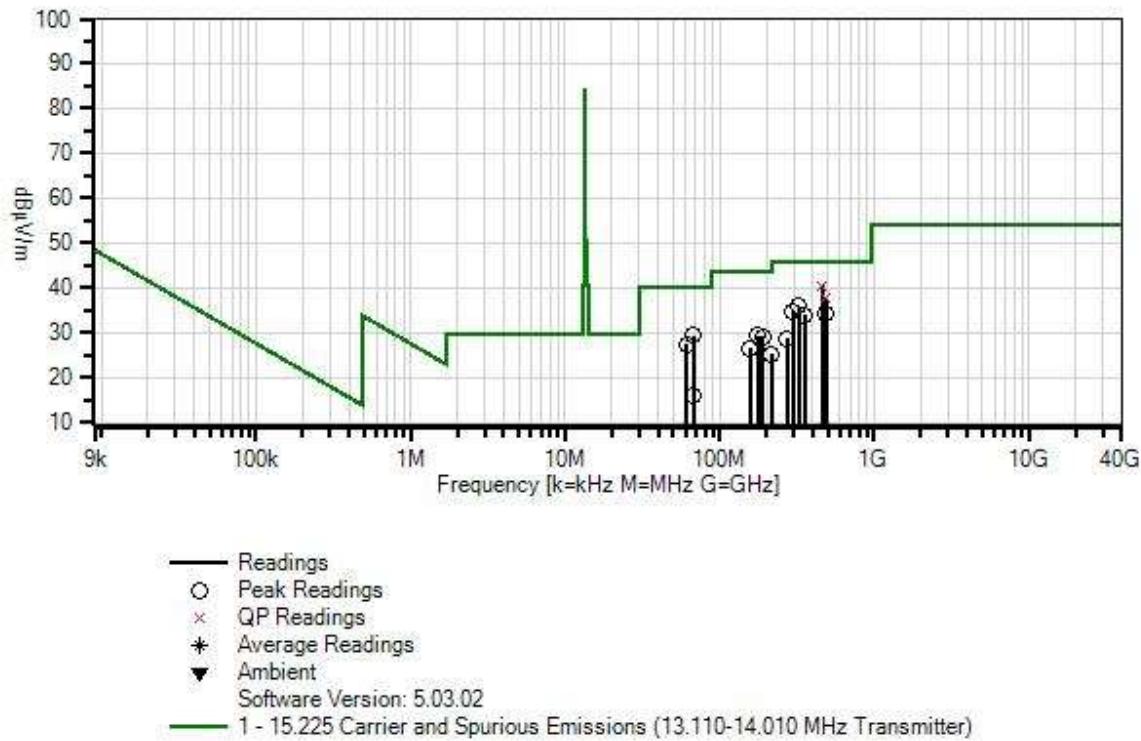

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02111	Spectrum Analyzer	8593EM	6/4/2015	6/4/2016
T1	AN01991	Biconilog Antenna	CBL6111C	3/11/2016	3/11/2018
T2	ANMD3M	Cable		3/17/2016	3/17/2018
T3	ANP06229	Cable	CXTA04A-50	3/17/2016	3/17/2018
T4	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T5	ANP06885	Cable	P06885	10/27/2015	10/27/2017
T6	ANP05657	Attenuator	PE7004-6	12/22/2015	12/22/2017
T7	AN00282	Preamp	8447D	4/7/2016	4/7/2018

**Measurement Data:** Reading listed by margin. Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7		Table	dB $\mu$ V/m	dB $\mu$ V/m		
			MHz	dB $\mu$ V	dB	dB				dB	Ant
1	461.042M	39.5	+17.3	+2.3	+2.5	+0.4	+0.0	40.4	46.0	-5.6	Vert
	QP		+0.5	+6.0	-28.1						
^	461.044M	40.7	+17.3	+2.3	+2.5	+0.4	+0.0	41.6	46.0	-4.4	Vert
			+0.5	+6.0	-28.1						
3	488.161M	36.1	+17.8	+2.4	+2.5	+0.4	+0.0	37.5	46.0	-8.5	Vert
	QP		+0.5	+6.0	-28.2						
^	488.162M	37.4	+17.8	+2.4	+2.5	+0.4	+0.0	38.8	46.0	-7.2	Vert
			+0.5	+6.0	-28.2						
5	325.445M	38.0	+14.2	+2.0	+2.0	+0.3	+0.0	35.8	46.0	-10.2	Horiz
			+0.4	+6.0	-27.1						
6	67.815M	42.2	+6.8	+0.9	+0.9	+0.1	+0.0	29.3	40.0	-10.7	Vert
			+0.2	+6.0	-27.8						
7	298.330M	37.7	+13.4	+1.9	+1.9	+0.4	+0.0	34.7	46.0	-11.3	Horiz
			+0.4	+6.0	-27.0						
8	488.172M	32.8	+17.8	+2.4	+2.5	+0.4	+0.0	34.2	46.0	-11.8	Horiz
			+0.5	+6.0	-28.2						
9	352.570M	35.3	+14.9	+2.1	+2.1	+0.4	+0.0	33.9	46.0	-12.1	Horiz
			+0.4	+6.0	-27.3						
10	61.033M	41.4	+5.9	+0.8	+0.8	+0.1	+0.0	27.4	40.0	-12.6	Vert
			+0.2	+6.0	-27.8						
11	176.287M	38.1	+9.3	+1.4	+1.4	+0.2	+0.0	29.3	43.5	-14.2	Vert
			+0.3	+6.0	-27.4						
12	189.833M	37.8	+9.0	+1.5	+1.5	+0.3	+0.0	29.1	43.5	-14.4	Horiz
			+0.3	+6.0	-27.3						
13	155.961M	34.0	+10.8	+1.3	+1.4	+0.2	+0.0	26.5	43.5	-17.0	Horiz
			+0.3	+6.0	-27.5						
14	271.201M	32.5	+12.8	+1.8	+1.8	+0.3	+0.0	28.7	46.0	-17.3	Vert
			+0.4	+6.0	-26.9						
15	216.967M	32.4	+10.1	+1.6	+1.6	+0.3	+0.0	25.3	46.0	-20.7	Vert
			+0.4	+6.0	-27.1						
16	67.815M	28.8	+6.8	+0.9	+0.9	+0.1	+0.0	15.9	40.0	-24.1	Horiz
			+0.2	+6.0	-27.8						



Test Location: CKC Laboratories, Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
Customer: **WaveLynx Technologies Corporation**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **97757** Date: 5/6/2016  
Test Type: **Radiated Scan** Time: 18:07:10  
Tested By: Skip Doyle Sequence#: 20  
Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 8			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 8			

**Test Conditions / Notes:**

Radiated Spurious Emissions Measurements

Temperature: 12°C

Humidity: 69%

Atmospheric Pressure: 97.0 kPa

Frequency Range: 30MHz -1GHz

Modulation: ASK with an 847kHz Subcarrier

Antenna Type: Integral


Antenna Gain 2 dBi

Transmit Frequency: 13.56MHz

The EUTs are powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.

WaveLynx Technologies Corporation WO#: 97757 Sequence#: 20 Date: 5/6/2016  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Horiz

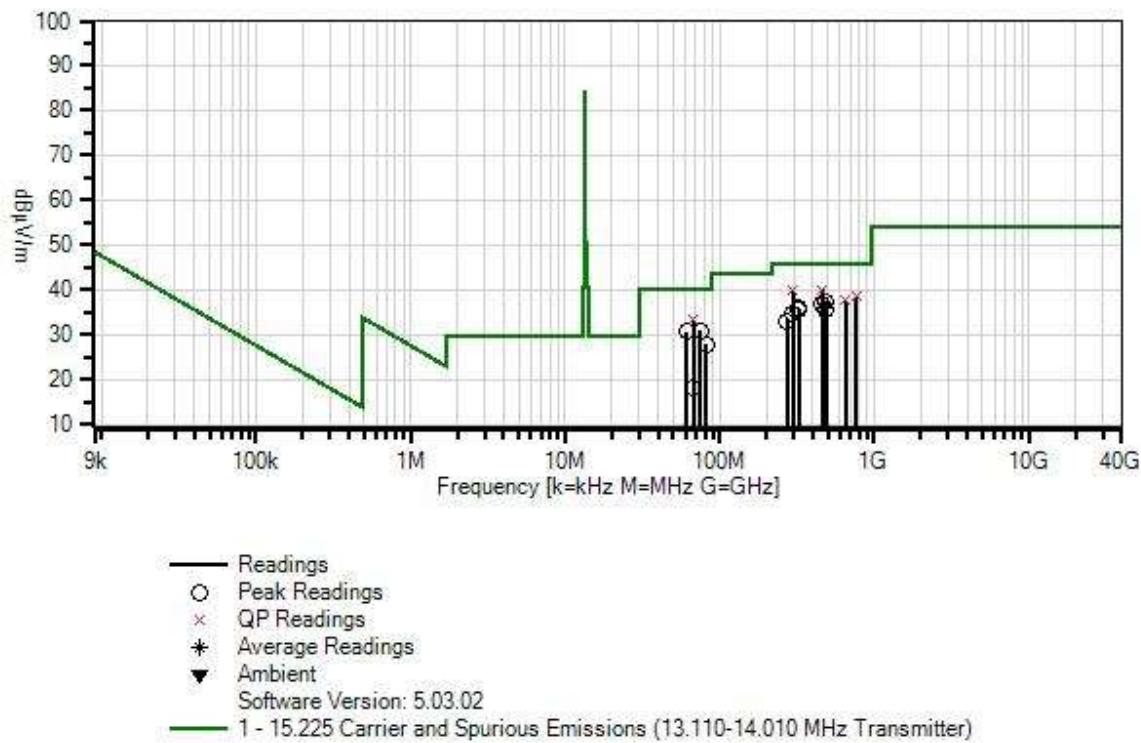

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02111	Spectrum Analyzer	8593EM	6/4/2015	6/4/2016
T1	AN01991	Biconilog Antenna	CBL6111C	3/11/2016	3/11/2018
T2	ANMD3M	Cable		3/17/2016	3/17/2018
T3	ANP06229	Cable	CXTA04A-50	3/17/2016	3/17/2018
T4	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T5	ANP06885	Cable	P06885	10/27/2015	10/27/2017
T6	ANP05657	Attenuator	PE7004-6	12/22/2015	12/22/2017
T7	AN00282	Preamp	8447D	4/7/2016	4/7/2018

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7		Table	dB $\mu$ V/m	dB $\mu$ V/m		
			MHz	dB $\mu$ V	dB	dB				dB	Ant
1	461.041M	39.2	+17.3	+2.3	+2.5	+0.4	+0.0	40.1	46.0	-5.9	Vert
	QP		+0.5	+6.0	-28.1						
^	461.039M	40.2	+17.3	+2.3	+2.5	+0.4	+0.0	41.0	46.0	-4.9	Vert
			+0.5	+6.0	-28.1						
3	298.325M	42.8	+13.4	+1.9	+1.9	+0.4	+0.0	39.8	46.0	-6.2	Vert
	QP		+0.4	+6.0	-27.0						
^	298.328M	43.3	+13.4	+1.9	+1.9	+0.4	+0.0	40.3	46.0	-5.7	Vert
			+0.4	+6.0	-27.0						
^	298.324M	40.7	+13.4	+1.9	+1.9	+0.4	+0.0	37.7	46.0	-8.3	Vert
			+0.4	+6.0	-27.0						
6	67.814M	46.3	+6.8	+0.9	+0.9	+0.1	+0.0	33.4	40.0	-6.6	Vert
	QP		+0.2	+6.0	-27.8						
^	67.811M	46.9	+6.8	+0.9	+0.9	+0.1	+0.0	34.0	40.0	-6.0	Vert
			+0.2	+6.0	-27.8						
8	759.349M	30.2	+23.2	+3.0	+3.3	+0.5	+0.0	38.6	46.0	-7.4	Horiz
	QP		+0.6	+6.0	-28.2						
^	759.362M	33.0	+23.2	+3.0	+3.3	+0.5	+0.0	41.4	46.0	-4.6	Horiz
			+0.6	+6.0	-28.2						
10	650.870M	32.5	+20.7	+2.8	+3.0	+0.5	+0.0	37.6	46.0	-8.4	Vert
	QP		+0.5	+6.0	-28.4						
^	650.873M	34.6	+20.7	+2.8	+3.0	+0.5	+0.0	39.7	46.0	-6.3	Vert
			+0.5	+6.0	-28.4						
12	488.150M	35.9	+17.8	+2.4	+2.5	+0.4	+0.0	37.3	46.0	-8.7	Horiz
			+0.5	+6.0	-28.2						
13	74.590M	43.6	+7.0	+0.9	+0.9	+0.2	+0.0	31.0	40.0	-9.0	Vert
			+0.2	+6.0	-27.8						

14	461.030M	36.1	+17.3 +0.5	+2.3 +6.0	+2.5 -28.1	+0.4	+0.0	37.0	46.0	-9.0	Horiz
15	61.032M	44.7	+5.9 +0.2	+0.8 +6.0	+0.8 -27.8	+0.1	+0.0	30.7	40.0	-9.3	Vert
16	325.444M	38.1	+14.2 +0.4	+2.0 +6.0	+2.0 -27.1	+0.3	+0.0	35.9	46.0	-10.1	Vert
17	325.439M	38.0	+14.2 +0.4	+2.0 +6.0	+2.0 -27.1	+0.3	+0.0	35.8	46.0	-10.2	Horiz
18	488.170M	34.2	+17.8 +0.5	+2.4 +6.0	+2.5 -28.2	+0.4	+0.0	35.6	46.0	-10.4	Vert
19	298.325M	37.9	+13.4 +0.4	+1.9 +6.0	+1.9 -27.0	+0.4	+0.0	34.9	46.0	-11.1	Horiz
20	81.370M	40.1	+7.2 +0.2	+1.0 +6.0	+0.9 -27.8	+0.2	+0.0	27.8	40.0	-12.2	Vert
21	271.210M	36.9	+12.8 +0.4	+1.8 +6.0	+1.8 -26.9	+0.3	+0.0	33.1	46.0	-12.9	Vert
22	67.815M	30.8	+6.8 +0.2	+0.9 +6.0	+0.9 -27.8	+0.1	+0.0	17.9	40.0	-22.1	Horiz

Test Setup Photo



## 15.207 AC Conducted Emissions

### Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 5046 Sierra Pines Drive • Mariposa, CA 95338 • (209) 966-5240  
 Customer: **WaveLynx Technologies Corporation.**  
 Specification: **15.207 AC Mains - Average**  
 Work Order #: **97757** Date: 5/3/2016  
 Test Type: **Conducted Emissions** Time: 13:22:30  
 Tested By: Skip Doyle Sequence#: 21  
 Software: EMITest 5.03.02 115V 60Hz

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 15			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 15			

***Test Conditions / Notes:***

Testing the 115VAC/60Hz input to the 12VDC power supply

Test Method: ANSI C63.10: 2013

Frequency Range of Interest:  
0.150-30MHz


RBW = 9kHz; VBW > 9kHz

Environmental Conditions:  
Temperature: 20°C  
Relative Humidity: 35%  
Atmospheric Pressure: 97.1kPa

The EUTs are powered by a DC power supply at 12VDC. The customer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.

It has been programmed to continuously transmit the RFID signal at 125kHz.

Configuration 15 is made up of Configurations 1, 2, 3 and 4. All were tested simultaneously. A quick "preview" of one-unit vs four units connected to the LISN was performed while the measuring instrument was set to a wide span, there was no difference in the rescan emission observed.

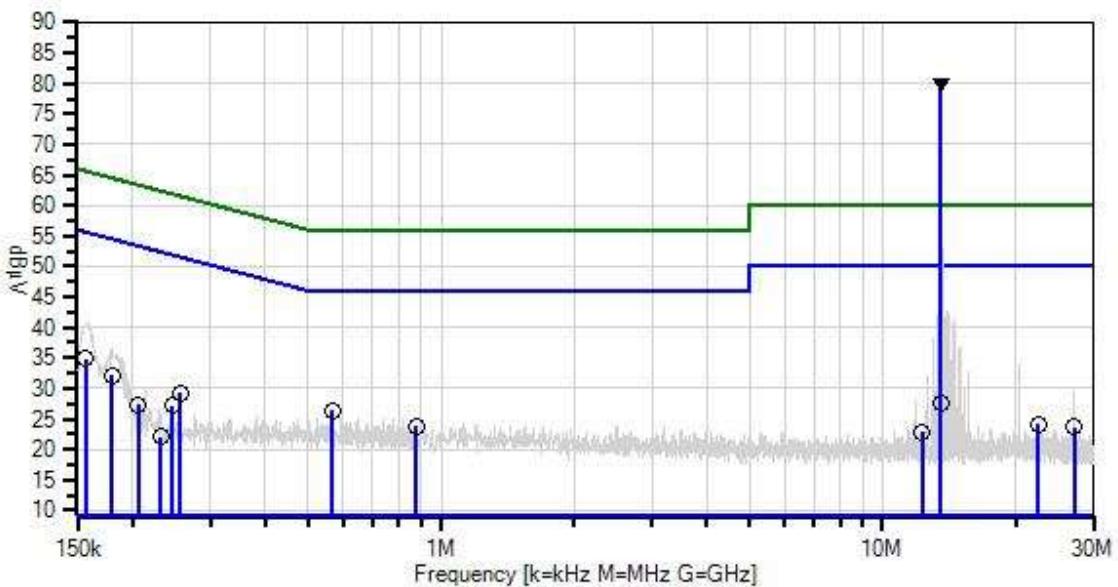WaveLynx Technologies Corporation. WO#: 97757 Sequence#: 21 Date: 5/3/2016  
 15.207 AC Mains - Average Test Lead: 115V 60Hz LINE


x Sweep Data  
 x QP Readings  
 Software Version: 5.03.02

— Readings  
 \* Average Readings  
 — 1 - 15.207 AC Mains - Average

○ Peak Readings  
 ▼ Ambient  
 — 2 - 15.207 AC Mains - Quasi-peak

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06770	Attenuator	PE7010-10	1/15/2015	1/15/2017
	AN01248	50uH LISN-Line 1 (Return) (dB)	8028-50-TS-24-BNC	1/4/2016	1/4/2017
T2	AN01248	50uH LISN-Line 2 (Line) (dB)	8028-50-TS-24-BNC	1/4/2016	1/4/2017
T3	AN02609	High Pass Filter	HE9615-150K-50-720B	2/18/2016	2/18/2018
T4	AN02668	Spectrum Analyzer	E4446A	8/14/2015	8/14/2016
T5	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T6	ANMD INT	Cable	Underground cables only	3/17/2016	3/17/2018
T7	ANP01153	Cable	NA	3/3/2016	3/3/2018

**Measurement Data:** Reading listed by margin.

Test Lead: LINE

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7		Table	dB $\mu$ V	dB $\mu$ V	dB	Ant
	MHz	dB $\mu$ V	dB	dB	dB	dB					
1	13.560M	69.1	+10.1	+0.3	+0.2	+0.0	+0.0	80.1	50.0	+30.1	LINE
	Ambient		+0.1	+0.2	+0.1						Fundamental
2	568.000k	15.8	+10.1	+0.1	+0.3	+0.0	+0.0	26.3	46.0	-19.7	LINE
			+0.0	+0.0	+0.0						
3	156.900k	23.6	+10.1	+0.1	+1.0	+0.0	+0.0	34.8	55.6	-20.8	LINE
			+0.0	+0.0	+0.0						
4	880.000k	13.3	+10.1	+0.2	+0.2	+0.0	+0.0	23.8	46.0	-22.2	LINE
			+0.0	+0.0	+0.0						
5	180.000k	21.7	+10.1	+0.1	+0.3	+0.0	+0.0	32.2	54.5	-22.3	LINE
			+0.0	+0.0	+0.0						
6	13.561M	16.6	+10.1	+0.3	+0.2	+0.0	+0.0	27.6	50.0	-22.4	LINE
			+0.1	+0.2	+0.1						Fundamental - antenna disconnected, under load
7	256.300k	18.8	+10.1	+0.1	+0.2	+0.0	+0.0	29.2	51.6	-22.4	LINE
			+0.0	+0.0	+0.0						
8	245.700k	16.7	+10.1	+0.1	+0.2	+0.0	+0.0	27.1	51.9	-24.8	LINE
			+0.0	+0.0	+0.0						
9	22.540M	12.6	+10.1	+0.6	+0.3	+0.0	+0.0	24.1	50.0	-25.9	LINE
			+0.1	+0.2	+0.2						
10	205.800k	16.9	+10.1	+0.1	+0.2	+0.0	+0.0	27.3	53.4	-26.1	LINE
			+0.0	+0.0	+0.0						
11	27.120M	12.6	+10.1	+0.1	+0.3	+0.0	+0.0	23.6	50.0	-26.4	LINE
			+0.1	+0.2	+0.2						
12	12.300M	12.0	+10.1	+0.3	+0.1	+0.0	+0.0	22.9	50.0	-27.1	LINE
			+0.1	+0.2	+0.1						
13	232.000k	11.7	+10.1	+0.1	+0.2	+0.0	+0.0	22.1	52.4	-30.3	LINE
			+0.0	+0.0	+0.0						



Test Location: CKC Laboratories, Inc. • 5046 Sierra Pines Drive • Mariposa, CA 95338 • (209) 966-5240  
Customer: **WaveLynx Technologies Corporation.**  
Specification: **15.207 AC Mains - Average**  
Work Order #: **97757** Date: 5/3/2016  
Test Type: **Conducted Emissions** Time: 13:30:48  
Tested By: Skip Doyle Sequence#: 22  
Software: EMITest 5.03.02 115V 60Hz

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 15			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 15			

***Test Conditions / Notes:***

Testing the 115VAC/60Hz input to the 12VDC power supply

Test Method: ANSI C63.10: 2013

Frequency Range of Interest:

0.150-30MHz

RBW = 9kHz; VBW > 9kHz

Environmental Conditions:

Temperature: 20°C

Relative Humidity: 35%


Atmospheric Pressure: 97.1kPa

The EUTs are powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.

It has been programmed to continuously transmit the RFID signal at 125kHz.

Configuration 15 is made up of Configurations 1, 2, 3 and 4. All were tested simultaneously. A quick "preview" of one-unit vs four units connected to the LISN was performed while the measuring instrument was set to a wide span, there was no difference in the rescan emission observed.

WaveLynx Technologies Corporation. WO#: 97757 Sequence#: 22 Date: 5/3/2016  
 15.207 AC Mains - Average Test Lead: 115V 60Hz RETURN

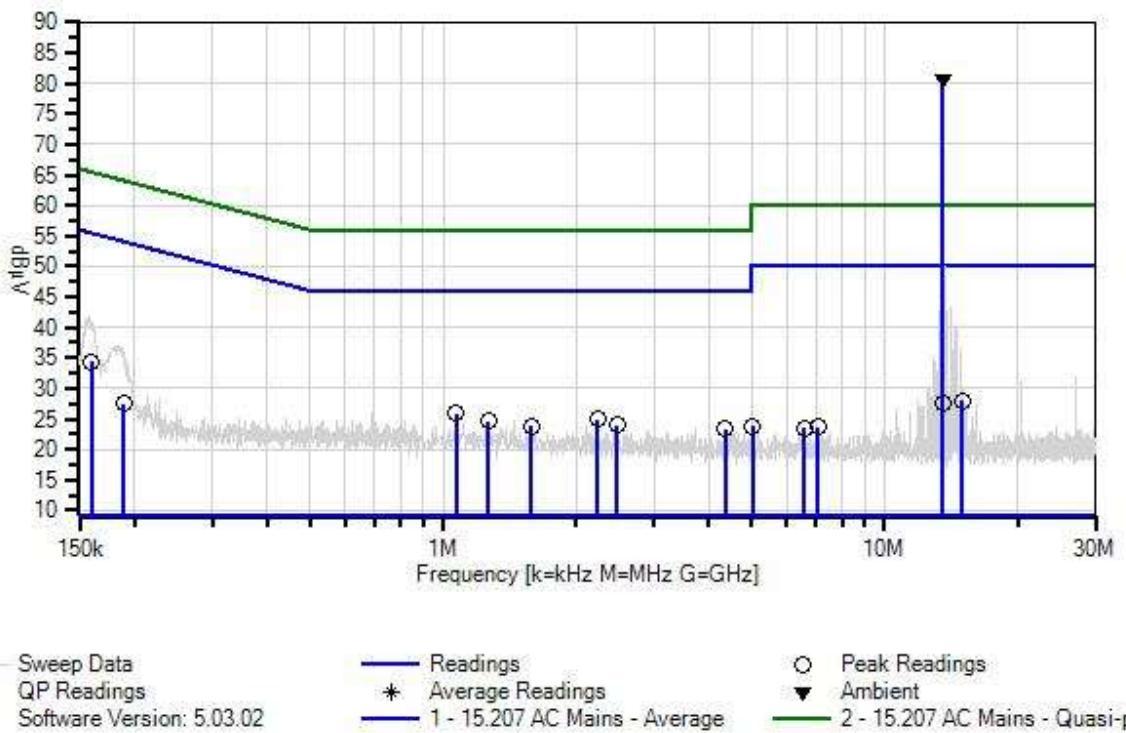

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06770	Attenuator	PE7010-10	1/15/2015	1/15/2017
T2	AN01248	50uH LISN-Line 1 (Return) (dB)	8028-50-TS-24- BNC	1/4/2016	1/4/2017
	AN01248	50uH LISN-Line 2 (Line) (dB)	8028-50-TS-24- BNC	1/4/2016	1/4/2017
T3	AN02609	High Pass Filter	HE9615-150K- 50-720B	2/18/2016	2/18/2018
T4	AN02668	Spectrum Analyzer	E4446A	8/14/2015	8/14/2016
T5	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T6	ANMD INT	Cable	Underground cables only	3/17/2016	3/17/2018
T7	ANP01153	Cable	NA	3/3/2016	3/3/2018

**Measurement Data:** Reading listed by margin.

**Test Lead: RETURN**

#	Freq	Rdng	T1 T5	T2 T6	T3 T7	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dB $\mu$ V	dB	dB	dB	dB	Table	dB $\mu$ V	dB $\mu$ V	dB	Ant
1	13.560M	69.5	+10.1 +0.1	+0.4 +0.2	+0.2 +0.1	+0.0	+0.0	80.6	50.0	+30.6	RETUR
	Ambient										Fundamental
2	1.072M	15.4	+10.1 +0.0	+0.1 +0.1	+0.2 +0.0	+0.0	+0.0	25.9	46.0	-20.1	RETUR
3	2.233M	14.4	+10.1 +0.0	+0.1 +0.1	+0.2 +0.0	+0.0	+0.0	24.9	46.0	-21.1	RETUR
4	160.000k	23.5	+10.1 +0.0	+0.1 +0.0	+0.6 +0.0	+0.0	+0.0	34.3	55.5	-21.2	RETUR
5	1.266M	14.1	+10.1 +0.0	+0.1 +0.1	+0.2 +0.0	+0.0	+0.0	24.6	46.0	-21.4	RETUR
6	2.476M	13.6	+10.1 +0.0	+0.1 +0.1	+0.1 +0.0	+0.0	+0.0	24.0	46.0	-22.0	RETUR
7	15.000M	16.8	+10.1 +0.1	+0.4 +0.2	+0.2 +0.1	+0.0	+0.0	27.9	50.0	-22.1	RETUR
8	1.585M	13.3	+10.1 +0.0	+0.1 +0.1	+0.2 +0.0	+0.0	+0.0	23.8	46.0	-22.2	RETUR
9	13.560M	16.6	+10.1 +0.1	+0.4 +0.2	+0.2 +0.1	+0.0	+0.0	27.7	50.0	-22.3	RETUR
											Fundamental- Antenna Disconnected and Loaded
10	4.357M	12.8	+10.1 +0.0	+0.1 +0.1	+0.1 +0.1	+0.0	+0.0	23.3	46.0	-22.7	RETUR
11	5.032M	13.3	+10.1 +0.0	+0.1 +0.1	+0.1 +0.1	+0.0	+0.0	23.8	50.0	-26.2	RETUR
12	7.066M	12.9	+10.1 +0.1	+0.2 +0.1	+0.2 +0.1	+0.0	+0.0	23.7	50.0	-26.3	RETUR
13	6.562M	12.6	+10.1 +0.1	+0.2 +0.1	+0.2 +0.1	+0.0	+0.0	23.4	50.0	-26.6	RETUR
14	189.000k	17.0	+10.1 +0.0	+0.1 +0.0	+0.3 +0.0	+0.0	+0.0	27.5	54.1	-26.6	RETUR



Test Location: CKC Laboratories, Inc. • 5046 Sierra Pines Drive • Mariposa, CA 95338 • (209) 966-5240  
Customer: **WaveLynx Technologies Corporation.**  
Specification: **15.207 AC Mains - Average**  
Work Order #: **97757** Date: 5/3/2016  
Test Type: **Conducted Emissions** Time: 13:34:55  
Tested By: Skip Doyle Sequence#: 24  
Software: EMITest 5.03.02 115V 60Hz

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 16			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 16			

***Test Conditions / Notes:***

Testing the 115VAC/60Hz input to the 12VDC power supply

Test Method: ANSI C 63.4 2014

Frequency Range of Interest:

0.150-30MHz

RBW = 9kHz; VBW > 9kHz

Environmental Conditions:

Temperature: 20°C


Relative Humidity: 35%

Atmospheric Pressure: 97.1kPa


The EUTs are powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.


It has been programmed to continuously transmit the RFID signal at 13.56MHz.

Configuration 16 is made up of Configurations 5, 6, 7 and 8. All were tested simultaneously. A quick "preview" of one-unit vs four units connected to the LISN was performed while the measuring instrument was set to a wide span, there was no difference in the rescan emission observed.

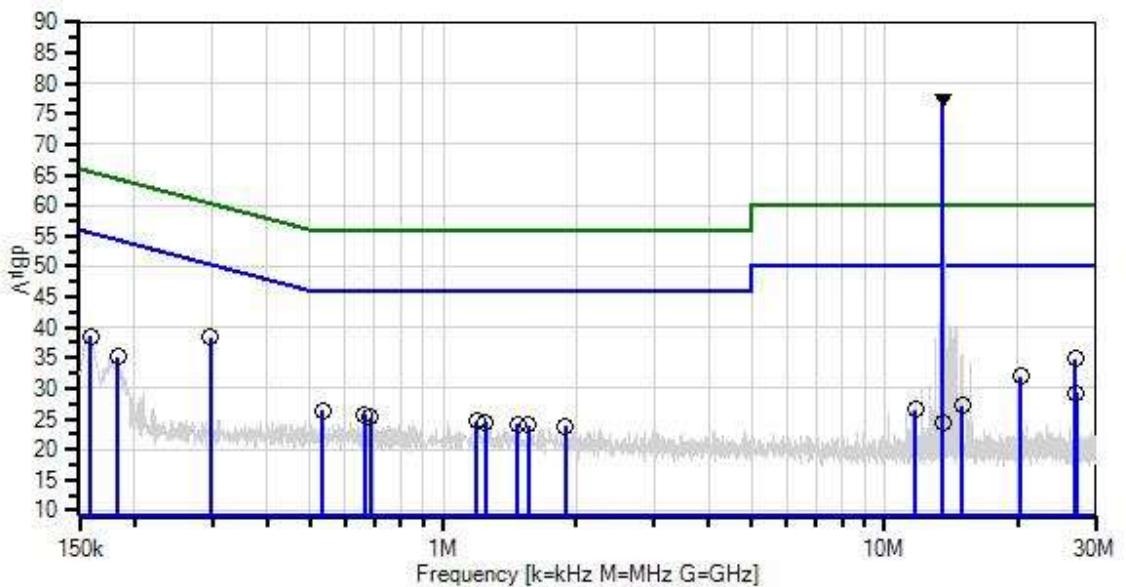WaveLynx Technologies Corporation. WO#: 97757 Sequence#: 24 Date: 5/3/2016  
 15.207 AC Mains - Average Test Lead: 115V 60Hz LINE


 Sweep Data  
 QP Readings  
 Software Version: 5.03.02

 Readings  
 Average Readings  
 1 - 15.207 AC Mains - Average

 Peak Readings  
 Ambient  
 2 - 15.207 AC Mains - Quasi-peak

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06770	Attenuator	PE7010-10	1/15/2015	1/15/2017
	AN01248	50uH LISN-Line 1 (Return) (dB)	8028-50-TS-24- BNC	1/4/2016	1/4/2017
T2	AN01248	50uH LISN-Line 2 (Line) (dB)	8028-50-TS-24- BNC	1/4/2016	1/4/2017
T3	AN02609	High Pass Filter	HE9615-150K- 50-720B	2/18/2016	2/18/2018
T4	AN02668	Spectrum Analyzer	E4446A	8/14/2015	8/14/2016
T5	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T6	ANMD INT	Cable	Underground cables only	3/17/2016	3/17/2018
T7	ANP01153	Cable	NA	3/3/2016	3/3/2018

**Measurement Data:** Reading listed by margin.

Test Lead: LINE

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7		Table	dB $\mu$ V	dB $\mu$ V	dB	Ant
			MHz	dB $\mu$ V	dB	dB	dB				
1	13.560M	66.5	+10.1	+0.3	+0.2	+0.0	+0.0	77.5	50.0	+27.5	LINE
	Ambient		+0.1	+0.2	+0.1						Fundamental
2	296.896k	27.9	+10.1	+0.1	+0.2	+0.0	+0.0	38.3	50.3	-12.0	LINE
			+0.0	+0.0	+0.0						
3	27.026M	23.9	+10.1	+0.1	+0.3	+0.0	+0.0	34.9	50.0	-15.1	LINE
			+0.1	+0.2	+0.2						
4	158.726k	27.6	+10.1	+0.1	+0.8	+0.0	+0.0	38.6	55.5	-16.9	LINE
			+0.0	+0.0	+0.0						
5	20.337M	20.7	+10.1	+0.4	+0.2	+0.0	+0.0	31.9	50.0	-18.1	LINE
			+0.1	+0.2	+0.2						
6	183.451k	24.6	+10.1	+0.1	+0.3	+0.0	+0.0	35.1	54.3	-19.2	LINE
			+0.0	+0.0	+0.0						
7	532.510k	15.8	+10.1	+0.1	+0.3	+0.0	+0.0	26.3	46.0	-19.7	LINE
			+0.0	+0.0	+0.0						
8	663.407k	15.1	+10.1	+0.2	+0.3	+0.0	+0.0	25.7	46.0	-20.3	LINE
			+0.0	+0.0	+0.0						
9	683.041k	14.7	+10.1	+0.2	+0.3	+0.0	+0.0	25.3	46.0	-20.7	LINE
			+0.0	+0.0	+0.0						
10	27.122M	18.2	+10.1	+0.1	+0.3	+0.0	+0.0	29.2	50.0	-20.8	LINE
			+0.1	+0.2	+0.2						

11	1.192M	13.8	+10.1 +0.0	+0.4 +0.1	+0.2 +0.0	+0.0 +0.0	+0.0 +0.0	24.6	46.0	-21.4	LINE
12	1.247M	13.6	+10.1 +0.0	+0.4 +0.1	+0.2 +0.0	+0.0 +0.0	+0.0 +0.0	24.4	46.0	-21.6	LINE
13	1.473M	13.3	+10.1 +0.0	+0.4 +0.1	+0.2 +0.0	+0.0 +0.0	+0.0 +0.0	24.1	46.0	-21.9	LINE
14	1.558M	13.1	+10.1 +0.0	+0.4 +0.1	+0.2 +0.0	+0.0 +0.0	+0.0 +0.0	23.9	46.0	-22.1	LINE
15	1.889M	13.0	+10.1 +0.0	+0.4 +0.1	+0.2 +0.0	+0.0 +0.0	+0.0 +0.0	23.8	46.0	-22.2	LINE
16	15.000M	16.2	+10.1 +0.1	+0.3 +0.2	+0.2 +0.1	+0.0 +0.0	+0.0 +0.0	27.2	50.0	-22.8	LINE
17	11.760M	15.6	+10.1 +0.1	+0.3 +0.2	+0.1 +0.1	+0.0 +0.0	+0.0 +0.0	26.5	50.0	-23.5	LINE
18	13.560M	13.5	+10.1 +0.1	+0.3 +0.2	+0.2 +0.1	+0.0 +0.0	+0.0 +0.0	24.5	50.0	-25.5	LINE
											Fundamental - antenna disconnected, under load



Test Location: CKC Laboratories, Inc. • 5046 Sierra Pines Drive • Mariposa, CA 95338 • (209) 966-5240  
Customer: **WaveLynx Technologies Corporation.**  
Specification: **15.207 AC Mains - Average**  
Work Order #: **97757** Date: 5/3/2016  
Test Type: **Conducted Emissions** Time: 13:41:59  
Tested By: Skip Doyle Sequence#: 23  
Software: EMITest 5.03.02 115V 60Hz

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 16			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 16			

***Test Conditions / Notes:***

Testing the 115VAC/60Hz input to the 12VDC power supply

Test Method: ANSI C 63.4 2014

Frequency Range of Interest:

0.150-30MHz

RBW = 9kHz; VBW > 9kHz

Environmental Conditions:

Temperature: 20°C


Relative Humidity: 35%

Atmospheric Pressure: 97.1kPa

The EUTs are powered by a DC power supply at 12VDC. The manufacturer declares it will only ever be wall mounted in an upright/vertical (Y-axis) orientation.

It has been programmed to continuously transmit the RFID signal at 13.56MHz.

Configuration 16 is made up of Configurations 5, 6, 7 and 8. All were tested simultaneously. A quick "preview" of one-unit vs four units connected to the LISN was performed while the measuring instrument was set to a wide span, there was no difference in the rescan emission observed.

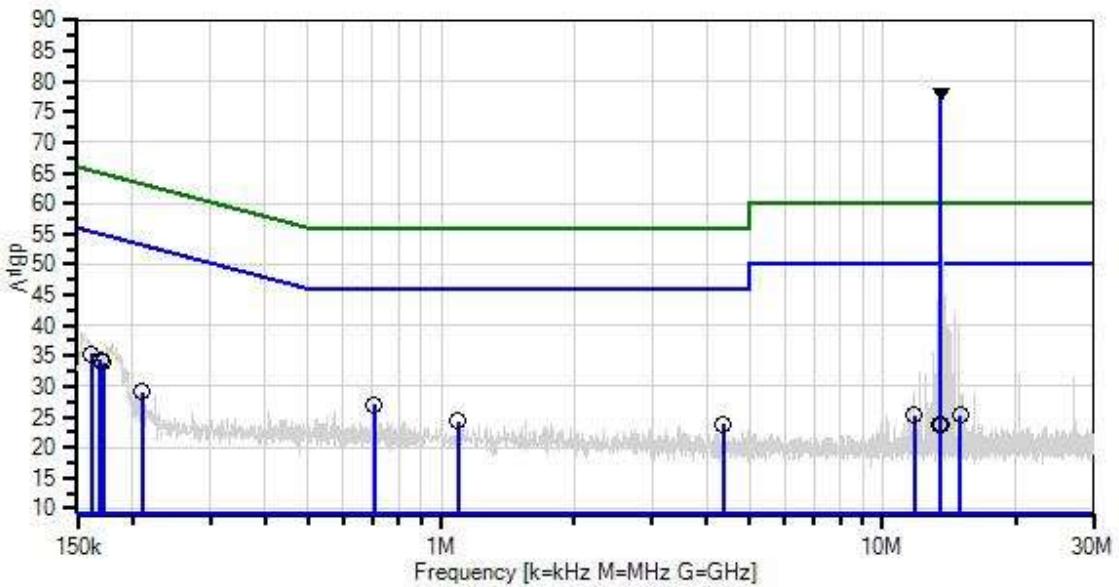WaveLynx Technologies Corporation. WO#: 97757 Sequence#: 23 Date: 5/3/2016  
 15.207 AC Mains - Average Test Lead: 115V 60Hz RETURN


x Sweep Data  
 x QP Readings  
 Software Version: 5.03.02

— Readings  
 \* Average Readings  
 — 1 - 15.207 AC Mains - Average

○ Peak Readings  
 ▼ Ambient  
 — 2 - 15.207 AC Mains - Quasi-peak

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06770	Attenuator	PE7010-10	1/15/2015	1/15/2017
T2	AN01248	50uH LISN-Line 1 (Return) (dB)	8028-50-TS-24- BNC	1/4/2016	1/4/2017
	AN01248	50uH LISN-Line 2 (Line) (dB)	8028-50-TS-24- BNC	1/4/2016	1/4/2017
T3	AN02609	High Pass Filter	HE9615-150K- 50-720B	2/18/2016	2/18/2018
T4	AN02668	Spectrum Analyzer	E4446A	8/14/2015	8/14/2016
T5	ANP06884	Cable	LMR195-FR-4	10/27/2015	10/27/2017
T6	ANMD INT	Cable	Underground cables only	3/17/2016	3/17/2018
T7	ANP01153	Cable	NA	3/3/2016	3/3/2018

**Measurement Data:** Reading listed by margin.

Test Lead: RETURN

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7		Table	dB $\mu$ V	dB $\mu$ V	dB	Ant
			MHz	dB $\mu$ V	dB	dB	dB				
1	13.560M	67.1	+10.1	+0.4	+0.2	+0.0	+0.0	78.2	50.0	+28.2	RETUR
	Ambient		+0.1	+0.2	+0.1						Fundamental
2	704.340k	16.6	+10.1	+0.1	+0.3	+0.0	+0.0	27.1	46.0	-18.9	RETUR
			+0.0	+0.0	+0.0						
3	161.640k	24.5	+10.1	+0.1	+0.6	+0.0	+0.0	35.3	55.4	-20.1	RETUR
			+0.0	+0.0	+0.0						
4	168.660k	23.7	+10.1	+0.1	+0.4	+0.0	+0.0	34.3	55.0	-20.7	RETUR
			+0.0	+0.0	+0.0						
5	171.290k	23.3	+10.1	+0.1	+0.4	+0.0	+0.0	33.9	54.9	-21.0	RETUR
			+0.0	+0.0	+0.0						
6	1.090M	13.8	+10.1	+0.1	+0.2	+0.0	+0.0	24.3	46.0	-21.7	RETUR
			+0.0	+0.1	+0.0						
7	4.357M	13.3	+10.1	+0.1	+0.1	+0.0	+0.0	23.8	46.0	-22.2	RETUR
			+0.0	+0.1	+0.1						
8	209.840k	18.7	+10.1	+0.1	+0.2	+0.0	+0.0	29.1	53.2	-24.1	RETUR
			+0.0	+0.0	+0.0						
9	11.780M	14.3	+10.1	+0.3	+0.1	+0.0	+0.0	25.2	50.0	-24.8	RETUR
			+0.1	+0.2	+0.1						
10	15.000M	14.1	+10.1	+0.4	+0.2	+0.0	+0.0	25.2	50.0	-24.8	RETUR
			+0.1	+0.2	+0.1						
11	13.450M	12.7	+10.1	+0.4	+0.2	+0.0	+0.0	23.8	50.0	-26.2	RETUR
			+0.1	+0.2	+0.1						
12	13.560M	12.6	+10.1	+0.4	+0.2	+0.0	+0.0	23.7	50.0	-26.3	RETUR
			+0.1	+0.2	+0.1						
											Fundamental - antenna disconnected, under load

**Test Setup Photos**



## APPENDIX A: TEST DATE 12/13-15/2017

### SUMMARY OF RESULTS

#### Standard / Specification: FCC Part 15 Subpart C - 15.225

<b>15.215(c)</b>	<b>Occupied Bandwidth</b>	<b>NA</b>	<b>NP</b>
15.215(c)	Occupied Bandwidth	NA	NP
15.225(a)-(c)	Field Strength of Fundamental	NA	Pass
15.225(e)	Frequency Stability	NA	NP
15.225(d)	Field Strength of Spurious Emissions	NA	Pass*
15.207	AC Conducted Emissions	NA	NP

NA = Not Applicable

NP = CKC Laboratories was not contracted to perform the test.

\*Spot checks performed on worst case emissions

### Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

#### Summary of Conditions

No modifications were made during testing.

**Modifications listed above must be incorporated into all production units.**

### Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

#### Summary of Conditions

None

## EQUIPMENT UNDER TEST (EUT)

During testing numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

### Configuration 1

*Equipment Tested:*

Device	Manufacturer	Model #	S/N
ET25-7	WaveLynx	ET25-7	NA

*Support Equipment:*

Device	Manufacturer	Model #	S/N
Power Supply	HP	8721A	NA

### General Product Information:

---

Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Modulation Type(s):	CW
Antenna Type(s) and Gain:	Loop
Antenna Connection Type:	Integral
Nominal Input Voltage:	12VDC
Firmware / Software used for Test:	WR220

## 15.225(a)-(c) Field Strength of Fundamental

### Test Data Summary – Radiated Field Strength Measurement

Frequency (MHz)	Modulation	Ant. Type	Measured (dBuV/m @ 30m)	Limit (dBuV/m @ 30m)	Results
13.56	AM	Integral	32.2	≤84	Pass

### Test Data

Test Location: CKC Laboratories, Inc. • 5046 Sierra Pines Drive • Mariposa, CA 95338 • (209) 966-5240  
 Customer: **WaveLynx Technologies Corporation**  
 Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
 Work Order #: **100602** Date: 12/13/2017  
 Test Type: **Maximized Emissions** Time: 11:37:06  
 Tested By: Michael Rauch Jr. Sequence#: 2  
 Software: EMITest 5.03.11

#### *Equipment Tested:*

Device	Manufacturer	Model #	S/N
Configuration 1			

#### *Support Equipment:*

Device	Manufacturer	Model #	S/N
Configuration 1			

#### *Test Conditions / Notes:*

Radiated Emissions Spurious Measurements (13.56MHz)

Temperature: 12.2°C

Humidity: 60%

Atmospheric Pressure: 97.8kPa

Method: ANSI C63.10 (2013)


Modulation: AM

Antenna Type: Integral

The EUT is powered by a DC power supply at 12VDC. The customer declares a typical configuration will be wall mounted in an upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.

WaveLynx Technologies Corporation. WO#. 100602 Sequence#: 2 Date: 12/13/2017  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters

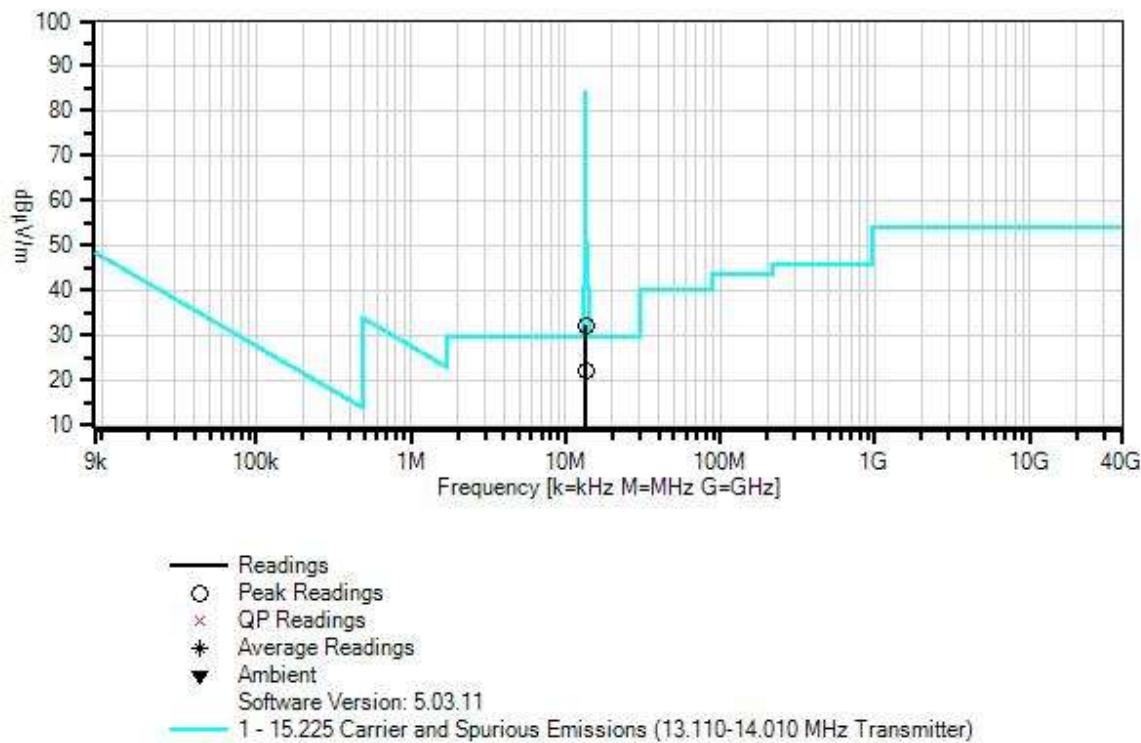

**Test Equipment:**

ID	Asset #/Serial #	Description	Model	Calibration Date	Cal Due Date
T1	ANMD3M	Cable		3/17/2016	3/17/2018
T2	ANP07059	Cable	CNT-195-FR-3	11/8/2016	11/8/2018
	AN03634	Spectrum Analyzer	E4445A	8/30/2017	8/30/2018
T3	ANP06229	Cable-Amplitude 15 to 45degC (dB)	CXTA04A-50	11/29/2016	11/29/2018
	ANP06229	Cable-Amplitude - 15 to 15degC	CXTA04A-50	11/29/2016	11/29/2018
T4	AN00226	Loop Antenna	6502	4/4/2016	4/4/2018
	ANdBuA	Unit Conversion		7/20/2016	7/20/2018

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	13.560M	61.7	+0.4	+0.1	+0.4	+9.6	-40.0 105	32.2 12VDC	84.0	-51.8 100	Perpe 100
2	13.560M	51.6	+0.4	+0.1	+0.4	+9.6	-40.0 197	22.1 12VDC	84.0	-61.9 100	Paral 100
3	13.560M	35.2	+0.4	+0.1	+0.4	+9.6	-40.0 238	5.7 12VDC	84.0	-78.3 100	Z-Axi 100

**Test Setup Photo**



## 15.225(d) Radiated Emissions

### Test Data

Test Location: CKC Laboratories, Inc. • 5046 Sierra Pines Drive • Mariposa, CA 95338 • (209) 966-5240  
 Customer: **WaveLynx Technologies Corporation**  
 Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
 Work Order #: **100602** Date: 12/13/2017  
 Test Type: **Maximized Emissions** Time: 18:41:38  
 Tested By: Randal Clark Sequence#: 3  
 Software: EMITest 5.03.11

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Test Conditions / Notes:***

Radiated Emissions Spurious Measurements (13.56MHz)

Temperature: 16°C

Humidity: 63%

Atmospheric Pressure: 97.8kPa

Method: ANSI C63.10 (2013)

Modulation: AM


Antenna Type: Integral

The EUT is powered by a DC power supply at 12VDC. The customer declares a typical configuration will be wall mounted in an upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.

Frequency range tested: 9kHz – 30MHz

WaveLynx Technologies Corporation. WO#. 100602 Sequence#: 3 Date: 12/13/2017  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters

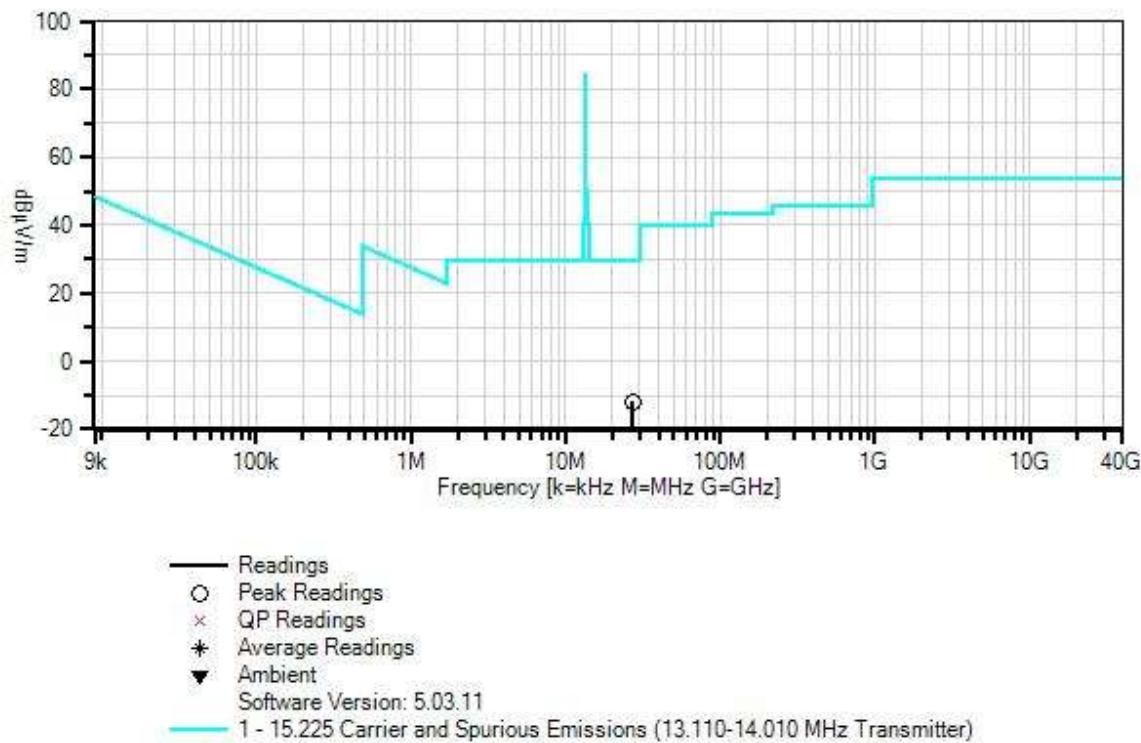

**Test Equipment:**

ID	Asset #/Serial #	Description	Model	Calibration Date	Cal Due Date
T1	ANMD3M	Cable		3/17/2016	3/17/2018
T2	ANP07059	Cable	CNT-195-FR-3	11/8/2016	11/8/2018
	AN03634	Spectrum Analyzer	E4445A	8/30/2017	8/30/2018
T3	ANP06229	Cable-Amplitude 15 to 45degC (dB)	CXTA04A-50	11/29/2016	11/29/2018
	ANP06229	Cable-Amplitude - 15 to 15degC	CXTA04A-50	11/29/2016	11/29/2018
T4	AN00226	Loop Antenna	6502	4/4/2016	4/4/2018
	ANdBuA	Unit Conversion		7/20/2016	7/20/2018

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	27.120M	20.7	+0.6	+0.1	+0.5	+6.3	-40.0	-11.8	29.5	-41.3	Perpe
2	27.120M	12.4	+0.6	+0.1	+0.5	+6.3	-40.0	-20.1	29.5	-49.6	Parra



Test Location: CKC Laboratories, Inc. • 5046 Sierra Pines Drive • Mariposa, CA 95338 • (209) 966-5240  
Customer: **WaveLynx Technologies Corporation.**  
Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
Work Order #: **100602** Date: 12/14/2017  
Test Type: **Maximized Emissions** Time: 12:39:43  
Tested By: Randal Clark Sequence#: 10  
Software: EMITest 5.03.11

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Test Conditions / Notes:***

Radiated Emissions Spurious Measurements (13.56MHz)  
Readings represent spot checks on worst case harmonics.

Temperature: 18°C  
Humidity: 27%  
Atmospheric Pressure: 97.8kPa


Method: ANSI C63.10 (2013)

Modulation: AM  
Antenna Type: Integral

The EUT is powered by a DC power supply at 12VDC. The customer declares a typical configuration will be wall mounted in an upright/vertical (Y-axis) orientation.  
The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.

Frequency range tested: 30-1000MHz

WaveLynx Technologies Corporation. WO#: 100602 Sequence#: 10 Date: 12/14/2017  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters

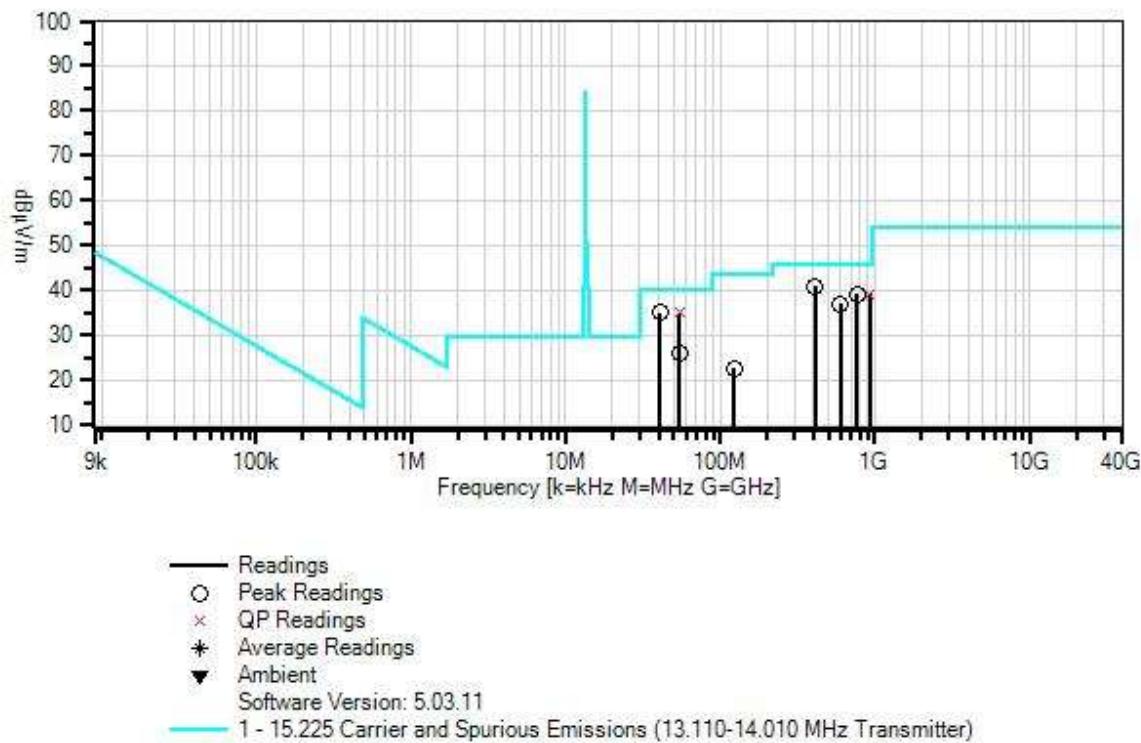

**Test Equipment:**

ID	Asset #/Serial #	Description	Model	Calibration Date	Cal Due Date
	AN03634	Spectrum Analyzer	E4445A	8/30/2017	8/30/2018
T1	AN00282	Preamp	8447D	4/7/2016	4/7/2018
T2	AN01993	Biconilog Antenna	CBL6111C	11/1/2016	11/1/2018
T3	ANP05656	Attenuator	PE7004-6	12/22/2015	12/22/2017
T4	ANMD3M	Cable		3/17/2016	3/17/2018
T5	ANP07059	Cable	CNT-195-FR-3	11/8/2016	11/8/2018
T6	ANP06229	Cable-Amplitude 15 to 45degC (dB)	CXTA04A-50	11/29/2016	11/29/2018
	ANP06229	Cable-Amplitude - 15 to 15degC	CXTA04A-50	11/29/2016	11/29/2018
T7	ANP06885	Cable	P06885	9/6/2017	9/6/2019

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dB $\mu$ V	dB	dB	dB	dB	Table	dB $\mu$ V/m	dB $\mu$ V/m	dB	Ant
1	54.239M	47.9	-27.8	+7.1	+6.0	+0.8	+0.0	35.1	40.0	-4.9	Vert
	QP		+0.1	+0.8	+0.2						
^	54.240M	49.6	-27.8	+7.1	+6.0	+0.8	+0.0	36.8	40.0	-3.2	Vert
			+0.1	+0.8	+0.2						
3	40.680M	42.5	-27.9	+12.9	+6.0	+0.7	+0.0	35.1	40.0	-4.9	Vert
			+0.1	+0.6	+0.2						
4	406.800M	41.1	-27.7	+16.2	+6.0	+2.2	+0.0	40.9	46.0	-5.1	Vert
			+0.3	+2.3	+0.5						
5	922.075M	29.0	-27.8	+23.7	+6.0	+3.4	+0.0	39.1	46.0	-6.9	Horiz
	QP		+0.4	+3.7	+0.7						
^	922.080M	32.4	-27.8	+23.7	+6.0	+3.4	+0.0	42.5	46.0	-3.5	Horiz
			+0.4	+3.7	+0.7						
7	759.360M	32.0	-28.2	+21.9	+6.0	+3.0	+0.0	39.1	46.0	-6.9	Vert
			+0.4	+3.3	+0.7						
8	596.640M	32.6	-28.4	+20.2	+6.0	+2.7	+0.0	36.9	46.0	-9.1	Vert
			+0.3	+2.9	+0.6						
9	54.240M	38.7	-27.8	+7.1	+6.0	+0.8	+0.0	25.9	40.0	-14.1	Horiz
			+0.1	+0.8	+0.2						
10	122.040M	29.8	-27.6	+11.6	+6.0	+1.2	+0.0	22.7	43.5	-20.8	Vert
			+0.2	+1.2	+0.3						

Test Setup Photo



## SUPPLEMENTAL INFORMATION

### Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2. Compliance is deemed to occur provided measurements are below the specified limits.

### Emissions Test Details

#### TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

#### CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dB $\mu$ V/m, the spectrum analyzer reading in dB $\mu$ V was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

SAMPLE CALCULATIONS	
Meter reading	(dB $\mu$ V)
+ Antenna Factor	(dB/m)
+ Cable Loss	(dB)
- Distance Correction	(dB)
- Preamplifier Gain	(dB)
= Corrected Reading	(dB $\mu$ V/m)

## TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

## SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

### Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

### Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

### Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.