



FCC RADIO TEST REPORT

FCC ID : 2AEIM-17355113
Equipment : Mobile Connector Gen 3
Brand Name : Tesla
Model Name : 1937825-XX-Y
Applicant : Tesla, Inc.
3500 DEER CREEK ROAD PALO ALTO, CA 94304
Manufacturer : Tesla, Inc.
3500 DEER CREEK ROAD PALO ALTO, CA 94304
Standard : FCC Part 15 Subpart C §15.247

The product was received on Dec. 11, 2024 and testing was performed from Dec. 19, 2024 to Feb. 18, 2025. We, Sporton International (USA) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International (USA) Inc., the test report shall not be reproduced except in full.

Approved by: Neil Kao

Sportun International (USA) Inc.
1175 Montague Expressway, Milpitas, CA 95035



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	5
2 Test Configuration of Equipment Under Test.....	6
2.1 Carrier Frequency Channel	6
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System	8
2.4 Support Unit used in test configuration and system	8
2.5 EUT Operation Test Setup	8
2.6 Measurement Results Explanation Example.....	9
3 Test Result.....	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	11
3.3 Power Spectral Density Measurement	12
3.4 Conducted Band Edges and Spurious Emission Measurement	13
3.5 Radiated Band Edges and Spurious Emission Measurement	14
3.6 AC Conducted Emission Measurement.....	18
3.7 Antenna Requirements.....	20
4 List of Measuring Equipment	21
5 Measurement Uncertainty	22
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs Bluetooth-LE and UHF.	
Antenna Type Bluetooth-LE: PCBA Antenna	
Antenna information	
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi) 1.26

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sportun International (USA) Inc.
Test Site Location	1175 Montague Expressway, Milpitas, CA 95035 TEL : 408 9043300
Test Site No.	Sportun Site No.
	TH01-CA, CO01-CA, 03CH02-CA

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: US1250

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- FCC KDB 414788 D01 Radiated Test Site v01r01
- ANSI C63.10-2020

Remark: All the test items were validated and recorded in accordance with the standards without any modification during the testing.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-




2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
AC Conducted Emission	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
	Mode 1: Bluetooth-LE Link + UHF Idle + AC Power
	Mode 2: Bluetooth-LE Idle + UHF Link + AC Power
Remark:	
1. The worst case of Conducted Emission is mode 2; only the test data of it was reported.	
2. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	
3. The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

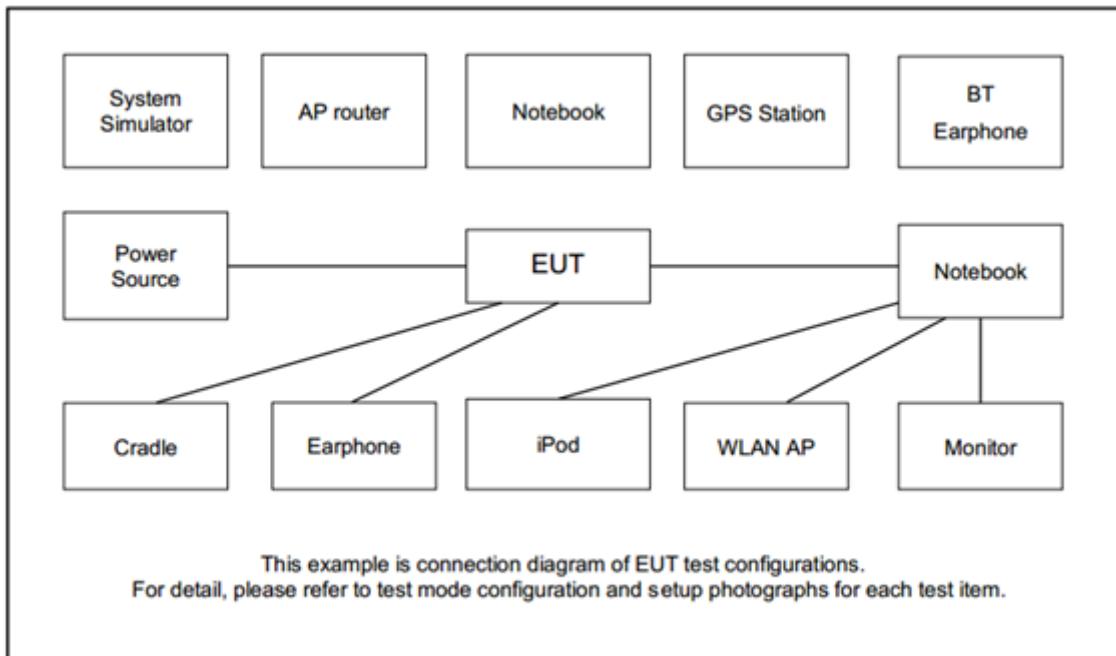

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Fixture	Texas Instruments	CC1352R1	N/A	N/A	N/A
2.	Notebook	Lenovo	21EB0020US	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Notebook	ASUS	ASUS EXPERTBOOK B1402CVA_B1408CVA	PD9AX211NG	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

The RF test items, utility "SmartRF Studio 7 Version 2.28.0" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

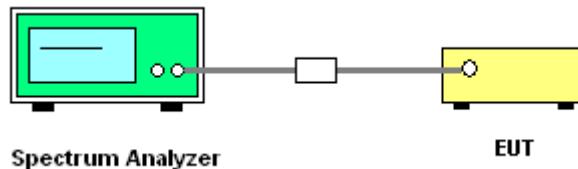

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

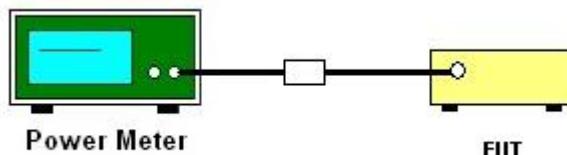

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

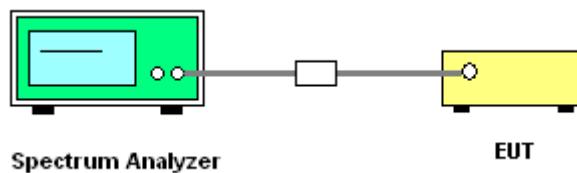

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

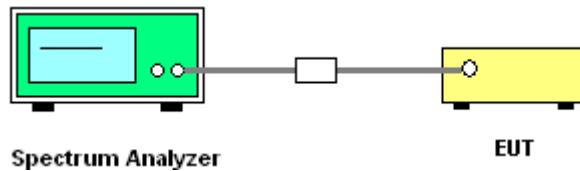

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.



3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

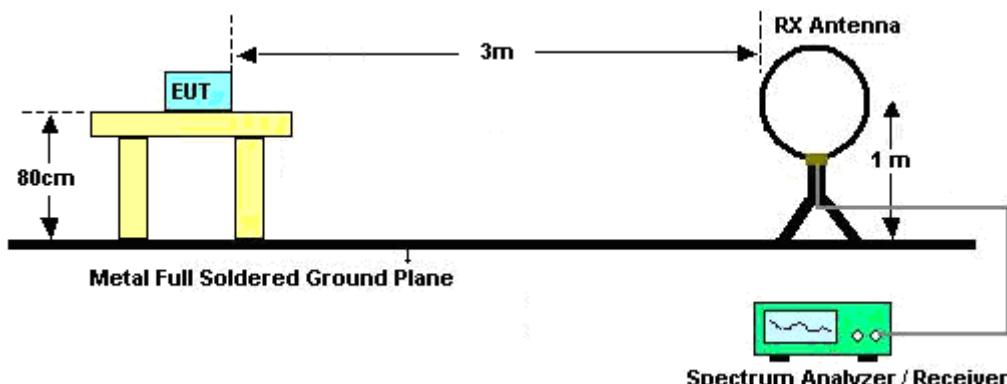


For radiated test from 30MHz to 1GHz

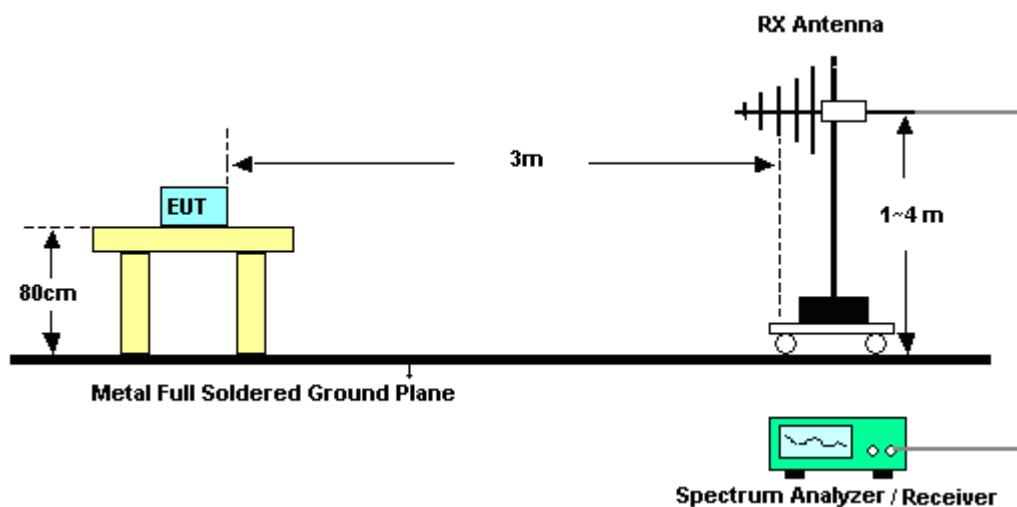

For radiated test from 1GHz to 18GHz

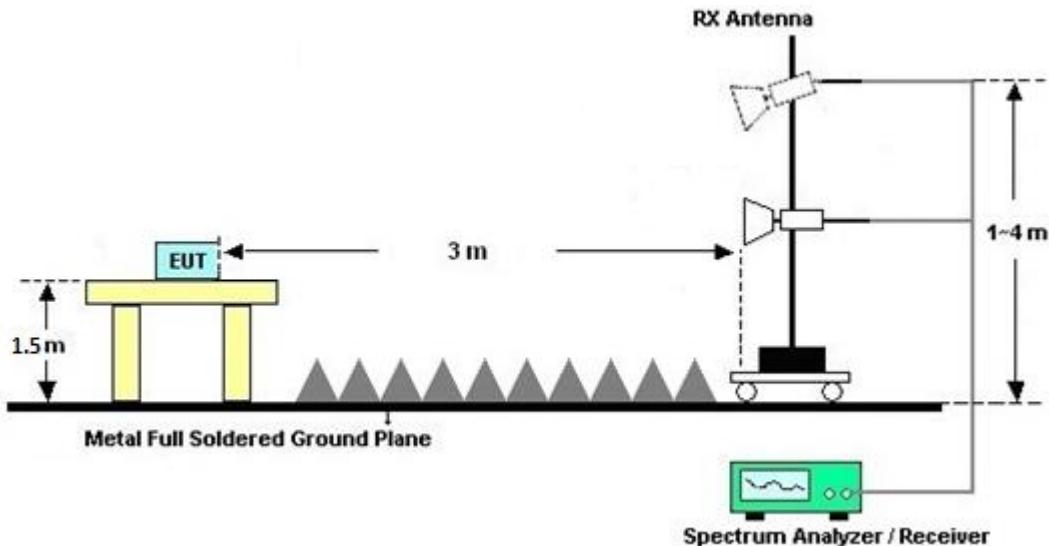

For radiated test above 18GHz

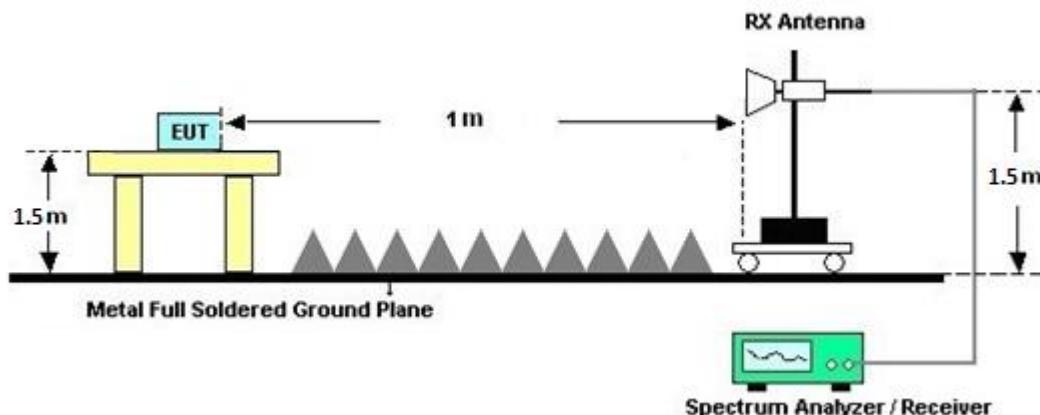

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

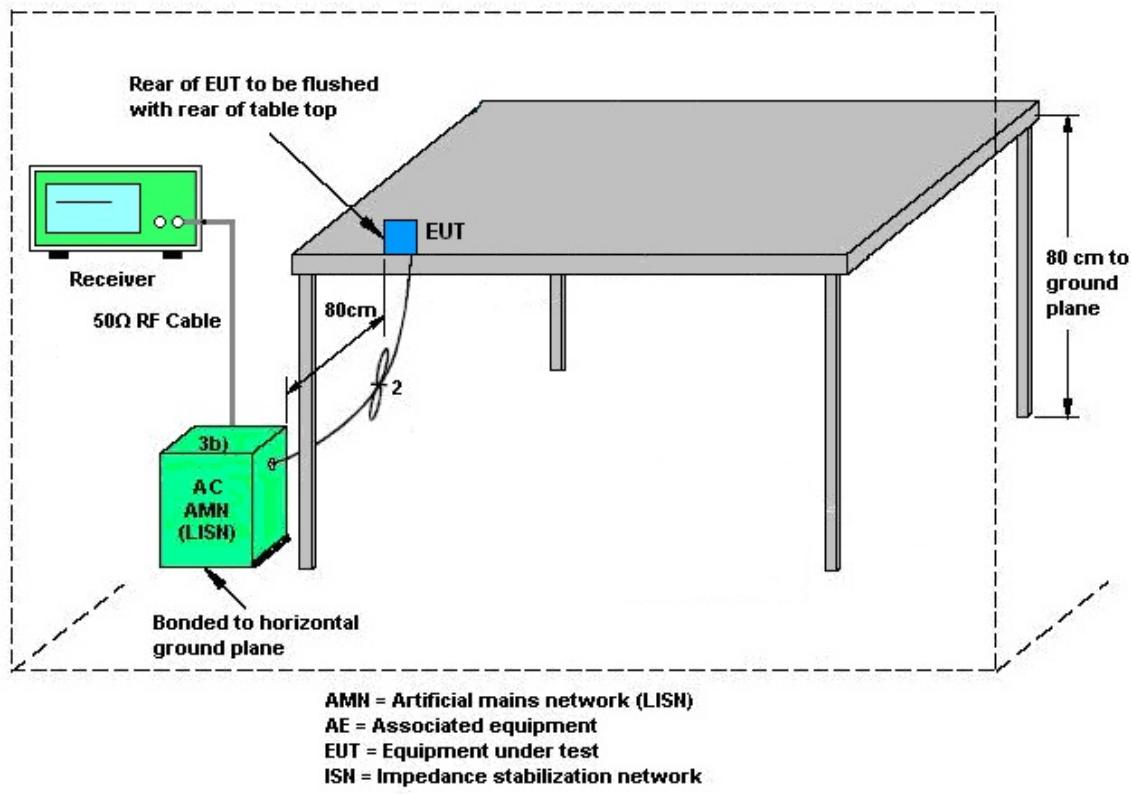

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	6111D	50391	30MHz~1GHz	Aug. 07, 2024	Jan. 04, 2025~Jan. 11, 2025	Aug. 06, 2025	Radiation (03CH02-CA)
Loop Antenna	R&S	HFH2-Z2E	100840	9kHz~30MHz	May 02, 2024	Jan. 04, 2025~Jan. 11, 2025	May 01, 2024	Radiation (03CH02-CA)
Horn Antenna	SCHWARZBECK	BBHA 9120D	02115	1GHz~18GHz	Aug. 06, 2024	Jan. 04, 2025~Jan. 11, 2025	Aug. 05, 2025	Radiation (03CH02-CA)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00841	18GHz~40GHz	Aug. 07, 2024	Jan. 04, 2025~Jan. 11, 2025	Aug. 06, 2025	Radiation (03CH02-CA)
Amplifier	SONOMA	310N	372240	9kHz~1GHz	Apr. 24, 2024	Jan. 04, 2025~Jan. 11, 2025	Apr. 23, 2025	Radiation (03CH02-CA)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN9	3GHz High Pass Filter	Jun. 04, 2024	Jan. 04, 2025~Jan. 11, 2025	Jun. 03, 2025	Radiation (03CH02-CA)
Filter	Wainwright	WLK12-1200-1272-11000-40SS	SN1	1.2GHz Low Pass Filter	Jun. 04, 2024	Jan. 04, 2025~Jan. 11, 2025	Jun. 03, 2025	Radiation (03CH02-CA)
Preamplifier	Keysight	83017A	MY53270321	1GHz~26.5GHz	Apr. 25, 2024	Jan. 04, 2025~Jan. 11, 2025	Apr. 24, 2025	Radiation (03CH02-CA)
Preamplifier	E-instrument	ERA-100M-18G-56-01-A70	EC1900251	1GHz~18GHz	Apr. 24, 2024	Jan. 04, 2025~Jan. 11, 2025	Apr. 23, 2025	Radiation (03CH02-CA)
Preamplifier	EMEC	EMC18G40G	060726	18G-40G	Apr. 04, 2024	Jan. 04, 2025~Jan. 11, 2025	Apr. 03, 2025	Radiation (03CH02-CA)
RF Cable	HUBER+SUHNER	SUCOFLEX 102	804209/2, 802406/2, 802875/2, 802952/2	N/A	Oct. 10, 2024	Jan. 04, 2025~Jan. 11, 2025	Oct. 09, 2025	Radiation (03CH02-CA)
Hygrometer	TESEO	608-H1	45142602	N/A	Aug. 14, 2024	Jan. 04, 2025~Jan. 11, 2025	Aug. 13, 2025	Radiation (03CH02-CA)
Controller	Chaintek	EM-1000	060876	Control Turn Table & Antenna Mast	N/A	Jan. 04, 2025~Jan. 11, 2025	N/A	Radiation (03CH02-CA)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jan. 04, 2025~Jan. 11, 2025	N/A	Radiation (03CH02-CA)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jan. 04, 2025~Jan. 11, 2025	N/A	Radiation (03CH02-CA)
Test Software	Audix E3	E3	N/A	N/A	N/A	Jan. 04, 2025~Jan. 11, 2025	N/A	Radiation (03CH02-CA)
Hygrometer	Testo	608-H1	45141354	N/A	Aug. 14, 2024	Dec. 19, 2024	Aug. 13, 2025	Conducted (TH01-CA)
Power Sensor	DARE!!	RPR3006W	RPR8W-2301002	10MHz~8GHz	Feb. 22, 2024	Dec. 19, 2024	Feb. 21, 2025	Conducted (TH01-CA)
Spectrum analyzer	Rhodes & Schwarz	FSV40	101089	10Hz~40GHz	Apr. 24, 2024	Dec. 19, 2024	Apr. 23, 2025	Conducted (TH01-CA)
Switch Box	EM Electronics	EMSW26	1090304	N/A	Oct. 04, 2024	Dec. 19, 2024	Oct. 03, 2025	Conducted (TH01-CA)
LISN	TESEQ	NNB51	47415	N/A	Aug. 14, 2024	Feb. 18, 2025	Aug. 13, 2025	Conduction (CO01-CA)
LISN	TESEQ	NNB51	47407	N/A	Apr. 23, 2024	Feb. 18, 2025	Aug. 22, 2025	Conduction (CO01-CA)
EMI Test Receiver	R&S	ESR7	102177	9kHz~7GHz	Apr. 23, 2024	Feb. 18, 2025	Aug. 22, 2025	Conduction (CO01-CA)
Pulse limiter with 10dB attenuation	R&S	VTSD 9561-FN	9561-F-N00412	N/A	Jun. 04, 2024	Feb. 18, 2025	Jun. 03, 2025	Conduction (CO01-CA)
LISN Cable	HUBER+SUHNER	RG-214/U	LISN cable -01	N/A	Jun. 04, 2024	Feb. 18, 2025	Jun. 03, 2025	Conduction (CO01-CA)
Test Software	R&S	EMC32 V10.30.0	N/A	N/A	N/A	Feb. 18, 2025	N/A	Conduction (CO01-CA)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	3.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	5.4 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	4.5 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Venkata Kondepudi				Temperature:	20.9	°C
Test Date:	2024/12/19				Relative Humidity:	44.1	%

<u>TEST RESULTS DATA</u> <u>6dB and 99% Occupied Bandwidth</u>								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.090	0.704	0.50	Pass
BLE	1Mbps	1	19	2440	1.075	0.696	0.50	Pass
BLE	1Mbps	1	39	2480	1.086	0.705	0.50	Pass

<u>TEST RESULTS DATA</u> <u>Average Power Table</u>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	1.98	30.00	1.26	3.24	36.00	Pass
BLE	1Mbps	1	19	2440	1.76	30.00	1.26	3.02	36.00	Pass
BLE	1Mbps	1	39	2480	1.30	30.00	1.26	2.56	36.00	Pass

<u>TEST RESULTS DATA</u> <u>Peak Power Density</u>									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.79	-9.38	1.26	8.00	Pass
BLE	1Mbps	1	19	2440	1.62	-9.41	1.26	8.00	Pass
BLE	1Mbps	1	39	2480	1.12	-11.26	1.26	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.058	1.373	0.50	Pass
BLE	2Mbps	1	19	2440	2.043	1.369	0.50	Pass
BLE	2Mbps	1	39	2480	2.075	1.425	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	1.98	30.00	1.26	3.24	36.00	Pass
BLE	2Mbps	1	19	2440	1.77	30.00	1.26	3.03	36.00	Pass
BLE	2Mbps	1	39	2480	1.30	30.00	1.26	2.56	36.00	Pass




TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	1.28	-11.35	1.26	8.00	Pass
BLE	2Mbps	1	19	2440	1.05	-11.65	1.26	8.00	Pass
BLE	2Mbps	1	39	2480	0.45	-12.34	1.26	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.


**6dB Bandwidth**

<1Mbps>

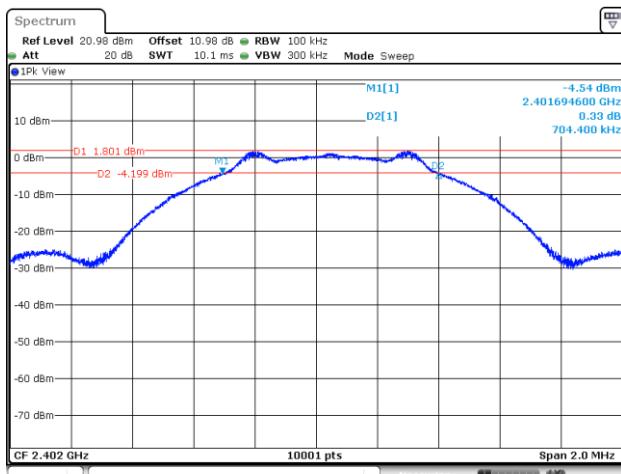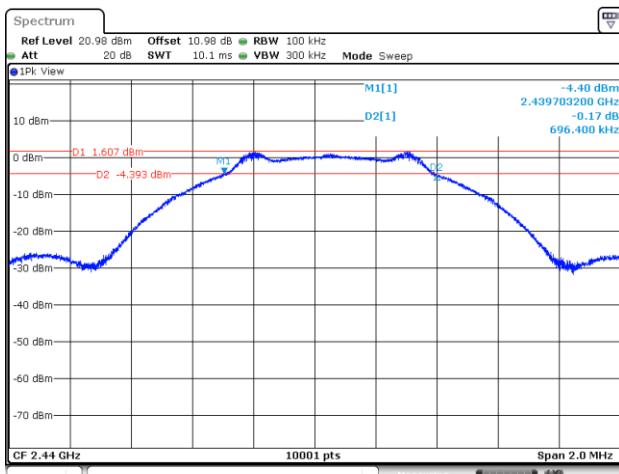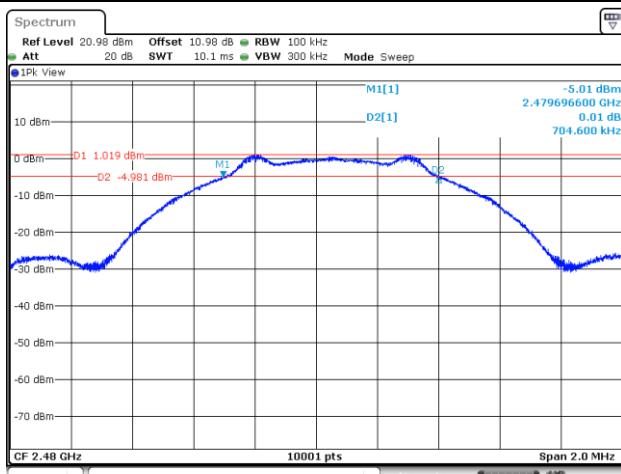6 dB Bandwidth Plot on Channel 00**6 dB Bandwidth Plot on Channel 19****6 dB Bandwidth Plot on Channel 39**






<2Mbps>

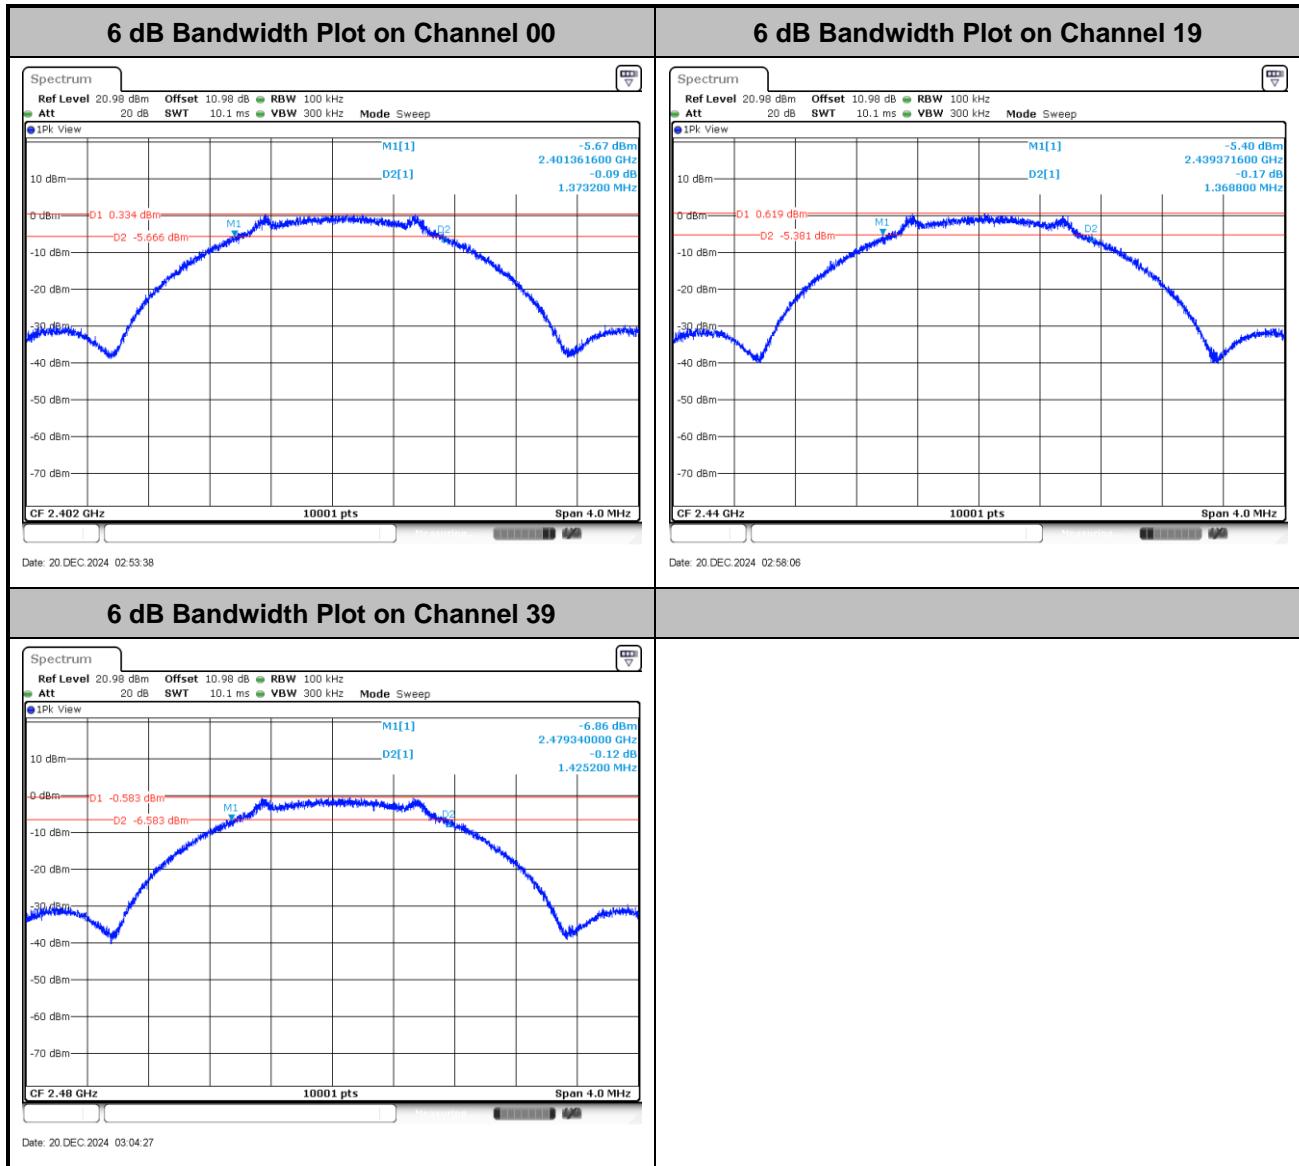


**99% Occupied Bandwidth**

<1Mbps>

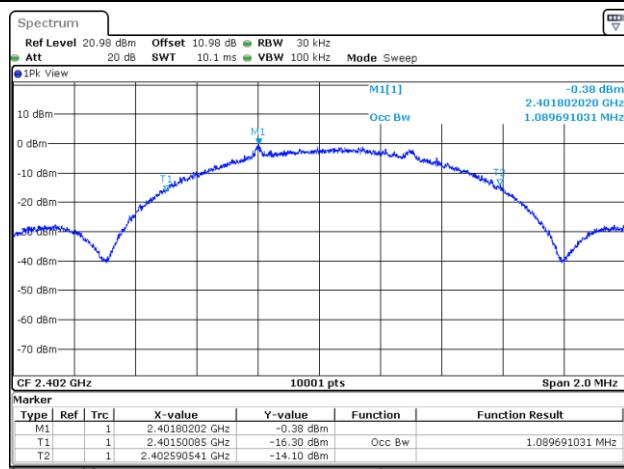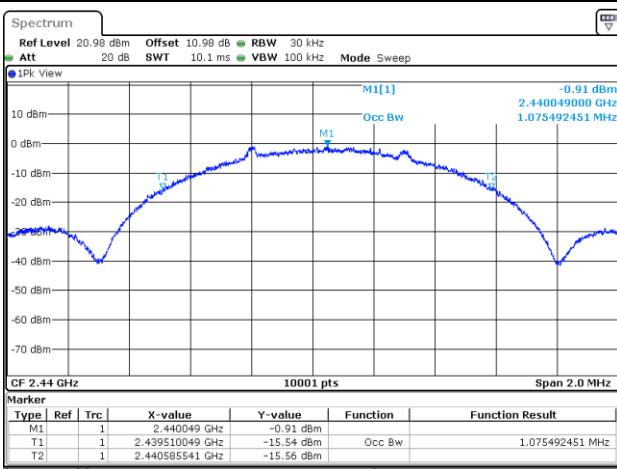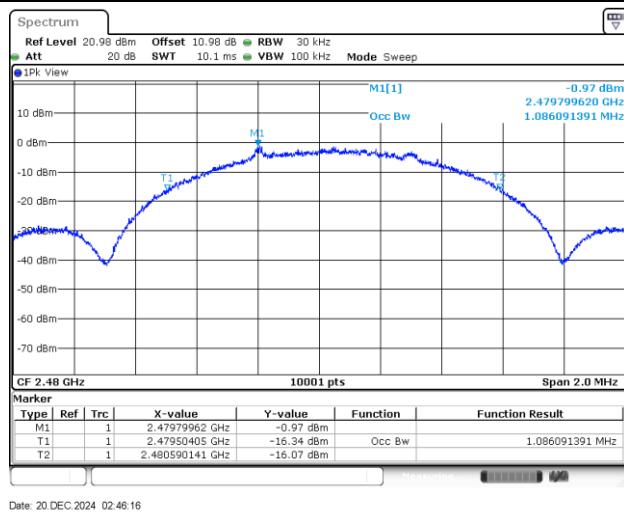99% Occupied Bandwidth Plot on Channel 00**99% Occupied Bandwidth Plot on Channel 19****99% Occupied Bandwidth Plot on Channel 39**




<2Mbps>

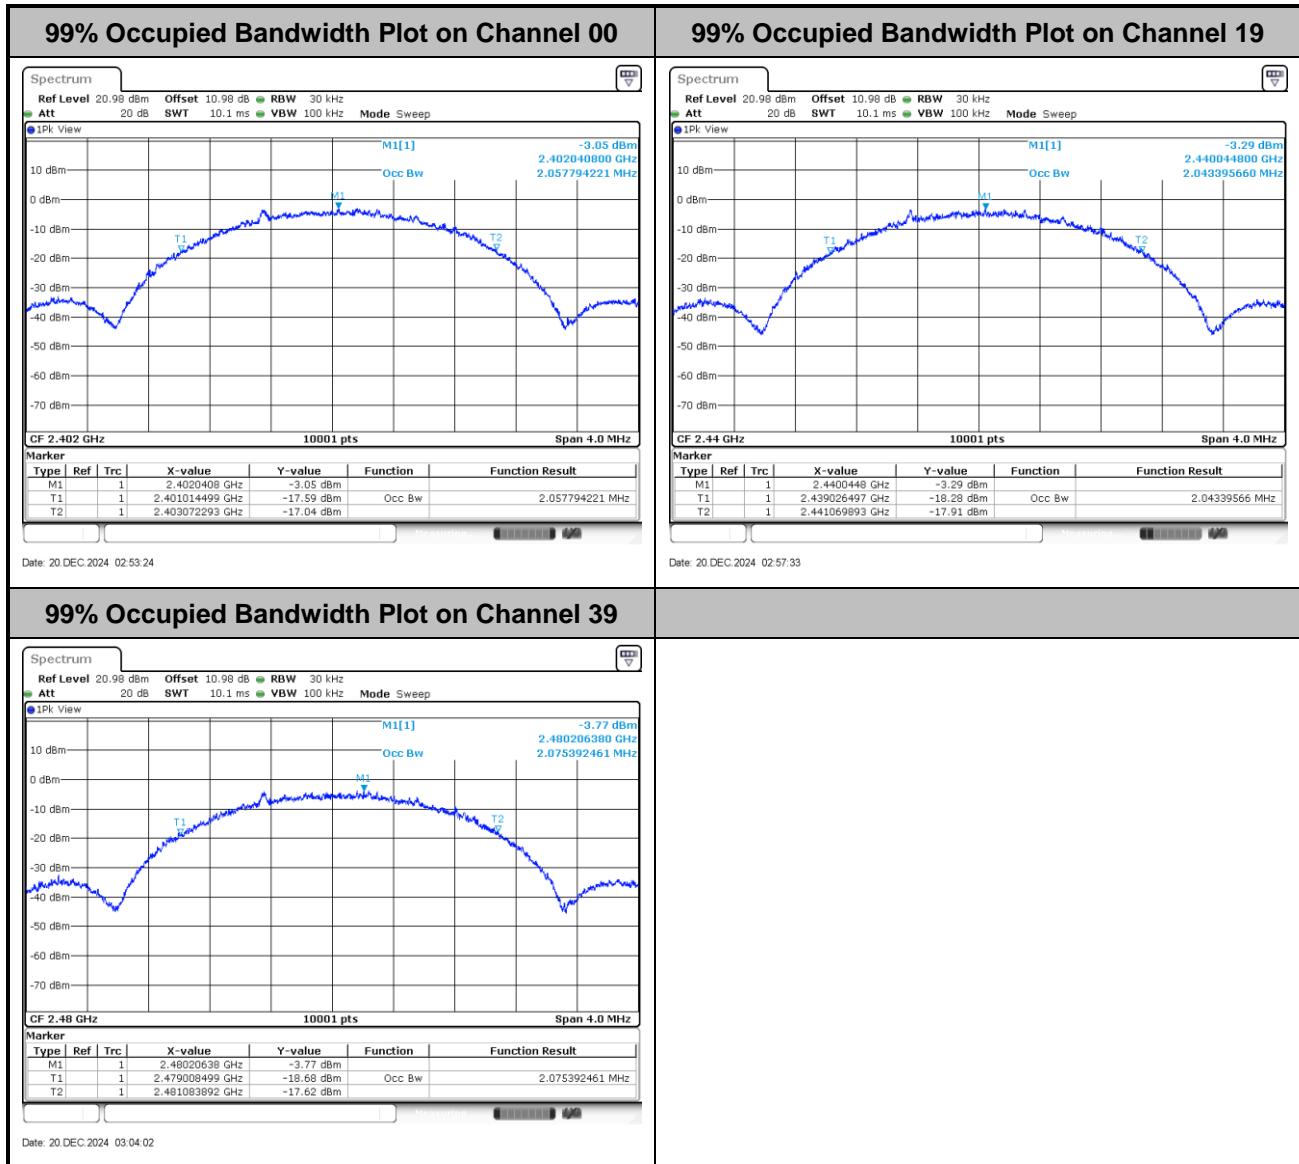


**Power Spectral Density (dBm/3kHz)**

<1Mbps>

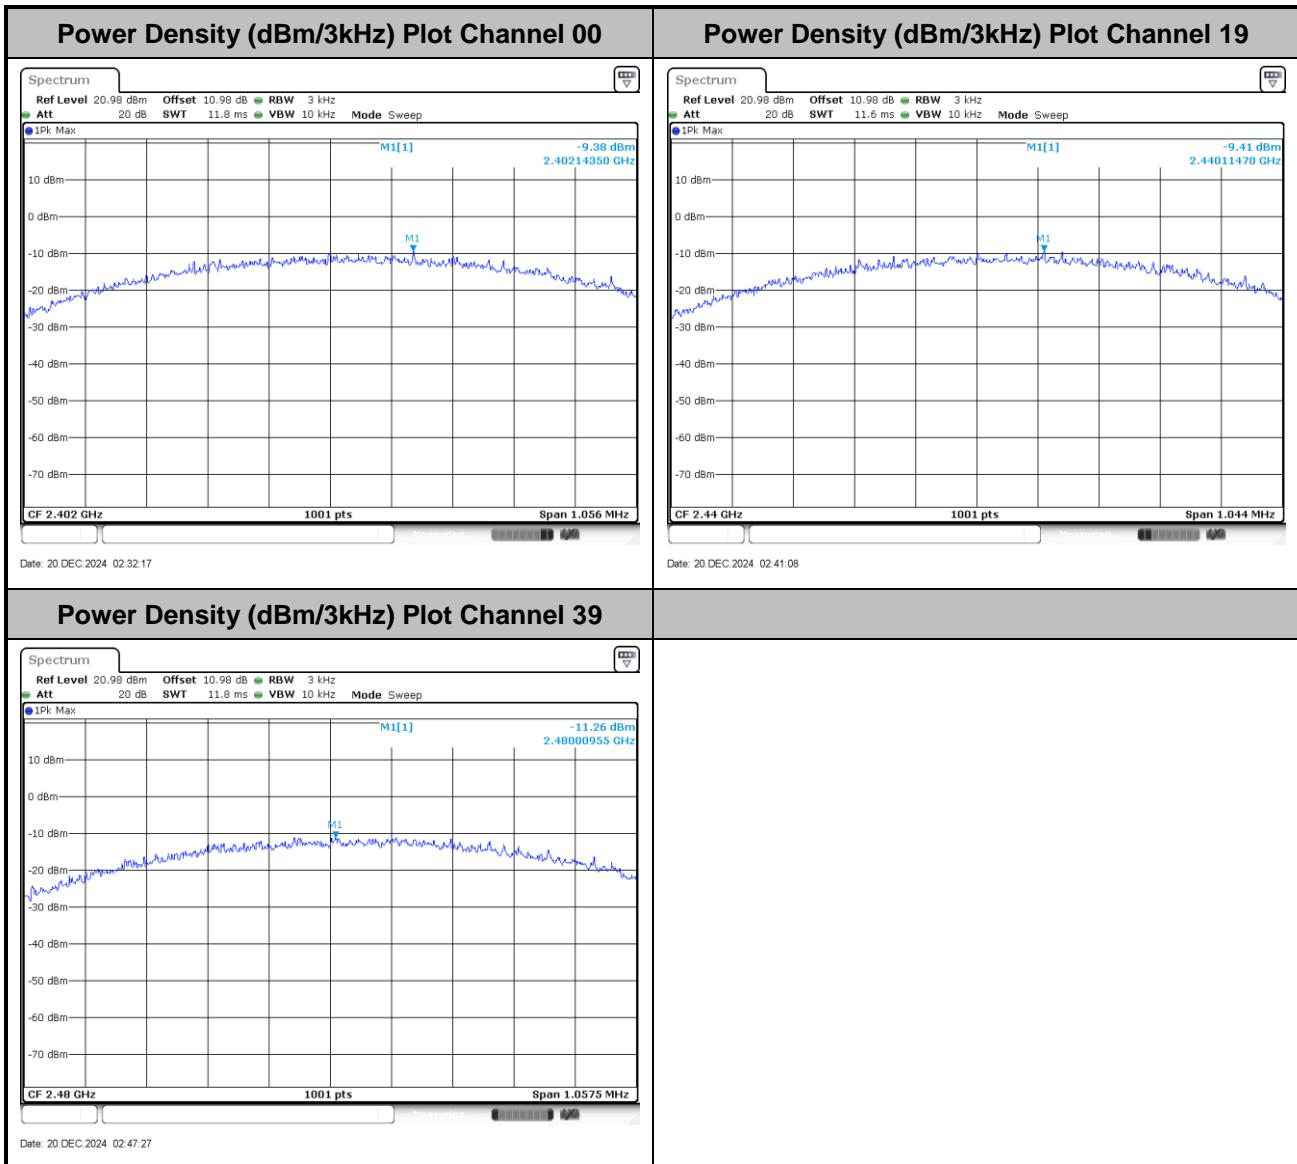





<2Mbps>

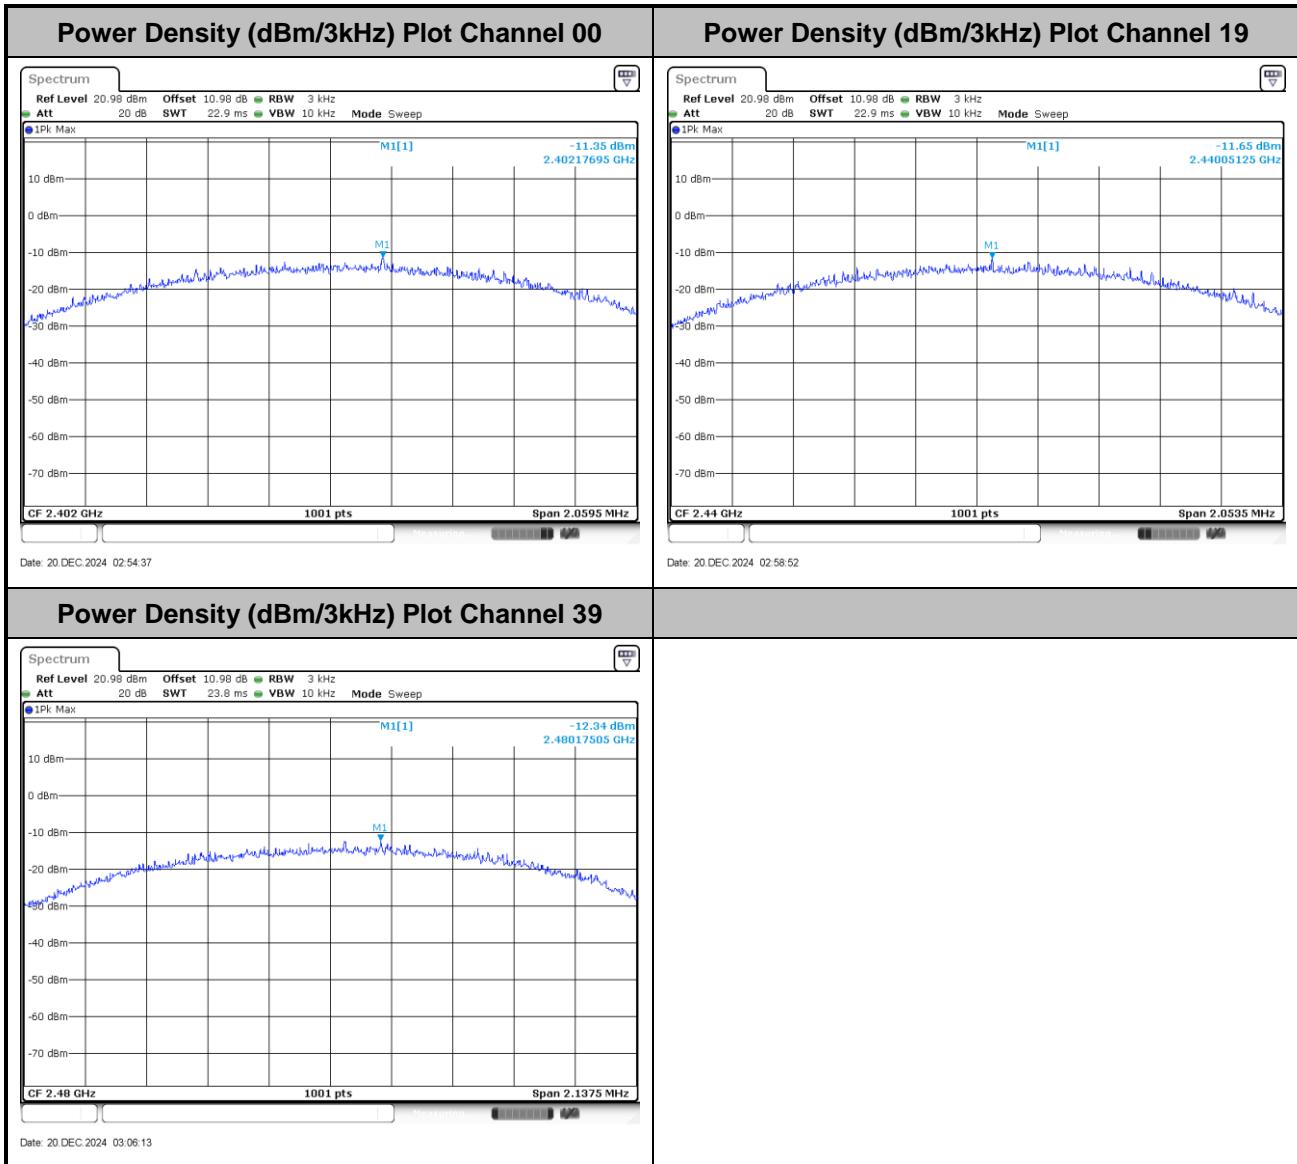


**Band Edge and Conducted Spurious Emission**

<1Mbps>

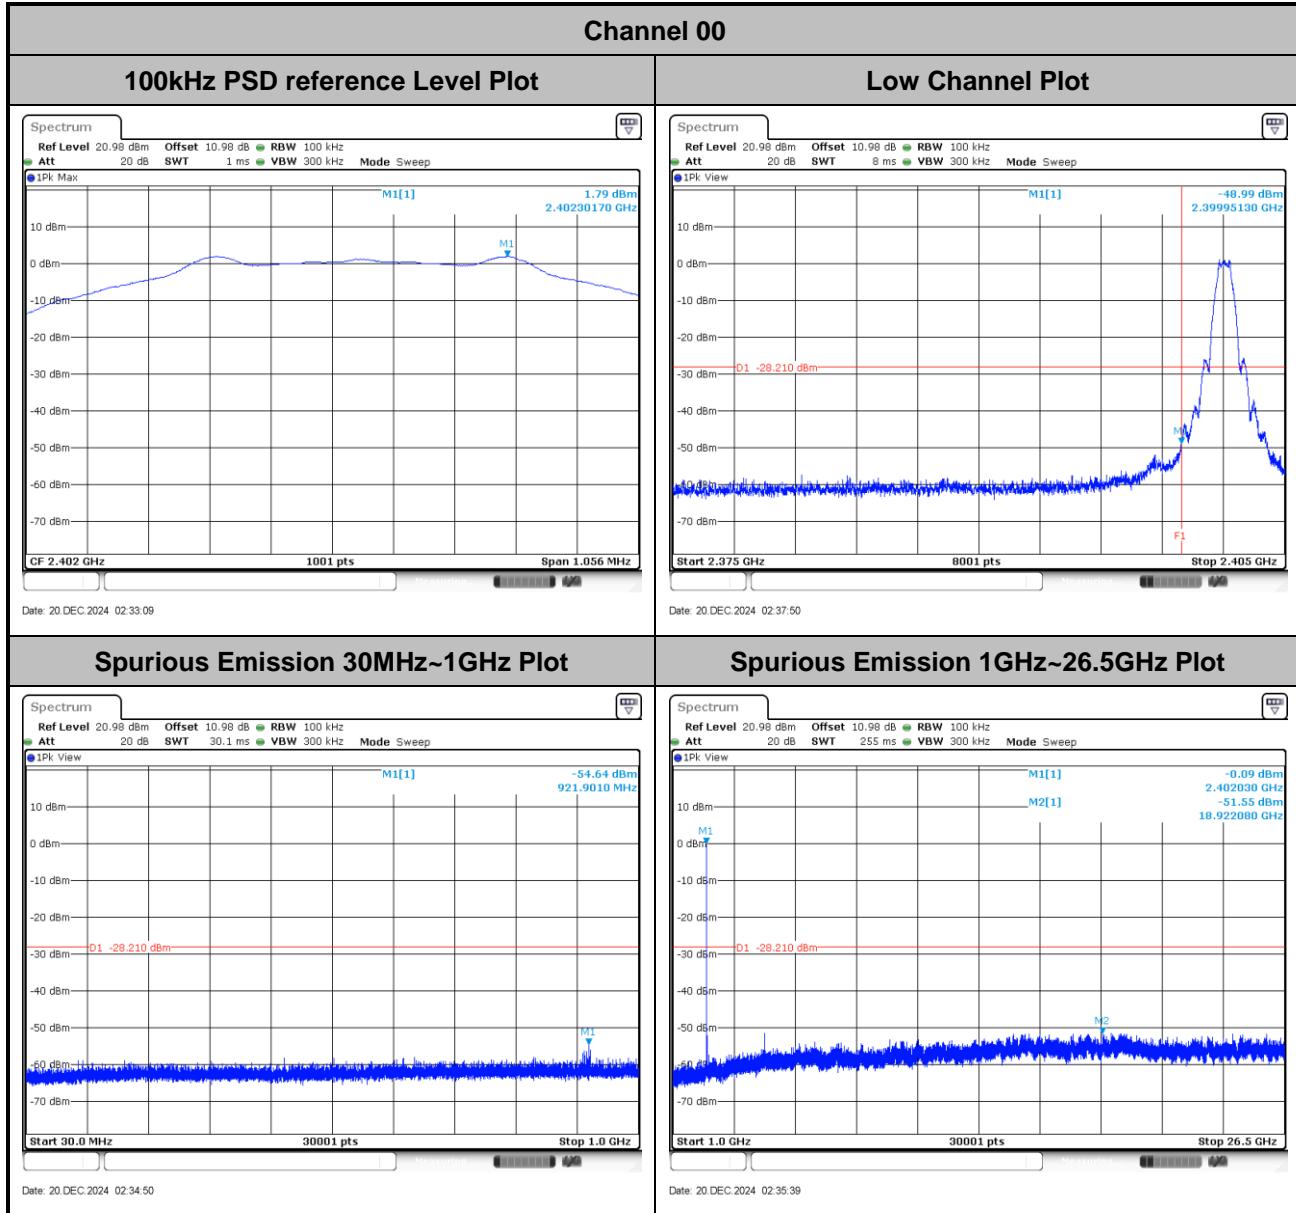


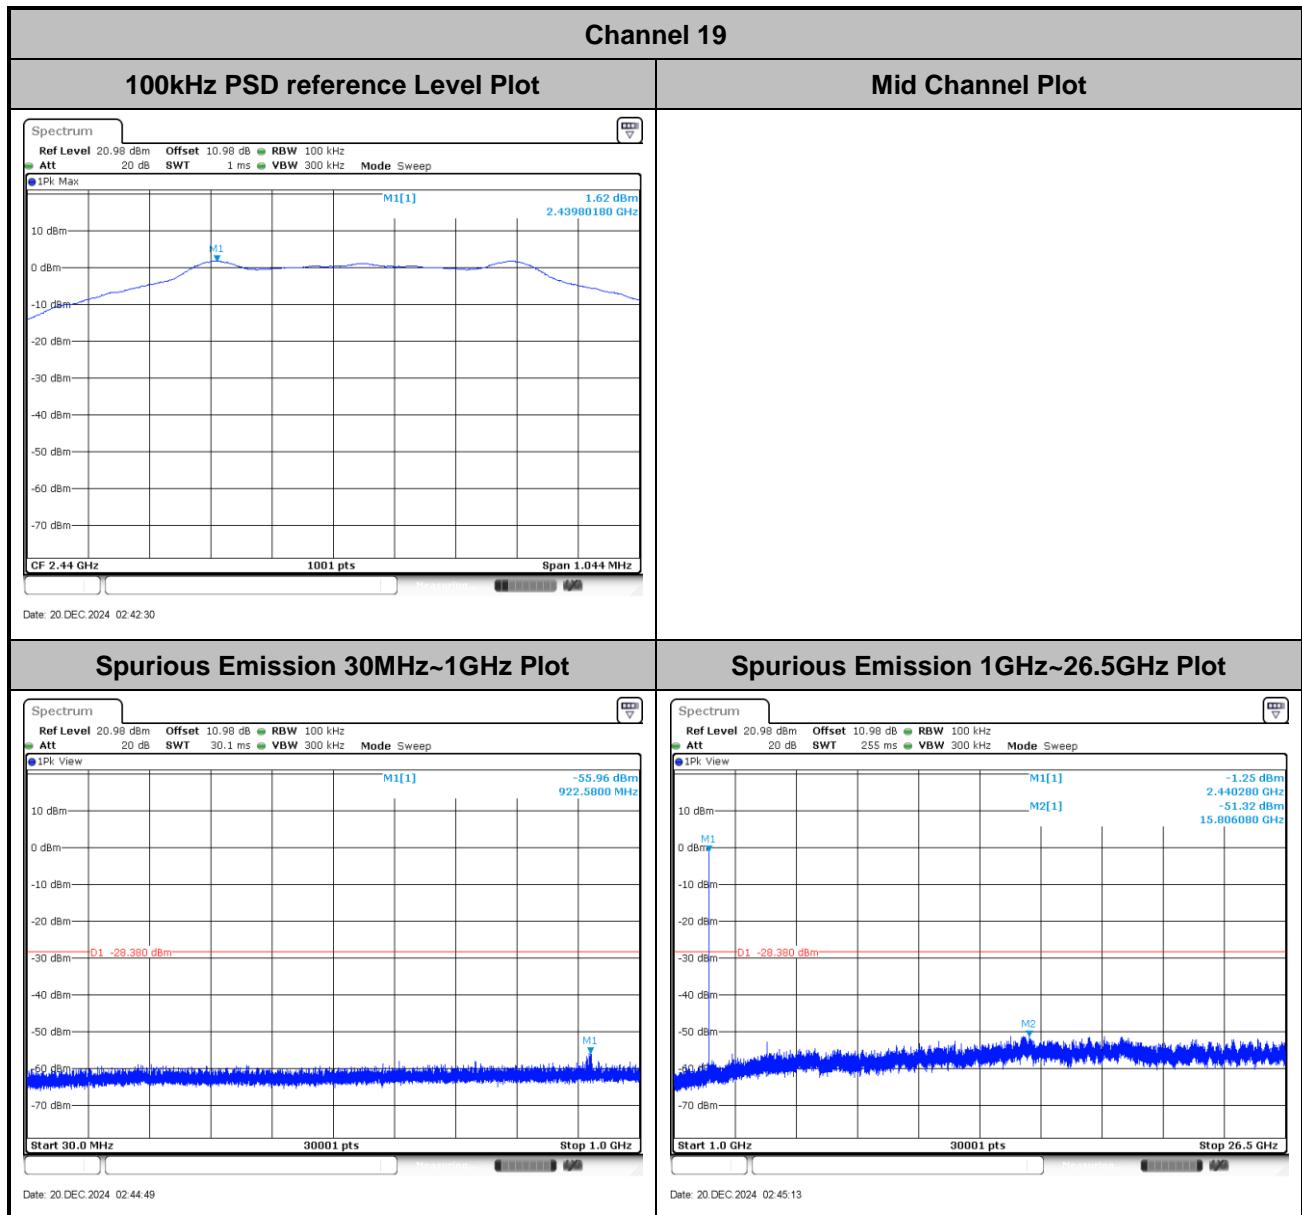


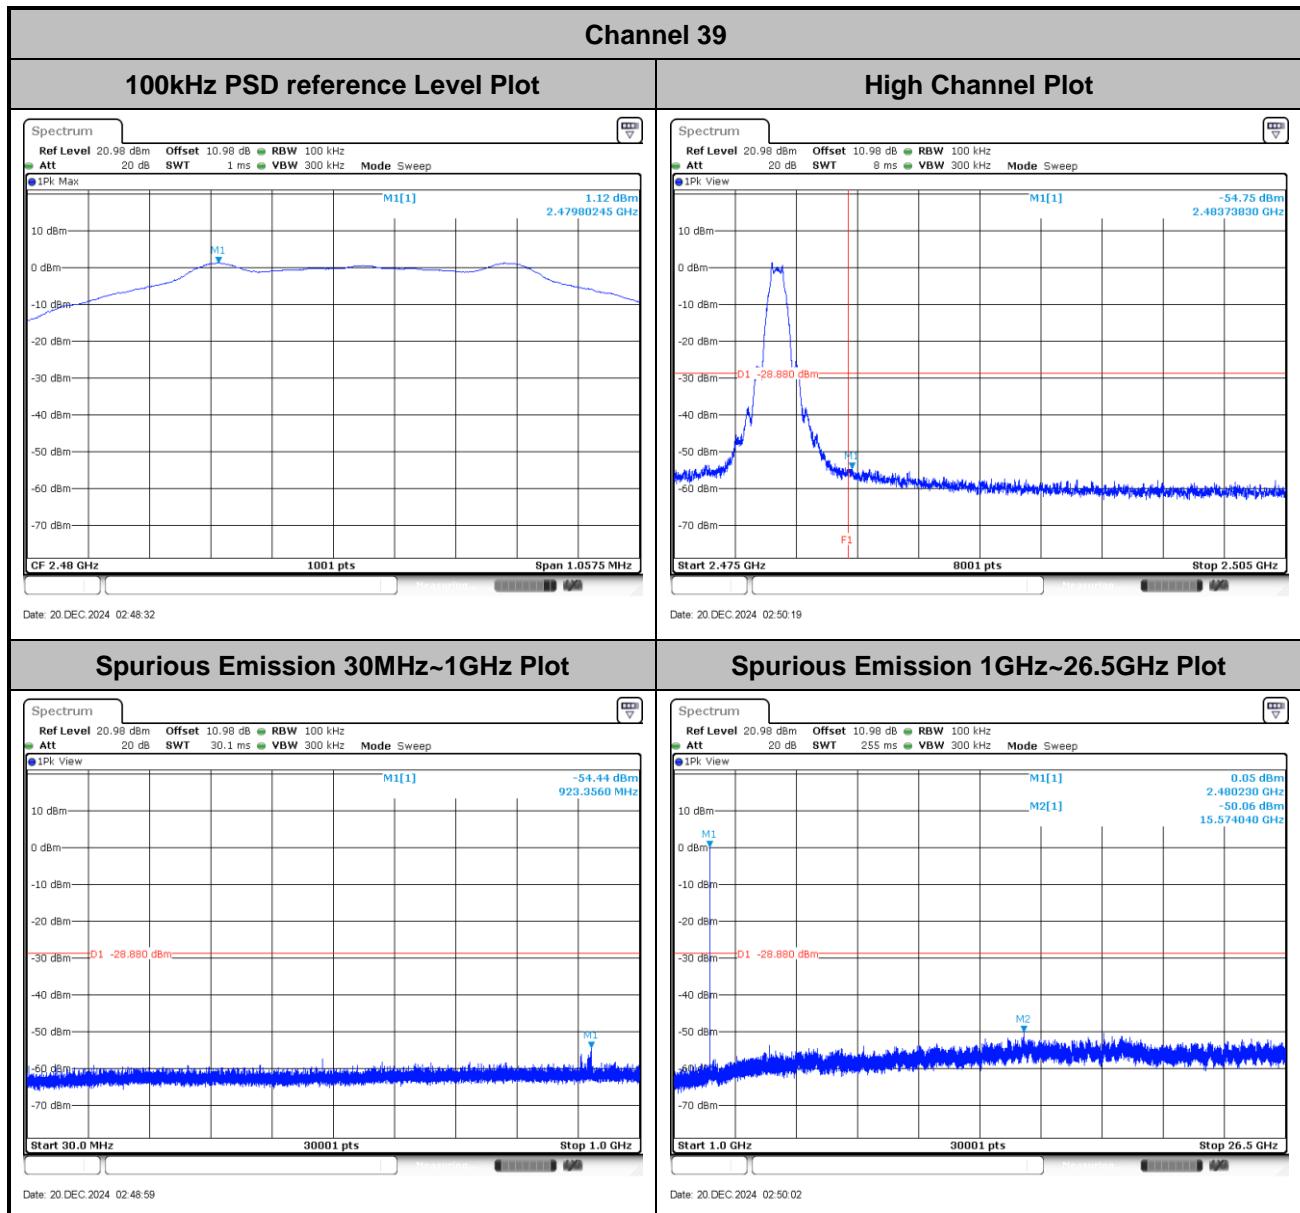




<2Mbps>

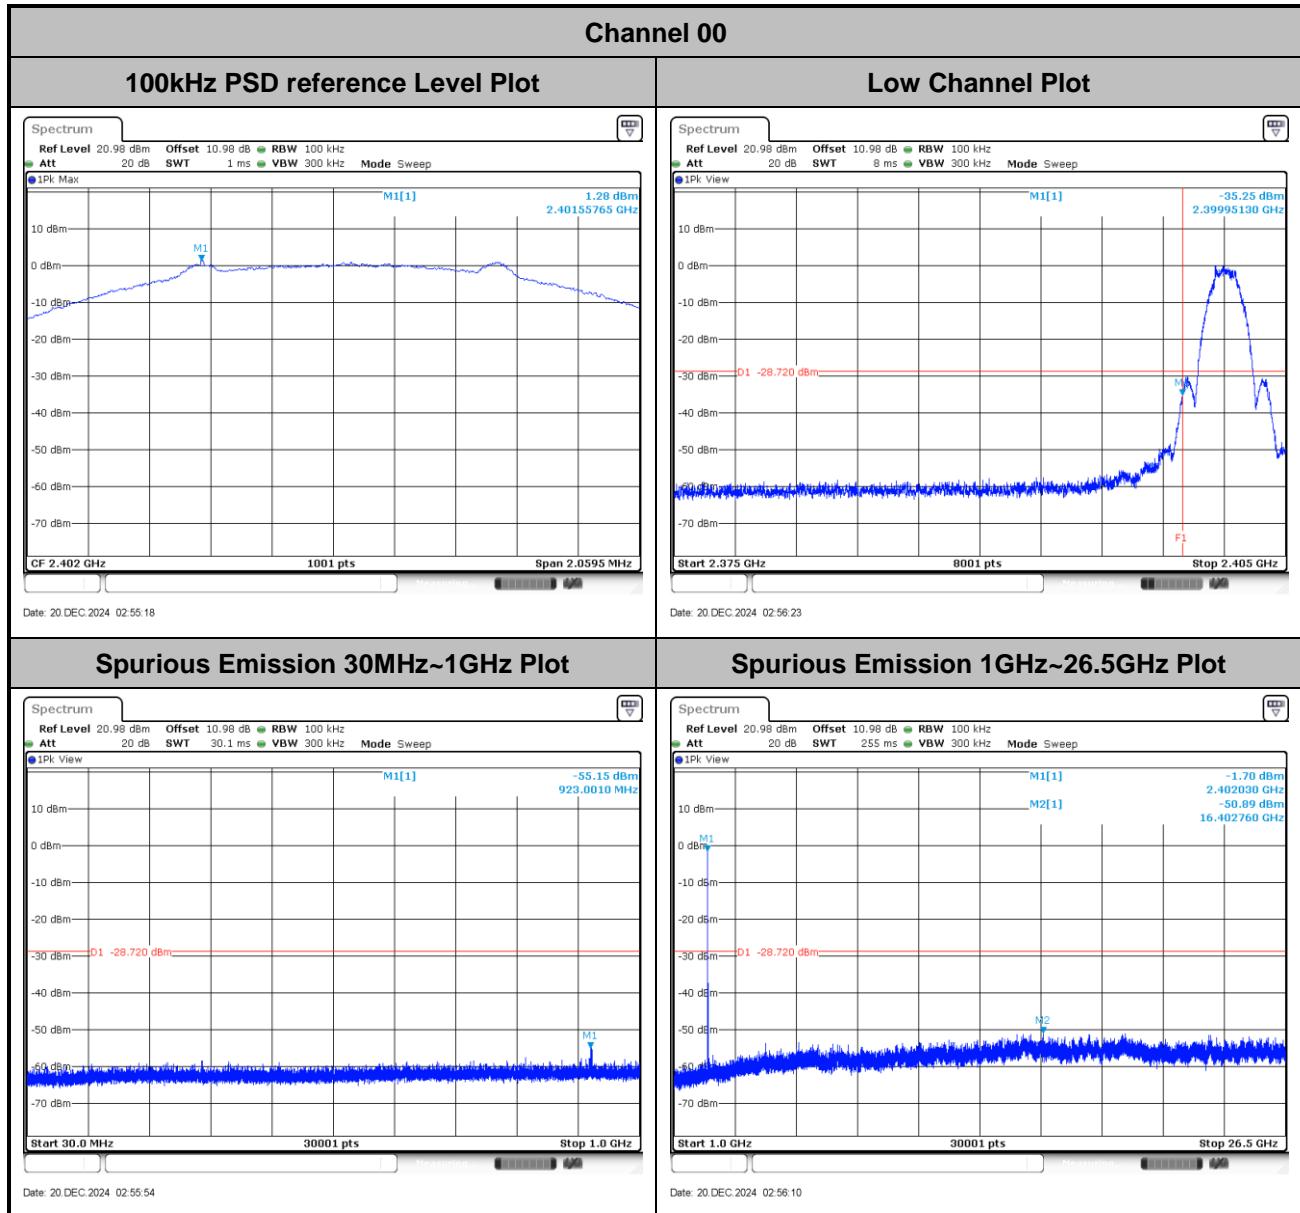

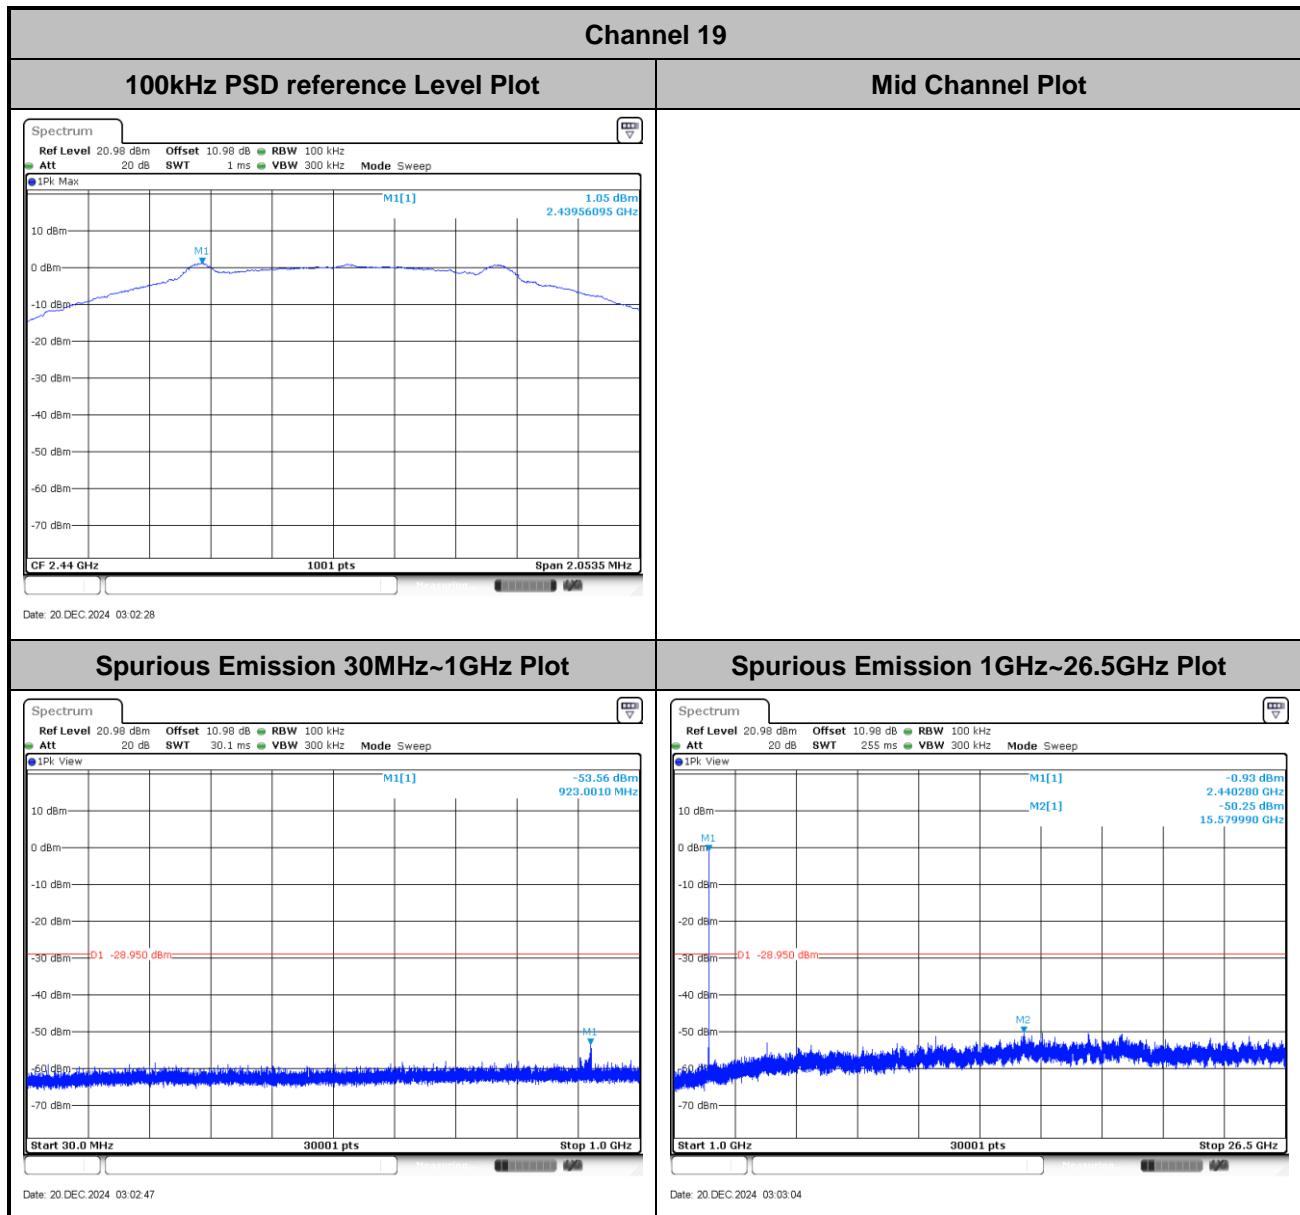

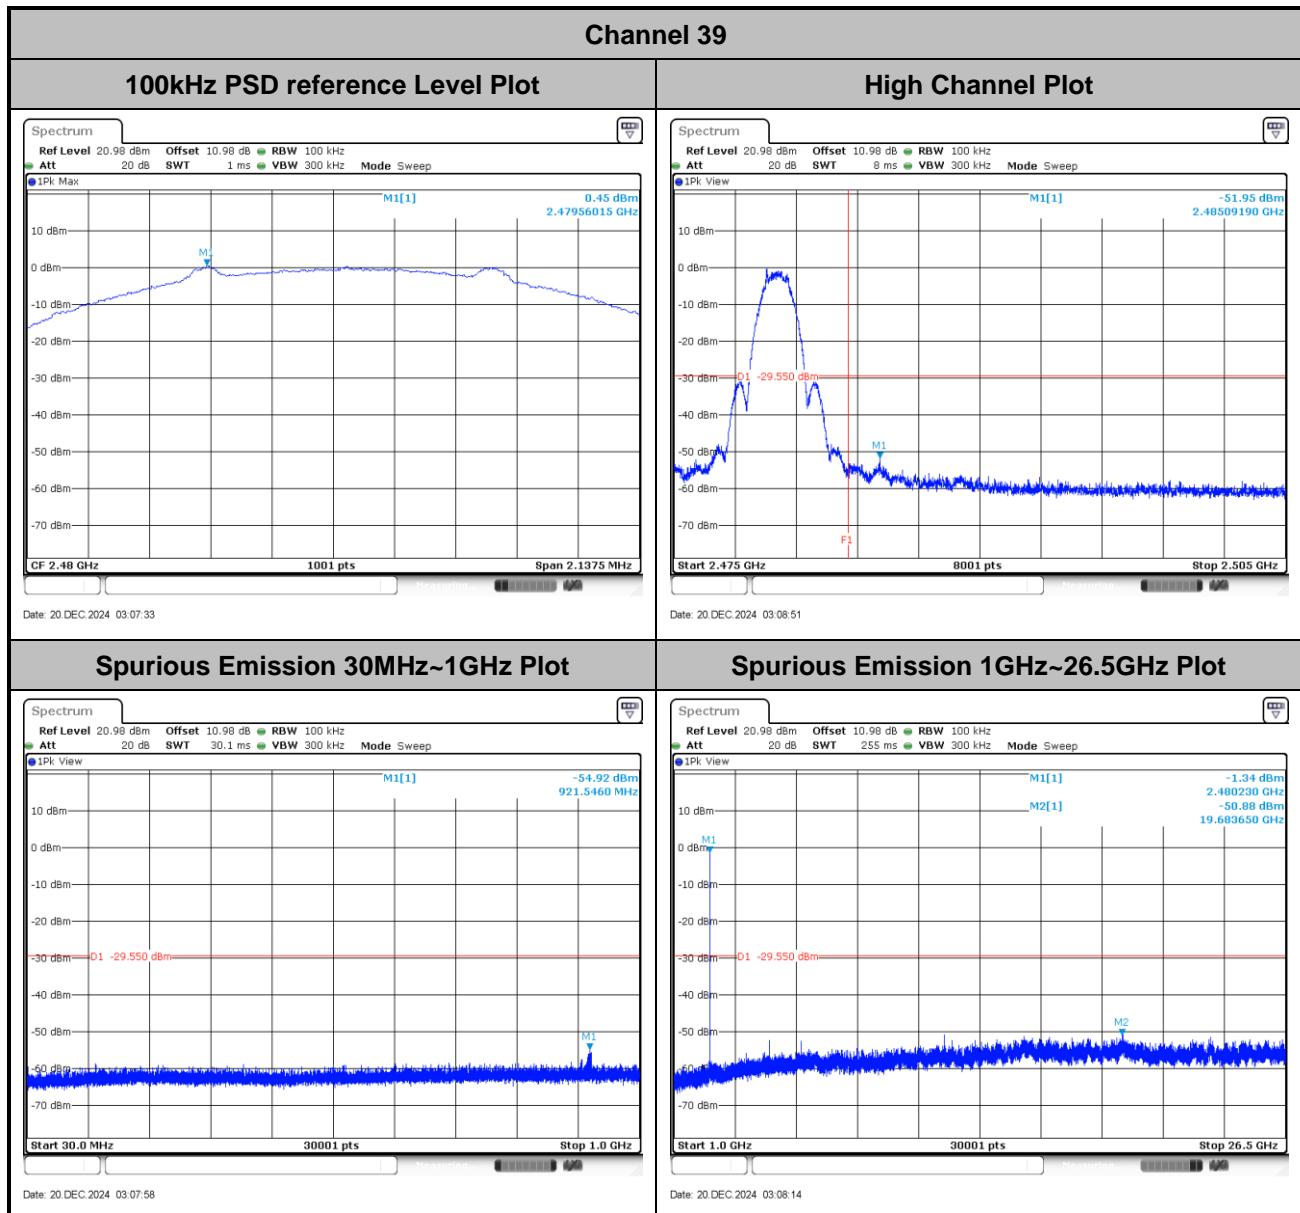




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Jin Peng	Temperature :	20.1~24.2°C
		Relative Humidity :	41.2~48.5%

EUT Information

Test Site Location : CO01-CA
 Project 241204001
 Power: 120Vac/60Hz
 Mode 2
 Line

Full Spectrum

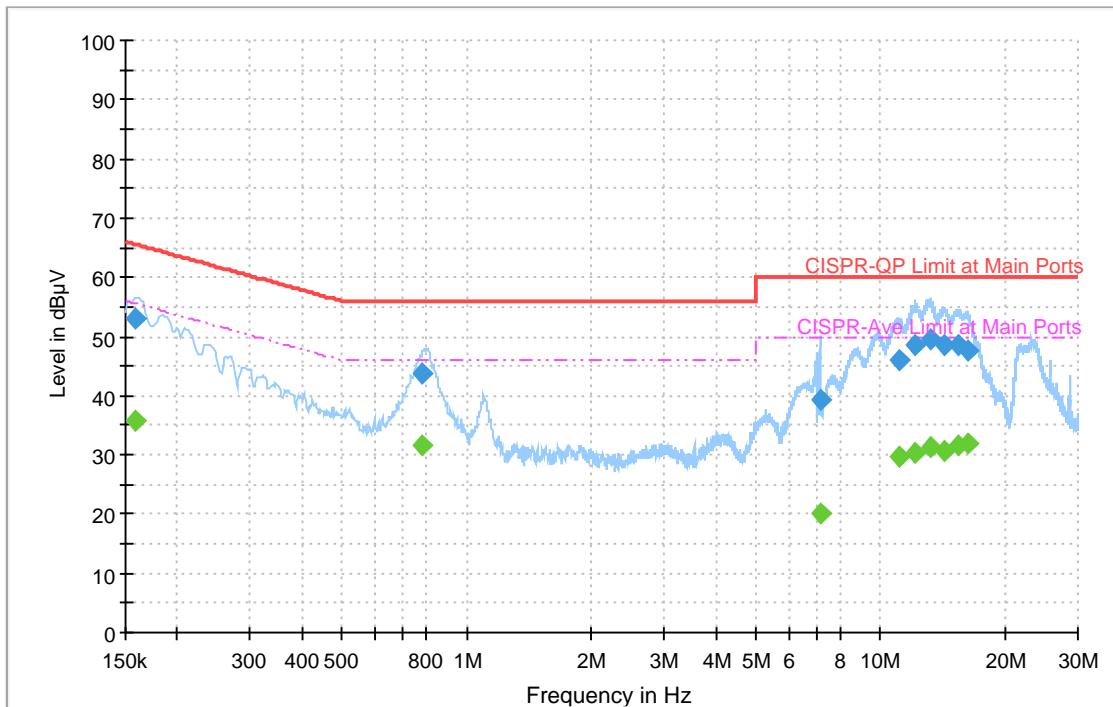


Final Result

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	---	35.65	55.52	19.87	L1	OFF	20.4
0.159000	53.15	---	65.52	12.37	L1	OFF	20.4
0.784500	---	31.71	46.00	14.29	L1	OFF	20.3
0.784500	43.72	---	56.00	12.28	L1	OFF	20.3
7.143000	---	20.01	50.00	29.99	L1	OFF	21.1
7.143000	39.15	---	60.00	20.85	L1	OFF	21.1
11.042250	---	29.56	50.00	20.44	L1	OFF	21.6
11.042250	46.10	---	60.00	13.90	L1	OFF	21.6
12.160500	---	30.43	50.00	19.57	L1	OFF	21.7
12.160500	48.48	---	60.00	11.52	L1	OFF	21.7
13.157250	---	31.26	50.00	18.74	L1	OFF	21.7
13.157250	49.67	---	60.00	10.33	L1	OFF	21.7
14.219250	---	30.82	50.00	19.18	L1	OFF	21.8
14.219250	48.71	---	60.00	11.29	L1	OFF	21.8
15.351000	---	31.71	50.00	18.29	L1	OFF	21.9
15.351000	48.43	---	60.00	11.57	L1	OFF	21.9
16.314000	---	31.96	50.00	18.04	L1	OFF	22.0
16.314000	47.74	---	60.00	12.26	L1	OFF	22.0

EUT Information

Test Site Location : CO01-CA
 Project 241204001
 Power: 120Vac/60Hz
 Mode 2
 Neutral

Full Spectrum

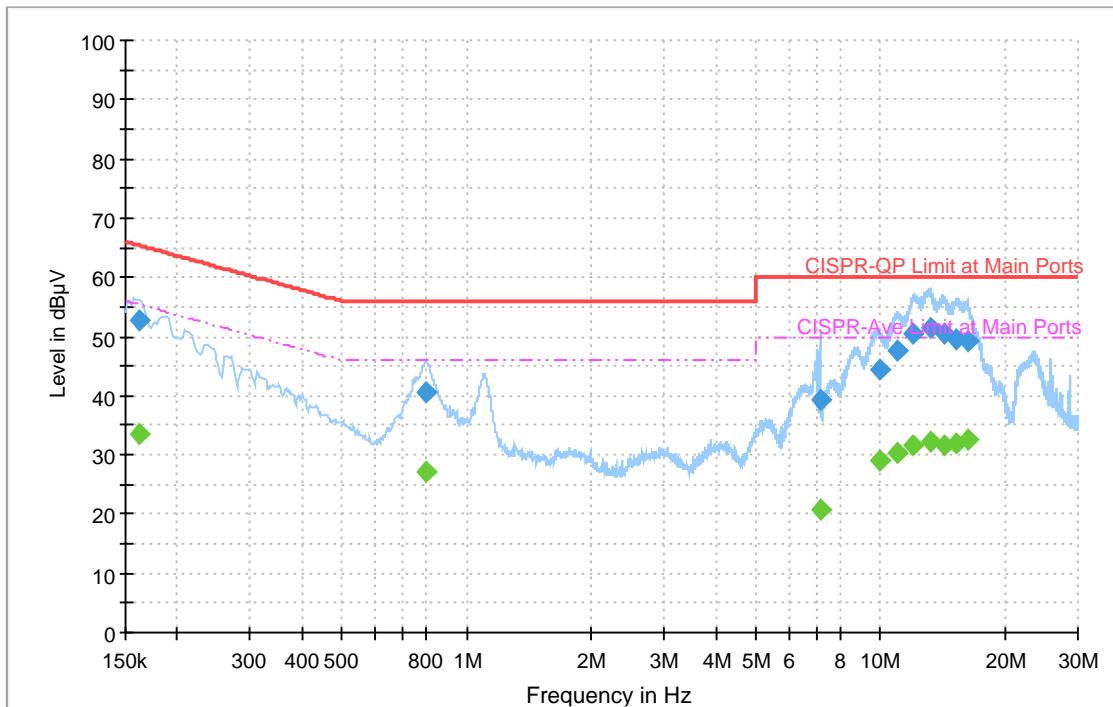

Final Result

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Filter	Corr. (dB)
0.161250	---	33.42	55.40	21.98	N	OFF	20.4
0.161250	52.67	---	65.40	12.73	N	OFF	20.4
0.798000	---	27.14	46.00	18.86	N	OFF	20.3
0.798000	40.48	---	56.00	15.52	N	OFF	20.3
7.143000	---	20.62	50.00	29.38	N	OFF	21.1
7.143000	39.26	---	60.00	20.74	N	OFF	21.1
9.930750	---	29.09	50.00	20.91	N	OFF	21.5
9.930750	44.50	---	60.00	15.50	N	OFF	21.5
11.015250	---	30.28	50.00	19.72	N	OFF	21.6
11.015250	47.59	---	60.00	12.41	N	OFF	21.6
12.045750	---	31.64	50.00	18.36	N	OFF	21.7
12.045750	50.33	---	60.00	9.67	N	OFF	21.7
13.220250	---	32.12	50.00	17.88	N	OFF	21.8
13.220250	51.36	---	60.00	8.64	N	OFF	21.8
14.230500	---	31.58	50.00	18.42	N	OFF	21.8
14.230500	50.45	---	60.00	9.55	N	OFF	21.8
15.306000	---	31.87	50.00	18.13	N	OFF	21.9
15.306000	49.63	---	60.00	10.37	N	OFF	21.9
16.183500	---	32.62	50.00	17.38	N	OFF	22.0
16.183500	49.29	---	60.00	10.71	N	OFF	22.0



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Edward Liao	Temperature :	15.3~20.4°C
		Relative Humidity :	42.4~46.4 %

Note symbol

-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth-LE_GFSK	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	1	Bluetooth-LE_GFSK	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	1	Bluetooth-LE_GFSK	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	1	Bluetooth-LE_GFSK	00	2402	2Mbps	-	-
Mode 5	2400-2483.5	1	Bluetooth-LE_GFSK	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	1	Bluetooth-LE_GFSK	39	2480	2Mbps	-	-
Mode 7	2400-2483.5	1	Bluetooth-LE_GFSK	39	2480	1Mbps	-	LF
Mode 8	2400-2483.5	1	Bluetooth-LE_GFSK	39	2480	1Mbps	-	SHF







C2. Summary of each worse mode


Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth-LE_GFSK	00	2389.95	44.98	54.00	-9.02	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	00	7206.00	52.00	74.00	-22.00	H	Peak	Pass	-	Harmonic
2	Bluetooth-LE_GFSK	19	2488.00	46.40	54.00	-7.60	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	19	7320.00	51.06	54.00	-2.94	H	Avg.	Pass	-	Harmonic
3	Bluetooth-LE_GFSK	39	2483.54	45.68	54.00	-8.32	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	39	7440.00	53.53	54.00	-0.47	V	Avg.	Pass	-	Harmonic
4	Bluetooth-LE_GFSK	00	2389.86	44.82	54.00	-9.18	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	00	7206.00	51.85	74.00	-22.15	V	Peak	Pass	-	Harmonic
5	Bluetooth-LE_GFSK	19	2488.06	45.77	54.00	-8.23	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	19	7320.00	50.05	54.00	-3.95	H	Avg.	Pass	-	Harmonic
6	Bluetooth-LE_GFSK	39	2483.52	46.45	54.00	-7.55	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	39	7440.00	50.76	54.00	-3.24	H	Avg.	Pass	-	Harmonic
7	LF	39	240.49	40.83	46.00	-5.17	H	QP	Pass	-	LF
8	SHF	39	19808.00	36.12	74.00	-37.88	V	Peak	Pass	-	SHF




Mode	1																																																																																					
	Band Edge - L																																																																																					
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																					
ANT	1																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<p>Level (dBuV/m)</p> <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2343.86</td><td>55.73</td><td>74.00</td><td>-18.27</td><td>41.55</td><td>27.22</td><td>8.05</td><td>31.12</td><td>10.03</td><td>300</td><td>16 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2343.86	55.73	74.00	-18.27	41.55	27.22	8.05	31.12	10.03	300	16 PEAK	<p>Level (dBuV/m)</p> <p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>95.26</td><td>-----</td><td>-----</td><td>80.78</td><td>27.38</td><td>8.15</td><td>31.08</td><td>10.03</td><td>300</td><td>16 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	95.26	-----	-----	80.78	27.38	8.15	31.08	10.03	300	16 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2343.86	55.73	74.00	-18.27	41.55	27.22	8.05	31.12	10.03	300	16 PEAK																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2402.00	95.26	-----	-----	80.78	27.38	8.15	31.08	10.03	300	16 PEAK																																																																											
Avg	<p>Level (dBuV/m)</p> <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.21</td><td>44.79</td><td>54.00</td><td>-9.21</td><td>30.32</td><td>27.40</td><td>8.13</td><td>31.09</td><td>10.03</td><td>300</td><td>16 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.21	44.79	54.00	-9.21	30.32	27.40	8.13	31.09	10.03	300	16 AVERAGE	<p>Level (dBuV/m)</p> <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>94.82</td><td>-----</td><td>-----</td><td>80.34</td><td>27.38</td><td>8.15</td><td>31.08</td><td>10.03</td><td>300</td><td>16 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	94.82	-----	-----	80.34	27.38	8.15	31.08	10.03	300	16 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2389.21	44.79	54.00	-9.21	30.32	27.40	8.13	31.09	10.03	300	16 AVERAGE																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2402.00	94.82	-----	-----	80.34	27.38	8.15	31.08	10.03	300	16 AVERAGE																																																																											

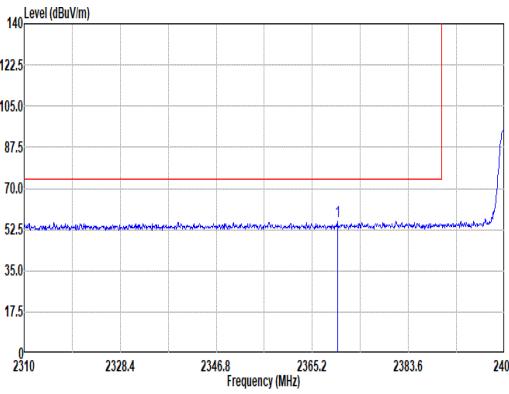
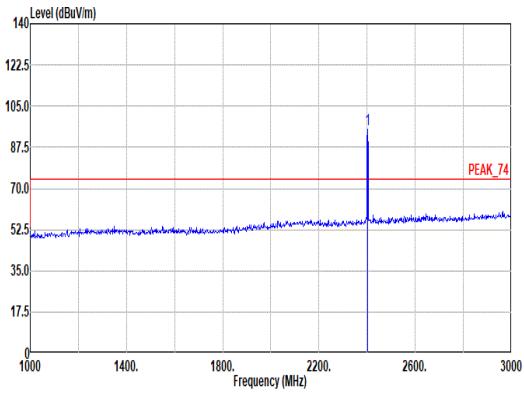
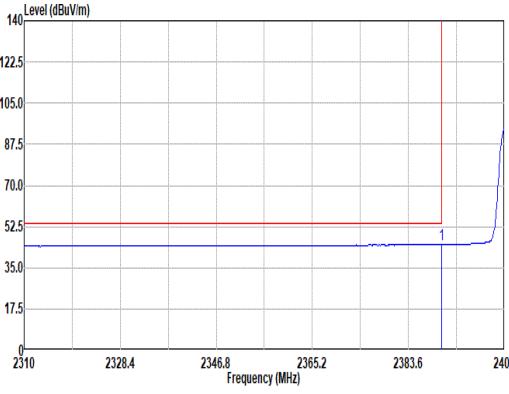
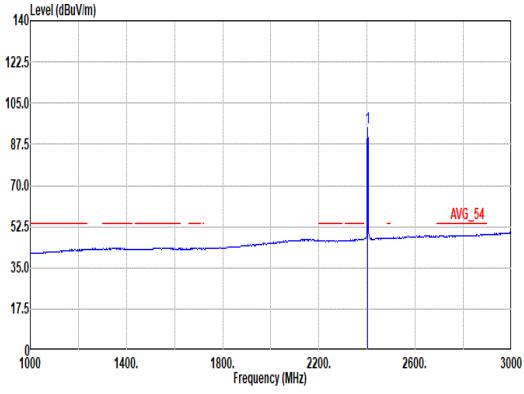


Mode	1																																																																									
	Band Edge - L																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																									
ANT	1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SNT:Auto</p> <table border="1"><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2369.98</td><td>55.91</td><td>74.00</td><td>-18.09</td><td>41.57</td><td>27.32</td><td>8.09</td><td>31.10 10.03 302 62 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	2369.98	55.91	74.00	-18.09	41.57	27.32	8.09	31.10 10.03 302 62 PEAK	 <p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SNT:Auto</p> <table border="1"><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>94.84</td><td>-----</td><td>-----</td><td>88.36</td><td>27.38</td><td>8.15</td><td>31.08 10.03 302 62 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	2402.00	94.84	-----	-----	88.36	27.38	8.15	31.08 10.03 302 62 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																		
1	2369.98	55.91	74.00	-18.09	41.57	27.32	8.09	31.10 10.03 302 62 PEAK																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																		
1	2402.00	94.84	-----	-----	88.36	27.38	8.15	31.08 10.03 302 62 PEAK																																																																		
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SNT:Auto</p> <table border="1"><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>44.98</td><td>54.00</td><td>-9.02</td><td>30.51</td><td>27.40</td><td>8.13</td><td>31.09 10.03 302 62 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	2389.95	44.98	54.00	-9.02	30.51	27.40	8.13	31.09 10.03 302 62 AVERAGE	 <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SNT:Auto</p> <table border="1"><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>94.42</td><td>-----</td><td>-----</td><td>79.94</td><td>27.38</td><td>8.15</td><td>31.08 10.03 302 62 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	2402.00	94.42	-----	-----	79.94	27.38	8.15	31.08 10.03 302 62 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																		
1	2389.95	44.98	54.00	-9.02	30.51	27.40	8.13	31.09 10.03 302 62 AVERAGE																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																		
1	2402.00	94.42	-----	-----	79.94	27.38	8.15	31.08 10.03 302 62 AVERAGE																																																																		


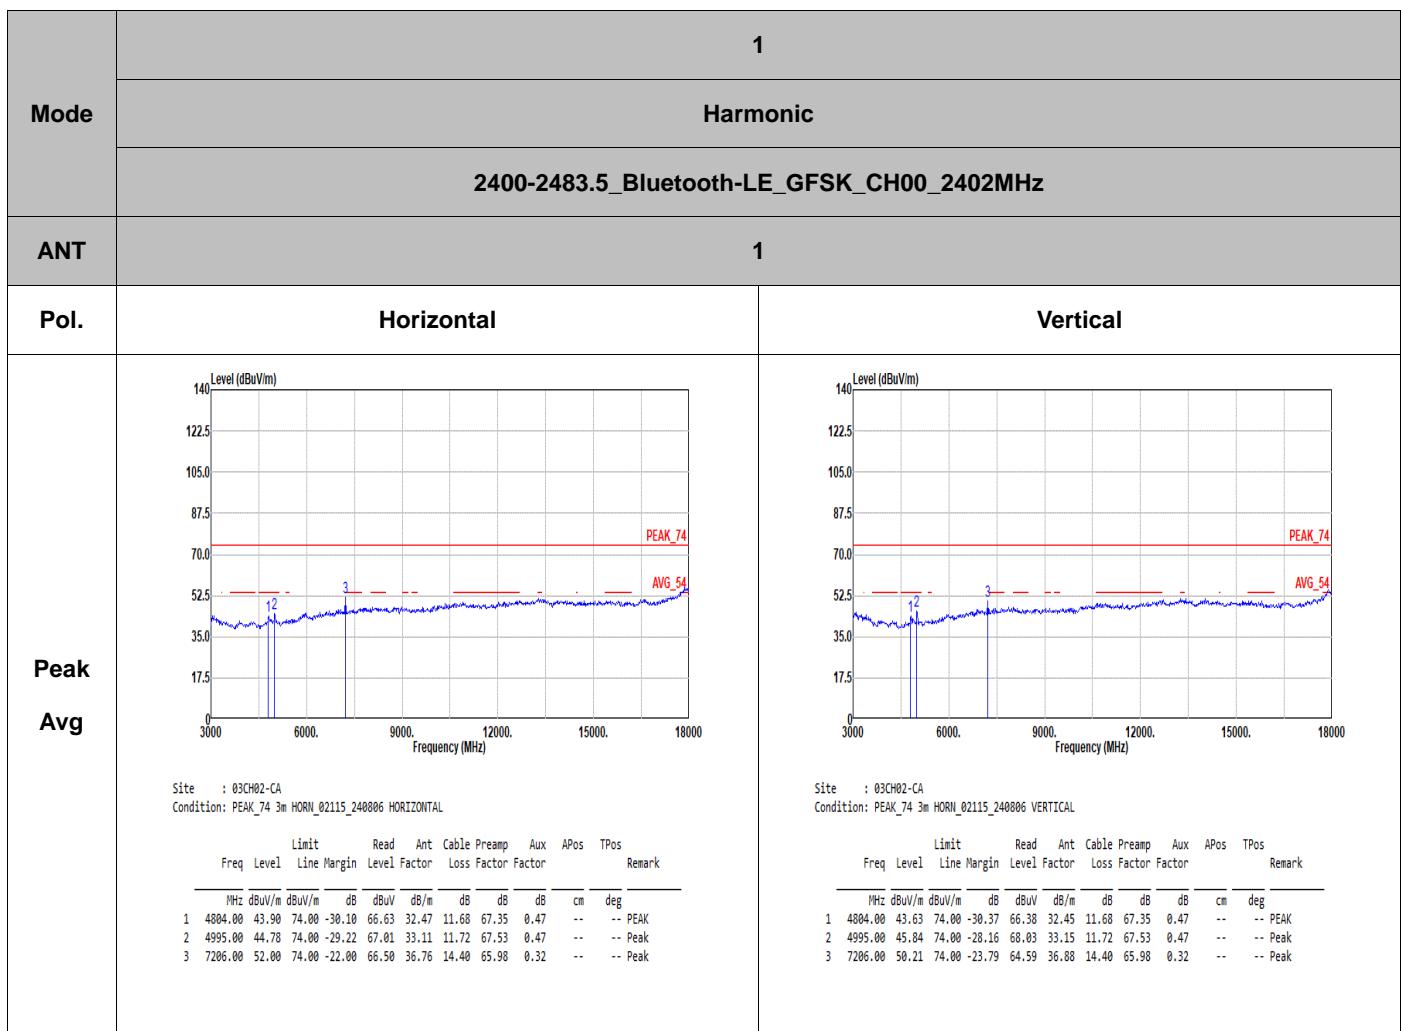


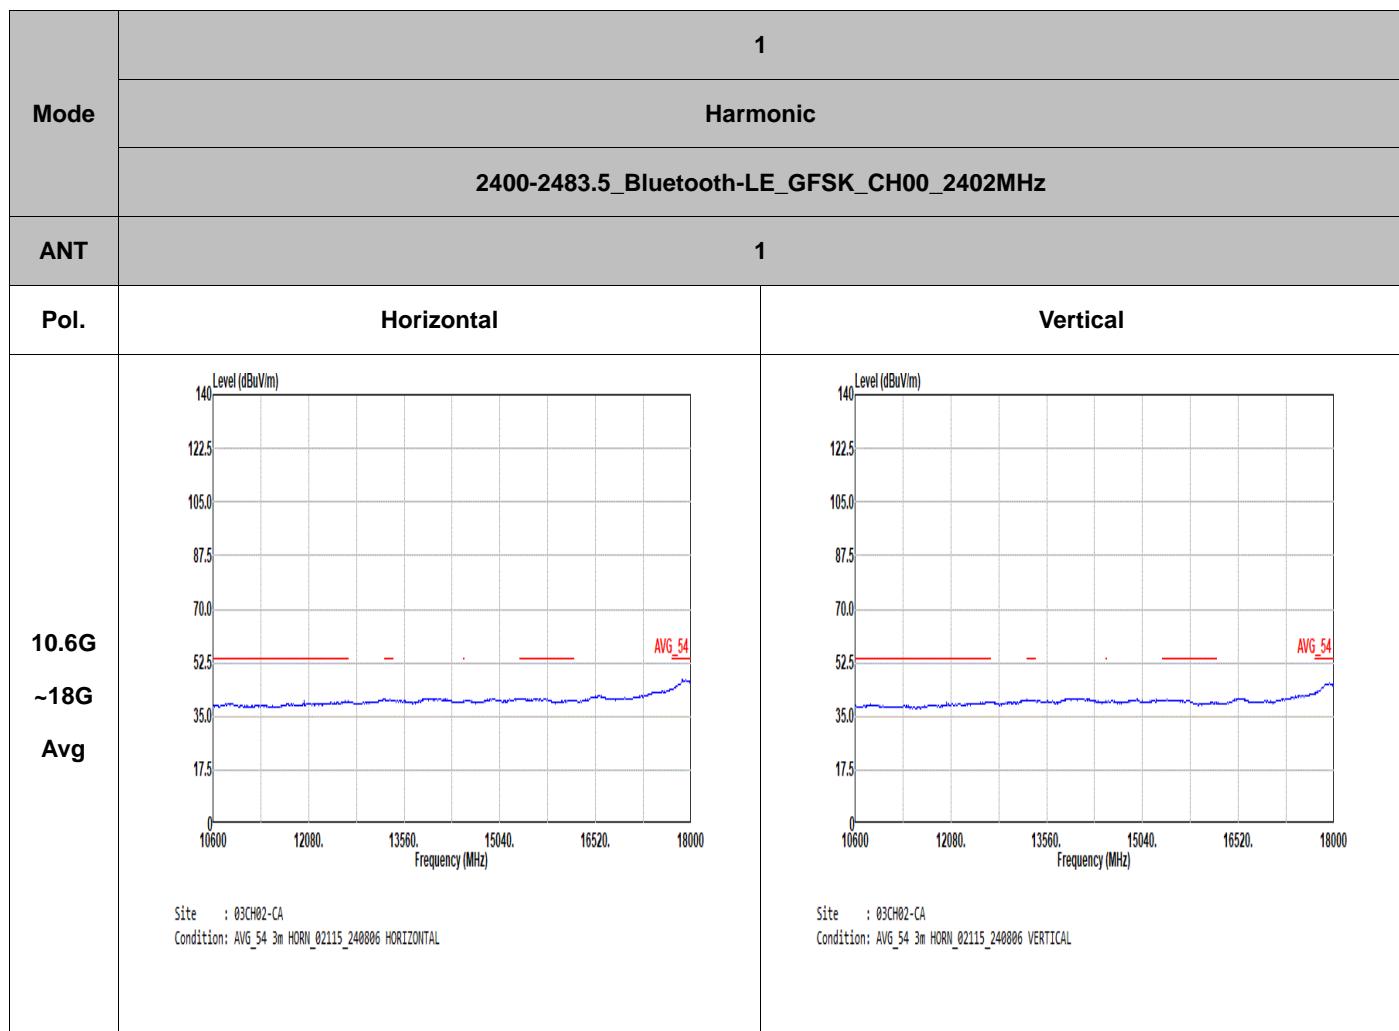

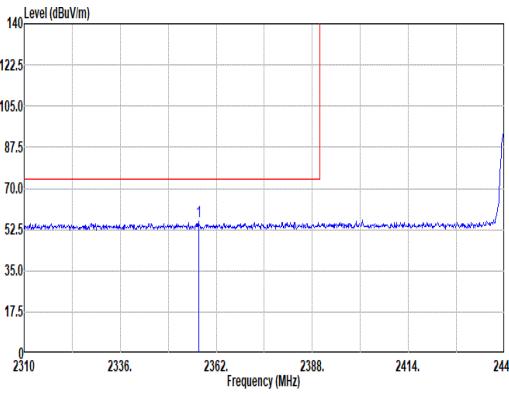
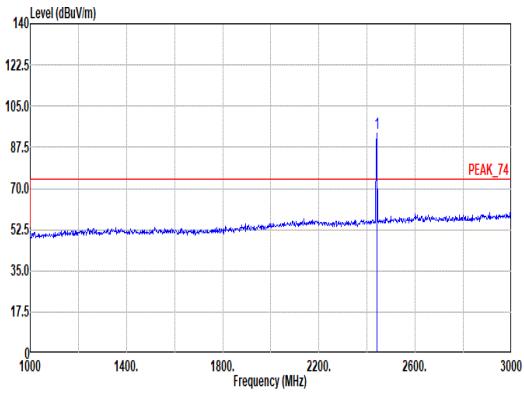
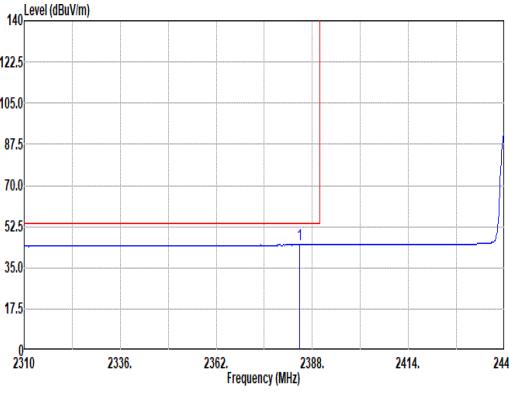
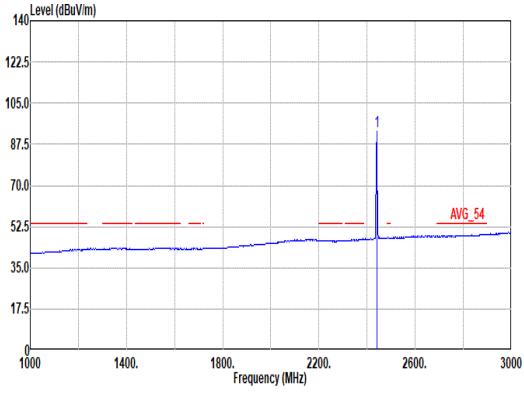


Mode	2																																																																									
	Band Edge - L																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																									
ANT	1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2357.19</td><td>55.77</td><td>74.00</td><td>-18.23</td><td>41.51</td><td>27.27</td><td>8.07</td><td>31.11 10.03 307 204 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg		1	2357.19	55.77	74.00	-18.23	41.51	27.27	8.07	31.11 10.03 307 204 PEAK	 <p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>93.38</td><td>-----</td><td>-----</td><td>78.68</td><td>27.54</td><td>8.21</td><td>31.08 10.03 307 204 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg		1	2440.00	93.38	-----	-----	78.68	27.54	8.21	31.08 10.03 307 204 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																			
1	2357.19	55.77	74.00	-18.23	41.51	27.27	8.07	31.11 10.03 307 204 PEAK																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																			
1	2440.00	93.38	-----	-----	78.68	27.54	8.21	31.08 10.03 307 204 PEAK																																																																		
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2384.49</td><td>44.72</td><td>54.00</td><td>-9.28</td><td>30.27</td><td>27.39</td><td>8.12</td><td>31.09 10.03 307 204 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg		1	2384.49	44.72	54.00	-9.28	30.27	27.39	8.12	31.09 10.03 307 204 AVERAGE	 <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>92.99</td><td>-----</td><td>-----</td><td>78.29</td><td>27.54</td><td>8.21</td><td>31.08 10.03 307 204 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg		1	2440.00	92.99	-----	-----	78.29	27.54	8.21	31.08 10.03 307 204 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																			
1	2384.49	44.72	54.00	-9.28	30.27	27.39	8.12	31.09 10.03 307 204 AVERAGE																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																			
1	2440.00	92.99	-----	-----	78.29	27.54	8.21	31.08 10.03 307 204 AVERAGE																																																																		

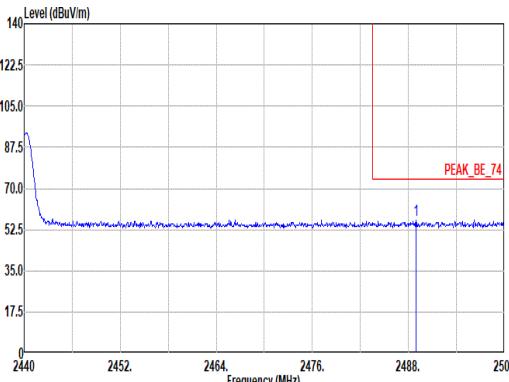
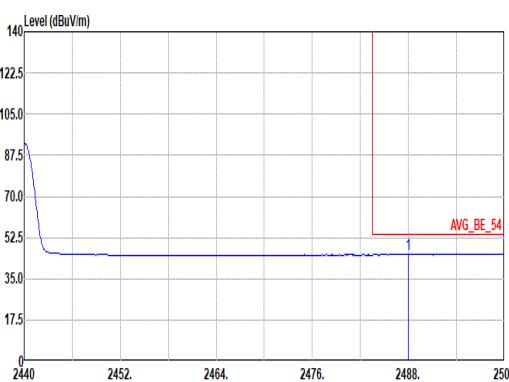


Mode	2																																									
	Band Edge - R																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																									
ANT	1																																									
Pol.	Horizontal	Fundamental																																								
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2488.96</td><td>56.58</td><td>74.00</td><td>-17.42</td><td>41.61</td><td>27.71</td><td>8.29</td><td>31.06</td><td>10.03 307 204 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2488.96	56.58	74.00	-17.42	41.61	27.71	8.29	31.06	10.03 307 204 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																	
1	2488.96	56.58	74.00	-17.42	41.61	27.71	8.29	31.06	10.03 307 204 PEAK																																	
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2487.94</td><td>45.51</td><td>54.00</td><td>-8.49</td><td>30.54</td><td>27.71</td><td>8.29</td><td>31.06</td><td>10.03 307 204 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2487.94	45.51	54.00	-8.49	30.54	27.71	8.29	31.06	10.03 307 204 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																	
1	2487.94	45.51	54.00	-8.49	30.54	27.71	8.29	31.06	10.03 307 204 AVERAGE																																	

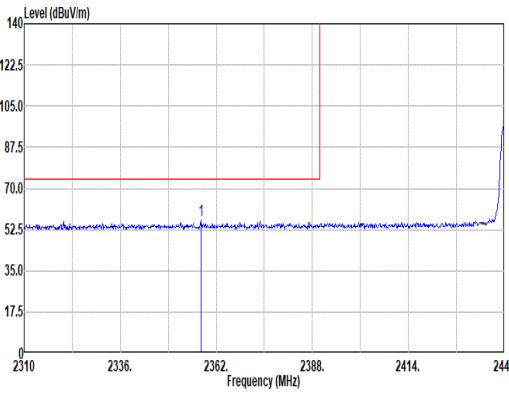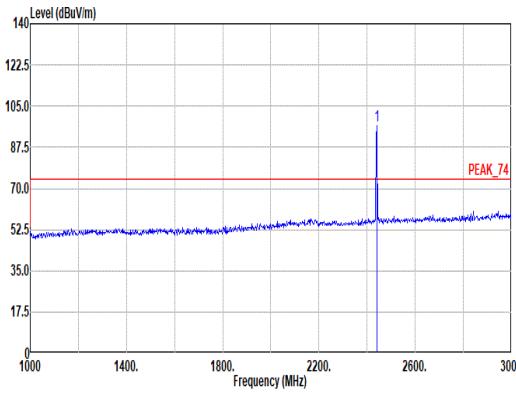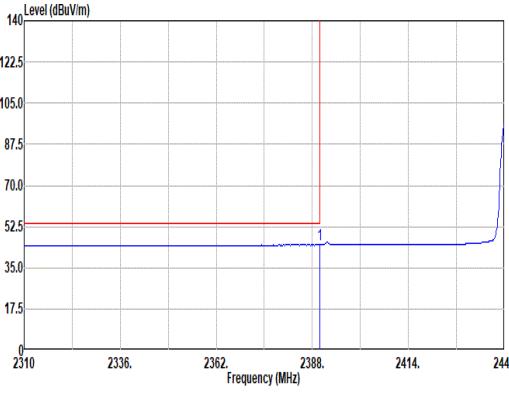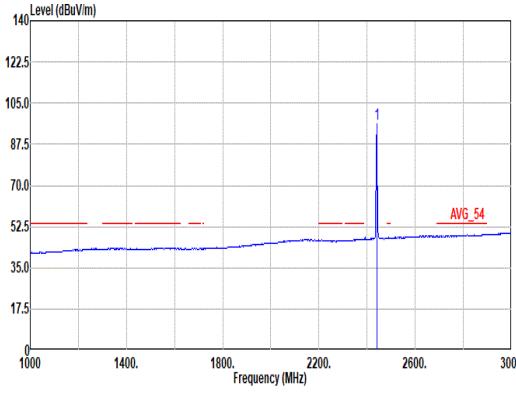


Mode	2																																																																									
	Band Edge - L																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																									
ANT	1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2357.84</td><td>56.34</td><td>74.00</td><td>-17.66</td><td>42.08</td><td>27.27</td><td>8.07</td><td>31.11 10.03 100 107 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	2357.84	56.34	74.00	-17.66	42.08	27.27	8.07	31.11 10.03 100 107 PEAK	 <p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>96.52</td><td>-----</td><td>-----</td><td>81.82</td><td>27.54</td><td>8.21</td><td>31.08 10.03 100 107 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	2440.00	96.52	-----	-----	81.82	27.54	8.21	31.08 10.03 100 107 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1	2357.84	56.34	74.00	-17.66	42.08	27.27	8.07	31.11 10.03 100 107 PEAK																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1	2440.00	96.52	-----	-----	81.82	27.54	8.21	31.08 10.03 100 107 PEAK																																																																		
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>44.72</td><td>54.00</td><td>-9.28</td><td>30.25</td><td>27.40</td><td>8.13</td><td>31.09 10.03 100 107 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	2389.95	44.72	54.00	-9.28	30.25	27.40	8.13	31.09 10.03 100 107 AVERAGE	 <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>96.12</td><td>-----</td><td>-----</td><td>81.42</td><td>27.54</td><td>8.21</td><td>31.08 10.03 100 107 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	2440.00	96.12	-----	-----	81.42	27.54	8.21	31.08 10.03 100 107 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1	2389.95	44.72	54.00	-9.28	30.25	27.40	8.13	31.09 10.03 100 107 AVERAGE																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1	2440.00	96.12	-----	-----	81.42	27.54	8.21	31.08 10.03 100 107 AVERAGE																																																																		

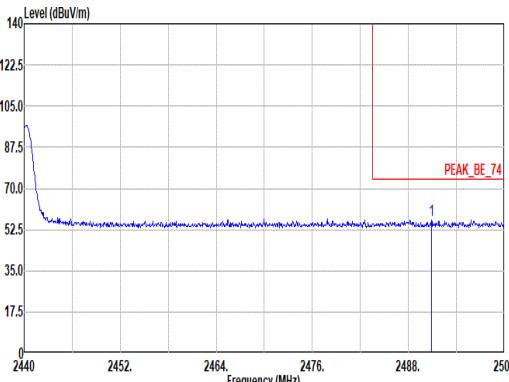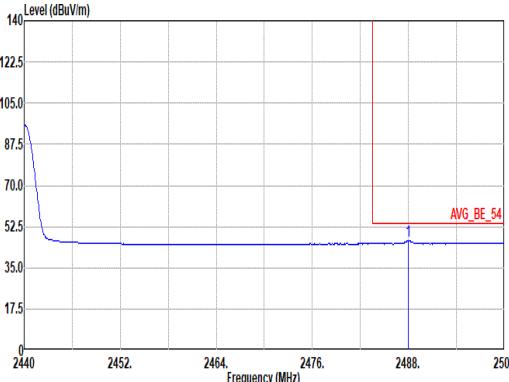





Mode	2																																									
	Band Edge - R																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2490.88</td><td>56.55</td><td>74.00</td><td>-17.45</td><td>41.57</td><td>27.71</td><td>8.30</td><td>31.06</td><td>10.03 100 107 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2490.88	56.55	74.00	-17.45	41.57	27.71	8.30	31.06	10.03 100 107 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																	
1	2490.88	56.55	74.00	-17.45	41.57	27.71	8.30	31.06	10.03 100 107 PEAK																																	
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2488.00</td><td>46.40</td><td>54.00</td><td>-7.60</td><td>31.43</td><td>27.71</td><td>8.29</td><td>31.06</td><td>10.03 100 107 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2488.00	46.40	54.00	-7.60	31.43	27.71	8.29	31.06	10.03 100 107 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																	
1	2488.00	46.40	54.00	-7.60	31.43	27.71	8.29	31.06	10.03 100 107 AVERAGE																																	







Mode	2																																																																																																																																													
	Harmonic																																																																																																																																													
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																																																																													
ANT	1																																																																																																																																													
Pol.	Horizontal																																																																																																																																													
Peak																																																																																																																																														
Avg	<p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02115_240806 HORIZONTAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>46.66</td><td>74.00</td><td>-27.34</td><td>69.19</td><td>32.77</td><td>11.70</td><td>67.47</td><td>0.47</td></tr><tr><td>2</td><td>5010.00</td><td>45.55</td><td>74.00</td><td>-28.45</td><td>67.71</td><td>33.13</td><td>11.74</td><td>67.50</td><td>0.47</td></tr><tr><td>3</td><td>7320.00</td><td>55.00</td><td>74.00</td><td>-18.20</td><td>71.05</td><td>36.79</td><td>14.53</td><td>66.90</td><td>0.33</td></tr><tr><td>4</td><td>7320.00</td><td>51.06</td><td>54.00</td><td>-2.94</td><td>66.31</td><td>36.79</td><td>14.53</td><td>66.90</td><td>0.33</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>214</td><td>125</td><td>Average</td></tr></tbody></table> <p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02115_240806 VERTICAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>45.31</td><td>74.00</td><td>-28.69</td><td>67.87</td><td>32.74</td><td>11.70</td><td>67.47</td><td>0.47</td></tr><tr><td>2</td><td>4995.00</td><td>46.05</td><td>74.00</td><td>-27.95</td><td>68.24</td><td>33.15</td><td>11.72</td><td>67.53</td><td>0.47</td></tr><tr><td>3</td><td>7320.00</td><td>55.53</td><td>74.00</td><td>-18.47</td><td>70.62</td><td>36.95</td><td>14.53</td><td>66.90</td><td>0.33</td></tr><tr><td>4</td><td>7320.00</td><td>50.48</td><td>54.00</td><td>-3.52</td><td>65.57</td><td>36.95</td><td>14.53</td><td>66.90</td><td>0.33</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>289</td><td>56</td><td>Average</td></tr></tbody></table>		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	4880.00	46.66	74.00	-27.34	69.19	32.77	11.70	67.47	0.47	2	5010.00	45.55	74.00	-28.45	67.71	33.13	11.74	67.50	0.47	3	7320.00	55.00	74.00	-18.20	71.05	36.79	14.53	66.90	0.33	4	7320.00	51.06	54.00	-2.94	66.31	36.79	14.53	66.90	0.33								214	125	Average	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	4880.00	45.31	74.00	-28.69	67.87	32.74	11.70	67.47	0.47	2	4995.00	46.05	74.00	-27.95	68.24	33.15	11.72	67.53	0.47	3	7320.00	55.53	74.00	-18.47	70.62	36.95	14.53	66.90	0.33	4	7320.00	50.48	54.00	-3.52	65.57	36.95	14.53	66.90	0.33								289	56	Average
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																									
1	4880.00	46.66	74.00	-27.34	69.19	32.77	11.70	67.47	0.47																																																																																																																																					
2	5010.00	45.55	74.00	-28.45	67.71	33.13	11.74	67.50	0.47																																																																																																																																					
3	7320.00	55.00	74.00	-18.20	71.05	36.79	14.53	66.90	0.33																																																																																																																																					
4	7320.00	51.06	54.00	-2.94	66.31	36.79	14.53	66.90	0.33																																																																																																																																					
							214	125	Average																																																																																																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																									
1	4880.00	45.31	74.00	-28.69	67.87	32.74	11.70	67.47	0.47																																																																																																																																					
2	4995.00	46.05	74.00	-27.95	68.24	33.15	11.72	67.53	0.47																																																																																																																																					
3	7320.00	55.53	74.00	-18.47	70.62	36.95	14.53	66.90	0.33																																																																																																																																					
4	7320.00	50.48	54.00	-3.52	65.57	36.95	14.53	66.90	0.33																																																																																																																																					
							289	56	Average																																																																																																																																					

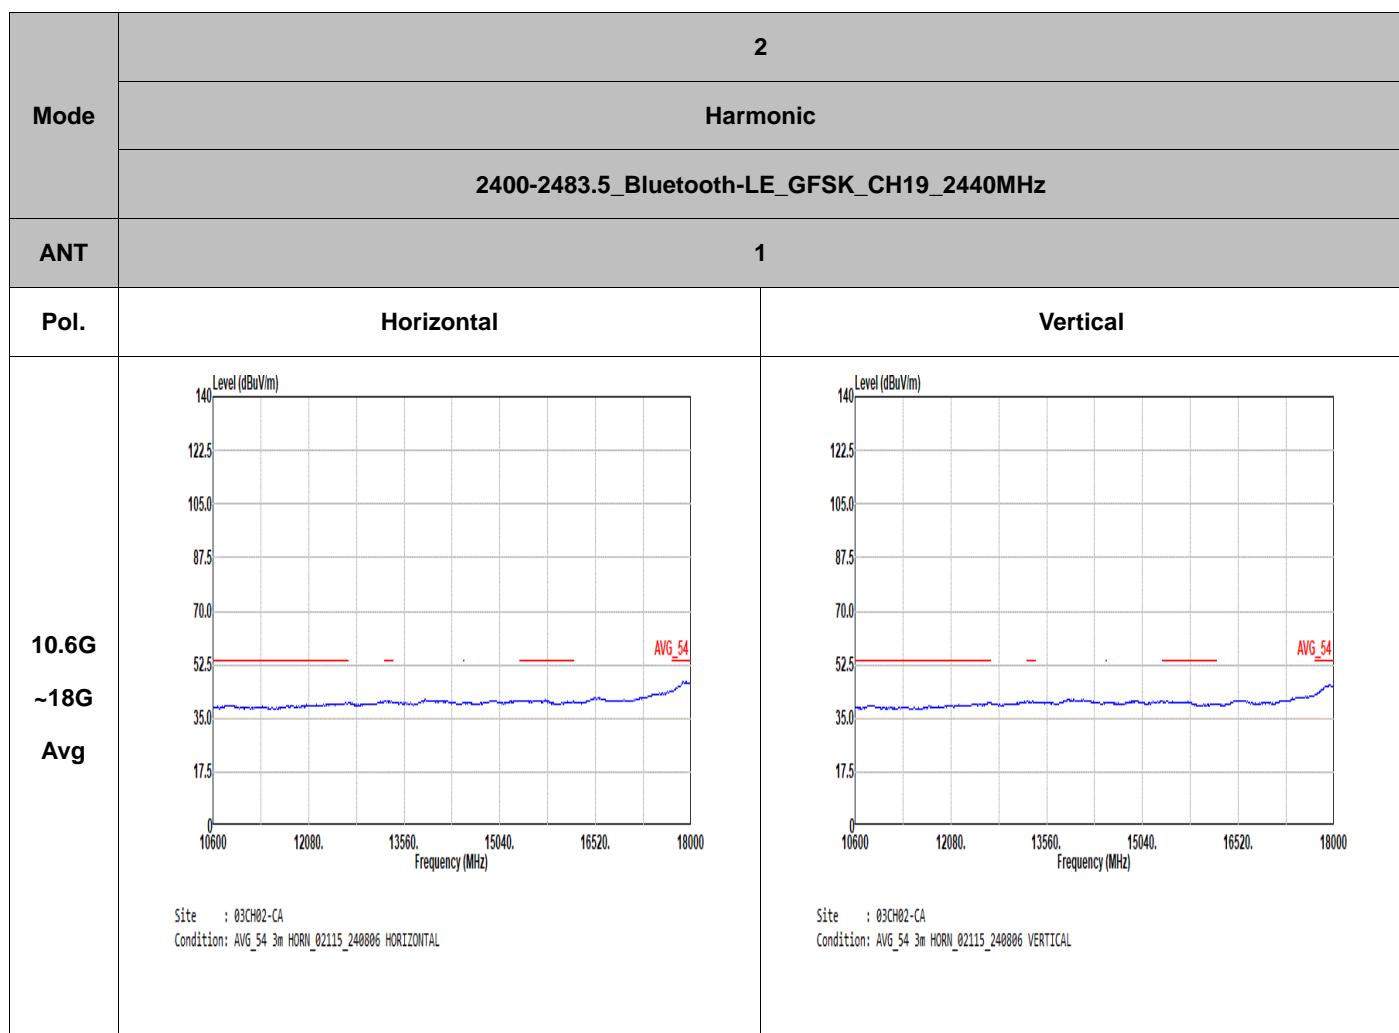

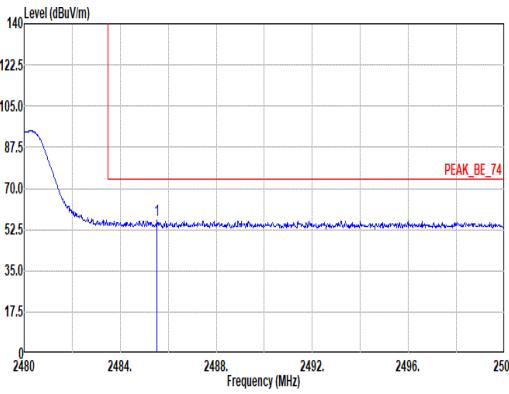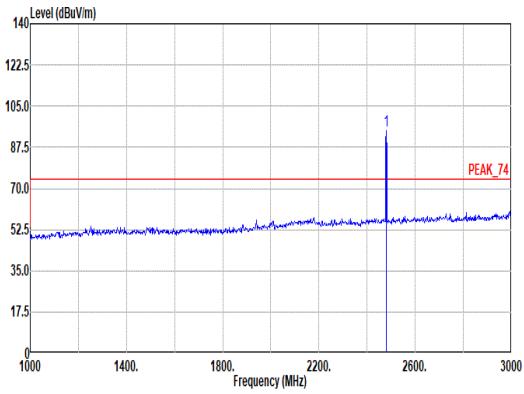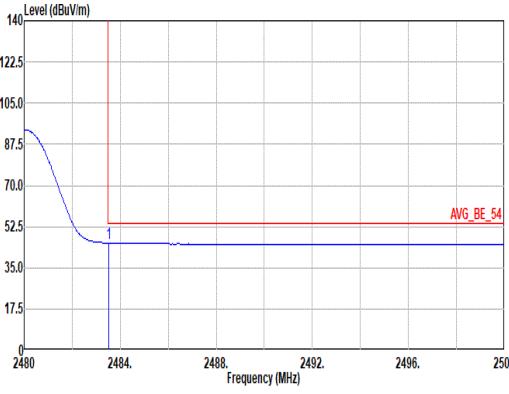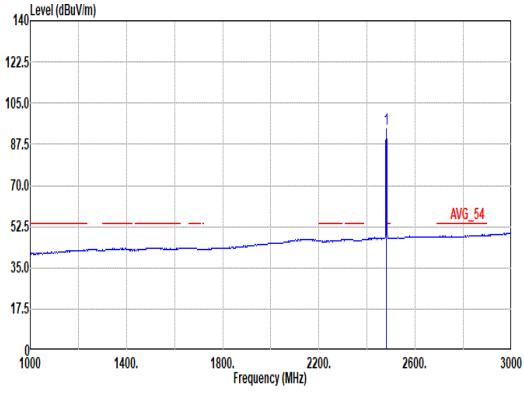


Mode	3																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2485.54</td><td>56.64</td><td>74.00</td><td>-17.36</td><td>41.68</td><td>27.70</td><td>8.29</td><td>31.06</td><td>10.03</td><td>300 124 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.54	56.64	74.00	-17.36	41.68	27.70	8.29	31.06	10.03	300 124 PEAK	 <p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>94.44</td><td>-----</td><td>-----</td><td>79.50</td><td>27.69</td><td>8.28</td><td>31.06</td><td>10.03</td><td>300 124 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.44	-----	-----	79.50	27.69	8.28	31.06	10.03	300 124 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2485.54	56.64	74.00	-17.36	41.68	27.70	8.29	31.06	10.03	300 124 PEAK																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	94.44	-----	-----	79.50	27.69	8.28	31.06	10.03	300 124 PEAK																																																																										
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.52</td><td>45.55</td><td>54.00</td><td>-8.45</td><td>30.60</td><td>27.70</td><td>8.28</td><td>31.06</td><td>10.03</td><td>300 124 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	45.55	54.00	-8.45	30.60	27.70	8.28	31.06	10.03	300 124 AVERAGE	 <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>94.11</td><td>-----</td><td>-----</td><td>79.17</td><td>27.69</td><td>8.28</td><td>31.06</td><td>10.03</td><td>300 124 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.11	-----	-----	79.17	27.69	8.28	31.06	10.03	300 124 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2483.52	45.55	54.00	-8.45	30.60	27.70	8.28	31.06	10.03	300 124 AVERAGE																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	94.11	-----	-----	79.17	27.69	8.28	31.06	10.03	300 124 AVERAGE																																																																										

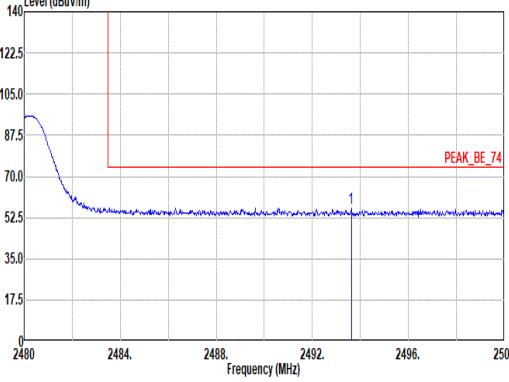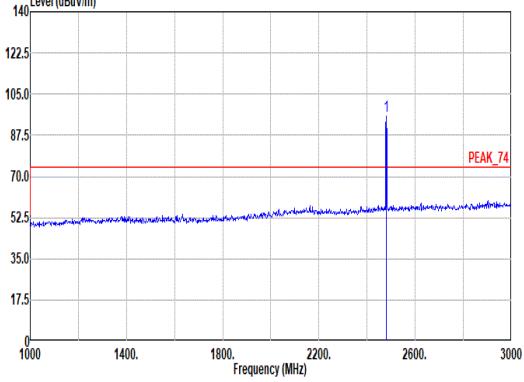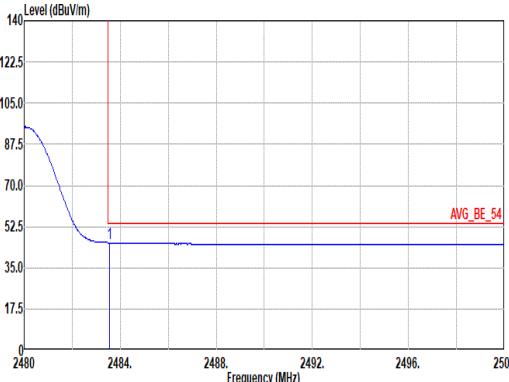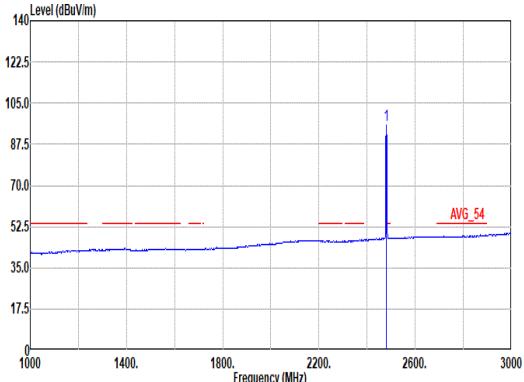





Mode	3																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SNT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2493.62</td><td>56.66</td><td>74.00</td><td>-17.34</td><td>41.66</td><td>27.72</td><td>8.30</td><td>31.05</td><td>10.03</td><td>339 360 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2493.62	56.66	74.00	-17.34	41.66	27.72	8.30	31.05	10.03	339 360 PEAK	 <p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SNT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>95.69</td><td>-----</td><td>-----</td><td>80.75</td><td>27.69</td><td>8.28</td><td>31.06</td><td>10.03</td><td>339 360 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	95.69	-----	-----	80.75	27.69	8.28	31.06	10.03	339 360 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2493.62	56.66	74.00	-17.34	41.66	27.72	8.30	31.05	10.03	339 360 PEAK																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	95.69	-----	-----	80.75	27.69	8.28	31.06	10.03	339 360 PEAK																																																																										
 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SNT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.54</td><td>45.68</td><td>54.00</td><td>-8.32</td><td>30.73</td><td>27.70</td><td>8.28</td><td>31.06</td><td>10.03</td><td>339 360 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	45.68	54.00	-8.32	30.73	27.70	8.28	31.06	10.03	339 360 AVERAGE	 <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SNT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>95.36</td><td>-----</td><td>-----</td><td>80.42</td><td>27.69</td><td>8.28</td><td>31.06</td><td>10.03</td><td>339 360 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	95.36	-----	-----	80.42	27.69	8.28	31.06	10.03	339 360 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2483.54	45.68	54.00	-8.32	30.73	27.70	8.28	31.06	10.03	339 360 AVERAGE																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	95.36	-----	-----	80.42	27.69	8.28	31.06	10.03	339 360 AVERAGE																																																																										



Mode	3																																																																																																																																													
	Harmonic																																																																																																																																													
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																																																																													
ANT	1																																																																																																																																													
Pol.	Horizontal																																																																																																																																													
Peak																																																																																																																																														
Avg	<p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02115_240806 HORIZONTAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>47.16</td><td>74.00</td><td>-26.84</td><td>69.47</td><td>33.05</td><td>11.71</td><td>67.54</td><td>0.47</td></tr><tr><td>2</td><td>5010.00</td><td>45.65</td><td>74.00</td><td>-28.35</td><td>67.81</td><td>33.13</td><td>11.74</td><td>67.50</td><td>0.47</td></tr><tr><td>3</td><td>7440.00</td><td>57.79</td><td>74.00</td><td>-16.21</td><td>73.22</td><td>36.49</td><td>14.67</td><td>66.93</td><td>0.34</td></tr><tr><td>4</td><td>7440.00</td><td>53.33</td><td>54.00</td><td>-0.67</td><td>68.76</td><td>36.49</td><td>14.67</td><td>66.93</td><td>0.34</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>298</td><td>299</td><td>Average</td></tr></tbody></table> <p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02115_240806 VERTICAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>43.21</td><td>74.00</td><td>-30.79</td><td>65.52</td><td>33.05</td><td>11.71</td><td>67.54</td><td>0.47</td></tr><tr><td>2</td><td>4995.00</td><td>45.77</td><td>74.00</td><td>-28.23</td><td>67.96</td><td>33.15</td><td>11.72</td><td>67.53</td><td>0.47</td></tr><tr><td>3</td><td>7440.00</td><td>57.98</td><td>74.00</td><td>-16.02</td><td>73.28</td><td>36.62</td><td>14.67</td><td>66.93</td><td>0.34</td></tr><tr><td>4</td><td>7440.00</td><td>53.53</td><td>54.00</td><td>-0.47</td><td>68.83</td><td>36.62</td><td>14.67</td><td>66.93</td><td>0.34</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>100</td><td>126</td><td>Average</td></tr></tbody></table>		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg		1	4960.00	47.16	74.00	-26.84	69.47	33.05	11.71	67.54	0.47	2	5010.00	45.65	74.00	-28.35	67.81	33.13	11.74	67.50	0.47	3	7440.00	57.79	74.00	-16.21	73.22	36.49	14.67	66.93	0.34	4	7440.00	53.33	54.00	-0.67	68.76	36.49	14.67	66.93	0.34								298	299	Average	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	4960.00	43.21	74.00	-30.79	65.52	33.05	11.71	67.54	0.47	2	4995.00	45.77	74.00	-28.23	67.96	33.15	11.72	67.53	0.47	3	7440.00	57.98	74.00	-16.02	73.28	36.62	14.67	66.93	0.34	4	7440.00	53.53	54.00	-0.47	68.83	36.62	14.67	66.93	0.34								100	126	Average
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																																																																																						
1	4960.00	47.16	74.00	-26.84	69.47	33.05	11.71	67.54	0.47																																																																																																																																					
2	5010.00	45.65	74.00	-28.35	67.81	33.13	11.74	67.50	0.47																																																																																																																																					
3	7440.00	57.79	74.00	-16.21	73.22	36.49	14.67	66.93	0.34																																																																																																																																					
4	7440.00	53.33	54.00	-0.67	68.76	36.49	14.67	66.93	0.34																																																																																																																																					
							298	299	Average																																																																																																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																																																																					
1	4960.00	43.21	74.00	-30.79	65.52	33.05	11.71	67.54	0.47																																																																																																																																					
2	4995.00	45.77	74.00	-28.23	67.96	33.15	11.72	67.53	0.47																																																																																																																																					
3	7440.00	57.98	74.00	-16.02	73.28	36.62	14.67	66.93	0.34																																																																																																																																					
4	7440.00	53.53	54.00	-0.47	68.83	36.62	14.67	66.93	0.34																																																																																																																																					
							100	126	Average																																																																																																																																					

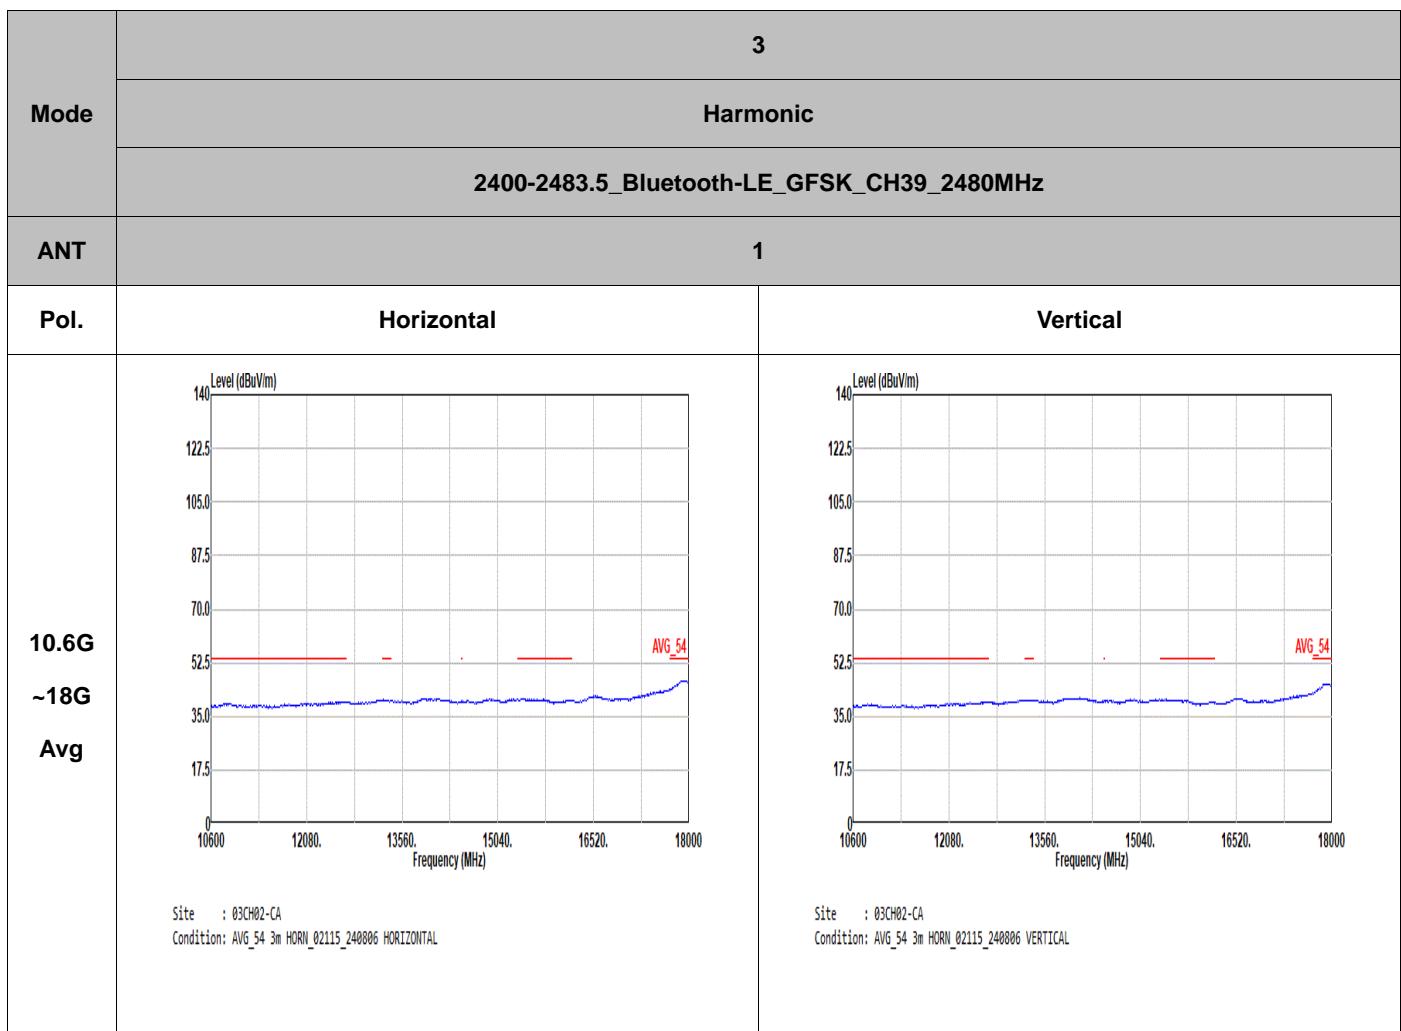


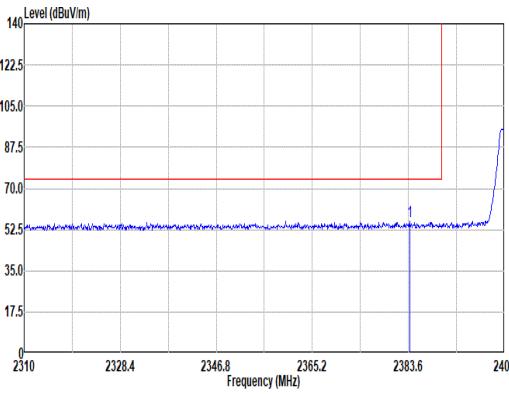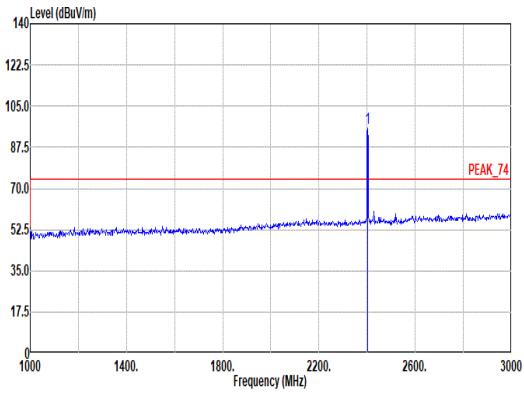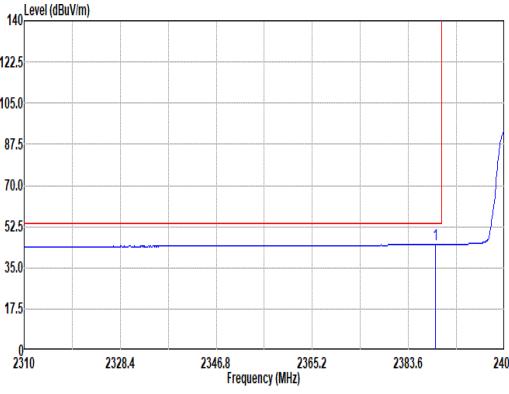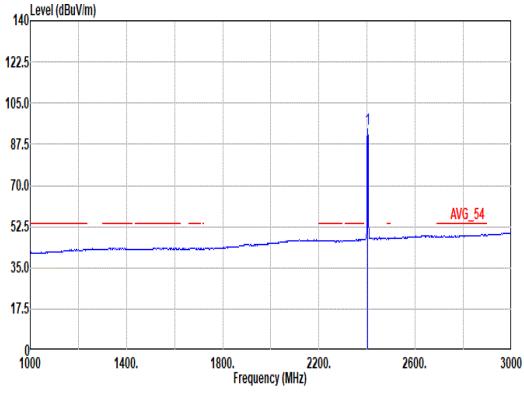


Mode	4																																																																																			
	Band Edge - L																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2383.88</td><td>55.93</td><td>74.00</td><td>-18.07</td><td>41.48</td><td>27.39</td><td>8.12</td><td>31.09</td><td>10.03</td><td>152 158 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2383.88	55.93	74.00	-18.07	41.48	27.39	8.12	31.09	10.03	152 158 PEAK	 <p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>95.41</td><td>-----</td><td>-----</td><td>80.93</td><td>27.38</td><td>8.15</td><td>31.08</td><td>10.03</td><td>152 158 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	95.41	-----	-----	80.93	27.38	8.15	31.08	10.03	152 158 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2383.88	55.93	74.00	-18.07	41.48	27.39	8.12	31.09	10.03	152 158 PEAK																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	95.41	-----	-----	80.93	27.38	8.15	31.08	10.03	152 158 PEAK																																																																										
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.75</td><td>44.82</td><td>54.00</td><td>-9.18</td><td>30.35</td><td>27.40</td><td>8.13</td><td>31.09</td><td>10.03</td><td>152 158 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.75	44.82	54.00	-9.18	30.35	27.40	8.13	31.09	10.03	152 158 AVERAGE	 <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>94.13</td><td>-----</td><td>-----</td><td>79.65</td><td>27.38</td><td>8.15</td><td>31.08</td><td>10.03</td><td>152 158 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	94.13	-----	-----	79.65	27.38	8.15	31.08	10.03	152 158 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2388.75	44.82	54.00	-9.18	30.35	27.40	8.13	31.09	10.03	152 158 AVERAGE																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	94.13	-----	-----	79.65	27.38	8.15	31.08	10.03	152 158 AVERAGE																																																																										







Mode	4	
	Band Edge - L	
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak		
Avg		


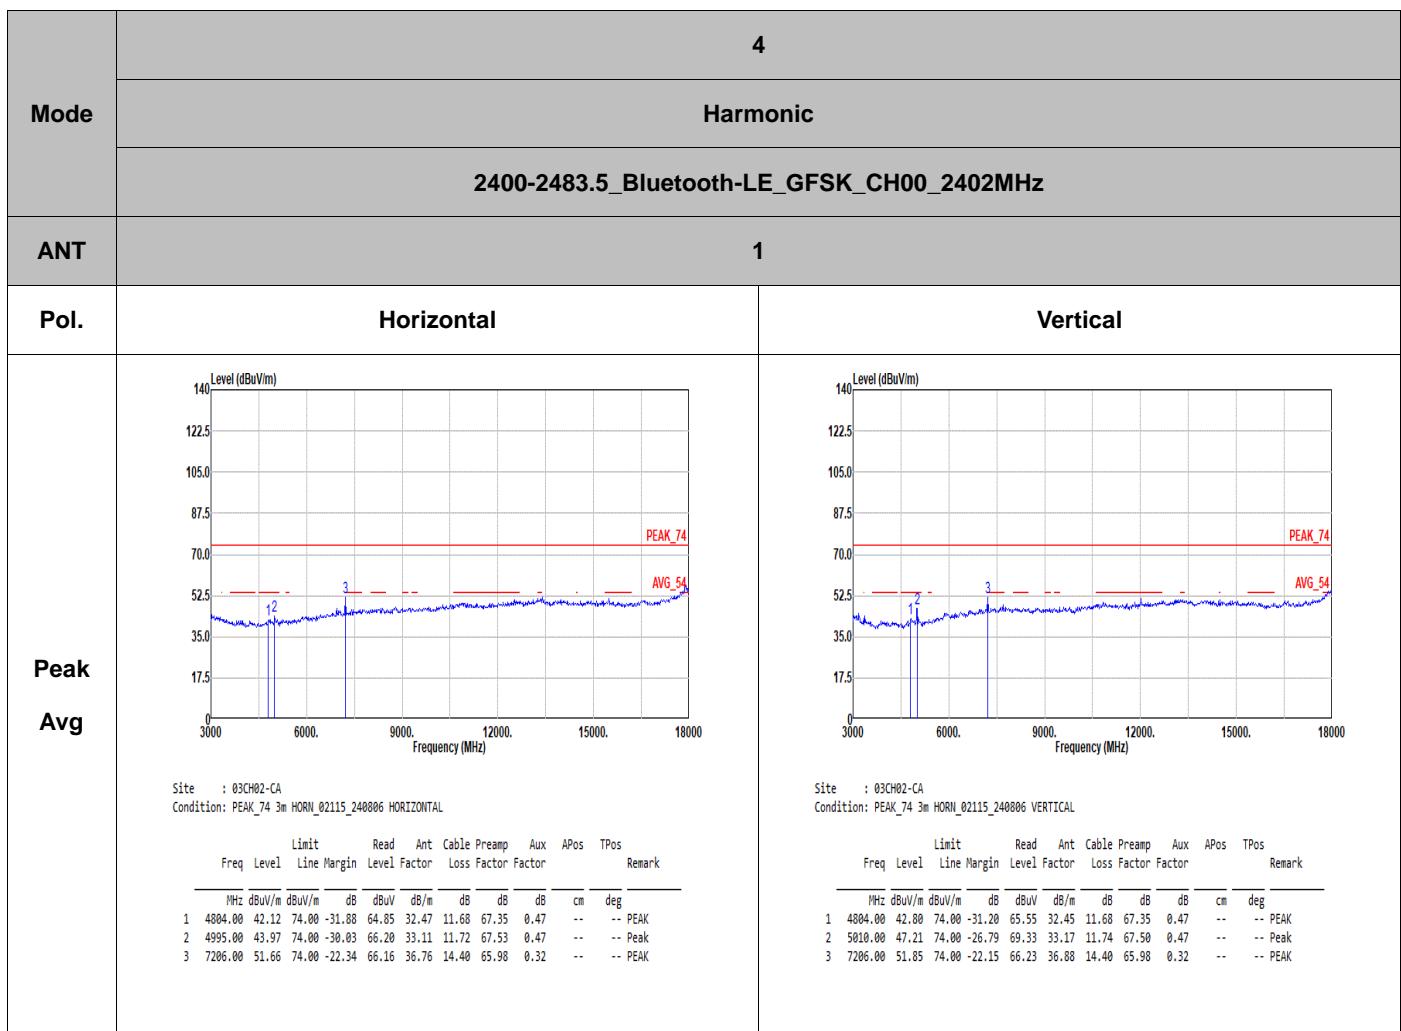


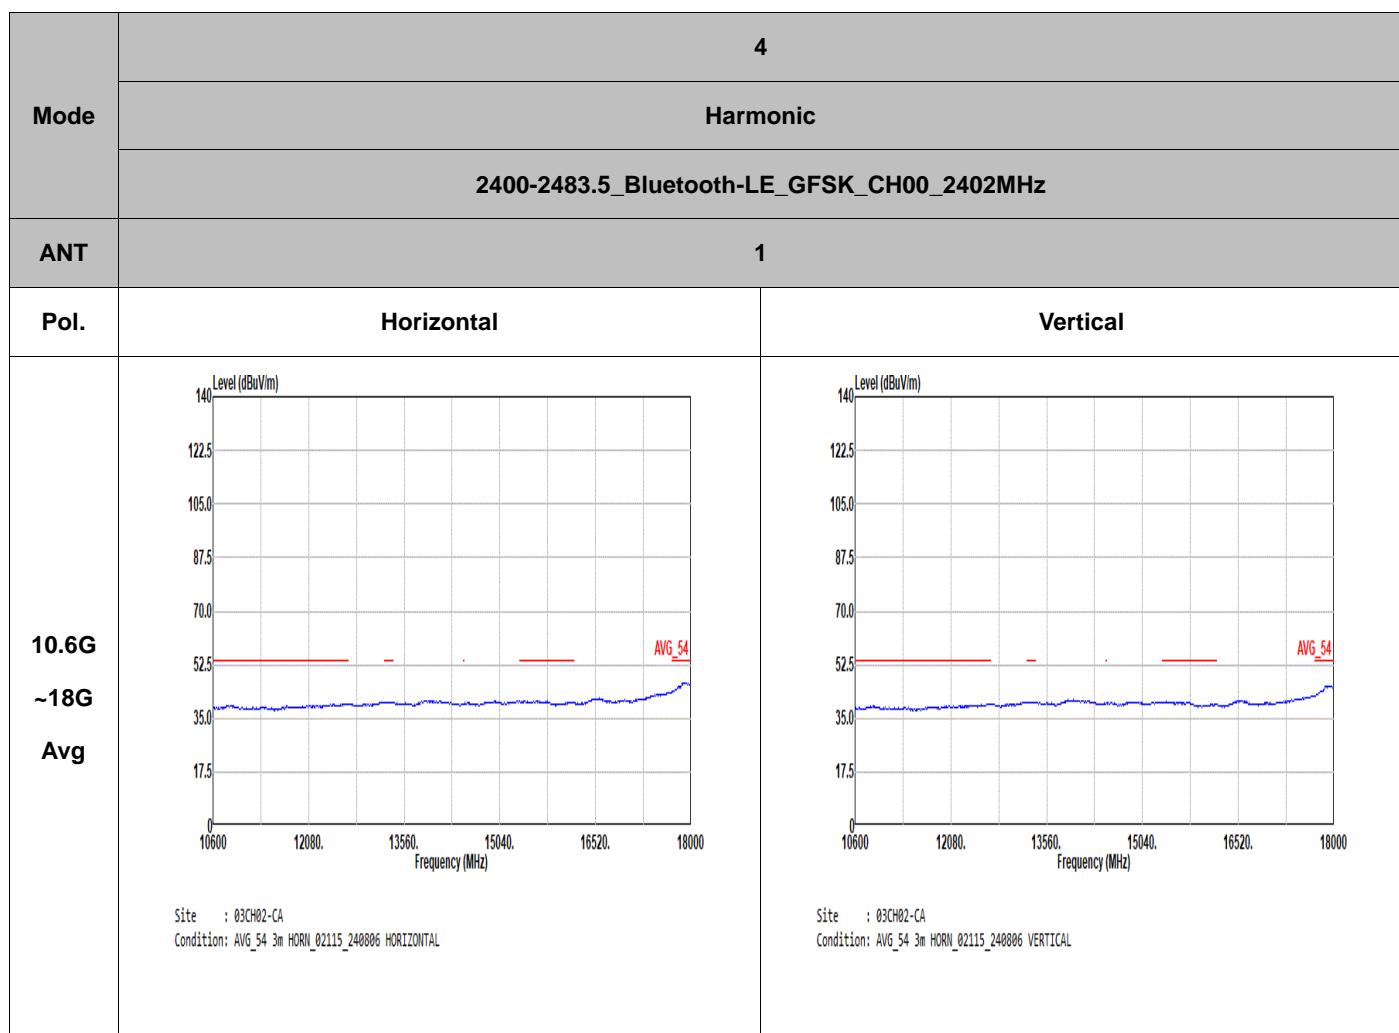

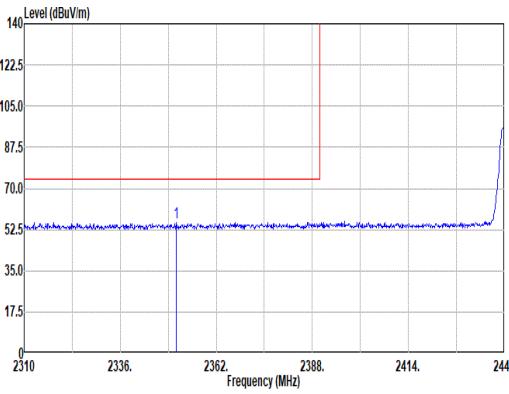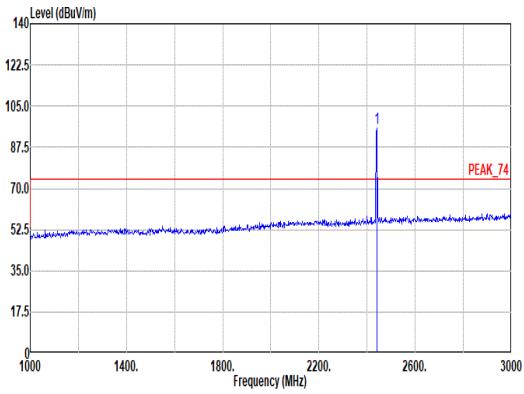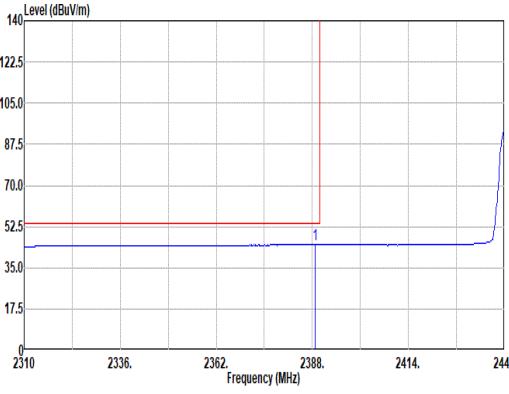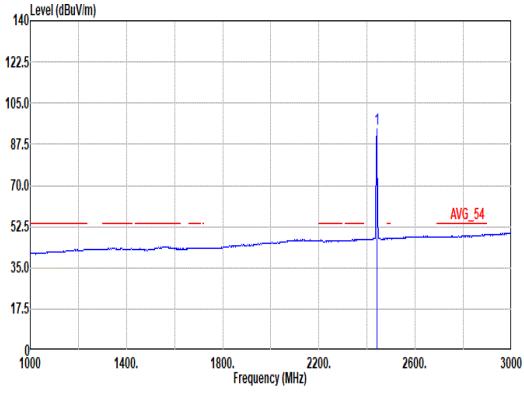

Mode	5																																																															
	Band Edge - L																																																															
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																															
ANT	1																																																															
Pol.	Horizontal	Fundamental																																																														
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2351.08</td><td>55.56</td><td>74.00</td><td>-18.44</td><td>41.36</td><td>27.23</td><td>8.06</td><td>31.12</td><td>10.03</td><td>101 295 PEAK</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2351.08	55.56	74.00	-18.44	41.36	27.23	8.06	31.12	10.03	101 295 PEAK	 <p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>95.53</td><td>-----</td><td>-----</td><td>80.83</td><td>27.54</td><td>8.21</td><td>31.08</td><td>10.03</td><td>101 295 PEAK</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	95.53	-----	-----	80.83	27.54	8.21	31.08	10.03	101 295 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2351.08	55.56	74.00	-18.44	41.36	27.23	8.06	31.12	10.03	101 295 PEAK																																																						
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2440.00	95.53	-----	-----	80.83	27.54	8.21	31.08	10.03	101 295 PEAK																																																						
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.78</td><td>44.76</td><td>54.00</td><td>-9.24</td><td>30.29</td><td>27.40</td><td>8.13</td><td>31.09</td><td>10.03</td><td>101 295 AVERAGE</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.78	44.76	54.00	-9.24	30.29	27.40	8.13	31.09	10.03	101 295 AVERAGE	 <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>94.28</td><td>-----</td><td>-----</td><td>79.58</td><td>27.54</td><td>8.21</td><td>31.08</td><td>10.03</td><td>101 295 AVERAGE</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	94.28	-----	-----	79.58	27.54	8.21	31.08	10.03	101 295 AVERAGE
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2388.78	44.76	54.00	-9.24	30.29	27.40	8.13	31.09	10.03	101 295 AVERAGE																																																						
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2440.00	94.28	-----	-----	79.58	27.54	8.21	31.08	10.03	101 295 AVERAGE																																																						

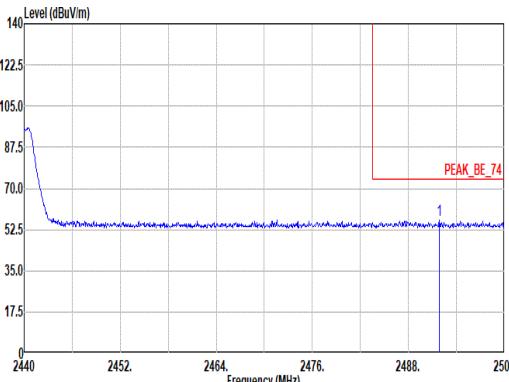
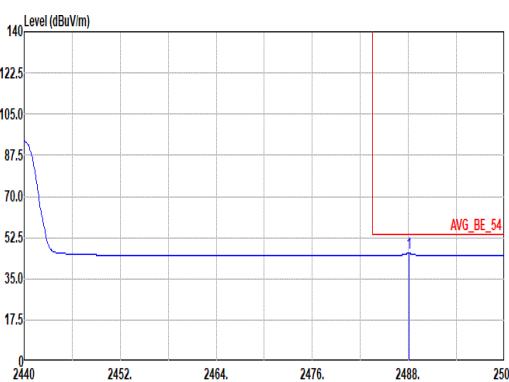


Mode	5																																									
	Band Edge - R																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																									
ANT	1																																									
Pol.	Horizontal	Fundamental																																								
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2491.90</td><td>56.69</td><td>74.00</td><td>-17.31</td><td>41.69</td><td>27.72</td><td>8.30</td><td>31.05</td><td>10.03 101 295 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2491.90	56.69	74.00	-17.31	41.69	27.72	8.30	31.05	10.03 101 295 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																	
1	2491.90	56.69	74.00	-17.31	41.69	27.72	8.30	31.05	10.03 101 295 PEAK																																	
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2488.06</td><td>45.77</td><td>54.00</td><td>-8.23</td><td>30.80</td><td>27.71</td><td>8.29</td><td>31.06</td><td>10.03 101 295 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2488.06	45.77	54.00	-8.23	30.80	27.71	8.29	31.06	10.03 101 295 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																	
1	2488.06	45.77	54.00	-8.23	30.80	27.71	8.29	31.06	10.03 101 295 AVERAGE																																	




Mode	5																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SNT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2331.19</td><td>55.30</td><td>74.00</td><td>-18.70</td><td>41.23</td><td>27.15</td><td>8.02</td><td>31.13</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td><td>9 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2331.19	55.30	74.00	-18.70	41.23	27.15	8.02	31.13	10.03									400	9 PEAK	<p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SNT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2440.00</td><td>95.57</td><td>-----</td><td>-----</td><td>88.87</td><td>27.54</td><td>8.21</td><td>31.08</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td><td>9 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	95.57	-----	-----	88.87	27.54	8.21	31.08	10.03									400	9 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2331.19	55.30	74.00	-18.70	41.23	27.15	8.02	31.13	10.03																																																																									
								400	9 PEAK																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2440.00	95.57	-----	-----	88.87	27.54	8.21	31.08	10.03																																																																									
								400	9 PEAK																																																																									
<p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SNT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2387.74</td><td>44.60</td><td>54.00</td><td>-9.40</td><td>30.14</td><td>27.39</td><td>8.13</td><td>31.09</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td><td>9 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.74	44.60	54.00	-9.40	30.14	27.39	8.13	31.09	10.03									400	9 AVERAGE	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SNT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2440.00</td><td>94.29</td><td>-----</td><td>-----</td><td>79.59</td><td>27.54</td><td>8.21</td><td>31.08</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td><td>9 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	94.29	-----	-----	79.59	27.54	8.21	31.08	10.03									400	9 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2387.74	44.60	54.00	-9.40	30.14	27.39	8.13	31.09	10.03																																																																									
								400	9 AVERAGE																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2440.00	94.29	-----	-----	79.59	27.54	8.21	31.08	10.03																																																																									
								400	9 AVERAGE																																																																									

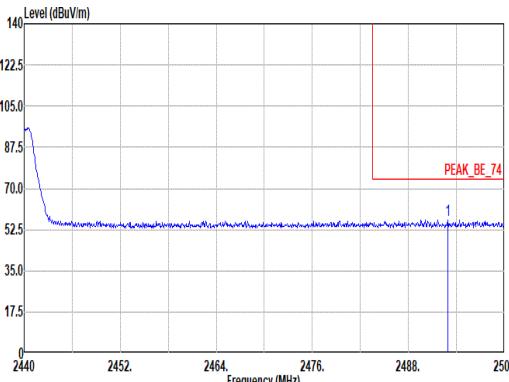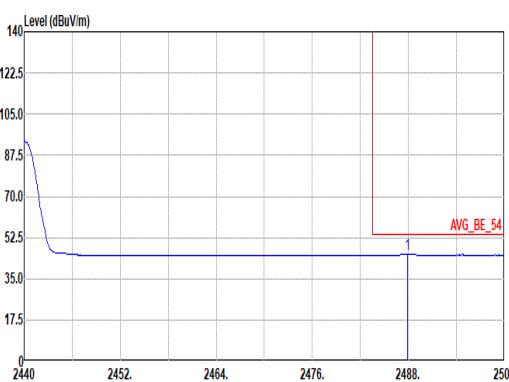




Mode	5																															
	Band Edge - R																															
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																															
ANT	1																															
Pol.	Vertical	Fundamental																														
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2492.92</td><td>56.75</td><td>74.00</td><td>-17.25</td><td>41.75</td><td>27.72</td><td>8.30</td><td>31.05</td><td>10.03 400 9 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	2492.92	56.75	74.00	-17.25	41.75	27.72	8.30	31.05	10.03 400 9 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																									
1	2492.92	56.75	74.00	-17.25	41.75	27.72	8.30	31.05	10.03 400 9 PEAK																							
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2487.88</td><td>45.45</td><td>54.00</td><td>-8.55</td><td>30.48</td><td>27.71</td><td>8.29</td><td>31.06</td><td>10.03 400 9 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	2487.88	45.45	54.00	-8.55	30.48	27.71	8.29	31.06	10.03 400 9 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																									
1	2487.88	45.45	54.00	-8.55	30.48	27.71	8.29	31.06	10.03 400 9 AVERAGE																							







Mode	5																																																																																																																																																							
	Harmonic																																																																																																																																																							
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																																																																																							
ANT	1																																																																																																																																																							
Pol.	Horizontal																																																																																																																																																							
Peak																																																																																																																																																								
Avg	<p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02115_240806 HORIZONTAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>44.01</td><td>74.00</td><td>-29.99</td><td>66.54</td><td>32.77</td><td>11.70</td><td>67.47</td><td>0.47</td></tr><tr><td>2</td><td>5010.00</td><td>44.07</td><td>74.00</td><td>-29.93</td><td>66.23</td><td>33.13</td><td>11.74</td><td>67.50</td><td>0.47</td></tr><tr><td>3</td><td>7320.00</td><td>56.22</td><td>74.00</td><td>-17.78</td><td>71.47</td><td>36.79</td><td>14.53</td><td>66.90</td><td>0.33</td></tr><tr><td>4</td><td>7320.00</td><td>50.05</td><td>54.00</td><td>-3.95</td><td>65.30</td><td>36.79</td><td>14.53</td><td>66.90</td><td>0.33</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>100</td><td>49</td><td>Average</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark		1	4880.00	44.01	74.00	-29.99	66.54	32.77	11.70	67.47	0.47	2	5010.00	44.07	74.00	-29.93	66.23	33.13	11.74	67.50	0.47	3	7320.00	56.22	74.00	-17.78	71.47	36.79	14.53	66.90	0.33	4	7320.00	50.05	54.00	-3.95	65.30	36.79	14.53	66.90	0.33								100	49	Average	<p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02115_240806 VERTICAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>44.87</td><td>74.00</td><td>-29.13</td><td>67.43</td><td>32.74</td><td>11.70</td><td>67.47</td><td>0.47</td></tr><tr><td>2</td><td>5010.00</td><td>47.14</td><td>74.00</td><td>-26.86</td><td>69.26</td><td>33.17</td><td>11.74</td><td>67.50</td><td>0.47</td></tr><tr><td>3</td><td>7320.00</td><td>55.53</td><td>74.00</td><td>-18.47</td><td>70.62</td><td>36.95</td><td>14.53</td><td>66.90</td><td>0.33</td></tr><tr><td>4</td><td>7320.00</td><td>49.62</td><td>54.00</td><td>-4.38</td><td>64.71</td><td>36.95</td><td>14.53</td><td>66.90</td><td>0.33</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>100</td><td>188</td><td>PEAK</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>100</td><td>188</td><td>Average</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark		1	4880.00	44.87	74.00	-29.13	67.43	32.74	11.70	67.47	0.47	2	5010.00	47.14	74.00	-26.86	69.26	33.17	11.74	67.50	0.47	3	7320.00	55.53	74.00	-18.47	70.62	36.95	14.53	66.90	0.33	4	7320.00	49.62	54.00	-4.38	64.71	36.95	14.53	66.90	0.33								100	188	PEAK								100	188	Average
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																
1	4880.00	44.01	74.00	-29.99	66.54	32.77	11.70	67.47	0.47																																																																																																																																															
2	5010.00	44.07	74.00	-29.93	66.23	33.13	11.74	67.50	0.47																																																																																																																																															
3	7320.00	56.22	74.00	-17.78	71.47	36.79	14.53	66.90	0.33																																																																																																																																															
4	7320.00	50.05	54.00	-3.95	65.30	36.79	14.53	66.90	0.33																																																																																																																																															
							100	49	Average																																																																																																																																															
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																
1	4880.00	44.87	74.00	-29.13	67.43	32.74	11.70	67.47	0.47																																																																																																																																															
2	5010.00	47.14	74.00	-26.86	69.26	33.17	11.74	67.50	0.47																																																																																																																																															
3	7320.00	55.53	74.00	-18.47	70.62	36.95	14.53	66.90	0.33																																																																																																																																															
4	7320.00	49.62	54.00	-4.38	64.71	36.95	14.53	66.90	0.33																																																																																																																																															
							100	188	PEAK																																																																																																																																															
							100	188	Average																																																																																																																																															

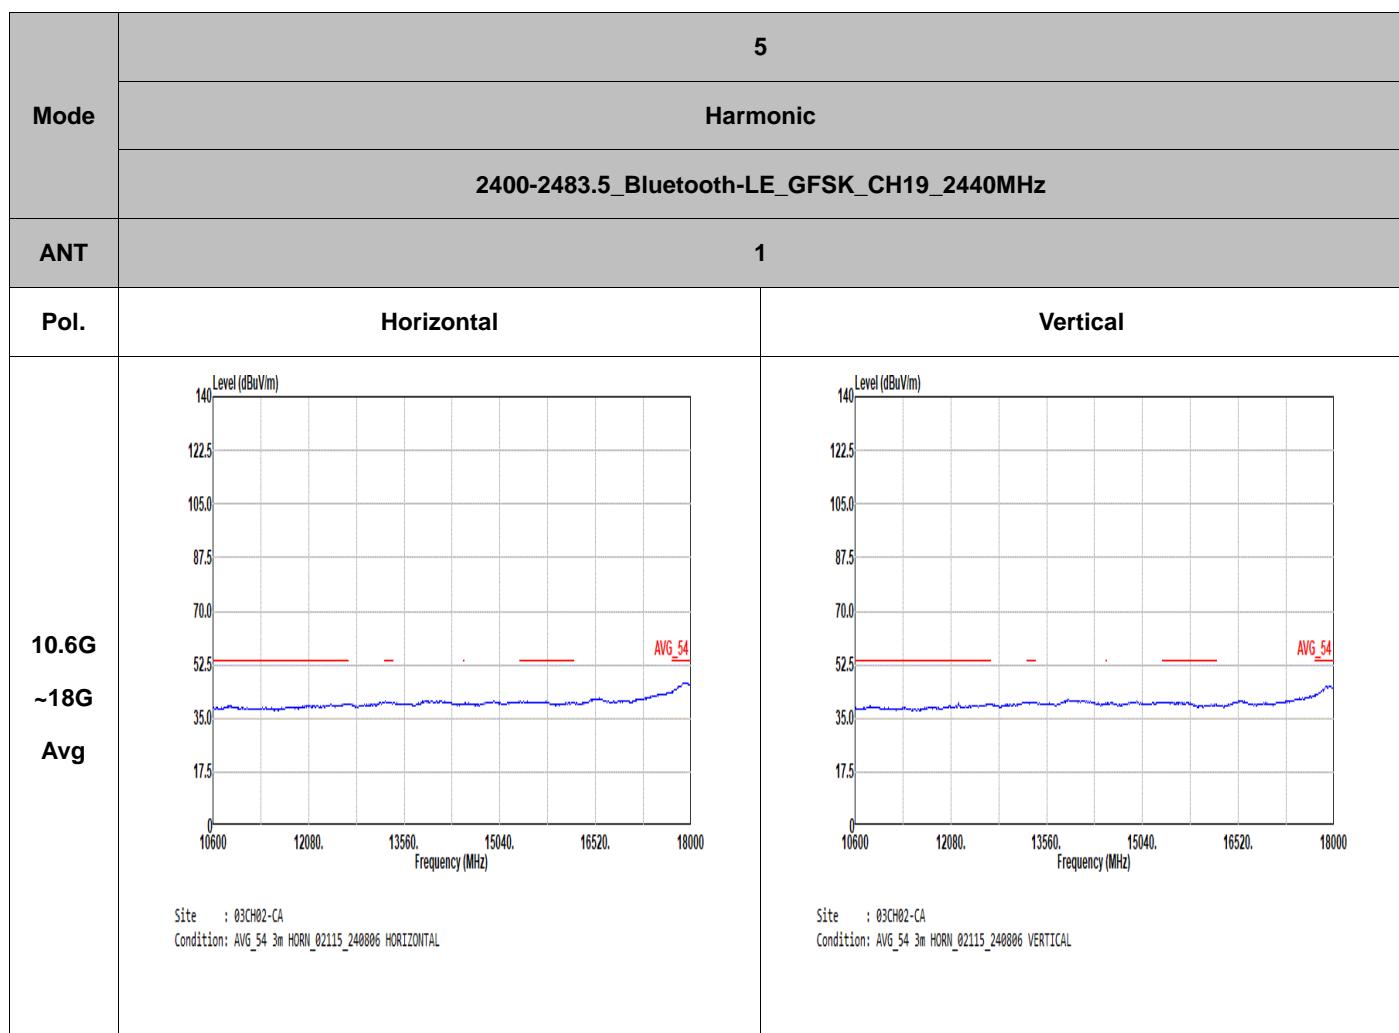

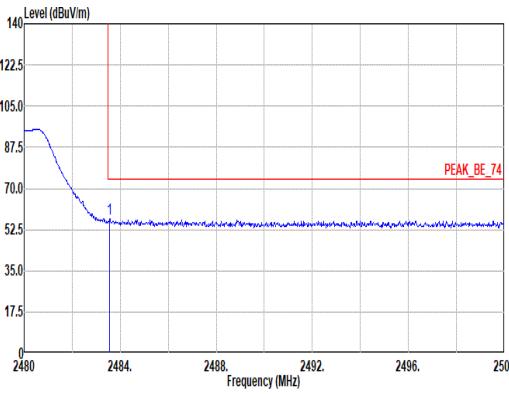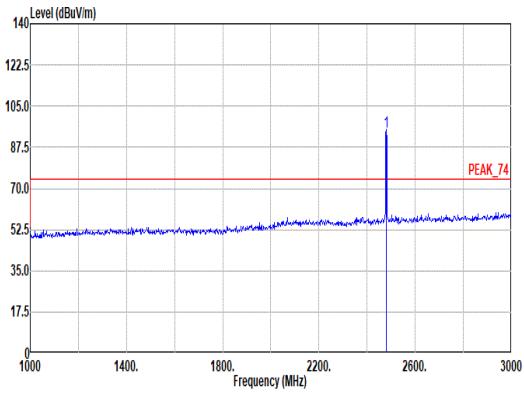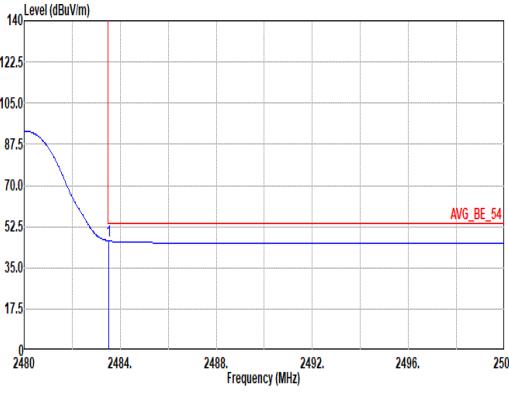


Mode	6																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.56</td><td>57.20</td><td>74.00</td><td>-16.80</td><td>42.25</td><td>27.70</td><td>8.28</td><td>31.06</td><td>10.03</td><td>320 122 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	57.20	74.00	-16.80	42.25	27.70	8.28	31.06	10.03	320 122 PEAK	 <p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>94.07</td><td>-----</td><td>-----</td><td>79.13</td><td>27.69</td><td>8.28</td><td>31.06</td><td>10.03</td><td>320 122 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.07	-----	-----	79.13	27.69	8.28	31.06	10.03	320 122 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2483.56	57.20	74.00	-16.80	42.25	27.70	8.28	31.06	10.03	320 122 PEAK																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	94.07	-----	-----	79.13	27.69	8.28	31.06	10.03	320 122 PEAK																																																																										
 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.52</td><td>46.45</td><td>54.00</td><td>-7.55</td><td>31.50</td><td>27.70</td><td>8.28</td><td>31.06</td><td>10.03</td><td>320 122 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	46.45	54.00	-7.55	31.50	27.70	8.28	31.06	10.03	320 122 AVERAGE	 <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>93.01</td><td>-----</td><td>-----</td><td>78.07</td><td>27.69</td><td>8.28</td><td>31.06</td><td>10.03</td><td>320 122 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	93.01	-----	-----	78.07	27.69	8.28	31.06	10.03	320 122 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2483.52	46.45	54.00	-7.55	31.50	27.70	8.28	31.06	10.03	320 122 AVERAGE																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	93.01	-----	-----	78.07	27.69	8.28	31.06	10.03	320 122 AVERAGE																																																																										

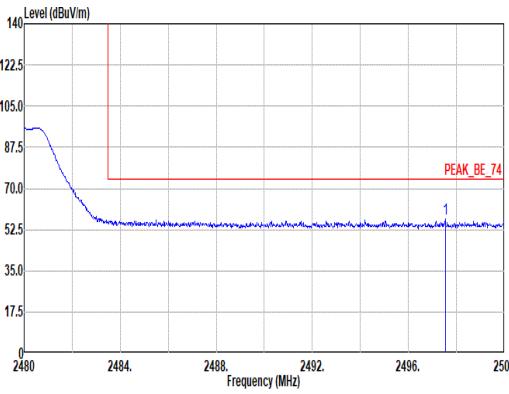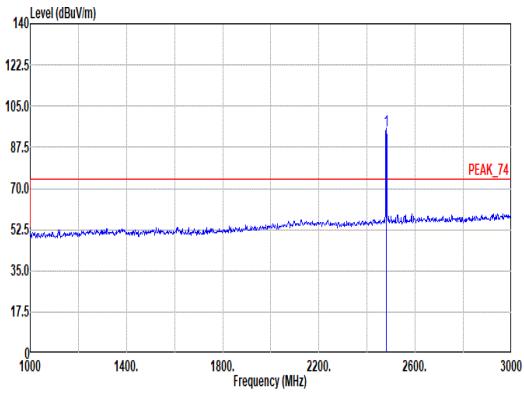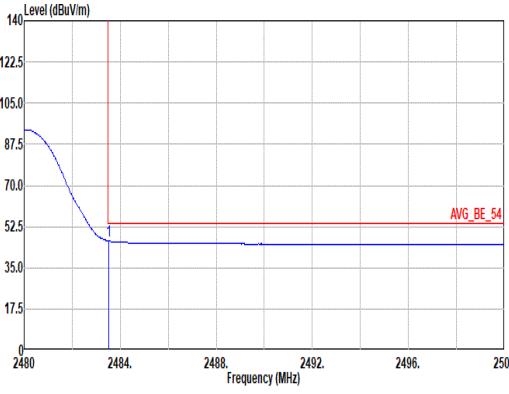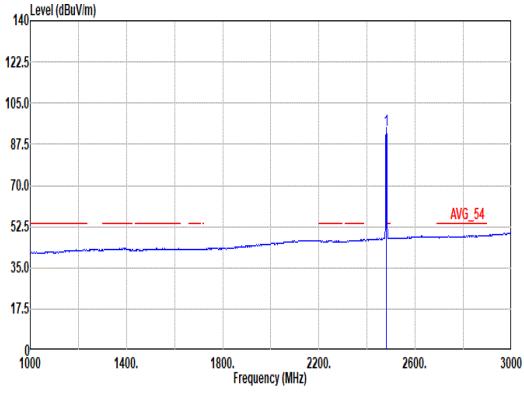


Mode	6																																																																																					
	Band Edge																																																																																					
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																					
ANT	1																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SNT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2497.54</td><td>56.94</td><td>74.00</td><td>-17.06</td><td>41.92</td><td>27.73</td><td>8.31</td><td>31.05</td><td>10.03</td><td>340</td><td>0 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	2497.54	56.94	74.00	-17.06	41.92	27.73	8.31	31.05	10.03	340	0 PEAK	 <p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SNT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>94.65</td><td>-----</td><td>-----</td><td>79.71</td><td>27.69</td><td>8.28</td><td>31.06</td><td>10.03</td><td>340</td><td>0 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	2480.00	94.65	-----	-----	79.71	27.69	8.28	31.06	10.03	340	0 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																													
1	2497.54	56.94	74.00	-17.06	41.92	27.73	8.31	31.05	10.03	340	0 PEAK																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																													
1	2480.00	94.65	-----	-----	79.71	27.69	8.28	31.06	10.03	340	0 PEAK																																																																											
 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SNT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.52</td><td>46.41</td><td>54.00</td><td>-7.59</td><td>31.46</td><td>27.70</td><td>8.28</td><td>31.06</td><td>10.03</td><td>340</td><td>0 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	2483.52	46.41	54.00	-7.59	31.46	27.70	8.28	31.06	10.03	340	0 AVERAGE	 <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SNT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>93.47</td><td>-----</td><td>-----</td><td>78.53</td><td>27.69</td><td>8.28</td><td>31.06</td><td>10.03</td><td>340</td><td>0 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	2480.00	93.47	-----	-----	78.53	27.69	8.28	31.06	10.03	340	0 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																													
1	2483.52	46.41	54.00	-7.59	31.46	27.70	8.28	31.06	10.03	340	0 AVERAGE																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																													
1	2480.00	93.47	-----	-----	78.53	27.69	8.28	31.06	10.03	340	0 AVERAGE																																																																											





Mode	6																																																																																																																																													
	Harmonic																																																																																																																																													
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																																																																													
ANT	1																																																																																																																																													
Pol.	Horizontal																																																																																																																																													
Peak																																																																																																																																														
Avg	<p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02115_240806 HORIZONTAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>42.94</td><td>74.00</td><td>-31.06</td><td>65.25</td><td>33.05</td><td>11.71</td><td>67.54</td><td>0.47</td></tr><tr><td>2</td><td>4995.00</td><td>44.09</td><td>74.00</td><td>-29.91</td><td>66.32</td><td>33.11</td><td>11.72</td><td>67.53</td><td>0.47</td></tr><tr><td>3</td><td>7440.00</td><td>56.06</td><td>74.00</td><td>-17.94</td><td>71.49</td><td>36.49</td><td>14.67</td><td>66.93</td><td>0.34</td></tr><tr><td>4</td><td>7440.00</td><td>50.76</td><td>54.00</td><td>-3.24</td><td>66.19</td><td>36.49</td><td>14.67</td><td>66.93</td><td>0.34</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>100</td><td></td><td>Avg</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg		1	4960.00	42.94	74.00	-31.06	65.25	33.05	11.71	67.54	0.47	2	4995.00	44.09	74.00	-29.91	66.32	33.11	11.72	67.53	0.47	3	7440.00	56.06	74.00	-17.94	71.49	36.49	14.67	66.93	0.34	4	7440.00	50.76	54.00	-3.24	66.19	36.49	14.67	66.93	0.34								100		Avg	<p>Site : 03CH02-CA Condition: PEAK_74 3m HORN_02115_240806 VERTICAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>45.04</td><td>74.00</td><td>-28.96</td><td>67.35</td><td>33.05</td><td>11.71</td><td>67.54</td><td>0.47</td></tr><tr><td>2</td><td>4995.00</td><td>48.11</td><td>74.00</td><td>-25.89</td><td>70.30</td><td>33.15</td><td>11.72</td><td>67.53</td><td>0.47</td></tr><tr><td>3</td><td>7440.00</td><td>55.04</td><td>74.00</td><td>-18.16</td><td>71.14</td><td>36.62</td><td>14.67</td><td>66.93</td><td>0.34</td></tr><tr><td>4</td><td>7440.00</td><td>49.98</td><td>54.00</td><td>-4.02</td><td>65.28</td><td>36.62</td><td>14.67</td><td>66.93</td><td>0.34</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>328</td><td>244 Average</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	4960.00	45.04	74.00	-28.96	67.35	33.05	11.71	67.54	0.47	2	4995.00	48.11	74.00	-25.89	70.30	33.15	11.72	67.53	0.47	3	7440.00	55.04	74.00	-18.16	71.14	36.62	14.67	66.93	0.34	4	7440.00	49.98	54.00	-4.02	65.28	36.62	14.67	66.93	0.34									328	244 Average
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																																																																																						
1	4960.00	42.94	74.00	-31.06	65.25	33.05	11.71	67.54	0.47																																																																																																																																					
2	4995.00	44.09	74.00	-29.91	66.32	33.11	11.72	67.53	0.47																																																																																																																																					
3	7440.00	56.06	74.00	-17.94	71.49	36.49	14.67	66.93	0.34																																																																																																																																					
4	7440.00	50.76	54.00	-3.24	66.19	36.49	14.67	66.93	0.34																																																																																																																																					
							100		Avg																																																																																																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																																																																					
1	4960.00	45.04	74.00	-28.96	67.35	33.05	11.71	67.54	0.47																																																																																																																																					
2	4995.00	48.11	74.00	-25.89	70.30	33.15	11.72	67.53	0.47																																																																																																																																					
3	7440.00	55.04	74.00	-18.16	71.14	36.62	14.67	66.93	0.34																																																																																																																																					
4	7440.00	49.98	54.00	-4.02	65.28	36.62	14.67	66.93	0.34																																																																																																																																					
								328	244 Average																																																																																																																																					

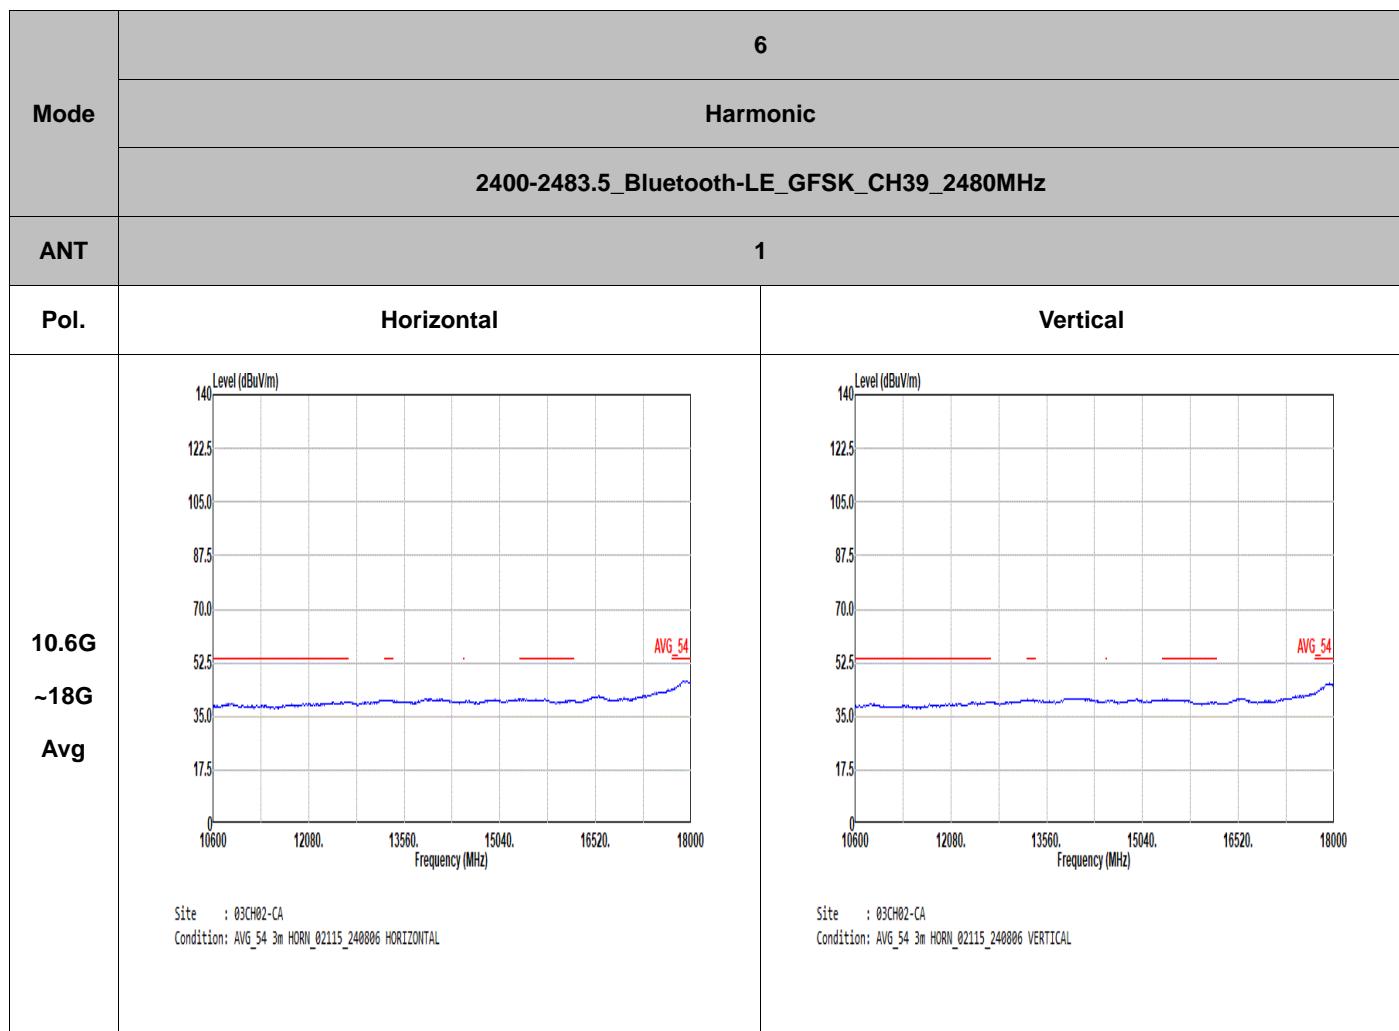

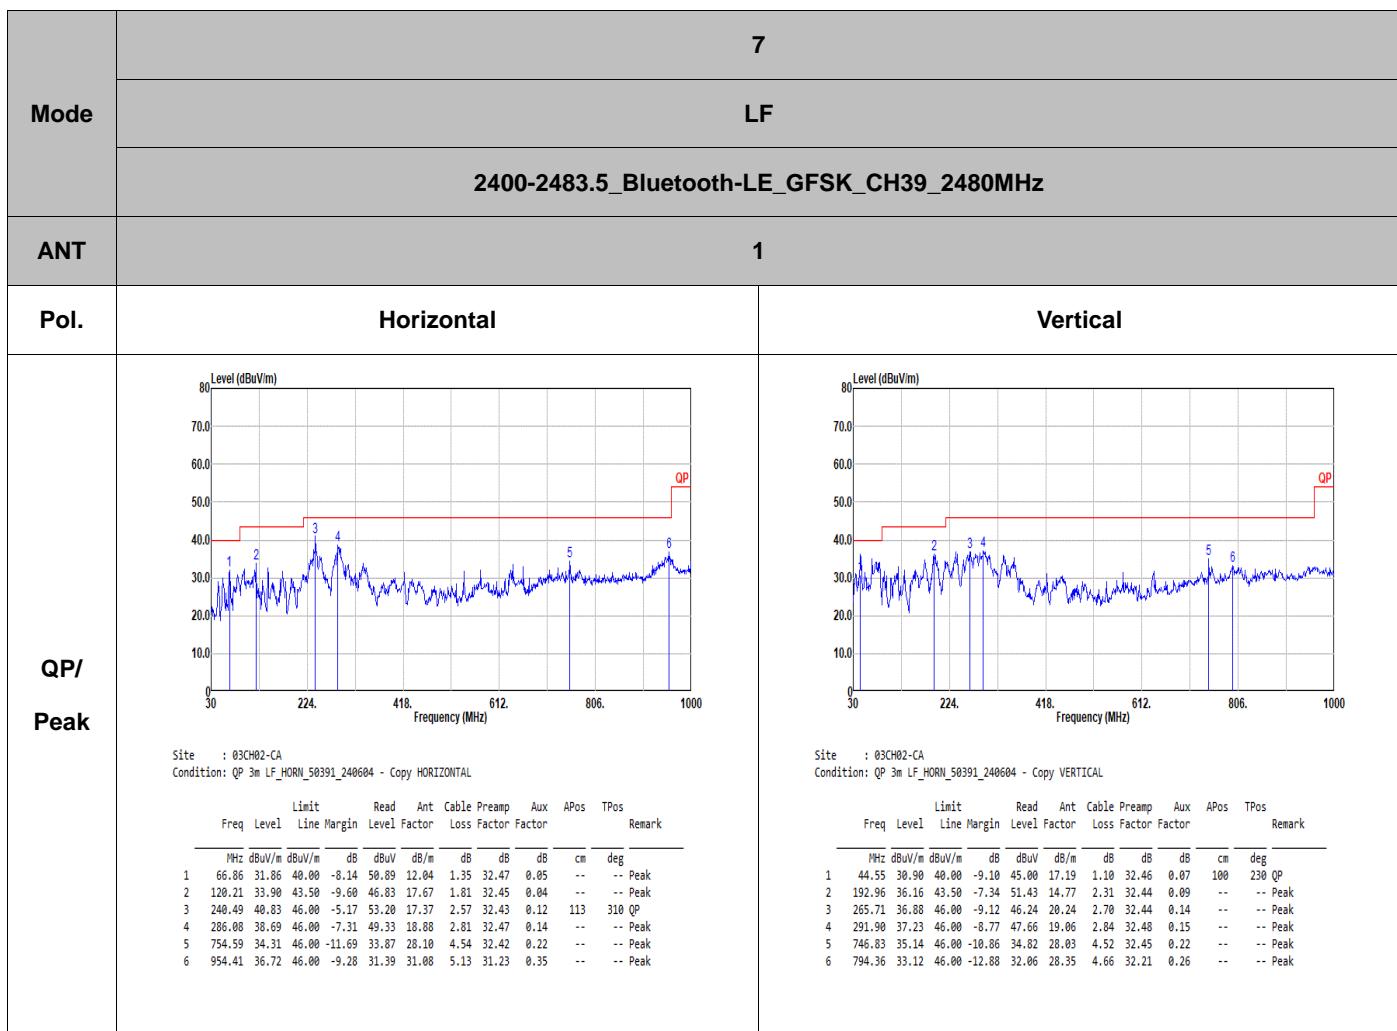

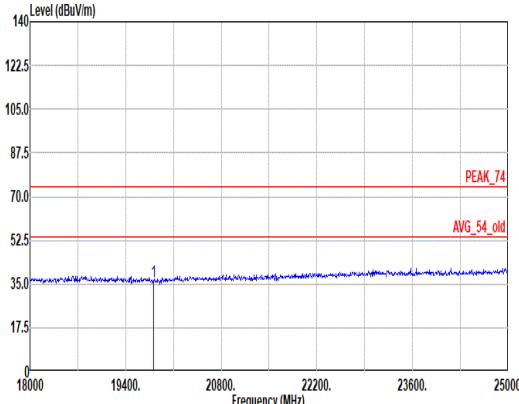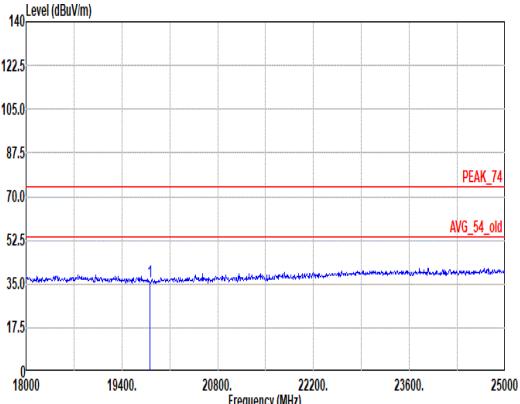

Mode	8																																																																
	SHF																																																																
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																
ANT	1																																																																
Pol.	Horizontal																																																																
Peak																																																																	
	<p>Site : 03CH02-CA Condition: PEAK_74 1m SHF_HORN_00841_240807 HORIZONTAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>19808.00</td><td>35.76</td><td>74.00</td><td>-38.24</td><td>36.94</td><td>37.81</td><td>24.58</td><td>54.03</td><td>-9.54</td><td>400</td><td>237 Peak</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	19808.00	35.76	74.00	-38.24	36.94	37.81	24.58	54.03	-9.54	400	237 Peak	<p>Site : 03CH02-CA Condition: PEAK_74 1m SHF_HORN_00841_240807 VERTICAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>19808.00</td><td>36.12</td><td>74.00</td><td>-37.88</td><td>37.43</td><td>37.68</td><td>24.58</td><td>54.03</td><td>-9.54</td><td>200</td><td>216 Peak</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	19808.00	36.12	74.00	-37.88	37.43	37.68	24.58	54.03	-9.54	200
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																										
1	19808.00	35.76	74.00	-38.24	36.94	37.81	24.58	54.03	-9.54	400	237 Peak																																																						
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																										
1	19808.00	36.12	74.00	-37.88	37.43	37.68	24.58	54.03	-9.54	200	216 Peak																																																						



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	100.00	-	-	10Hz
Bluetooth - LE for 2Mbps	100.00	-	-	10Hz

