# **FCC Test Report**

Report No.: AGC02866150301FE08

FCC ID : 2AEJ9FREEDOM

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: GSM/WCDMA Mobile Phone

**BRAND NAME** : N/A

**MODEL NAME** : Freedom

**CLIENT** : Digit Secure India Private Limited

**DATE OF ISSUE** : Apr.24, 2015

**STANDARD(S)** FCC Part 15.247

TEST PROCEDURE(S) KDB 558074 v03r02

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

AGC B

#### **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 43

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr.24, 2015	Valid	Original Report

### **TABLE OF CONTENTS**

1. VERIFICATION OF COMPLIANCE	•
2.1PRODUCT DESCRIPTION	
2.2 RELATED SUBMITTAL(S)/GRANT(S)	
2.3TEST METHODOLOGY	
2.4 TEST FACILITY	
2.5 SPECIAL ACCESSORIES	
2.6 EQUIPMENT MODIFICATIONS	
3. SYSTEM TEST CONFIGURATION	
3.1 CONFIGURATION OF TESTED SYSTEM	
3.2 EQUIPMENT USED IN TESTED SYSTEM	7
4. SUMMARY OF TEST RESULTS	
5. DESCRIPTION OF TEST MODES	
6.1. STANDARD APPLICABLE	11
6.2. TEST RESULT	11
7. RADIATED EMISSION	
7.1 MEASUREMENT PROCEDURE	
7.2 TEST SETUP	
7.3 LIMITS AND MEASUREMENT RESULT	
7.4 TEST RESULT	
8. BAND EDGE EMISSION	<b>22</b> 22
8.2. TEST SET-UP	
8.3. RADIATED TEST RUSULT	
8.4. CONDUCTED TEST RESULT	
9. 6DB BANDWIDTH	
9.1. TEST EQUIPMENT LIST AND DETAILS	25
9.2. TEST PROCEDURE	25
9.3. SUMMARY OF TEST RESULTS/PLOTS	25
10. CONDUCTED OUTPUT POWER	27
10.1. MEASUREMENT PROCEDURE	
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
10.3. LIMITS AND MEASUREMENT RESULT	
11. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	30 30

Page 4 of 43

APPENDIX B: PHOTOGRAPHS OF EUT	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	36
12.5 TEST RESULT OF POWER LINE	34
12.4 FINAL TEST PROCEDURE	33
12.3 PRELIMINARY PROCEDURE	33
12.2 TEST SETUP	32
12.1 LIMITS	32
11.4 LIMITS AND MEASUREMENT RESULT	30
11.3 MEASUREMENT EQUIPMENT USED	30
11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	30

Page 5 of 43

#### 1. VERIFICATION OF COMPLIANCE

11 1 2 1 1 1 1 2 1 1 1 2 1 1 2 1 2 1 2			
Applicant	Digit Secure India Private Limited		
Address	Plot No-1303&1304, 4th Floor, Khanamet, HiTech City, Ayappa Society, Madhapur, Hyderabad, Telangana, India		
Manufacturer	SHENZHEN HSEM TECHNOLOGY CO., LTD.		
Address 4TH FLOOR, 5 PLANTS, TONGFUYU INDUSTRIAL, TAOYUAN STREET NANSHAN DISTRICT, SHENZHEN P.R. CHINA			
Product Designation	GSM/WCDMA Mobile Phone		
Brand Name	N/A		
Test Model	Freedom		
Date of test	Apr.17, 2015 to Apr.23, 2015		
Deviation	None		
Condition of Test Sample	Normal		
Report Template	AGCRT-US-BLE/RF		
Report Template	AGCKT-US-DLE/KF		

#### WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Matt Zhang Apr.24, 2015

Checked By

Kidd Yang Apr.24, 2015

Authorized By

Solger Zhang Apr.24, 2015

Page 6 of 43

# 2.GENERAL INFORMATION 2.1PRODUCT DESCRIPTION

The EUT is designed as "GSM/WCDMA Mobile Phone". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
Operation requestcy	2.402 GHZ to 2.400GHZ
Bluetooth Version	V4.0
Modulation	GFSK
Number of channels	40 Channel(37 Hopping Channel,3 advertising Channel)
Antenna Designation	Integrated Antenna
Antenna Gain	0.7dBi
Hardware Version	DX01_MB_P2_V01
Software Version	ALPS.KK1.MP1.V2.11
Power Supply	DC3.7V by Built-in Li-ion Battery

#### 2.2 RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2AEJ9FREEDOM** filing to comply with Section 15.247of the FCC Part 15, Subpart C Rules.

#### 2.3TEST METHODOLOGY

All measurements contained in this report were conducted with KDB 558074 D01 DTS Meas Guidance v03r02, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions. The EUT was tested in all three orthogonal planes and the worse case was showed.

#### 2.4 TEST FACILITY

Site	Compliance Certification Services (Shenzhen) Inc.	
Location  No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd.,Guan Lan Baoan District, Shenzhen, China		
Description Test Firm Registration Number: 441872		

#### 2.5 SPECIAL ACCESSORIES

Refer to section 2.2.

#### 2.6 EQUIPMENT MODIFICATIONS


Not available for this EUT intended for grant.

#### 3. SYSTEM TEST CONFIGURATION

Report No.: AGC02866150301FE08 Page 7 of 43

#### 3.1 CONFIGURATION OF TESTED SYSTEM

# Configuration:



#### 3.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No. ID or Specification		Note
1	GSM/WCDMA Mobile Phone	Freedom	FCC ID:2AEJ9FREEDOM	EUT
2	Adapter	Freedom	5V 2000mA	Accessory
3	USB Cable	Freedom	N/A	Accessory

Report No.: AGC02866150301FE08 Page 8 of 43

#### **TEST EQUIPMENT LIST**

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Power Probe	R&S	NRP-Z23	100323	07/25/2014	07/24/2015
RF attenuator	N/A	RFA20db	68	N/A	N/A
Spectrum Analyzer	Agilent	E4440A	US41421290	02/17/2015	02/16/2016
Amplifier	EM	EM30180	0607030	02/17/2015	02/16/2016
Horn Antenna	EM	EM-AH-10180	67	02/17/2015	02/16/2016
Horn Antenna	A.H. Systems Inc.	SAS-574	-	07/25/2014	07/24/2015
EMI Test Receiver	Rohde & Schwarz	ESCI	100694	07/25/2014	07/24/2015
WIDEBAND REQUENCY ANTENNA	SCHWARZBECK	VULB9168	26	08/16/2014	08/15/2015
Loop Antenna	A.H.	SAS-526B	264	05/10/2014	05/09/2015
LISN	R&S	ESH3-Z5	8389791009	07/25/2014	07/24/2015
Radiation Cable 1	Sat	RE1	R003	06/04/2014	06/03/2015
Radiation Cable 2	Sat	RE2	R002	06/04/2014	06/03/2015
Conduction Cable	Sat	CE1	C001	06/04/2014	06/03/2015

Page 9 of 43

	Radiated Emission Test Site 966(2)				
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2015	03/01/2016
EMI TEST RECEIVER	ROHDE&SCHWAR Z	ESCI	100783	03/09/2015	03/08/2016
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/17/2016
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2015	03/17/2016
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2014	07/09/2015
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2015	03/01/2016
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2015	03/01/2016
Loop Antenna	COM-POWER	AL-130	121044	09/27/2014	09/26/2015
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	СТ	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W FARAD		LZ-RF / CCS-SZ-3A2			

	Cond	ducted Emission Tes	t Site		
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWAR Z	ESCI	100783	03/09/2015	03/08/2016
LISN(EUT)	ROHDE&SCHWAR Z	ENV216	101543-WX	03/09/2015	03/08/2016
LISN	EMCO	3825/2	8901-1459	03/09/2015	03/08/2016
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2015	03/03/2016
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

Page 10 of 43

#### 4. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 15.203	Antenna Requirement	Compliant
§15.209 §15.247(d)	Radiated Emission	Compliant
§15.247(d)	Band Edges	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247(b)	Conducted Power	Compliant
§15.247(e)	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.207	Line Conduction Emission	Compliant

#### 5. DESCRIPTION OF TEST MODES

The EUT has been operated in three modulations: GFSK independently.

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Normal Operating (BT)

#### Note:

- 1. All the test modes can be supply by Built-in Li-ion battery, only the result of the worst case was recorded in the report if no any records.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. Eut is operating at its maximum duty cycle>or equal 98%

Page 11 of 43

#### 6. ANTENNA REQUIREMENT

#### **6.1. STANDARD APPLICABLE**

According to FCC 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

#### **6.2. TEST RESULT**

This product has a permanent antenna, fulfill the requirement of this section.

Page 12 of 43

#### 7. RADIATED EMISSION

#### 7.1 MEASUREMENT PROCEDURE


 Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.


Page 13 of 43

#### 7.2 TEST SETUP

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

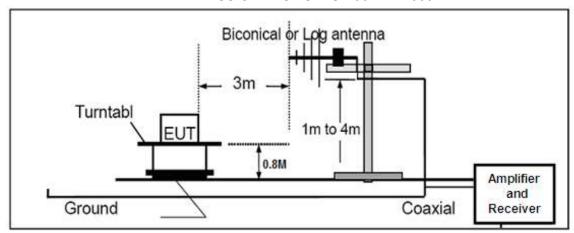

#### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

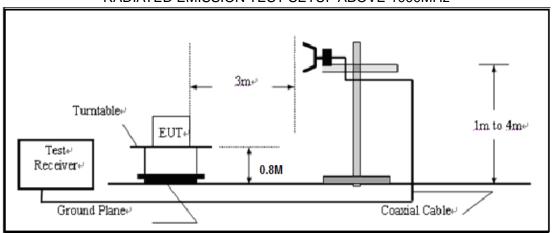

Page 14 of 43

#### 7.3 LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

#### 7.4 TEST RESULT

#### **RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.

Page 15 of 43

#### **RADIATED EMISSION BELOW 1GHZ**

#### RADIATED EMISSION TEST- (30MHZ-1GHZ)


Job No.: 20150422 Probe: Horizontal

Standard: FCC Part15 Class B (30-1000MHz) Tested Distance: 3m
Test item: Radiation Test Power Source: DC 3V

Temp.(C)/Hum.(%RH): 24 (C) / 52 %RH Date: 2015-4-22 Time: 17:45:08

Company: EUT:

Model: Freedom Test By: JIMMY

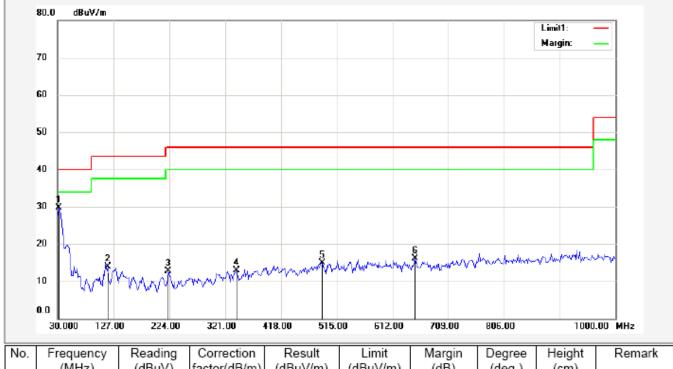

No.	Frequency	Reading	Correction	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(deg.)	(cm)	
1*	31.6167	42.38	-12.61	29.77	40.00	-10.23			peak
2	117.3000	35.17	-21.33	13.84	43.50	-29.66			peak
3	222.3833	33.34	-20.71	12.63	46.00	-33.37			peak
4	340.4000	31.05	-18.13	12.92	46.00	-33.08			peak
5	489.1333	29.24	-14.36	14.88	46.00	-31.12			peak
6	650.8000	28.65	-12.51	16.14	46.00	-29.86			peak

Page 16 of 43


Job No.: 20150422 Probe: Vertical

Standard: FCC Part15 Class B (30-1000MHz) Tested Distance: 3m
Test item: Radiation Test Power Source: DC 3V

Temp.(C)/Hum.(%RH): 24 (C) / 52 %RH Date: 2015-4-22 Time: 17:44:38

Company: EUT:

Model: Freedom Test By: JIMMY

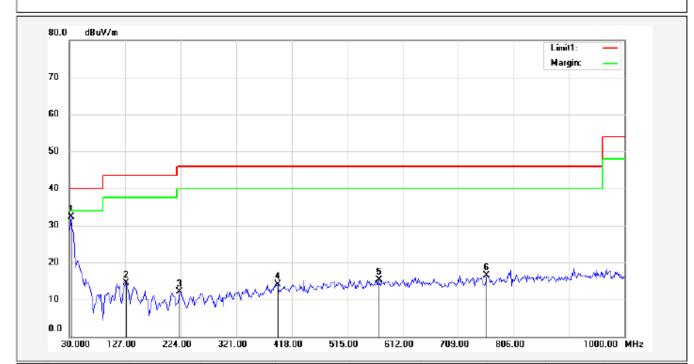

No.	Frequency	Reading	Correction	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(deg.)	(cm)	
1*	33.2333	45.97	-13.64	32.33	40.00	-7.67			peak
2	128.6167	35.22	-20.80	14.42	43.50	-29.08			peak
3	222.3833	32.80	-20.71	12.09	46.00	-33.91			peak
4	393.7500	30.40	-16.30	14.10	46.00	-31.90			peak
5	569.9667	28.25	-13.02	15.23	46.00	-30.77			peak
6	759.1167	27.51	-11.04	16.47	46.00	-29.53			peak

Page 17 of 43


Job No.: 20150422 Probe: Horizontal

Standard: FCC Part15 Class B (30-1000MHz) Tested Distance: 3m
Test item: Radiation Test Power Source: DC 3V

Temp.(C)/Hum.(%RH): 24 (C) / 52 %RH Date: 2015-4-22 Time: 17:45:45

Company: EUT:

Model: Freedom Test By: JIMMY

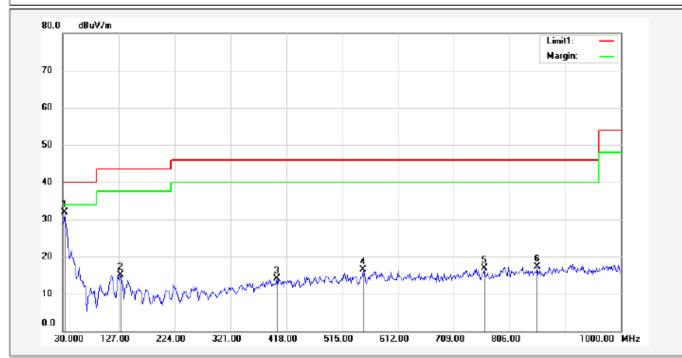

No.	Frequency	Reading	Correction	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(deg.)	(cm)	
1*	33.2333	45.50	-13.64	31.86	40.00	-8.14			peak
2	130.2333	35.79	-20.76	15.03	43.50	-28.47			peak
3	401.8333	30.20	-16.00	14.20	46.00	-31.80			peak
4	552.1833	29.63	-13.13	16.50	46.00	-29.50			peak
5	762.3500	27.93	-11.05	16.88	46.00	-29.12			peak
6	854.5000	27.89	-10.66	17.23	46.00	-28.77			peak

Page 18 of 43


Job No.: 20150422 Probe: Vertical

Standard: FCC Part15 Class B (30-1000MHz) Tested Distance: 3m
Test item: Radiation Test Power Source: DC 3V

Temp.(C)/Hum.(%RH): 24 (C) / 52 %RH Date: 2015-4-22 Time: 17:46:47

Company: EUT:

Model: Freedom Test By: JIMMY

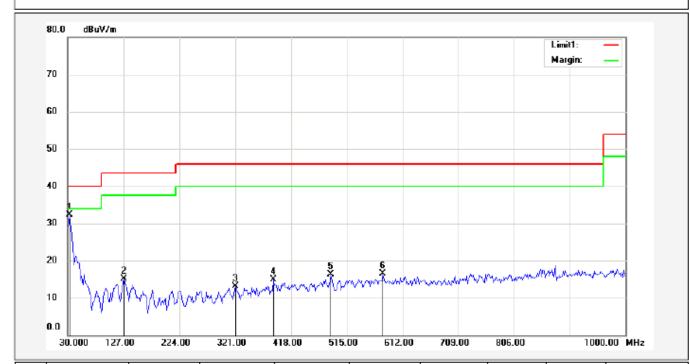

No.	Frequency	Reading	Correction	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(deg.)	(cm)	
1*	33.2333	45.90	-13.64	32.26	40.00	-7.74			peak
2	127.0000	36.07	-20.87	15.20	43.50	-28.30			peak
3	321.0000	32.08	-18.88	13.20	46.00	-32.80			peak
4	387.2833	31.39	-16.44	14.95	46.00	-31.05			peak
5	487.5167	30.61	-14.36	16.25	46.00	-29.75			peak
6	578.0500	29.58	-13.09	16.49	46.00	-29.51			peak

Page 19 of 43

Job No.: 20150422 Probe: Horizontal
Standard: FCC Part15 Class B (30-1000MHz) Tested Distance: 3m

Test item: Radiation Test Power Source: DC 3V

Temp.(C)/Hum.(%RH): 24 (C) / 52 %RH Date: 2015-4-22 Time: 17:48:40

Company: EUT:

Model: Freedom Test By: JIMMY



No.	Frequency	Reading	Correction	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(deg.)	(cm)	
1*	33.2333	45.76	-13.64	32.12	40.00	-7.88			peak
2	128.6167	35.40	-20.80	14.60	43.50	-28.90			peak
3	262.8000	32.48	-20.08	12.40	46.00	-33.60			peak
4	387.2833	30.83	-16.44	14.39	46.00	-31.61			peak
5	534.4000	29.37	-13.62	15.75	46.00	-30.25			peak
6	663.7333	28.70	-12.28	16.42	46.00	-29.58			peak

Page 20 of 43

Job No.: 20150422 Probe: Vertical


Standard: FCC Part15 Class B (30-1000MHz) Tested Distance: 3m
Test item: Radiation Test Power Source: DC 3V

Temp.(C)/Hum.(%RH): 24 (C) / 52 %RH Date: 2015-4-22 Time: 17:47:38

Company: EUT:

Model: Freedom Test By: JIMMY

Test Mode: BT 4.0 2480

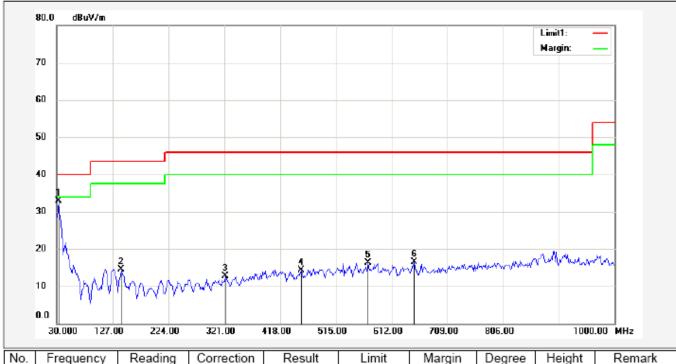

No.	Frequency	Reading	Correction	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(deg.)	(cm)	
1*	33.2333	46.50	-13.64	32.86	40.00	-7.14			peak
2	141.5500	35.82	-21.33	14.49	43.50	-29.01			peak
3	322.6167	31.51	-18.79	12.72	46.00	-33.28			peak
4	455.1833	29.65	-15.31	14.34	46.00	-31.66			peak
5	571.5833	29.27	-13.03	16.24	46.00	-29.76			peak
6	650.8000	28.92	-12.51	16.41	46.00	-29.59			peak

#### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin= Result -Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 21 of 43

#### **RADIATED EMISSION ABOVE 1GHZ**

	•	(ADIAII	ED EINIGGION /	ADOVE IC						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	Comment			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре				
	Low Channel (2402 MHz)									
4804	43.45	10.44	53.89	74	-20.11	Pk	Horizontal			
4804	32.67	10.44	43.11	54	-10.89	AV	Horizontal			
7206	41.26	12.39	53.65	74	-20.35	pk	Horizontal			
7206	31.47	12.39	43.86	54	-10.14	AV	Horizontal			
4804	41.28	10.4	51.68	74	-22.32	Pk	Vertical			
4804	29.17	10.4	39.57	54	-14.43	AV	Vertical			
7206	31.23	12.75	43.98	74	-30.02	Pk	Vertical			
7206	25.27	12.75	38.02	54	-15.98	AV	Vertical			
		1	Mid Channel (2440	) MHz)						
4880	43.54	10.4	53.94	74	-20.06	Pk	Horizontal			
4880	32.68	10.4	43.08	54	-10.92	AV	Horizontal			
7320	41.79	12.75	54.54	74	-19.46	Pk	Horizontal			
7320	32.46	12.75	45.21	54	-8.79	AV	Horizontal			
4880	45.16	10.39	55.55	74	-18.45	Pk	Vertical			
4880	32.19	10.44	42.63	54	-11.37	AV	Vertical			
7320	32.57	12.68	45.25	74	-28.75	Pk	Vertical			
7320	32.62	12.68	45.3	54	-8.7	AV	Vertical			
		H	ligh Channel (248	0 MHz)						
4960	36.17	10.39	46.56	74	-27.44	pk	Horizontal			
4960	25.95	10.39	36.34	54	-17.66	AV	Horizontal			
7440	42.56	12.68	55.24	74	-18.76	pk	Horizontal			
7440	31.48	12.68	44.16	54	-9.84	AV	Horizontal			
4960	36.28	10.39	46.67	74	-27.33	pk	Vertical			
4960	34.24	10.39	44.63	54	-9.37	AV	Vertical			
7440	44.16	12.68	56.84	74	-17.16	pk	Vertical			
7440	25.37	12.68	38.05	54	-15.95	AV	Vertical			

#### **RESULT: PASS**

Note: 1~25GHz scan with GFSK. No recording in the test report at least have 20dB margin.

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Emission - Leve Limit

Page 22 of 43

#### 8. BAND EDGE EMISSION

#### **8.1. MEASUREMENT PROCEDURE**

1)Radiated restricted band edge measurements


The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting

- 2)Conducted Emissions at the bang edge
  - a)The transmitter output was connected to the spectrum analyzer
  - b)Set RBW=100kHz,VBW=300kHz
  - c)Suitable frequency span including 100kHz bandwidth from band edge

#### 8.2. TEST SET-UP

Radiated same as 6.2

Conducted set up



Page 23 of 43

#### 8.3. Radiated Test Result

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	Comment				
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре					
	Low Channel (2402 MHz)										
2399.9	77.45	-13	64.45	74	-9.55	peak	Horizontal				
2399.9	55.61	-13	42.61	54	-11.39	AVG	Horizontal				
2400	78.82	-12.99	65.83	74	-8.17	peak	Horizontal				
2400	56.42	-12.99	43.43	54	-10.57	AVG	Horizontal				
2399.9	77.16	-12.97	64.19	74	-9.81	peak	Vertical				
2399.9	55.18	-12.97	42.21	54	-11.79	AVG	Vertical				
2400	78.34	-12.94	65.4	74	-8.6	peak	Vertical				
2400	56.29	-12.94	43.35	54	-10.65	AVG	Vertical				
			High Channe	l (2480 MHz)							
2483.5	78.75	-12.78	65.97	74	-8.03	peak	Horizontal				
2483.5	56.81	-12.78	44.03	54	-9.97	AVG	Horizontal				
2483.6	78.61	-12.77	65.84	74	-8.16	peak	Horizontal				
2483.6	55.38	-12.77	42.61	54	-11.39	AVG	Horizontal				
2483.5	78.73	-12.76	65.97	74	-8.03	peak	Vertical				
2483.5	56.21	-12.76	43.45	54	-10.55	AVG	Vertical				
2483.6	78.39	-12.72	65.67	74	-8.33	peak	Vertical				
2483.6	55.86	-12.72	43.14	54	-10.86	AVG	Vertical				

#### **RESULT: PASS**

Note: Factor=Antenna Factor + Cable loss - Amplifier gain,

Emission Level = Meter Reading + Factor

Margin= Emission Level -Limit.


The "Factor" value can be calculated automatically by software of measurement system.

Page 24 of 43

#### 8.4. Conducted Test Result

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	LCH	-4.14	-61.034	-24.14	PASS
BLE	HCH	-3.33	-58.947	-23.33	PASS

#### **Test Graph**

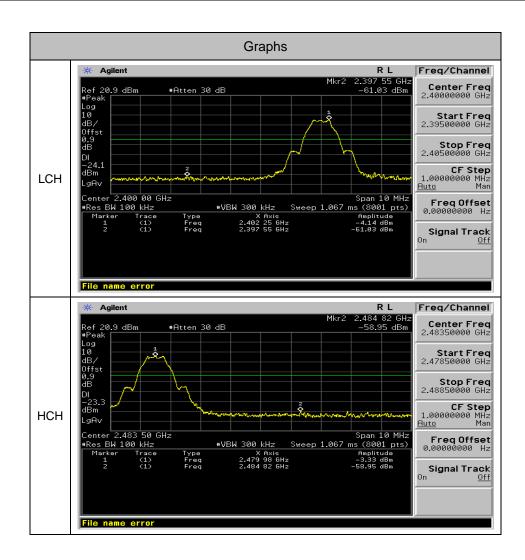

Page 25 of 43

#### 9. 6DB BANDWIDTH

#### 9.1. TEST EQUIPMENT LIST AND DETAILS

Equipment	Manufacturer	Model	Cal. Date	Cal. Due
PSA SERIES SPECTRUM ANALYZER	AGILENT	E4440A	02/17/2014	02/16/2015
WIDEBAND REQUENCY ANTENNA	SCHWARZBECK	VULB9168	08/16/2014	08/15/2015


#### 9.2. TEST PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW≥RBW.
- 4. Set SPA Trace 1 Max hold, then View.


#### 9.3. SUMMARY OF TEST RESULTS/PLOTS

Mode	Channel	6dB Bandwidth [MHz]	OBW[MHz]	Verdict
BLE	LCH	0.6627	1.0164	PASS
BLE	MCH	0.7182	1.0302	PASS
BLE	HCH	0.6704	1.0380	PASS

#### **Test Graph**

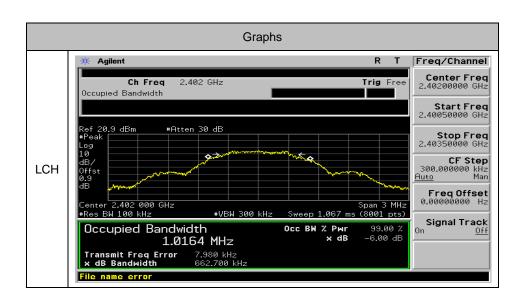

Page 26 of 43

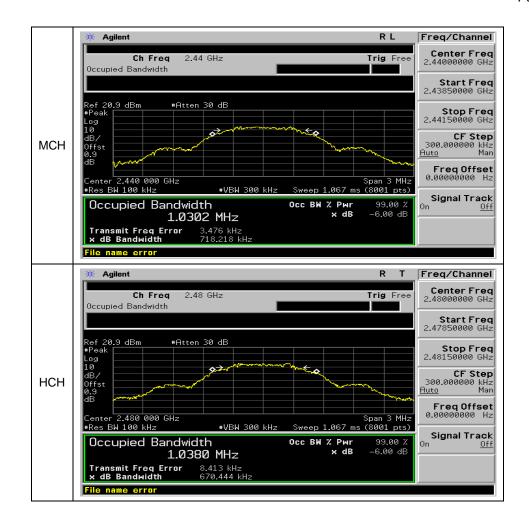

Page 27 of 43

#### 10. CONDUCTED OUTPUT POWER

#### 10.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
- 3. Use the following spectrum analyzer settings:

Set the RBW ≥ DTS bandwidth

Set the VBW ≥ 3 x RBW

Set the span  $\geq$  3 x RBW

Detector = peak


Sweep time = auto couple

Trace mode = max hold

- 4. Allow the trace to stabilize. Use peak marker function to determine the peak amplitude level
- 5. Record the result form the Spectrum Analyzer.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

#### 10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

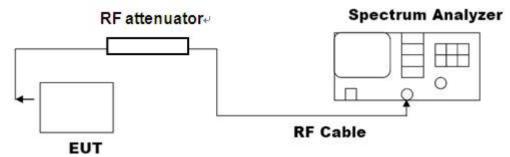


#### 10.3. LIMITS AND MEASUREMENT RESULT

Channel	Peak Power (dBm)	Applicable Limits (dBm)	Pass/Fail
Low Channel	-2.96	20	Pass
Middle Channel	-2.81	20	Pass
High Channel	-2.97	20	Pass


Page 28 of 43

The Low Channel Result



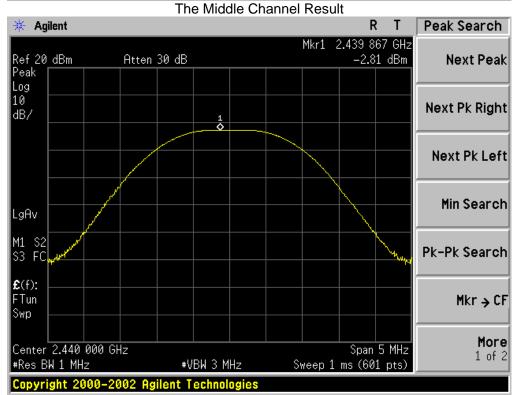

Page 29 of 43

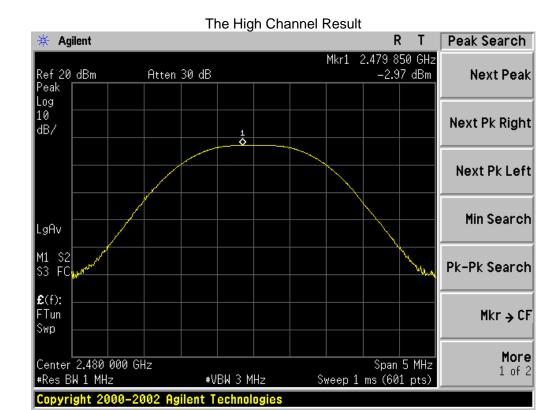


Page 30 of 43

# 11. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY 11.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

#### 11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

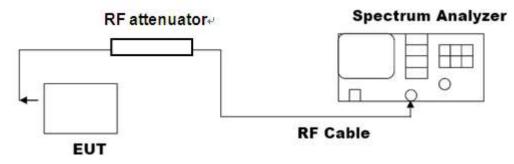

#### 11.3 MEASUREMENT EQUIPMENT USED


Equipment	Manufacturer	Model	Cal. Date	Cal. Due	
PSA SERIES SPECTRUM ANALYZER	AGILENT	E4440A	02/17/2014	02/16/2015	
WIDEBAND REQUENCY ANTENNA	SCHWARZBECK	VULB9168	08/16/2014	08/15/2015	

#### 11.4 LIMITS AND MEASUREMENT RESULT

Mode	Channel	PSD [dBm/10kHz]	Limit[dBm/3kHz]	Verdict
BLE	LCH	-13.64	8	PASS
BLE	MCH	-12.97	8	PASS
BLE	HCH	-12.64	8	PASS

Page 31 of 43

#### **Test Graph**

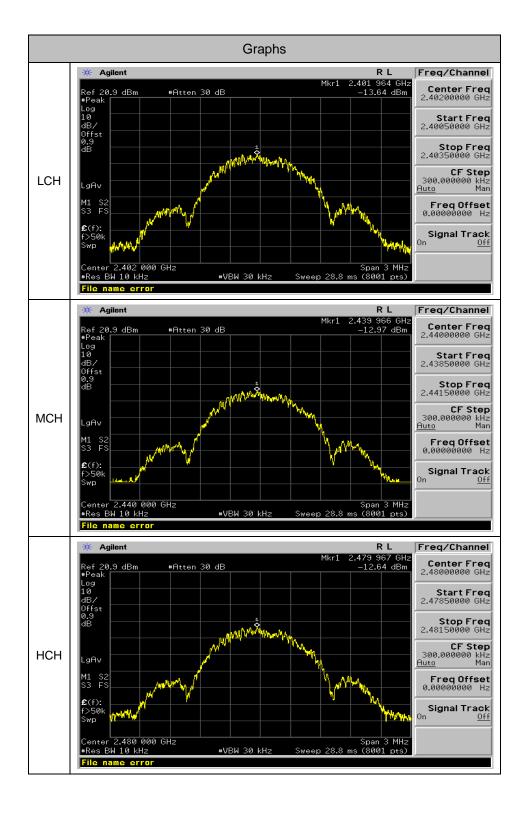

Page 32 of 43


#### 12. FCC LINE CONDUCTED EMISSION TEST

#### **12.1 LIMITS**

Fraguenov	Maximum RF Line Voltage					
Frequency	Q.P.( dBuV)	Average( dBuV)				
150kHz~500kHz	66-56	56-46				
500kHz~5MHz	56	46				
5MHz~30MHz	60	50				

<sup>\*\*</sup>Note: 1. The lower limit shall apply at the transition frequency.

#### **12.2 TEST SETUP**

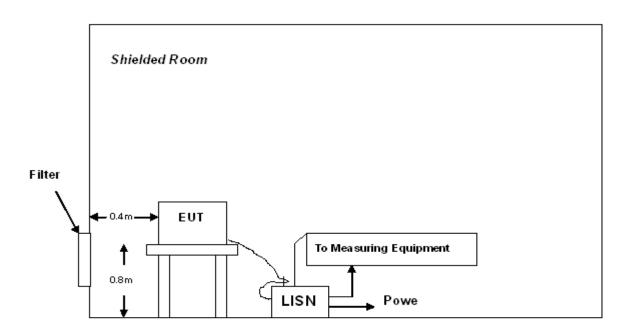

A: Powered through filter

<sup>2.</sup> The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

Page 33 of 43

#### 12.3 PRELIMINARY PROCEDURE

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT received power by adapter which received power by a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test. Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

#### **12.4 FINAL TEST PROCEDURE**

- 10) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 11) 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 12) 3) The test data of the worst case condition(s) was reported on the Summary Data page.

Page 34 of 43

#### 12.5 TEST RESULT OF POWER LINE

#### Line Conducted Emission Test Line 1-L

Job No.: 20150422 Date: 2015-4-22 Company: Time: 18:16:50


Standard: FCC Class B Conduction(QP) Temp.(C)/Hum.(%): 26(C) / 60 %

Test item: Conduction Test EUT:

Line: L1 Test Voltage AC 120V/60Hz

Model: Freedom Test By :

Description: Normal Operating(BT4.0)

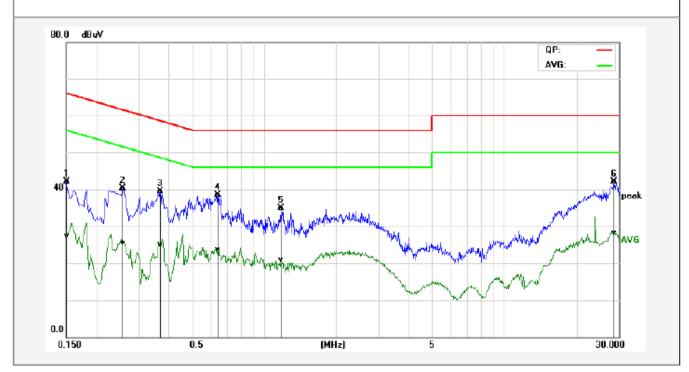

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBu∨)	(dBuV)	(dBuV)	(dB)	(dB)	
1P	0.1500	32.42	17.67	9.58	42.00	27.25	65.99	56.00	-23.99	-28.75	Pass
2P	0.2580	30.70	15.77	9.69	40.39	25.46	61.49	51.50	-21.10	-26.04	Pass
3P	0.3700	29.80	15.44	9.68	39.48	25.12	58.50	48.50	-19.02	-23.38	Pass
4*	0.6419	28.66	13.97	9.76	38.42	23.73	56.00	46.00	-17.58	-22.27	Pass
5P	1.1780	25.11	11.12	9.71	34.82	20.83	56.00	46.00	-21.18	-25.17	Pass
6P	28.6220	32.05	18.06	9.97	42.02	28.03	60.00	50.00	-17.98	-21.97	Pass

26(C) / 60 %

Page 35 of 43

#### Line Conducted Emission Test Line 1-N

Job No.: 20150422 Date: 2015-4-22 Company: Time: 18:12:38


Standard: FCC Class B Conduction(QP) Temp.(C)/Hum.(%):

Test item: Conduction Test EUT:

Line: N Test Voltage AC 120V/60Hz

Model: Freedom Test By :

Description: Normal Operating(BT4.0)

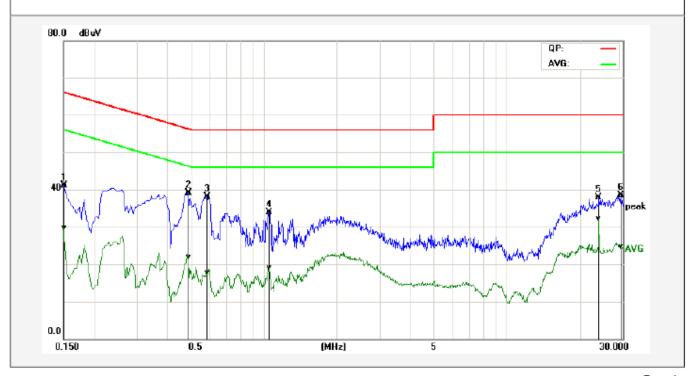

No.	Frequency	QuasiPeak	_			_		_			Remark
		reading	reading	factor	result	result	limit	lim it	m argin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1P	0.1500	31.36	19.92	9.78	41.14	29.70	65.99	56.00	-24.85	-26.30	Pass
_	0.4900	29.46	12.16	9.68	39.14	21.84	56.17	46.17	-17.03	-24.33	Pass
3P	0.5860	28.36	8.10	9.68	38.04	17.78	56.00	46.00	-17.96	-28.22	Pass
4P	1.0540	24.04	9.36	9.80	33.84	19.16	56.00	46.00	-22.16	-26.84	Pass
5P	23.9980	28.15	22.51	9.78	37.93	32.29	60.00	50.00	-22.07	-17.71	Pass
6P	29.3980	28.66	14.81	9.89	38.55	24.70	60.00	50.00	-21.45	-25.30	Pass


Page 36 of 43

## **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

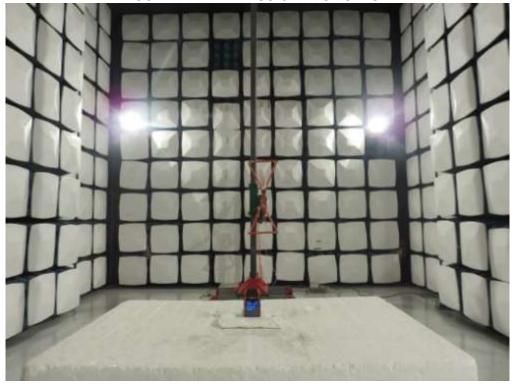

Page 37 of 43

### **APPENDIX B: PHOTOGRAPHS OF EUT**

TOTAL VIEW OF EUT



TOP VIEW OF EUT



Page 38 of 43

**BOTTOM VIEW OF EUT** 



FRONT VIEW OF EUT



Page 39 of 43





LEFT VIEW OF EUT



Page 40 of 43






**OPEN VIEW OF EUT-1** 




Page 41 of 43

**OPEN VIEW OF EUT-2** 

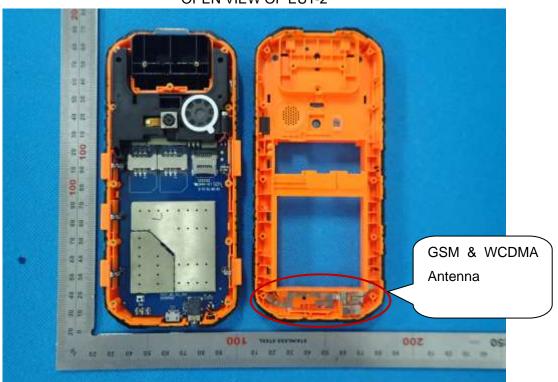

#### **OPEN VIEW OF EUT-3**

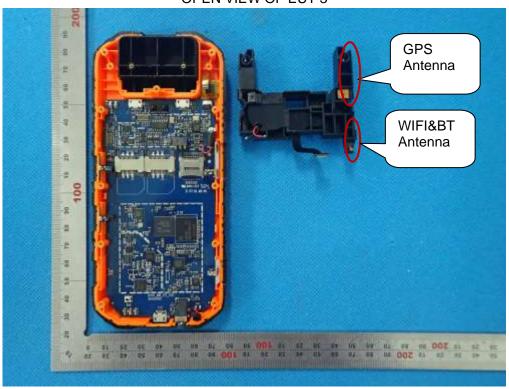


Page 42 of 43

**OPEN VIEW OF EUT-4** 




INTERNAL VIEW OF EUT-1

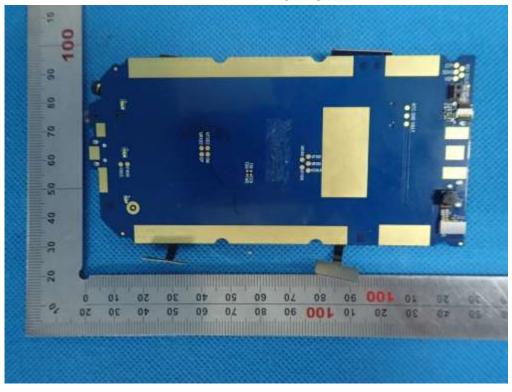

Page 43 of 43



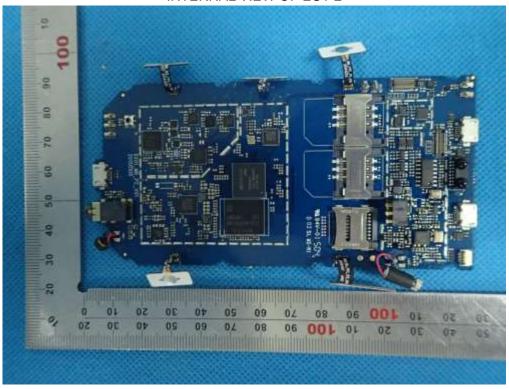

----END OF REPORT----