



Appendix B

Detailed Test Results

1. GSM
GSM850 for Head& Body
GSM1900 for Head& Body
2. WCDMA
WCDMA Band II for Head& Body
WCDMA Band V for Head& Body
3. LTE
LTE Band 2 for Head& Body
LTE Band 4 for Head& Body
LTE Band 5 for Head& Body
LTE Band 7 for Head& Body





Date:2025/4/17

Test Laboratory: LCS-SAR Lab
GSM 850 128CH Right Cheek

DUT: MOBILE PHONE; Type: NOVA; Serial: A250324019-1

Communication System: UID 0, GSM (0); Frequency: 824.2 MHz;Duty Cycle: 1: 1
Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 41.176$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.526 W/kg

Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.493 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 0.473 W/kg
SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.153 W/kg

Maximum value of SAR (measured) = 0.514W/kg

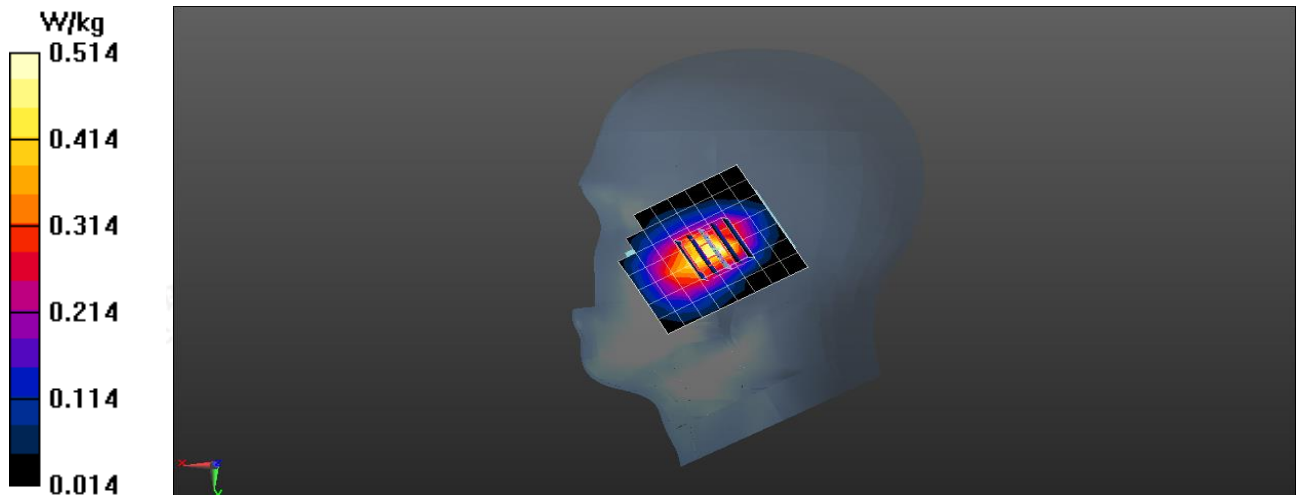



Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

GSM 850 GPRS 3TX 190CH Rear side 5mm**DUT: MOBILE PHONE; Type: NOVA; Serial: A250324019-1**

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1: 2.77

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.889 \text{ S/m}$; $\epsilon_r = 41.194$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.796 W/kg



Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.59 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.517 W/kg

SAR(1 g) = 0.483 W/kg; SAR(10 g) = 0.257 W/kg

Maximum value of SAR (measured) = 0.785 W/kg

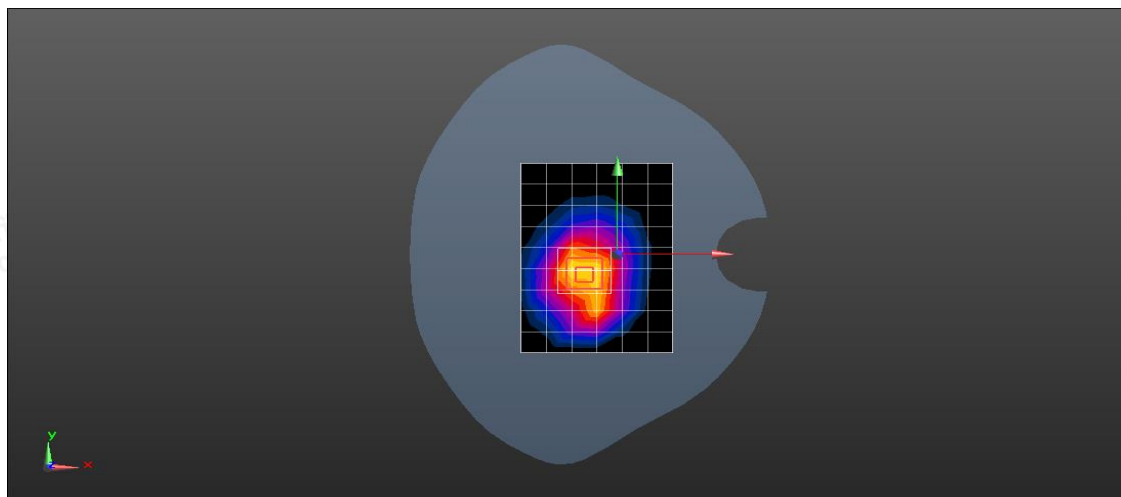

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/4/19

Test Laboratory: LCS-SAR Lab
GSM 1900 661CH Right Cheek

DUT: MOBILE PHONE; Type: NOVA; Serial: A250324019-1

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1: 1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.436$ S/m; $\epsilon_r = 40.263$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.373 W/kg



Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.673 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.362 W/kg

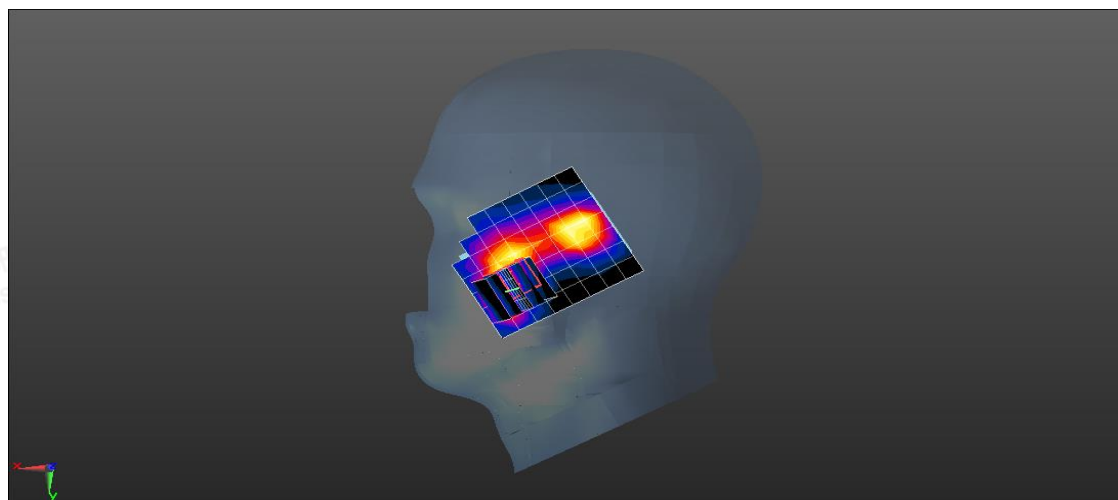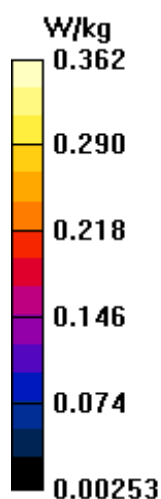



Date: 2025/4/19

Test Laboratory: LCS-SAR Lab

GSM 1900 GPRS 3TX 661CH Rear side 5mm**DUT: MOBILE PHONE; Type: NOVA; Serial: A250324019-1**

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1: 2.77

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.436$ S/m; $\epsilon_r = 40.263$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.651 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.427 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.425 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.636 W/kg

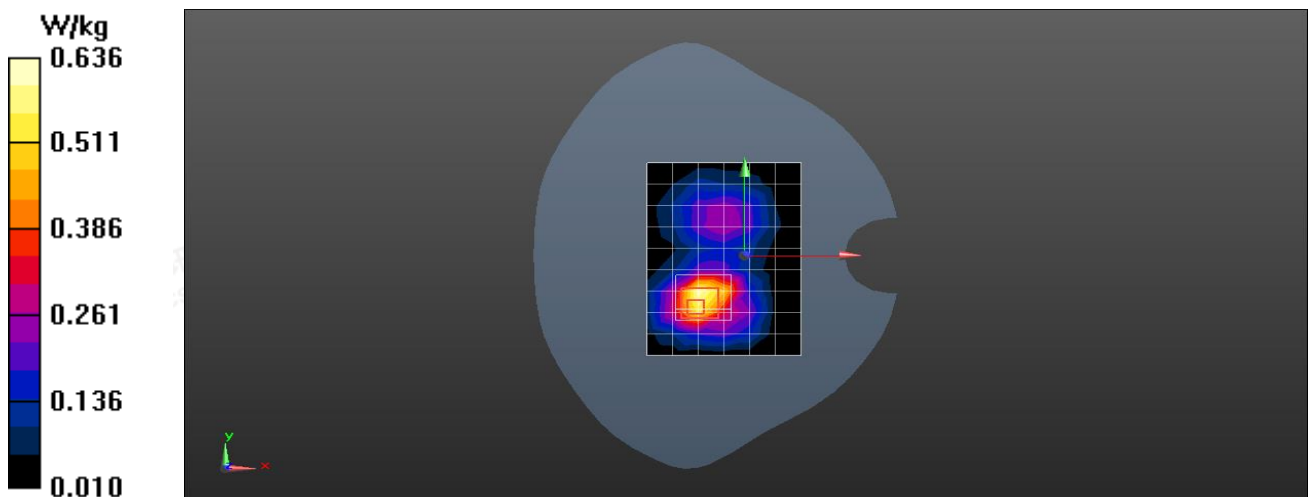



Date: 2025/4/19

Test Laboratory: LCS-SAR Lab

WCDMA II RMC 9538CH Right Cheek**DUT: MOBILE PHONE; Type: NOVA; Serial: A250324019-1**

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.343$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.318 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.253 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.323 W/kg

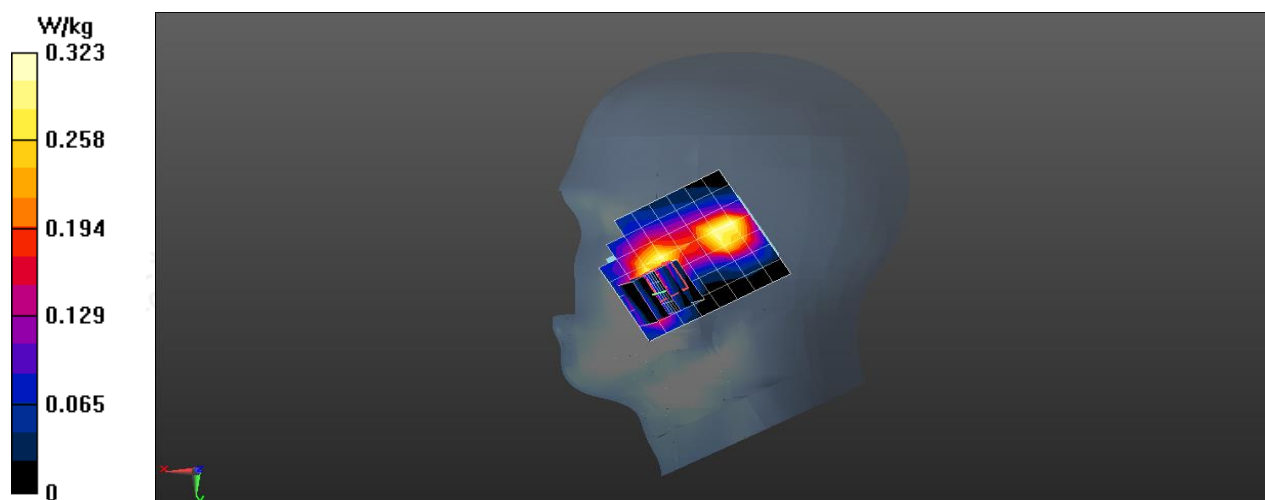



Date: 2025/4/19

Test Laboratory: LCS-SAR Lab

WCDMA II RMC 9538CH Rear side 5mm**DUT: MOBILE PHONE; Type: NOVA; Serial: A250324019-1**

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.343$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.438 W/kg



Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.276 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.427 W/kg

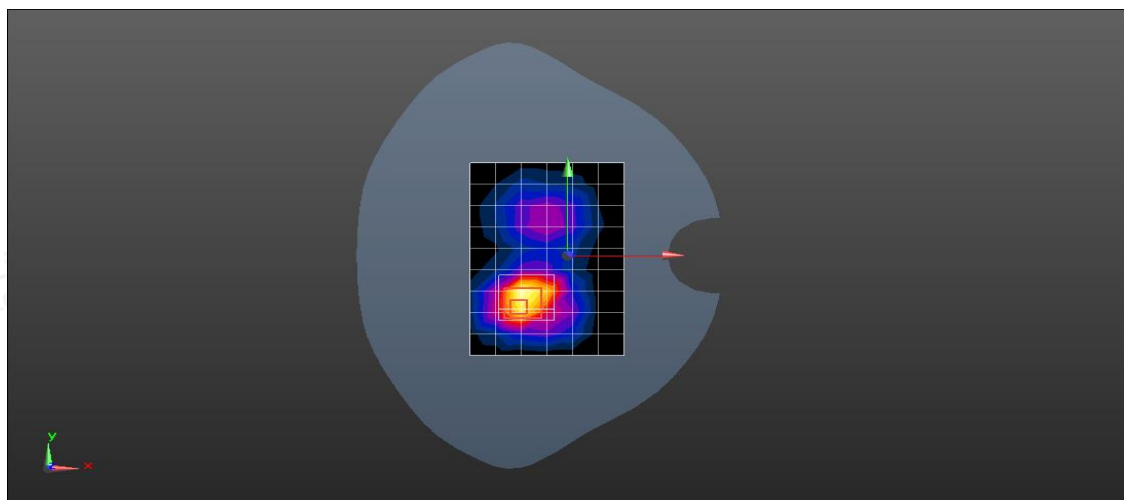

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

WCDMA V RMC 4233CH Right Cheek**DUT: MOBILE PHONE; Type: NOVA; Serial: A250324019-1**

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 41.762$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.506 W/kg



Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.634 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 0.510 W/kg

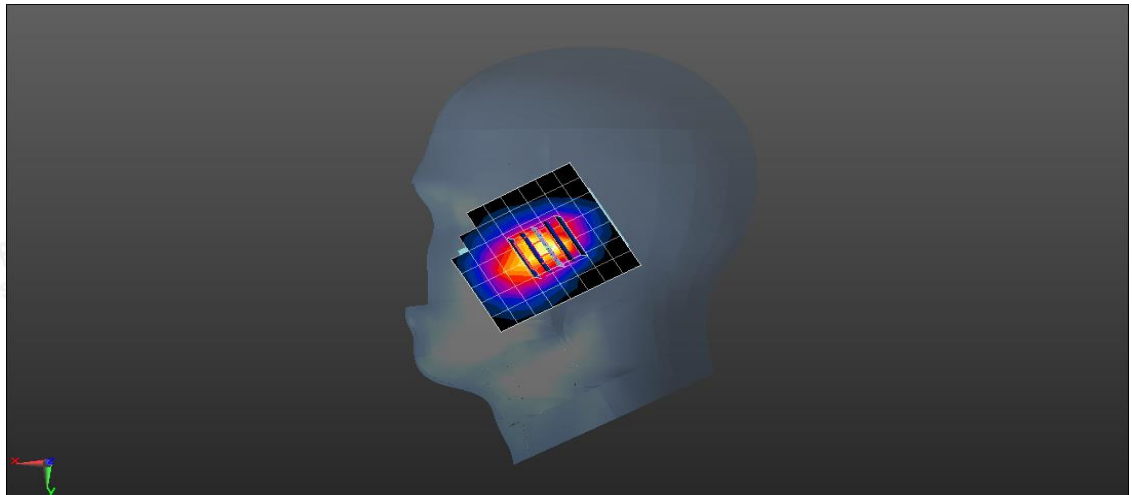



Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

WCDMA V RMC 4233CH Rear side 5mm**DUT: MOBILE PHONE; Type: NOVA; Serial: A250324019-1**

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 41.762$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.698 W/kg



Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.32 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.536 W/kg

SAR(1 g) = 0.474 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 0.708 W/kg

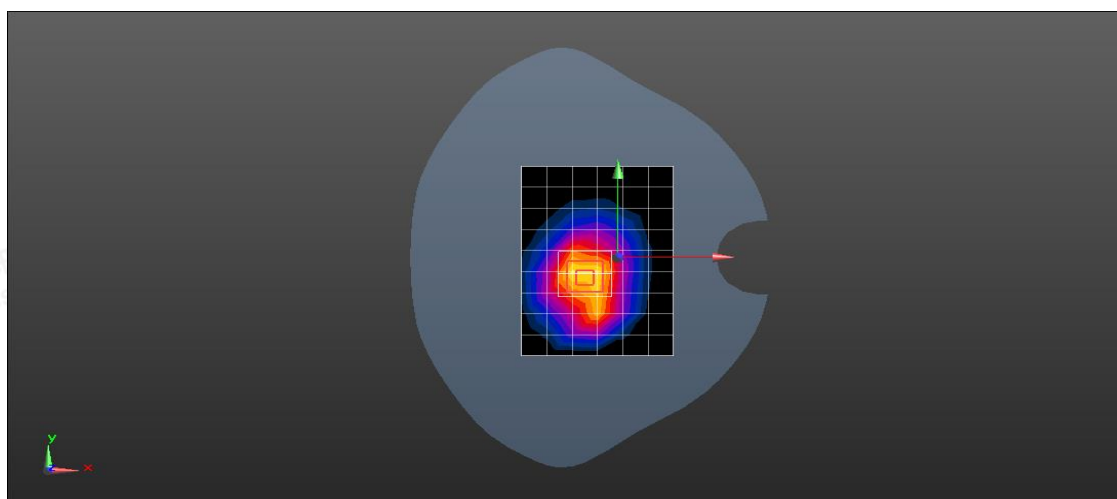

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/4/19

Test Laboratory: LCS-SAR Lab

LTE B2 20M QPSK 19100CH 1RB49 Right Cheek**DUT: MOBILE PHONE; Type: NOVA; Serial: A250324019-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.428$ S/m; $\epsilon_r = 40.143$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.263 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.638 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.277 W/kg

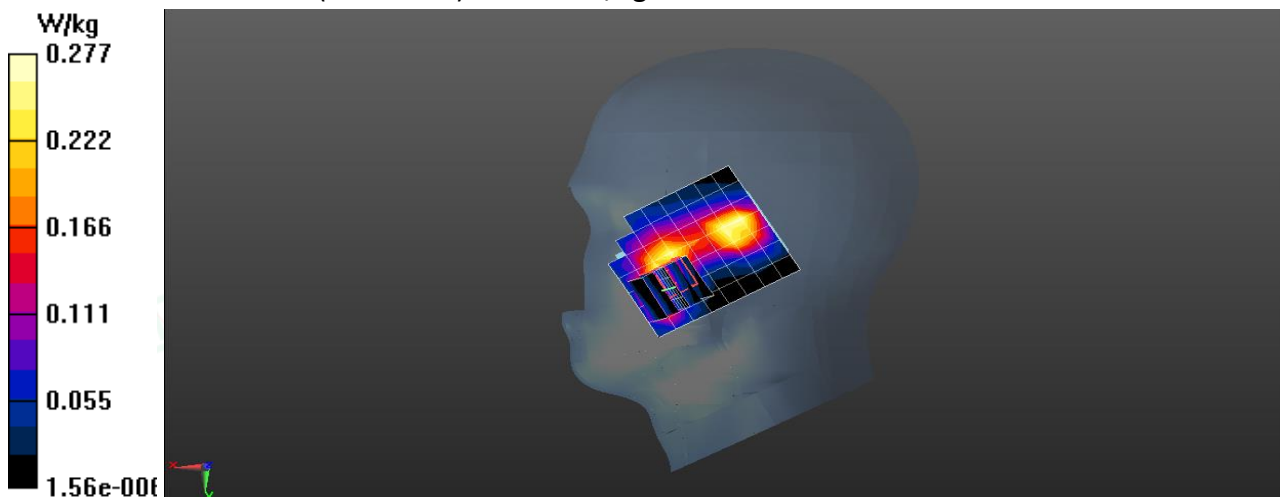

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/4/19

Test Laboratory: LCS-SAR Lab

LTE B2 20M QPSK 19100CH 1RB49 Rear side 5mm

DUT: MOBILE PHONE; Type: NOVA; Serial: A250324019-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.428$ S/m; $\epsilon_r = 40.143$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.462 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.943 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.439 W/kg

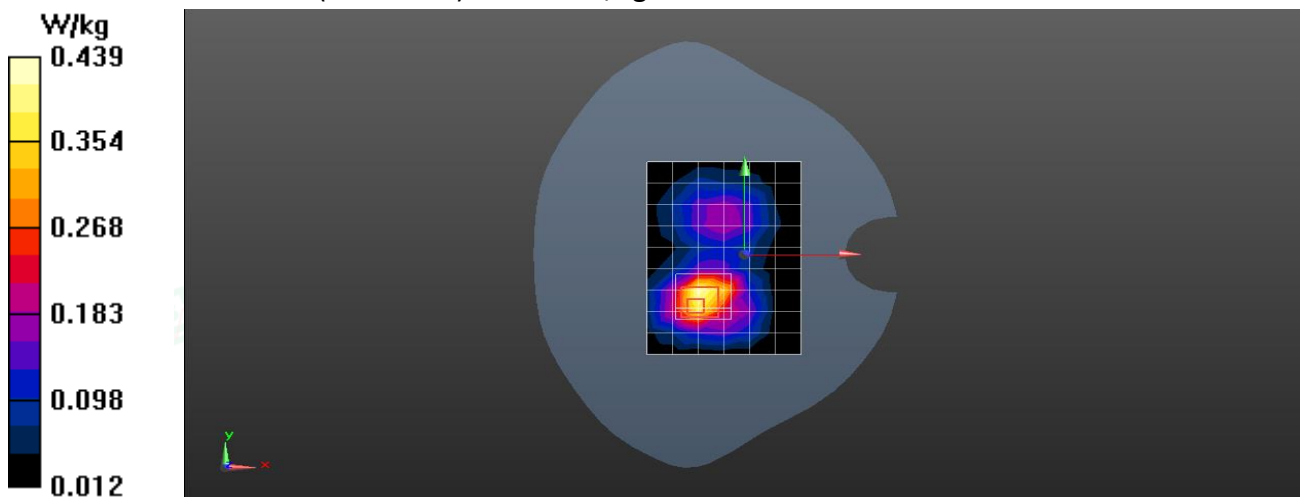

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/4/18

Test Laboratory: LCS-SAR Lab

LTE B4 20M QPSK 20300CH 1RB99 Right Cheek

DUT: MOBILE PHONE; Type: NOVA; Serial: A250324019-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.834$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.703W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.231 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.433 W/kg

SAR(1 g) = 0.388 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.695 W/kg

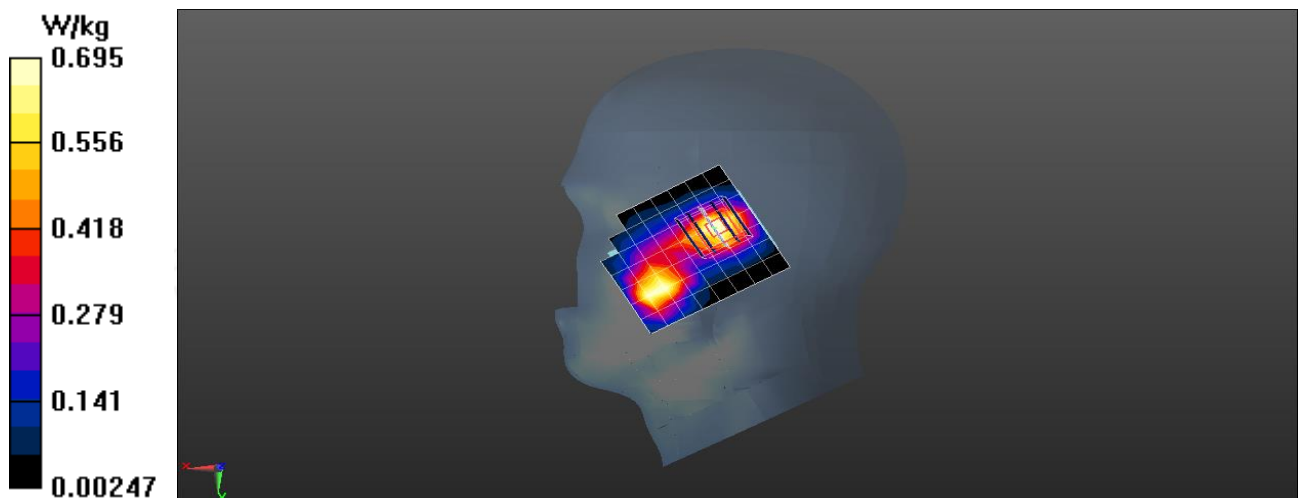

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/4/18

Test Laboratory: LCS-SAR Lab

LTE B4 20M QPSK 20300CH 1RB99 Rear side 5mm

DUT: MOBILE PHONE; Type: NOVA; Serial: A250324019-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.834$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.693 W/kg



Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.64 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.431 W/kg; SAR(10 g) = 0.243 W/kg

Maximum value of SAR (measured) = 0.687 W/kg

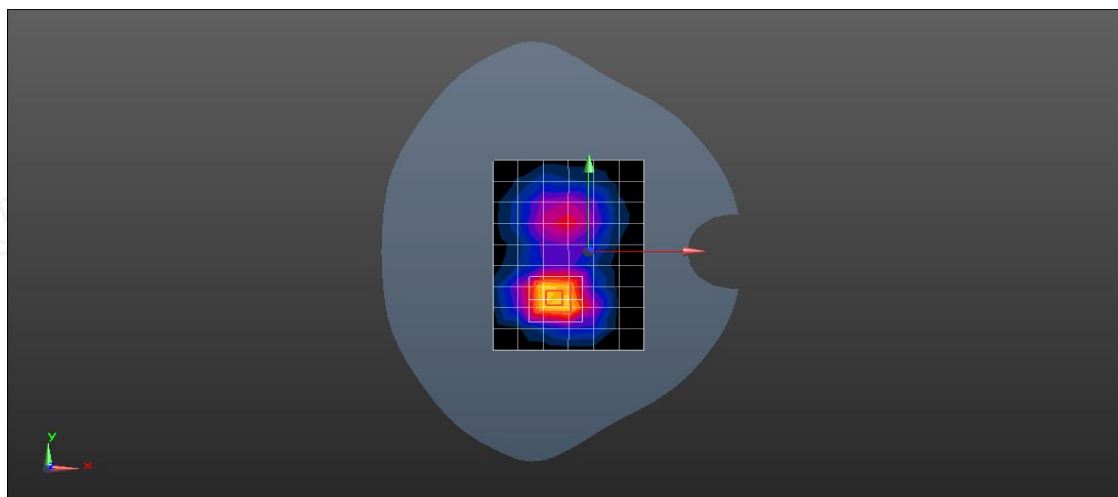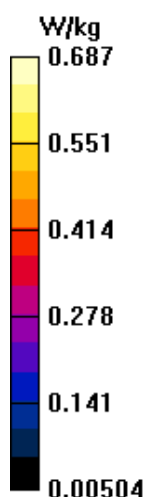



Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

LTE B5 10M QPSK 20525CH 1RB0 Right Cheek**DUT: MOBILE PHONE; Type: NOVA; Serial: A250324019-1**

Communication System: UID 0, LTE-TDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.437$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.524 W/kg

Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.547 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.343 W/kg
SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.571W/kg

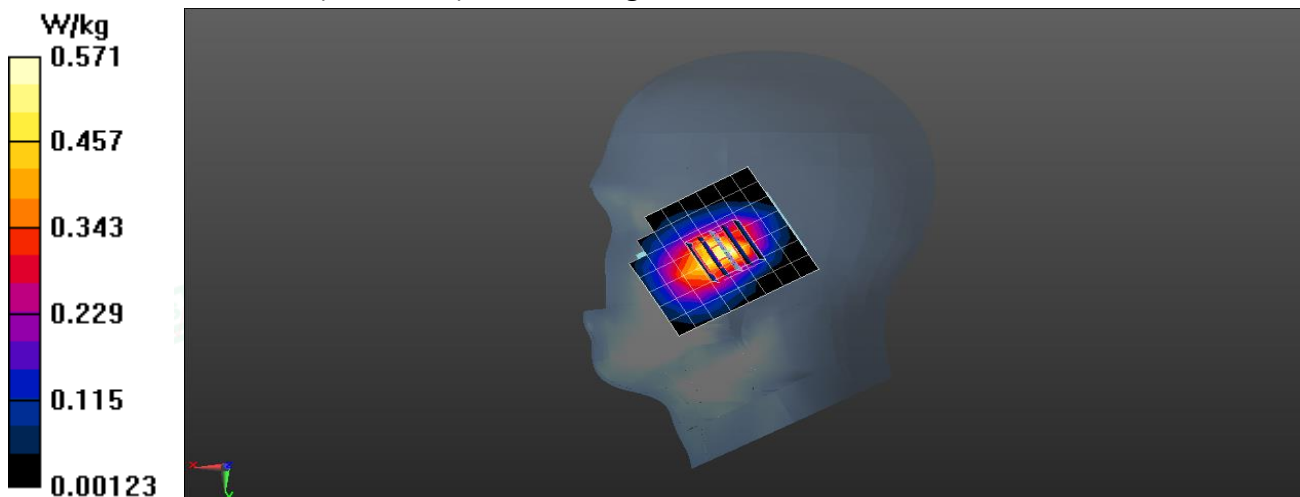



Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

LTE B5 10M QPSK 20600CH 1RB0 Rear side 5mm

DUT: MOBILE PHONE; Type: NOVA; Serial: A250324019-1


Communication System: UID 0, LTE-TDD (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.903 \text{ S/m}$; $\epsilon_r = 41.443$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

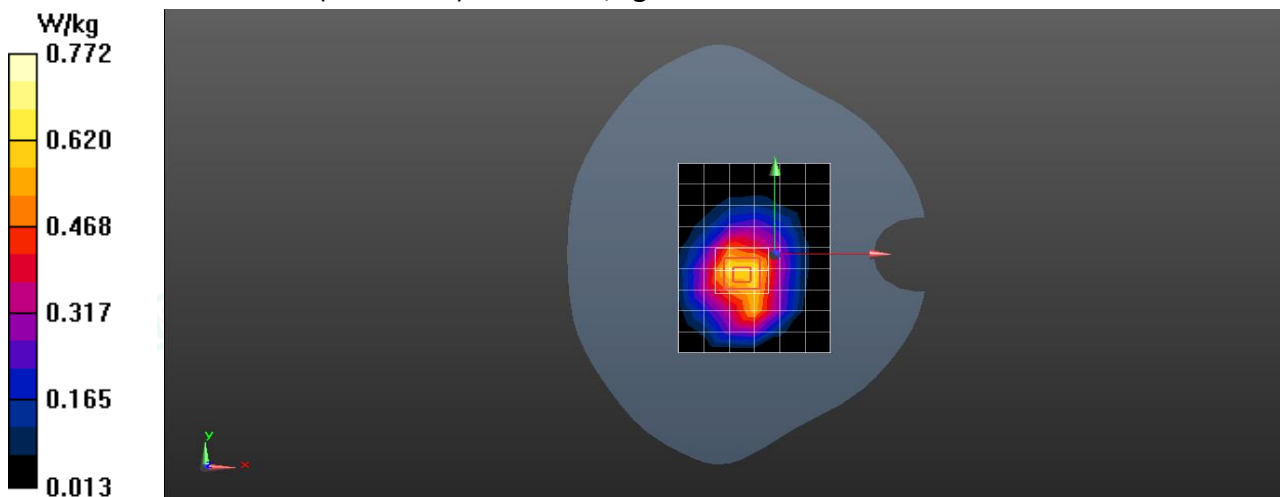Configuration/ Body /Area Scan (10x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.724 W/kg **Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.972 V/m ; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.418 W/kg **SAR(1 g) = 0.452 W/kg ; SAR(10 g) = 0.239 W/kg** Maximum value of SAR (measured) = 0.772 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/4/19

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 21100CH 1RB49 Right Cheek

DUT: MOBILE PHONE; Type: NOVA; Serial: A250324019-1

Communication System: UID 0, LTE-FDD (0); Frequency: 2535.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535.5$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 38.804$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.687W/kg



Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.537 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.174W/kg

Maximum value of SAR (measured) = 0.672 W/kg

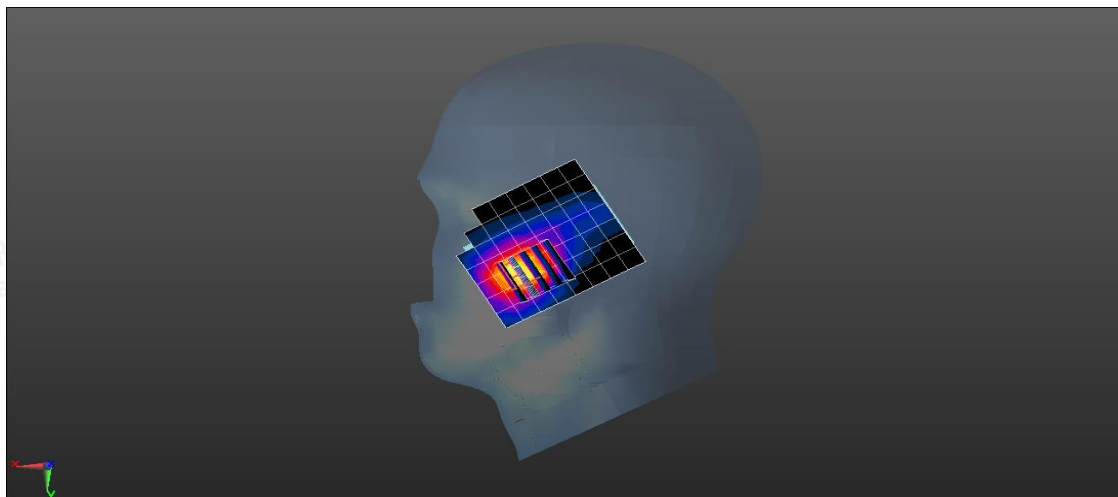

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/4/19

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 21100CH 1RB49 Rear side 5mm

DUT: MOBILE PHONE; Type: NOVA; Serial: A250324019-1

Communication System: UID 0, LTE-FDD (0); Frequency: 2535.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535.5$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 38.804$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.823 W/kg



Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value =12.48 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.605 W/kg

SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.297 W/kg

Maximum value of SAR (measured) = 0.878W/kg

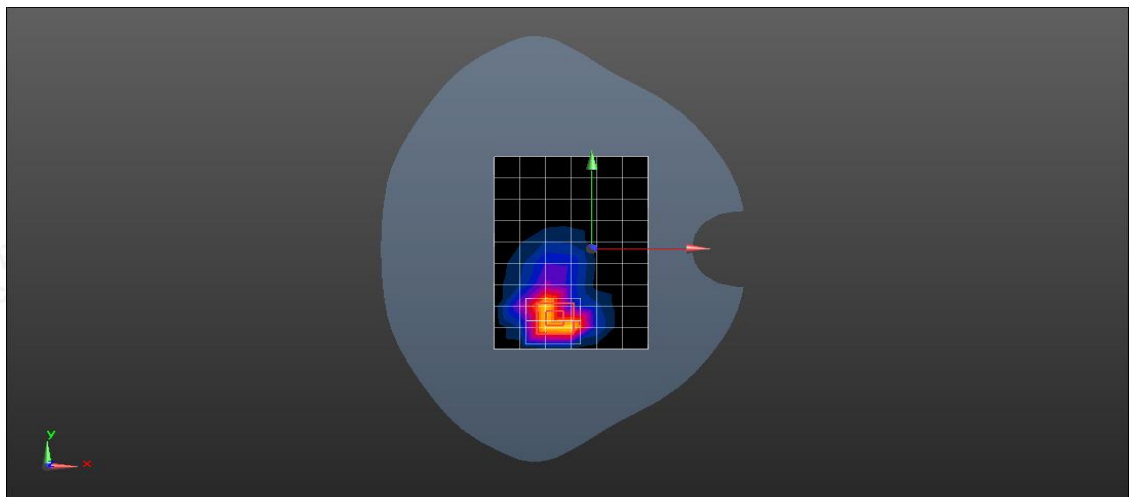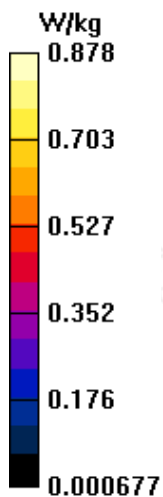

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity