

TEST REPORT

FCC ID: 2AEJATORO

Product: MOBILE PHONE

Model No.: TORO

Additional Model No.: N/A

Trade Mark: RAYO MOVIL

Report No.: WSCT-A2LA-R&E220900005A-15B

Issued Date: 13 October 2022

Issued for:

GSM GLOBE.COM INC

8180 NW 36 Street Suite 317 Doral FL 33166.

Issued By:

World Standardization Certification & Testing Group(Shenzhen) Co.,Ltd.

Building A-B, Baoshi Science & Technology Park, Baoshi Road,
Bao'an District, Shenzhen, Guangdong, China

TEL: +86-755-26996192

FAX: +86-755-86376605



Note: The results contained in this report pertain only to the tested sample. This report shall not be reproduced, except in full, without written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This report must not be used by the client to claim product certification, approval, or any agency of the U.S. Government.



世标检测认证股份

World Standardization Certification & Testing Group (Shenzhen) Co.,Ltd.

ADD:Building A-B Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL:86-755-26996192 26992306 FAX:86-755-86376605 E-mail:Fengbing.Wang@wsct-cert.com Http://www.wsct-cert.com

**BLE OF CONTENTS**

1. Test Certification	3
2. Test Result Summary	4
3. TEST METHODOLOGY	5
4. MEASUREMENT INSTRUMENTS	6
5. Facilities and Accreditations	7
5.1. FACILITIES	7
5.2. ACCREDITATIONS	7
5.3. MEASUREMENT UNCERTAINTY	8
6. EMC EMISSION TEST	9
6.1. CONDUCTED EMISSION MEASUREMENT	9
6.2. RADIATED EMISSION MEASUREMENT	13





Report No.: WSCT-A2LA-R&E220900005A-15B

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

1. Test Certification

Product:	MOBILE PHONE
Model No.:	TORO
Additional Model No.:	N/A
Applicant:	GSM GLOBE.COM INC
Address:	8180 NW 36 Street Suite 317 Doral FL 33166.
Manufacturer:	GSM GLOBE.COM INC
Address:	8180 NW 36 Street Suite 317 Doral FL 33166.
Date of Test:	23 August 2022 to 13 October 2022
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart B

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen) Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Wang Xiang

(Wang Xiang)

Checked By:

Qin Shuiquan

(Qin Shuiquan)

Approved By:

Wang Fengbing

(Wang Fengbing)

Date: 13 October 2022

世标检测认证股份
有限公司ADD: Building A-B Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL: 86-755-26996192 26992306 FAX: 86-755-86370605 E-mail: Fengbing.Wang@wsct-cert.com [Http://www.wsct-cert.com](http://www.wsct-cert.com)

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.



Report No.: WSCT-A2LA-R&E220900005A-15B

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

2. Test Result Summary

Requirement	CFR 47 Section	Result
CONDUCTED EMISSION	§15.107	PASS
RADIATED EMISSION	§15.109	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

世标检筹认证股份
World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.ADD:Building A-B Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL:86-755-26996192 26992306 FAX:86-755-86376605 E-mail:Fengbing.Wang@wsct-cert.com [Http://www.wsct-cert.com](http://www.wsct-cert.com)



Report No.: WSCT-A2LA-R&E220900005A-15B

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

3. TEST METHODOLOGY

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Video Recording
Model 2	Video Playing
Mode 3	Transferring with USB Disk (the worst case)
Mode 4	TF Card Playing
Mode 5	FM



世标检测试认股份

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

ADD:Building A-B Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL:86-755-26996192 26992306 FAX:86-755-86376605 E-mail:Fengbing.Wang@wsct-cert.com [Http://www.wsct-cert.com](http://www.wsct-cert.com)



Report No.: WSCT-A2LA-R&E220900005A-15B

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

4. MEASUREMENT INSTRUMENTS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibrated	Calibrated until
Test software	--	EZ-EMC	CON-03A	--	--
ESCI Test Receiver	R&S	ESCI	100005	11/05/2021	11/04/2022
LISN	AFJ	LS16	16010222119	11/05/2021	11/04/2022
LISN(EUT)	Mestec	AN3016	04/10040	11/05/2021	11/04/2022
pre-amplifier	CDSI	PAP-1G18-38	--	11/05/2021	11/04/2022
System Controller	WCT	SC100	-	11/05/2021	11/04/2022
Bi-log Antenna	Chase	CBL6111C	2576	11/05/2021	11/04/2022
Spectrum analyzer	R&S	FSU26	200409	11/05/2021	11/04/2022
Horn Antenna	SCHWARZBECK	9120D	1141	11/05/2021	11/04/2022
Bi-log Antenna	SCHWAREBECK	VULB9163	9163/340	11/05/2021	11/04/2022
Pre Amplifier	H.P.	HP8447E	2945A02715	11/05/2021	11/04/2022
9*6*6 Anechoic	--	--	--	11/05/2021	11/04/2022



世标检测试验股份

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

ADD:Building A-B Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL:86-755-26996192 26992306 FAX:86-755-86376605 E-mail:Fengbing.Wang@wsct-cert.com [Http://www.wsct-cert.com](http://www.wsct-cert.com)



Report No.: WSCT-A2LA-R&E220900005A-15B

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

5. Facilities and Accreditations

5.1. Facilities

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China** of the **WORLD STANDARDIZATION CERTIFICATION & TESTING GROUP (SHENZHEN) CO., LTD.**

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2. ACCREDITATIONS

China National Accreditation Service for Conformity Assessment (CNAS)

Registration number NO: L3732

American Association for Laboratory Accreditation(A2LA)

Registration NO : 5768.01

Copies of granted accreditation certificates are available for downloading from our web site,
<http://www.wsct-cert.com>



世标检测认证股份

ADD:Building A-B Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL:86-755-26996192 26992306 FAX:86-755-86376605 E-mail:Fengbing.Wang@wsct-cert.com [Http://www.wsct-cert.com](http://www.wsct-cert.com)

World Standardization Certification & Testing Group (Shenzhen) Co.,Ltd



Report No.: WSCT-A2LA-R&E220900005A-15B

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

5.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1GHz)	$\pm 4.7\text{dB}$
5	All emissions, radiated(>1GHz)	$\pm 4.7\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2.0\%$



世标检测试验股份

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

ADD:Building A-B Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL:86-755-26996192 26992306 FAX:86-755-86376605 E-mail:Fengbing.Wang@wsct-cert.com [Http://www.wsct-cert.com](http://www.wsct-cert.com)



Report No.: WSCT-A2LA-R&E220900005A-15B

Certificate #5768.01

6. EMC EMISSION TEST

6.1. CONDUCTED EMISSION MEASUREMENT

6.1.1. POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz



世标检测试认股份

ADD:Building A-B Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL:86-755-26996192 26992306 FAX:86-755-86376605 E-mail:Fengbing.Wang@wsct-cert.com Http://www.wsct-cert.com

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd



Report No.: WSCT-A2LA-R&E220900005A-15B


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

TEST SETUP

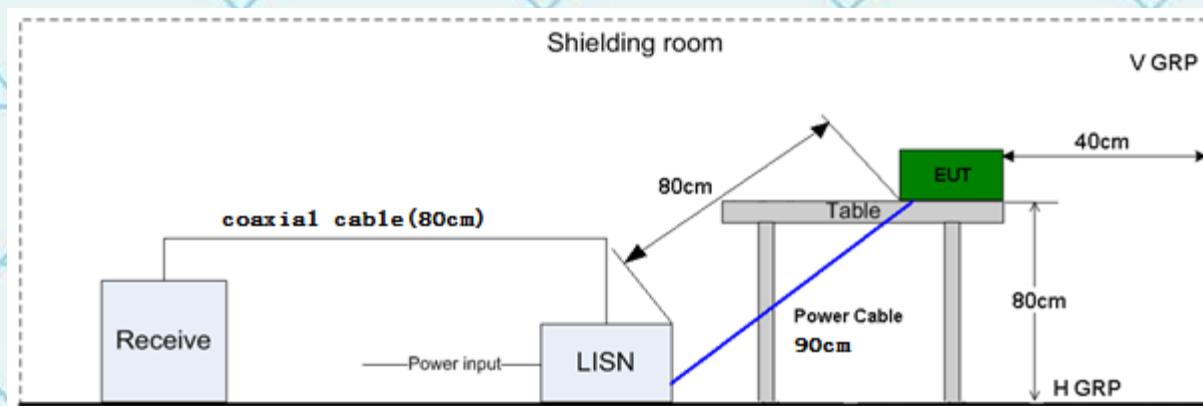

世标检筹认证股份

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.


ADD:Building A-B Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL:86-755-26996192 26992306 FAX:86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com [Http://www.wsct-cert.com](http://www.wsct-cert.com)



6.1.2. Test Results

Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 3(the worst case)

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

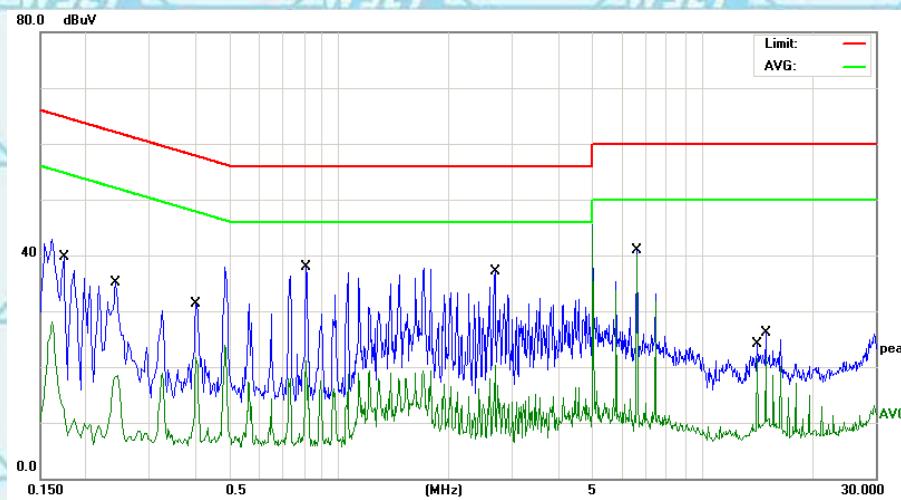

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	0.1740	29.37	10.41	39.78	64.76	-24.98	QP
2	0.2460	8.03	10.42	18.45	51.89	-33.44	AVG
3	0.4020	20.79	10.45	31.24	57.81	-26.57	QP
4	0.4020	11.30	10.45	21.75	47.81	-26.06	AVG
5	0.8100	27.32	10.49	37.81	56.00	-18.19	QP
6	0.8100	10.53	10.49	21.02	46.00	-24.98	AVG
7	2.6820	26.53	10.67	37.20	56.00	-18.80	QP
8	2.6820	9.72	10.67	20.39	46.00	-25.61	AVG
9	6.6060	30.12	10.72	40.84	60.00	-19.16	QP
10 *	6.6060	29.44	10.72	40.16	50.00	-9.84	AVG
11	14.1980	10.50	11.02	21.52	50.00	-28.48	AVG
12	14.9140	15.04	11.06	26.10	60.00	-33.90	QP

Note:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)Limit (dB μ V) = Limit stated in standardMargin (dB) = Measurement (dB μ V) - Limits (dB μ V)

Q.P. = Quasi-Peak


AVG = average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz





Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

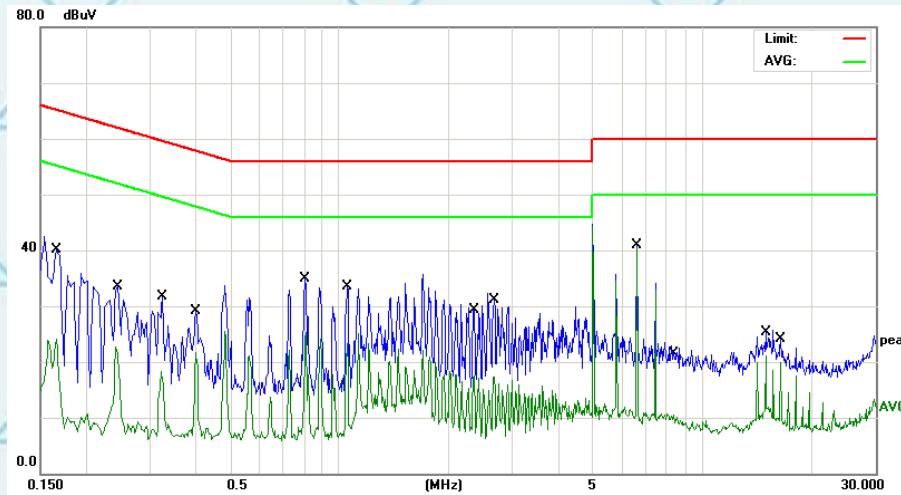

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dB μ V	dB	dB μ V	dB	Detector	
1	0.1660	29.73	10.41	40.14	65.15	-25.01	QP	
2	0.2420	12.19	10.42	22.61	52.02	-29.41	AVG	
3	0.3260	21.28	10.44	31.72	59.55	-27.83	QP	
4	0.4020	11.33	10.45	21.78	47.81	-26.03	AVG	
5	0.8100	14.87	10.49	25.36	46.00	-20.64	AVG	
6	1.0540	23.03	10.52	33.55	56.00	-22.45	QP	
7	2.3460	6.82	10.66	17.48	46.00	-28.52	AVG	
8	2.6660	20.43	10.67	31.10	56.00	-24.90	QP	
9	*	6.6100	30.13	10.72	40.85	60.00	-19.15	QP
10	8.3580	-0.25	10.76	10.51	50.00	-39.49	AVG	
11	14.9220	10.01	11.06	21.07	50.00	-28.93	AVG	
12	16.4780	12.96	11.06	24.02	60.00	-35.98	QP	

Note1:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)Limit (dB μ V) = Limit stated in standardMargin (dB) = Measurement (dB μ V) – Limits (dB μ V)

Q.P. = Quasi-Peak AVG = average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.





Report No.: WSCT-A2LA-R&E220900005A-15B

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

6.2.RADIATED EMISSION MEASUREMENT

6.2.1. Radiated Emission Limits

The field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



世标检测试验股份

ADD:Building A-B Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL:86-755-26996192 26992306 FAX:86-755-86376605 E-mail:Fengbing.Wang@wsct-cert.com [Http://www.wsct-cert.com](http://www.wsct-cert.com)

World Standardization Certification & Testing Group (Shenzhen) Co.,Ltd



Report No.: WSCT-A2LA-R&E220900005A-15B

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.



世标检测试验股份

ADD:Building A-B Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL:86-755-26996192 26992306 FAX:86-755-86376605 E-mail:Fengbing.Wang@wsct-cert.com [Http://www.wsct-cert.com](http://www.wsct-cert.com)




Report No.: WSCT-A2LA-R&E220900005A-15B

Certificate #5768.01


For Question,
Please Contact with WSCT
www.wsct-cert.com

TEST SETUP

(A) Radiated Emission Test-Up Frequency 30MHz~1GHz

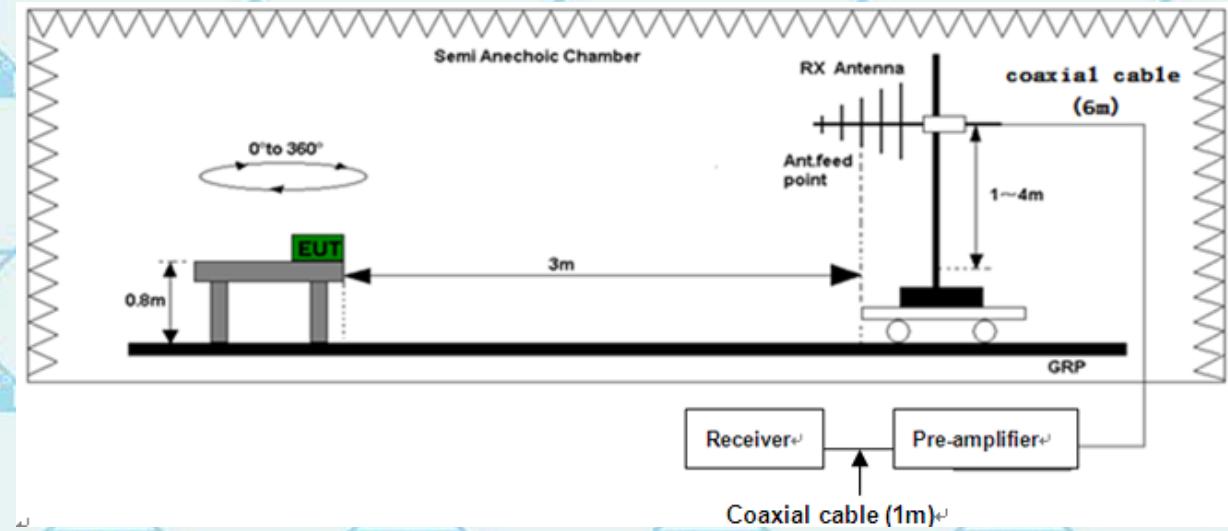

(B) Radiated Emission Test-Up Frequency Above 1GHz

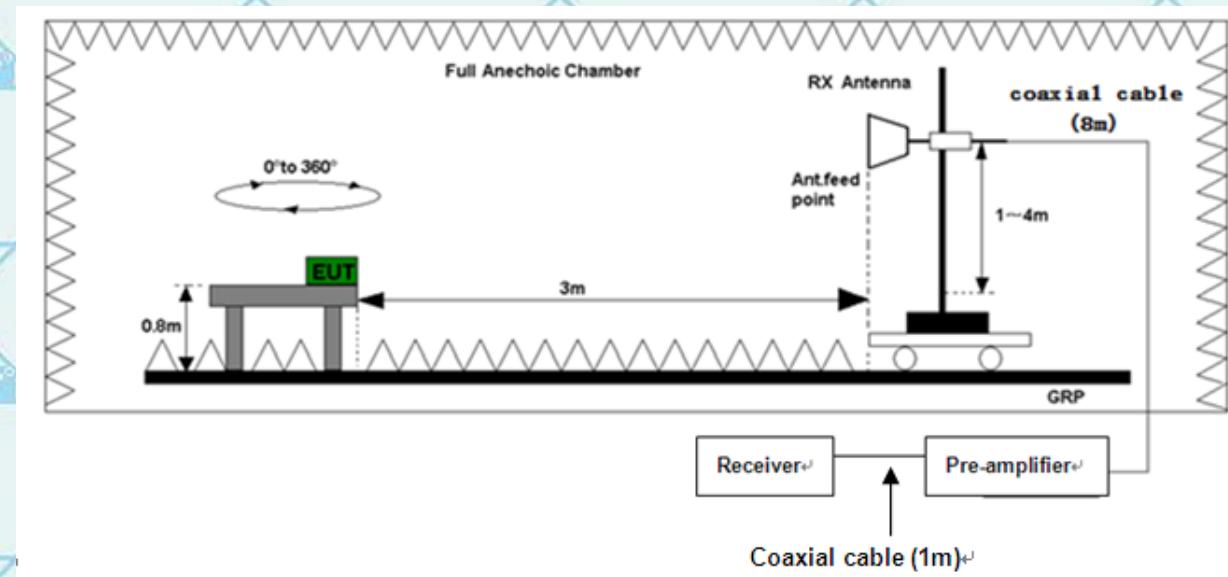



Report No.: WSCT-A2LA-R&E220900005A-15B

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com


6.2.2. Test Results

Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 3(the worst case)

Please refer to following diagram for individual

Below 1GHz

Horizontal:

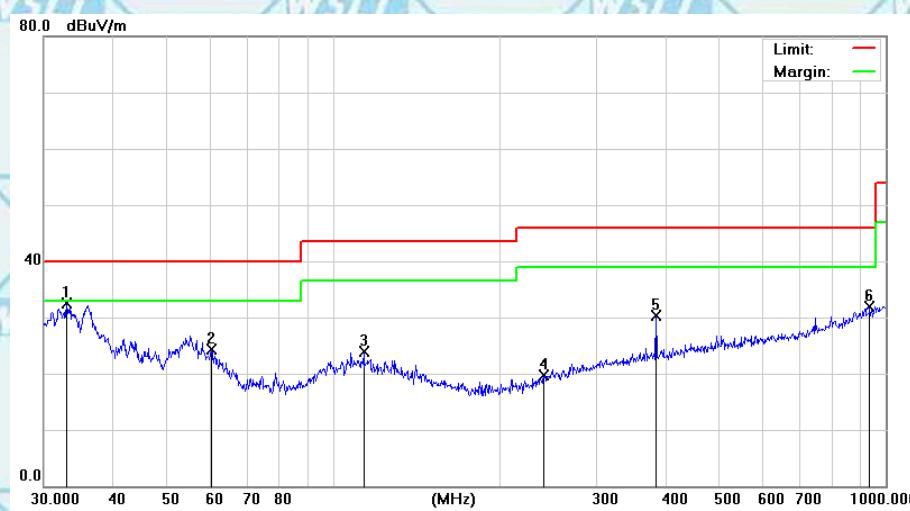

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	*	32.9791	28.83	3.65	32.48	40.00	-7.52	QP
2		60.2801	30.56	-6.23	24.33	40.00	-15.67	QP
3		113.7143	26.20	-2.23	23.97	43.50	-19.53	QP
4		240.8304	24.80	-5.15	19.65	46.00	-26.35	QP
5		383.9318	31.56	-1.16	30.40	46.00	-15.60	QP
6		935.5463	25.71	6.17	31.88	46.00	-14.12	QP



世标检测试验股份

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

ADD:Building A-B Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China

TEL:86-755-26996192 26992306 FAX:86-755-86376605 E-mail:Fengbing.Wang@wsct-cert.com [Http://www.wsct-cert.com](http://www.wsct-cert.com)




Report No.: WSCT-A2LA-R&E220900005A-15B

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Vertical:

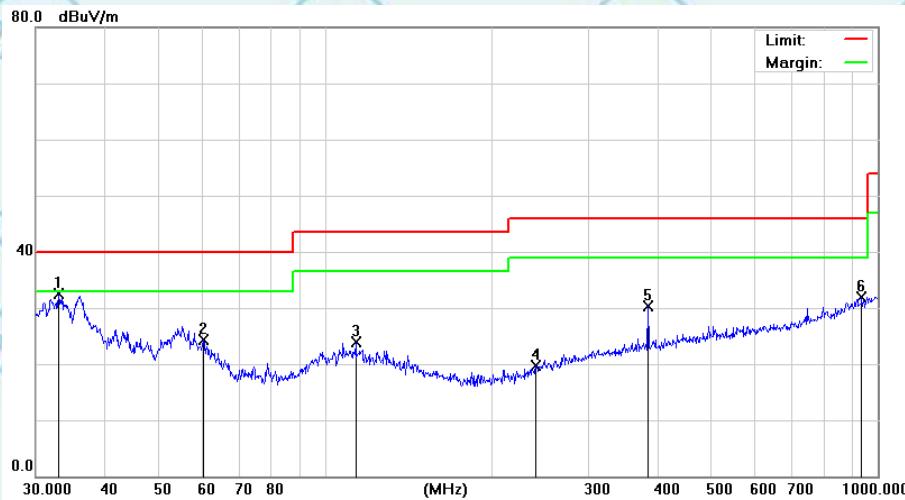

No.	Mk.	Freq.	Reading	Correct Factor	Measure-	Limit	Over	
			Level		ment			
		MHz	dB μ V	dB	dBuV/m	dBuV/m	dB	Detector
1	*	32.9791	28.83	3.65	32.48	40.00	-7.52	QP
2		60.2801	30.56	-6.23	24.33	40.00	-15.67	QP
3		113.7143	26.20	-2.23	23.97	43.50	-19.53	QP
4		240.8304	24.80	-5.15	19.65	46.00	-26.35	QP
5		383.9318	31.56	-1.16	30.40	46.00	-15.60	QP
6		935.5463	25.71	6.17	31.88	46.00	-14.12	QP

Note:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)Limit (dB μ V) = Limit stated in standardMargin (dB) = Measurement (dB μ V) – Limits (dB μ V)

世标检测认证股份

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

ADD: Building A-B Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL: 86-755-26996192 26992306 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com [Http://www.wsct-cert.com](http://www.wsct-cert.com)



Report No.: WSCT-A2LA-R&E220900005A-15B

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com**TEST RESULTS**

Above 1GHz(1~26GHz) :(Mode 3—worst case)

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		H/V	PK	AV	PK	AV	PK
1479.42	V	60.66	40.86	74	54	-13.34	-13.14
2239.27	V	58.75	40.27	74	54	-15.25	-13.73
1478.06	H	58.21	39.01	74	54	-15.79	-14.99
2242.39	H	59.00	40.00	74	54	-15.00	-14.00

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Freq. = Emission frequency in MHz

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

*******END OF REPORT*******世标检认证股份
World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.ADD:Building A-B Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL:86-755-26996192 26992306 FAX:86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com [Http://www.wsct-cert.com](http://www.wsct-cert.com)