**CETECOMTM****CETECOM ICT Services**
consulting - testing - certification >>>

TEST REPORT

Test report no.: 1-0585/15-01-10

Deutsche
Akkreditierungsstelle
D-PL-12076-01-00

Testing laboratory

CETECOM ICT Services GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.cetecom.com>e-mail: ict@cetecom.com**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-00

Applicant

Neratec Solutions AG

Rosswiesstrasse 29

8608 Bubikon / SWITZERLAND

Phone: +41 55 253 2078

Fax: +41 55 253 20 70

Contact: Michael Aeschbacher

e-mail: michael.aeschbacher@neratec.com

Phone: +41 55 253 20 73

Manufacturer

Neratec Solutions AG

Rosswiesstrasse 29

8608 Bubikon / SWITZERLAND

Test standard/s

47 CFR Part 15

Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 247 Issue 1

Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices

RSS - Gen Issue 4

Spectrum Management and Telecommunications Radio Standards Specifications - General Requirements and Information for the Certification of Radio Apparatus

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: WLAN modem**Model name:** DT50RF MK2**FCC ID:** 2AEJD-103902-DT50RF**IC:** 9301A-103902DT50

UNII bands

Frequency: 5150 MHz to 5250 MHz; 5250 MHz to 5350 MHz;
5470 MHz to 5725 MHz and 5725 MHz to 5850 MHz**Technology tested:** WLAN (OFDM/a-; n HT20- & n HT40-mode)**Antenna:** External Sencity® Spot-S antenna with 3 ports**Power supply:** 3.3 V DC by external power supply**Temperature range:** -40°C to +85°C

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

Andreas Luckenbill
Lab Manager
Radio Communications & EMC

Test performed:

Marco Bertolino
Lab Manager
Radio Communications & EMC

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
3	Test standard/s and references	3
4	Test environment	5
5	Test item	5
5.1	General description	5
5.2	Additional information	5
6	Test laboratories sub-contracted	5
7	Description of the test setup	6
7.1	Shielded semi anechoic chamber	7
7.2	Shielded fully anechoic chamber	8
7.3	Radiated measurements > 18 GHz	9
7.4	Conducted measurements	10
8	Sequence of testing	11
8.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	11
8.2	Sequence of testing radiated spurious 30 MHz to 1 GHz	12
8.3	Sequence of testing radiated spurious 1 GHz to 18 GHz	13
8.4	Sequence of testing radiated spurious above 18 GHz	14
9	Measurement uncertainty	15
10	Summary of measurement results	16
11	Additional comments	17
12	Measurement results	19
12.1	Identify worst case data rate	19
12.2	Antenna gain	20
12.3	Duty cycle	21
12.4	Maximum output power conducted	24
12.5	Power spectral density	81
12.6	Minimum emission bandwidth for the band 5.725-5.85 GHz	102
12.7	Spectrum bandwidth – 26 dB bandwidth	121
12.8	Occupied bandwidth – 99% emission bandwidth	176
12.9	Band edge compliance radiated	231
12.10	TX spurious emissions radiated	232
12.11	Spurious emissions radiated < 30 MHz	344
13	Observations	360
Annex A	Document history	360
Annex B	Further information	360
Annex C	Accreditation Certificate	361

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2015-12-02
Date of receipt of test item:	2015-12-02
Start of test:	2015-12-07
End of test:	2016-04-05
Person(s) present during the test:	-/-

3 Test standard/s and references

Test standard	Date	Description
47 CFR Part 15	-/-	Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 247 Issue 1	May 2015	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices
RSS - Gen Issue 4	November 2014	Spectrum Management and Telecommunications Radio Standards Specifications - General Requirements and Information for the Certification of Radio Apparatus

Guidance	Version	Description
UNII: KDB 789033 D02	v01r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E
UNII: KDB 905462 D02	v01r02	Compliance measurement procedures for unlicensed - national information infrastructure devices operating in the 5250 - 5350 MHz and 5470 - 5725 MHz bands incorporating dynamic frequency selection
ANSI C63.4-2014	-/-	American national standard for methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American national standard of procedures for compliance testing of unlicensed wireless devices
KDB 662911 D01	V02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

4 Test environment

Temperature	:	T _{nom} T _{max} T _{min}	+23 °C during room temperature tests No tests under extreme conditions required! No tests under extreme conditions required!
Relative humidity content	:		55 %
Barometric pressure	:		not relevant for this kind of testing
Power supply	:	V _{nom} V _{max} V _{min}	3.3 V DC by external power supply No tests under extreme conditions required! No tests under extreme conditions required!

5 Test item

5.1 General description

Kind of test item	:	WLAN modem
Type identification	:	DT50RF MK2
HMN	:	-/-
PMN	:	DT50RF_MK2
HVIN	:	DT50RF_MK2
FVIN	:	6.6
S/N serial number	:	Conducted unit: 0060010001030016 Radiated unit: 0060010001030021
HW hardware status	:	MK2
SW software status	:	6.6
Frequency band	:	UNII bands 5150 MHz to 5250 MHz; 5250 MHz to 5350 MHz; 5470 MHz to 5725 MHz and 5725 MHz to 5850 MHz
Type of radio transmission	:	OFDM
Use of frequency spectrum	:	
Type of modulation	:	BPSK, QPSK, 16 – QAM, 64 – QAM
Antenna	:	External Sencity® Spot-S antenna with 3 ports
Power supply	:	3.3 V DC by external power supply
Temperature range	:	-40°C to +85°C

5.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup- and EUT-photos are included in test report: 1-0585/15-01-01_AnnexA
1-0585/15-01-01_AnnexB
1-0585/15-01-01_AnnexD

6 Test laboratories sub-contracted

None

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).


In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

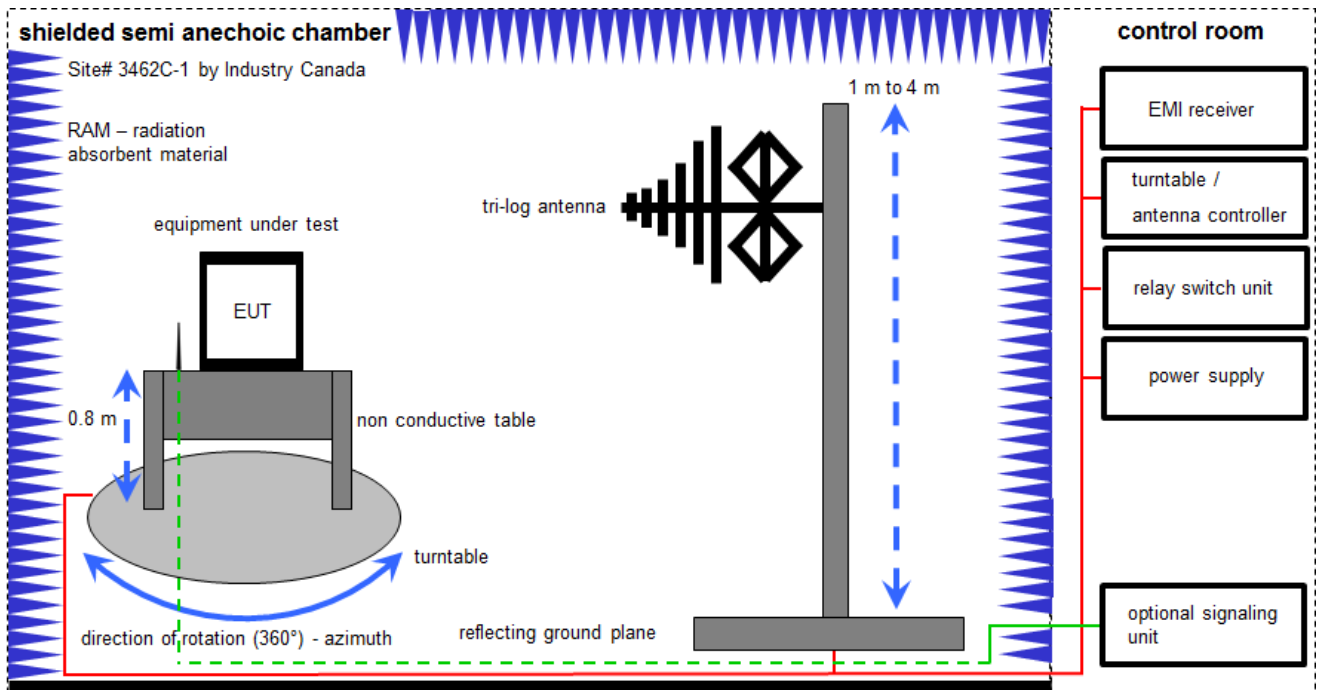

Measurement distance: tri-log antenna 10 meter

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] \quad (35.69 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	26.01.2016	27.01.2017
2	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
3	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
4	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
5	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	22.04.2014	22.04.2016

7.2 Shielded fully anechoic chamber

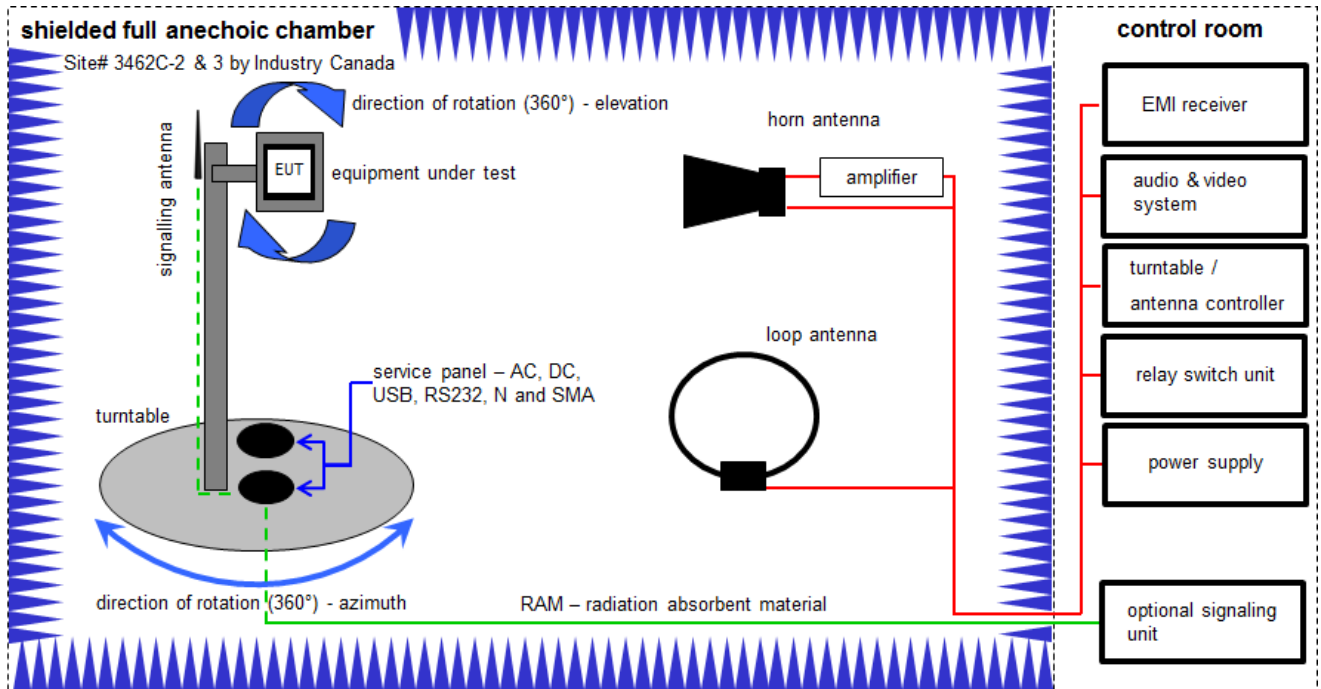

Measurement distance: horn antenna 3 meter; loop antenna 3 meter / 1 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:


$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A, B	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP	2818A03450	300001040	Ve	20.01.2015	20.01.2018
2	A	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vKI!	20.05.2015	20.05.2017
3	A, B	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev	-/-	-/-
4	A, B	Switch / Control Unit	3488A	HP	*	300000199	ne	-/-	-/-
5	A, B	Active Loop Antenna 10 kHz to 30 MHz	6502	EMCO/2	8905-2342	300000256	k	24.06.2015	24.06.2017
6	A	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne	-/-	-/-
7	A	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne	-/-	-/-
8	A	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne	-/-	-/-
9	A, B	EMI Test Receiver 9kHz-26.5GHz	ESR26	R&S	101376	300005063	k	04.09.2015	04.09.2016
10	C	Signal Analyzer	FSV40	R&S	101042	300004517	k	21.01.2016	21.01.2017
11	C	Amplifier 2-40 GHz	JS32-02004000-57-5P	MITEQ	1777200	300004541	ev	-/-	-/-
12	C	RF-Cable	ST18/SMAm/SMAm/48	Huber & Suhner	Batch no. 600918	400001182	ev	-/-	-/-
13	C	RF-Cable	ST18/SMAm/SMm/48	Huber & Suhner	Batch no. 127377	400001183	ev	-/-	-/-
14	C	DC-Blocker 0.1-40 GHz	8141A	Inmet	Batch no. 606844	400001185	ev	-/-	-/-
15	C	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda	8402	300000787	k	14.08.2015	14.08.2017

7.3 Radiated measurements > 18 GHz

Radiated measurements > 18 GHz

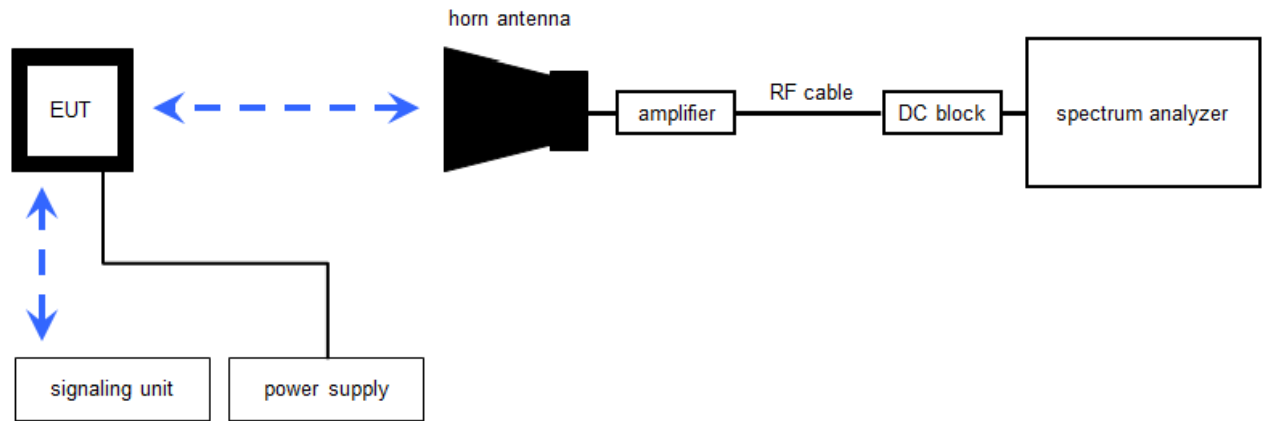

Measurement distance: horn antenna 50 cm

$$FS = U_R + CA + AF$$

(FS-field strength; U_R -voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:


$$FS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-60.1) \text{ [dB]} + 36.74 \text{ [dB/m]} = 16.64 \text{ [dB}\mu\text{V/m]} \text{ (} 6.79 \text{ }\mu\text{V/m)}$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	21.01.2016	21.01.2017
2	A	Amplifier 2-40 GHz	JS32-02004000-57-5P	MITEQ	1777200	300004541	ev	-/-	-/-
3	A	RF-Cable	ST18/SMAm/SMAm/48	Huber & Suhner	Batch no. 600918	400001182	ev	-/-	-/-
4	A	RF-Cable	ST18/SMAm/SMm/48	Huber & Suhner	Batch no. 127377	400001183	ev	-/-	-/-
5	A	DC-Blocker 0.1-40 GHz	8141A	Inmet	Batch no. 606844	400001185	ev	-/-	-/-
6	A	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda	8402	300000486	k	10.09.2015	10.09.2017
7	A	Std. Gain Horn Antenna 26.5 to 40.0 GHz	V637	Narda	82-16	300000510	k	14.08.2015	14.08.2017

7.4 Conducted measurements

Conducted measurements normal conditions

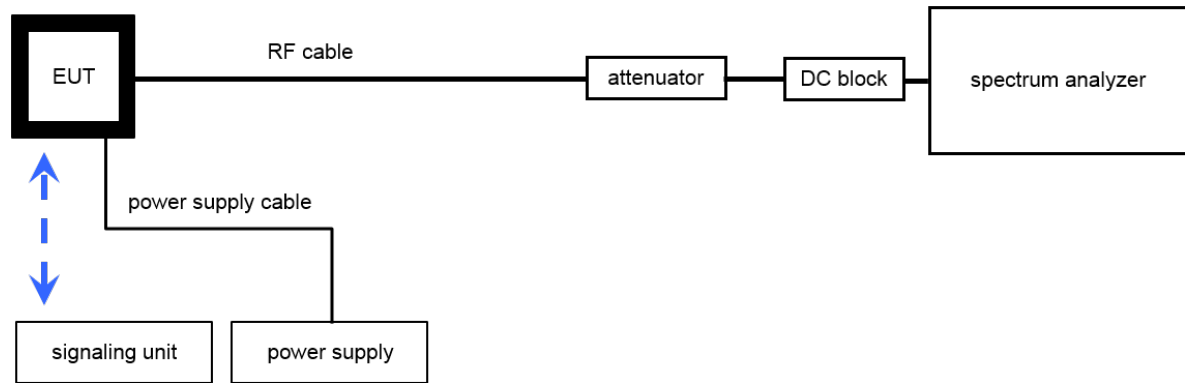

$$OP = AV + CA$$

(OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:

$$OP \text{ [dBm]} = 6.0 \text{ [dBm]} + 11.7 \text{ [dB]} = 17.7 \text{ [dBm]} \text{ (58.88 mW)}$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A, B	PC-WLAN Tester	Intel Core i3 3220/3,3 GHz, Prozessor	-/-	2V2403033A4523	300004589	ne	-/-	-/-
2	A, B	Teststand	Teststand Custom Sequence Editor	National Instruments GmbH	2V2403033A4523	300004590	ne	-/-	-/-
3	A, B	RF-Cable	ST18/SMAm/SMAm/60	Huber & Suhner	Batch no. 606844	400001181	ev	-/-	-/-
4	A, B	DC-Blocker 0.1-40 GHz	8141A	Inmet	Batch no. 606844	400001185	ev	-/-	-/-
5	B	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	21.01.2016	21.01.2017
6	A	NRP Power meter Display and control unit AC sup	NRP	R&S	100212	300003780	vIKI!	25.01.2016	24.01.2017

8 Sequence of testing

8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the premeasurement are maximized by the software by rotating the turntable from 0° to 360°. In case of the 2-axis positioner is used the elevation axis is also rotated from 0° to 360°.
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8.4 Sequence of testing radiated spurious above 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

9 Measurement uncertainty

Measurement uncertainty	
Test case	Uncertainty
Antenna gain	± 3 dB
Power spectral density	± 1.5 dB
Spectrum bandwidth	± 100 kHz (depends on the used RBW)
Occupied bandwidth	± 100 kHz (depends on the used RBW)
Maximum output power	± 1.5 dB
Minimum emissions bandwidth	± 100 kHz (depends on the used RBW)
Spurious emissions conducted	± 3 dB
Spurious emissions radiated below 30 MHz	± 3 dB
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB
Spurious emissions radiated above 12.75 GHz	± 4.5 dB
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB

10 Summary of measurement results

☐	No deviations from the technical specifications were ascertained
☐	There were deviations from the technical specifications ascertained
☒	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 247, Issue 1	see table	2016-04-26	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	C	NC	NA	NP	Remark
-/-	Output power verification (conducted)	Nominal	Nominal	-/-				-/-
-/-	Antenna gain	Nominal	Nominal	-/-				Declared
U-NII Part 15	Duty cycle	Nominal	Nominal	-/-				-/-
§15.407(a) RSS - 247 (6.2.1) (1) RSS - 247 (6.2.2) (1) RSS - 247 (6.2.3) (1) RSS - 247 (6.2.4) (1)	Maximum output power (conducted & radiated)	Nominal	Nominal	☒	☐	☐	☐	-/-
§15.407(a) RSS - 247 (6.2.1) (1) RSS - 247 (6.2.2) (1) RSS - 247 (6.2.3) (1) RSS - 247 (6.2.4) (1)	Power spectral density	Nominal	Nominal	☒	☐	☐	☐	-/-
RSS - 247 (6.2.4)	Spectrum bandwidth 6dB bandwidth	Nominal	Nominal	☒	☐	☐	☐	-/-
§15.407(a)	Spectrum bandwidth 26dB bandwidth	Nominal	Nominal	☒	☐	☐	☐	-/-
RSS Gen clause 6.6	Spectrum bandwidth 99% bandwidth	Nominal	Nominal	-/-				-/-
§15.205 RSS - 247 (6.2.1) (2) RSS - 247 (6.2.2) (2) RSS - 247 (6.2.3) (2) RSS - 247 (6.2.4) (2)	Band edge compliance radiated	Nominal	Nominal	☒	☐	☐	☐	-/-
§15.407(b) RSS - 247 (6.2.1) (2) RSS - 247 (6.2.2) (2) RSS - 247 (6.2.3) (2) RSS - 247 (6.2.4) (2)	TX spurious emissions radiated	Nominal	Nominal	☒	☐	☐	☐	-/-
§15.109 RSS-Gen	RX spurious emissions radiated	Nominal	Nominal	☐	☐	☐	☒	See reports from 1-0585/15-02 project.
§15.209(a) RSS-Gen	Spurious emissions radiated < 30 MHz	Nominal	Nominal	☒	☐	☐	☐	-/-
§15.107(a) §15.207	Spurious emissions conducted emissions < 30 MHz	Nominal	Nominal	☒	☐	☐	☐	-/-
§15.407 RSS - 247 (6.3)	DFS	Nominal	Nominal	☐	☐	☐	☒	See report 1-0585/15-01-06 & 07

Note: C = Compliant; NC = Not compliant; NA = Not applicable; NP = Not performed

* Test cases performed under the project number: 1-0585/15-02

11 Additional comments

Reference documents: 5G_Patch_3x3_9dBi_HuberSuhner
 Antennas_DT50RF_Module_Certification
 Cetecom_Customer_Questionnaire
 Offer_request_Cetecom
 PowerSettings_MIMO_SPA_5600_65_9_0_MIMO

Special test descriptions: EUT supports 3 TX / RX antennas with 3 spatial streams

Configuration descriptions:

Channel	36	38	40	44	46	48	52	54	56	60	62	64
Center Frequency	5180 MHz	5190 MHz	5200 MHz	5220 MHz	5230 MHz	5240 MHz	5260 MHz	5270 MHz	5280 MHz	5300 MHz	5310 MHz	5320 MHz
a	10		10	9		10	16		17	17		17
n20	11		13	13		14	15		15	16		17
n40		11			13			15			12	

Channel	100	102	104	108	110	112	116	118	120	124	126	128	132	134	136	140
Center Frequency	5500 MHz	5510 MHz	5520 MHz	5540 MHz	5550 MHz	5560 MHz	5580 MHz	5590 MHz	5600 MHz	5620 MHz	5630 MHz	5640 MHz	5660 MHz	5670 MHz	5680 MHz	5700 MHz
a	17		17	17		14	13		16	16		16	16		16	16
n20	18		18	18		17	17		16	12		12	16		17	16
n40		13			16			17			17			17		

Channel	149	151	153	157	159	161	165
Center Frequency	5745 MHz	5755 MHz	5765 MHz	5785 MHz	5795 MHz	5805 MHz	5825 MHz
a	15		16	15		14	16
n20	15		15	14		16	13
n40		15			13		

Test mode:

- ☐ No test mode available.
Iperf was used to ping another device with the largest support packet size
- ☒ Special software is used.
EUT is transmitting pseudo random data by itself

Antennas and transmit
operating modes:

- ☐ Operating mode 1 (single antenna)
- Equipment with 1 antenna,
 - Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,
 - Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)
- ☒ Operating mode 2 (multiple antennas, no beamforming)
- Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.
- ☐ Operating mode 3 (multiple antennas, with beamforming)
- Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.

12 Measurement results

12.1 Identify worst case data rate

Measurement:

All modes of the module will be measured with an average power meter or spectrum analyzer to identify the maximum transmission power.

In further tests only the identified worst case modulation scheme or bandwidth will be measured and this mode is used as representative mode for all other modulation schemes.

Additional the band edge compliance test will be performed in the lowest and highest modulation scheme.

Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	3 MHz
Video bandwidth:	3 MHz
Trace mode:	Max hold
Used test setup:	see chapter 7.4 – A
Measurement uncertainty:	see chapter 9

Results:

Modulation	Modulation scheme / bandwidth					
Frequency	5180 MHz	5320 MHz	5500 MHz	5700 MHz	5745 MHz	5825 MHz
OFDM / a – mode	6 Mbit/s	6 Mbit/s	6 Mbit/s	6 Mbit/s	6 Mbit/s	6 Mbit/s
OFDM / n HT20 – mode	MCS0	MCS0	MCS0	MCS0	MCS0	MCS0
Frequency	5190 MHz	5310 MHz	5510 MHz	5670 MHz	5755 MHz	5815 MHz
OFDM / n HT40 – mode	MCS0	MCS0	MCS0	MCS0	MCS0	MCS0

12.2 Antenna gain

Limits:

FCC	IC
6 dBi / > 6 dBi output power and power density reduction required	

Results:

T _{nom}	V _{nom}	UNII bands
Gain [dBi] Declared by the manufacturer		9.0

Product Configuration

Technical Data

Electrical Data

	Band 1
Frequency (MHz)	5150 - 5875
VSWR	1.7
Gain	9 dBi
3dB beamwidth (h) (°)	65
3dB beamwidth (v) (°)	65
Electrical downtilt (v)	0
Isolation between Port	20 dB

General Data

Nominal Impedance	50 Ω
Connector	N, plug (male), bottom
Pigtail	Type: SUCOFORM_86_LSFH, Length: 0.9 m
Composite Power max.	2 W
Ambient Temperature	25 °C

MIMO antenna with following polarization: 3 x linear: vertical / dual-slant ±45°

Electrical data (VSWR, Gain and beam width) are defining the vertical polarized radiator of this MIMO antenna.

Note: Output power limit and power spectral density limit shall be reduced by 3 dB.

12.3 Duty cycle

Description:

The duty cycle is necessary to compute the maximum power during an actual transmission. The shown plots and values are to show an example of the measurement procedure. The real value is measured direct during the power measurement or power density measurement. The correction value is shown in each plot of these measurements.



Measurement:

Measurement parameter	
According to: KDB789033 D02, B.	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	10 MHz
Video bandwidth:	10 MHz
Span:	Zero
Trace-Mode:	Video trigger / view / single sweep
Used test setup:	see chapter 7.4 – A
Measurement uncertainty:	see chapter 9


Results:

Duty cycle and correction factor: example for one channel and one antenna port

OFDM / a – mode:	97.01 % duty cycle	=>	0.13 dB
OFDM / n HT20 – mode:	97.00 % duty cycle	=>	0.13 dB
OFDM / n HT40 – mode:	94.91 % duty cycle	=>	0.23 dB

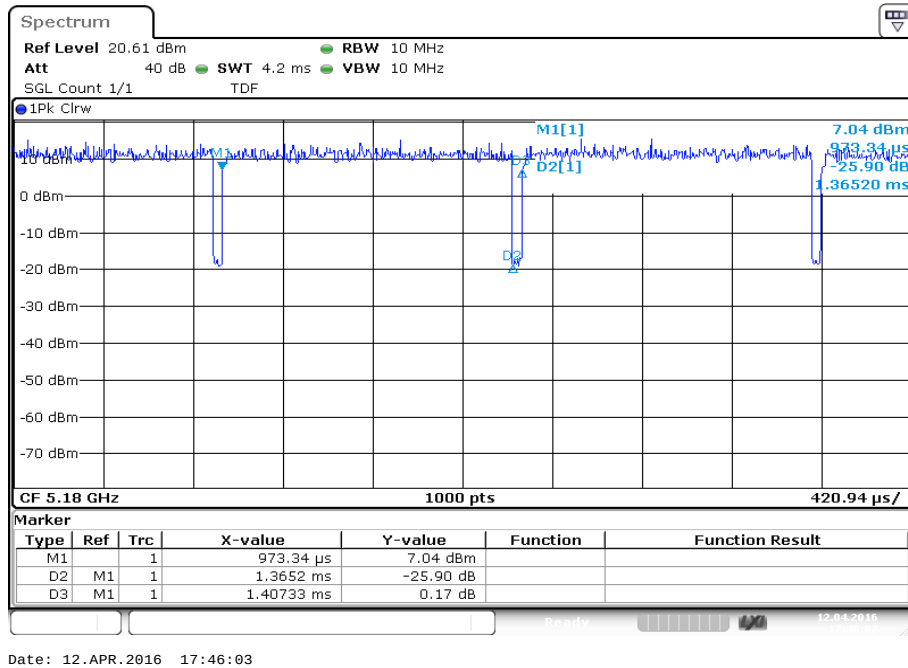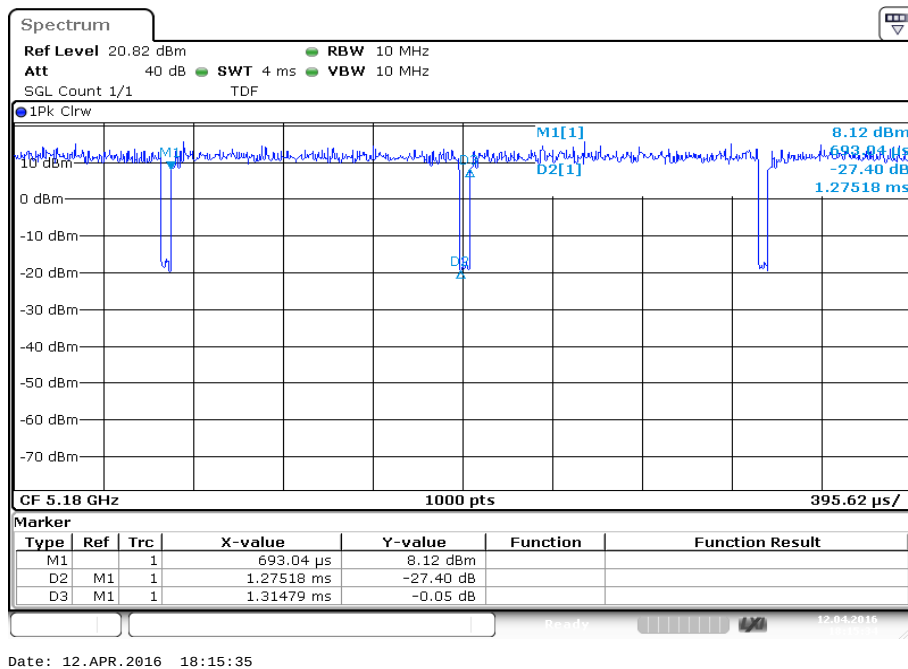Plots:**Plot 1:** duty cycle of the transmitter – OFDM / a – mode**Plot 2:** duty cycle of the transmitter – OFDM / n HT20 – mode

Plot 3: duty cycle of the transmitter – OFDM / n HT40 – mode

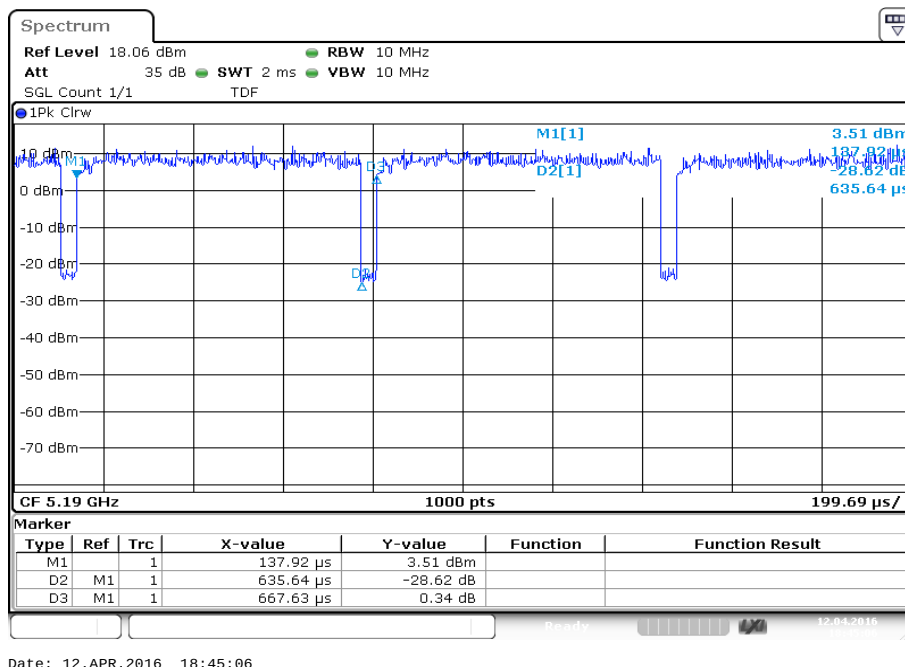

12.4 Maximum output power conducted

Description:

Measurement of the maximum output power conducted

Measurement:

Measurement parameter	
According to: KDB789033 D02, E.2.e.	
Detector:	RMS
Sweep time:	$\geq 10 \cdot (\text{swp points}) \cdot (\text{total on/off time})$
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Span:	> EBW
Trace-Mode:	Max hold
Analyzer function	Band power / channel power Interval > 26 dB EBW
Used test setup:	see chapter 7.4 – A
Measurement uncertainty:	see chapter 9

Limits:

Radiated output power	Conducted output power
5.150-5.250 GHz 200 mW or 10 dBm + 10 log Bandwidth (IC) All other bands: Conducted power + 6dBi antenna gain	250mW 5.150-5.250 GHz (FCC) The lesser one of 250mW or 11 dBm + 10 log Bandwidth 5.250-5.350 GHz 250mW or 11 dBm + 10 log Bandwidth 5.470-5.725 GHz (where Bandwidth is the 26dB Bandwidth [MHz]) 1W 5.725-5.85 GHz
5.150-5.250 GHz 200 mW or 10 dBm + 10 log Bandwidth (IC) All other bands: Conducted power + 9dBi antenna gain*	200 mW (EIRP) $\triangleq$ 25 mW (cond.) = 14 dBm (cond.) 250 mW: 24 dBm – 3 dB = 15 dBm = 32 mW 1 W: 30 dBm – 3 dB = 27 dBm = 500 mW

Note: *all limits shall be reduced by 3 dB because of 9 dBi antenna gain.

Result: antenna port 1

OFDM / a – mode Channel	Maximum output power conducted [dBm]			
	5180 MHz	5200 MHz	5300 MHz	5320 MHz
Including duty cycle correction factor	11.3	12.4	14.3	14.3
Channel	5500 MHz	5600 MHz	5700 MHz	-/-
Including duty cycle correction factor	14.1	14.2	13.7	-/-
Channel	5745 MHz	5765 MHz	5805 MHz	5825 MHz
Including duty cycle correction factor	12.3	13.3	11.7	13.3

OFDM / n HT20 – mode Channel	Maximum output power conducted [dBm]			
	5180 MHz	5200 MHz	5300 MHz	5320 MHz
Including duty cycle correction factor	8.2	10.4	13.1	14.1
Channel	5500 MHz	5600 MHz	5700 MHz	-/-
Including duty cycle correction factor	14.9	13.1	13.6	-/-
Channel	5745 MHz	5765 MHz	5805 MHz	5825 MHz
Including duty cycle correction factor	12.1	12.7	12.6	10.6

OFDM / n HT40 – mode Channel	Maximum output power conducted [dBm]			
	5190 MHz	5230 MHz	5270 MHz	5310 MHz
Including duty cycle correction factor	8.3	12.6	12.0	9.3
Channel	5510 MHz	5550 MHz	5630 MHz	5670 MHz
Including duty cycle correction factor	9.8	13.2	14.5	13.9
Channel	5755 MHz	5795 MHz	-/-	-/-
Including duty cycle correction factor	12.3	10.6	-/-	-/-

Result: antenna port 2

OFDM / a – mode	Maximum output power conducted [dBm]				
	Channel	5180 MHz	5200 MHz	5300 MHz	5320 MHz
Including duty cycle correction factor		10.7	12.0	13.5	13.8
Channel		5500 MHz	5600 MHz	5700 MHz	-/-
Including duty cycle correction factor		13.5	14.5	14.0	-/-
Channel		5745 MHz	5765 MHz	5805 MHz	5825 MHz
Including duty cycle correction factor		13.2	13.2	11.4	12.9

OFDM / n HT20 – mode	Maximum output power conducted [dBm]				
	Channel	5180 MHz	5200 MHz	5300 MHz	5320 MHz
Including duty cycle correction factor		7.7	10.1	12.8	13.8
Channel		5500 MHz	5600 MHz	5700 MHz	-/-
Including duty cycle correction factor		14.7	13.4	14.1	-/-
Channel		5745 MHz	5765 MHz	5805 MHz	5825 MHz
Including duty cycle correction factor		12.9	12.8	13.1	10.8

OFDM / n HT40 – mode	Maximum output power conducted [dBm]				
	Channel	5190 MHz	5230 MHz	5270 MHz	5310 MHz
Including duty cycle correction factor		8.3	12.0	12.5	9.2
Channel		5510 MHz	5550 MHz	5630 MHz	5670 MHz
Including duty cycle correction factor		9.7	12.7	14.4	14.3
Channel		5755 MHz	5795 MHz	-/-	-/-
Including duty cycle correction factor		12.7	10.4	-/-	-/-

Result: antenna port 3

OFDM / a – mode	Maximum output power conducted [dBm]				
	Channel	5180 MHz	5200 MHz	5300 MHz	5320 MHz
Including duty cycle correction factor		12.0	12.8	15.1	15.1
Channel		5500 MHz	5600 MHz	5700 MHz	-/-
Including duty cycle correction factor		14.8	15.4	14.4	-/-
Channel		5745 MHz	5765 MHz	5805 MHz	5825 MHz
Including duty cycle correction factor		13.0	13.6	12.2	13.9

OFDM / n HT20 – mode	Maximum output power conducted [dBm]				
	Channel	5180 MHz	5200 MHz	5300 MHz	5320 MHz
Including duty cycle correction factor		8.8	10.7	13.6	14.7
Channel		5500 MHz	5600 MHz	5700 MHz	-/-
Including duty cycle correction factor		15.4	14.4	14.3	-/-
Channel		5745 MHz	5765 MHz	5805 MHz	5825 MHz
Including duty cycle correction factor		13.2	12.8	13.6	11.0

OFDM / n HT40 – mode	Maximum output power conducted [dBm]				
	Channel	5190 MHz	5230 MHz	5270 MHz	5310 MHz
Including duty cycle correction factor		9.2	13.3	13.3	10.1
Channel		5510 MHz	5550 MHz	5630 MHz	5670 MHz
Including duty cycle correction factor		10.3	13.8	14.8	14.7
Channel		5755 MHz	5795 MHz	-/-	-/-
Including duty cycle correction factor		13.0	11.3	-/-	-/-

Result: antenna port 1 + antenna port 2

OFDM / a – mode	Maximum output power conducted [dBm]				
	Channel	5180 MHz	5200 MHz	5300 MHz	5320 MHz
Including duty cycle correction factor		14.0	15.2	16.9	17.1
Channel		5500 MHz	5600 MHz	5700 MHz	-/-
Including duty cycle correction factor		16.8	17.4	16.9	-/-
Channel		5745 MHz	5765 MHz	5805 MHz	5825 MHz
Including duty cycle correction factor		15.8	16.3	14.6	16.1

OFDM / n HT20 – mode	Maximum output power conducted [dBm]				
	Channel	5180 MHz	5200 MHz	5300 MHz	5320 MHz
Including duty cycle correction factor		11.0	13.2	16.0	16.9
Channel		5500 MHz	5600 MHz	5700 MHz	-/-
Including duty cycle correction factor		17.8	16.3	16.9	-/-
Channel		5745 MHz	5765 MHz	5805 MHz	5825 MHz
Including duty cycle correction factor		15.5	15.7	15.9	13.7

OFDM / n HT40 – mode	Maximum output power conducted [dBm]				
	Channel	5190 MHz	5230 MHz	5270 MHz	5310 MHz
Including duty cycle correction factor		11.3	15.3	15.3	12.3
Channel		5510 MHz	5550 MHz	5630 MHz	5670 MHz
Including duty cycle correction factor		12.8	16.0	17.5	17.1
Channel		5755 MHz	5795 MHz	-/-	-/-
Including duty cycle correction factor		15.5	13.5	-/-	-/-

Result: antenna port 1 + antenna port 2 + antenna port 3


OFDM / a – mode Channel	Maximum output power conducted [dBm]			
	5180 MHz	5200 MHz	5300 MHz	5320 MHz
Including duty cycle correction factor	16.1	17.2	19.1	19.2
Channel	5500 MHz	5600 MHz	5700 MHz	-/-
Including duty cycle correction factor	18.9	19.5	18.8	-/-
Channel	5745 MHz	5765 MHz	5805 MHz	5825 MHz
Including duty cycle correction factor	17.6	18.2	16.5	18.1

OFDM / n HT20 – mode Channel	Maximum output power conducted [dBm]			
	5180 MHz	5200 MHz	5300 MHz	5320 MHz
Including duty cycle correction factor	13.0	15.2	18.0	19.0
Channel	5500 MHz	5600 MHz	5700 MHz	-/-
Including duty cycle correction factor	19.8	18.5	18.8	-/-
Channel	5745 MHz	5765 MHz	5805 MHz	5825 MHz
Including duty cycle correction factor	17.5	17.5	17.9	15.6


OFDM / n HT40 – mode Channel	Maximum output power conducted [dBm]			
	5190 MHz	5230 MHz	5270 MHz	5310 MHz
Including duty cycle correction factor	13.4	17.4	17.4	14.3
Channel	5510 MHz	5550 MHz	5630 MHz	5670 MHz
Including duty cycle correction factor	14.7	18.0	19.4	19.1
Channel	5755 MHz	5795 MHz	-/-	-/-
Including duty cycle correction factor	17.4	15.6	-/-	-/-

Plots: OFDM / a – mode, antenna port 1


Plot 1: 5180 MHz

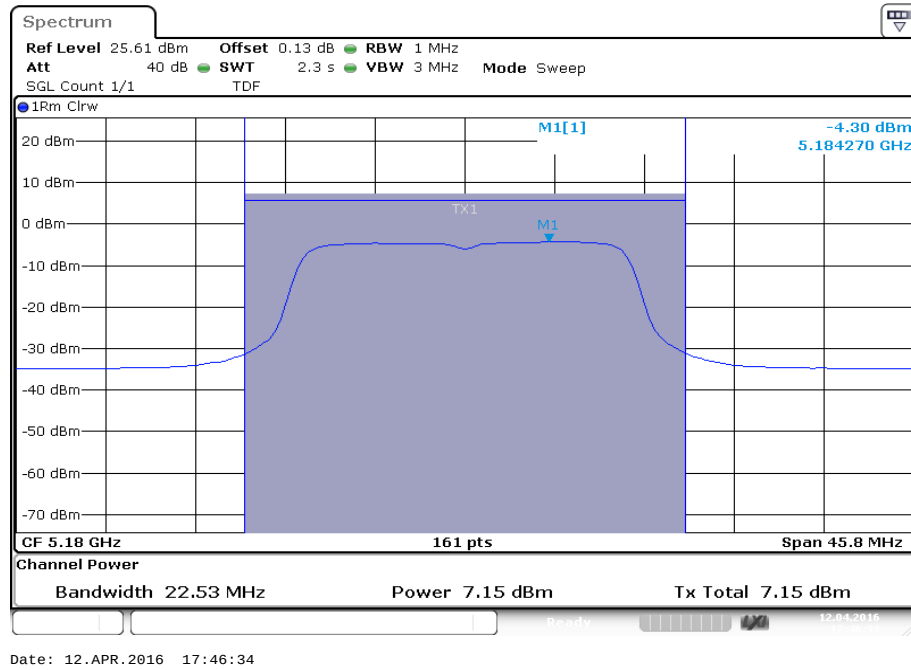


Plot 2: 5200 MHz

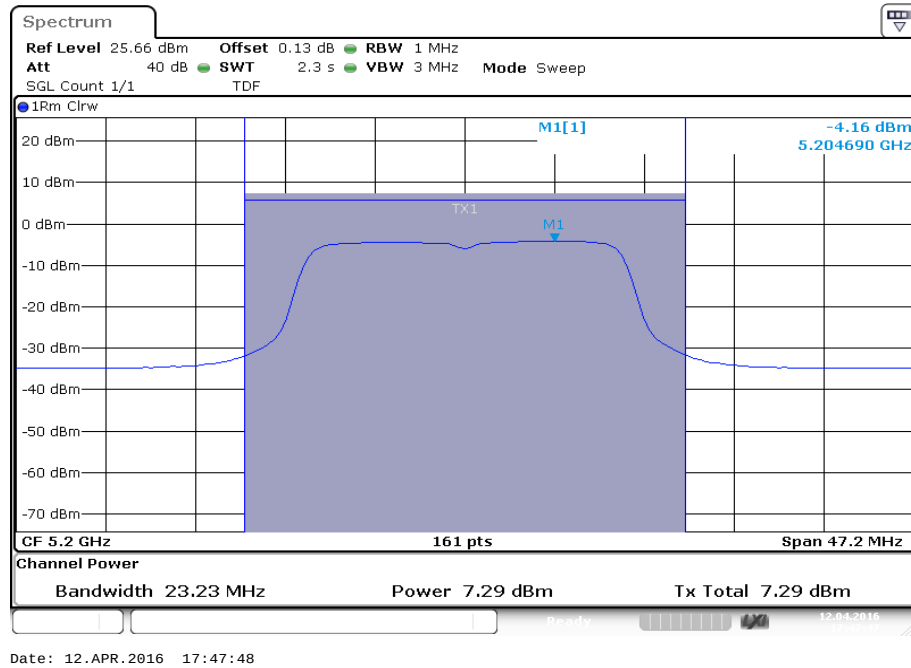


Plot 3: 5300 MHz

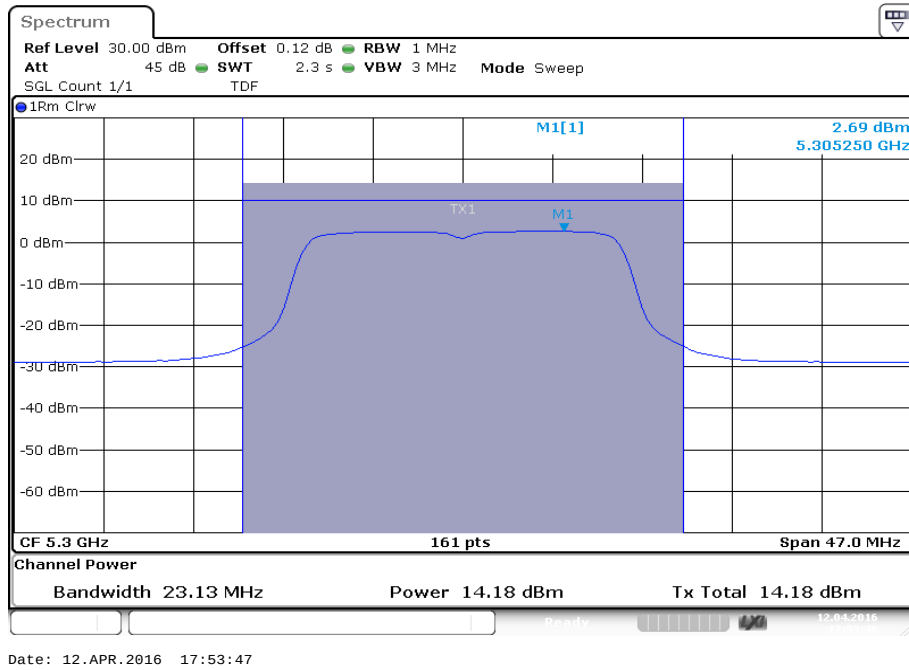


Plot 4: 5320 MHz

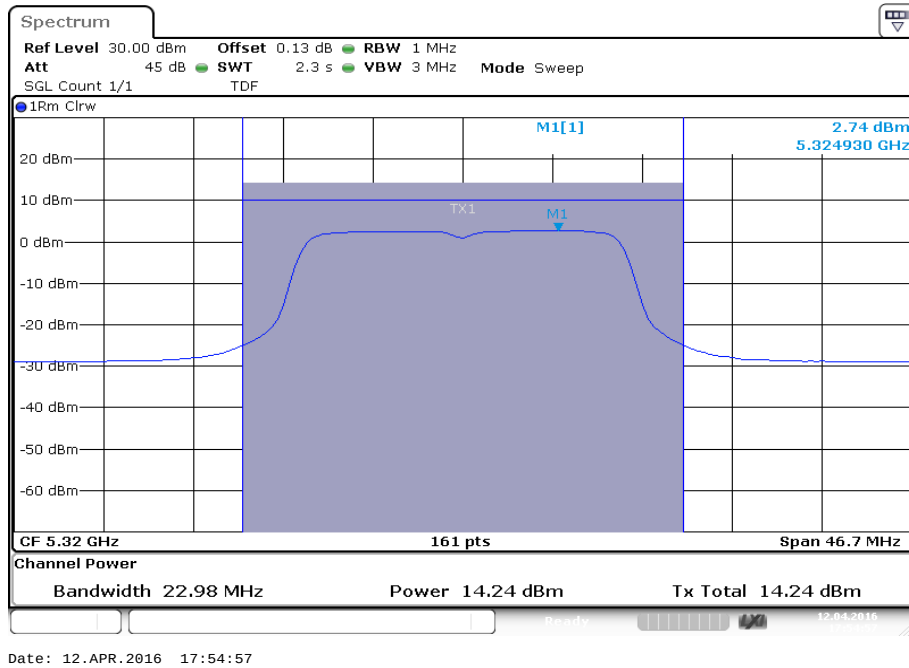


Plot 5: 5500 MHz

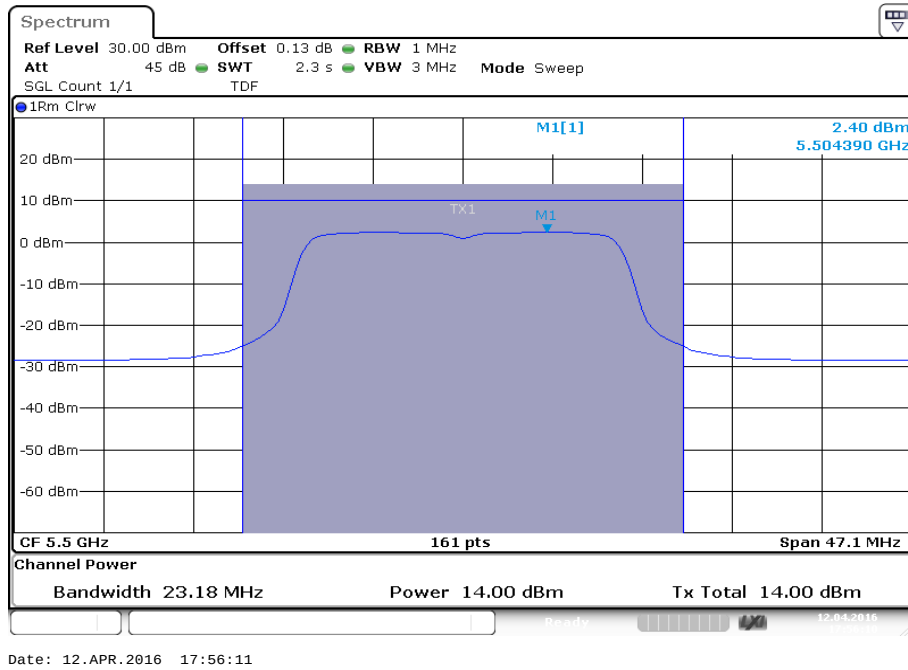


Plot 6: 5600 MHz

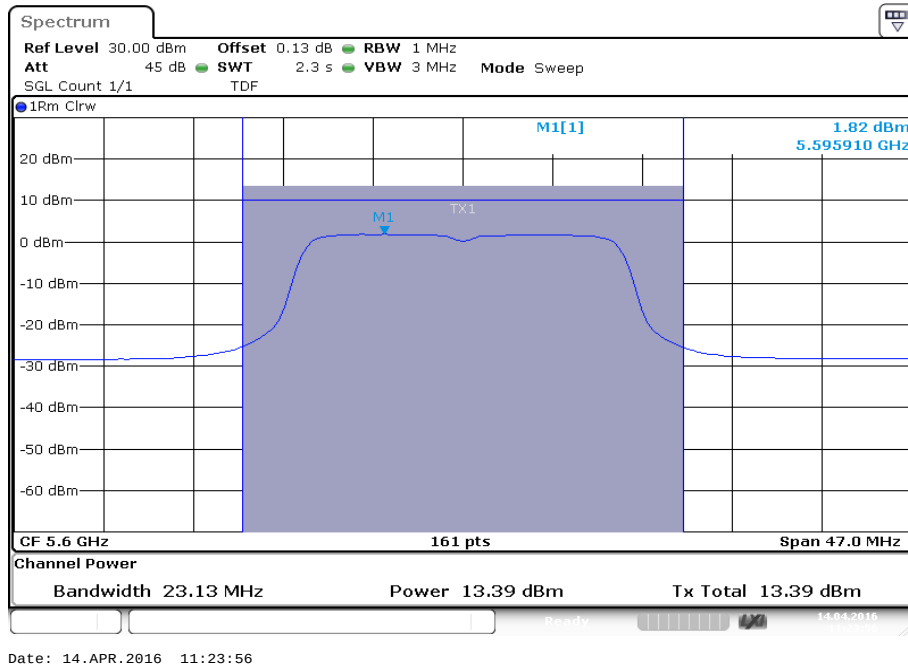


Plot 7: 5700 MHz

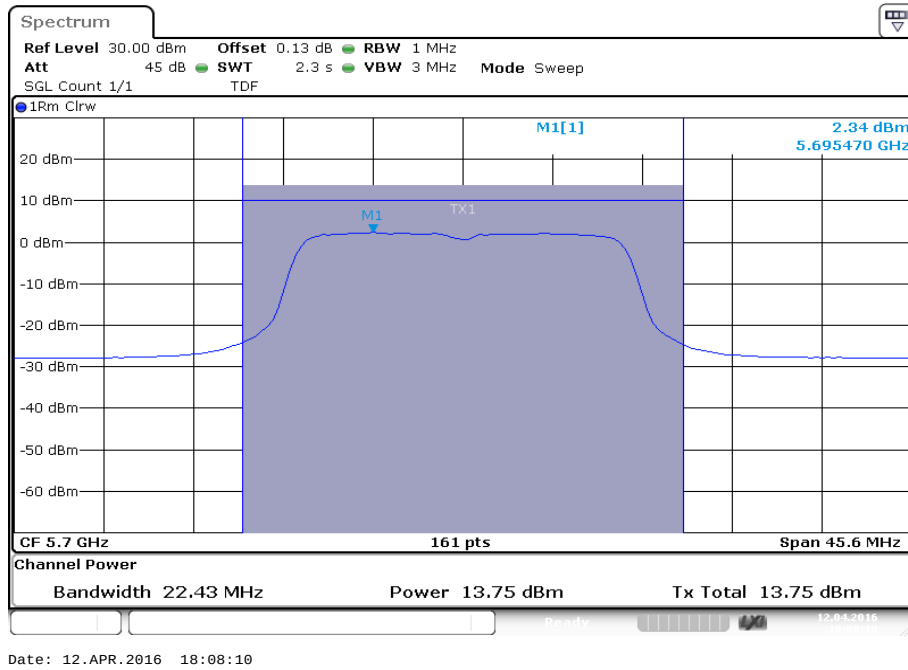


Plot 8: 5745 MHz

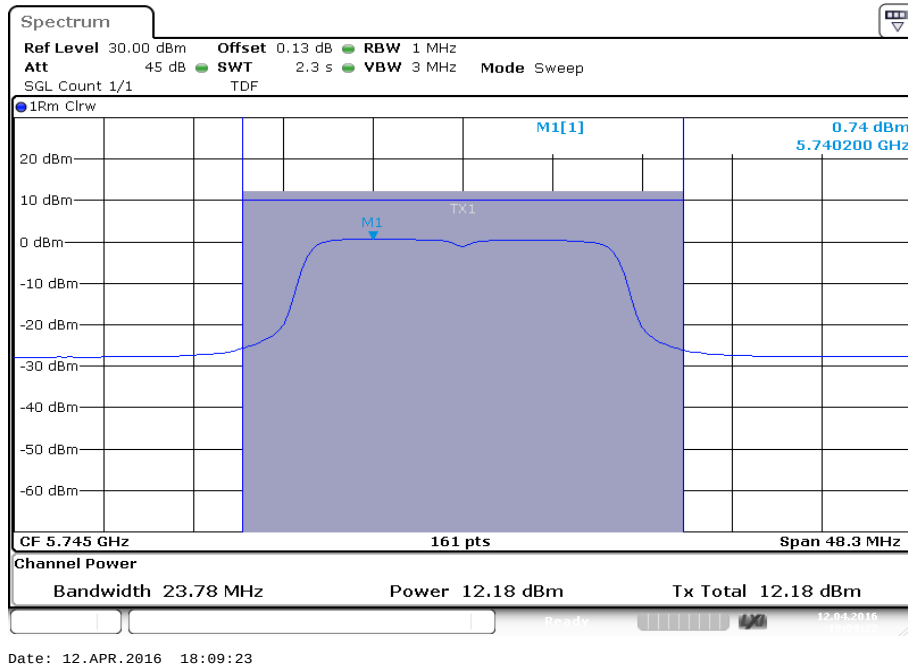


Plot 9: 5765 MHz

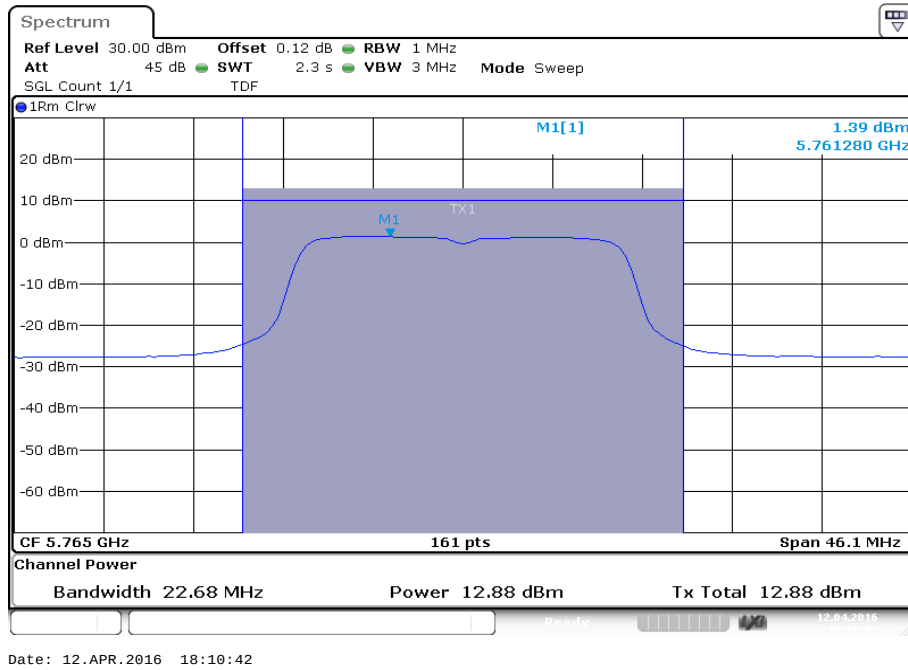

Plot 10: 5805 MHz

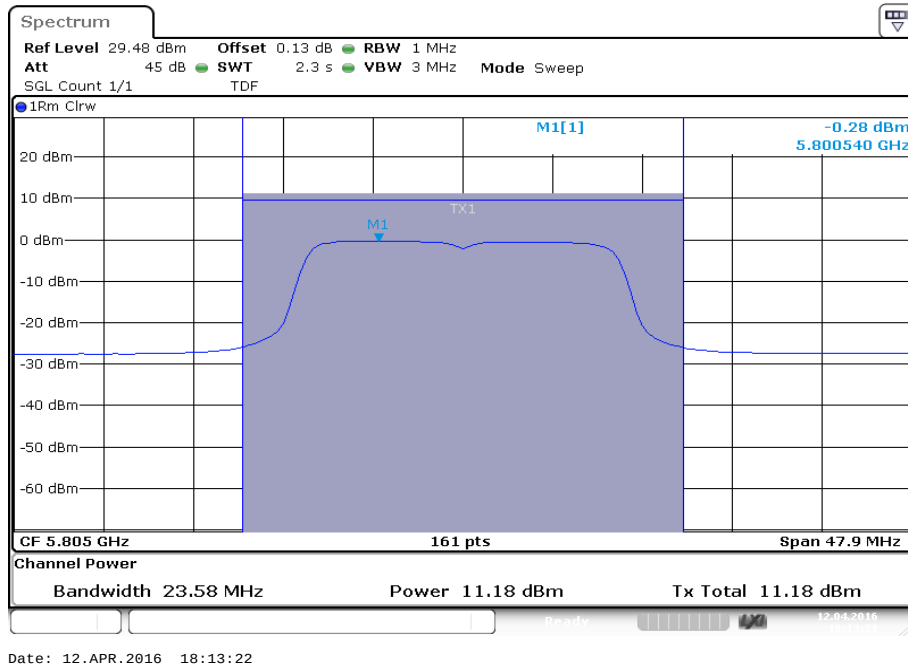


Plot 11: 5825 MHz

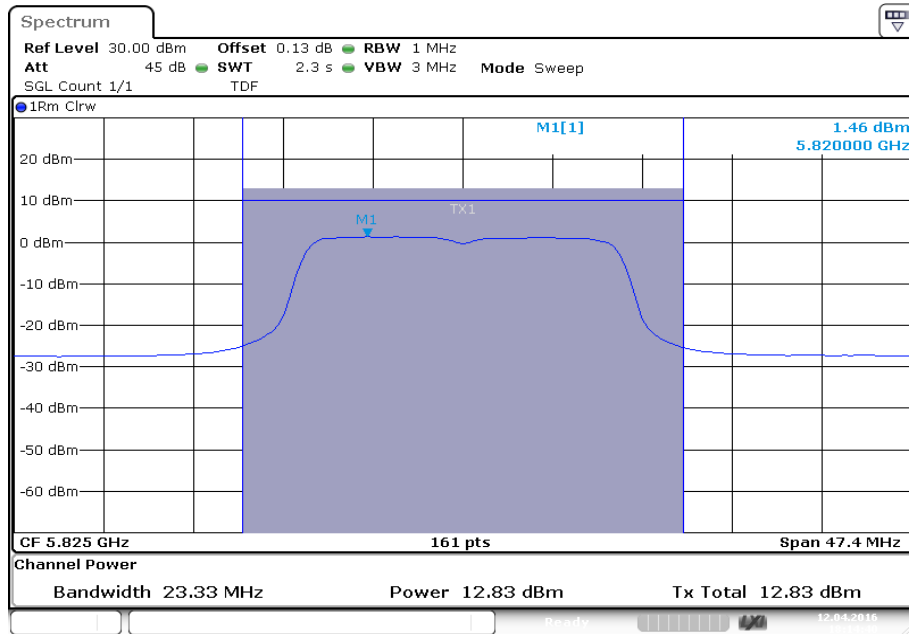


Date: 12.APR.2016 18:14:41

Plots: OFDM / n HT20 – mode, antenna port 1


Plot 1: 5180 MHz

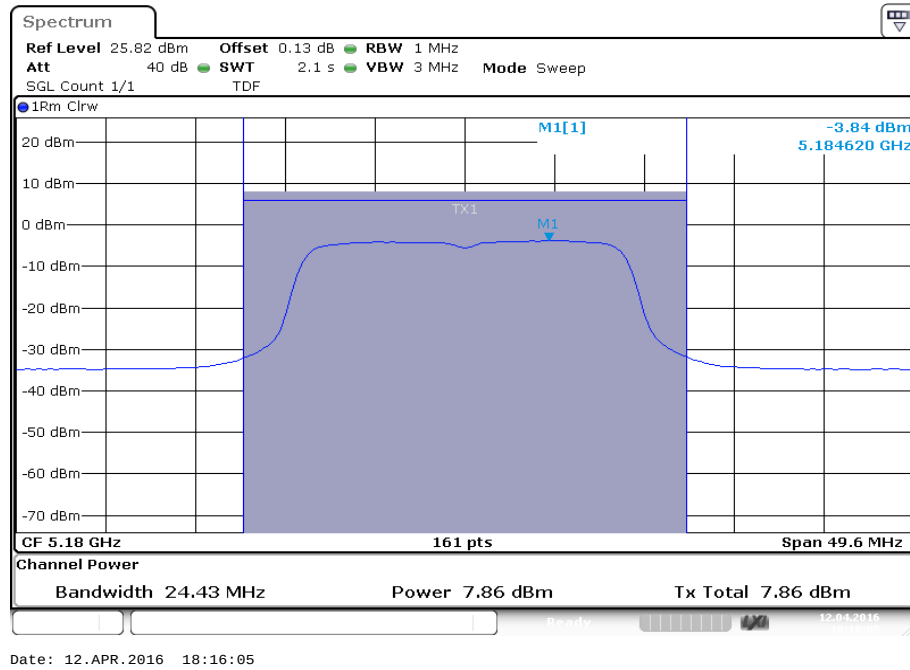


Plot 2: 5200 MHz

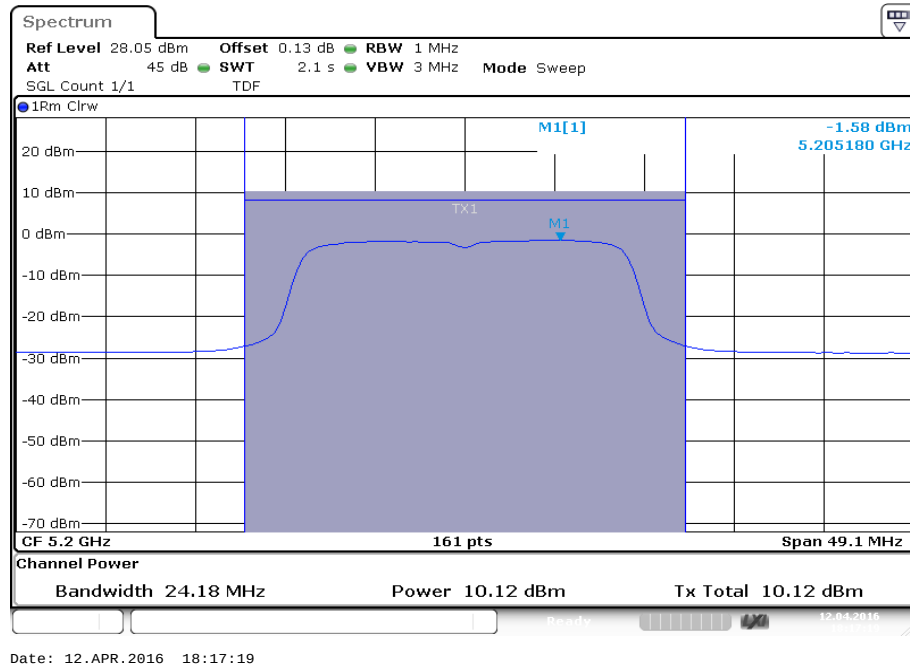


Plot 3: 5300 MHz

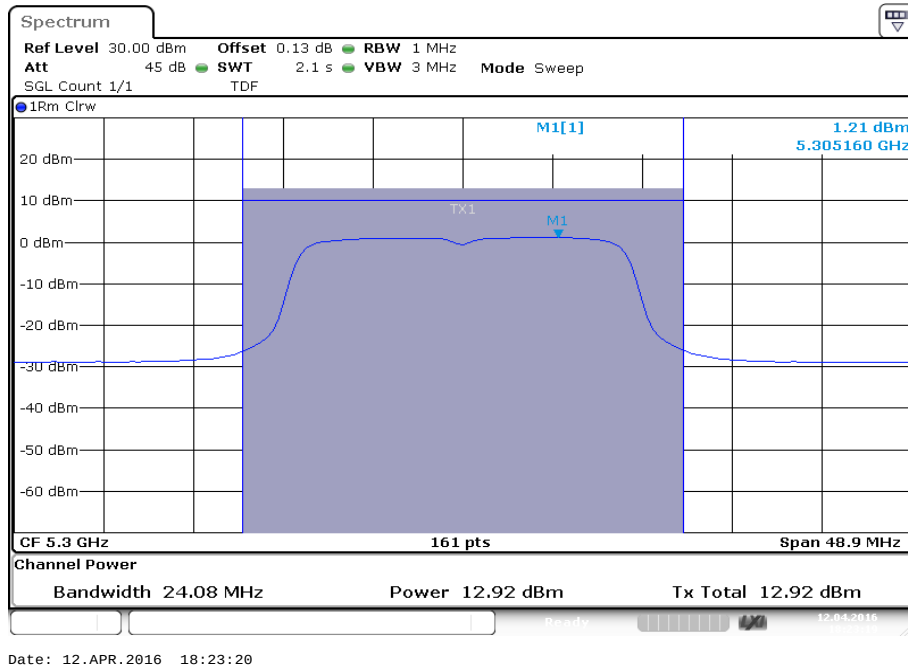


Plot 4: 5320 MHz

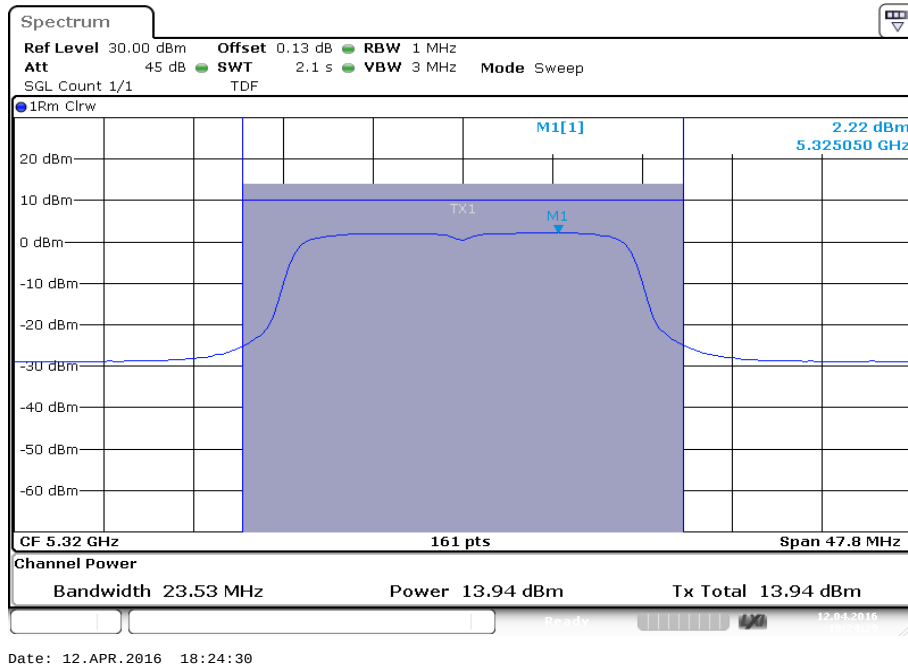


Plot 5: 5500 MHz

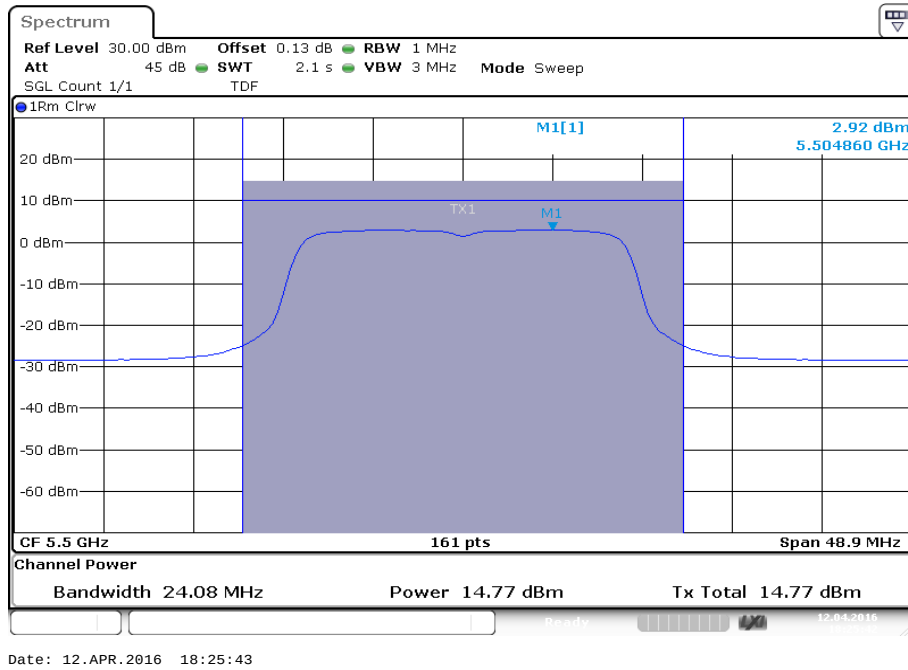


Plot 6: 5600 MHz

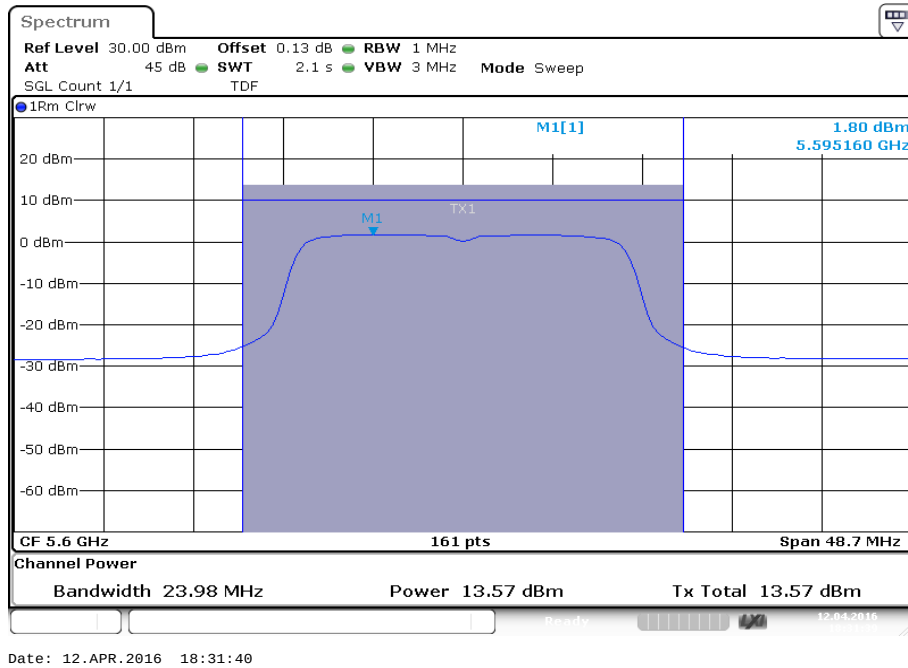


Plot 7: 5700 MHz

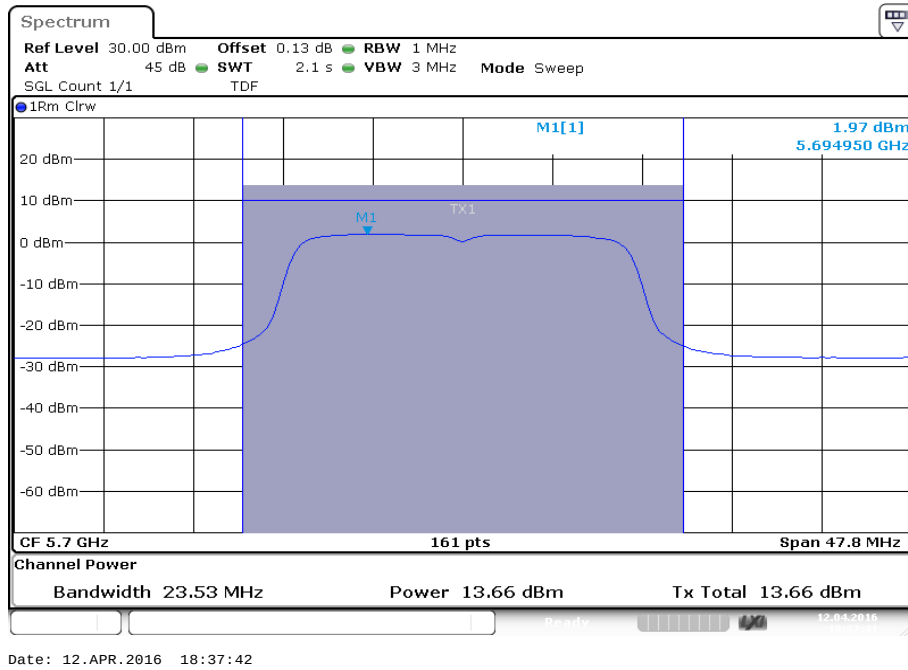


Plot 8: 5745 MHz

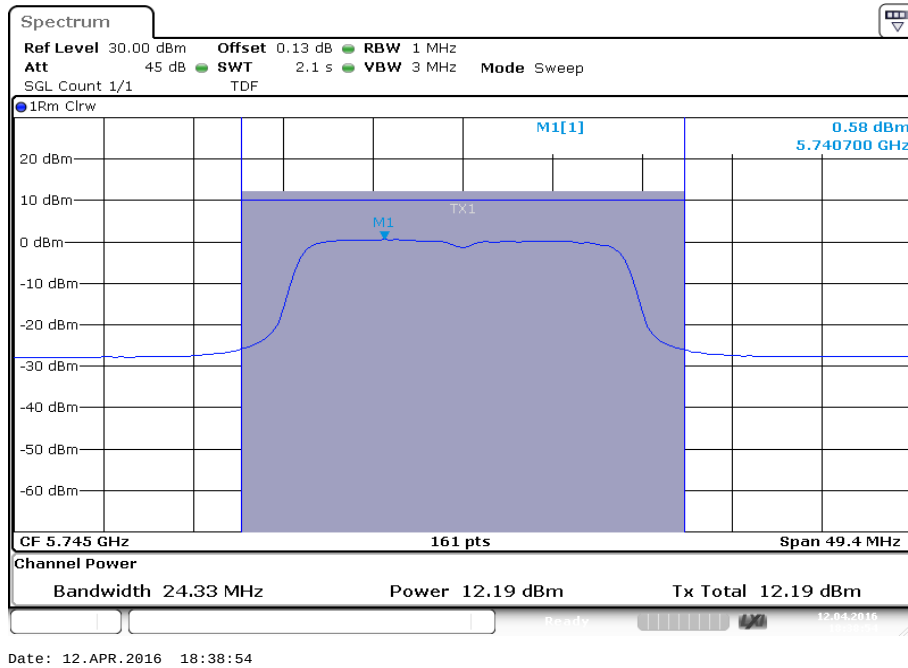


Plot 9: 5765 MHz

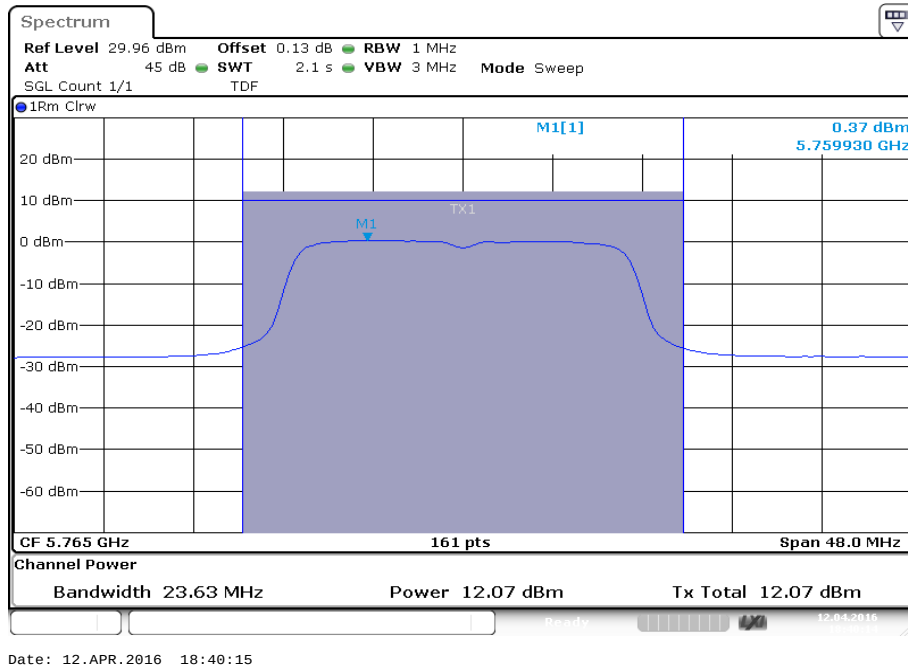

Plot 10: 5805 MHz

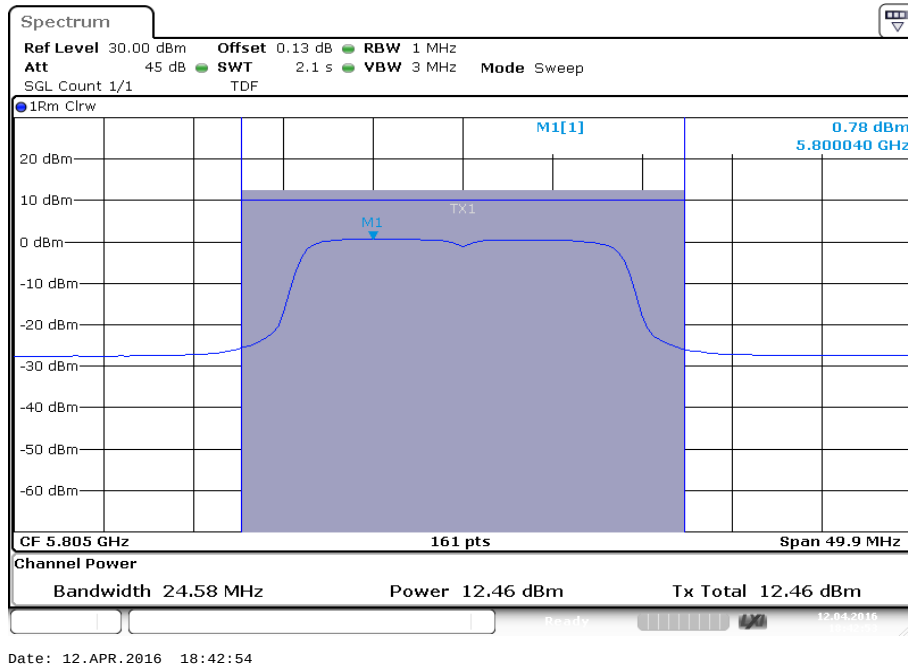


Plot 11: 5825 MHz

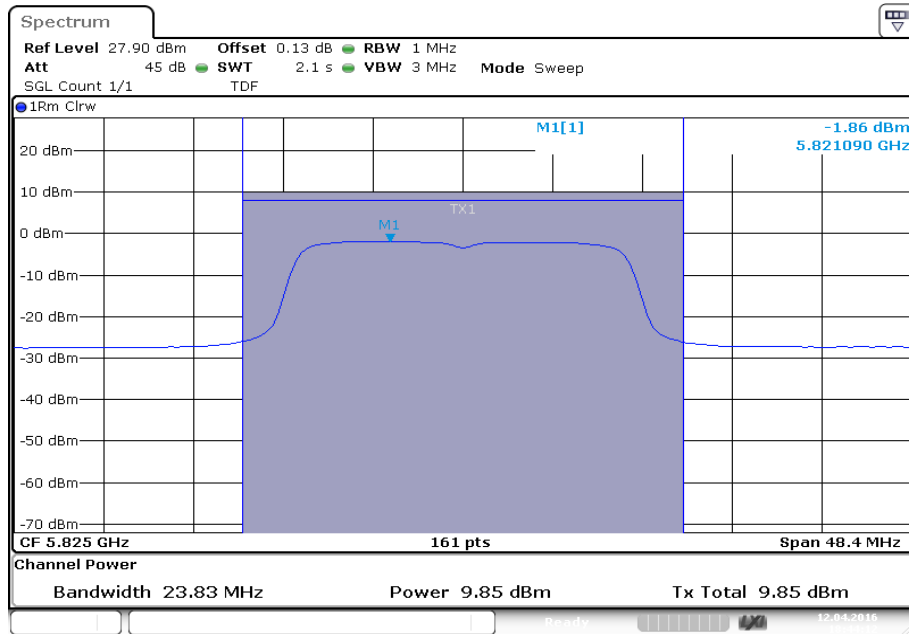


Date: 12.APR.2016 18:44:12

Plots: OFDM / n HT40 – mode, antenna port 1


Plot 1: 5190 MHz

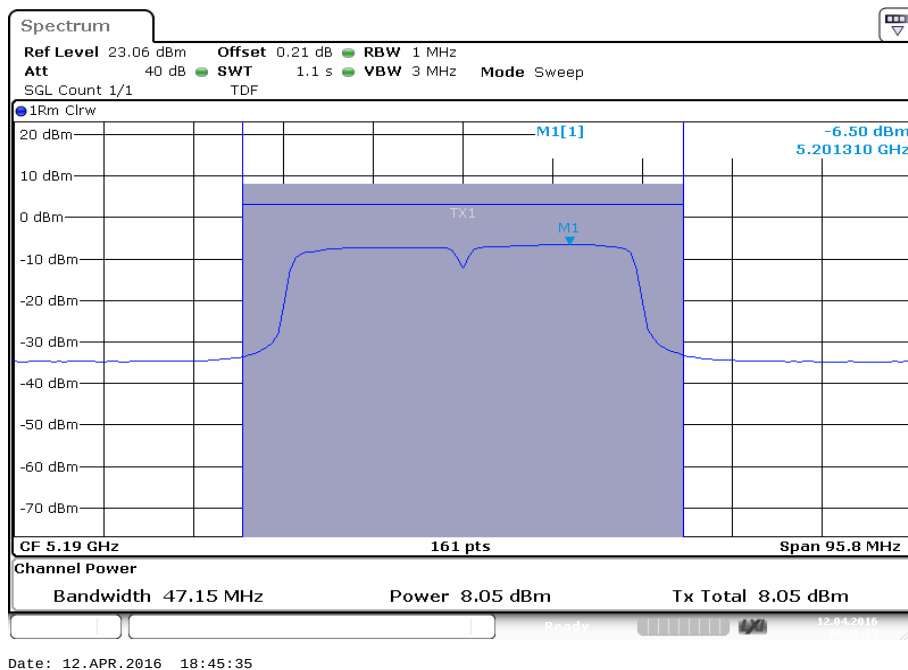


Plot 2: 5230 MHz

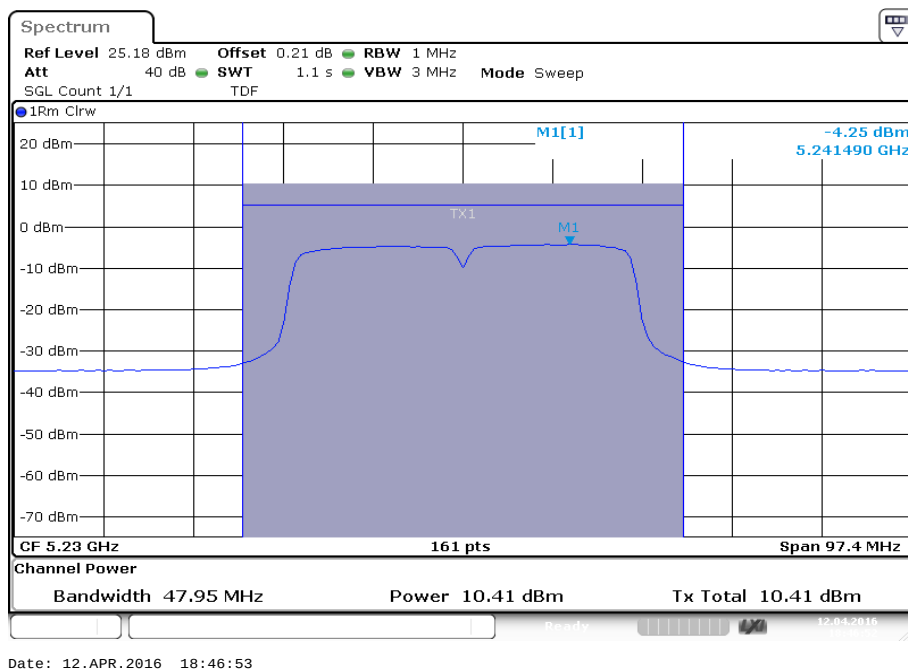


Plot 3: 5270 MHz

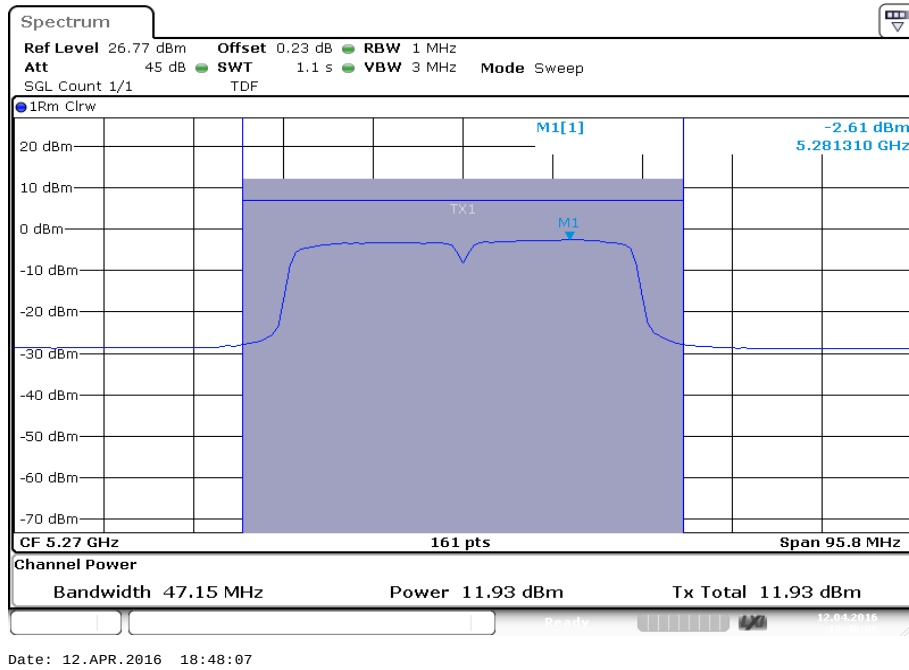


Plot 4: 5310 MHz

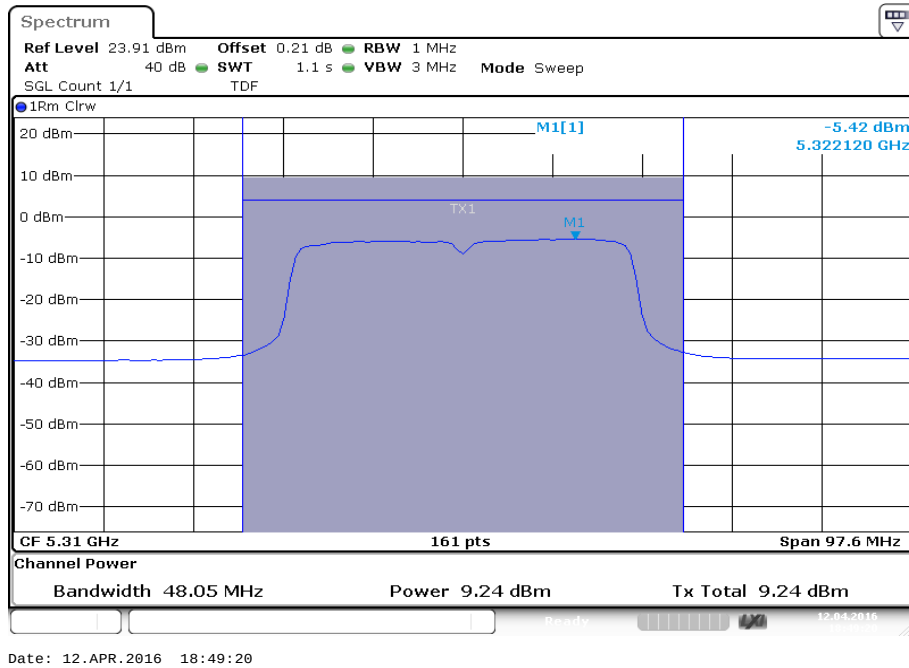


Plot 5: 5510 MHz

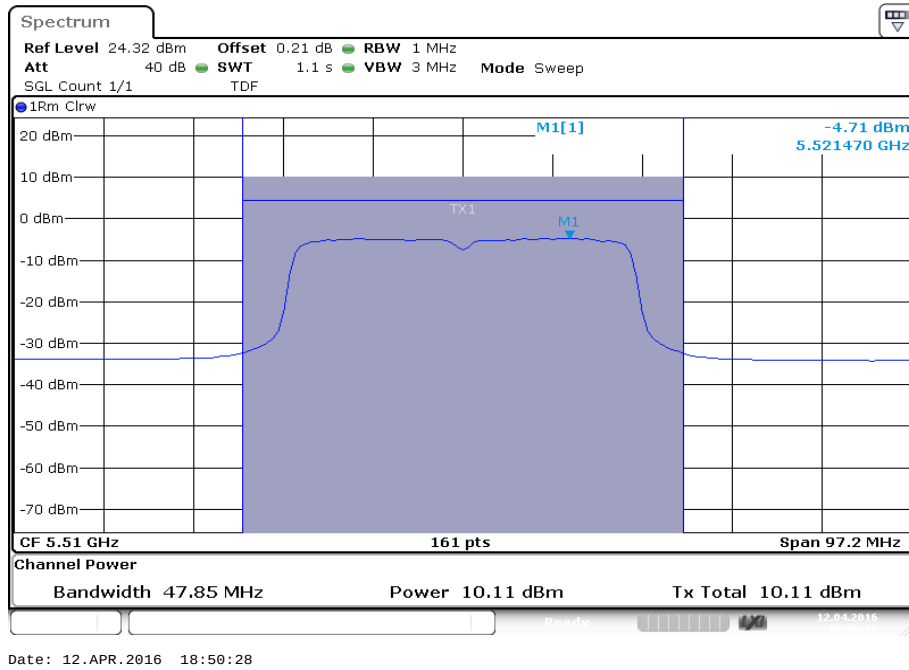


Plot 6: 5550 MHz

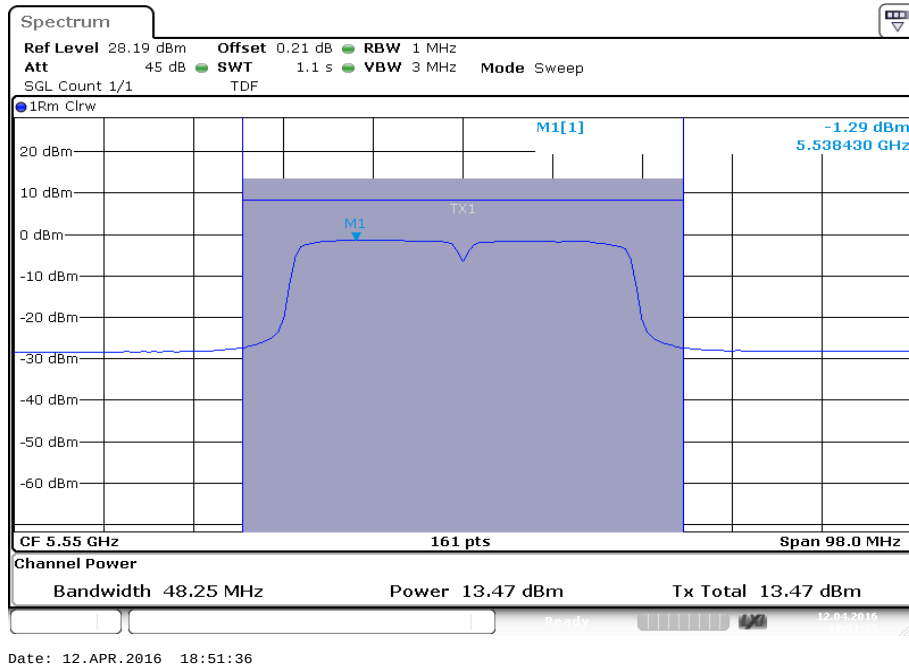


Plot 7: 5630 MHz

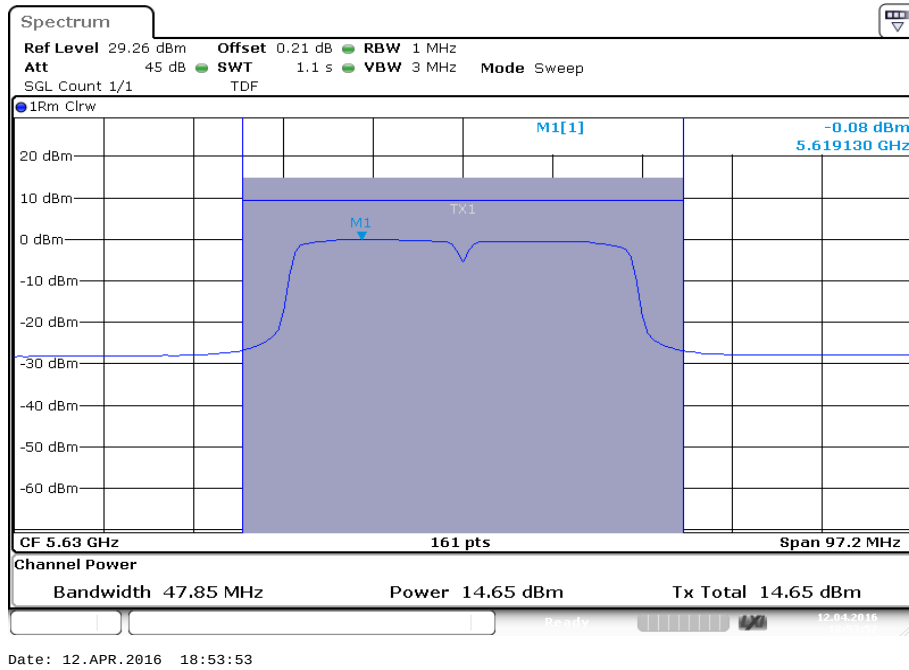


Plot 8: 5670 MHz

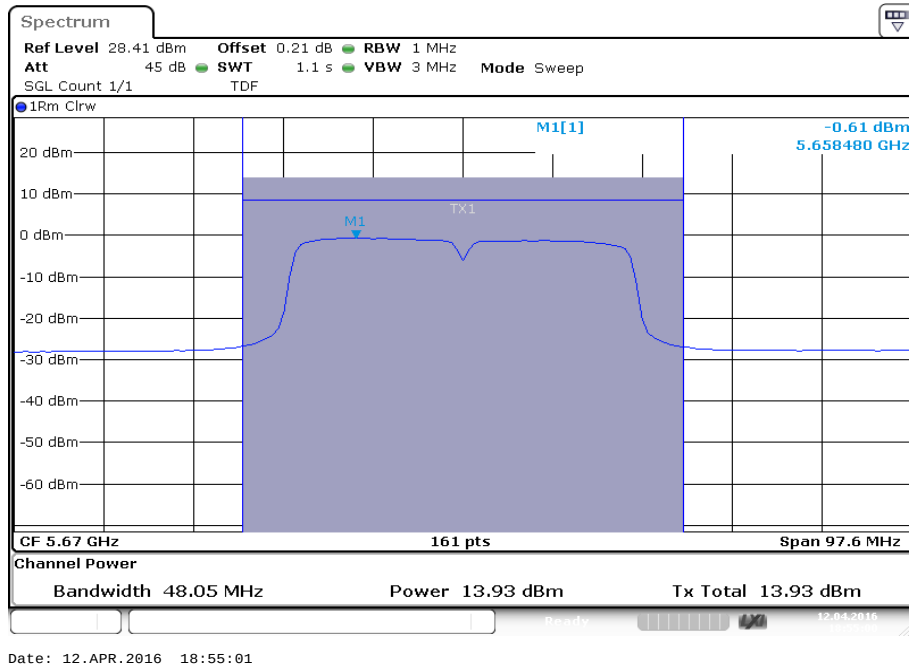


Plot 9: 5755 MHz

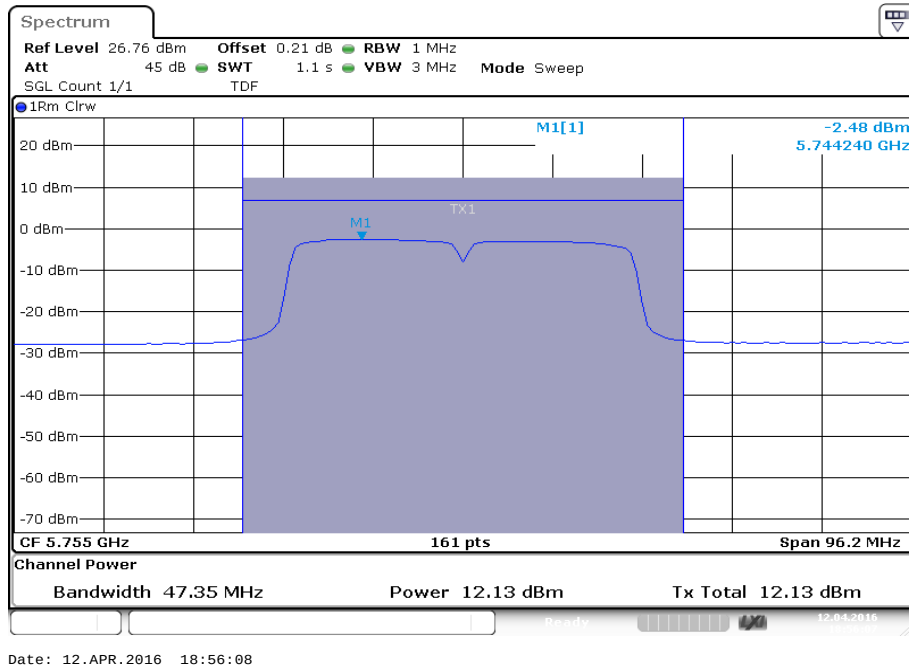


Plot 10: 5795 MHz

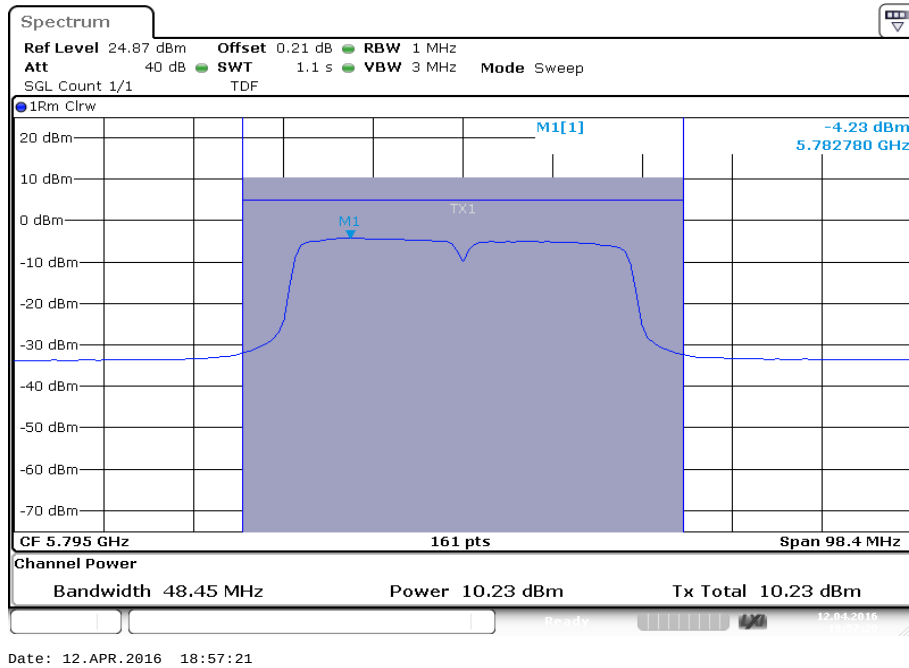


Plot 1: 5180 MHz

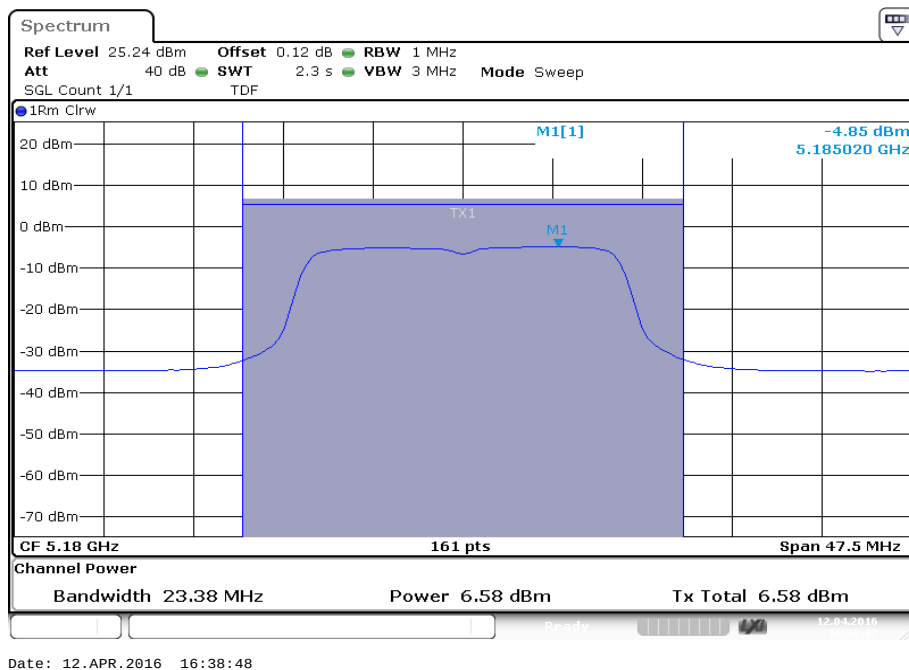


Plot 2: 5200 MHz

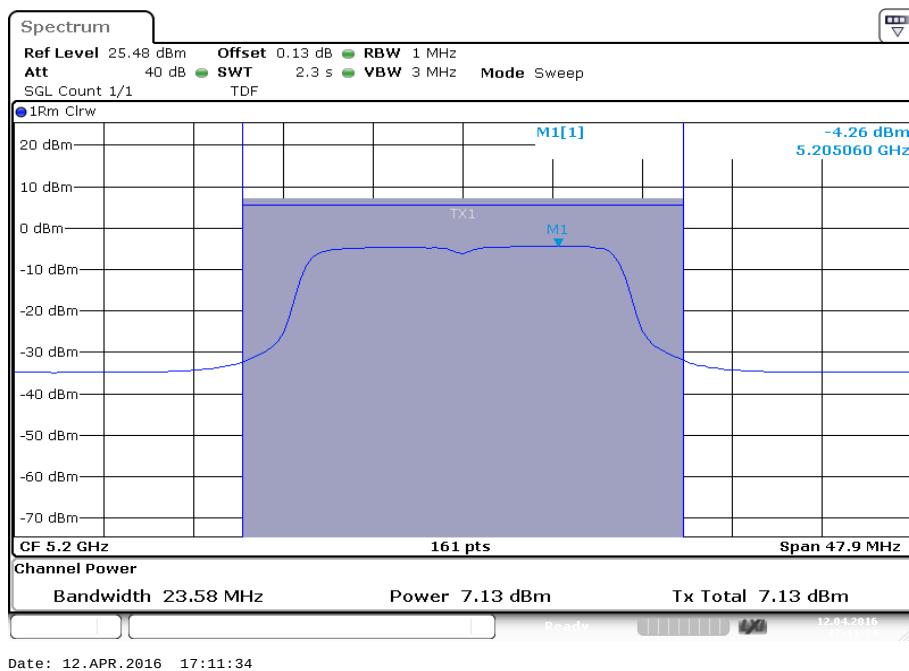


Plot 3: 5300 MHz

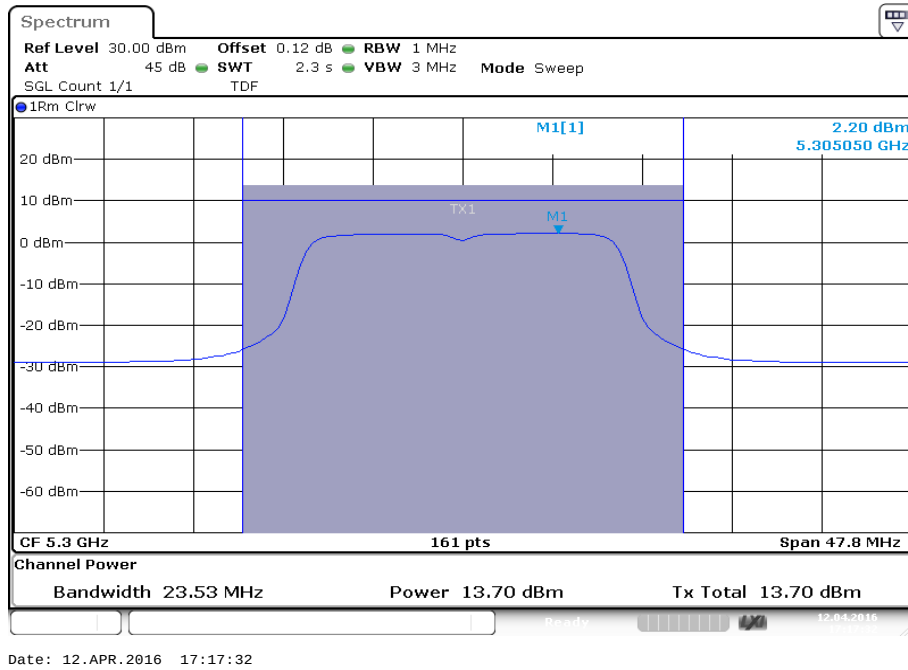


Plot 4: 5320 MHz

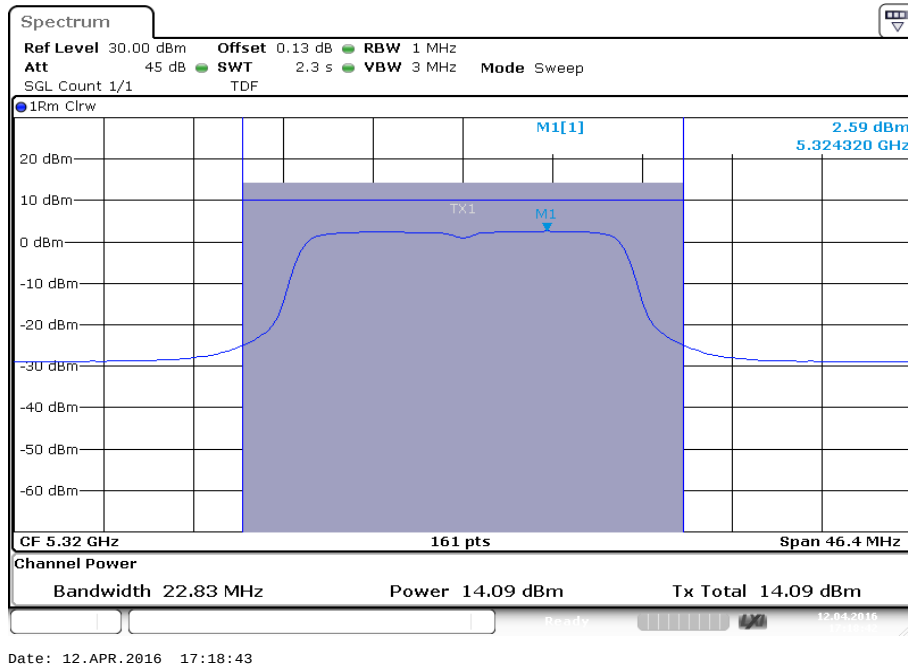


Plot 5: 5500 MHz

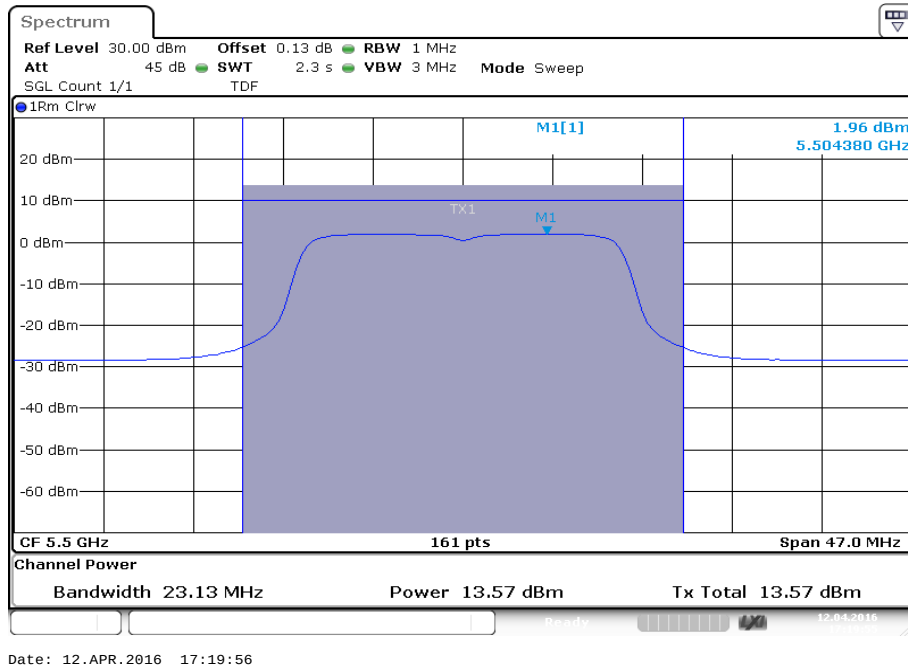


Plot 6: 5600 MHz

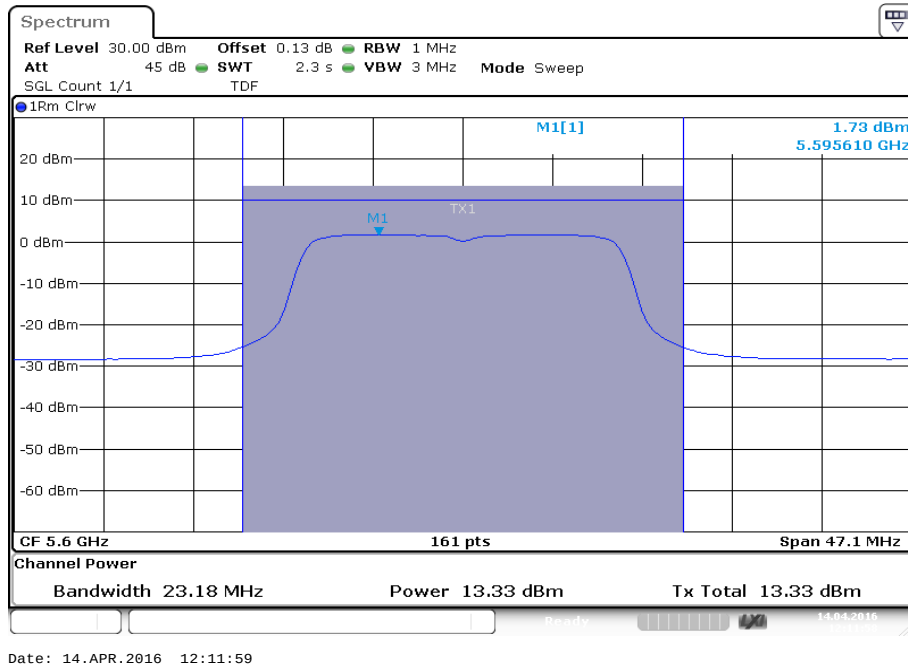


Plot 7: 5700 MHz

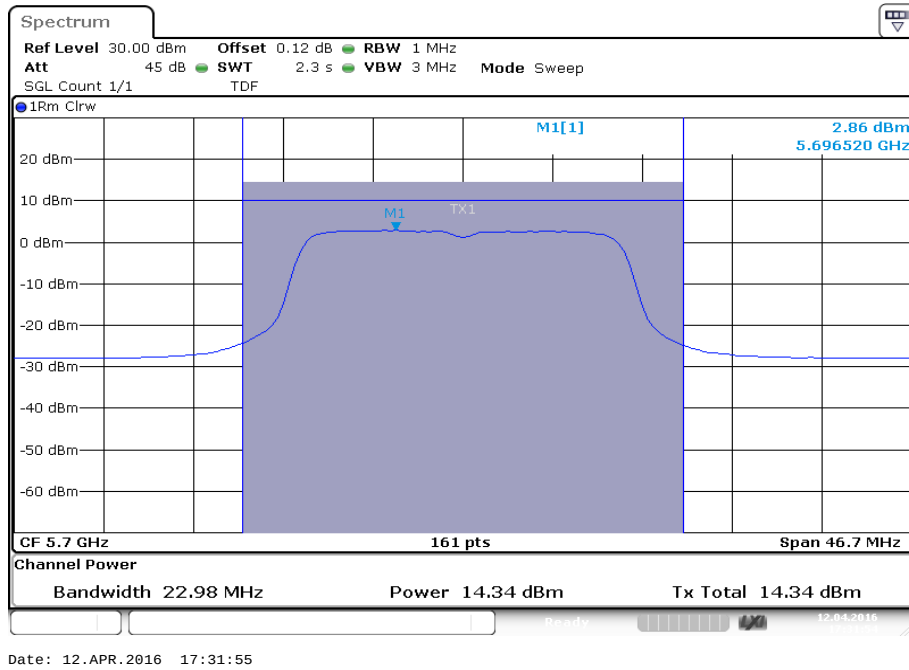


Plot 8: 5745 MHz

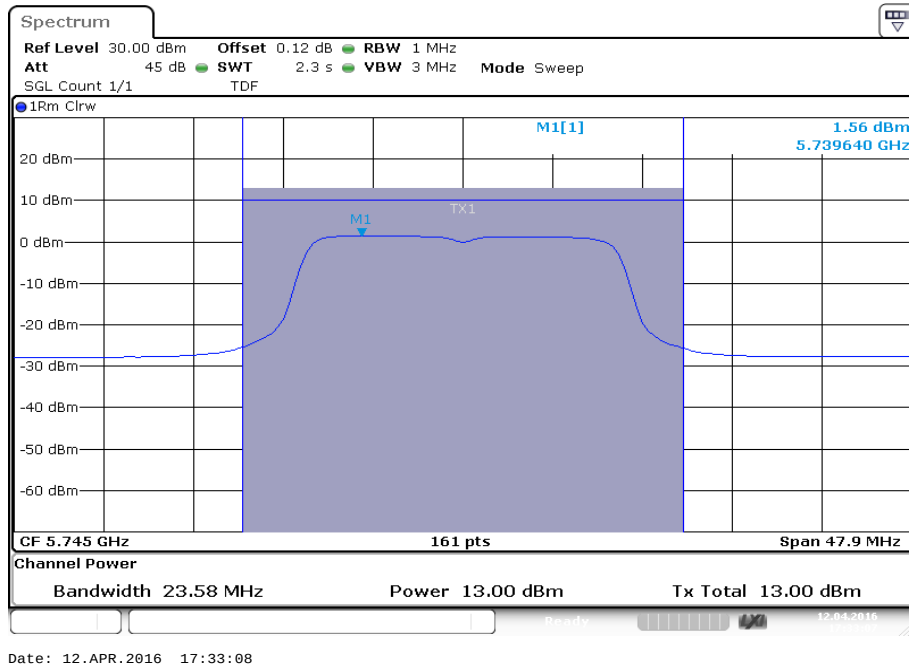


Plot 9: 5765 MHz

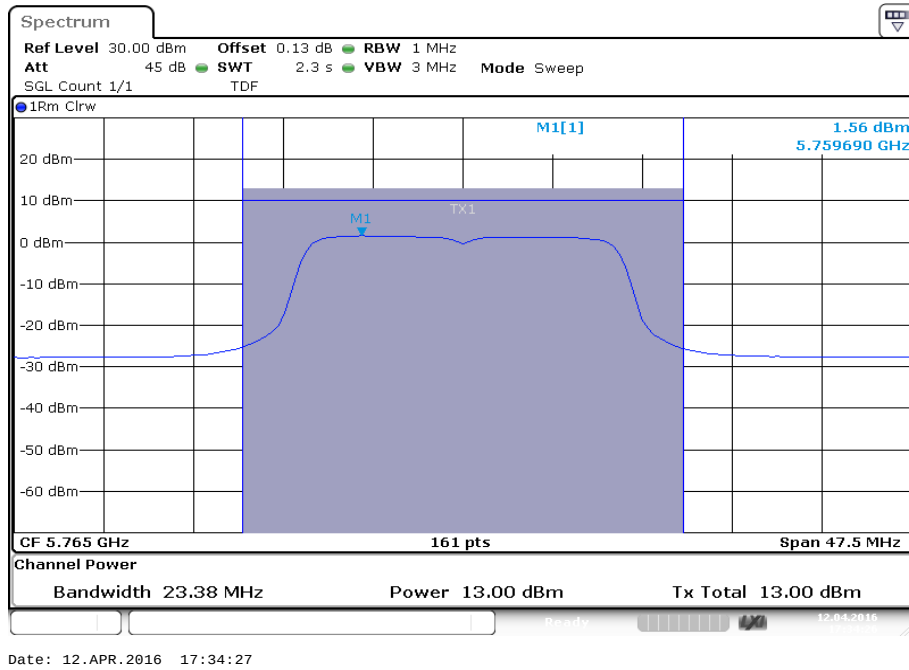

Plot 10: 5805 MHz

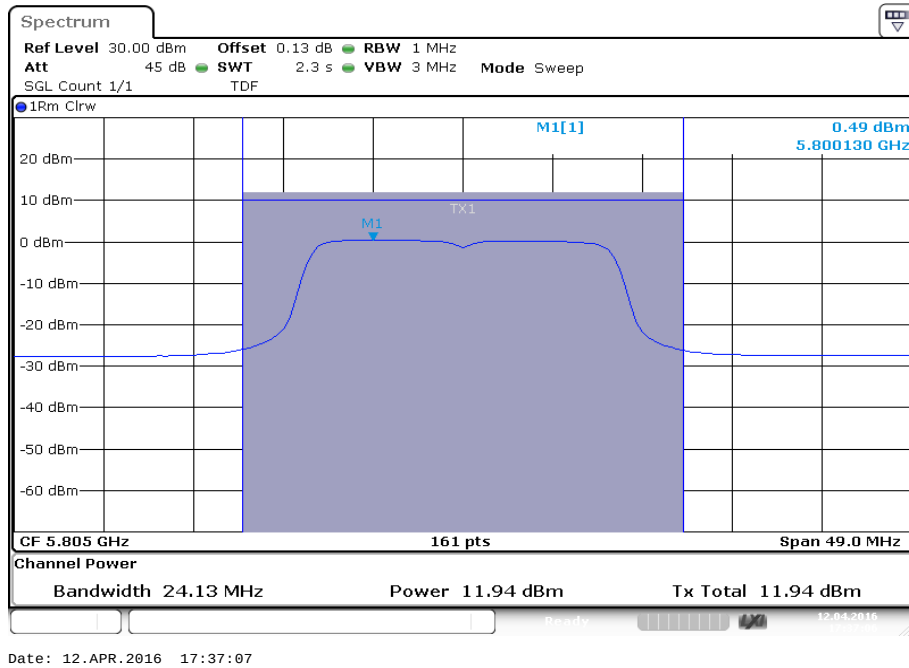


Plot 11: 5825 MHz

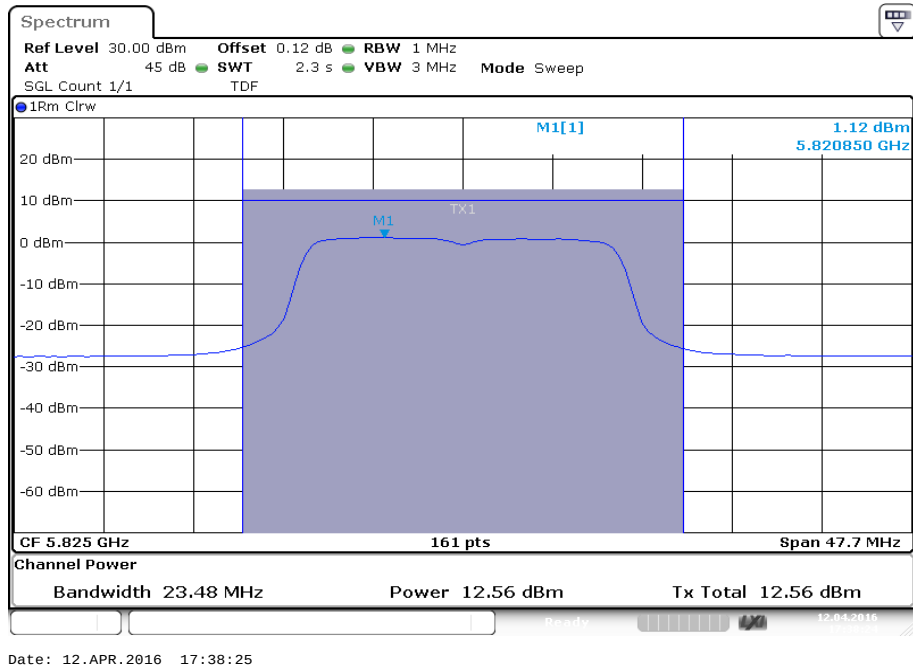


Plots: OFDM / n HT20 – mode, antenna port 2


Plot 1: 5180 MHz

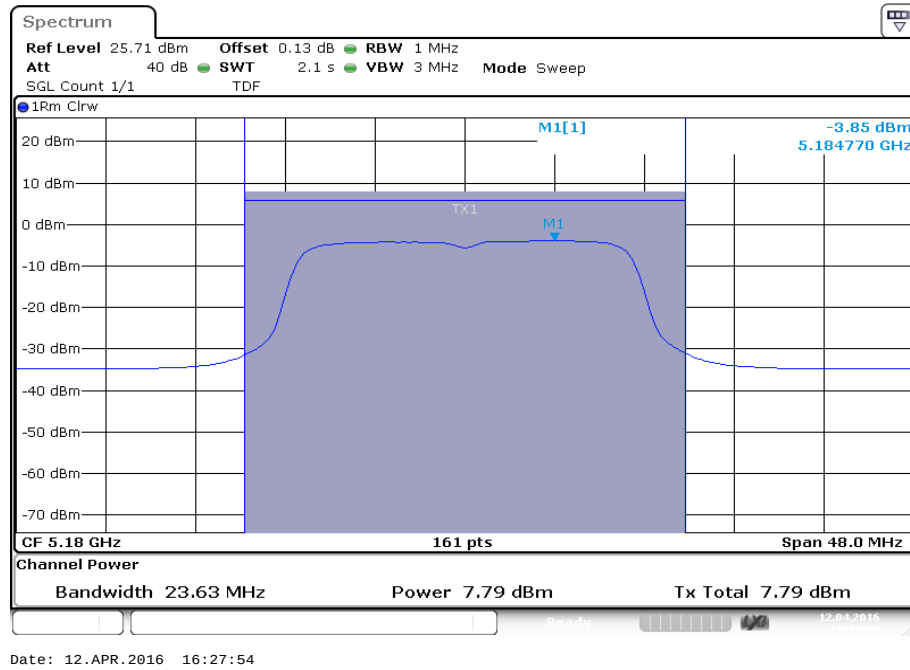


Plot 2: 5200 MHz

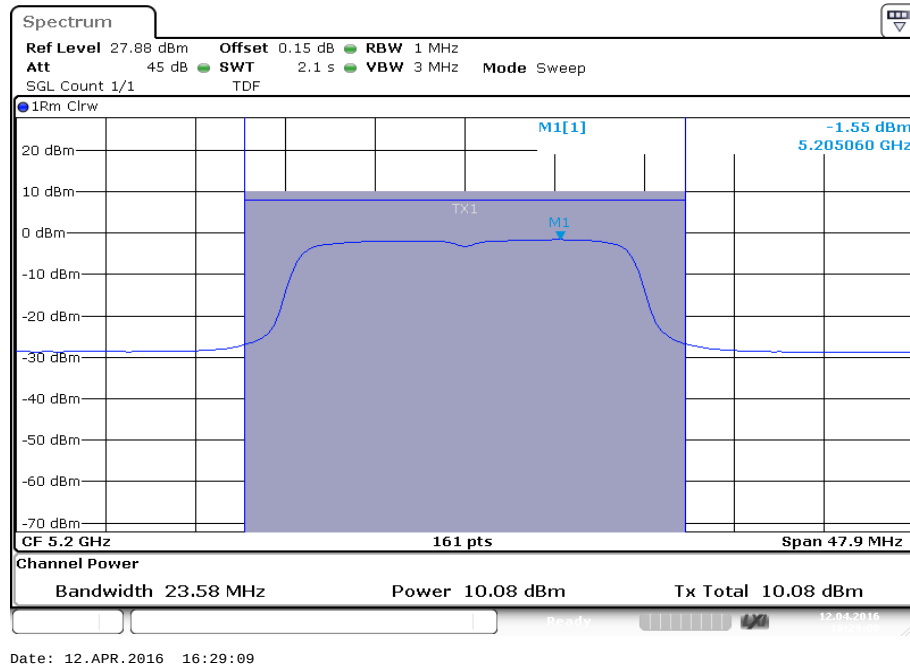


Plot 3: 5300 MHz

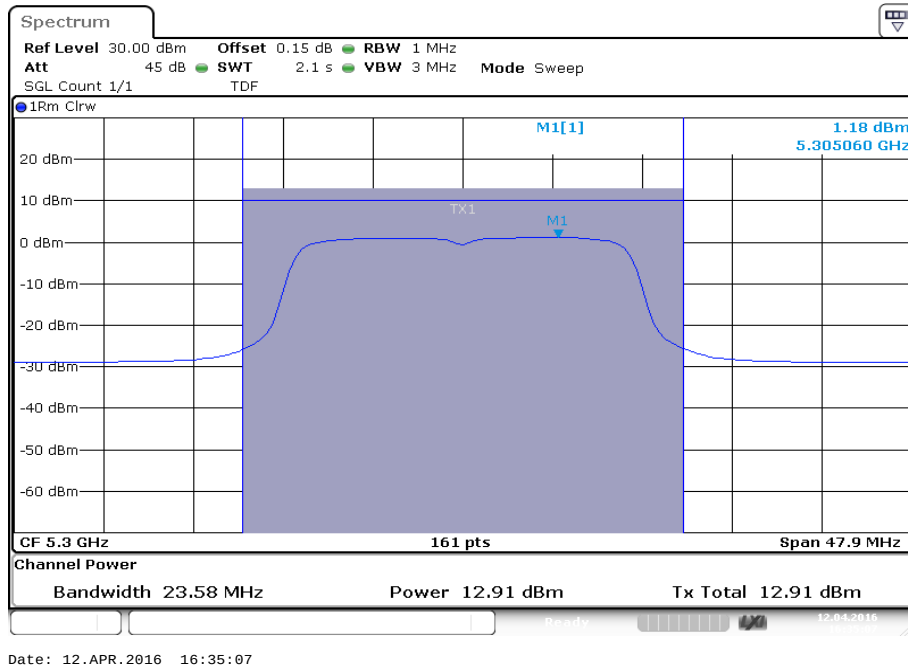


Plot 4: 5320 MHz

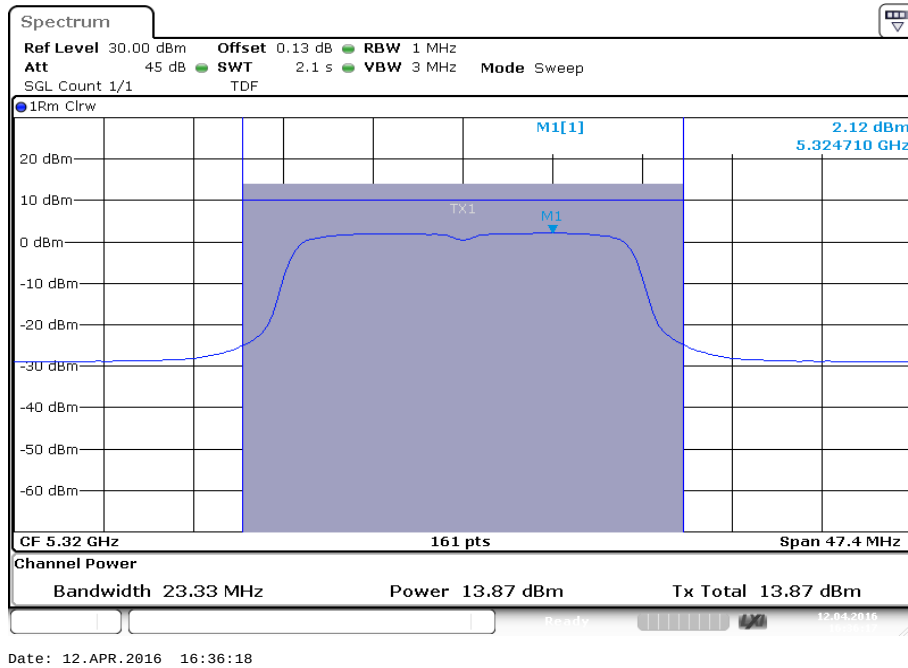


Plot 5: 5500 MHz

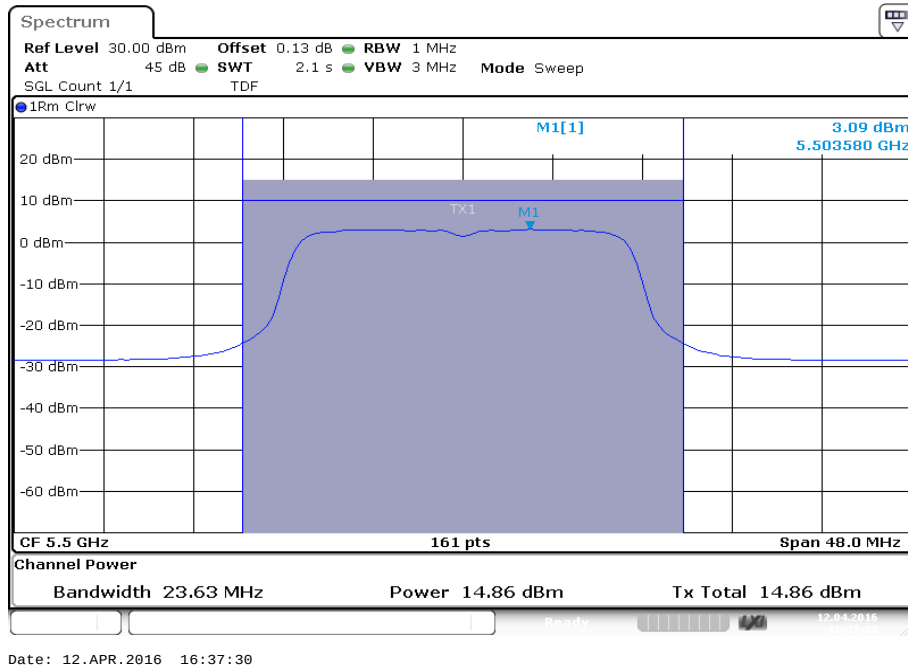


Plot 6: 5600 MHz

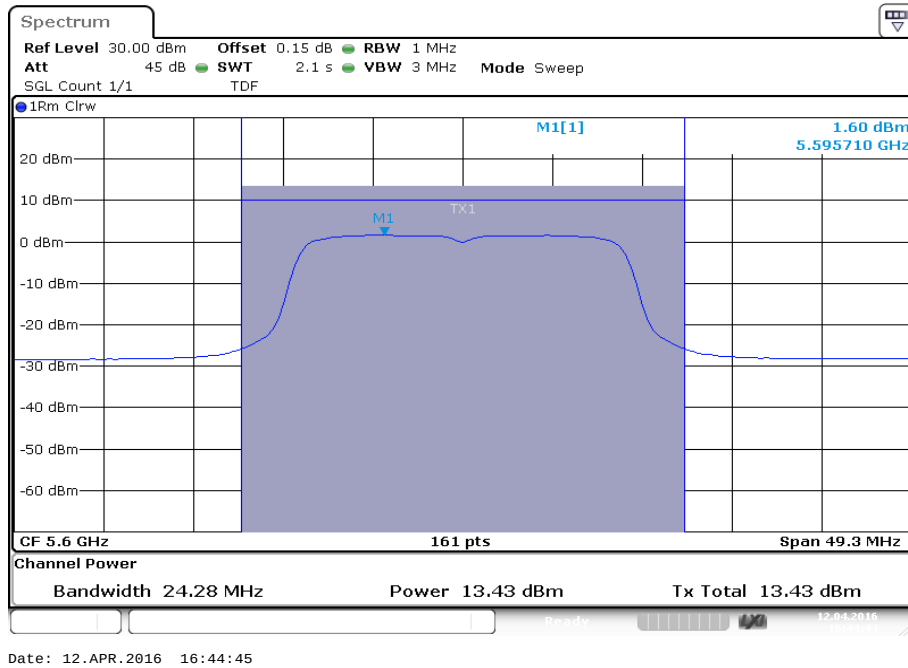


Plot 7: 5700 MHz

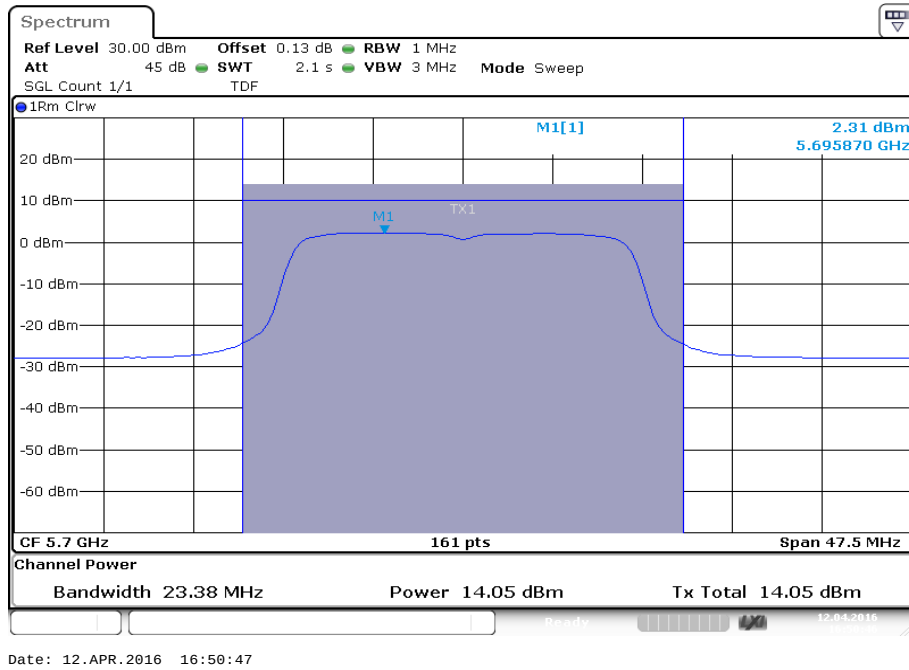


Plot 8: 5745 MHz

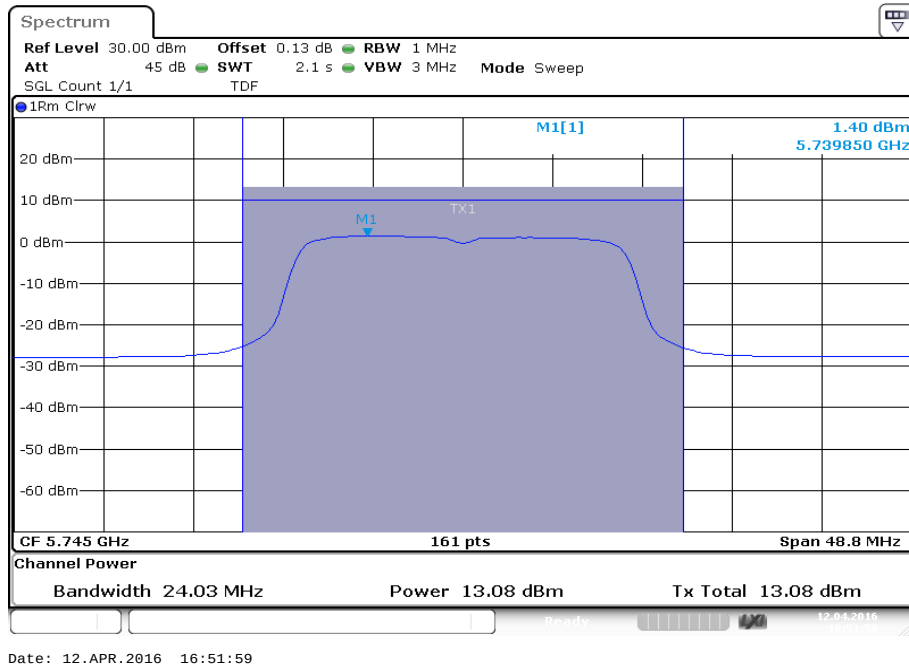


Plot 9: 5765 MHz

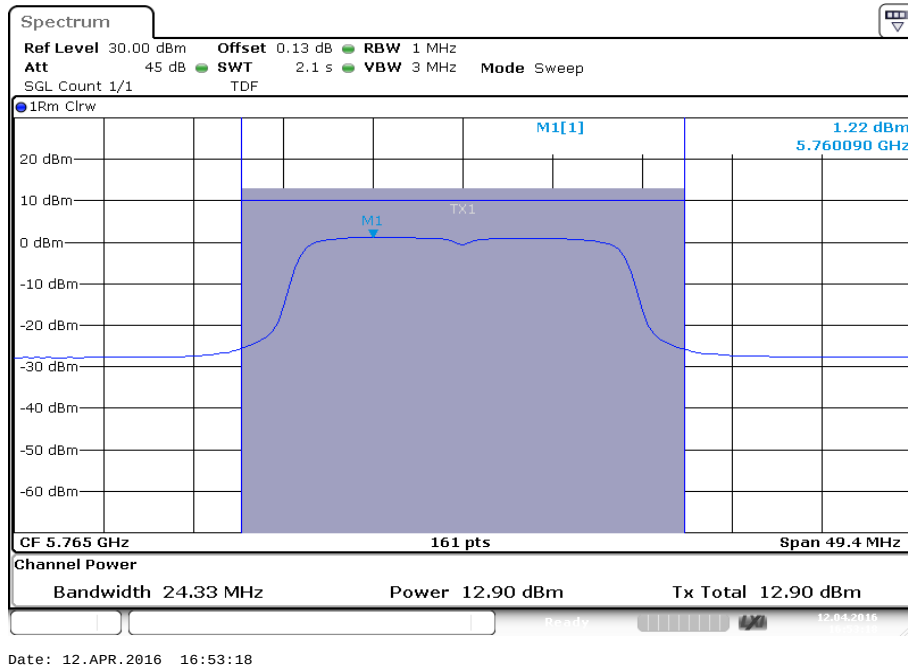

Plot 10: 5805 MHz

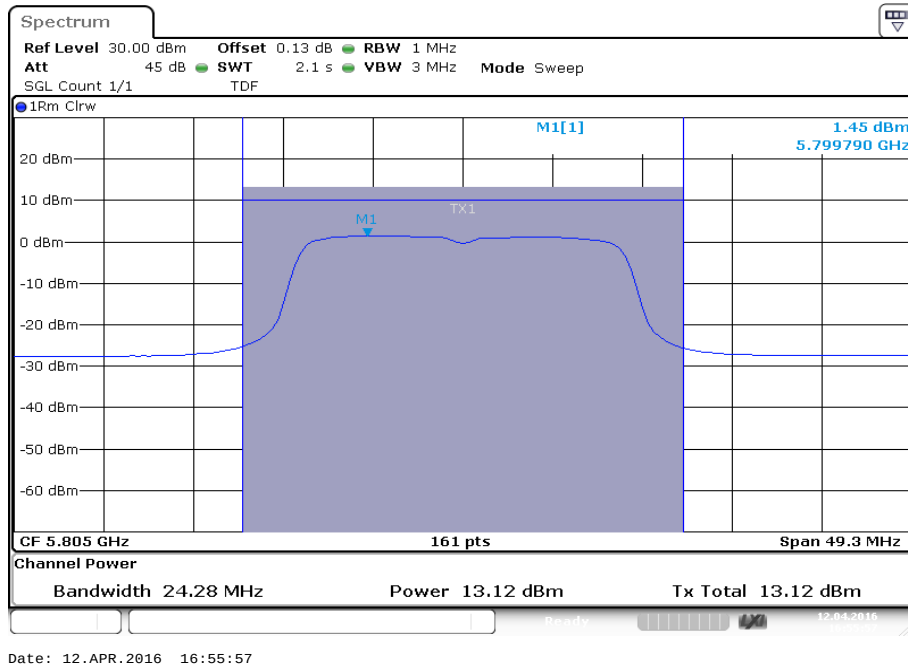


Plot 11: 5825 MHz

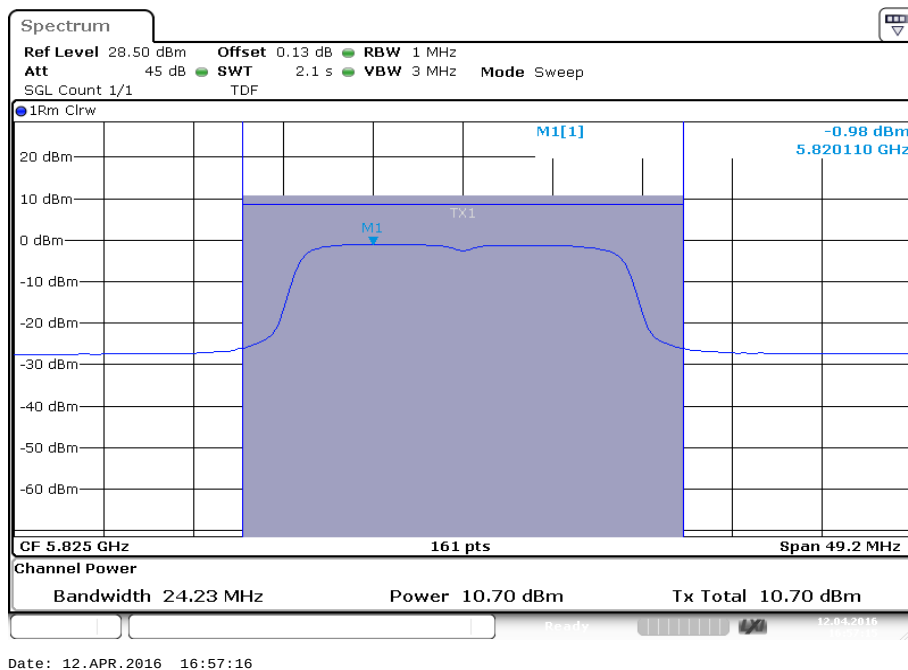


Plots: OFDM / n HT40 – mode, antenna port 2


Plot 1: 5190 MHz

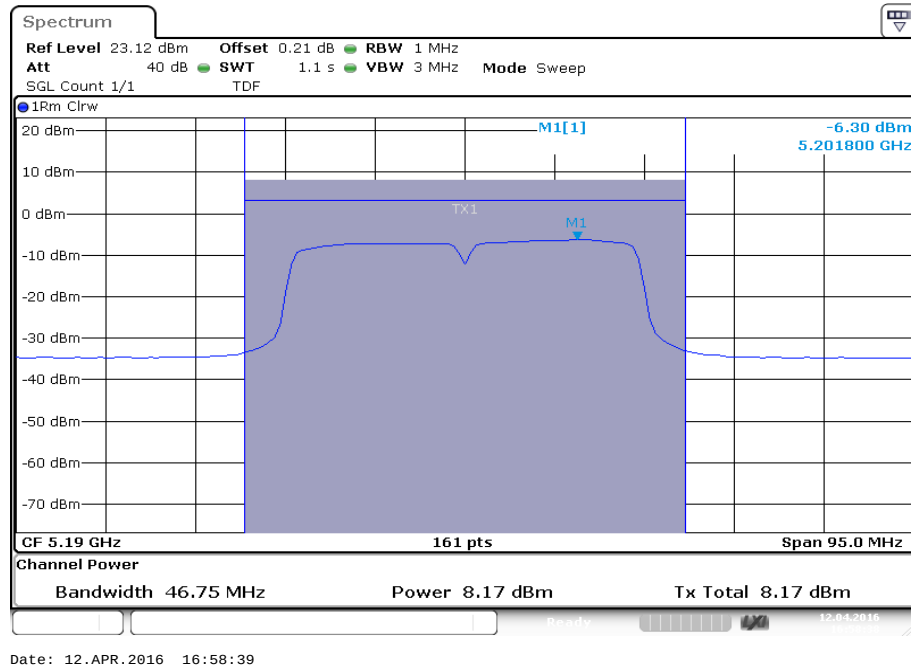


Plot 2: 5230 MHz

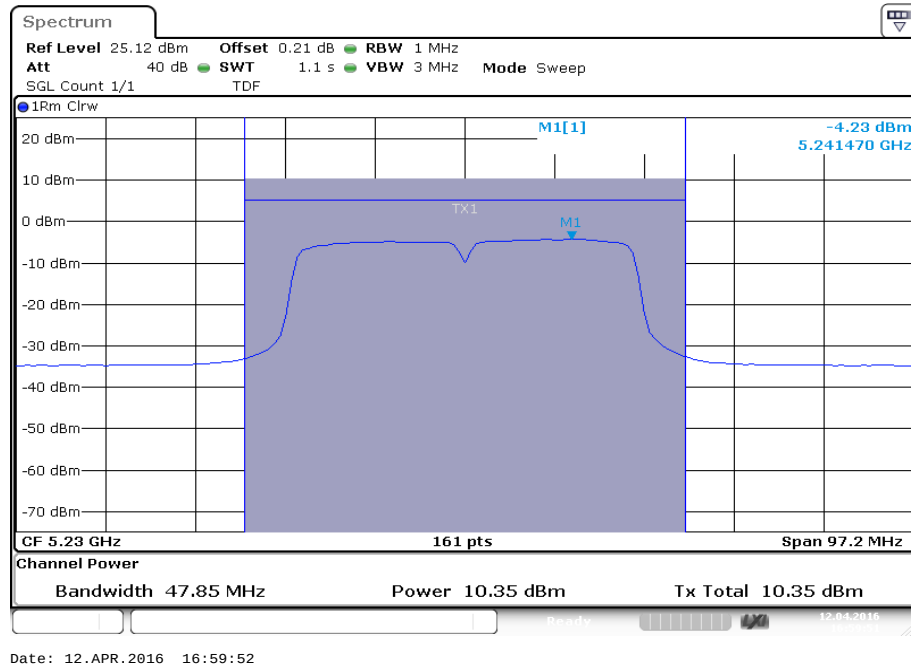


Plot 3: 5270 MHz

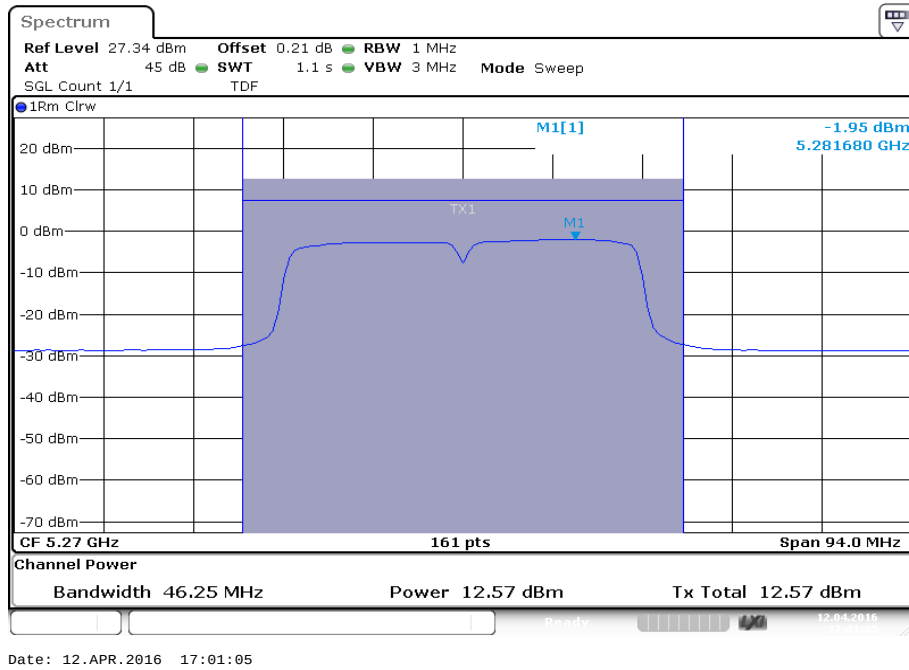


Plot 4: 5310 MHz

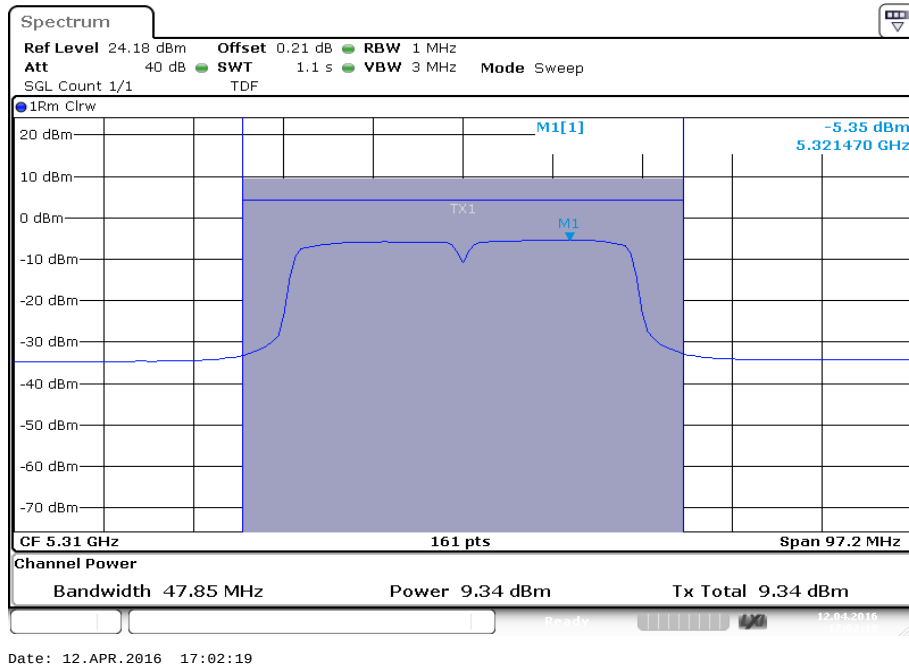


Plot 5: 5510 MHz

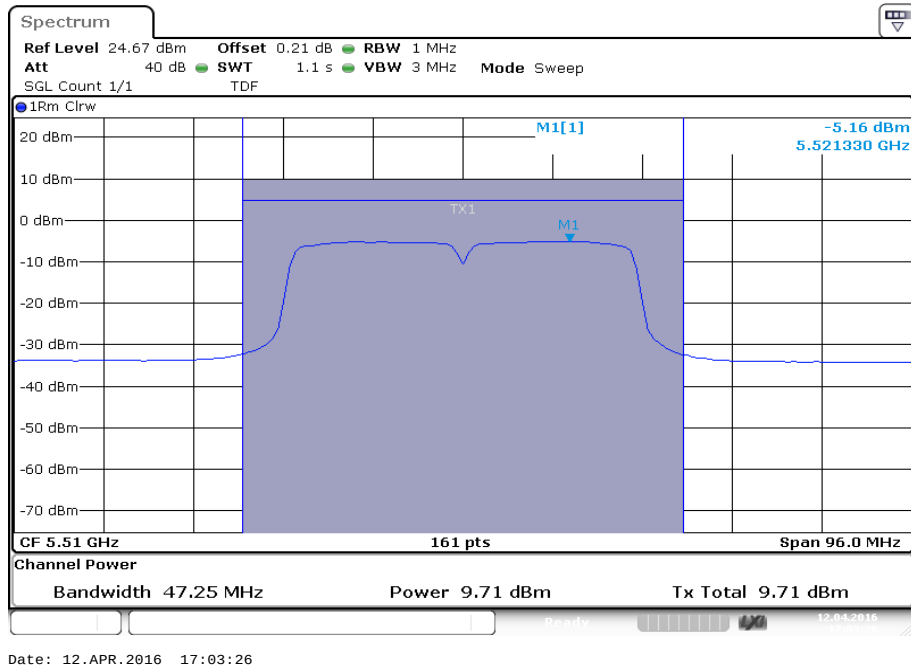


Plot 6: 5550 MHz

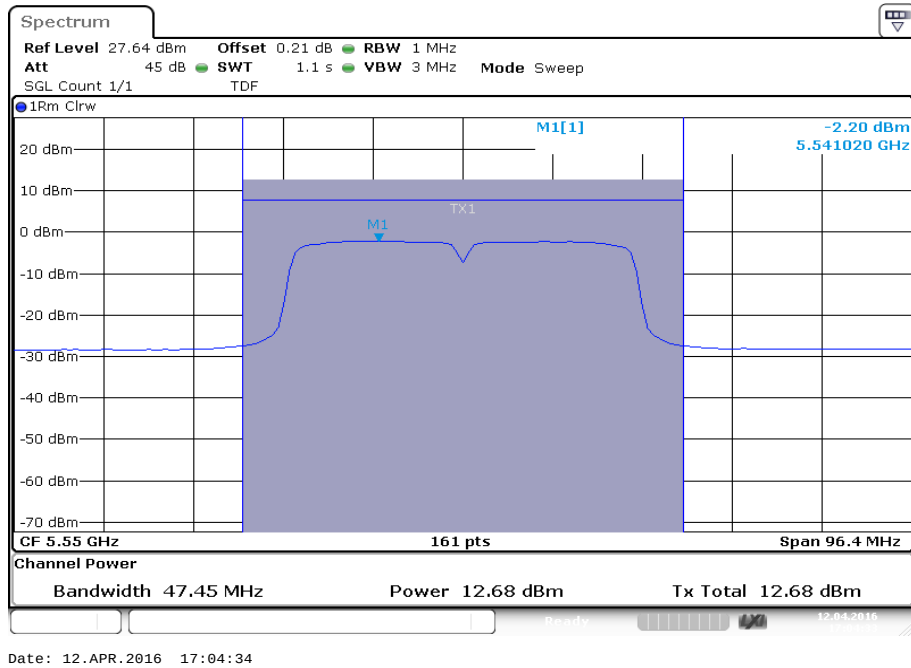


Plot 7: 5630 MHz

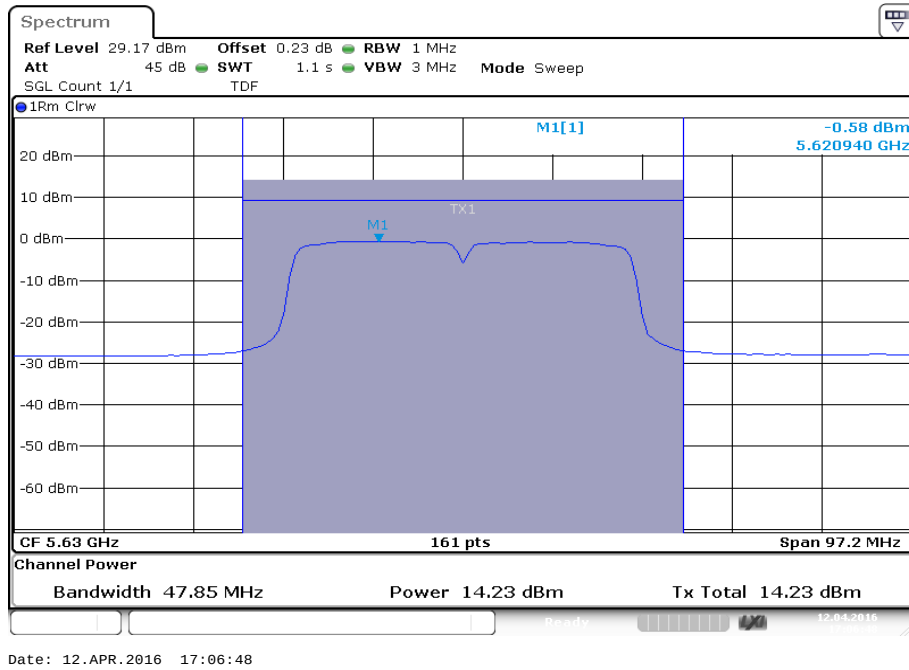


Plot 8: 5670 MHz

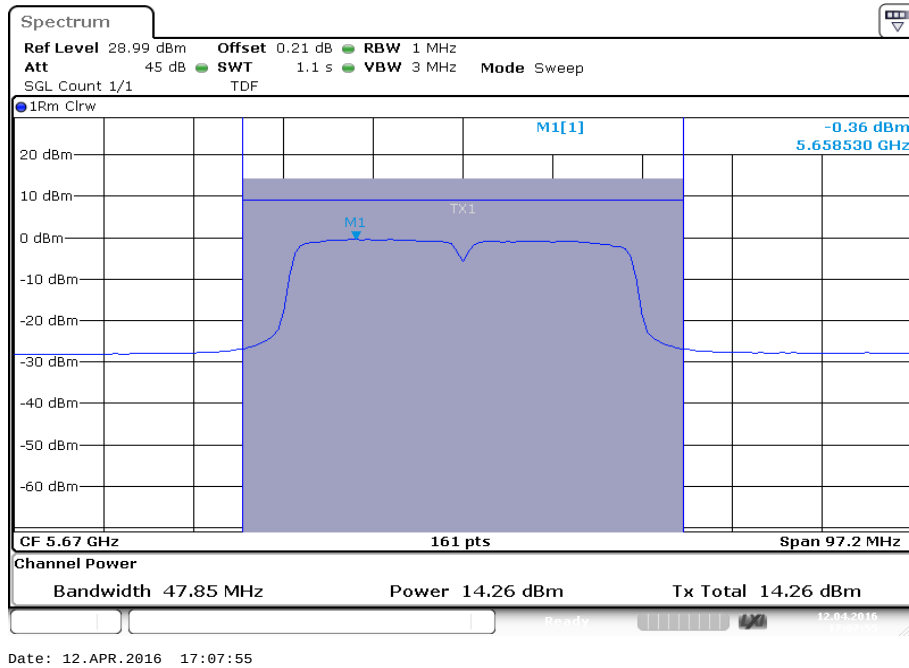

Plot 9: 5755 MHz

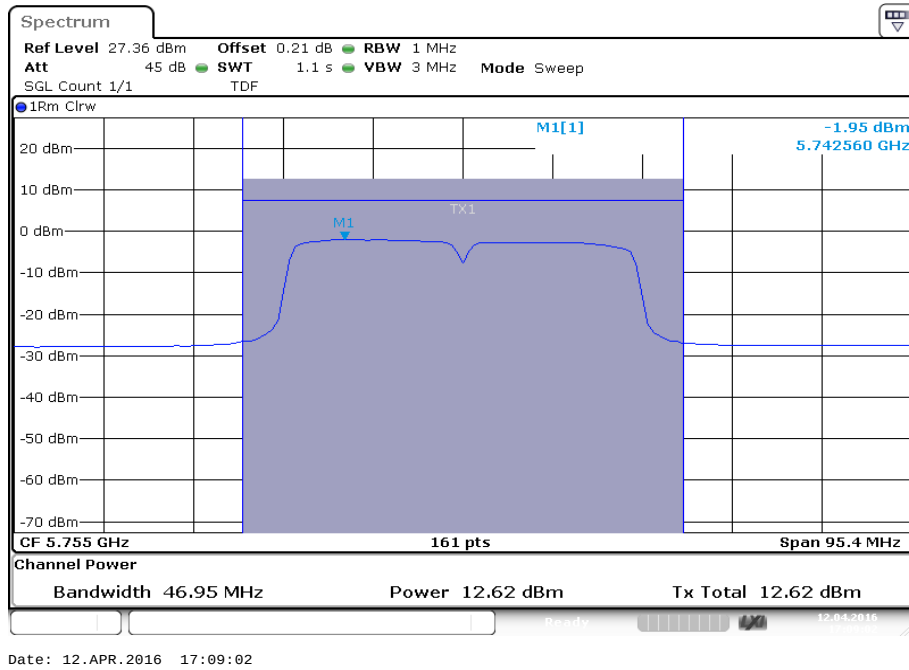


Plot 10: 5795 MHz

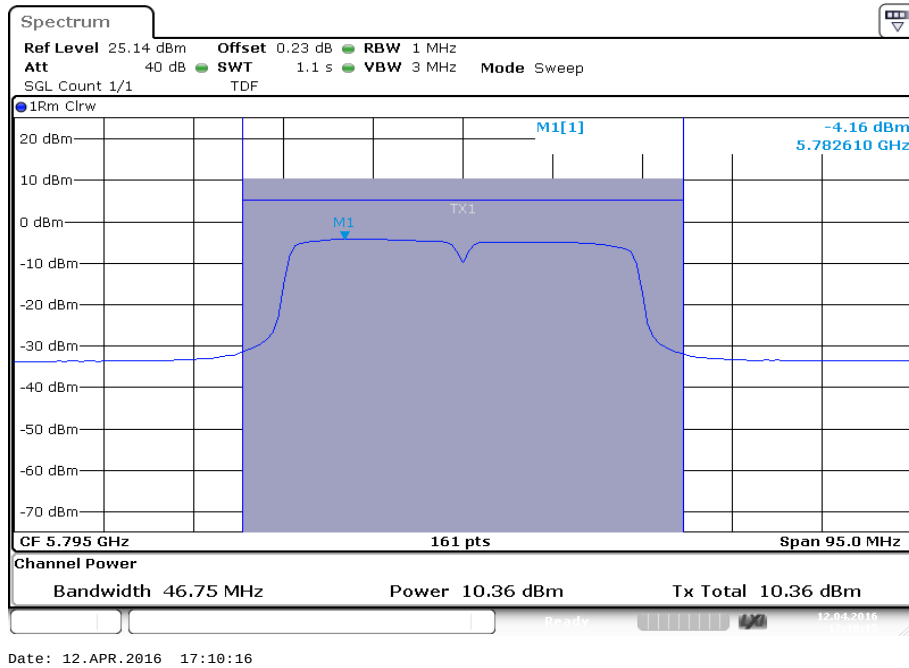


Plots: OFDM / a – mode, antenna port 3


Plot 1: 5180 MHz

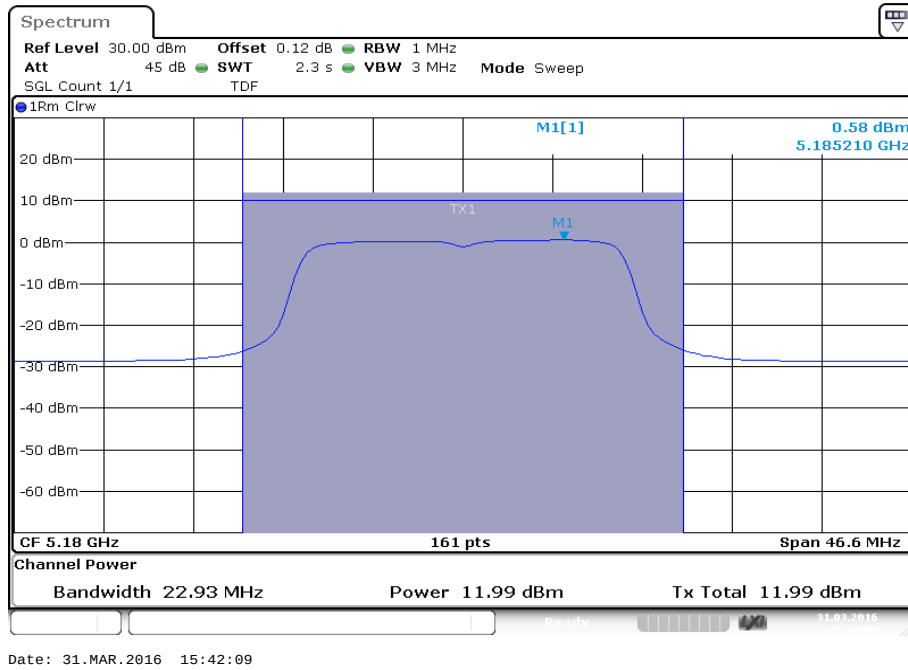


Plot 2: 5200 MHz

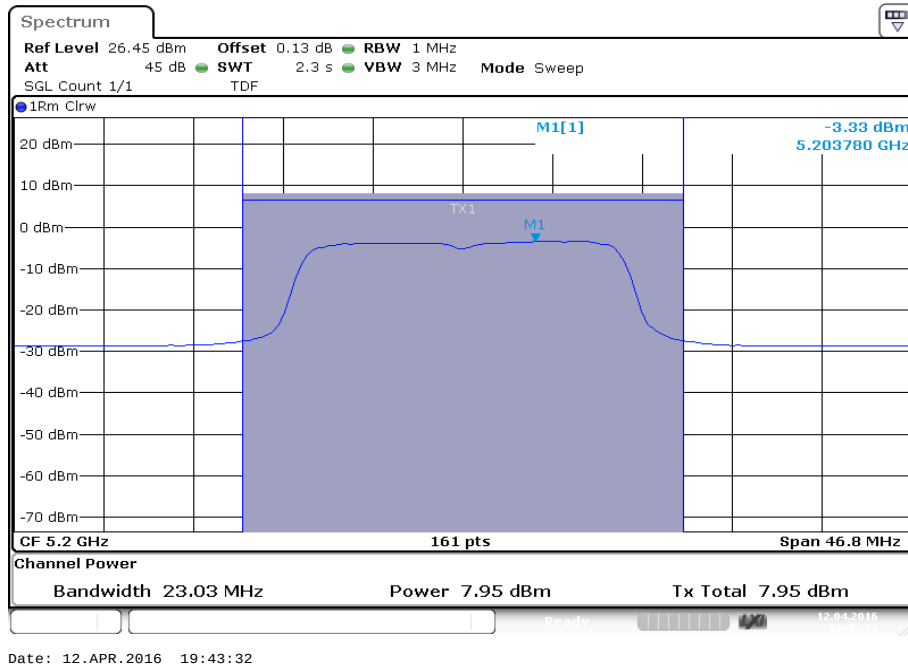


Plot 3: 5300 MHz

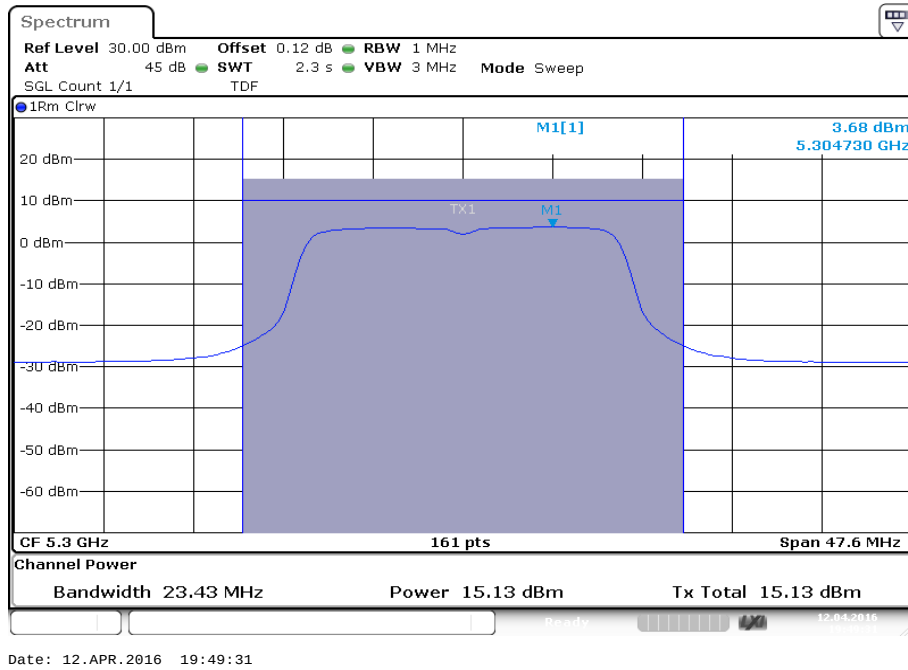


Plot 4: 5320 MHz

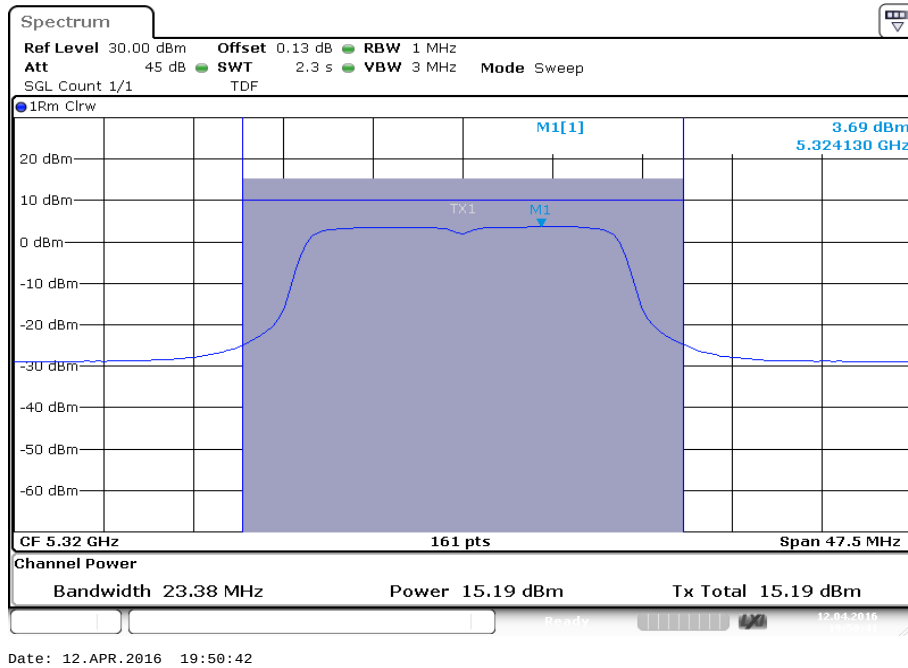


Plot 5: 5500 MHz

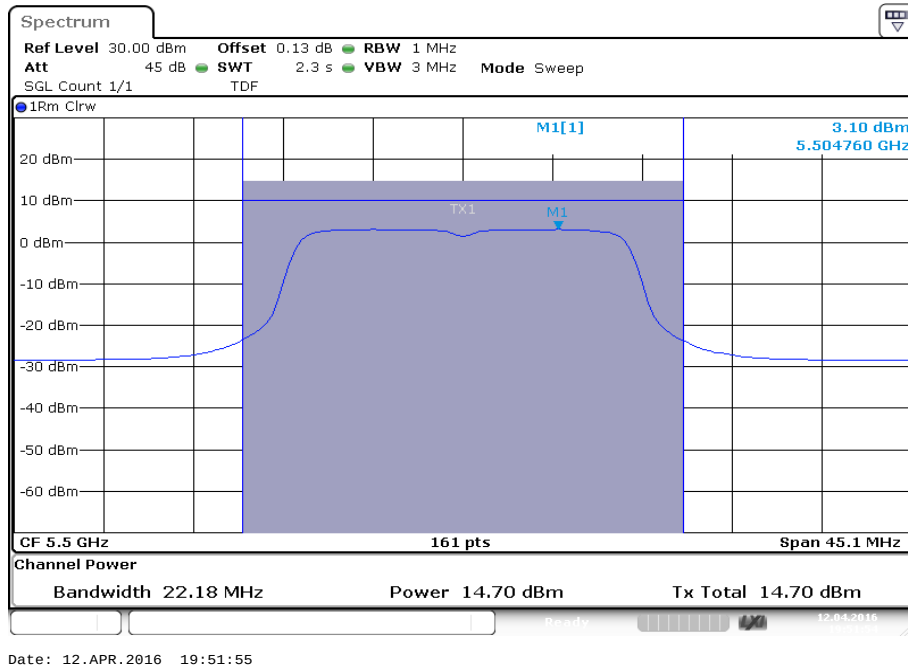


Plot 6: 5600 MHz

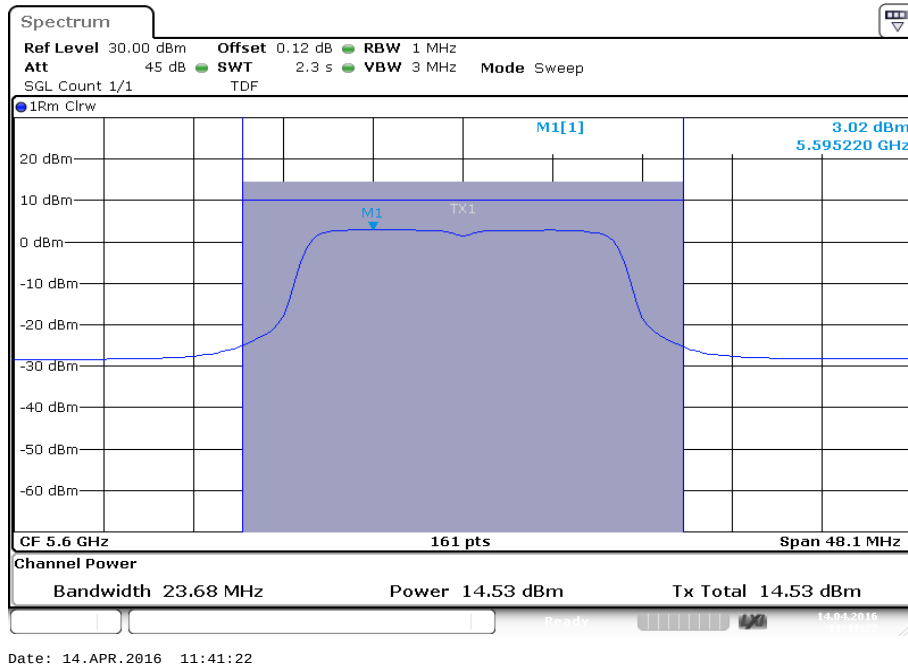


Plot 7: 5700 MHz

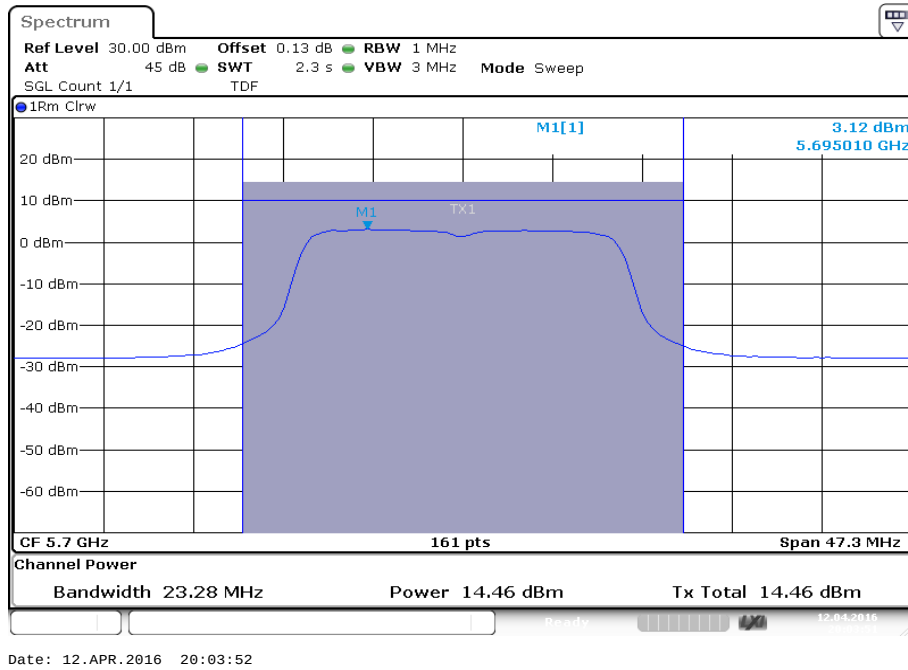


Plot 8: 5745 MHz

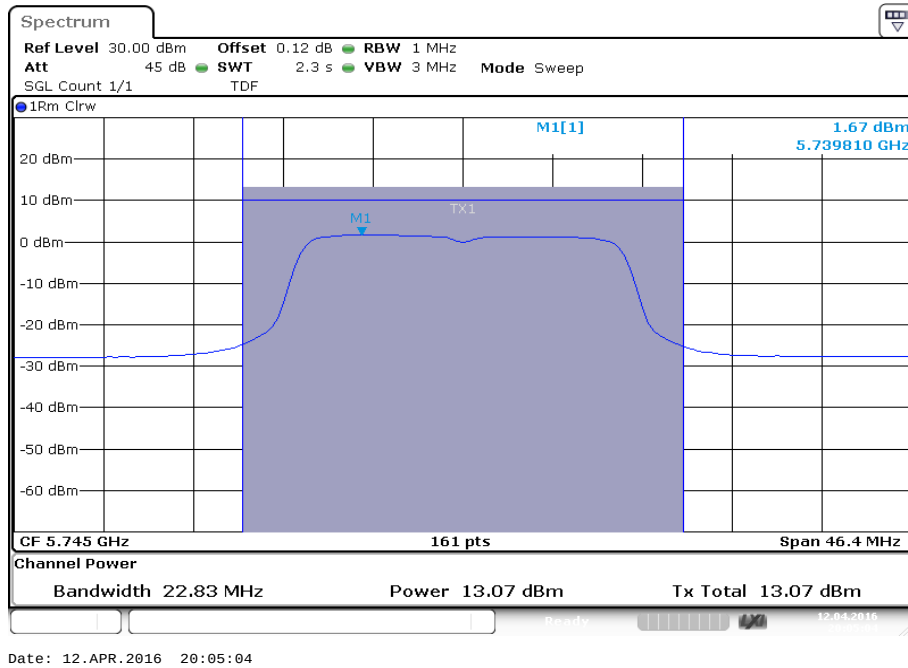


Plot 9: 5765 MHz

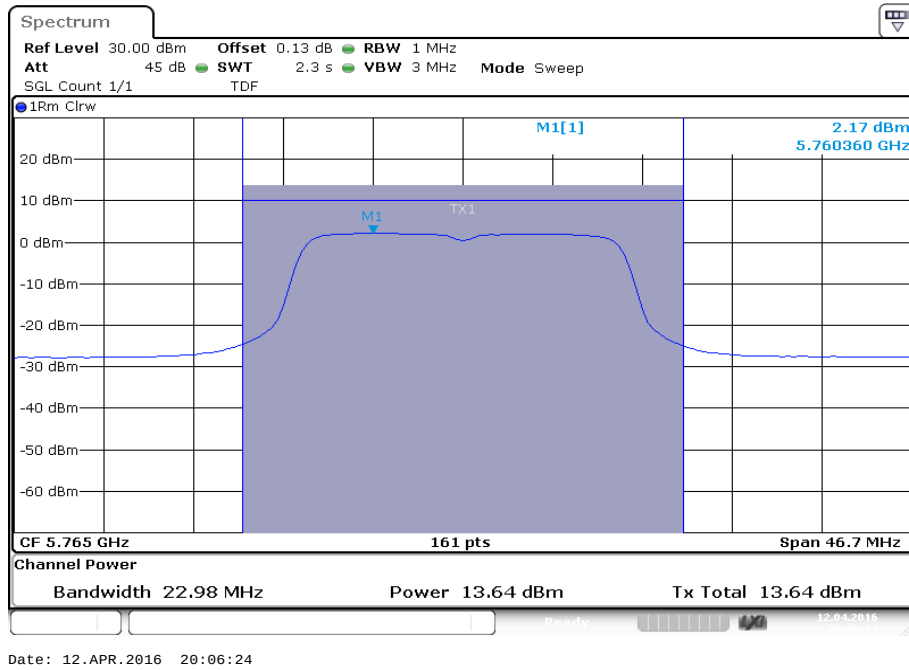

Plot 10: 5805 MHz

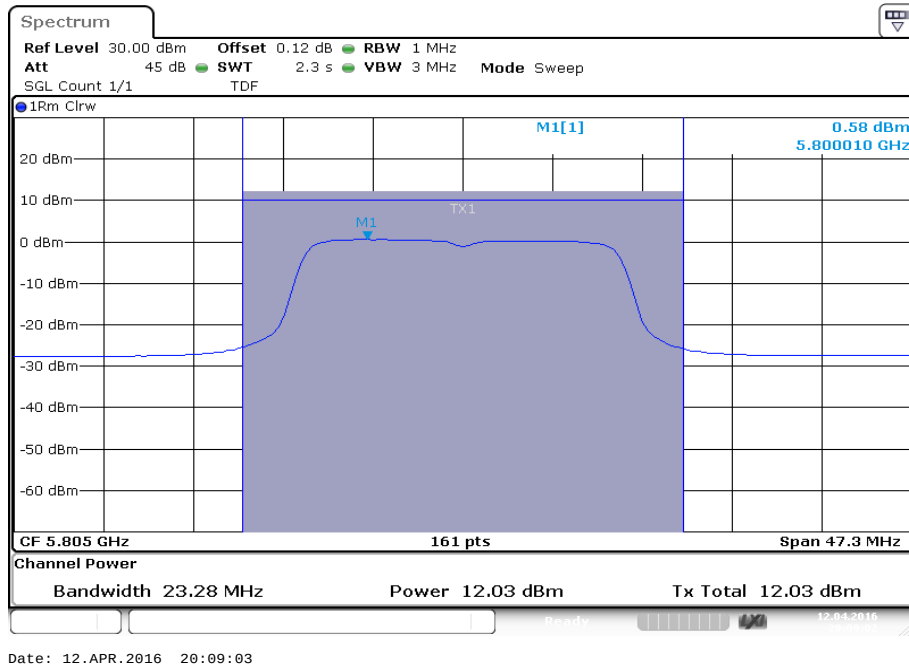


Plot 11: 5825 MHz

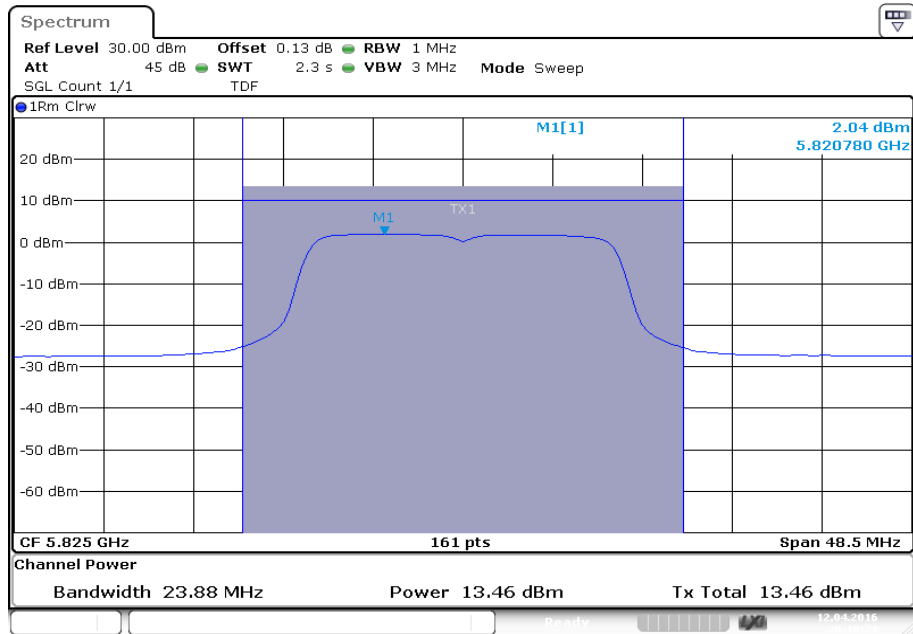


Date: 12.APR.2016 20:10:21

Plots: OFDM / n HT20 – mode, antenna port 3


Plot 1: 5180 MHz

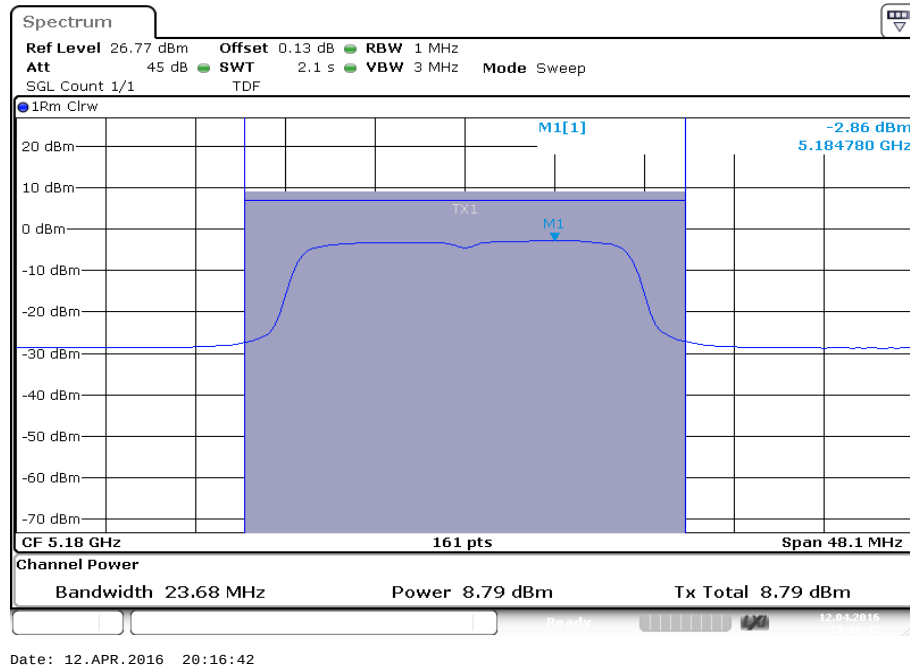


Plot 2: 5200 MHz

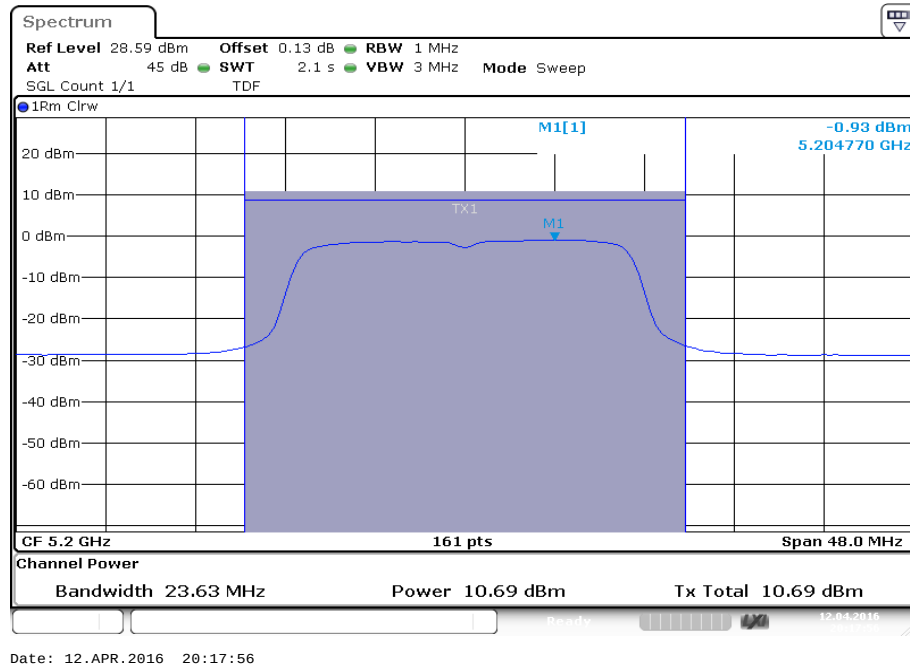


Plot 3: 5300 MHz

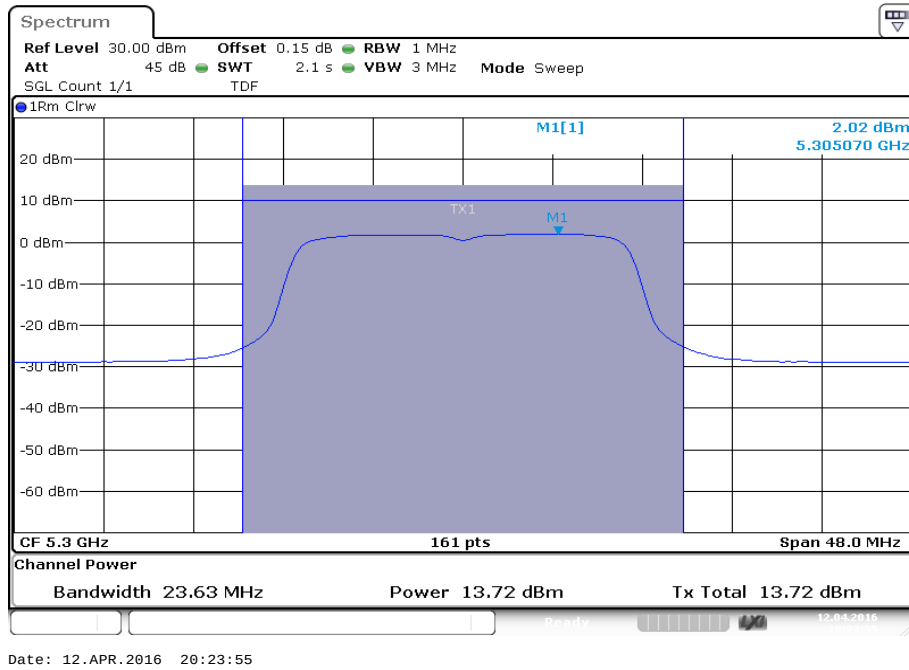


Plot 4: 5320 MHz

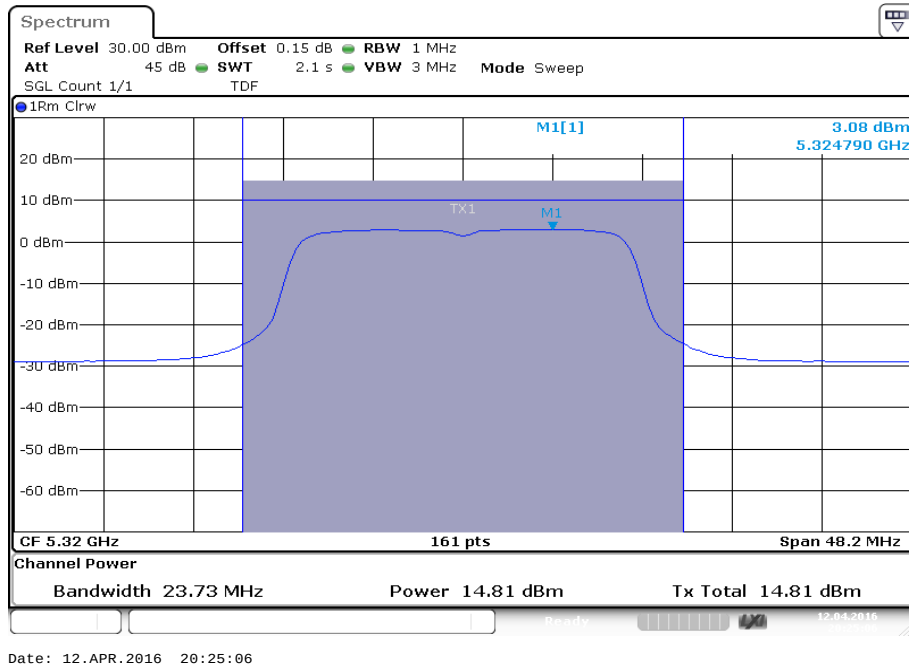


Plot 5: 5500 MHz




Plot 6: 5600 MHz




Plot 7: 5700 MHz

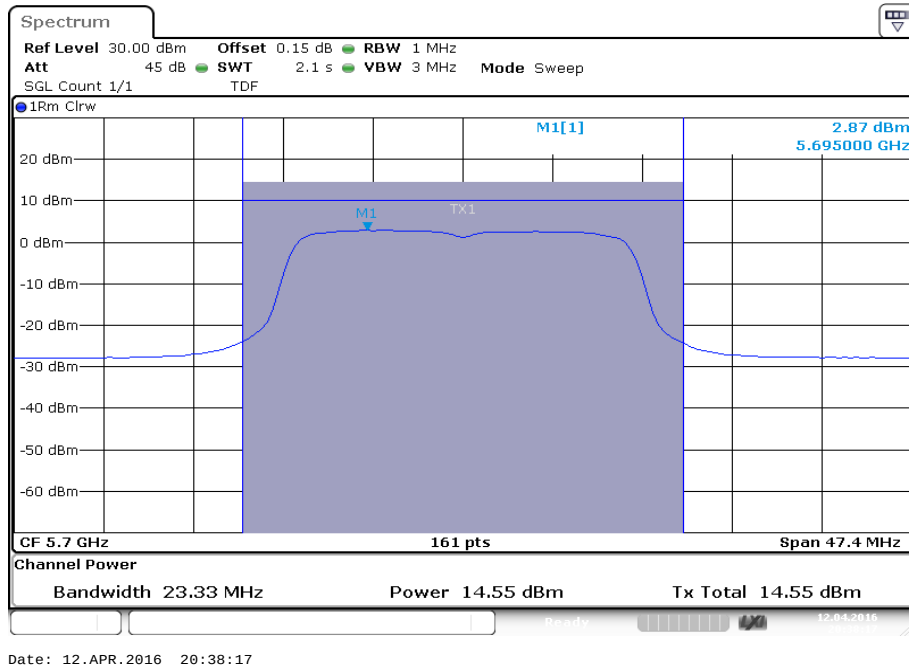


Plot 8: 5745 MHz

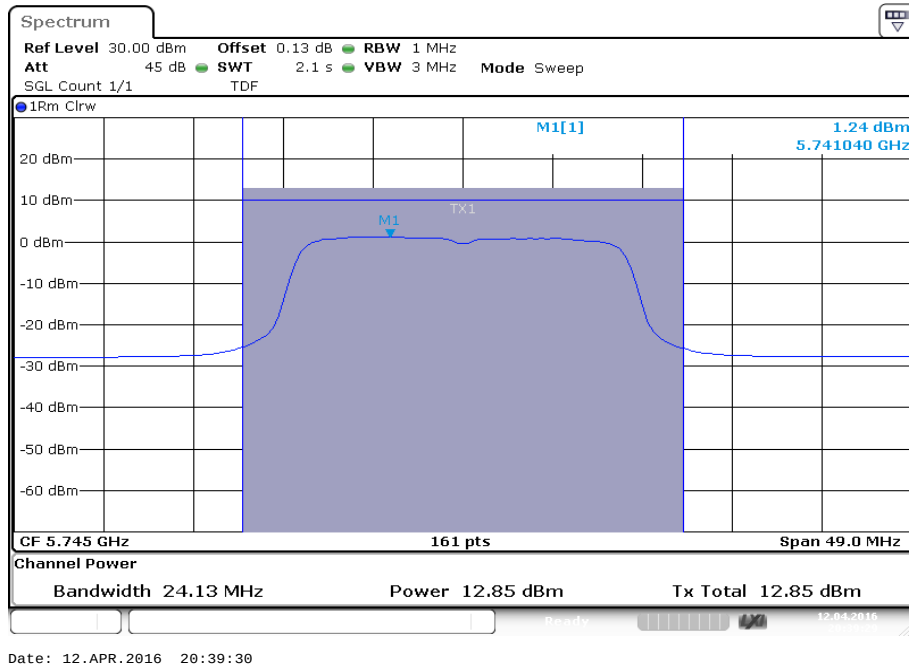


Plot 9: 5765 MHz

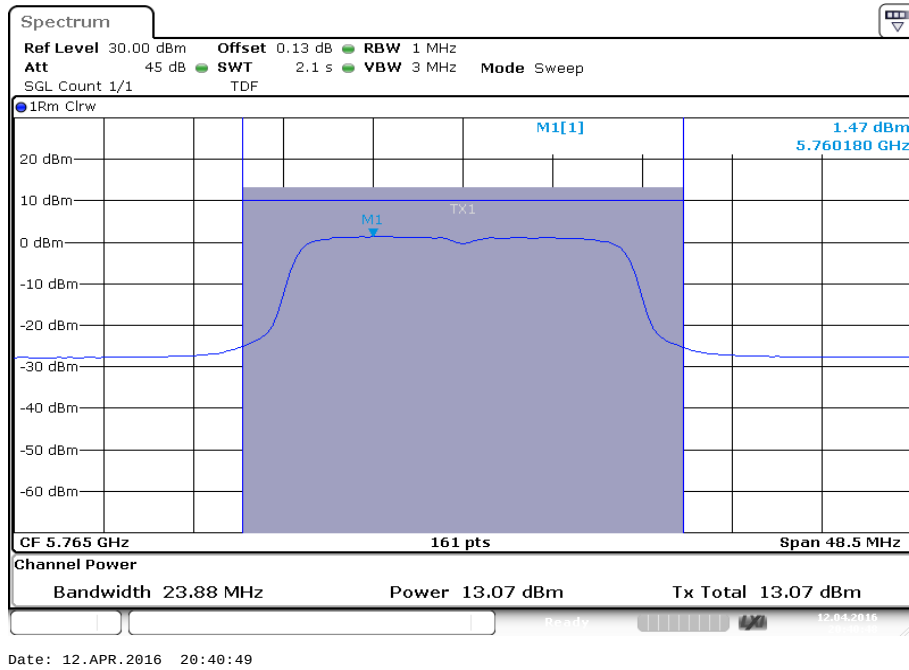

Plot 10: 5805 MHz

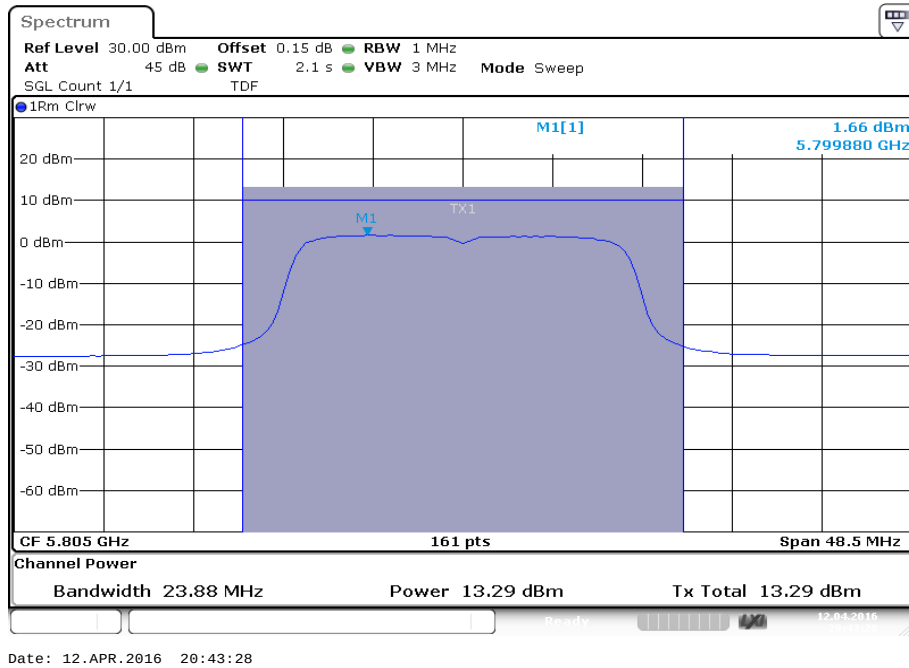


Plot 11: 5825 MHz

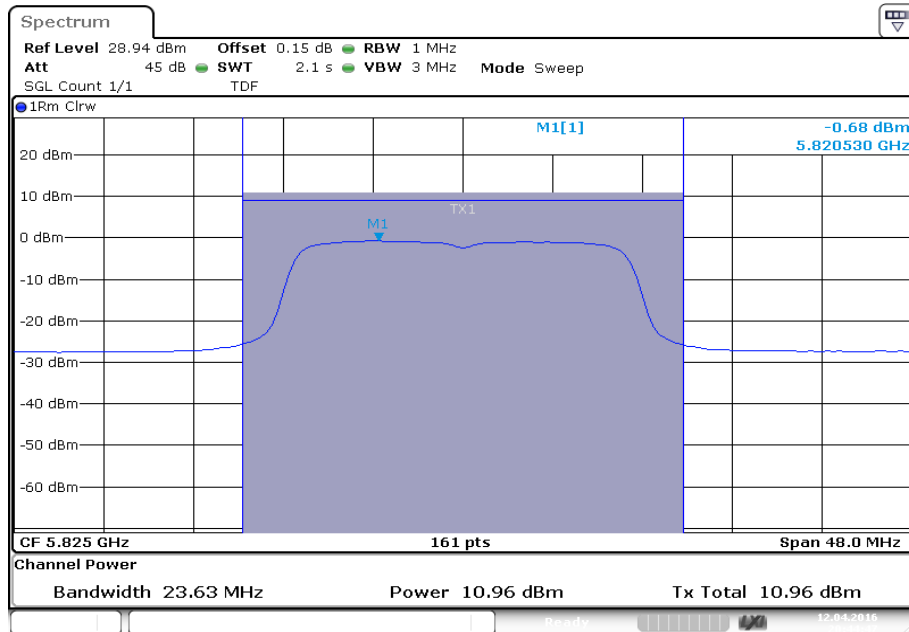


Date: 12.APR.2016 20:44:47

Plots: OFDM / n HT40 – mode, antenna port 3


Plot 1: 5190 MHz

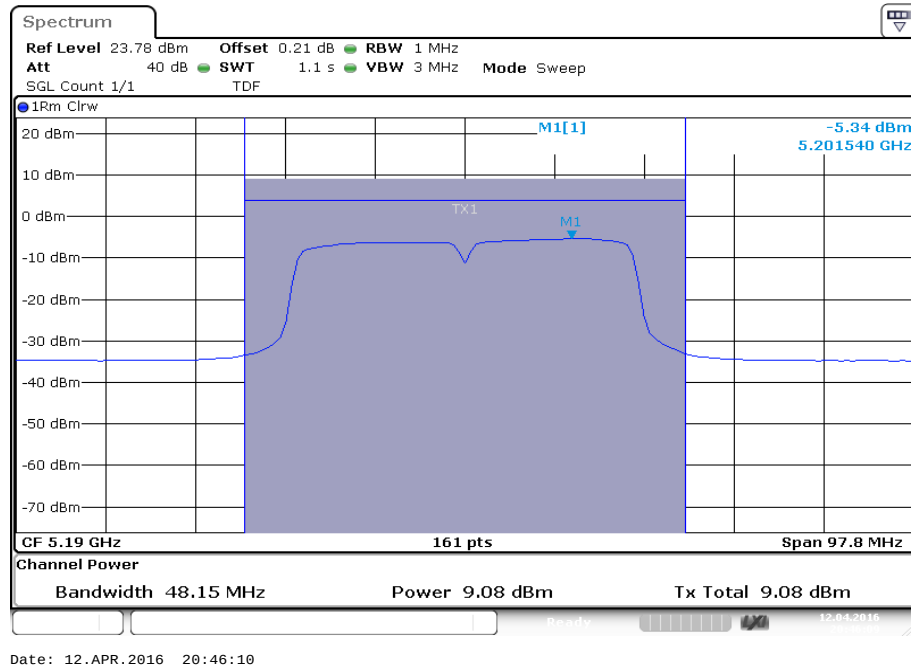


Plot 2: 5230 MHz

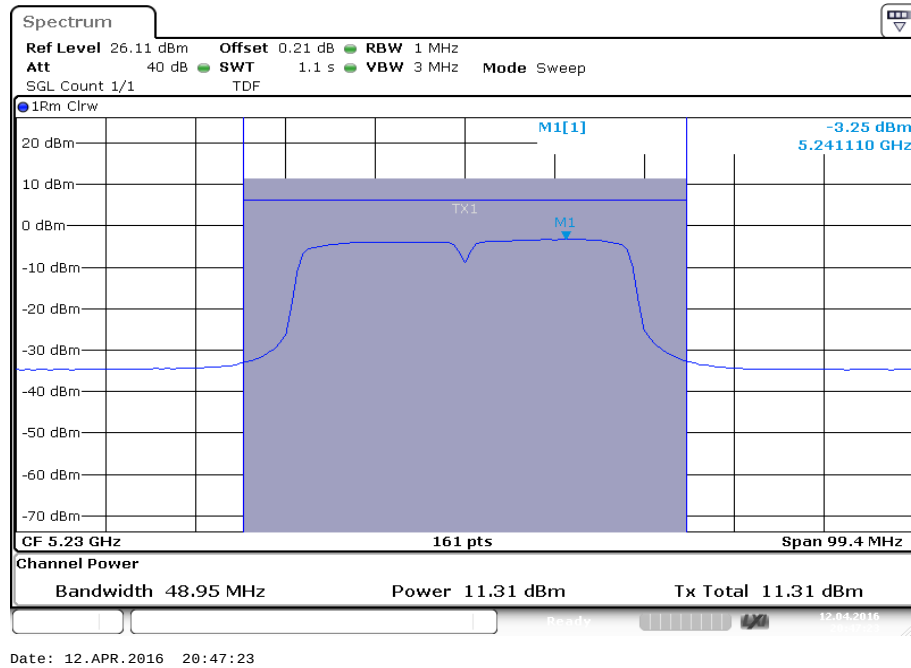


Plot 3: 5270 MHz

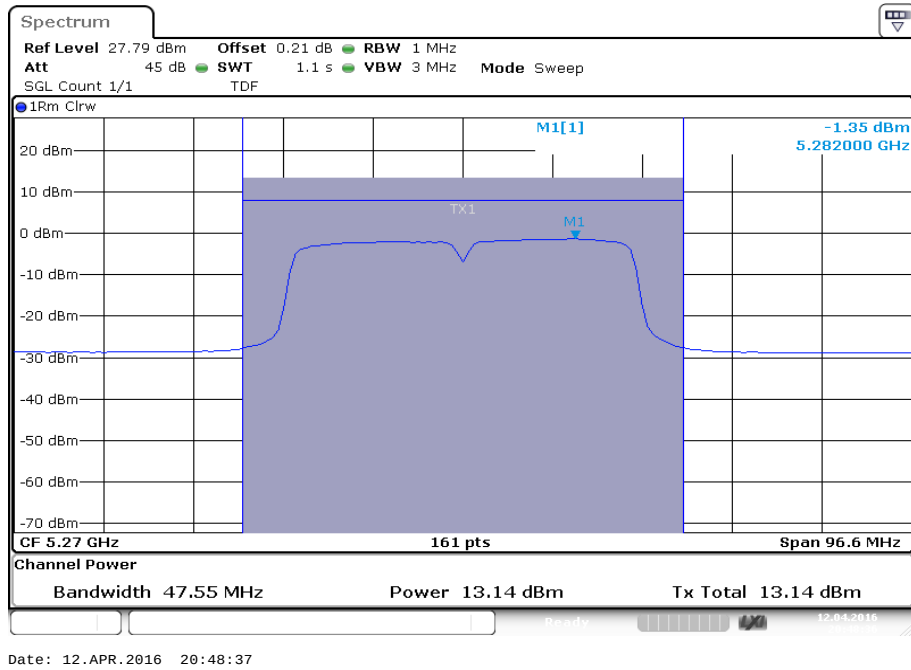


Plot 4: 5310 MHz

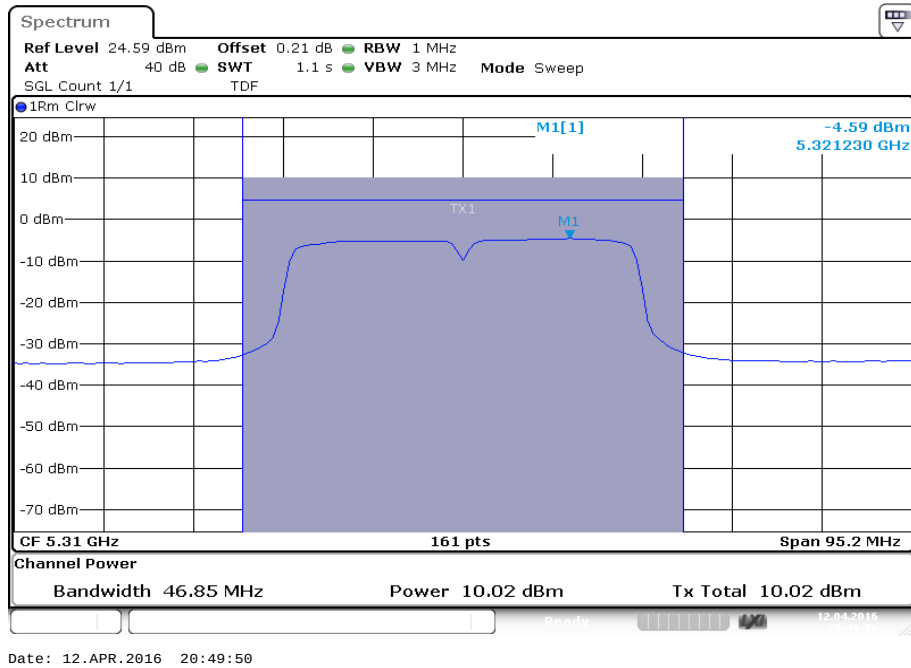


Plot 5: 5510 MHz

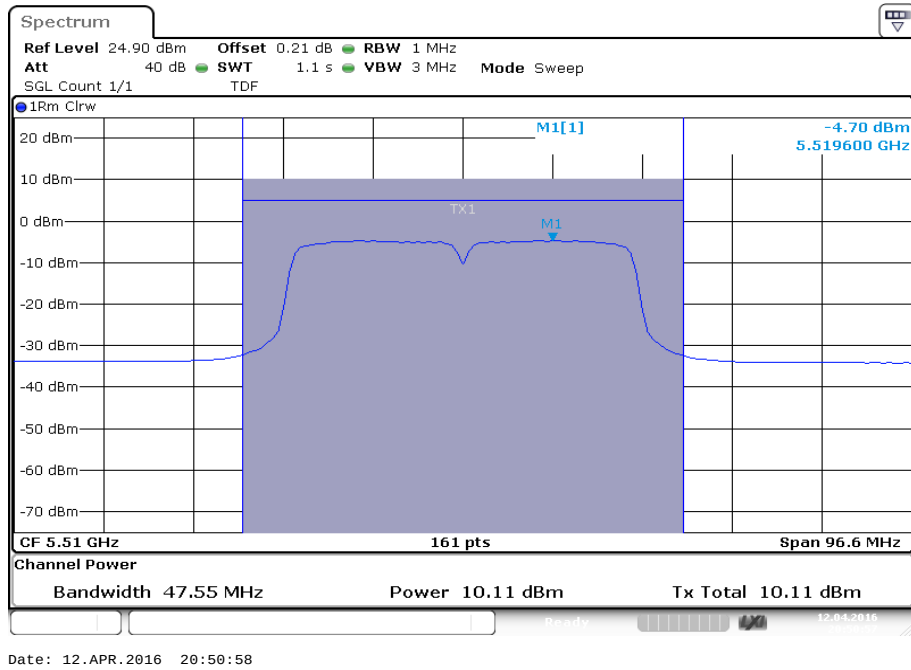


Plot 6: 5550 MHz

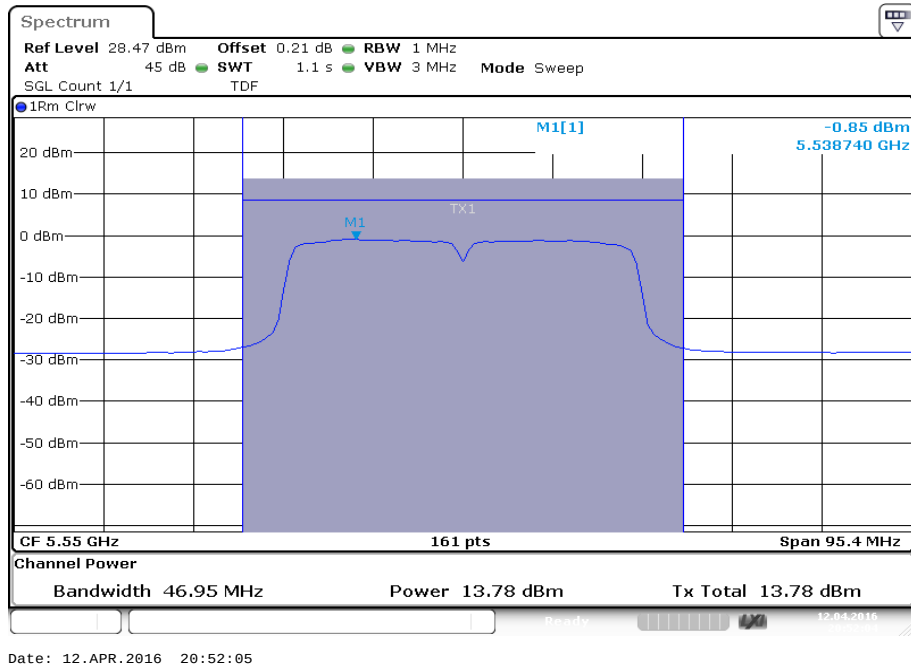


Plot 7: 5630 MHz

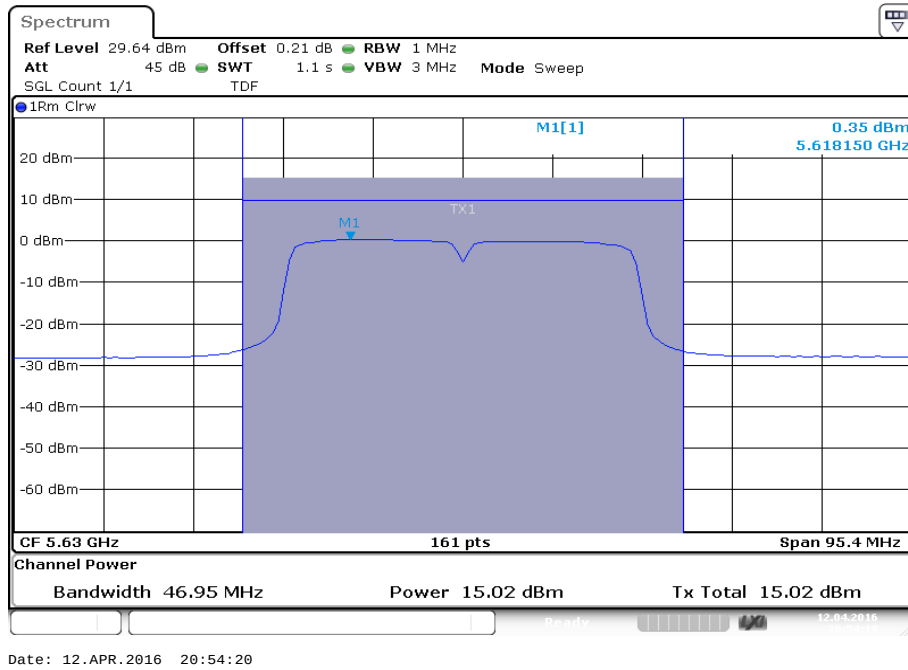

Plot 8: 5670 MHz

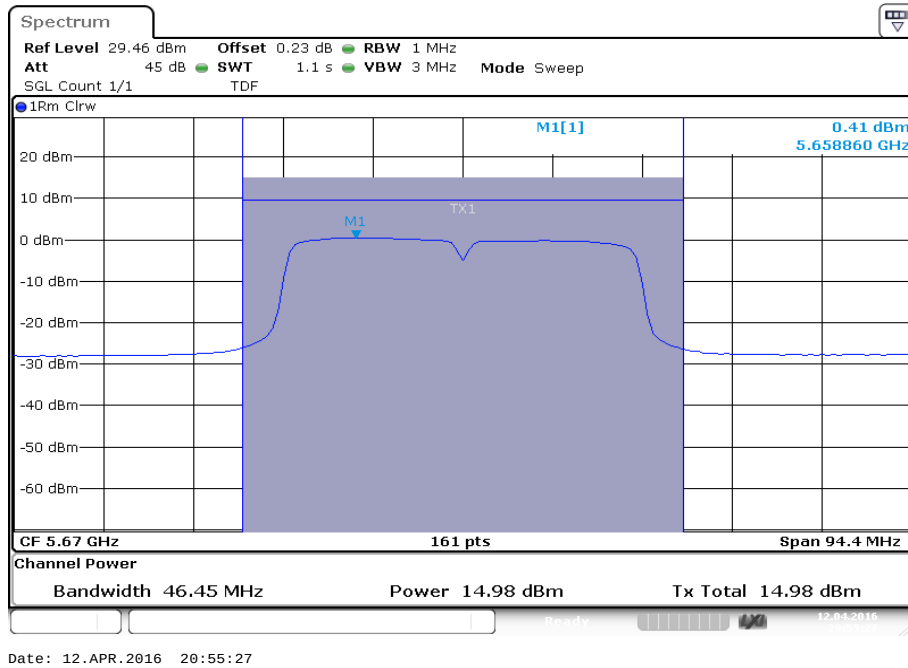

Plot 9: 5755 MHz

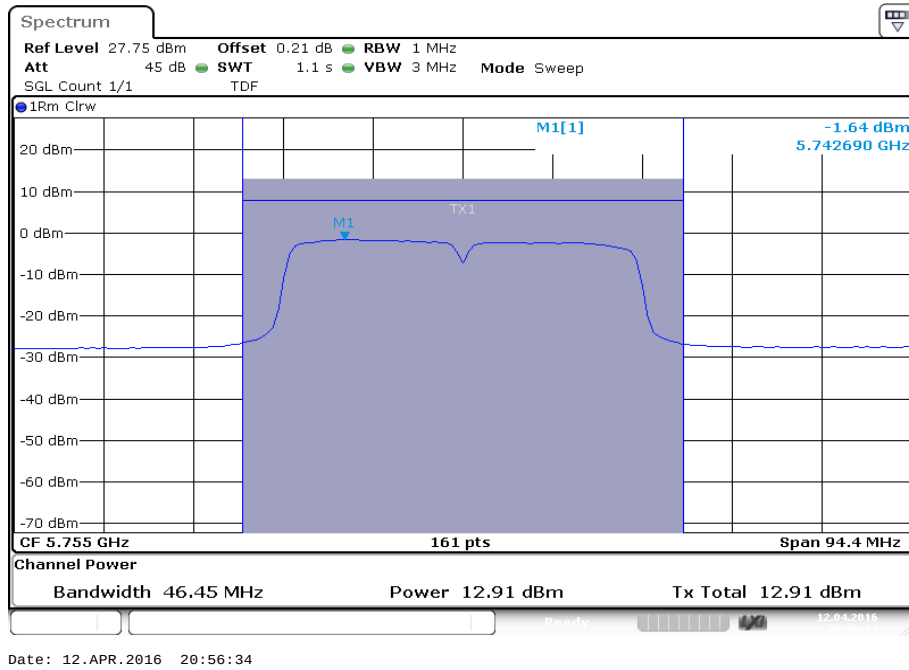

Plot 10: 5795 MHz

