



# Ibex-RT-310 and -320 Series

EN 50155 WLAN 3x3 Client/Bridge/Access Point

## Contents

1	General Information	4
1.1	Legal Information	4
1.2	About This Guide	4
1.3	Software Tools	4
1.4	License and Copyright for Included FLOSS	4
2	Safety and Regulations	5
2.1	Warning Levels	5
2.2	Safety Information	6
2.3	Care Recommendations	8
2.4	Product Disposal	8
2.5	Compliance Information	9
2.5.1	Agency Approvals and Standards Compliance	9
2.5.2	United States - FCC	10
2.5.3	United States - AREMA	10
2.5.4	Canada - IC	10
2.5.5	Europe - Simplified Declaration of Conformity	12
3	Product Description	13
3.1	Product Description	13
3.2	Available Models	13
3.3	Hardware Overview	14
3.3.1	Front Side View	14
3.3.2	Front Side Label	14
3.3.3	Rear Side Label	15
3.3.4	Interface Ports View	15
3.4	Connector Information	16
3.4.1	Power Input Connection	16
3.4.2	Ethernet Ports	16
3.4.3	Antenna Ports	17
3.5	LED Indicators	18
3.6	Factory Reset	18
3.6.1	Factory Reset Procedure	18
3.7	Dimensions	18
4	Installation	19
4.1	Mounting	19
4.2	Earth Connection	20
4.3	Connection of Cables	20
4.4	Cooling	20
4.5	Replacement of Product	22
5	Specifications	24
5.1	Interface Specifications	24
5.2	Type Tests and Environmental Conditions	26
6	Abbreviations and Terms	28
7	Revision Notes	29

---



## 1 General Information

### 1.1 Legal Information

The contents of this document are provided "as is". Except as required by applicable law, no warranties of any kind are made in relation to the accuracy and reliability or contents of this document, either expressed or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. Westermo reserves the right to revise this document or withdraw it at any time without prior notice. Under no circumstances shall Westermo be responsible for any loss of data or income or any special, incidental, and consequential or indirect damages howsoever caused. More information about Westermo can be found at [www.westermo.com](http://www.westermo.com).

### 1.2 About This Guide

This guide is intended for installation engineers and users of the Westermo products. It includes information on safety and regulations, a product description, installation instructions and technical specifications.

### 1.3 Software Tools

Related software tools are available at [www.westermo.com](http://www.westermo.com).

### 1.4 License and Copyright for Included FLOSS

This product includes software developed by third parties, including Free/Libre Open Source Software (FLOSS). The specific license terms and copyright associated with the software are included in each software package respectively. Please visit the product web page for more information. Upon request, the applicable source code will be provided. A nominal fee may be charged to cover shipping and media. Please direct any source code request to your normal sales or support channel.

## 2 Safety and Regulations

### 2.1 Warning Levels

Warning signs are provided to prevent personal injuries and/or damages to the product. The following levels are used:

Level of warning	Description	Consequence personal injury	Consequence material damage
 WARNING	Indicates a potentially hazardous situation	Possible death or major injury	Major damage to the Product
 CAUTION	Indicates a potentially hazardous situation	Minor or moderate injury	Moderate damage to the product
 NOTICE	Provides information in order to avoid misuse of the product, confusion or misunderstanding	No personal injury	Minor damage to the product
 NOTE	Used for highlighting general, but important information	No personal injury	Minor damage to the product

Table 1 Warning levels

## 2.2 Safety Information

### Before Installation:

Read this manual completely and gather all information available on the product. Make sure it is fully understood. Check that your application does not exceed the safe operating specifications for the product.

This product relies on convection cooling. Make sure that it is installed so that the ambient temperature is within the specified temperature range, e.g. by avoiding obstruction of the airflow around the product.

	<p><b>WARNING – SAFETY DURING INSTALLATION</b></p> <p>The product must be installed and operated by qualified service personnel and installed into an apparatus cabinet or similar, where access is restricted to service personnel only. For Ibex products, outdoor installation is allowed.</p> <p>During installation, ensure a protective earthing conductor is first connected to the protective earthing terminal. Westermo recommends a cross-sectional area of at least 4 mm<sup>2</sup>.</p> <p>Upon removal of the product, ensure that the protective earthing conductor is disconnected last.</p>
	<p><b>WARNING - HAZARDOUS VOLTAGE</b></p> <p>Do not open a connected product. Hazardous voltage may occur when connected to a power supply.</p>
	<p><b>WARNING - PROTECTIVE FUSE</b></p> <p>The power supply wiring must be sufficiently fused. It must be possible to disconnect manually from the power supply. Ensure compliance to national installation regulations. Replacing the internal fuse must only be performed by Westermo qualified personnel.</p>
	<p><b>WARNING - POWER SUPPLY CONNECTION</b></p> <p>There are safety regulations on which power sources that shall be used in conjunction with the product.</p>

	<b>WARNING – RADIO PRODUCTS</b> Observe the usage limitations of radio products at filling stations, in chemical plants, in systems with explosives or potentially explosives locations.  The devices may not be used in airplanes. Exercise particular caution near personal medical aids, such as pacemakers and hearing aids. Never perform work on the antenna system during a thunderstorm.  To fulfil human safety, a minimum separation distance of 20 cm or more should be maintained between the antenna of the product and personnel during operation.
	<b>CAUTION - HOT SURFACE</b> Be aware of that the surface of this product may become hot. When it is operated at high temperatures, the external surface may exceed Touch Temperature Limit according to the product's relevant electrical safety standard.
	<b>CAUTION - CORROSIVE GASES</b> If the product is placed in a corrosive environment, it is important that all unused connector sockets are protected with a suitable plug, in order to avoid corrosion attacks on the goldplated connector pins.
	<b>CAUTION - CABLE TEMPERATURE RATING</b> There may be a requirement on the minimum temperature rating of the cable to be connected to the field wiring terminals, see Interface Specifications.

## 2.3 Care Recommendations

Follow the care recommendations below to maintain full operation of the product and to fulfill the warranty obligations:

- Do not drop, knock or shake the product. Rough handling above the specification may cause damage to internal circuit boards.
- Use a dry or slightly water-damp cloth to clean the product. Do not use harsh chemicals, cleaning solvents or strong detergents.
- Do not paint the product. Paint can clog the product and prevent proper operation.

If the product is used in a manner not according to specification, the protection provided by the equipment may be impaired.

If the product is not working properly, contact the place of purchase, nearest Westermo distributor office or Westermo technical support.

	<b>NOTE</b> Devices not used shall be kept in the factory sealed moisture barrier bag. Open, unsealed devices should not be kept unpowered for more than 30 days.
---	--

## 2.4 Product Disposal

This symbol means that the product shall not be treated as unsorted municipal waste when disposing of it. It needs to be handed over to an applicable collection point for recycling electrical and electronic equipment.

By ensuring the product is disposed of correctly, you will help to reduce hazardous substances and prevent potential negative consequences to both environment and human health, which could be caused by inappropriate disposal.



Figure 1 WEEE symbol for treatment of product disposal

## 2.5 Compliance Information

	<p><b>REGULATORY NOTICE</b></p> <p>Any changes or modifications shall be approved by the party responsible for compliance. If not, users could void the user's authority to operate the equipment. Country code and antenna gain needs to be set properly for correct functionality in the installed country.</p>
---	---

### 2.5.1 Agency Approvals and Standards Compliance

Type	Approval/Compliance
Climate	<ul style="list-style-type: none"> <li>• EN 50155, class OT4, Railway applications – Electronic equipment used on rolling stock</li> <li>• EN 50125-3, Railway applications – Environmental conditions for equipment, Part 3: Equipment for signalling and telecommunications</li> </ul>
EMC	<ul style="list-style-type: none"> <li>• EN 50155, Railway applications, Approval/Compliance</li> <li>• EN 50121-3-2, Railway applications – Electromagnetic compatibility, Part 3-2: Rolling stock – Apparatus</li> <li>• EN 50121-4, Railway applications - Electromagnetic compatibility. Part 4: Emission and immunity of the signalling and telecommunications apparatus</li> <li>• ETSI EN 301 489-1, Electromagnetic compatibility (EMC) and Radio spectrum Matters (ERM) for radio equipment and services - Part 1: Common technical requirements</li> <li>• ETSI EN 301 489-17, Electromagnetic compatibility (EMC) and Radio spectrum Matters (ERM) for radio equipment - Part 17: Specific conditions for Broadband Data Transmission Systems</li> </ul>
Mechanical (Shock and vibration)	<ul style="list-style-type: none"> <li>• EN 61373, category 1, class A and B</li> <li>• EN 50125-3, Outside the track</li> </ul>
Insulation (Coordination and test)	<ul style="list-style-type: none"> <li>• EN 50124-1, Railway applications – Insulation coordination</li> <li>• EN 50155, Railway applications - Electronic equipment used on rolling stock</li> </ul>
Radio Communication	<ul style="list-style-type: none"> <li>• ETSI EN 300 328, Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using wide band modulation techniques</li> <li>• ETSI EN 301 893, 5 GHz RLAN</li> <li>• IEEE 802.11, Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications</li> <li>• FCC-47-15, Radio frequency devices</li> </ul>
Safety	<ul style="list-style-type: none"> <li>• EN/IEC 62368-1, Safety Requirements for audio/video, information and communication technology equipment</li> <li>• EN 45545-2, Requirements for fire behaviour of materials and components on railway vehicles</li> <li>• NFPA 130, Fire protection and life safety requirements for fixed guideway transit and passenger rail systems</li> </ul>

Table 2 Agency approvals and standards compliance

### 2.5.2 United States - FCC

The enclosed device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (i.) this device may not cause harmful interference and (ii.) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This product has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This product generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this product does cause harmful interference to radio or television reception, which can be determined by turning the product off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the unit and receiver
- Connect the product into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

	<p><b>NOTE</b> This product contains FCC IDs 2AEJD-103902-DT50RF</p>
	<p><b>NOTE</b> The Ibex-RT-320-LV is registered for 4.9GHz public safety band with the FCC ID 2AEJD-3623-0720</p>

### 2.5.3 United States - AREMA

The product has been tested according to AREMA Part 11.5.1 environmental class J and C and AREMA Part 11.5.2 exposure class Internal.

### 2.5.4 Canada - IC

This device complies with Industry Canada's license-exempt RSSs. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- l'appareil ne doit pas produire de brouillage.
- l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

Ce transmetteur ne doit pas être placé au même endroit ou utilisé simultanément avec un autre transmetteur ou antenne.

	<p><b>NOTE</b> This product contains the IC Certification numbers 9301A-103902DT50</p>
	<p><b>NOTE</b> The Ibex-RT-320-LV is registered for 4.9GHz public safety band with the IC Certification numbers 9301A-36230720</p>

## 2.5.5 Certified Antennas for FCC and IC

The following antennas can be used with the device (the antenna type ID has to be set to the right value):

Type	Part Number	Manufacturer	Gain	Chains	Antenna Type ID
Dipole	F51-N	Tekfun	2GHz: 4.5dBi max 5GHz: 7dBi max	1, 2, 3	1001
Patch	SPA 2400/75/8/0/V	Huber & Suhner	2GHz: 8dBi max	1, 2, 3	1000
Patch	SPA-5600/40/14/0/V_2	Huber & Suhner	5GHz: 14dBi max	1, 2	1002
Patch	SPA-5600/65/9/0/MIMO	Huber & Suhner	5GHz: 9dBi max	1, 2, 3	1003
Shark	SPA-5600/45/12/10/V	Huber & Suhner	5GHz: 12dBi max	1, 2	1004
Shark	SPA-5600/45/12/10/V	Huber & Suhner	4.9GHz: 12dBi max	1, 2	1009

#### 2.5.6 Europe - Simplified Declaration of Conformity

Hereby, Westermo declares that this product is in compliance with applicable EU directives and UK legislations. The full EU declaration of conformity and other detailed information is available at [www.westermo.com/support/product-support](http://www.westermo.com/support/product-support).



Figure 2 The European Conformity marking and the UK Conformity Assessment

### 3 Product Description

#### 3.1 Product Description

The Ibex-RT-310 and Ibex-RT-320 series can be configured as a WLAN Access Point, Client or Bridge. It is designed for onboard and infrastructure Wi-Fi installations in public transport and harsh environments. The 802.11 WLAN radio is operating at 2.4 GHz and 5 GHz frequency bands.

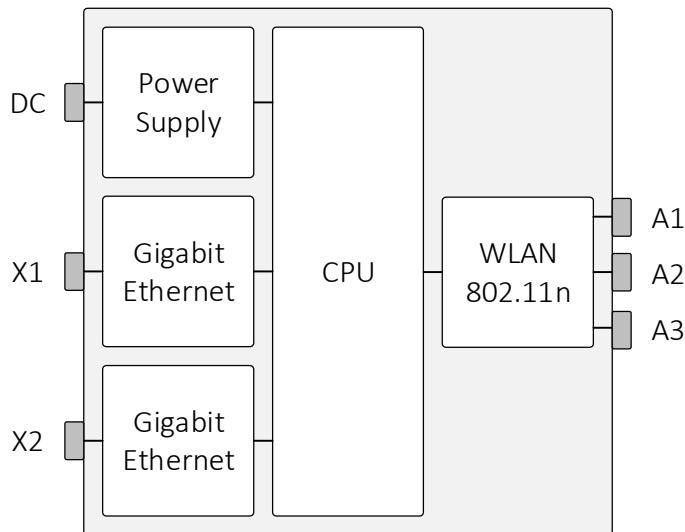


Figure 3 Ibex-RT-310 and Ibex-RT-320 block diagram

The Westermo configuration management tool, WeConfig, can be used for discovery and basic configuration and maintenance. The configuration can be done via SNMP or via WebGUI. The status information is available in local LED status indicators, and through SNMP/WebGUI.

The Ibex-RT-310 and Ibex-RT-320 is designed to withstand tough environmental conditions and can be remotely managed using web browser or SNMP management tools.

Integrating hardware, software and network design support tools, this router platform offers advanced capabilities, the lowest total cost of ownership and will create the most reliable and resilient networks.

The device is engineered to maintain uninterrupted data communication, even in exceptionally harsh environments. Tested and certified to withstand extreme temperatures, vibrations and shocks, these routers only use industrial grade components which contributes towards a market leading mean time between failure (MTBF), maximized service life, and reduced operational and life cycle costs.


#### 3.2 Available Models

Art. no.	Model	Region	PoE port	Rated voltage
3623-071001	Ibex-RT-310-LV EU	Europe	X2	24 VDC
3623-071002	Ibex-RT-310-LV NA	North America	X2	24 VDC
3623-072001	Ibex-RT-320-LV EU	Europe	X2	24 VDC
3623-072002	Ibex-RT-320-LV NA	North America	X2	24 VDC
3623-072101	Ibex-RT-320-HV EU	Europe	-	72 to 110 VDC
3623-072102	Ibex-RT-320-HV NA	North America	-	72 to 110 VDC

Table 3 Available Models

### 3.3 Hardware Overview


#### 3.3.1 Front Side View

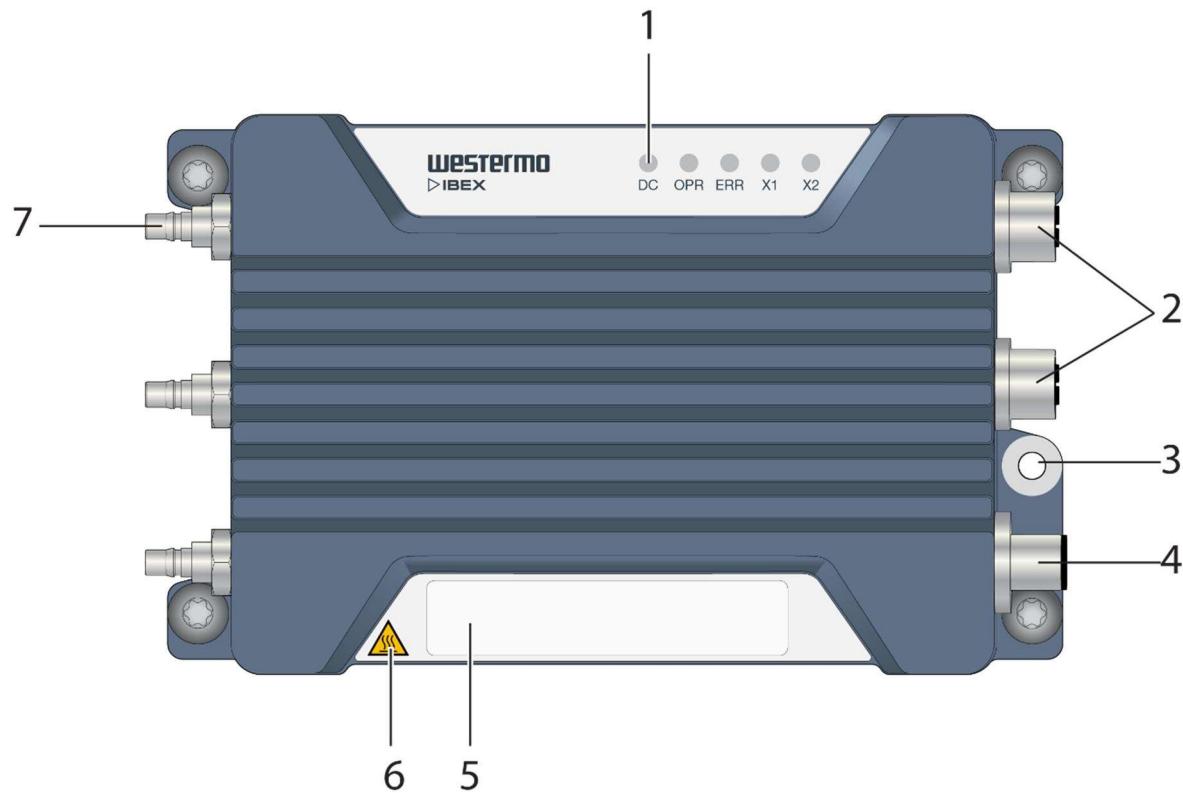

No.	Description
1	LED indicators
2	Gigabit Ethernet ports X1 and X2
3	Protective earth terminal
4	Power input DC
5	Front side label
6	Warning symbol for surface temperatures above +60°C
7	Antenna ports A1 to A3

Figure 4 Location of interface ports and LED indicators

#### 3.3.2 Front Side Label

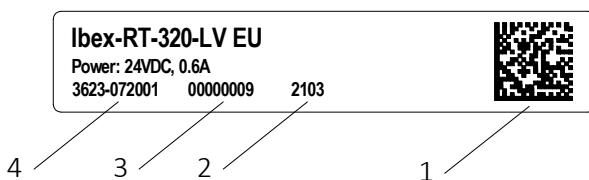

No.	Description	Remarks
1	QR code	The data matrix is: AAAA-AAAARR-1-VV-SSSSSSS-YYWW AAAA-AAAA = Article number RR = Region code VV = Product revision SSSSSSS = Serial number YY = Manufacturing Year WW = Manufacturing Week
2	Manufacturing date	The Date Format is: YYWW YY = Manufacturing Year WW = Manufacturing Week
3	Serial number	
4	Article number	AAAA-AAAARR AAAA-AAAA = Article number RR = Region code

Figure 5 Front side label content

### 3.3.3 Rear Side Label


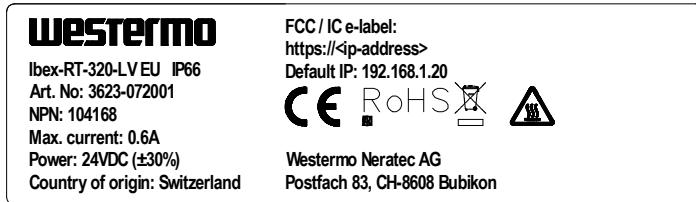


Figure 6 Rear side label content

### 3.3.4 Interface Ports View

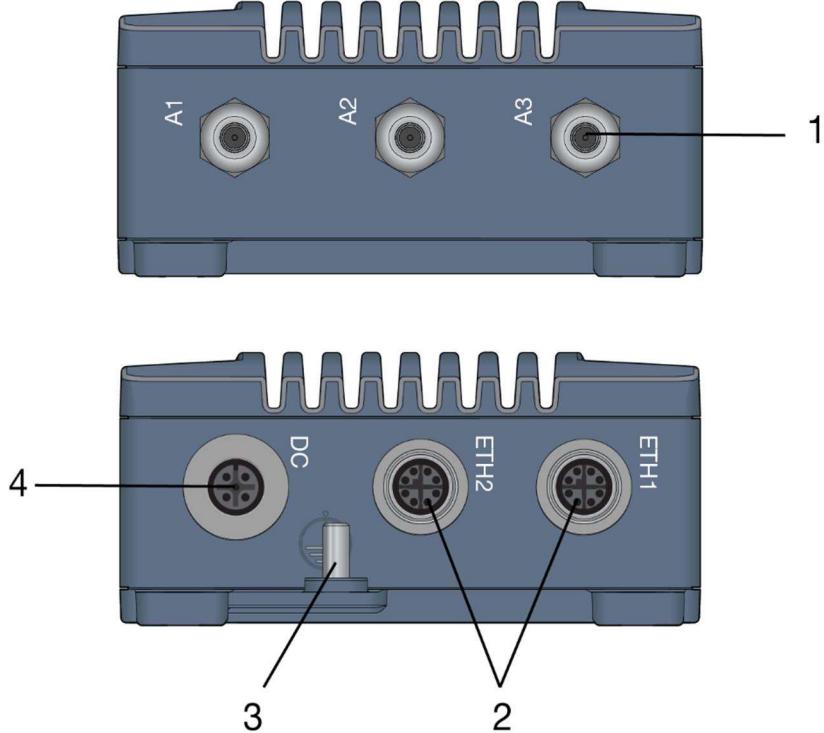

No.	Description
1	Antenna
2	1000Base-T
3	Grounding point
4	Power

Figure 7 View to interface ports

### 3.4 Connector Information

#### 3.4.1 Power Input Connection

<b>M12 A-coded 4-pin male power connector according to IEC 61076-2-101</b>			
Marking	Position	Direction	Description
DC	1	+DC	Positive terminal
	2	-	
	3	-DC	Negative terminal
	4	-	
Housing	Shield	Chassis of product (ground)	

Table 4 Power input connection



#### NOTE

If device is powered by PoE, the protective dust cap which is part of the delivery must be closed to protect the power interface from water or dust ingress.

#### 3.4.2 Ethernet Ports

The product includes two Ethernet ports X1 and X2 which supports auto-negotiated 10 Mbit/s, 100 Mbit/s and 1000 Mbit/s operation. Automatic MDI/MDIX crossover is supported for 10BASE-T, 100BASE-T, 1000BASE-T operation.

<b>M12 D-coded 4-pin female Ethernet connector according to IEC 61076-2-109</b>			
Marking	Position	Direction	Description
X1 / X2	1	In / Out	DA+
	2	In / Out	DA-
	3	In / Out	DB+
	4	In / Out	DB-
	5	In / Out	DD+
	6	In / Out	DD-
	7	In / Out	DC-
	8	In / Out	DC+
Housing	Shield	Chassis of product (ground)	

Table 5 Ethernet connection

<b>PoE connection on X2 (Ibex-RT-310-LV and Ibex-RT-320-LV only)</b>		
<b>Position</b>	<b>Device mode A</b>	<b>Device mode B</b>
1	+DC	
2	+DC	
3	-DC	
4	-DC	
5		-DC
6		-DC
7		+DC
8		+DC

Table 6 Ethernet X2 PoE connection

**NOTE**

PoE is supported on X2 for the LV product variant only.

**NOTE**

If the Ethernet function is not used, the protective dust cap which is part of the delivery must be closed to protect the interface from water or dust ingress.

### 3.4.3 Antenna Ports

The antenna connectors are identified on the product with A1, A2 and A3. QMA industrial standard connector is used.

A1 to A3 are used for WLAN communication. At least A1 must be connected to an external WLAN antenna. The antenna configuration is made through the Software interface.

**NOTICE**

Any unused antenna ports must be properly terminated with 50-Ohms, otherwise the device might be damaged when power is applied to a non-terminated antenna port.

**NOTE**

To ensure specified IP protection, suitable QMA connectors / cables and terminations must be used.

### 3.5 LED Indicators

LED	Description
DC	Power status
OPR	Operation status
ERR	Error status
X1	Ethernet status for X1 port
X2	Ethernet status for X2 port

Table 7 LED Indication

	<b>NOTE</b> Refer to management guide for detailed LED status indication.
---	--

### 3.6 Factory Reset

To reset the product into factory default settings, a reset adapter is needed which is plugged into one of the Ethernet ports X1 or X2 during startup.

Art. no.	Description
3623-0799	Factory Reset Plug, X-coded

Table 8 Factory reset plug


#### 3.6.1 Factory Reset Procedure

Step	Description
1	Plug the factory reset adapter to one of the Ethernet interfaces
2	Power the product
3	Wait until factory reset adapter is detected. This is indicated by solid ORANGE OPR LED and RED ERR LED
4	Remove factory reset adapter within 15 seconds
5	Successful initiation of the factory reset is indicated by blinking ORANGE OPR LED and RED ERR LED

Table 9 Factory reset procedure

### 3.7 Dimensions

Dimensions are stated in mm and are regardless variants.

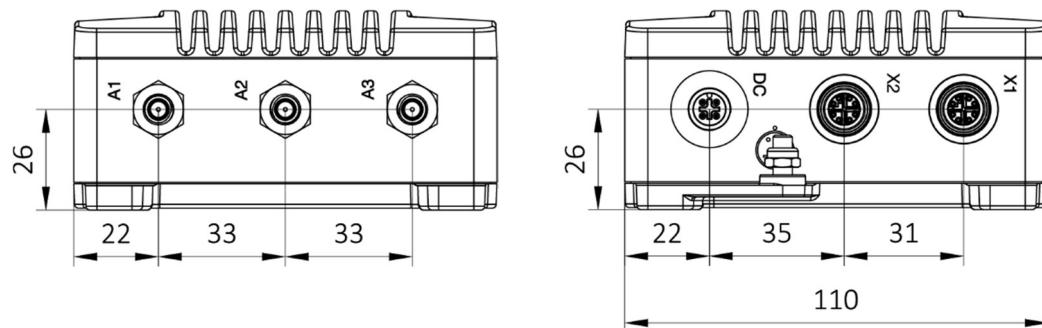

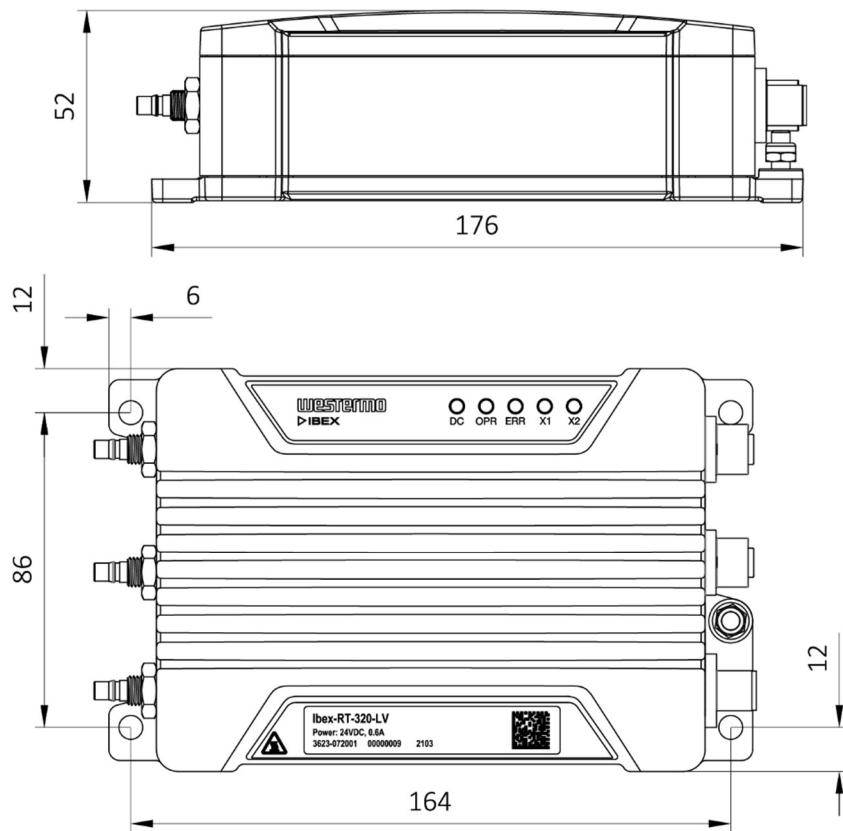


Figure 8 Dimensional drawing

## 4 Installation

### 4.1 Mounting

The product is fixed with the four fixing points located at the corners of the product. M5 or M6 screws are used for the fixation of the product. The screws are tightened with min. 3.0 Nm (fixing screw ISO 898/1, quality class 8.8).



#### NOTICE

All four specified fixing points must be used for fixing. The installation surface should be flat to have all fixing points connected to the surface.



#### NOTE

For indoor installation consider additional protection against dust to ensure proper heat dissipation.



#### NOTE

For outdoor installation consider additional protection against sun radiation, dust and dirt to optimize ambient temperature range.

**NOTE**

Unused connectors must be covered by a protective cap (delivered with the product), tightened to the specified torque in order to fulfill the specified ingress protection code.

#### 4.2 Earth Connection

For correct function, the earth connection at the grounding point needs to be properly connected to a solid ground. An M5 grounding screw at the housing is used for grounding. A short wire with a cross section of at least  $4\text{ mm}^2$  shall be used. The grounding wire is set below the rip-lock washer. The nut is fixed for good reliable grounding contact. The tightening torque of the nut shall be 2.0 Nm.

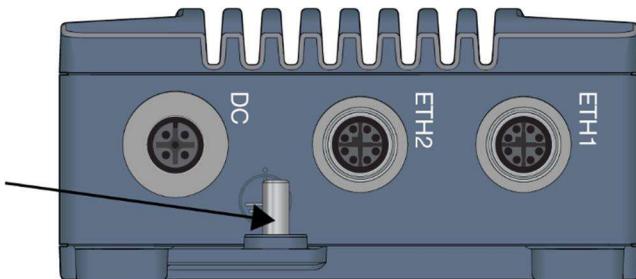


Figure 9 Earth connection

**NOTICE**

Do not use equipment without protective earth connection.

#### 4.3 Connection of Cables

Recommended tightening torque for the M12 connectors is 0.6 Nm. All M12 connections are screw connections.

When connecting the power cable, ensure that the pins are connected correctly before tightening the power cable to the unit.

**NOTE**

This product has no replaceable fuse and should be connected via an external fuse for protection.

#### 4.4 Cooling

This unit uses convection cooling. It is recommended to install the product in areas where the natural convection airflow is not blocked and that there is enough spacing around the device.

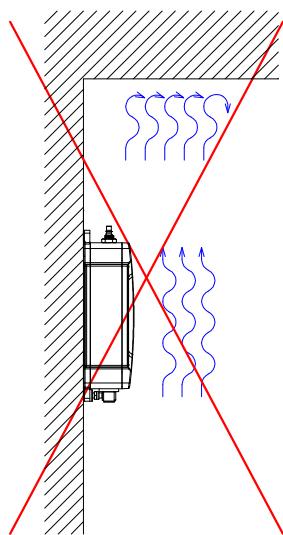


Figure 10 Installation with reduced natural convection airflow

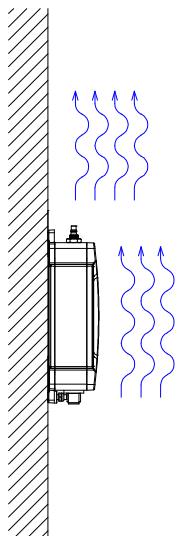


Figure 11 Installation with natural convection airflow

When operating the device at high ambient temperatures, it is recommended to mount the device to a metallic base plate to improve the heat dissipation. The base plate increases the surface to spread the heat.

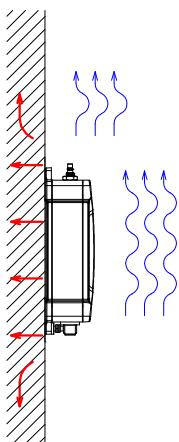


Figure 12 Improved heat transfer based on fixing plate



**NOTICE**

Limited air flow is rising the device temperature and may lower the upper limit of the operating temperature range.



**NOTICE**

Temperature is dependent on the operational parameters, like RF output power, amount of traffic.



**NOTICE**

This product has integrated temperature sensors for monitoring the internal device temperatures. If temperature limits are exceeded, alarms are sent through the SW interface.



**NOTICE**

The operating conditions shall be ensured so that the normal operation does not cause temperature alarms. Improve installation conditions or RF parameters in case of any temperature alarms.

#### 4.5 Replacement of Product

Disconnect all cables and unscrew the product from the wall. Mount the replacement product and reconnect all cables, observing the instructions in Connection of Cables.

MTTR (Mean Time To Repair), i.e. time for replacement of product is: < 10 minutes.

**CAUTION - HOT SURFACE**

Be aware of that the surface of this product may become hot. When it is operated at high temperatures, the external surface may exceed Touch Temperature Limit according to the product's relevant electrical safety standard.

This product complies with Touch Temperature Limits throughout its operational temperature range.

## 5 Specifications

### 5.1 Interface Specifications

DC, Power port	Ibex-RT-310-LV and Ibex-RT-320-LV	Ibex-RT-320-HV
Connector	M12 A-coded male	
Rated voltage	24 VDC	72 to 110 VDC
Operating voltage	16 to 30 VDC	50 to 138 VDC
Rated current	0.6 A	0.2 A
Rated frequency	DC	
Inrush current, $I^2t$	39 mA <sup>2</sup> s at 24 VDC	4 mA <sup>2</sup> s at 72 VDC 13 mA <sup>2</sup> s at 110 VDC
Startup current <sup>1</sup>	2 x nominal current	
Polarity	Reverse polarity protected	
Redundant power input	No	
Conductor cross section (flexible)	> 0.5 mm <sup>2</sup> (AWG 20)	
Cable temperature rating	-40 to + 70°C	
Shielded cable	Not required	

Table 10 Interface Specification

PoE (PoE Powered device - Ibex-RT-310-LV and Ibex-RT-320-LV only on X2)	
Connector	M12 X-coded female
Device mode	A and B
Rated voltage	48 VDC
Operating voltage	37 VDC to 57 VDC
Power classification	Class 3

Table 11 PoE Specification

Ethernet TX	
Connector	M12 X-coded female
Electrical specification	IEEE std 802.3
Data rate	10 Mbit/s, 100 Mbit/s, 1000 Mbit/s manual or auto
Duplex	Full or half, manual or auto
Transmission range	Up to 100 m with CAT5e cable or better
Cabling	Shielded cable CAT5e or better is recommended
Conductive chassis	Yes

Table 12 Ethernet Specification



#### NOTE

The product is to be connected to internal Ethernet networks without exiting a facility and being subjected to TNVs.

<sup>1</sup> Recommended external supply current capability for proper startup

	<p><b>NOTICE</b></p> <p>To avoid damages on the Ethernet interfaces, ensure that the far end side of the Ethernet cable shield itself is connected to protective earth.</p>
---	---

Antenna WLAN (A1, A2)	
Connector	QMA female
Direction	Transmit and receive
Cabling	50-ohm coaxial cable and WLAN antenna required
Conductive chassis	Yes
WLAN interface	High power 3x3 MIMO 802.11n Access Point / Client
WLAN frequency bands	2.400 to 2.4835 GHz, 4.940 to 4.990 GHz, 5.150 to 5.350 GHz, 5.470 to 5.725 GHz, 5.725 to 5.850 GHz
Transmitting power Ibex-RT-310	Max. conducted combined transmit power within the whole frequency range: 802.11b/g/n, up to +18dBm for all data rates 802.11a/n, up to +18dBm for all data rates
Transmitting power Ibex-RT-320	Max. conducted combined transmit power within the whole frequency range: 802.11b/g/n, up to +27dBm for all data rates 802.11a/n, up to +27dBm for all data rates

Table 13 Antenna Port Specification

	<p><b>NOTICE</b></p> <p>Depending on the installation country there are frequency/band restrictions and output power limitations.</p>
---	---

	<p><b>NOTICE</b></p> <p>Unused antenna port must be terminated with 50-Ohm terminations.</p>
---	--

	<p><b>NOTICE</b></p> <p>To avoid damages on the antenna interfaces, ensure that the far end side of the antenna cable and/or the antenna itself is connected to protective earth.</p>
---	---

## 5.2 Type Tests and Environmental Conditions

Environmental phenomena	Basic standard	Description	Test levels
ESD	EN 61000-4-2	Enclosure	Contact: $\pm 6$ kV Air: $\pm 8$ kV
Fast transients	EN 61000-4-4	DC power port	$\pm 2$ kV, direct coupling
		Ethernet ports	$\pm 2$ kV, capacitive coupling clamp
		Antenna ports	
Surge	EN 61000-4-5	DC power port	L-E: $\pm 1$ kV, 12 $\Omega$ , 9 $\mu$ F, 1.2/50 $\mu$ s L-E: $\pm 2$ kV, 42 $\Omega$ , 0.5 $\mu$ F, 1.2/50 $\mu$ s L-L: $\pm 1$ kV, 12 $\Omega$ , 9 $\mu$ F, 1.2/50 $\mu$ s L-L: $\pm 2$ kV, 42 $\Omega$ , 0.5 $\mu$ F, 1.2/50 $\mu$ s
		Ethernet ports	L-E: $\pm 1$ kV, 2 $\Omega$ , 18 $\mu$ F, 1.2/50 $\mu$ s
		Antenna ports	
Power frequency magnetic field	EN 61000-4-8	Enclosure	300 A/m continues, DC, 16.7 Hz, 50 Hz, 60 Hz
Pulsed magnetic field	EN 61000-4-9	Enclosure	300 A/m
Radiated RF immunity	EN 61000-4-3	Enclosure	20 V/m, 80% AM (1kHz) at 80 MHz to 2.7 GHz 3 V/m, 80% AM (1kHz) at 2.7 GHz to 6 GHz 30 V/m, PM 200 Hz square at 380 MHz to 385 MHz 30 V/m, PM 200 Hz square at 390 MHz to 395 MHz
Conducted RF immunity	EN 61000-4-6	DC power port	10 V, 80% AM (1kHz) from 0.15 to 80 MHz
		Ethernet ports	
		Antenna ports	
Radiated RF emission	CISPR 16-2-3	Enclosure	Class B FCC Part 15 B, Class B
Conducted RF emission	CISPR 16-2-1	DC power port	Ibex-RT-310/320-LV: Class B
		Ethernet ports	Ibex-RT-320-HV: Class A
Insulation resistance	EN 50155	DC power port to all other ports	> 100 M $\Omega$
Dielectric strength	EN 50155	DC power port to all other ports	Ibex-RT-310/320-LV: 750 VDC, 60 s Ibex-RT-320-HV: 2250 VDC, 60 s

Table 14 EMC and electrical conditions

Environmental phenomena	Basic standard	Description	Test levels
Temperatures	EN 60068-2-1	Operational	-40 to +70°C (-40 to +158°F) <sup>2</sup>
	EN 60068-2-2	Storage and transport	-55 to +85°C (-67 to +185°F)
	EN 60068-2-14		
Humidity	EN 60068-2-30	Operational	5-95% relative humidity
		Storage and transport	
Altitude		Operational	3000 m
MTBF	IEC TR 62380		307027 hours
Vibration	MIL STD 810, M514.7 (sine)	Operational	5 to 10 Hz, 5.08 mm p-p 10 to 200 Hz, 2 g 20 sweep cycles in each axis, 0.9 octave/min
	EN 60068-2-64 (random)	Operational, endurance test	11.44 m/s <sup>2</sup> random, 5 to 150 Hz, 3 x 5 h 2.3 m/s <sup>2</sup> random, 5 to 2000 Hz, 3 x 4 h
Shock <sup>3</sup>	EN 60068-2-27	Operational	100 m/s <sup>2</sup> , 30 ms, 3 x 6 shocks (half sine)
	MIL STD 810, M516.7		20 g, 11 ms, 3 x 6 shocks (saw tooth)
Weight			1100 gr
Degree of protection	EN 60529	Enclosure	IP66 <sup>4</sup>
Cooling			Convection
Pollution degree	EN 62368-1		PD2
Conformal coating type	IPC-A-610	Electronic modules	AR (Acrylic)

Table 15 Environmental and mechanical conditions

<sup>2</sup> Refer to "Safety Information" chapter regarding touch temperature<sup>3</sup> The power and Ethernet cables need to be fastened 200 mm or closer to the unit. The same recommendation applies to the Antenna cables<sup>4</sup> Provided all connectors are connected with IP66 cabling or fitted with protective caps (delivered with the unit) and tightened to the specified torque

## 6 Abbreviations and Terms

Abbreviation	Description
<b>AM</b>	Amplitude Modulation
<b>AREMA</b>	American Railway Engineering and Maintenance-of-Way Association
<b>AWG</b>	American Wire Gauge
<b>BPSK</b>	Binary Phase Shift Keying
<b>CAT5e</b>	Category 5 Enhanced Cable
<b>CE</b>	Conformité Européenne
<b>CPU</b>	Central Processing Unit
<b>DC</b>	Direct Current
<b>EMC</b>	Electromagnetic Compatibility
<b>EN</b>	European Standard
<b>ERR</b>	Error
<b>ESD</b>	Electro Static Discharge
<b>ETSI</b>	European Telecommunications Standards Institute
<b>FLOSS</b>	Free/Libre Open Source Software
<b>FCC</b>	Federal Communication Commission
<b>HV</b>	High Voltage
<b>IEC</b>	International Engineering Consortium
<b>IC</b>	Industry Canada
<b>ID</b>	Identification
<b>I/O</b>	Input / Output
<b>IP</b>	Ingress Protection
<b>ISO</b>	International Standardization Organisation
<b>LAN</b>	Local Area Network
<b>LED</b>	Light Emitting Diode
<b>LV</b>	Low Voltage
<b>MIMO</b>	Multiple Input, Multiple Output
<b>MTBF</b>	Mean Time between Failure
<b>MTTR</b>	Mean Time to Repair
<b>OPR</b>	Operation
<b>PM</b>	Pulse Modulated
<b>PoE</b>	Power over Ethernet
<b>QMA</b>	Quick-connect RF Connectors
<b>QR</b>	Quick Response
<b>RF</b>	Radio Frequency
<b>TNV</b>	Telephone Network Voltage
<b>SN</b>	Serial Number
<b>SNMP</b>	Simple Network Management Protocol
<b>VPN</b>	Virtual Private Network
<b>WebGUI</b>	Web Graphical User Interface
<b>WeConfig</b>	Westermo Configuration Tool
<b>WEEE</b>	Waste Electrical and Electronics Equipment
<b>WLAN</b>	Wireless Local Area Network

Table 16 Abbreviations and terms

## 7 Revision Notes

Revision	Date	
Rev. D	2021-03	Product illustrations updated to blue, text in illustrations removed, Westermo address updated, chapter 2.5.5 updated
Rev. E	2021-05	Regulatory statements updated for public safety band