

FCC PART 90

TEST REPORT

For

ZTE TRUNKING TECHNOLOGY CORPORATION

4/F, R&D Building 1, ZTE Industrial Park, LiuXian Road, Xili, Nanshan District, Shenzhen, P.R.China

FCC ID: 2AEKCPH7X0U1

Report Type: Product Type:

Class II Permissive Change DIGITAL PORTABLE RADIO

Report Number: RSZ161008001-00CA1

Report Date: 2016-12-17

Oscar Ye

Reviewed By: Engineer

Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan)

No.248 Chenghu Road, Kunshan, Jiangsu province, China

Oscar. Ye

Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

TEST REPORT	
GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
OBJECTIVE	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	
EXTERNAL I/O CABLE	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	6
TEST EQUIPMENT LIST	7
FCC §1.1307(b) & §2.1093 - RF EXPOSURE	8
APPLICABLE STANDARD	
FCC §2.1053 & §90.210 - RADIATED SPURIOUS EMISSIONS	9
APPLICABLE STANDARD	9
TEST PROCEDURE	
Trom D. m.	0

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The ZTE TRUNKING TECHNOLOGY CORPORATION's product, model number: PH700 U(1) (FCC ID: 2AEKCPH7X0U1) or the "EUT" in this report was a DIGITAL PORTABLE RADIO, which was measured approximately: 150 mm (L) x 60 mm (W) x 38 mm (H), rated with input voltage: DC 7.4 V rechargeable battery.

Report No.: RSZ161008001-00CA1

* All measurement and test data in this report was gathered from production sample serial number: 1603361. (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2016-10-08.

Objective

This test report is prepared on behalf of *ZTE TRUNKING TECHNOLOGY CORPORATION* in accordance with Part 2 and Part 90 of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS and DTS submissions with FCC ID: 2AEKCPH7X0U1.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 90 - Private Land Mobile Radio Service

Applicable Standards: TIA-603-D.

This is a CIIPC application of the device, the differences between the original device and the current one are as follows:

- (1) Changing the model name to "PH700 U(1)".
- (2) Changing the appearance of EUT, which remove the screen and keypad from the EUT.

For the change made to the device, the test item "Radiated Emissions" was performed.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC PART 90 Page 3 of 9

Measurement Uncertainty

	Item	Uncertainty		
AC Power Line	s Conducted Emissions	±3.26 dB		
RF conducte	d test with spectrum	±0.9dB		
RF Output Po	wer with Power meter	±0.5dB		
D. P. C. L. C.	30MHz~1GHz	±5.91dB		
Radiated emission	Above 1G	±4.92dB		
Occupi	ed Bandwidth	±0.5kHz		
Те	mperature	±1.0℃		
H	Iumidity	±6%		

Report No.: RSZ161008001-00CA1

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC PART 90 Page 4 of 9

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number		
N/A	50 ohm Load	N/A	N/A		

Report No.: RSZ161008001-00CA1

External I/O Cable

Cable Description	Length (m)	From Port	То	
/	/	/	/	

Block Diagram of Test Setup

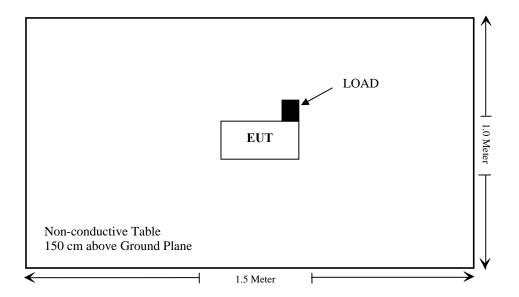

FCC PART 90 Page 5 of 9

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results	
§1.1307(b);§2.1093	RF Exposure	Compliance	
§2.1046;§90.205	RF Output Power	Compliance*	
§2.1047;§90.207	Modulation Characteristic	Compliance*	
§2.1049;§90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance*	
§2.1051;§90.210	Spurious Emission at Antenna Terminal	Compliance*	
§2.1053;§90.210	Spurious Radiated Emissions	Compliance	
§2.1055;§90.213	Frequency Stability	Compliance*	
§90.214	Transient Frequency Behavior	Compliance*	

Report No.: RSZ161008001-00CA1

Compliance*: Please referred to original report with FCC ID: 2AEKCPH7X0U1 granted on 2016-09-19, which was tested by Bay Area Compliance Laboratories Corp. (Shenzhen).

FCC PART 90 Page 6 of 9

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Model Serial Number		Calibration Due Date			
	Radiation test							
Sonoma Instrunent	Amplifier	330	171377	2016-09-16	2017-09-16			
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2015-11-12	2016-11-11			
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2015-11-07	2016-11-06			
Mini	Pre-amplifier	ZVA-183-S+	857001418	2016-09-16	2017-09-15			
DUCOMMUN	Pre-amplifier	ALN- 22093530-01	990147	2016-09-16	2017-09-15			
EMCO	Horn Antenna	3116	9510-2384	2015-11-07	2016-11-06			
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11			
Rohde & Schwarz	Rohde & Schwarz Signal Analyzer		101116	2016-07-04	2017-07-03			
ETS	Horn Antenna	3115	6229	2015-11-07	2016-11-06			
R&S	Auto test Software	EMC32	V 09.10.0	NCR	NCR			
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-06-16	2016-12-15			
BACL	RF cable	KS-LAB-010	KS-LAB-010	2015-12-16	2016-12-15			

Report No.: RSZ161008001-00CA1

FCC PART 90 Page 7 of 9

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE

Applicable Standard

According to FCC §1.1307(b) and §2.1093, protable device operates Part 90 should be subjected to rountine environmental evaluation for RF exposure prior or equipment authorization or use.

Report No.: RSZ161008001-00CA1

Result: Compliance.

Please refer to SAR Report Number: RSZ161008001-20A1.

FCC PART 90 Page 8 of 9

FCC §2.1053 & §90.210 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053 and §90.210

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

Report No.: RSZ161008001-00CA1

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =10 1g (TXpwr in Watts/0.001)-the absolute level

Spurious attenuation limit in $dB = 50+10 \text{ Log}_{10}$ (power out in Watts) for EUT with a 12.5 kHz channel bandwidth.

Test Data

Environmental Conditions

Temperature:	23 ℃
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Layne Li on 2016-10-13.

Test Mode: Transmitting

FCC PART 90 Page 9 of 9

30 MHz – 5 GHz:

	Receiver Turn		Rx Antenna		Substituted			Absolute	FCC Part 90	
Frequency (MHz)	Reading (dBµV)	Table Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
		Analog	Modulatio	on 435.01	25MHz, C	Channel Sp	pacing 12.5k	Hz		
870.03	36.38	202	2.1	Н	-60.6	0.46	4.75	-56.31	-20	36.31
870.03	35.47	149	2.3	V	-61.5	0.46	4.75	-57.21	-20	37.21
1305.04	48.89	201	1.6	Н	-53.1	0.27	7.75	-45.62	-20	25.62
1305.04	50.62	150	1.5	V	-57.0	0.27	7.75	-49.52	-20	29.52
Digital Modulation 435.0125MHz, Channel Spacing 12.5kHz										
870.03	36.53	109	2.3	Н	-60.5	0.46	4.75	-56.21	-20	36.21
870.03	35.19	213	1.3	V	-61.8	0.46	4.75	-57.51	-20	37.51
1305.04	47.69	239	1.6	Н	-54.3	0.27	7.75	-46.82	-20	26.82
1305.04	50.52	190	1.3	V	-57.1	0.27	7.75	-49.62	-20	29.62

Report No.: RSZ161008001-00CA1

Note:

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

**** END OF REPORT ****

FCC PART 90 Page 10 of 9