

## 6. MAXIMUM CONDUCTED OUTPUT POWER

### 6.1 APPLIED PROCEDURES / LIMIT

#### According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

· Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

#### 1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

#### 2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.<sup>1</sup> However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle  $\geq$  98 percent).

- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration  $T$  of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than  $\pm 2$  percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW  $\geq$  3 MHz.

(iv) Number of points in sweep  $\geq$  2 Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle  $<$  98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq$  98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

## 6.2 DEVIATION FROM STANDARD

No deviation.

## 6.3 TEST SETUP



## 6.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 6.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC3.8V
Test Mode :	TX (5G) Mode Frequency U-NII-1 (5180-5240MHz)		

Test Channel	Frequency	Maximum output power. Antenna port (AV)	LIMIT	Result
	(MHz)	(dBm)		
<b>TX 802.11a Mode</b>				
CH36	5180	7.07	23.98	Pass
CH40	5200	7.07	23.98	Pass
CH48	5240	7.15	23.98	Pass
<b>TX 802.11 n20M Mode</b>				
CH36	5180	7.09	23.98	Pass
CH40	5200	6.91	23.98	Pass
CH48	5240	6.96	23.98	Pass
<b>TX 802.11 n40M Mode</b>				
CH38	5190	6.89	23.98	Pass
CH46	5230	6.98	23.98	Pass
<b>TX 802.11 AC20M Mode</b>				
CH36	5180	5.79	23.98	Pass
CH40	5200	5.45	23.98	Pass
CH48	5240	5.52	23.98	Pass
<b>TX 802.11 AC40M Mode</b>				
CH38	5190	5.73	23.98	Pass
CH46	5230	5.17	23.98	Pass
<b>TX 802.11 AC80M Mode</b>				
CH42	5210	5.18	23.98	Pass

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC3.8V
Test Mode :	TX (5G) Mode Frequency Band IV (5725-5825MHz)		

Test Channel	Frequency	Maximum output power. Antenna port (AV)	LIMIT	Result
	(MHz)	(dBm)		
<b>TX 802.11a Mode</b>				
CH 149	5745	6.99	30	Pass
CH 157	5785	6.04	30	Pass
CH 165	5825	6.87	30	Pass
<b>TX 802.11 n20M Mode</b>				
CH 149	5745	6.66	30	Pass
CH 157	5785	6.48	30	Pass
CH 165	5825	6.18	30	Pass
<b>TX 802.11 n40M Mode</b>				
CH 151	5755	6.01	30	Pass
CH 159	5795	6.75	30	Pass
<b>TX 802.11 AC20M Mode</b>				
CH 149	5745	6.53	30	Pass
CH 157	5785	6.74	30	Pass
CH 165	5825	6.83	30	Pass
<b>TX 802.11 AC40M Mode</b>				
CH 151	5755	6.96	30	Pass
CH 159	5795	6.77	30	Pass
<b>TX 802.11 AC80M Mode</b>				
CH 155	5775	5.51	30	Pass

## 7. OUT OF BAND EMISSIONS

### 7.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.


### 7.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP

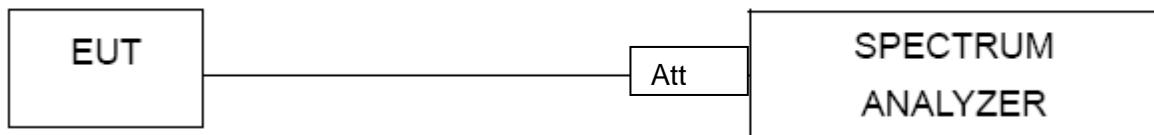

### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


## 7.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC3.8V


5.2G

### 5.180~5.240 GHz


(802.11a) Band Edge, Left Side

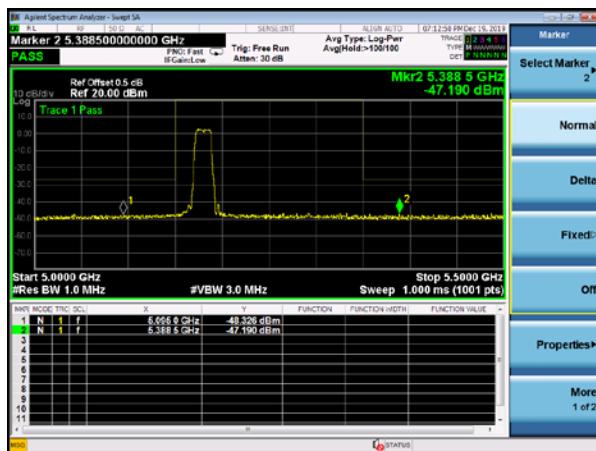


(802.11a) Band Edge, Right Side

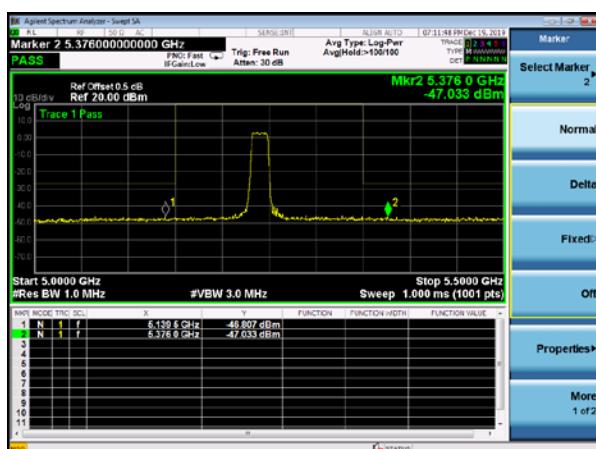

(802.11n20) Band Edge, Left Side

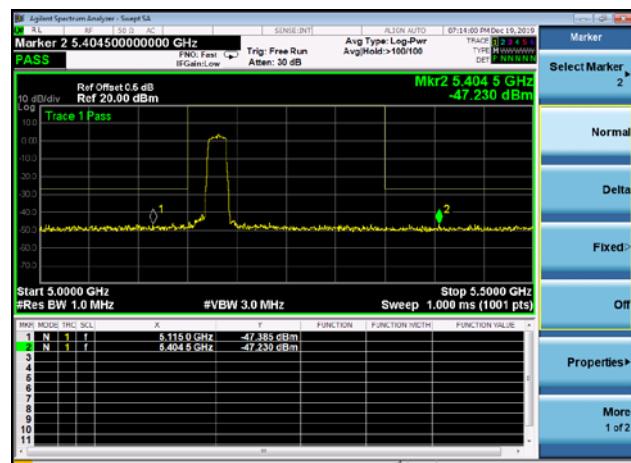


(802.11n20) Band Edge, Right Side

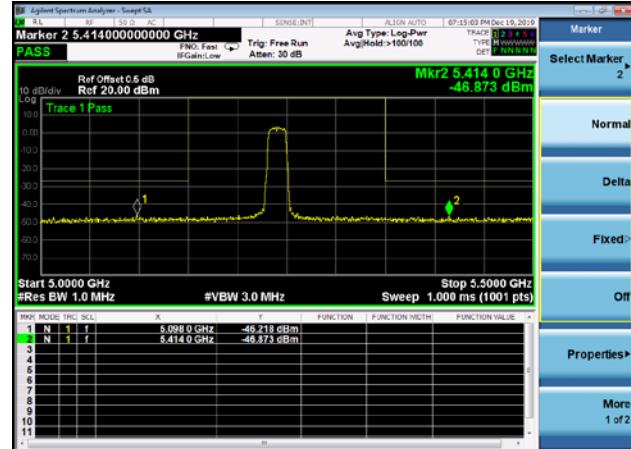


## 5.180~5.240 GHz


(802.11n40) Band Edge, Left Side

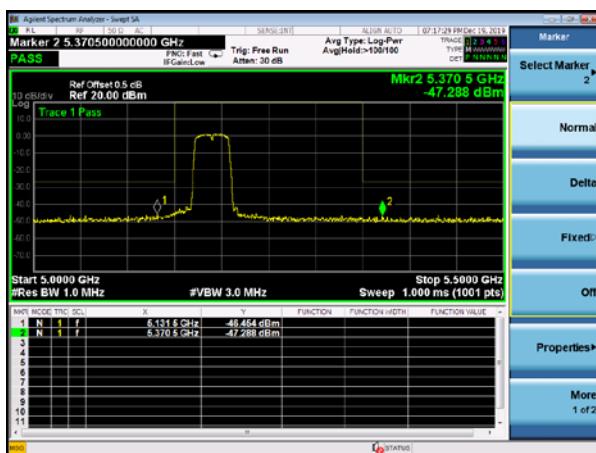


(802.11ac20) Band Edge, Left Side

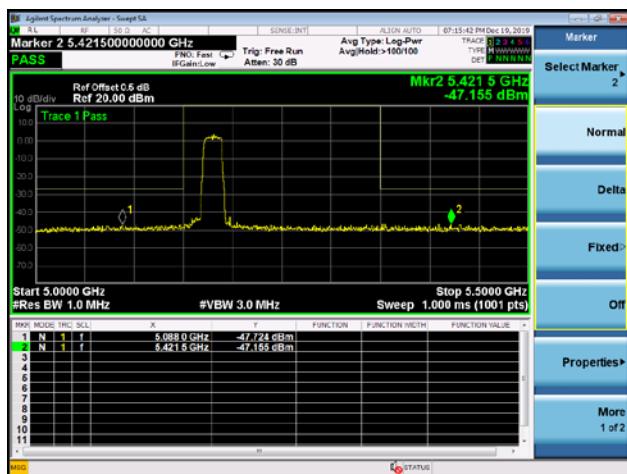

(802.11n40) Band Edge, Right Side

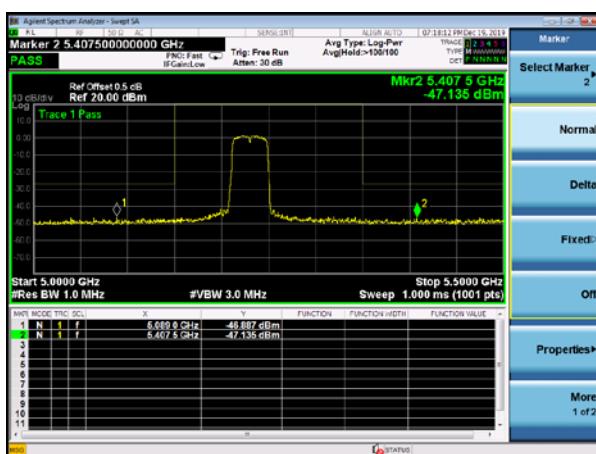


(802.11ac20) Band Edge, Right Side

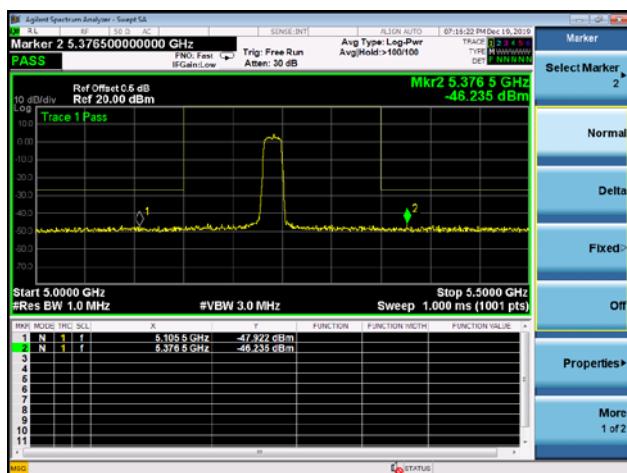


5.180~5.240 GHz


### (802.11ac40) Band Edge, Left Side

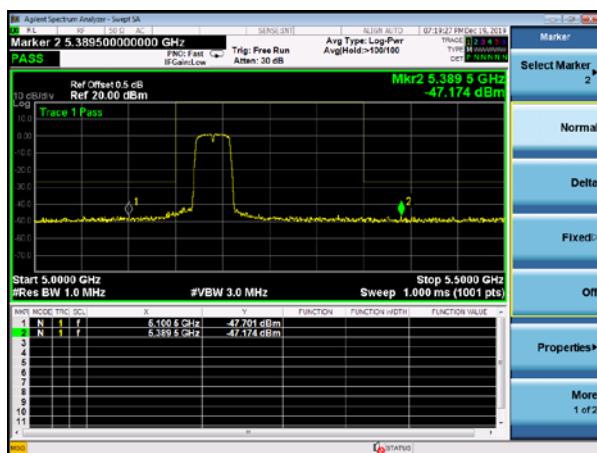


(802.11ac80) Band Edge, Left Side

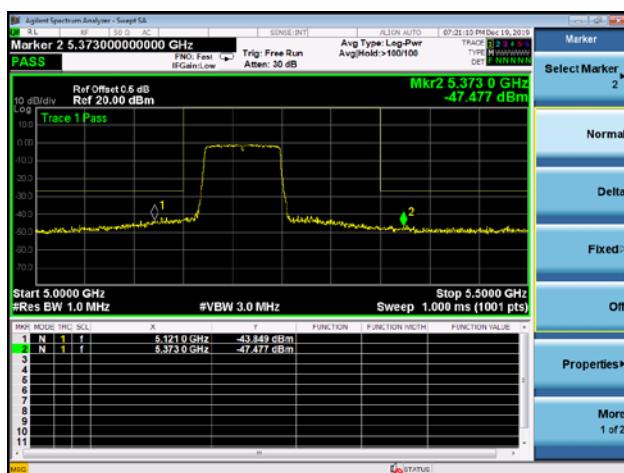

### (802.11ac40) Band Edge, Right Side

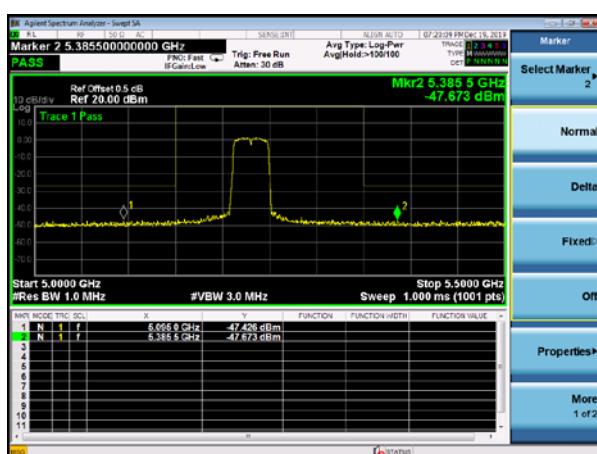


(802.11ac80) Band Edge, Right Side

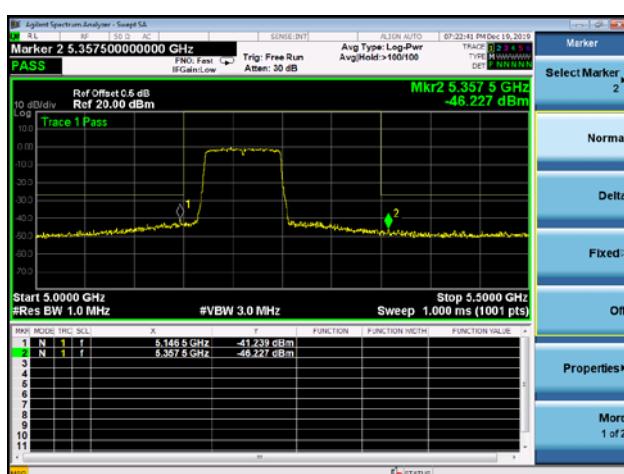


5.8G

5.745~5.825 GHz


(802.11a) Band Edge, Left Side

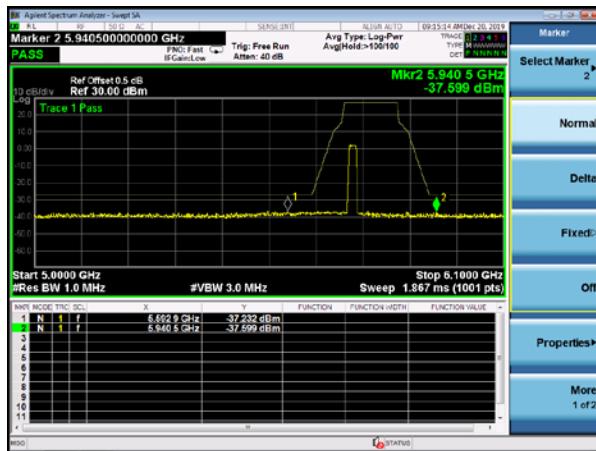


(802.11a) Band Edge, Right Side

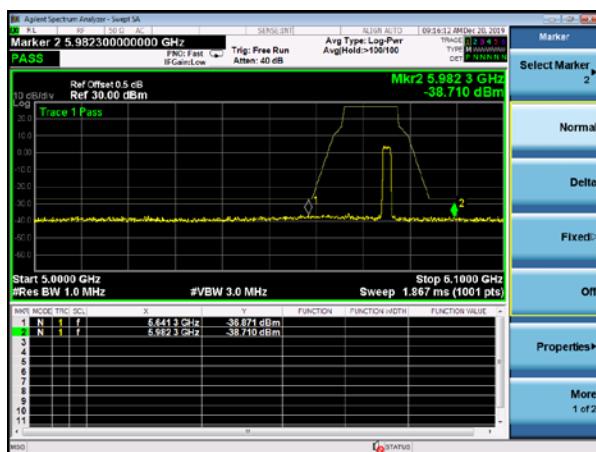

(802.11n20) Band Edge, Left Side

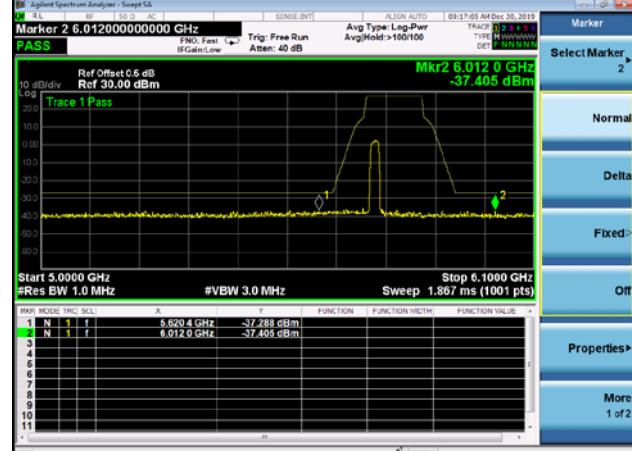


(802.11n20) Band Edge, Right Side

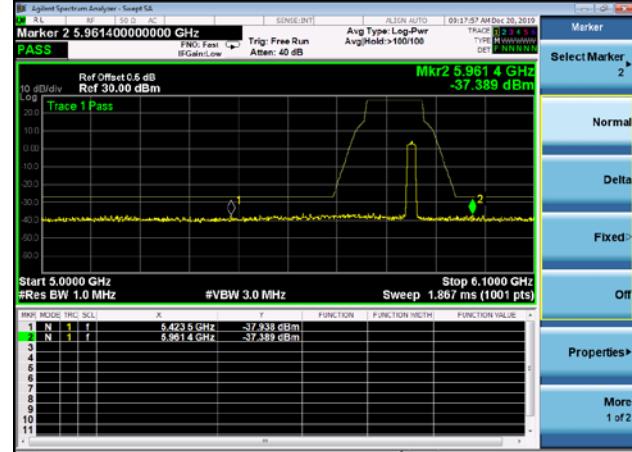


### 5.745~5.825 GHz


(802.11n40) Band Edge, Left Side

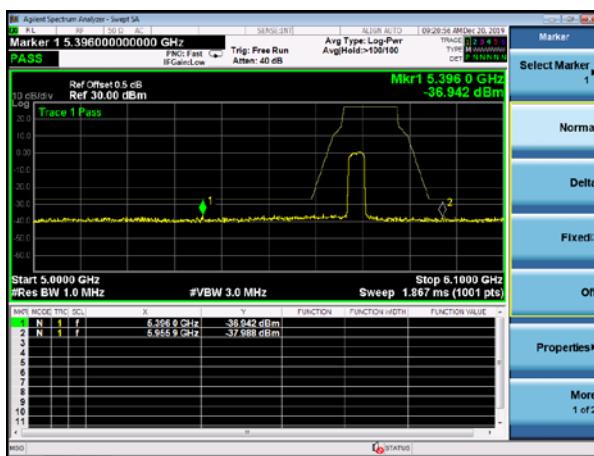


(802.11ac20) Band Edge, Left Side

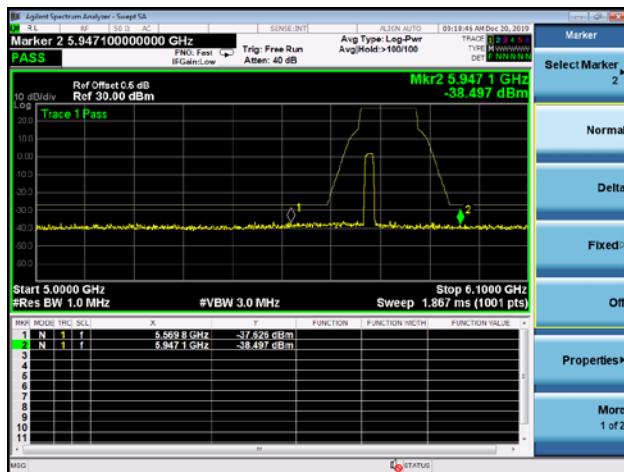

(802.11n40) Band Edge, Right Side

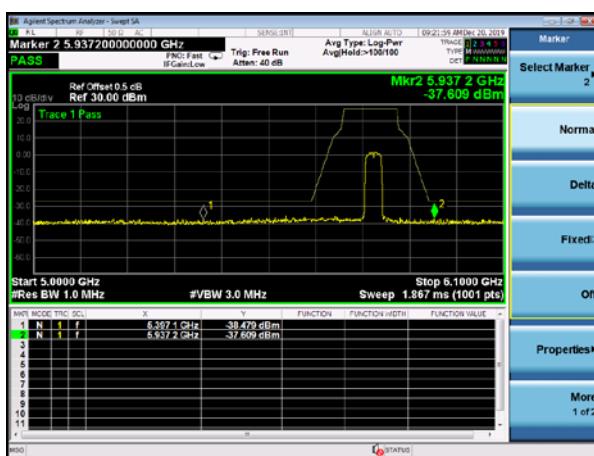


(802.11ac20) Band Edge, Right Side

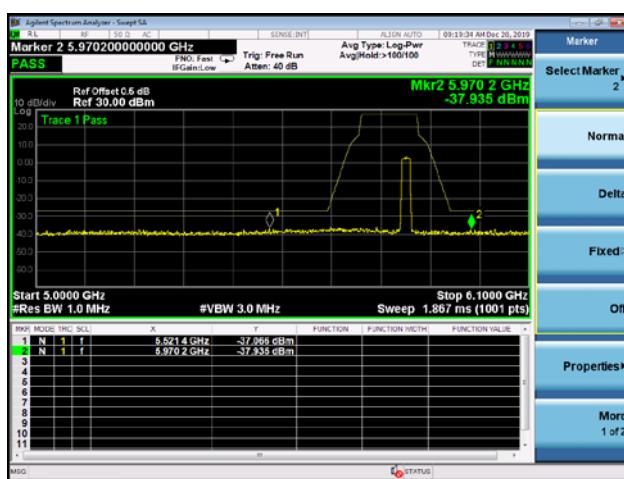


### 5.745~5.825 GHz


(802.11ac40) Band Edge, Left Side

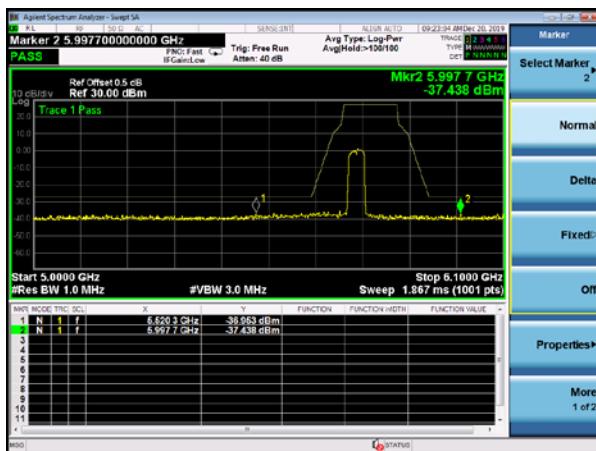


(802.11ac80) Band Edge, Left Side

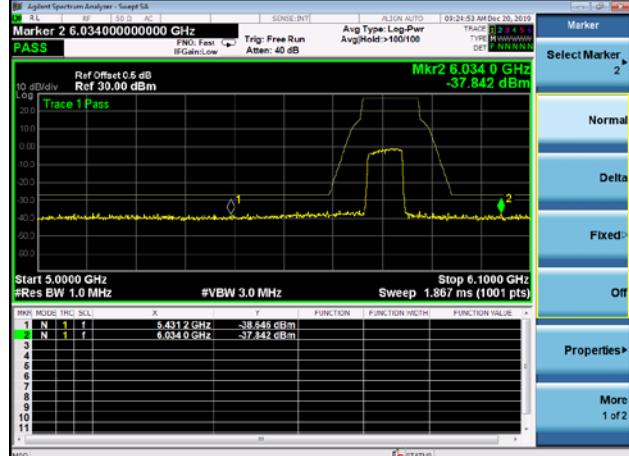

(802.11ac40) Band Edge, Right Side

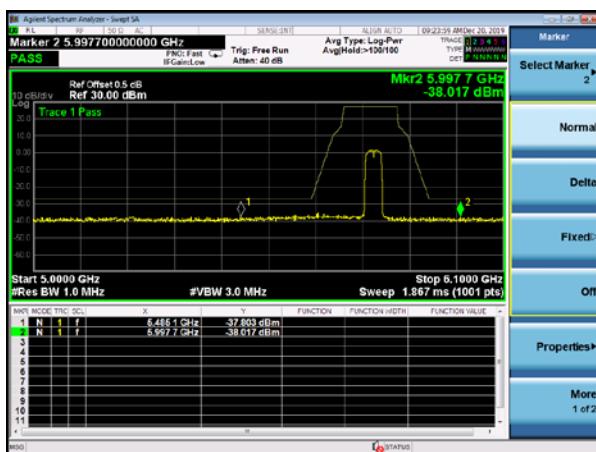


(802.11ac80) Band Edge, Right Side

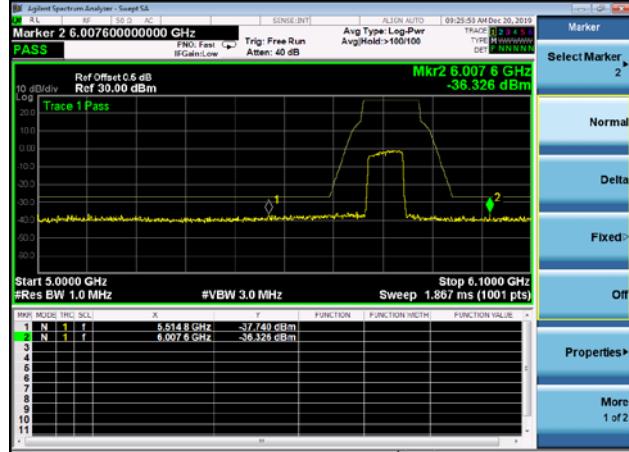


## Radiated bandedge

802.11 a  
For the frequency band 5150-5250MHz

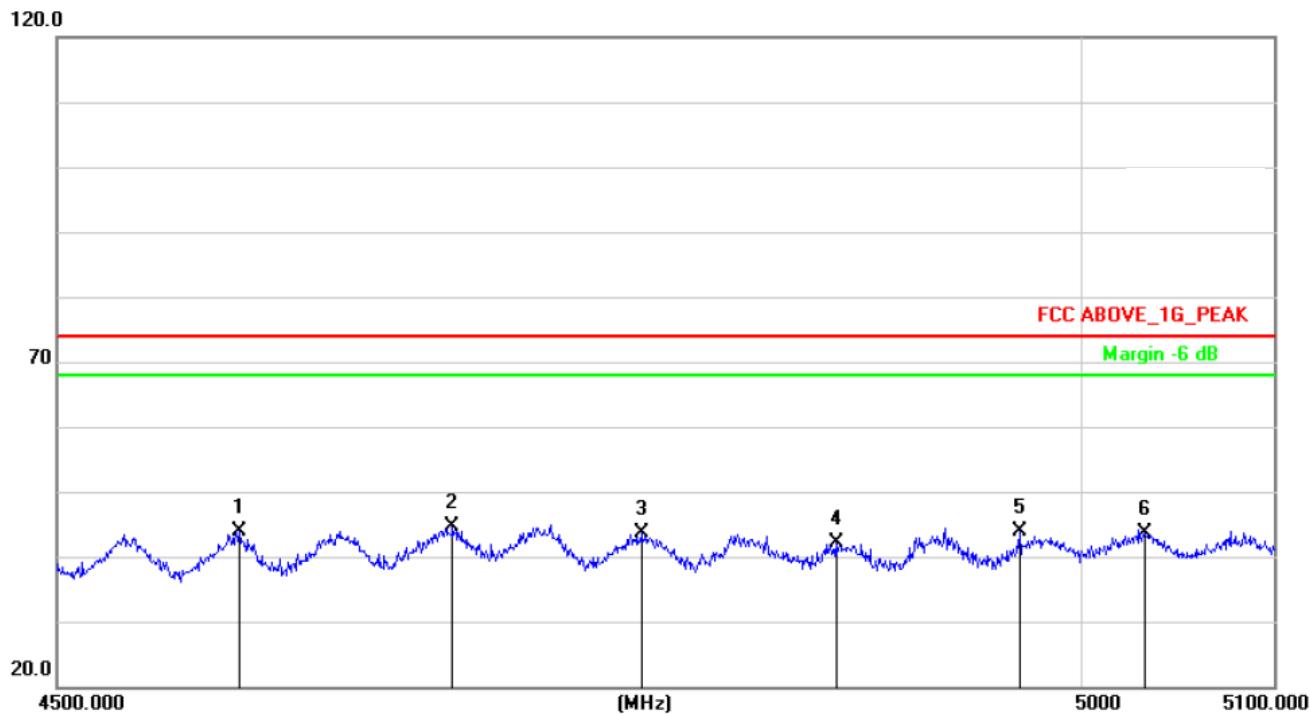

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4585.800	44.57	-0.59	43.98	74.00	-30.02	peak
2	4687.200	45.07	-0.52	44.55	74.00	-29.45	peak
3	4779.000	43.96	-0.45	43.51	74.00	-30.49	peak
4	4875.600	42.41	-0.38	42.03	74.00	-31.97	peak
5	4968.600	44.13	-0.31	43.82	74.00	-30.18	peak
6	5033.400	43.70	-0.15	43.55	74.00	-30.45	peak

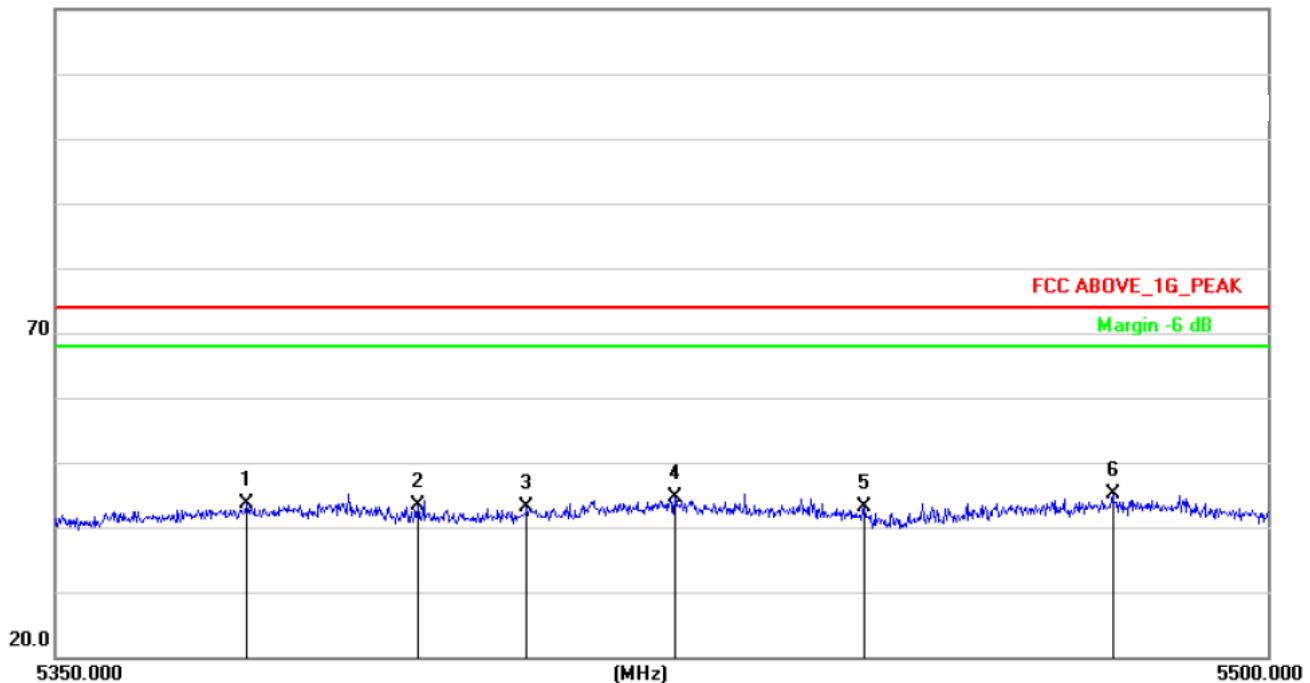120.0 dB<sub>uV/m</sub>


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dB <sub>uV/m</sub> )	Factor(dB/m)	(dB <sub>uV/m</sub> )	(dB <sub>uV/m</sub> )	(dB)	
1	5373.550	42.22	1.30	43.52	74.00	-30.48	peak
2	5394.550	41.95	1.39	43.34	74.00	-30.66	peak
3	5407.900	41.76	1.44	43.20	74.00	-30.80	peak
4	5426.200	42.99	1.52	44.51	74.00	-29.49	peak
5	5449.600	41.60	1.62	43.22	74.00	-30.78	peak
6	5480.650	43.35	1.75	45.10	68.20	-23.10	peak


**Note:**

1. This EUT was tested in 802.11a/n(HT20), n(HT40), ac20, ac40, AC80 mode and 802.11a the worst case position data was reported.

802.11n(HT20)


For the frequency band 5725-5850MHz

## Low Channel

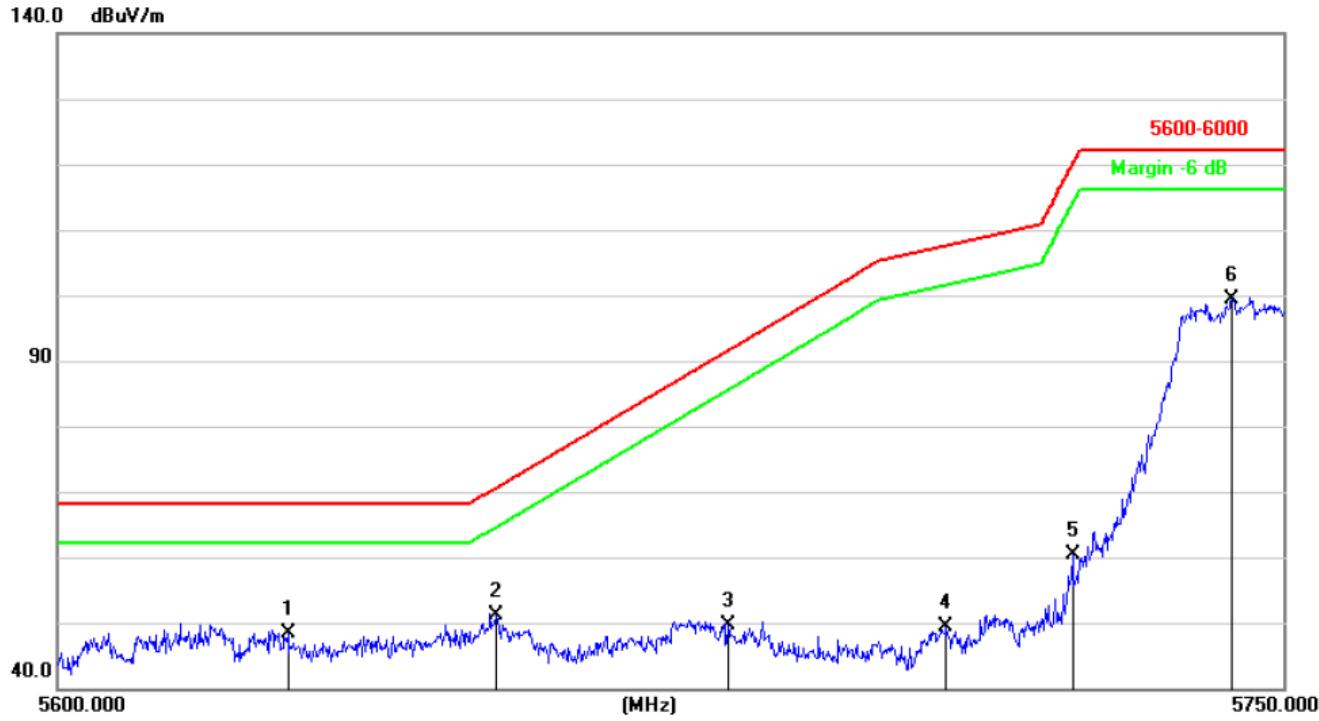


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5627.900	45.90	2.38	48.28	68.20	-19.92	peak
2	5653.250	48.61	2.49	51.10	70.61	-19.51	peak
3	5681.600	46.92	2.61	49.53	91.62	-42.09	peak
4	5708.450	46.60	2.72	49.32	107.57	-58.25	peak
5	5724.050	57.61	2.79	60.40	120.03	-59.63	peak
6	5743.700	96.55	2.87	99.42	122.20	-22.78	peak

## Middle Channel

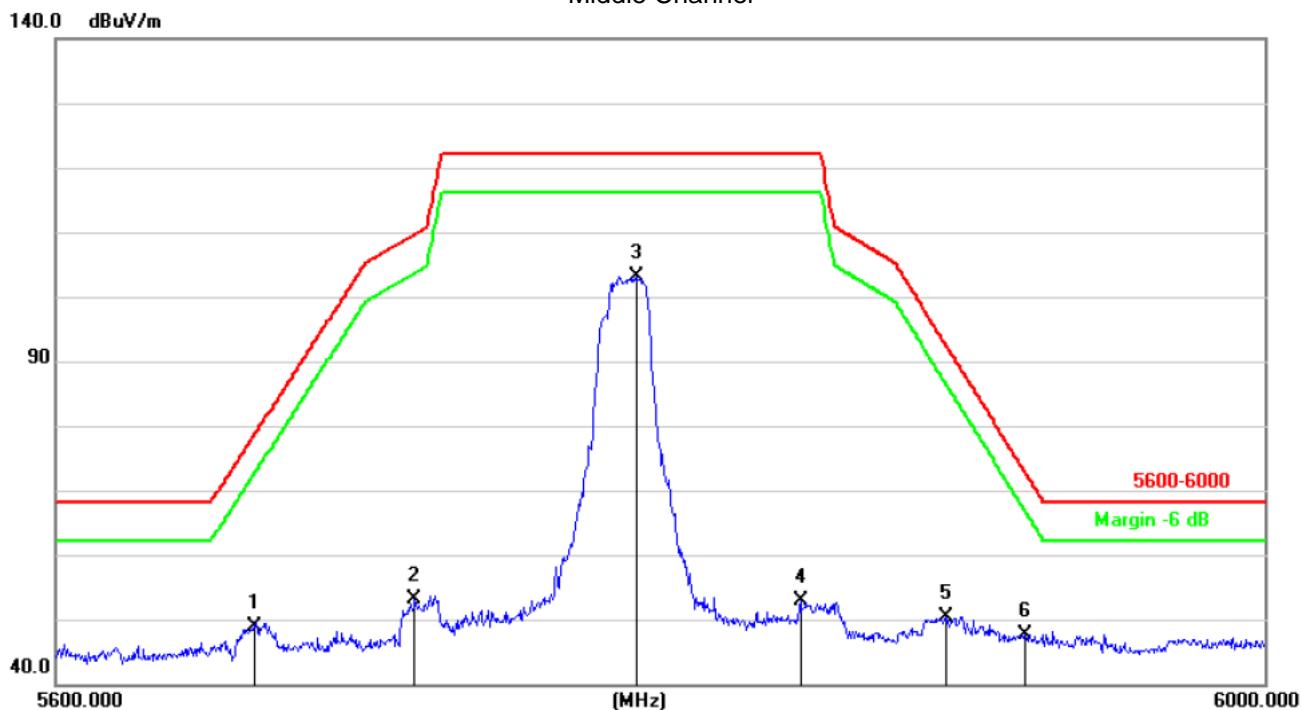

No.	Frequency (MHz)	Reading (dB <sub>uV/m</sub> )	Correct Factor(dB/m)	Result (dB <sub>uV/m</sub> )	Limit (dB <sub>uV/m</sub> )	Margin (dB)	Remark
1	5664.000	46.39	2.53	48.92	78.59	-29.67	peak
2	5716.000	50.30	2.75	53.05	109.68	-56.63	peak
3	5789.200	100.09	3.06	103.15	122.20	-19.05	peak
4	5843.200	49.63	3.29	52.92	122.20	-69.28	peak
5	5892.000	46.78	3.50	50.28	92.58	-42.30	peak
6	5918.800	44.09	3.61	47.70	72.77	-25.07	peak

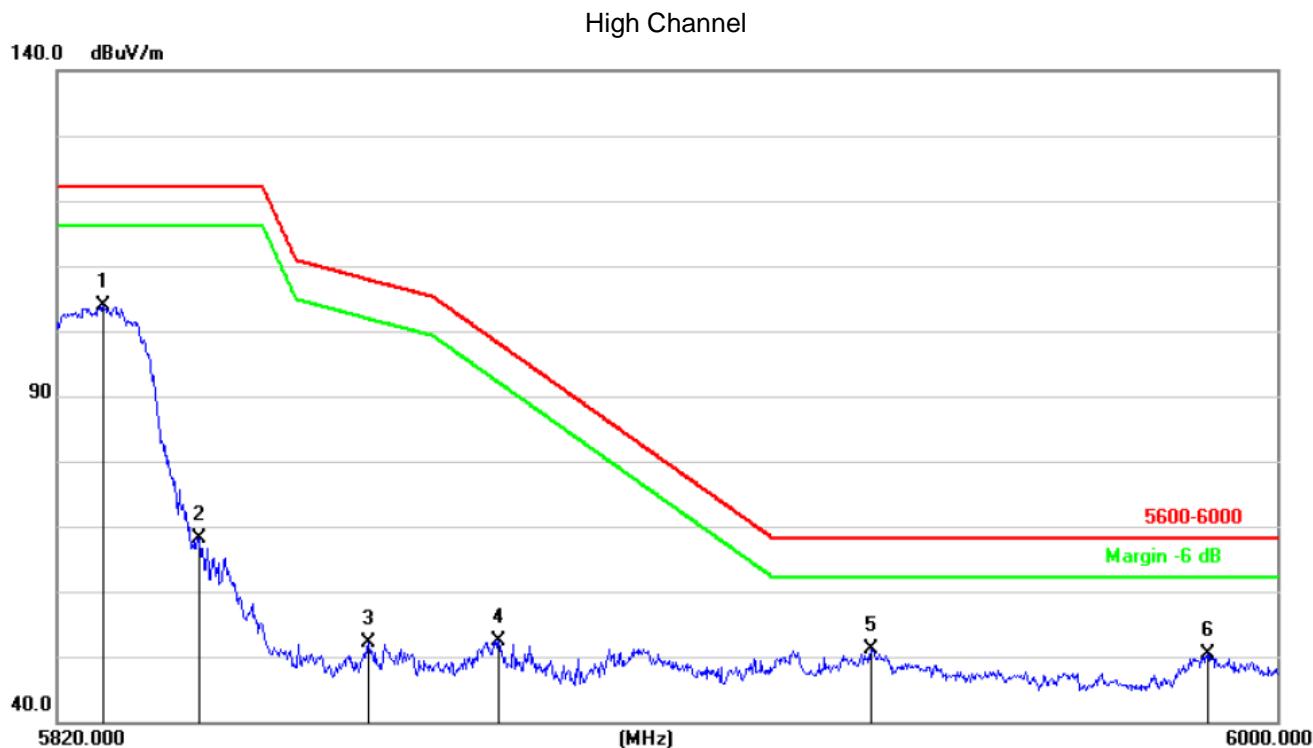

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5826.840	100.65	3.22	103.87	122.20	-18.33	peak
2	5840.880	64.95	3.28	68.23	122.20	-53.97	peak
3	5865.540	48.64	3.39	52.03	107.85	-55.82	peak
4	5884.620	48.98	3.47	52.45	98.06	-45.61	peak
5	5939.520	47.38	3.70	51.08	68.20	-17.12	peak
6	5989.740	46.52	3.92	50.44	68.20	-17.76	peak

**Note:**

1. This EUT was tested in 802.11a/n/ac(HT20), n/ac(HT40), ac(HT80) mode and 802.11n(HT20) the worst case position data was reported.