



Full

TEST REPORT

No. I14D00057-WLA

For

Client : Ingram Micro Chile S.A

Production : Smartphone

Model Name : S4040

FCC ID: 2AELAS4040

Hardware Version: V04

Software Version: V01

Issued date: 2015-05-20

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

Test Laboratory:

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: welcome@ecit.org.cn



RF Test Report

Report No.: I15D00057-WLA

Revision Version

Report Number	Revision	Date	Memo
I15D00057-WLA	00	2015-05-20	Initial creation of test report

CONTENTS

1. TEST LABORATORY	5
1.1. TESTING LOCATION	5
1.2. TESTING ENVIRONMENT	5
1.3. PROJECT DATA.....	5
1.4. SIGNATURE	5
2. CLIENT INFORMATION	6
2.1. APPLICANT INFORMATION.....	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
4. REFERENCE DOCUMENTS	8
4.1. REFERENCE DOCUMENTS FOR TESTING	8
5. SUMMARY OF TEST RESULTS	9
5.1. NOTES.....	10
5.2. STATEMENTS.....	10
6. TEST RESULT	11
6.1. MAXIMUM OUTPUT POWER.....	11
6.2. PEAK POWER SPECTRAL DENSITY	13
6.3. OCCUPIED 6DB BANDWIDTH	18
6.4. BAND EDGES COMPLIANCE	24
6.5. TRANSMITTER SPURIOUS EMISSION-CONDUCTED	28
6.6. TRANSMITTER SPURIOUS EMISSION-RADIATED	39
7. T TEST EQUIPMENTS AND ANCILLARIES USED FOR TESTS.....	52



8. TEST ENVIRONMENT.....	53
ANNEX A. DEVIATIONS FROM PRESCRIBED TEST METHODS	54

1. Test Laboratory

1.1. Testing Location

Company Name:	ECIT Shanghai, East China Institute of Telecommunications
Address:	7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China
Postal Code:	200001
Telephone:	(+86)-021-63843300
Fax:	(+86)-021-63843301

1.2. Testing Environment

Normal Temperature:	15-35°C
Extreme Temperature:	-10/+55°C
Relative Humidity:	20-75%

1.3. Project data

Project Leader:	Wang Yaqiong
Testing Start Date:	2015-04-16
Testing End Date:	2015-05-09

1.4. Signature



Wang Daming
(Prepared this test report)



Liu Jianquan
(Reviewed this test report)



Zheng Zhongbin
Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Ingram Micro Chile S.A
Address: El Rosal,4765,Huechuraba,Santiago,CL
Telephone: +56961702958
Postcode: 6582412

2.2. Manufacturer Information

Company Name: MOBIWIRE MOBILES (NINGBO) CO.,LTD
Address: No.999,Dacheng East Road,Fenghua City,Zhejiang
Telephone: +86-0574 88916450
Postcode: 315500

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

EUT Description	Smartphone
Model name	S4040
WLAN Frequency	2412MHz-2462MHz
WLAN Channel	Channel1-Channel11
WLAN type of modulation	802.11b:DSSS 802.11g/n: OFDM
Extreme Temperature	-10/+55°C
Nominal Voltage	3.8V
Extreme High Voltage	4.35V
Extreme Low Voltage	3.6V

Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N09	354648020000251	V04	V01	2015-04-15

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	RF cable	---
AE2	---	---

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15,Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	2014
ANSI 63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz	2009

5. Summary of Test Results

A brief summary of the tests carried out is shown as following.

Measurement Items	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247(a)	/	P
Peak Power Spectral Density	15.247(e)	/	P
Occupied 6dB Bandwidth	15.247(d)	/	P
Band Edges Compliance	15.247(b)	/	P
Transmitter Spurious Emission-Conducted	15.247	/	P
Transmitter Spurious Emission-Radiated	15.247,15.209,	/	P
AC Powerline Conducted Emission	15.107,15.207	/	P

Please refer to part 5 for detail.

The measurements are according to ANSI C63.10.

Terms used in Verdict column

P	Pass, the EUT complies with the essential requirements in the standard.
NP	Not Perform, the test was not performed by ECIT.
NA	Not Applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

Test Conditions

T _{nom}	Normal temperature
T _{min}	Low Temperature
T _{max}	High Temperature
V _{nom}	Normal Voltage
V _{min}	Low Voltage
V _{max}	High Voltage
H _{nom}	Norm Humidity
Anom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	T _{nom}	22°C
Voltage	V _{nom}	3.8V
Humidity	H _{nom}	32%
Air Pressure	Anom	1010hPa

5.1. Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with section 3.

The test results of this test report relate exclusively to the item(s) tested as specified in section 5.

The following deviation from, additions to, or exclusions from the test specifications have been made. See section 3.

5.2. Statements

The product name S4040, supporting
GSM/GPRS/WLAN/BT/WCDMA/HSDPA/HSUPA/HSPA+, manufactured by MOBIWIRE
MOBILES (NINGBO) CO.,LTD is a new product for testing.

ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

6. Test result

6.1. Maximum Output Power

6.1.1 Measurement Limit and method:

Standard	Limit(dBm)
FCC CRF 15.247(b)	< 30

6.1.2 Test procedure

The measurement is according to ANSI C63.10 clause 6.10.2

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW \geq OBW, VBW \geq 3RBW.
4. Detector : Peak.
5. Trace mode: Max Hold

6.1.3 Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

6.1.4 Maximum Peak Output Power-conducted

Measurement Results:

802.11b/g mode

Mode	Data Rate(Mbps)	Test Result(dBm)		
		2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11b	1	17.37	17.31	17.28
	2	16.07	/	/
	5.5	15.86	/	/
	11	16.16	/	/
802.11g	6	18.36	/	/
	9	18.85	/	/
	12	19.18	/	/



RF Test Report

Report No.: I15D00057-WLA

	18	18..71	/	/
	24	19.06	/	/
	36	19.13	/	/
	48	19.61	18.95	18.64
	54	19.19	/	/

The data rate 1Mbps and 48Mbps are selected as worse condition, and the following cases are performed with this condition.

802.11n mode

Mode	Data Rate(Index)	Test Result(dBm)		
		2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11n(20MHz)	MCS0	18.47	/	/
	MCS1	18.62	/	/
	MCS2	18.80	/	/
	MCS3	18.72	/	/
	MCS4	18.63	/	/
	MCS5	19.25	/	/
	MCS6	19.50	19.18	19.11
	MCS7	18.51	/	/

The data rate MCS6 is selected as worse condition, and the following case are performed with this condition.

6.1.5 Maximum Average Output Power-conducted

802.11b/g mode

Mode	Test Result(dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11b	14.47	14.45	14.04
802.11g	11.74	10.97	11.04

802.11n mode

Mode	Test Result(dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11n(20MHz)	12.33	11.18	11.02

Conclusion: PASS

6.2. Peak Power Spectral Density

6.2.1 Measurement Limit:

Standard	Limit
FCC CFR Part 15.247(e)	< 8dBm/3 KHz

6.2.2 Test procedures

The measurement is according to ANSI C63.10 clause 6.11.2.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set SPAN = 20 MHz (For devices with a nominal 40 MHz BW, 50 MHz span will be needed)
5. Set the RBW to 3 kHz.
6. Set the VBW to 10 kHz.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the RBW.
12. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

6.2.3 Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

6.2.4 Measurement Results:


802.11b/g mode

Mode	Channel	Power Spectral Density(dBm/3kHz)	Conclusion
------	---------	----------------------------------	------------

802.11b	1	Fig.1	-15.2	P
	6	Fig.2	-16.067	P
	11	Fig.3	-16.123	P
802.11g	1	Fig.4	-16.686	P
	6	Fig.5	-17.227	P
	11	Fig.6	-17.436	P


802.11n mode

Mode	Channel	Power Spectral Density(dBm/3kHz)		Conclusion
802.11n(20MHz)	1	Fig.7	-15.572	P
	6	Fig.8	-16.734	P
	11	Fig.9	-16.17	P

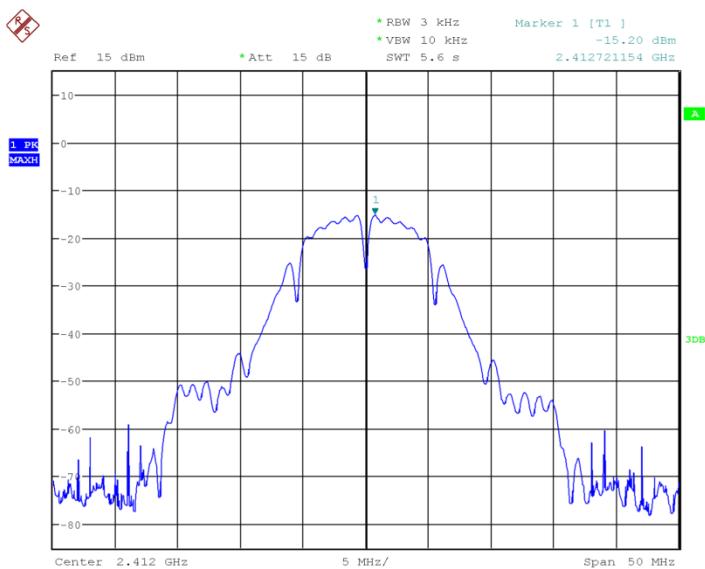Conclusion: PASS
Test graphs as below:


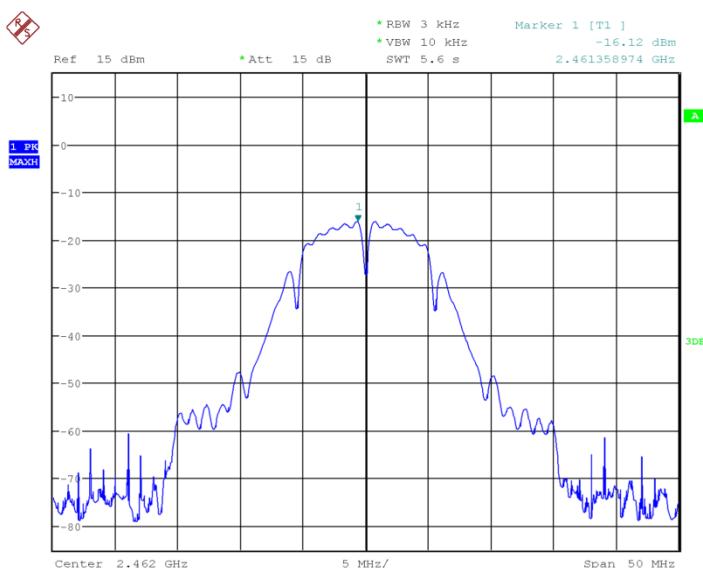
Date: 6.MAY.2015 19:43:03

Fig.1 Power Spectral Density (802.1b,Ch1)

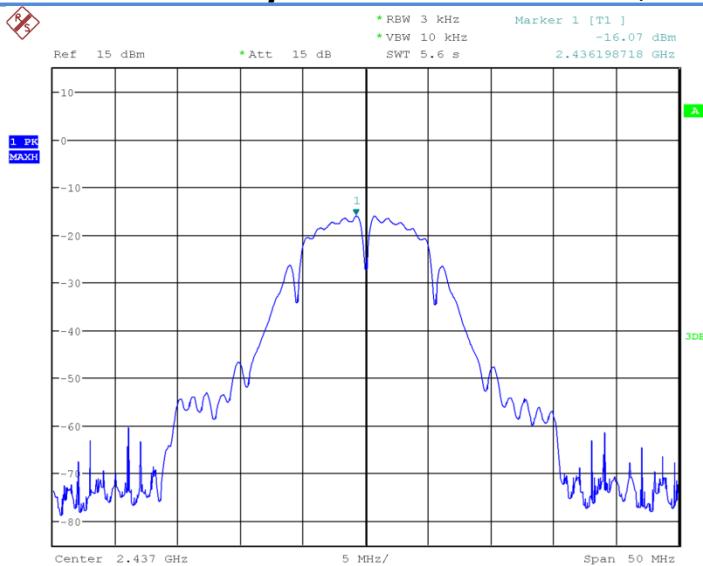


Date: 6.MAY.2015 19:43:37

Fig.2 Power Spectral Density (802.1b,Ch6)




Date: 6.MAY.2015 19:44:06

Fig.3 Power Spectral Density (802.1b,Ch11)

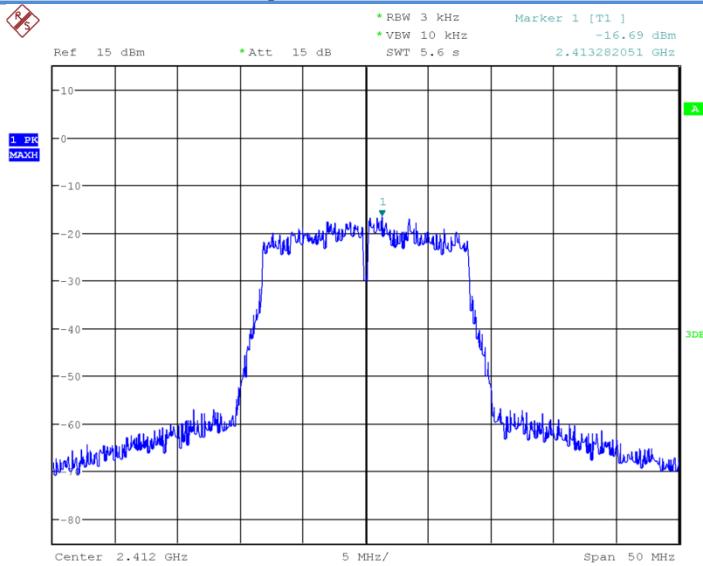


Date: 6.MAY.2015 19:45:32

Fig.4 Power Spectral Density (802.1g,Ch1)

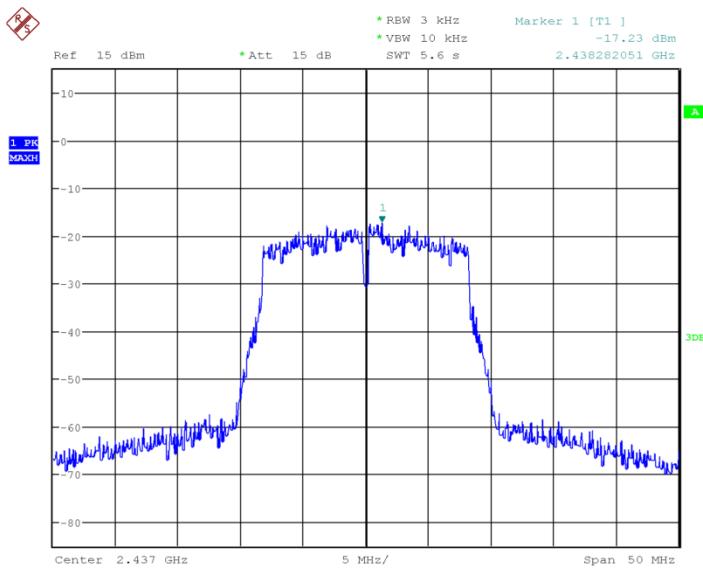


Date: 6.MAY.2015 19:46:00

Fig.5 Power Spectral Density (802.1g,Ch6)

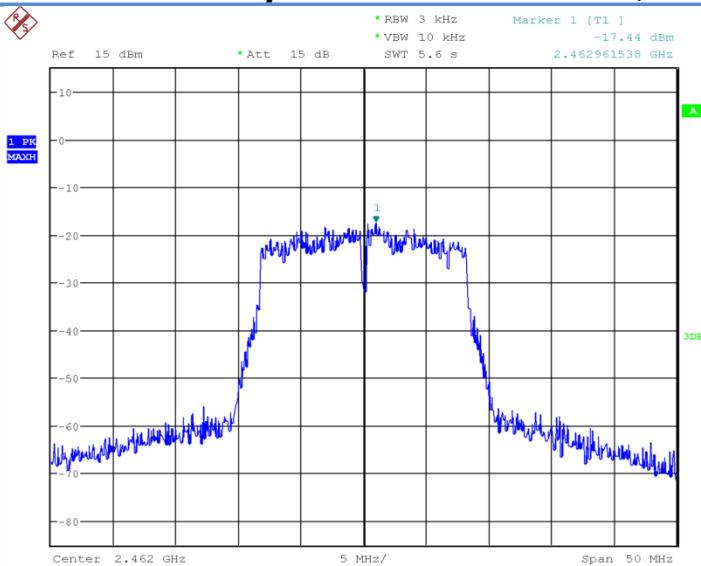


Date: 6.MAY.2015 19:46:46

Fig.6 Power Spectral Density (802.1g,Ch11)

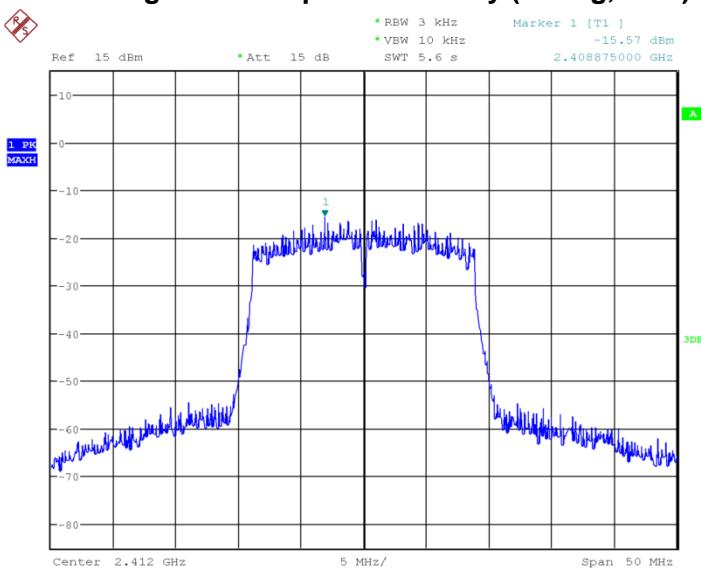


Date: 6.MAY.2015 19:47:28

Fig.7 Power Spectral Density (802.1n-20MHz,Ch1)

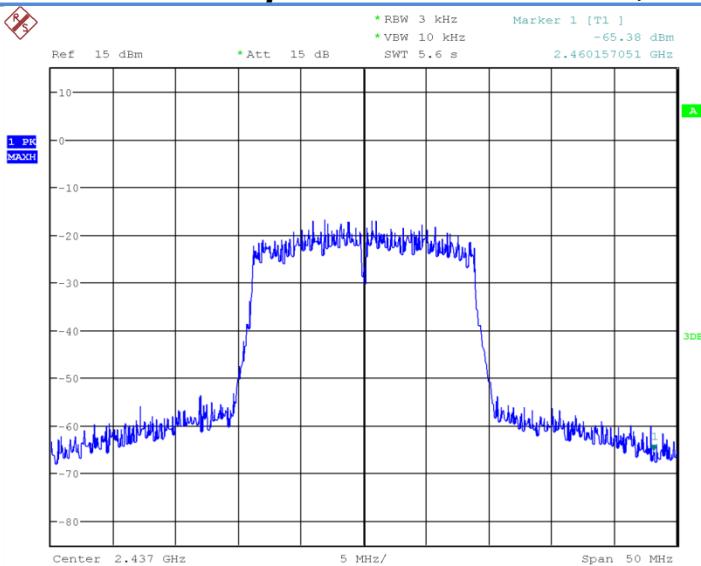

Date: 6.MAY.2015 19:47:58

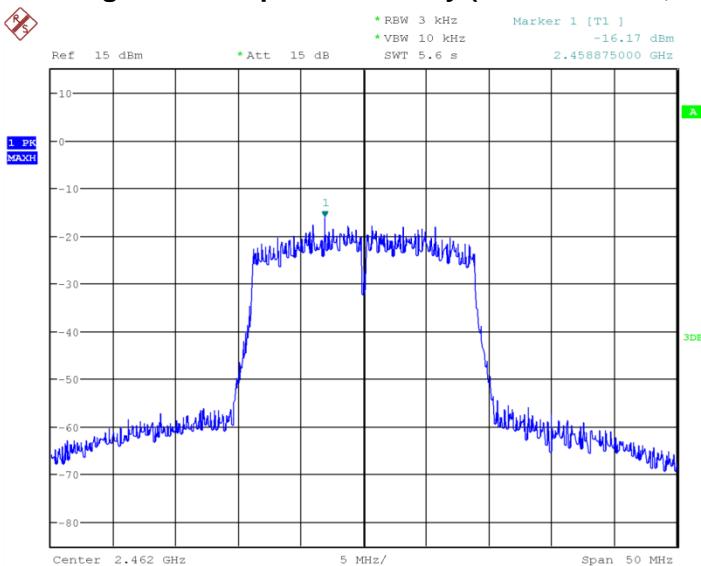Fig.8 Power Spectral Density (802.1n-20MHz,Ch6)


Date: 6.MAY.2015 19:48:25

Fig.9 Power Spectral Density (802.1n-20MHz,Ch11)

6.3. Occupied 6dB Bandwidth

6.3.1 Measurement Limit:

Standard	Limit(KHz)
FCC 47 CFR Part 15.247(a)	≥500

6.3.2 Test procedure

The measurement is according to ANSI C63.10 clause 6.9.1.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW = 100 kHz.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.3 Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------


6.3.4 Measurement Result:**802.11b/g mode**

Mode	Channel	Occupied 6dB Bandwidth(MHz)		Conclusion
802.11b	1	Fig.10	9.295	P
	6	Fig.11	9.295	P
	11	Fig.12	9.295	P
802.11g	1	Fig.13	16.506	P
	6	Fig.14	16.506	P
	11	Fig.15	16.426	P


802.11n mode

Mode	Channel	Occupied 6dB Bandwidth(MHz)		Conclusion
802.11n(20MHz)	1	Fig.16	17.788	P
	6	Fig.17	17.788	P
	11	Fig.18	17.708	P

Conclusion: PASS

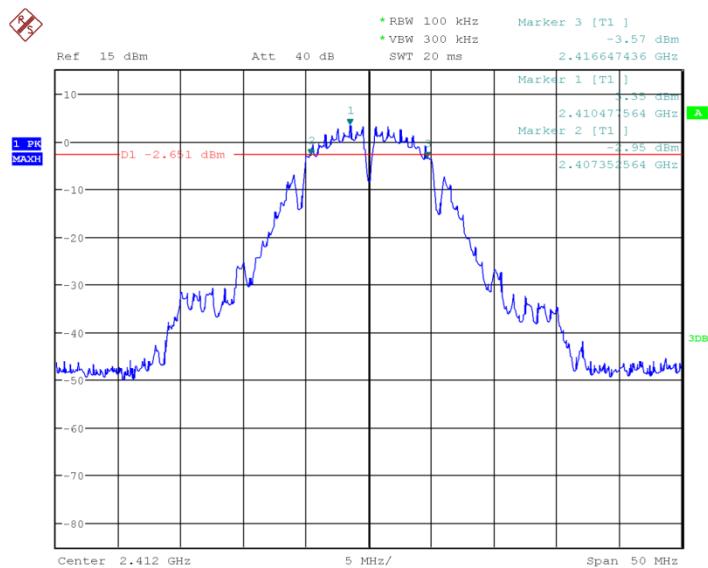
Test graphs as below:


Date: 6.MAY.2015 19:49:20

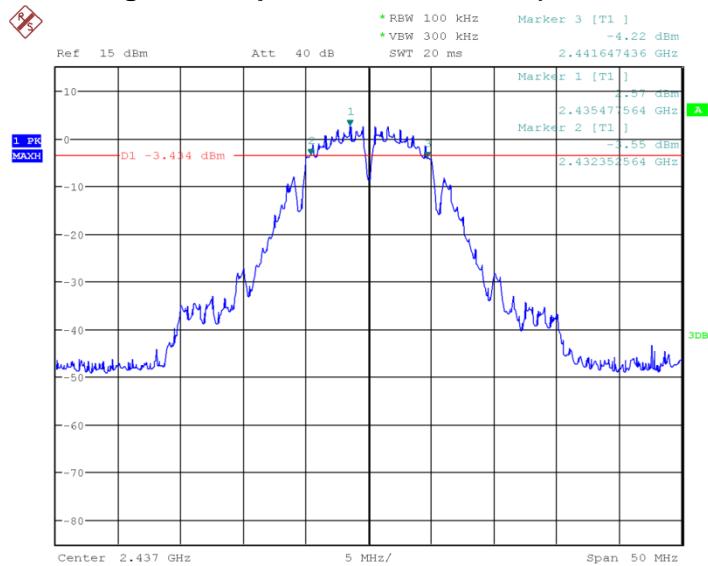Fig.10 Occupied 6dB Bandwidth (802.11b, Ch1)


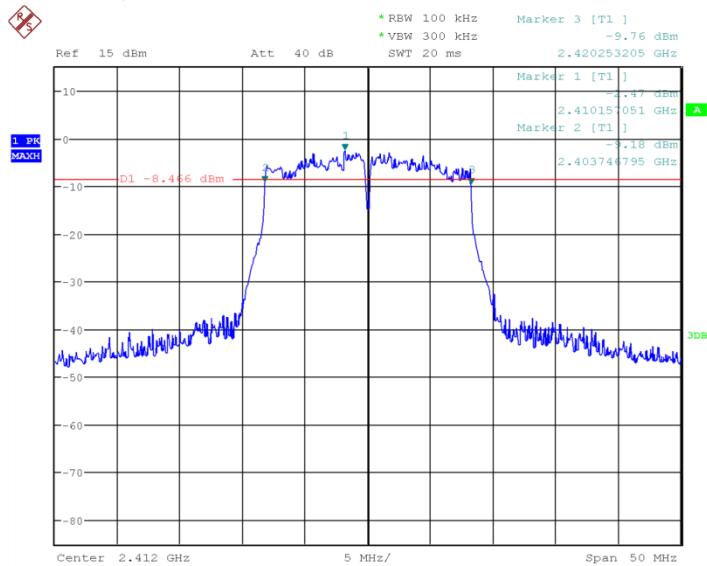
Date: 6.MAY.2015 19:49:56

Fig.11 Occupied 6dB Bandwidth (802.11b, Ch6)

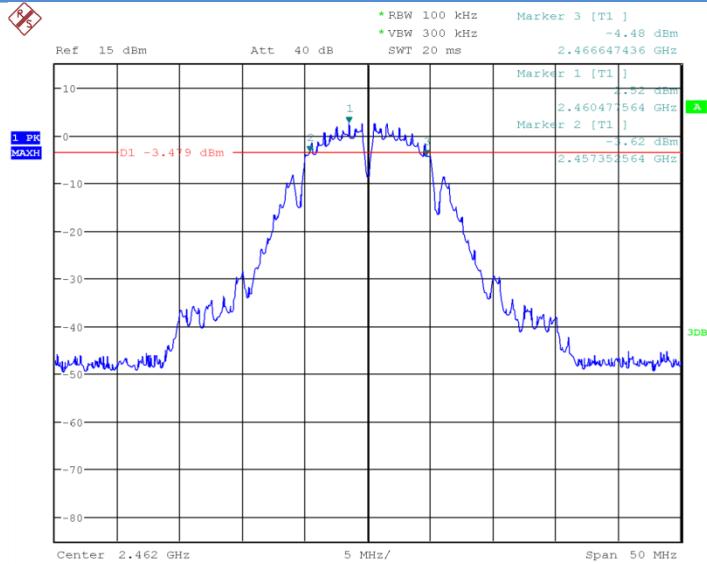


Date: 6.MAY.2015 20:00:15

Fig.12 Occupied 6dB Bandwidth (802.11b, Ch11)




Date: 6.MAY.2015 20:21:07

Fig.13 Occupied 6dB Bandwidth (802.11g, Ch1)

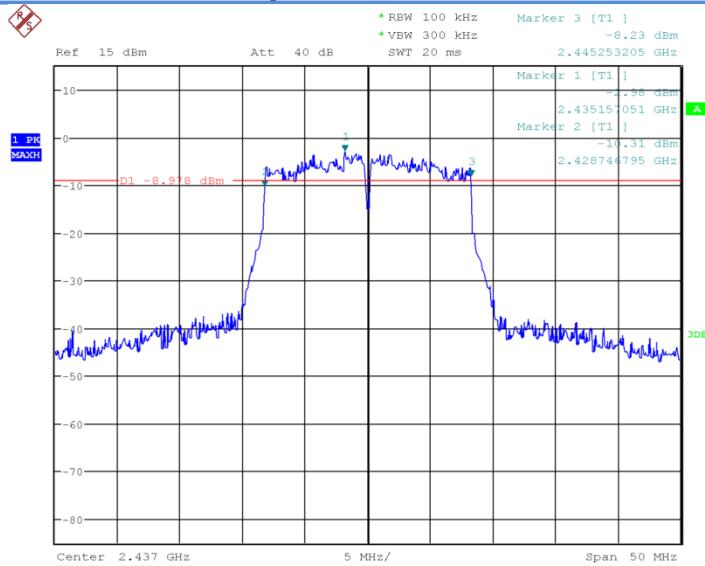


Date: 6.MAY.2015 20:21:41

Fig.14 Occupied 6dB Bandwidth (802.11g, Ch6)

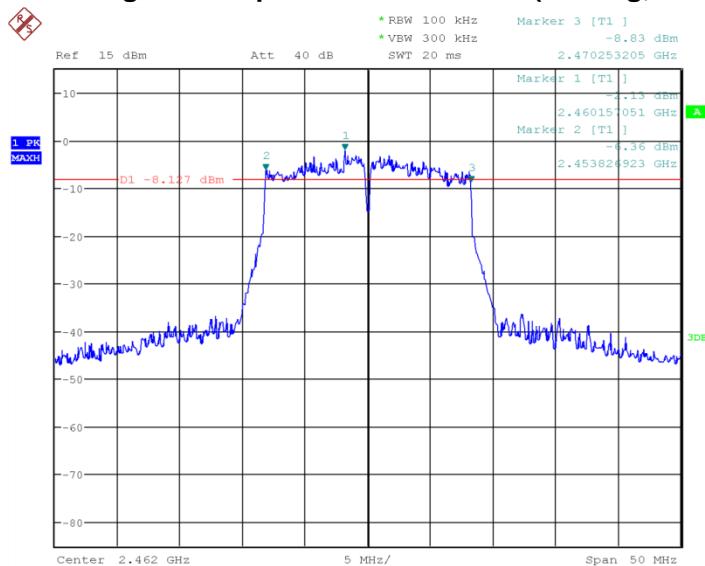


Date: 6.MAY.2015 20:22:24

Fig.15 Occupied 6dB Bandwidth (802.11g, Ch11)

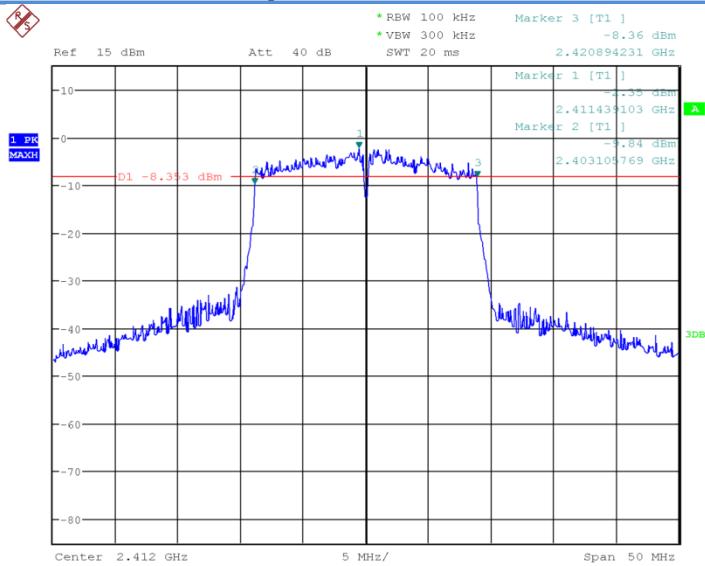


Date: 6.MAY.2015 20:23:20

Fig.16 Occupied 6dB Bandwidth (802.11n-20MHz, Ch1)

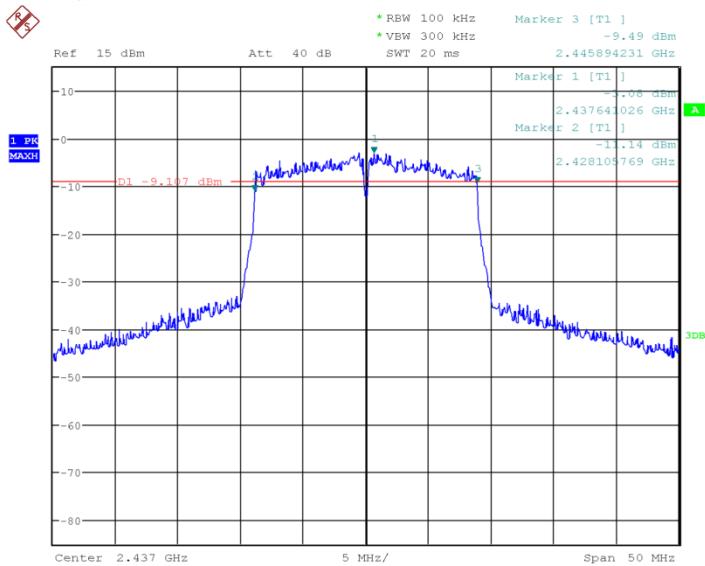

Date: 6.MAY.2015 20:23:47

Fig.17 Occupied 6dB Bandwidth (802.11n-20MHz, Ch6)

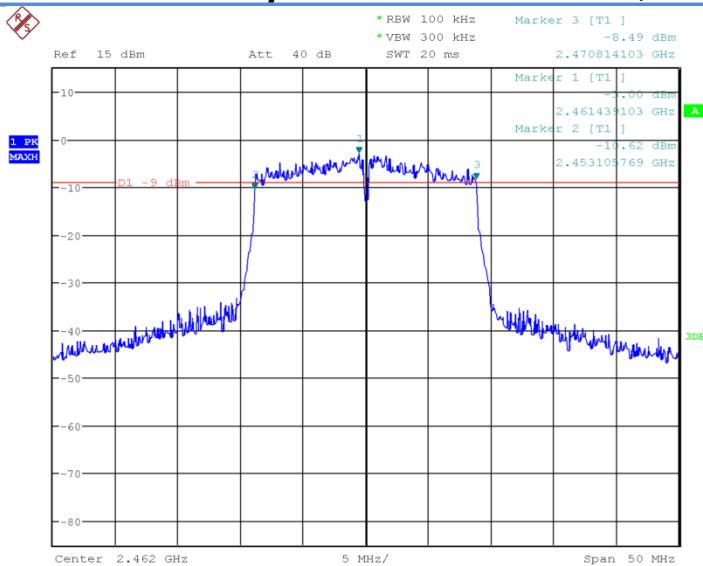

Date: 6.MAY.2015 20:24:16

Fig.18 Occupied 6dB Bandwidth (802.11n-20MHz, Ch11)

6.4. Band Edges Compliance

6.4.1 Measurement Limit:

Standard	Limited(dBc)
FCC 47 CFR Part 15.247(d)	>20

6.4.2 Test procedures

The measurement is according to ANSI C63.10 clause 6.9.2.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set instrument center frequency to the frequency of the emission to be measured (must be within 2MHz of the authorized band edge).
4. Set span to 2 MHz.
5. RBW = 100 kHz.
6. $VBW \geq [3 \times RBW]$.
7. Detector = peak.
8. Sweep time = auto.
9. Trace mode = max hold.
10. Allow sweep to continue until the trace stabilizes

6.4.3 Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

6.4.4 Measurement results

802.11b/g mode


Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.19	P
	11	Fig.20	P
802.11g	1	Fig.21	P
	11	Fig.22	P

802.11n mode

Mode	Channel	Test Results	Conclusion
802.11n(20MHz)	1	Fig.23	P
	11	Fig.24	P


Conclusion: PASS

Test graphs as blew:

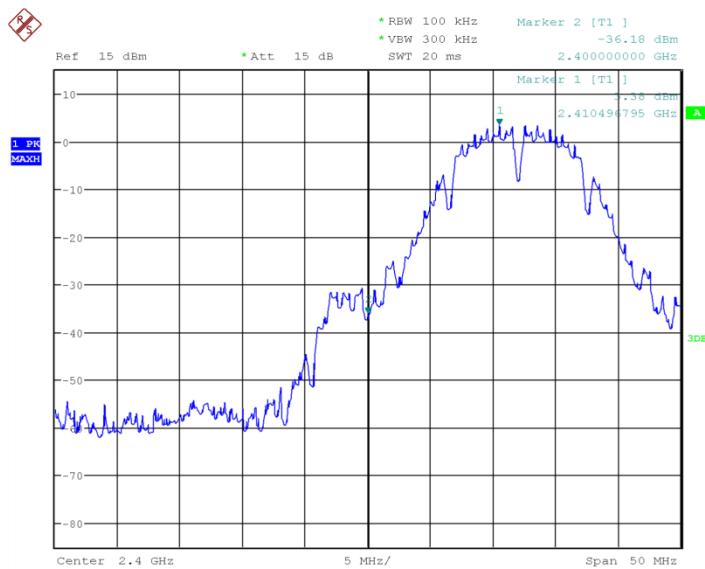


Date: 6.MAY.2015 20:25:02

Fig.19 Band Edges (802.11b, Ch1)

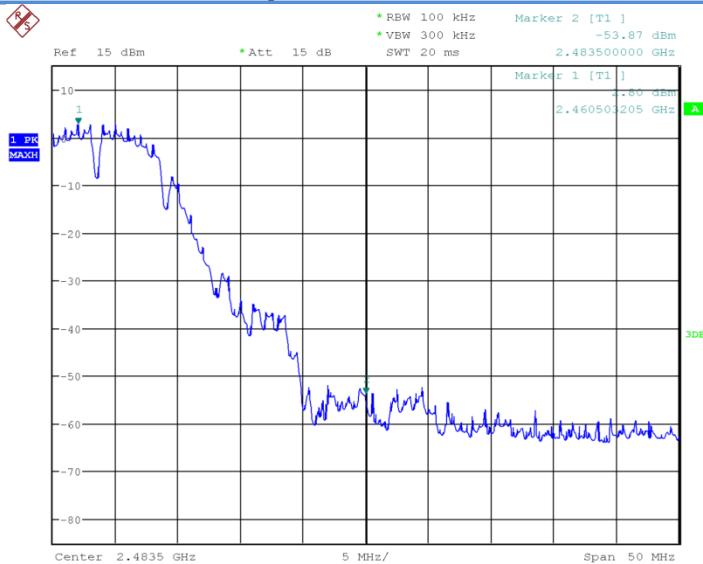


Date: 6.MAY.2015 20:25:41

Fig.20 Band Edges (802.11b, Ch11)

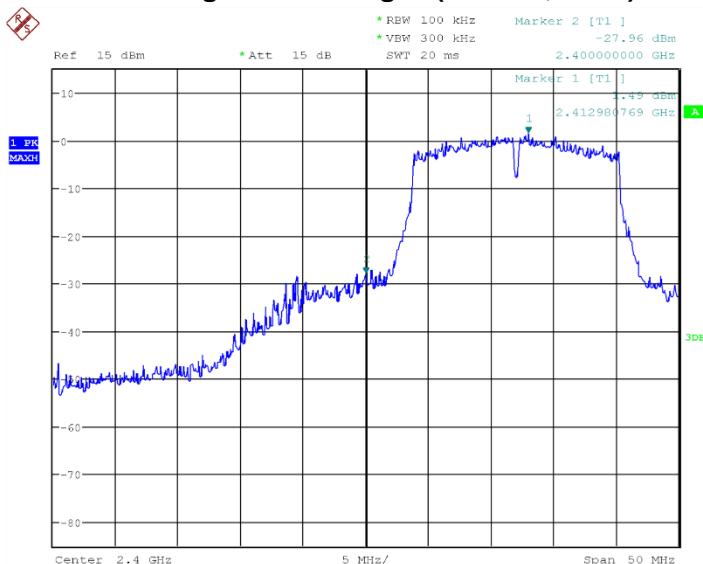


Date: 19.DEC.2014 15:55:46

Fig.21 Band Edges (802.11g, Ch1)

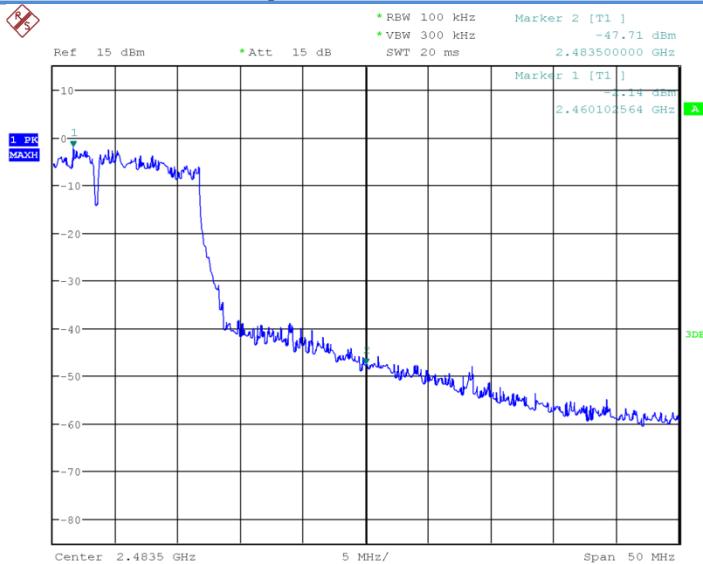


Date: 6.MAY.2015 20:27:45

Fig.22 Band Edges (802.11g, Ch11)

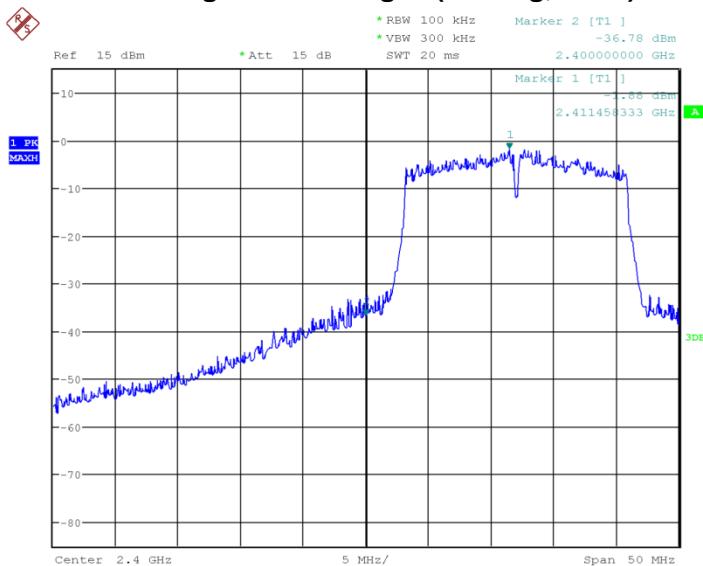

Date: 6.MAY.2015 20:28:32

Fig.23 Band Edges (802.11n-20MHz, Ch1)

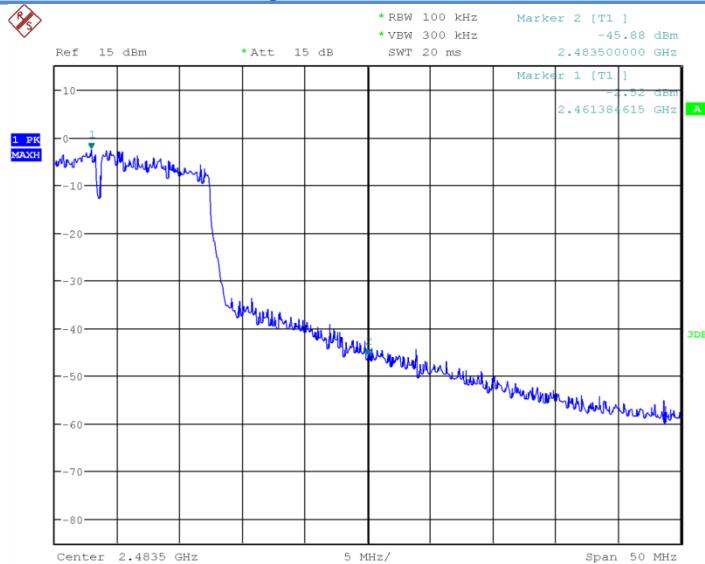

Date: 6.MAY.2015 20:29:03

Fig.24 Band Edges (802.11b-20MHz, Ch11)

6.5. Transmitter Spurious Emission-conducted

6.5.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(d)	20dB below peak output power in 100KHz bandwidth

6.5.2 Test procedures

This measurement is according to ANSI C63.10 clause 6.5, 6.6, 6.9.2.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.

Reference level measurement

3. Set instrument center frequency to DTS channel center frequency.
4. Set the span to ≥ 1.5 times the DTS bandwidth.
5. Set the RBW = 100 kHz.
6. Set the VBW $\geq [3 \times \text{RBW}]$.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum PSD level.

Emission level measurement

12. Set the center frequency and span to encompass frequency range to be measured.

13. Set the RBW = 100 kHz.
14. Set the VBW $\geq [3 \times \text{RBW}]$.
15. Detector = peak.
16. Sweep time = auto couple.
17. Trace mode = max hold.
18. Allow trace to fully stabilize.
19. Use the peak marker function to determine the maximum amplitude level.

6.5.3 Measurement Uncertainty:

Frequency Range	Uncertainty
30MHz $\leq f \leq$ 2GHz	0.63
2GHz $\leq f \leq$ 3.6GHz	0.82
3.6GHz $\leq f \leq$ 8GHz	1.55
8GHz $\leq f \leq$ 20GHz	1.86
20GHz $\leq f \leq$ 22GHz	1.90
22GHz $\leq f \leq$ 26GHz	2.20

6.5.4 Measurement Result:


802.11b/g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412GHz	Fig.25	P
		30MHz~26GHz	Fig.26	P
	6	2.437GHz	Fig.27	P
		30MHz~26GHz	Fig.28	P
	11	2.472GHz	Fig.29	P
		30MHz~26GHz	Fig.30	P
802.11g	1	2.412GHz	Fig.31	P
		30MHz~26GHz	Fig.32	P
	6	2.437GHz	Fig.33	P
		30MHz~26GHz	Fig.34	P
	11	2.472GHz	Fig.35	P

		30MHz~26GHz	Fig.36	P
--	--	-------------	--------	---


802.11n mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(20MHz)	1	2.412GHz	Fig.37	P
		30MHz~26GHz	Fig.38	P
	6	2.437GHz	Fig.39	P
		30MHz~26GHz	Fig.40	P
	11	2.472GHz	Fig.41	P
		30MHz~26GHz	Fig.42	P

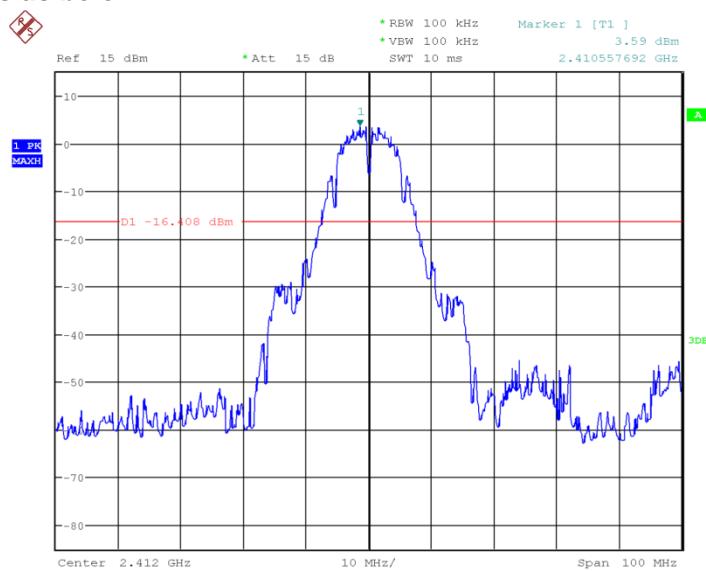Conclusion: PASS
Test graphs as below:


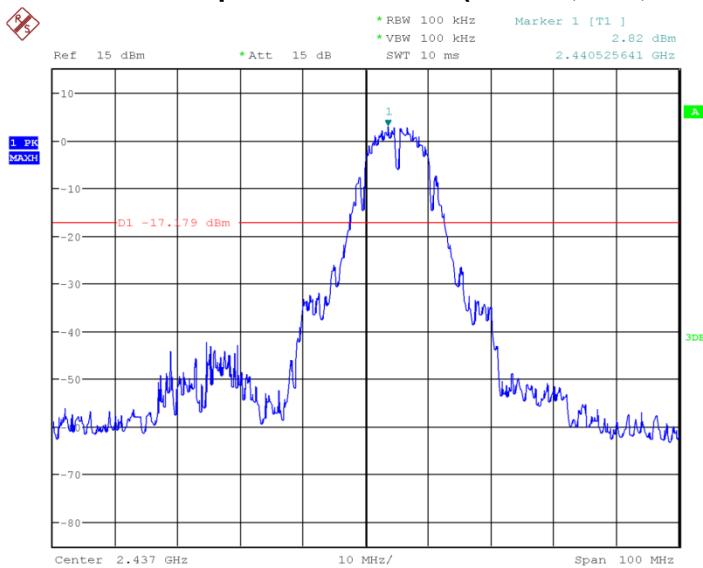
Date: 6.MAY.2015 20:31:31

Fig.25 Conducted Spurious Emission (802.11b, Ch1)

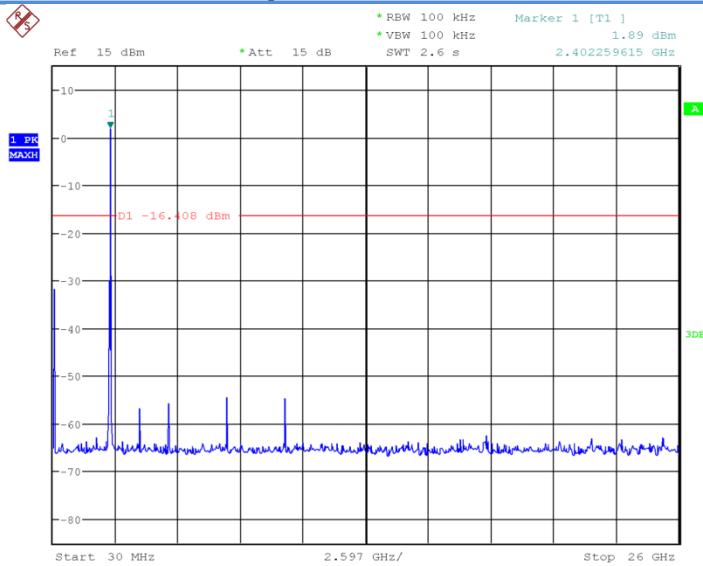


Date: 6.MAY.2015 20:31:52

Fig.26 Conducted Spurious Emission (802.11b, Ch1, 30MHz~26GHz)




Date: 6.MAY.2015 20:32:52

Fig.27 Conducted Spurious Emission (802.11b, Ch6)

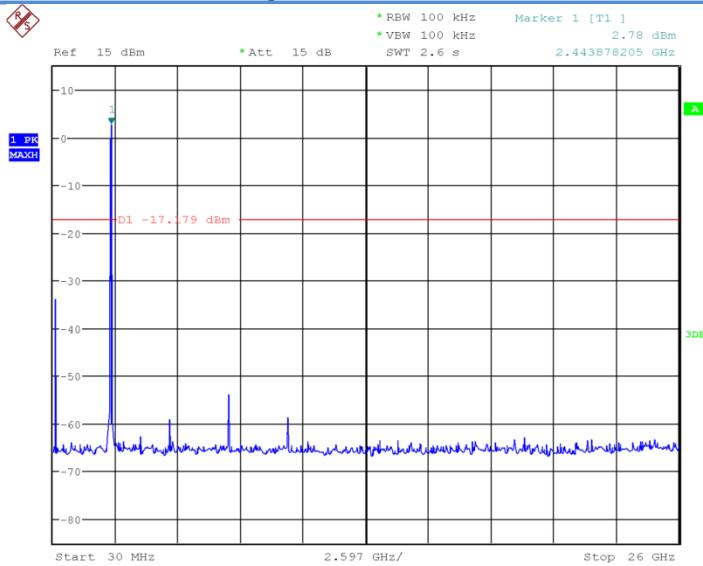


Date: 6.MAY.2015 20:33:13

Fig.28 Conducted Spurious Emission (802.11b, Ch6, 30MHz~26GHz)

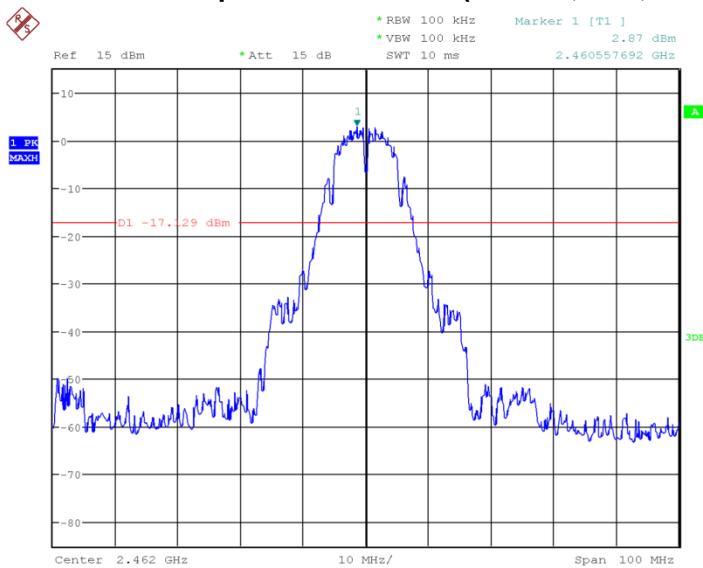


Date: 6.MAY.2015 20:35:23

Fig.29 Conducted Spurious Emission (802.11b, Ch11)

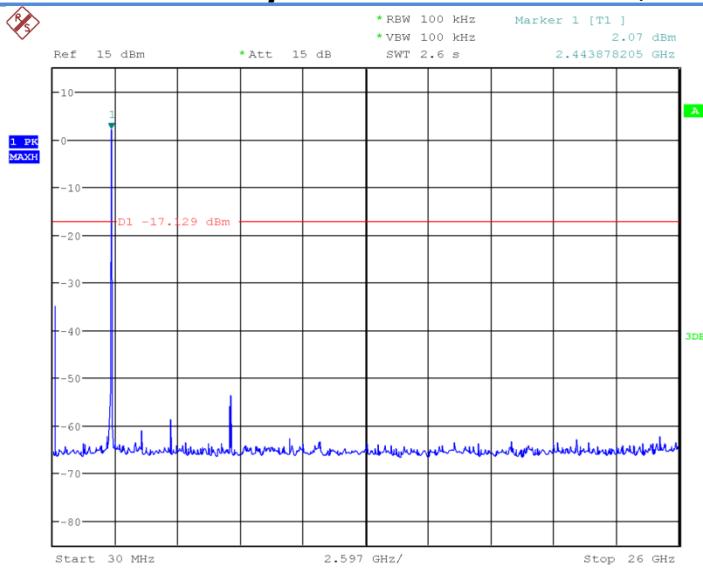


Date: 6.MAY.2015 20:35:44

Fig.30 Conducted Spurious Emission (802.11b, Ch11, 30MHz~26GHz)

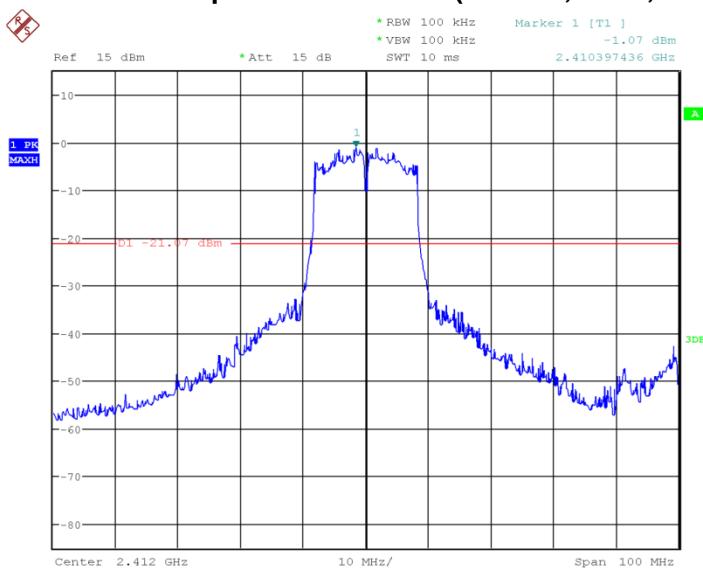


Date: 6.MAY.2015 20:41:07

Fig.31 Conducted Spurious Emission (802.11g, Ch1)

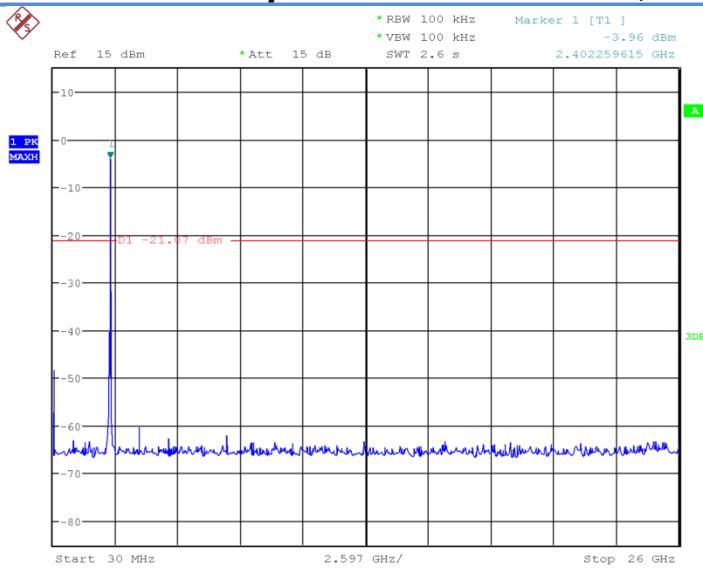


Date: 6.MAY.2015 20:41:27

Fig.32 Conducted Spurious Emission (802.11g, Ch1, 30MHz~26GHz)

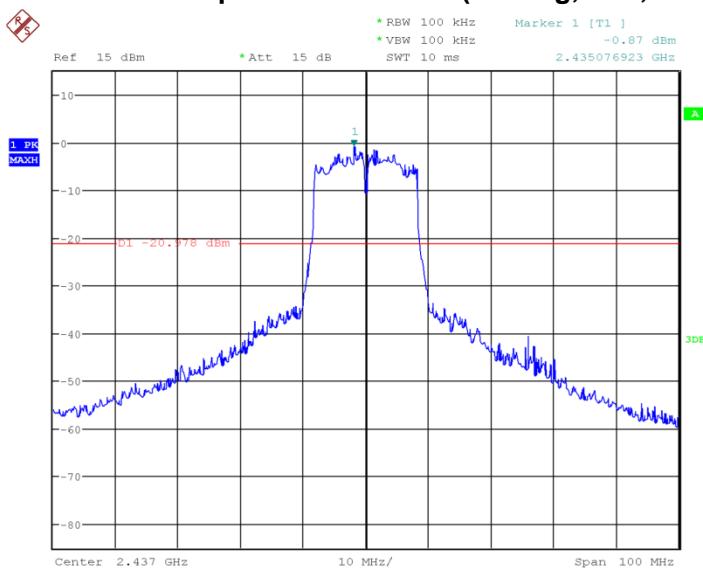


Date: 6.MAY.2015 20:42:38

Fig.33 Conducted Spurious Emission (802.11g, Ch6)

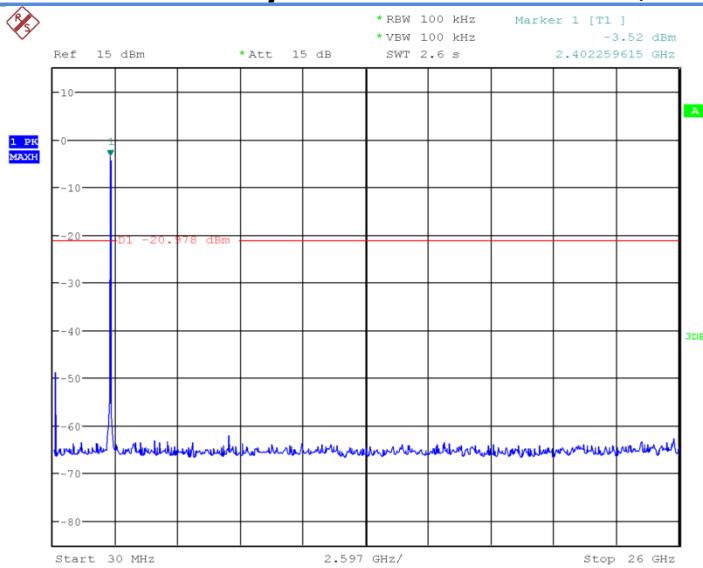


Date: 6.MAY.2015 20:42:59

Fig.34 Conducted Spurious Emission (802.11g, Ch6, 30MHz~26GHz)

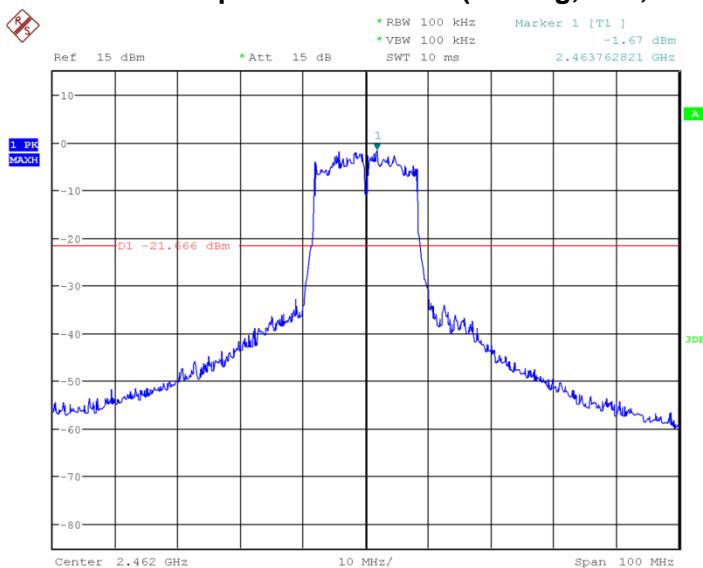


Date: 6.MAY.2015 20:43:49

Fig.35 Conducted Spurious Emission (802.11g, Ch11)

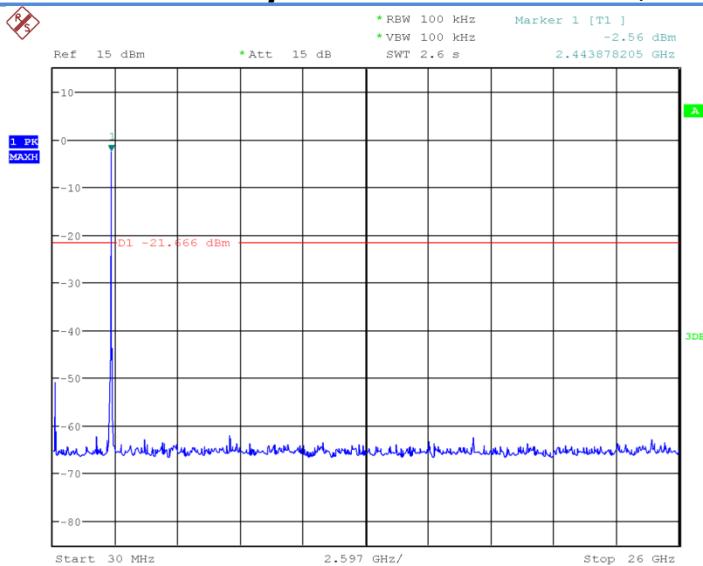


Date: 6.MAY.2015 20:44:10

Fig.36 Conducted Spurious Emission (802.11g, Ch11, 30MHz~26GHz)

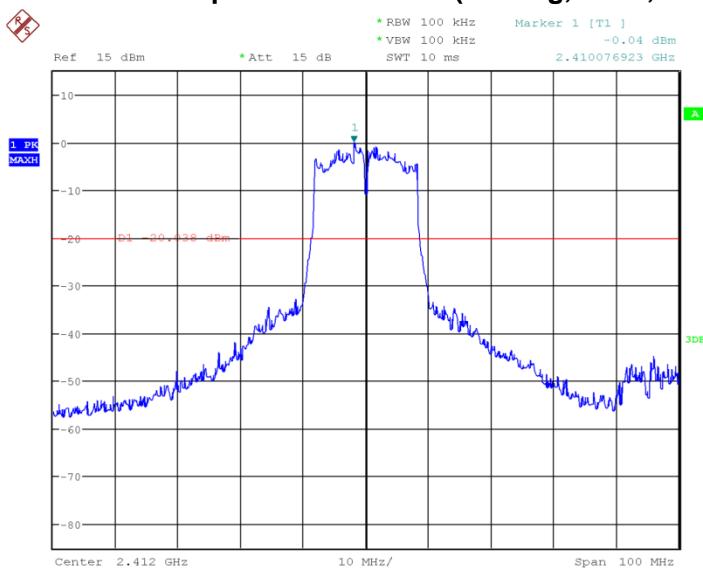


Date: 6.MAY.2015 20:44:54

Fig.37 Conducted Spurious Emission (802.11n-20MHz, Ch1)

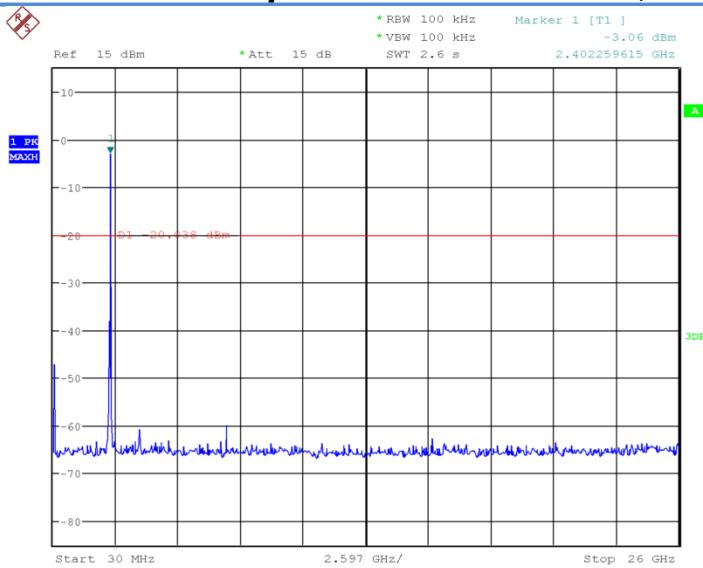


Date: 6.MAY.2015 20:45:15

Fig.38 Conducted Spurious Emission (802.11n-20MHz, Ch1, 30MHz~26GHz)

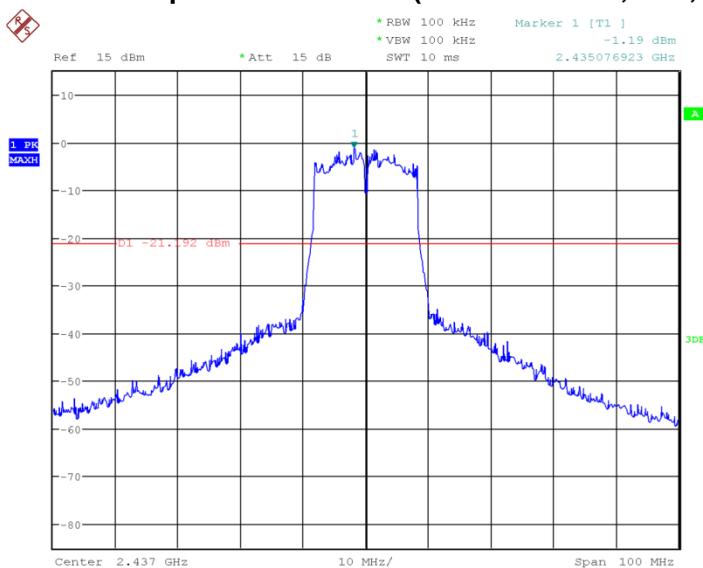


Date: 6.MAY.2015 20:45:44

Fig.39 Conducted Spurious Emission (802.11n-20MHz, Ch6)

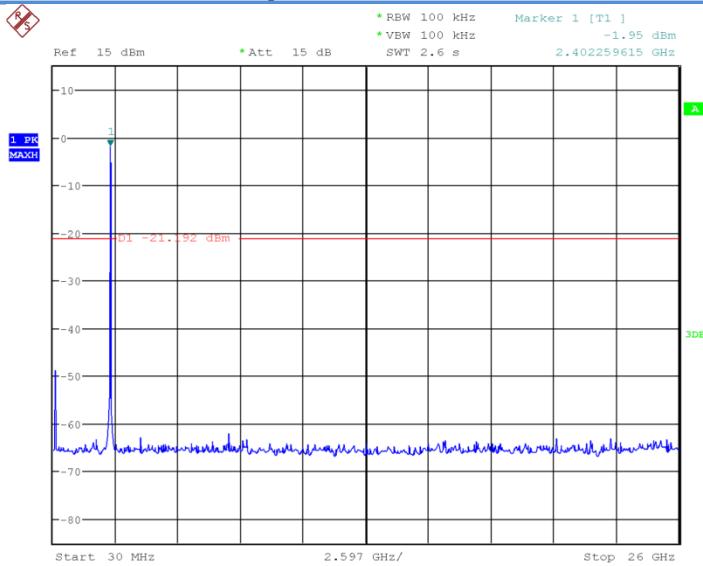


Date: 6.MAY.2015 20:46:05

Fig.40 Conducted Spurious Emission (802.11n-20MHz, Ch6, 30MHz~26GHz)

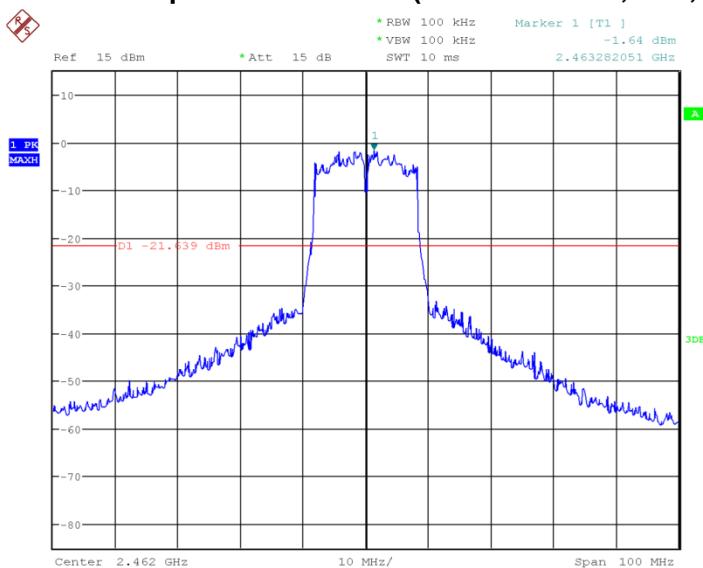

Date: 6.MAY.2015 20:46:35

Fig.41 Conducted Spurious Emission (802.11n-20MHz, Ch11)

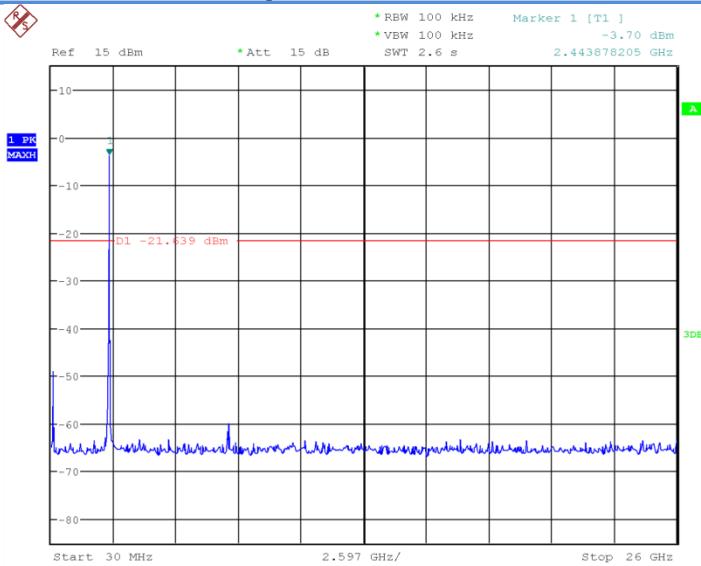

Date: 6.MAY.2015 20:46:56

Fig.42 Conducted Spurious Emission (802.11n-20MHz, Ch11, 30MHz~26GHz)

6.6. Transmitter Spurious Emission-Radiated

6.6.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247,15.205,15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in 25.205(a), must also comply with the radiated emission limits specified in 15.209(a)(see 15.205(c)). The measurement is according to ANSI C63.10 clause 6.5 ,6.6, 6.9.2.

6.6.2 Limit in restricted band:

Frequency of emission(MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

6.6.3 Test procedures

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a nonconducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by



the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.4-2009 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During testing, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emission from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Note: The position of EUT is 1.5m above the ground.

Frequency of emission (MHz)	RBW/VBW	Sweep Times (s)
30~1000	100KHz/300KHz	5
1000~4000	1MHz/1MHz	15
4000~18000	1MHz/1MHz	40
18000~26500	1MHz/1MHz	20

802.11b/g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power	2.38GHz~2.45GHz	Fig.44	P
		2.45GHz~2.5GHz	Fig.45	P
	1	30MHz~1GHz	Fig.46	P
		1GHz~3GHz	Fig.47	P
		3GHz~18GHz	Fig.48	P
802.11g	Power	2.38GHz~2.45GHz	Fig.49	P
		2.45GHz~2.5GHz	Fig.50	P
	11	30MHz~1GHz	Fig.51	P
		1GHz~3GHz	Fig.52	P
		3GHz~18GHz	Fig.53	P

802.11n mode



RF Test Report

Report No.: I15D00057-WLA

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(20MHz)	Power	2.38GHz~2.45GHz	Fig.54	P
	Power	2.45GHz~2.5GHz	Fig.55	P
	1	30MHz~1GHz	Fig.56	P
		1GHz~3GHz	Fig.57	P
		3GHz~18GHz	Fig.58	P
/	All channels	18GHz~26.5GHz	Fig.59	P

Conclusion: PASS

Note:

A "reference path loss" is established and A_{Rpi} is the attenuation of "reference path loss", and including the gain of receive antenna , the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$ARpi = \text{Cable loss} + \text{Antenna Gain-Preamplifier gain}$

$\text{Result} = P_{Mea} + \text{Cable loss} + \text{Antenna Gain-Preamplifier gain} = P_{Mea} + ARpi$.

802.11b mode

Ch1 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpi (dB)	PMea(dBuV/m)	Polarity
33.53004	10.6	-26	36.6	V

Ch1 1GHz~3GHz

Frequency(MHz)	Result(dBuV/m)	ARpi (dB)	PMea(dBuV/m)	Polarity
2743.39	53.77	10	43.77	H
2809.15	53.85	10.7	43.15	V
2855.77	54.08	11.2	42.88	H
2904.18	54.22	11.6	42.62	H
2949.41	55.66	12.3	43.36	V
2983.19	506.5	13.2	493.3	V

Ch1 3GHz~18GHz

Frequency(MHz)	Result(dBuV/m)	ARpi (dB)	PMea(dBuV/m)	Polarity



RF Test Report

Report No.: I15D00057-WLA

14923.55	56.37	22.1	34.27	H
15225.45	55.01	21.6	33.41	V
16195.81	58.67	25.7	32.97	V
17046.35	59.68	27.1	32.58	H
17650.94	61.89	29	32.89	H
17924.63	62.77	29	33.77	H

802.11g

Ch11 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpI (dB)	PMea(dBuV/m)	Polarity
33.9044	12.26	-26	38.26	V
49.615	8.8	-25	33.8	V

Ch11 1GHz~3GHz

Frequency(MHz)	Result(dBuV/m)	ARpI (dB)	PMea(dBuV/m)	Polarity
2852.8871	53.95	11.2	42.75	H
2903.6784	54.03	11.6	42.43	V
2958.1857	55.48	12.5	42.98	H
2989.609	57.33	13.4	43.93	V

Ch11 3GHz~18GHz

Frequency(MHz)	Result(dBuV/m)	ARpI (dB)	PMea(dBuV/m)	Polarity
14879.4884	55.81	21.8	34.01	H
15708.4776	57.9	23.9	34	V
16228.5732	58.21	25.5	32.71	H
16501.3528	60.1	26.9	33.2	V
16942.7101	61.42	27.1	34.32	V
17585.9636	62.16	29.5	32.66	H

802.11n-20MHz

Ch1 30MHz~1GHz



RF Test Report

Report No.: I15D00057-WLA

Frequency(MHz)	Result(dBuV/m)	ARPI (dB)	PMea(dBuV/m)	Polarity
34.3804	12.27	-26	38.27	V

Ch1 1GHz~3GHz



Frequency(MHz)	Result(dBuV/m)	ARPI (dB)	PMea(dBuV/m)	Polarity
2715.1352	52.57	9.8	42.77	V
2792.7278	53.64	9.8	43.84	V
2857.7448	54.23	11.3	42.93	H
2906.3342	54.29	11.6	42.69	H
2944.369	55.26	12.2	43.06	V
2995.6119	56.83	13.6	43.23	H



Ch1 3GHz~18GHz



Frequency(MHz)	Result(dBuV/m)	ARPI (dB)	PMea(dBuV/m)	Polarity
14857.8588	55.83	21.3	34.53	V
15440.1623	56.67	23.3	33.37	V
16117.011	58.91	24.9	34.01	V
16889.9677	60.91	27.1	33.81	V
17457.893	61.66	27.1	34.56	H
17594.2691	62.28	28.8	33.48	V



All Ch 18GHz~26.5GHz

Frequency(MHz)	Result(dBuV/m)	ARPI (dB)	PMea(dBuV/m)	Polarity
21179.000000	45.48	6.97	38.51	V
22748.950000	41.63	3.05	38.58	H
23684.800000	41.59	3.05	38.54	H
24633.400000	40.05	3.05	37.00	V
25567.550000	43.01	2.90	40.11	H
26066.500000	42.06	2.90	39.16	V

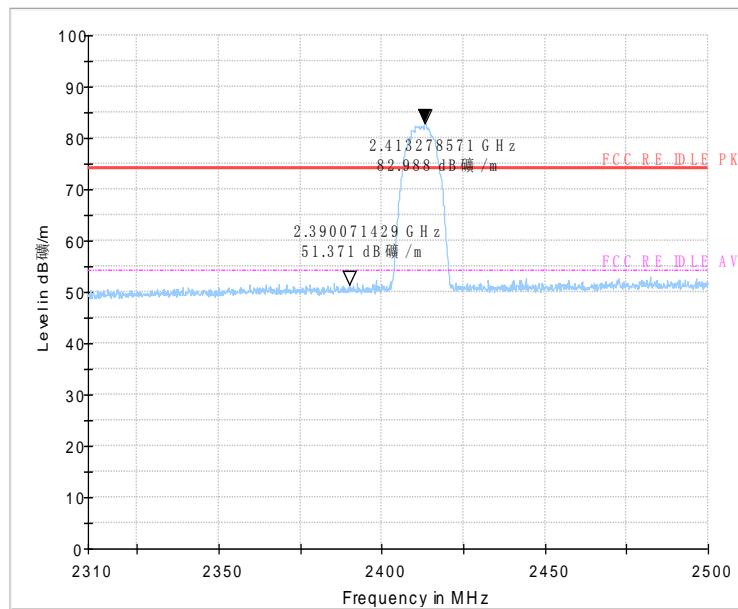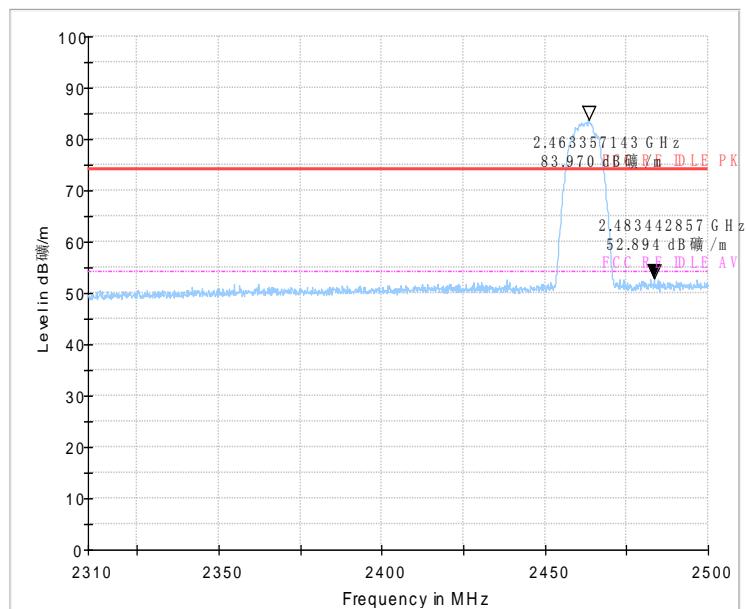Test graphs as below:**Peak****Fig.44 Radiated emission (Power): 802.11b, low channel****Peak****Fig.45 Radiated emission (Power): 802.11b, high channel**

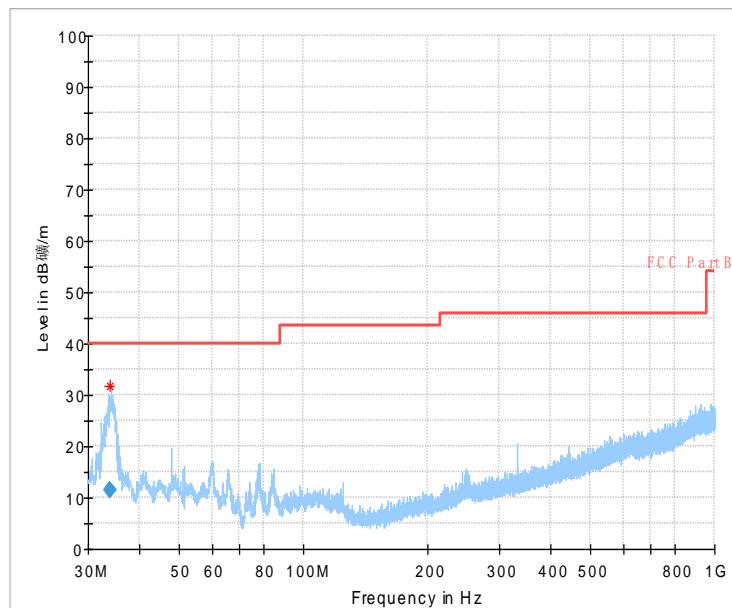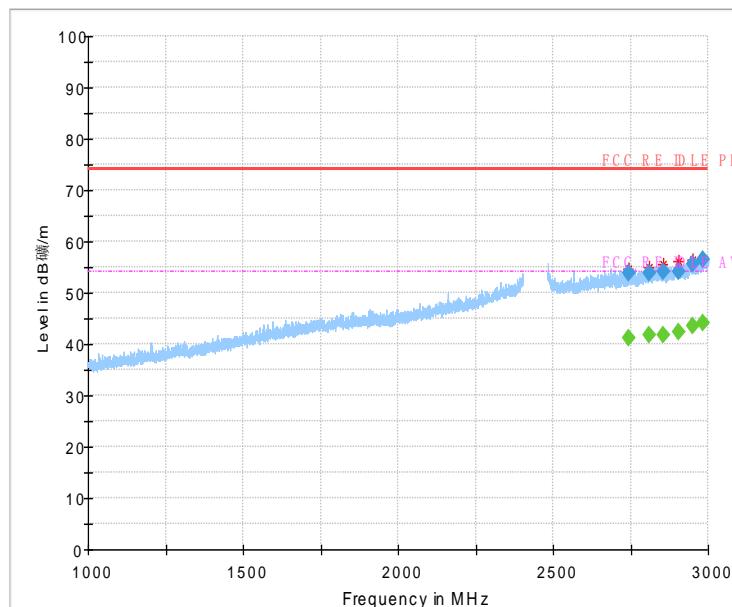**Fig.46 Radiated Spurious Emission (802.11b, Ch1, 30MHz~1GHz)****Fig.47 Radiated Spurious Emission (802.11b, Ch1, 1GHz~3GHz)**

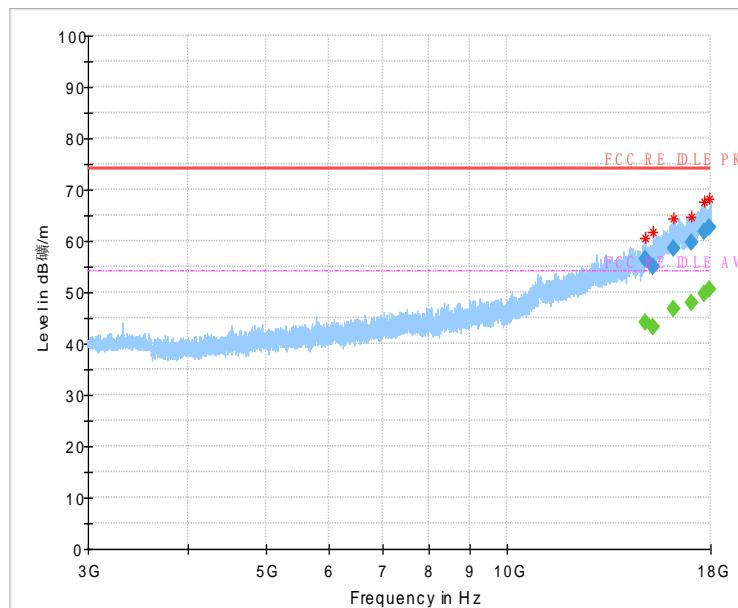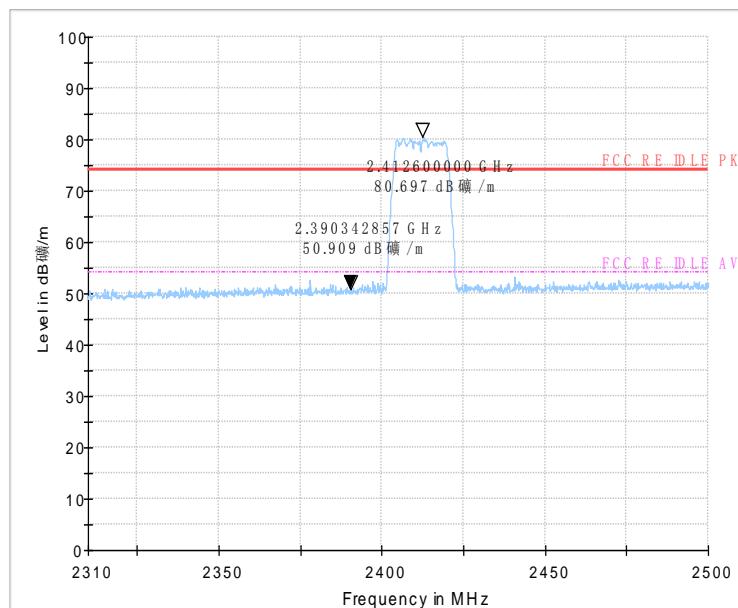**Fig.48 Radiated Spurious Emission (802.11b, Ch1, 3GHz~18GHz)****Peak****Fig.49 Radiated emission (Power): 802.11g, low channel**

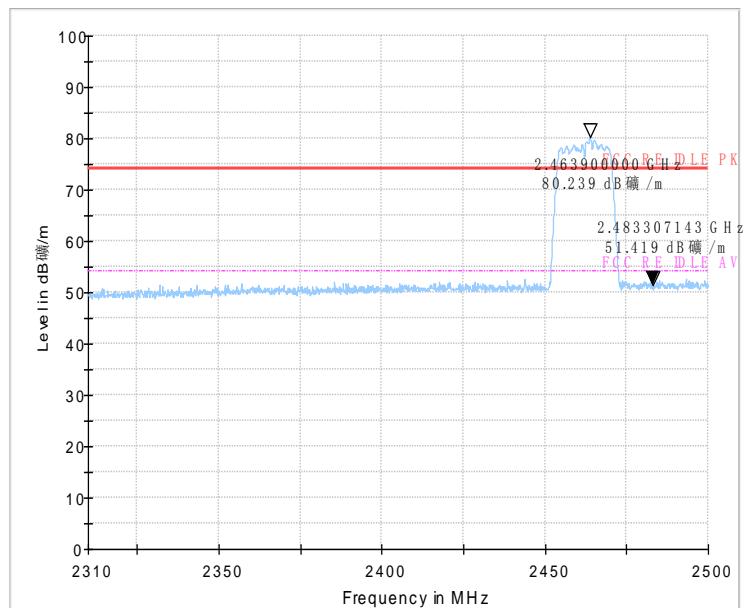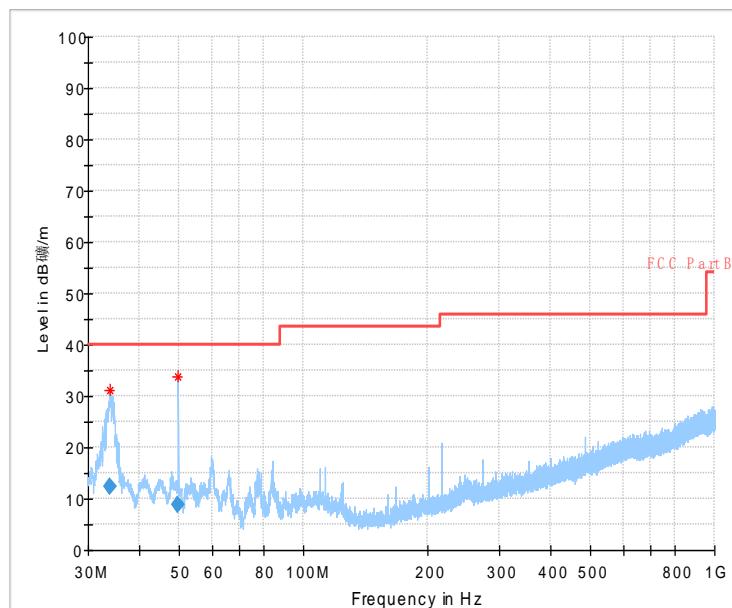**Peak****Fig.50 Radiated emission (Power): 802.11g, high channel****Fig.51 Radiated Spurious Emission (802.11g, Ch11, 30MHz~1GHz)**

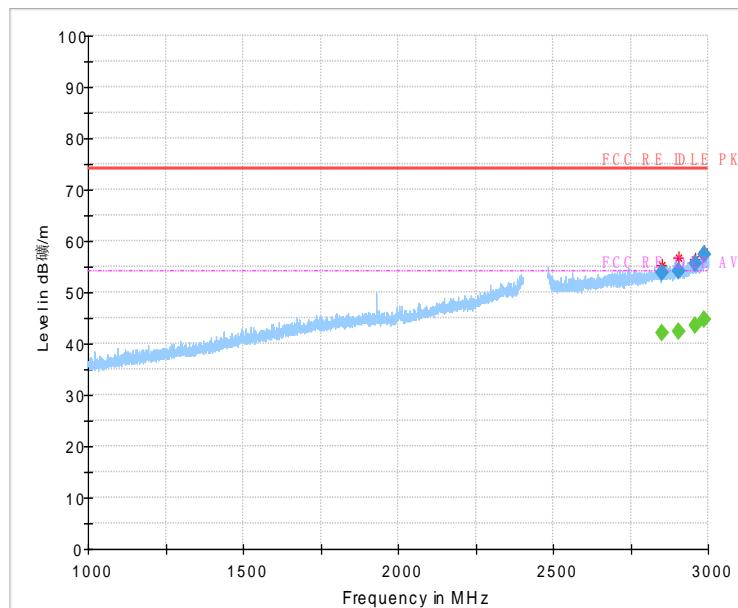


Fig.52 Radiated Spurious Emission (802.11g, Ch11, 1GHz~3GHz)

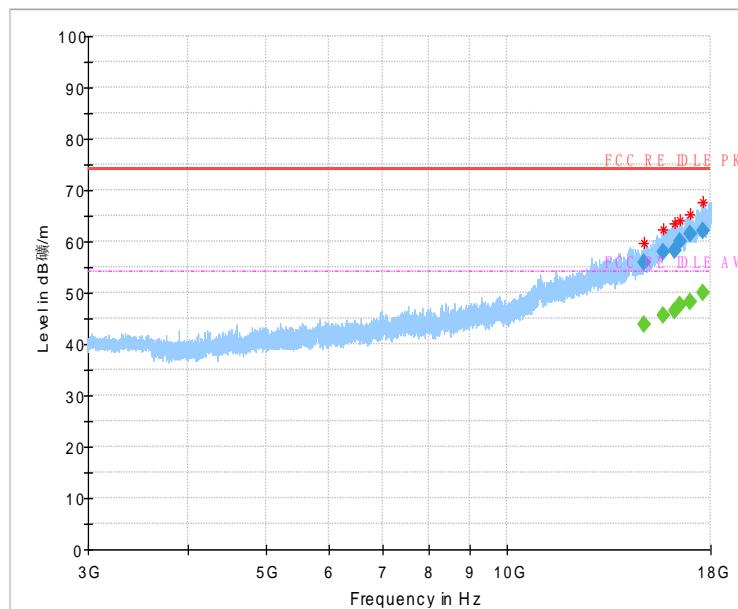
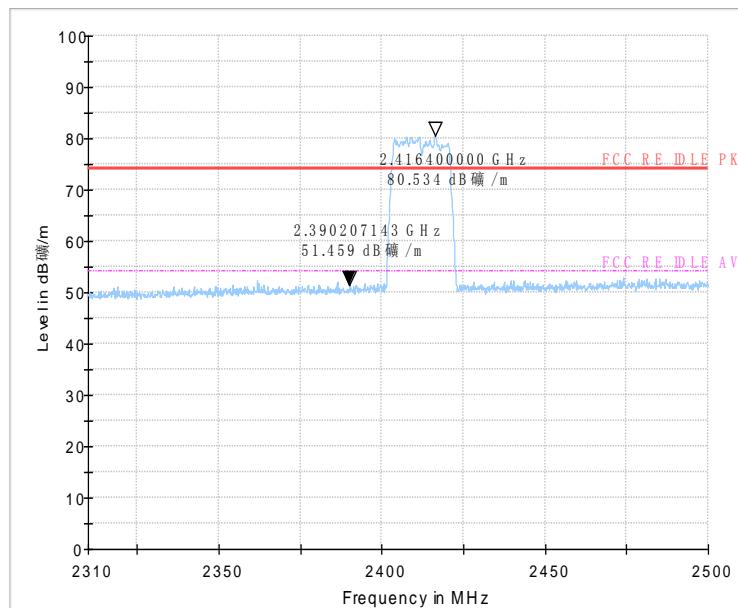
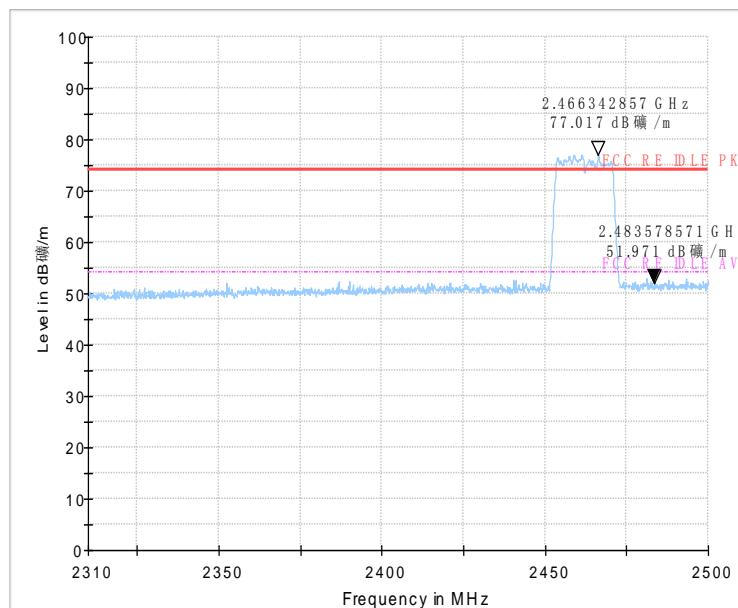


Fig.53 Radiated Spurious Emission (802.11g, Ch11, 3GHz~18GHz)

**Peak****Fig.54 Radiated emission (Power): 802.11n, low channel****Peak****Fig.55 Radiated emission (Power): 802.11n, high channel**

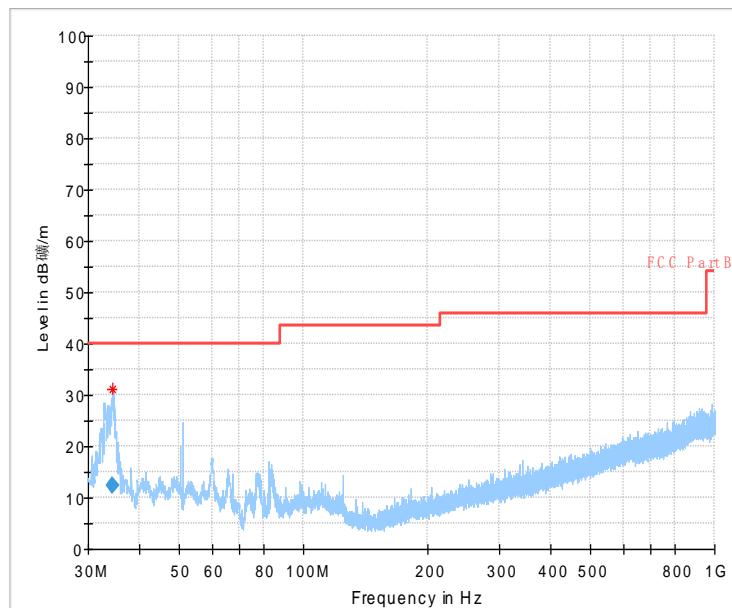


Fig.56 Radiated Spurious Emission (802.11 n-20MHz, Ch1, 30MHz~1GHz)

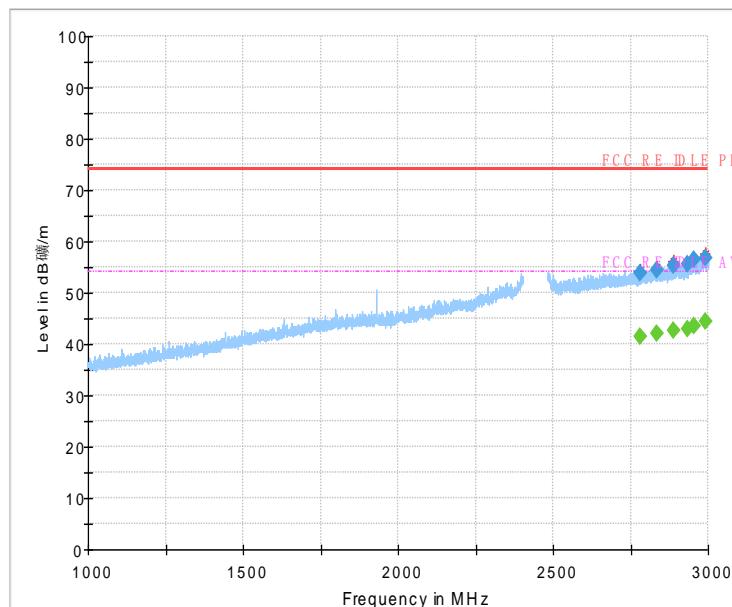


Fig.57 Radiated Spurious Emission (802.11 n-20MHz, Ch1, 1GHz~3GHz)

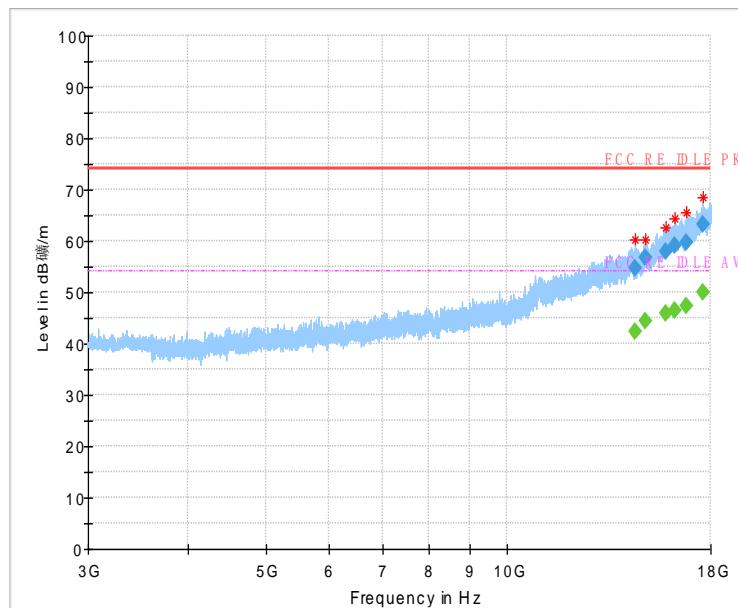


Fig.58 Radiated Spurious Emission (802.11 n-20MHz,Ch1,3GHz~18GHz)

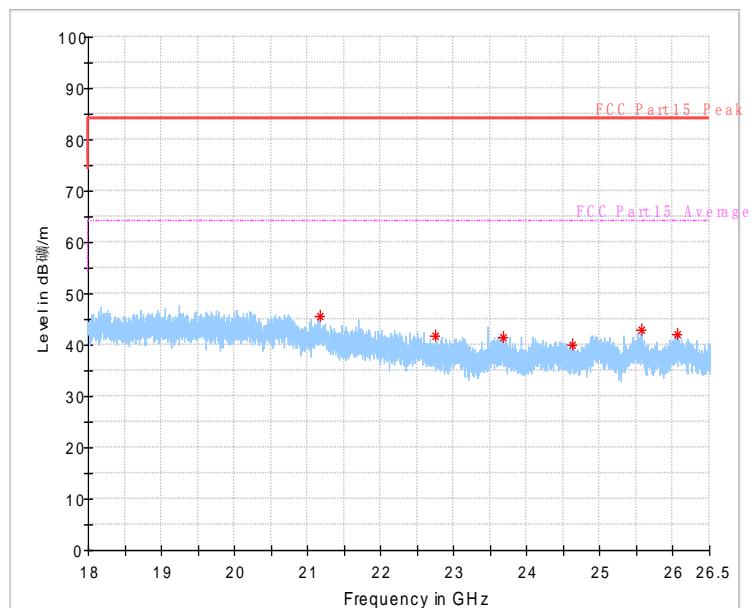


Fig.59 Radiated emission: GFSK, 18 GHz – 26.5 GHz

7. T Test Equipments and Ancillaries Used For Tests

The test equipments and ancillaries used are as follows.

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Vector Signal Analyzer	FSQ26	101096	R&S	2015-07-06
2	DC Power Supply	ZUP60-14	LOC-220Z006	TDL-Lambda	2015-07-06

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Universal Radio Communication Tester	CMU200	123101	R&S	2015-07-05
3	Test Receiver	ESU40	100307	R&S	2015-07-24
4	Trilog Antenna	VULB9163	19-162515	Schwarzbeck	2017-11-04
5	Double Ridged Guide Antenna	ETS-3117	135885	ETS	2017-05-05
8	2-Line V-Network	ENV216	101380	R&S	2015-07-24

Anechoic chamber

Fully anechoic chamber by Frankonia German.

8. Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Fully-anechoic chamber2 (Tapered Section: 8.75 meters×3.66 meters×3.66 meters, Rectangular Section: 7.32 meters×3.97 meters×3.66 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %



RF Test Report

Report No.: I15D00057-WLA

Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 30MHz to 40000MHz

ANNEX A. Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

*****End The Report*****