Mode	11	
	Band Edge	
	U-NII-1_5.25-5.35_802.11n HT20_CH36_5180MHz	
ANT	3+1	
Pol.	Vertical	Fundamental
Peak	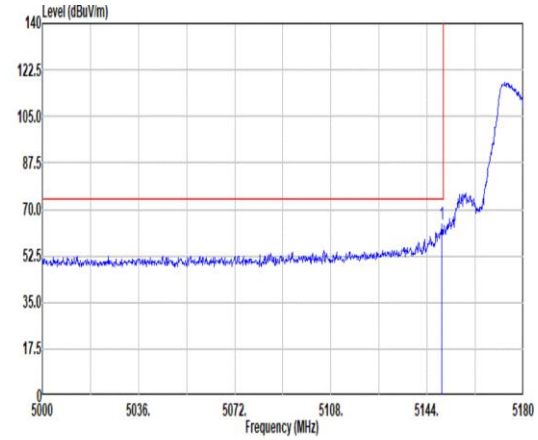 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.58 64.33 74.00 -9.67 53.73 33.10 10.37 32.87 0.00 175 210 PEAK	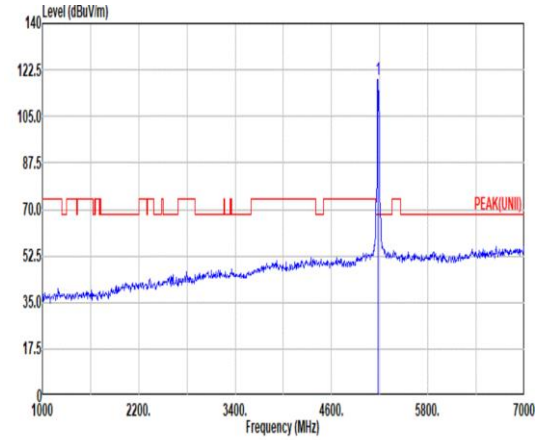 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 119.03 ------ ------ 108.42 33.10 10.38 32.87 0.00 175 210 PEAK
Avg	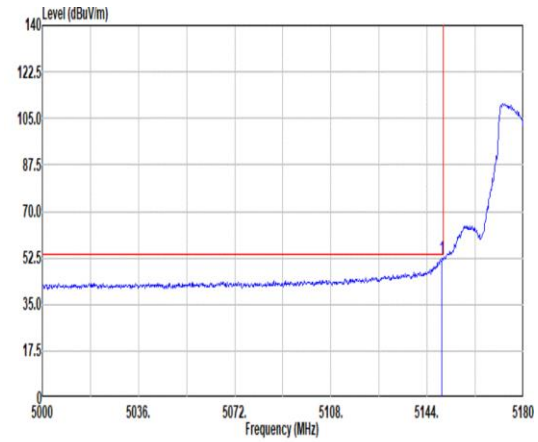 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.58 52.36 54.00 -1.64 41.76 33.10 10.37 32.87 0.00 175 210 AVERAGE	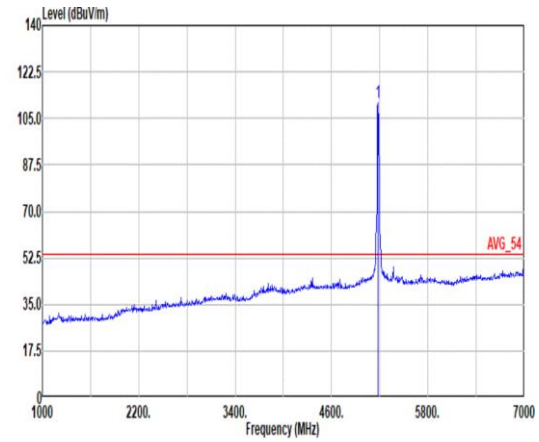 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 111.08 ------ ------ 100.46 33.10 10.39 32.87 0.00 175 210 AVERAGE

Mode	11	
	Harmonic	
	U-NII-1_5.25-5.35_802.11n HT20_CH36_5180MHz	
ANT	3+1	
Pol.	Horizontal	Vertical
Peak Avg	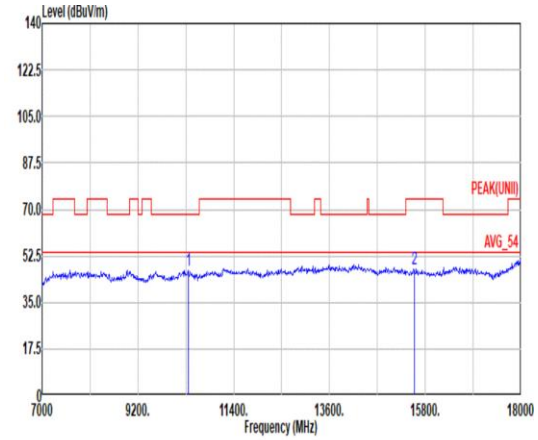 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 46.84 68.20 -21.36 51.08 38.48 17.53 60.53 0.28 -- -- Peak 2 15540.00 47.67 74.00 -26.33 49.94 38.32 21.57 62.36 0.20 -- -- Peak	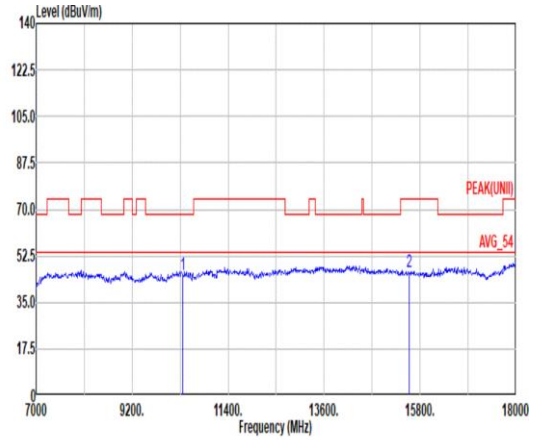 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 45.32 68.20 -22.88 49.56 38.48 17.53 60.53 0.28 -- -- Peak 2 15540.00 46.53 74.00 -27.47 48.80 38.32 21.57 62.36 0.20 -- -- Peak

Mode	11	
	Harmonic	
	U-NII-1_5.25-5.35_802.11n HT20_CH36_5180MHz	
ANT	3+1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	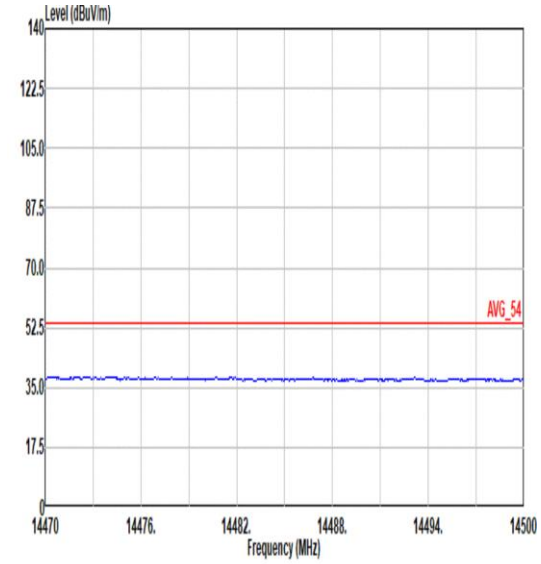 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 HORIZONTAL	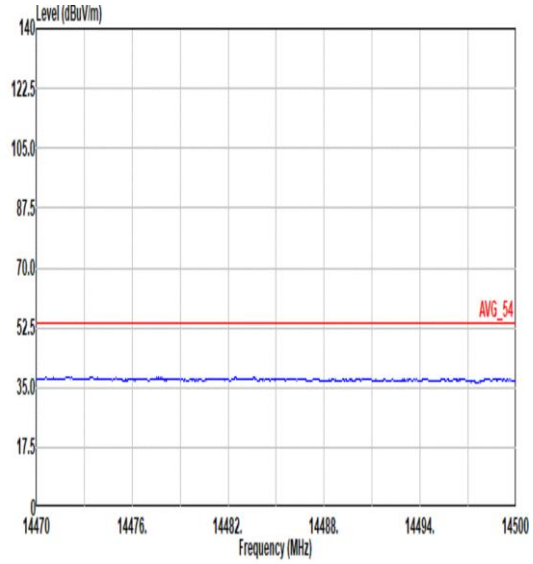 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 VERTICAL
17.7G ~18G Avg	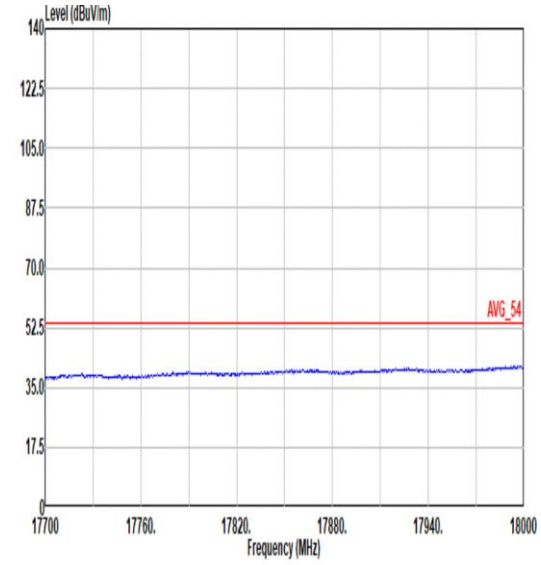 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 HORIZONTAL	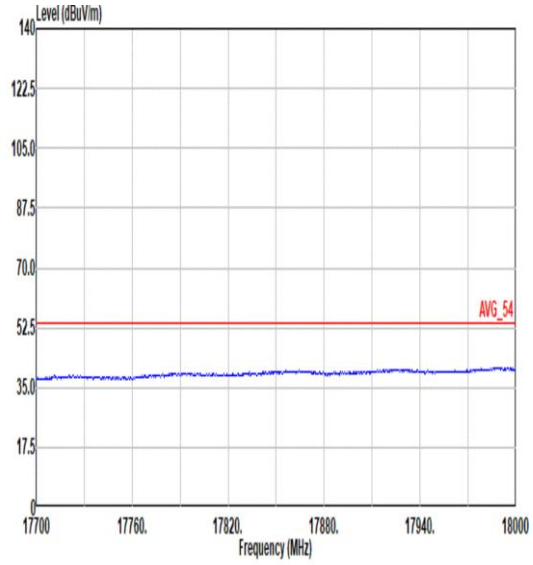 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 VERTICAL

Mode	12	
	Band Edge - L	
	U-NII-1_5.25-5.35_802.11n HT20_CH44_5220MHz	
ANT	3+1	
Pol.	Horizontal	Fundamental
Peak	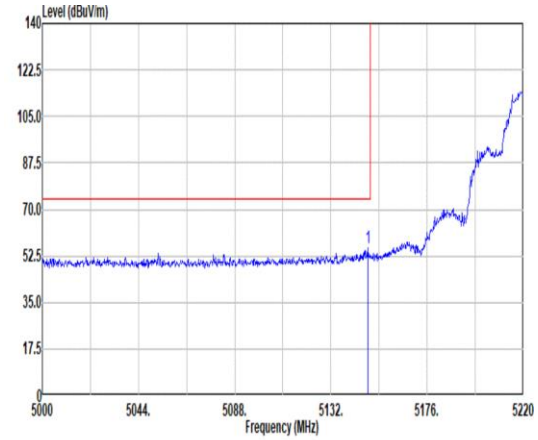 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.94 55.50 74.00 -18.50 44.90 33.10 10.37 32.87 0.00 178 176 PEAK	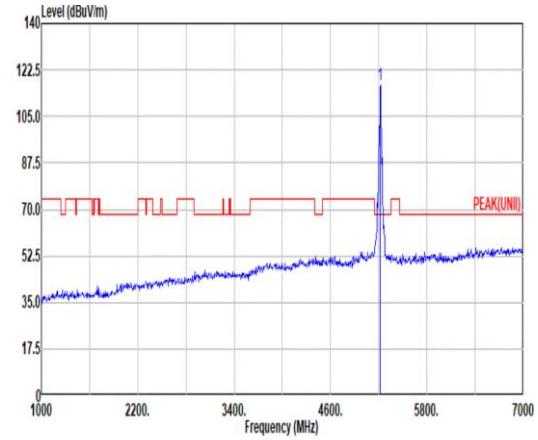 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 116.52 ------ ------ 105.90 33.05 10.43 32.86 0.00 178 176 PEAK
Avg	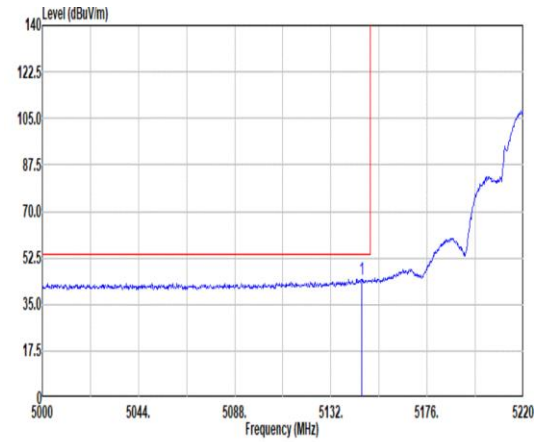 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5146.08 44.61 54.00 -9.39 34.04 33.08 10.36 32.87 0.00 178 176 AVERAGE	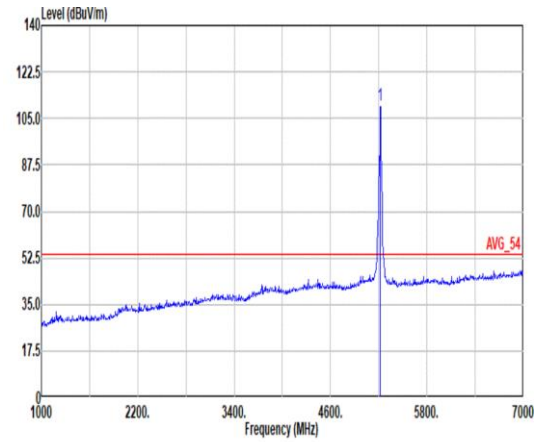 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 109.66 ------ ------ 99.04 33.05 10.43 32.86 0.00 178 176 AVERAGE

Mode	12	
	Band Edge - R	
	U-NII-1_5.25-5.35_802.11n HT20_CH44_5220MHz	
ANT	3+1	
Pol.	Horizontal	Fundamental
Peak	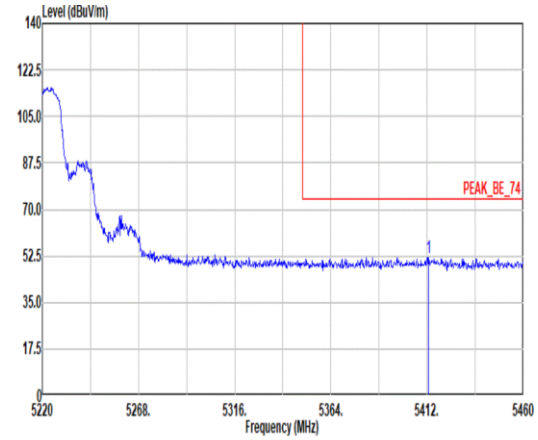 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5412.72 51.84 74.00 -22.16 41.34 32.80 10.55 32.85 0.00 178 176 PEAK	Blank
Avg	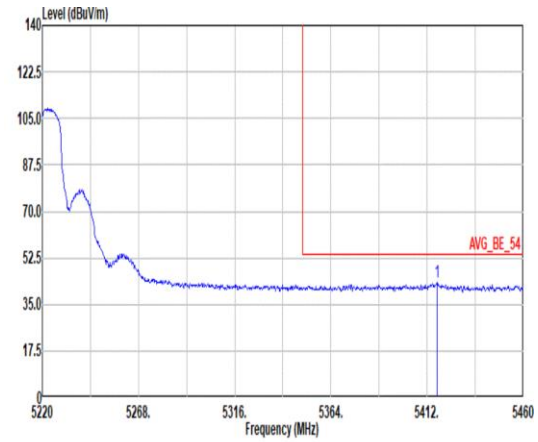 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5417.04 43.22 54.00 -10.78 32.71 32.80 10.56 32.85 0.00 178 176 AVERAGE	Blank

Mode	12	
	Band Edge - L	
	U-NII-1_5.25-5.35_802.11n HT20_CH44_5220MHz	
ANT	3+1	
Pol.	Vertical	Fundamental
Peak	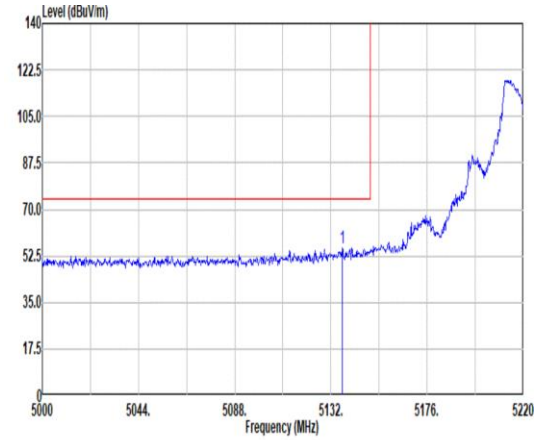 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5137.28 55.65 74.00 -18.35 45.11 33.05 10.36 32.87 0.00 174 86 PEAK	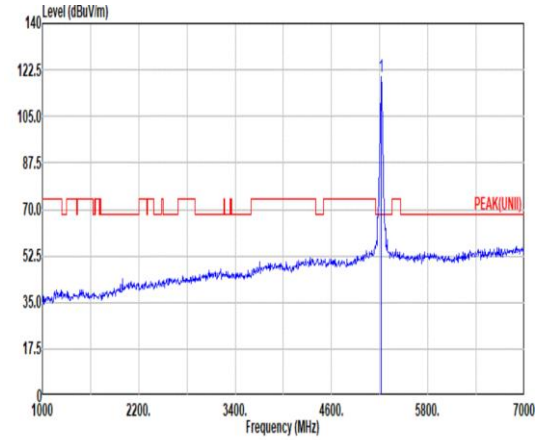 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 119.91 ------ ------ 109.27 33.08 10.42 32.86 0.00 174 86 PEAK
Avg	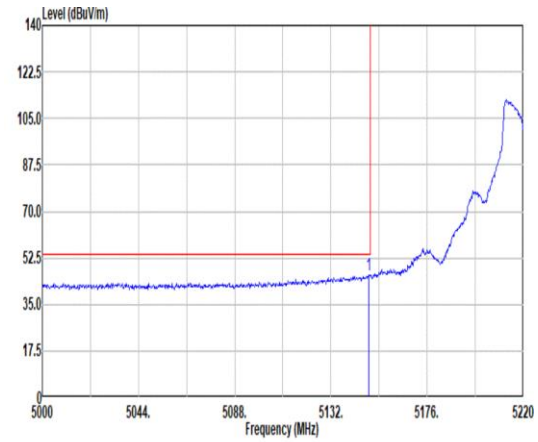 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.16 46.22 54.00 -7.78 35.62 33.10 10.37 32.87 0.00 174 86 AVERAGE	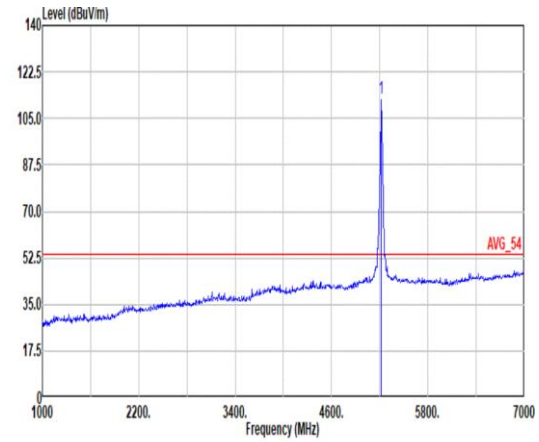 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 112.34 ------ ------ 101.70 33.08 10.42 32.86 0.00 174 86 AVERAGE

Mode	12	
	Band Edge - R	
	U-NII-1_5.25-5.35_802.11n HT20_CH44_5220MHz	
ANT	3+1	
Pol.	Vertical	Fundamental
Peak	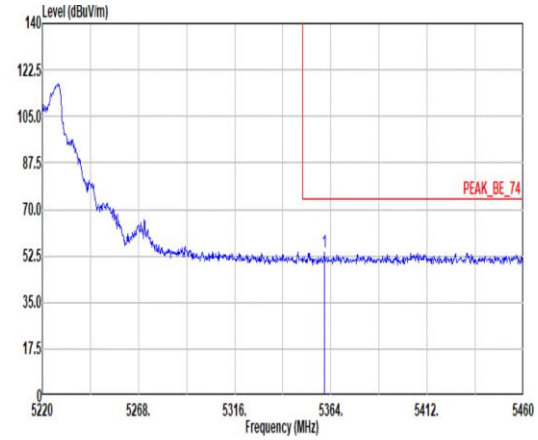 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5360.88 53.94 74.00 -20.06 43.40 32.88 10.51 32.85 0.00 174 86 PEAK	Blank
Avg	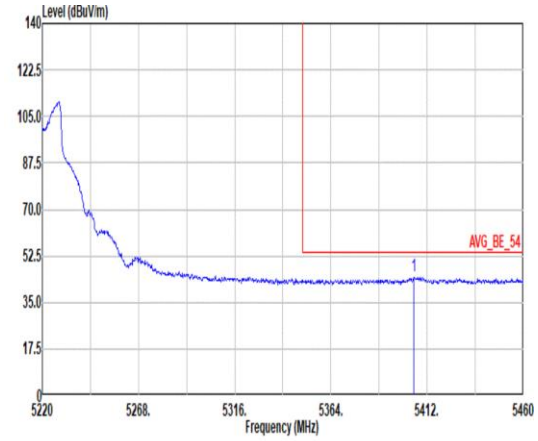 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5405.28 44.65 54.00 -9.35 34.15 32.80 10.55 32.85 0.00 174 86 AVERAGE	Blank

Mode	12	
	Harmonic	
	U-NII-1_5.25-5.35_802.11n HT20_CH44_5220MHz	
ANT	3+1	
Pol.	Horizontal	Vertical
Peak Avg	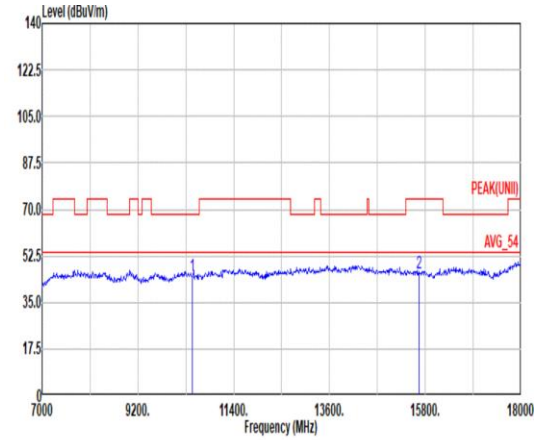 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 44.81 68.20 -23.39 49.22 38.40 17.56 60.65 0.28 -- -- Peak 2 15660.00 46.11 74.00 -27.89 48.53 37.78 21.63 62.05 0.22 -- -- Peak	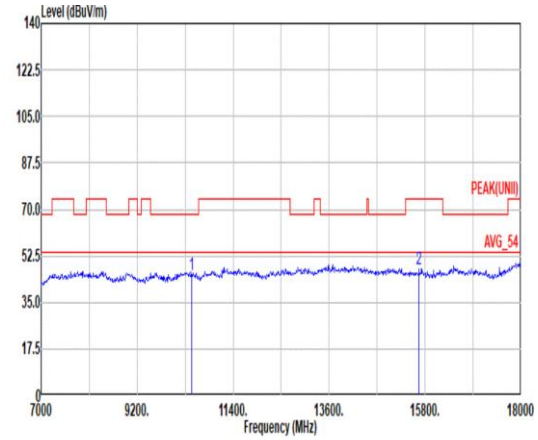 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 45.31 68.20 -22.89 49.72 38.40 17.56 60.65 0.28 -- -- Peak 2 15660.00 47.29 74.00 -26.71 49.71 37.78 21.63 62.05 0.22 -- -- Peak

Mode	12	
	Harmonic	
	U-NII-1_5.25-5.35_802.11n HT20_CH44_5220MHz	
ANT	3+1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	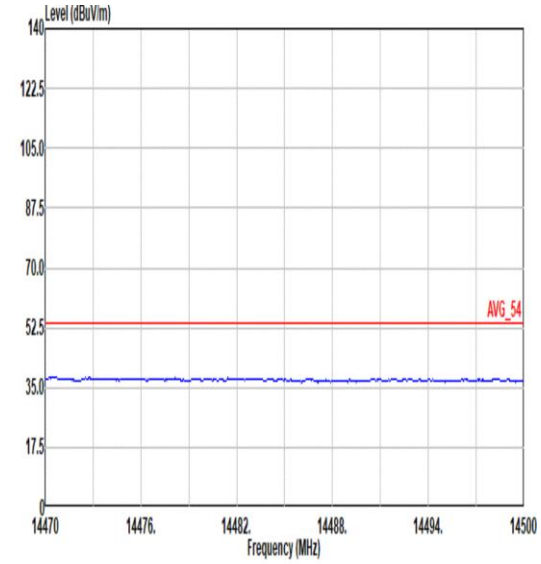 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 HORIZONTAL	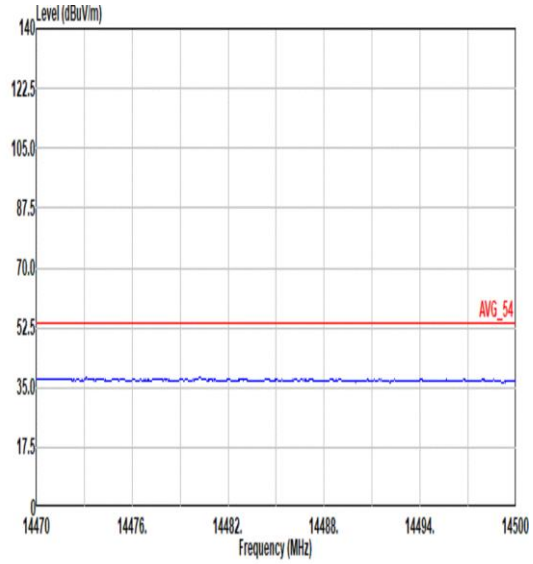 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 VERTICAL
17.7G ~18G Avg	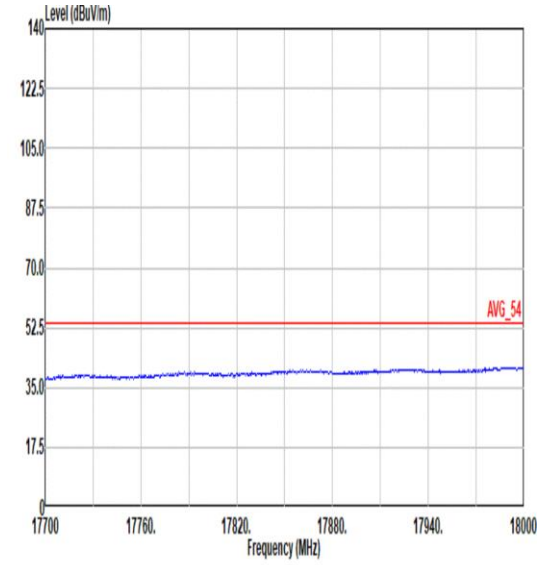 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 HORIZONTAL	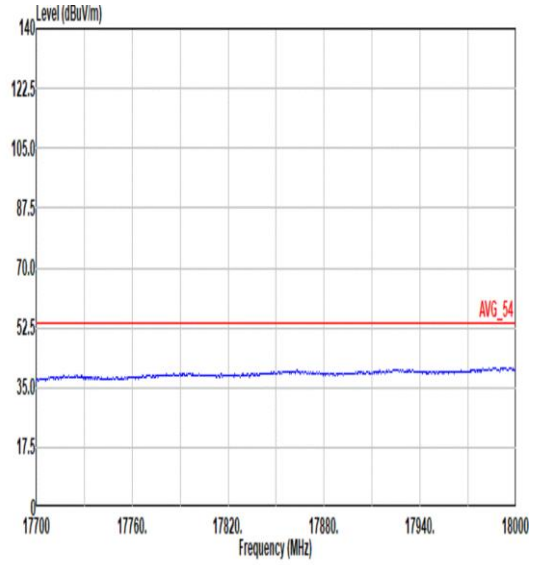 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 VERTICAL

Mode	13	
	Band Edge - L	
	U-NII-1_5.25-5.35_802.11n HT20_CH48_5240MHz	
ANT	3+1	
Pol.	Horizontal	Fundamental
Peak	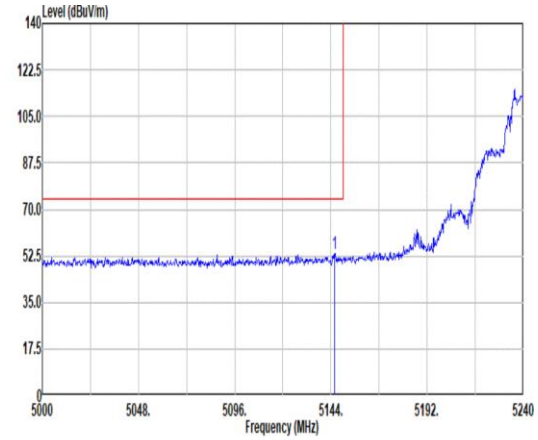 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.92 53.24 74.00 -20.76 42.67 33.08 10.36 32.87 0.00 188 174 PEAK	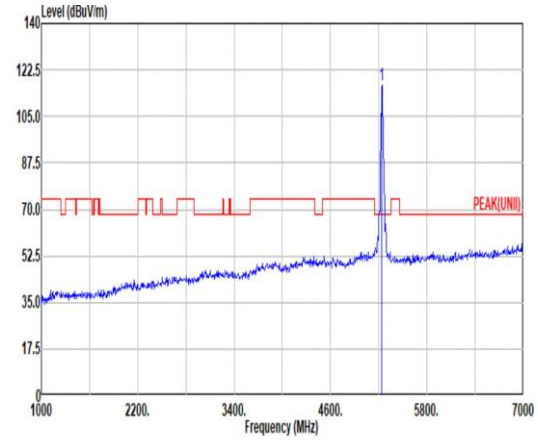 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 116.73 ------ ------ 106.13 33.02 10.44 32.86 0.00 188 174 PEAK
Avg	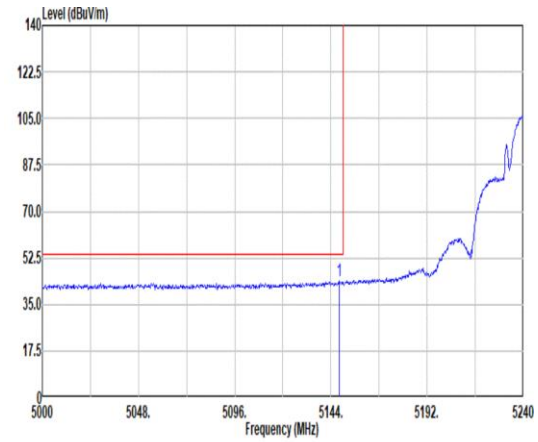 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.08 44.08 54.00 -9.92 33.49 33.09 10.37 32.87 0.00 188 174 AVERAGE	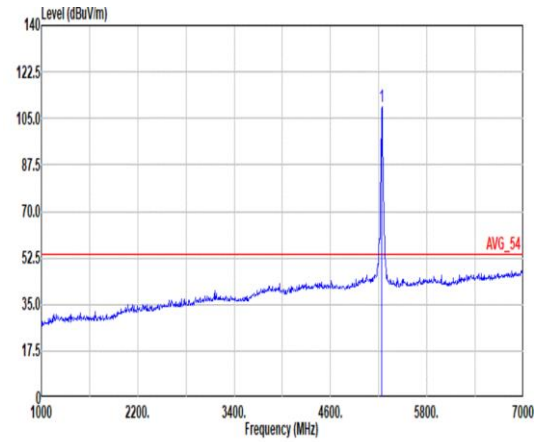 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 109.51 ------ ------ 98.91 33.02 10.44 32.86 0.00 188 174 AVERAGE

Mode	13	
	Band Edge - R	
	U-NII-1_5.25-5.35_802.11n HT20_CH48_5240MHz	
ANT	3+1	
Pol.	Horizontal	Fundamental
Peak	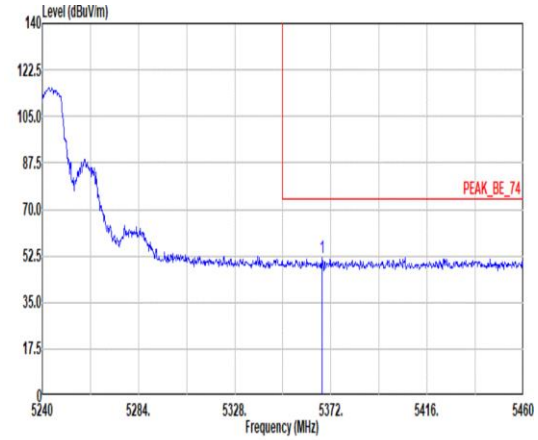 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5368.04 51.98 74.00 -22.02 41.45 32.86 10.52 32.85 0.00 188 174 PEAK	Blank
Avg	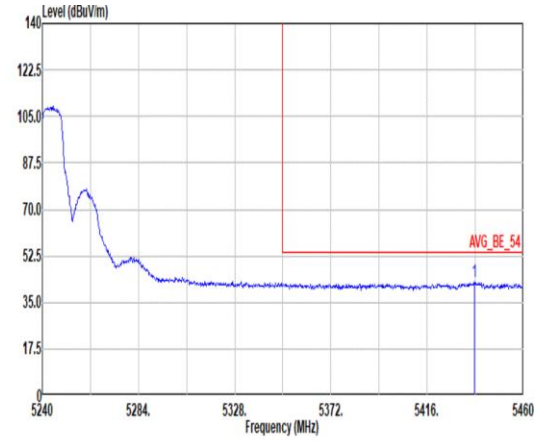 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5437.56 42.73 54.00 -11.27 32.19 32.80 10.58 32.84 0.00 188 174 AVERAGE	Blank

Mode	13	
	Band Edge - L	
	U-NII-1_5.25-5.35_802.11n HT20_CH48_5240MHz	
ANT	3+1	
Pol.	Vertical	Fundamental
Peak	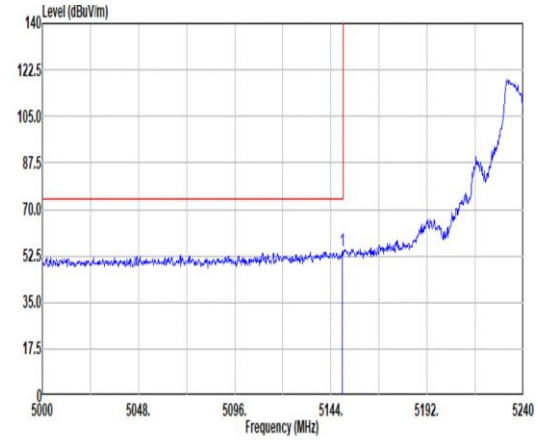 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.76 54.26 74.00 -19.74 43.66 33.10 10.37 32.87 0.00 213 83 PEAK	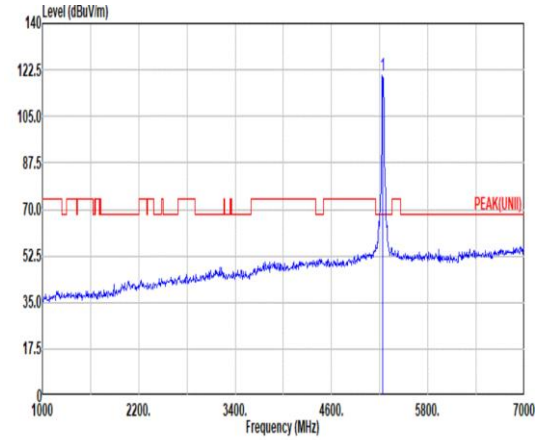 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 120.52 ------ ------ 109.91 33.04 10.43 32.86 0.00 213 83 PEAK
Avg	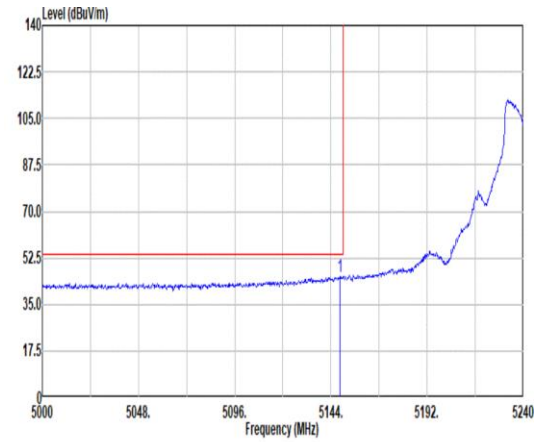 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.56 45.51 54.00 -8.49 34.92 33.09 10.37 32.87 0.00 213 83 AVERAGE	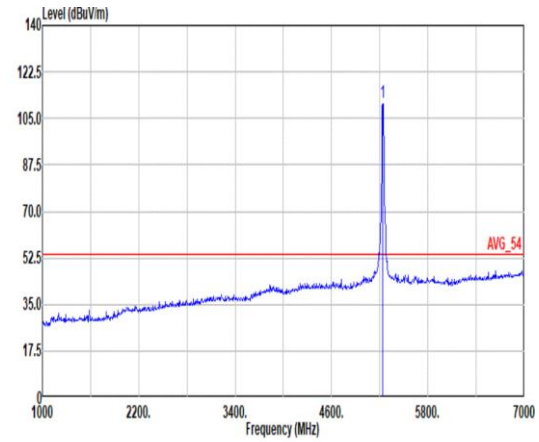 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 110.73 ------ ------ 100.15 33.00 10.44 32.86 0.00 213 83 AVERAGE

Mode	13	
	Band Edge - R	
	U-NII-1_5.25-5.35_802.11n HT20_CH48_5240MHz	
ANT	3+1	
Pol.	Vertical	Fundamental
Peak	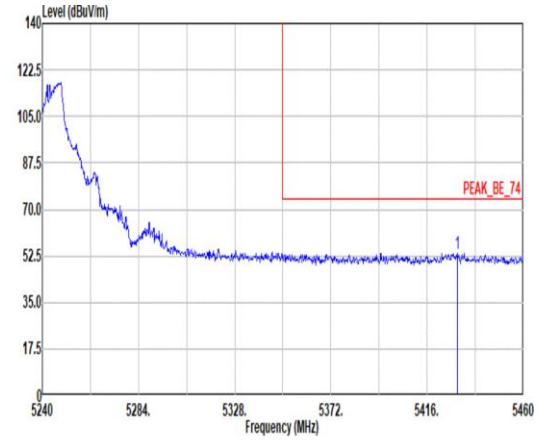 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5429.64 53.40 74.00 -20.60 42.88 32.80 10.57 32.85 0.00 213 83 PEAK	Blank
Avg	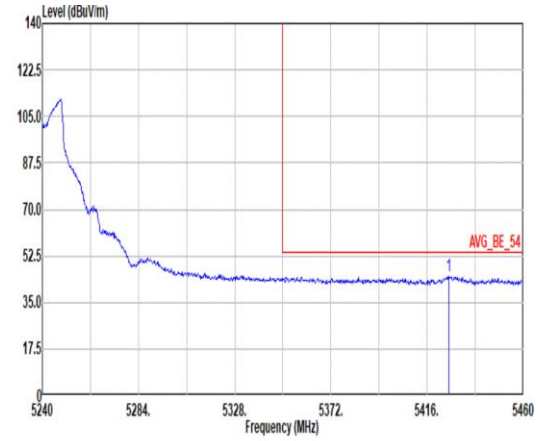 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5425.90 44.89 54.00 -9.11 34.37 32.80 10.57 32.85 0.00 213 83 AVERAGE	Blank

Mode	13	
	Harmonic	
	U-NII-1_5.25-5.35_802.11n HT20_CH48_5240MHz	
ANT	3+1	
Pol.	Horizontal	Vertical
Peak Avg	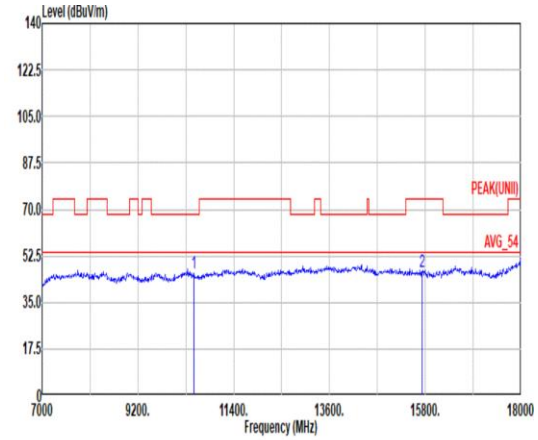 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10480.00 46.15 68.20 -22.05 50.56 38.46 17.57 60.72 0.28 -- -- Peak 2 15720.00 46.30 74.00 -27.70 48.17 38.14 21.66 61.90 0.23 -- -- Peak	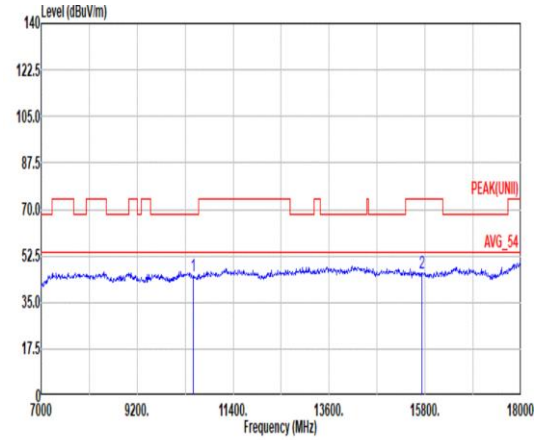 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10480.00 44.66 68.20 -23.54 49.07 38.46 17.57 60.72 0.28 -- -- Peak 2 15720.00 46.06 74.00 -27.94 47.93 38.14 21.66 61.90 0.23 -- -- Peak

Mode	13	
	Harmonic	
	U-NII-1_5.25-5.35_802.11n HT20_CH48_5240MHz	
ANT	3+1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	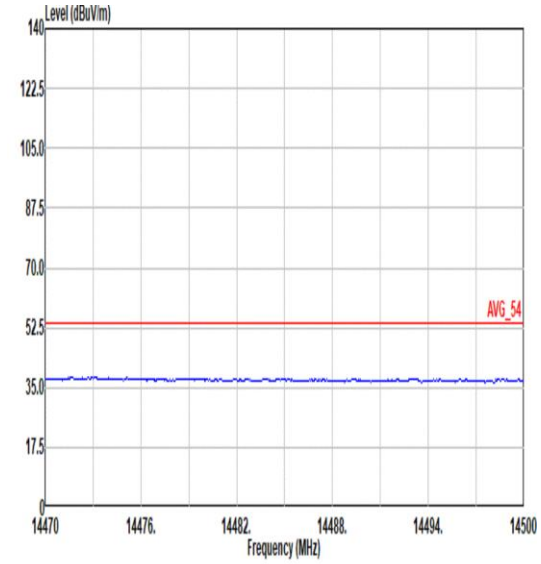 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 HORIZONTAL	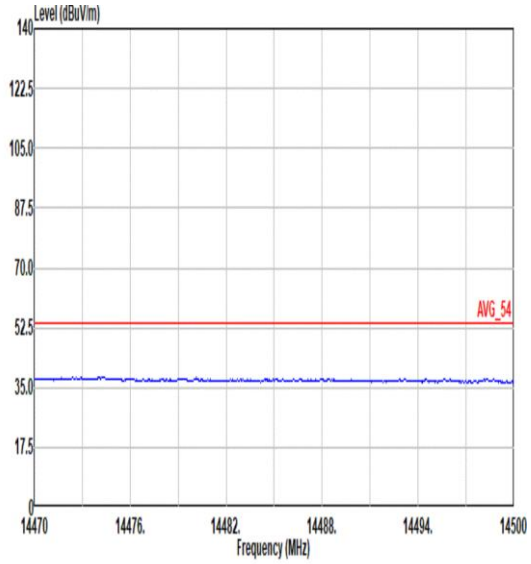 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 VERTICAL
17.7G ~18G Avg	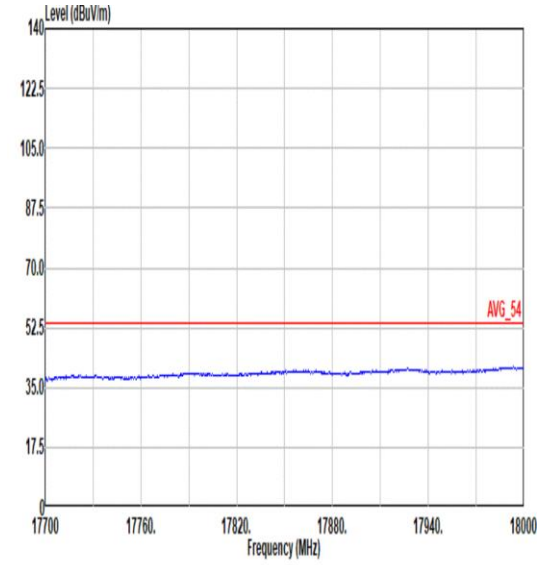 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 HORIZONTAL	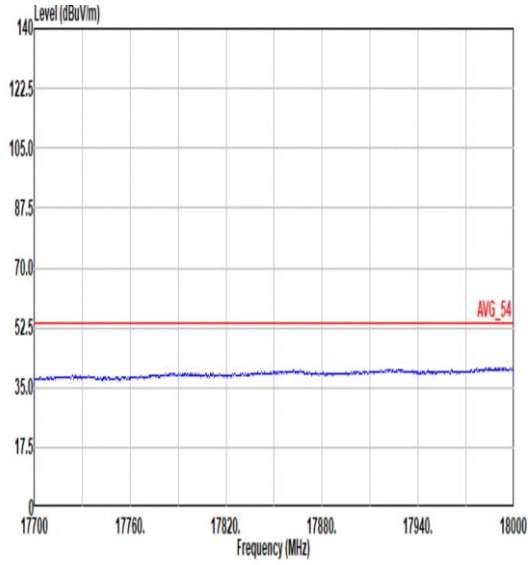 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 VERTICAL

Mode	14	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz	
ANT	3+1	
Pol.	Horizontal	Fundamental
Peak	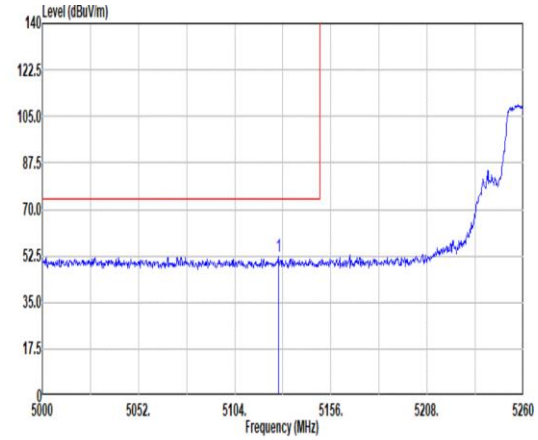 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5127.66 52.11 74.00 -21.89 41.62 33.01 10.35 32.87 0.00 205 0 PEAK	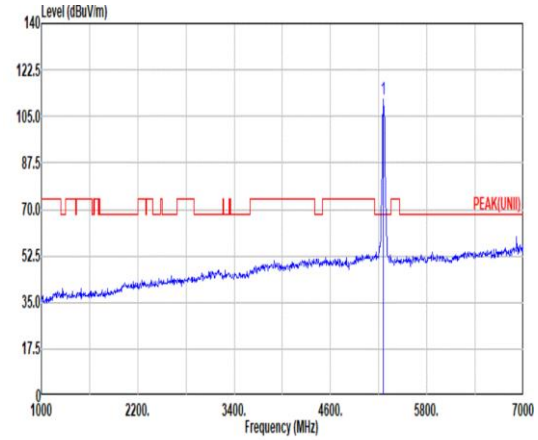 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5260.00 111.30 ------ ------ 100.72 32.99 10.45 32.86 0.00 205 0 PEAK
Avg	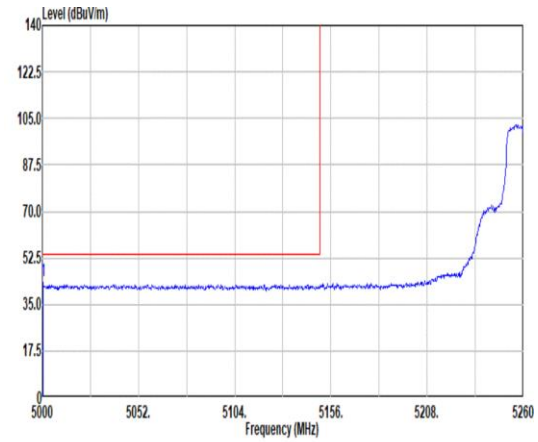 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5000.26 43.63 54.00 -10.37 32.97 33.30 10.24 32.88 0.00 205 0 AVERAGE	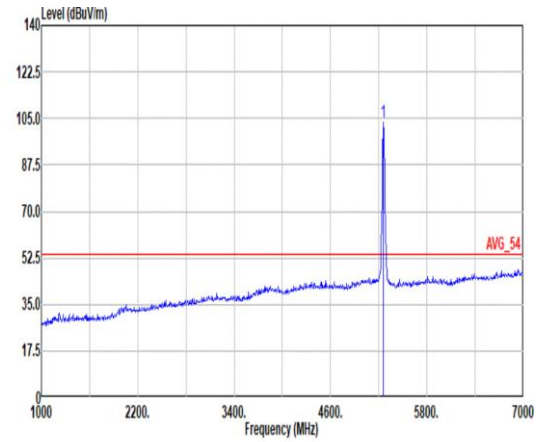 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5260.00 103.54 ------ ------ 92.96 32.99 10.45 32.86 0.00 205 0 AVERAGE

Mode	14	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz	
ANT	3+1	
Pol.	Horizontal	Fundamental
Peak	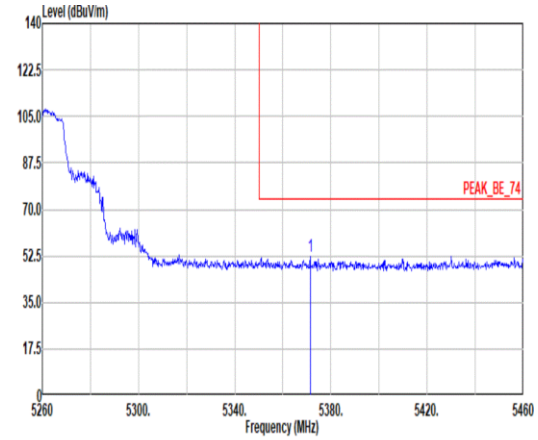 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5371.40 52.17 74.00 -21.83 41.64 32.86 10.52 32.85 0.00 205 0 PEAK	Blank
Avg	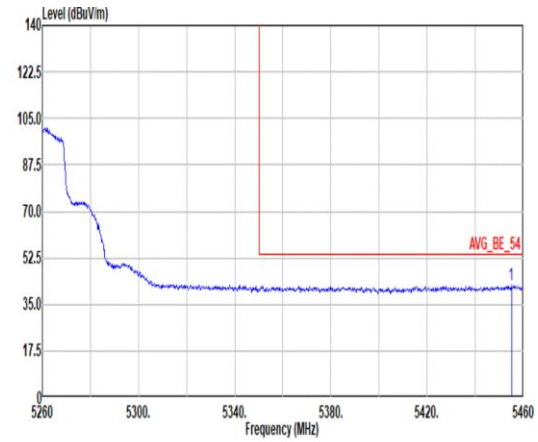 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5455.00 42.20 54.00 -11.80 31.63 32.81 10.60 32.84 0.00 205 0 AVERAGE	Blank

Mode	14	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz	
ANT	3+1	
Pol.	Vertical	Fundamental
Peak	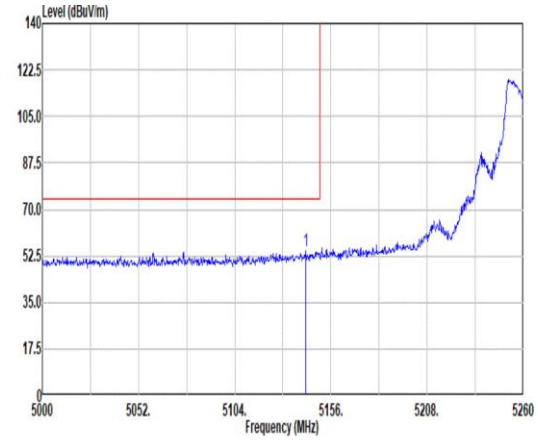 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5142.48 54.27 74.00 -19.73 43.71 33.07 10.36 32.87 0.00 189 86 PEAK	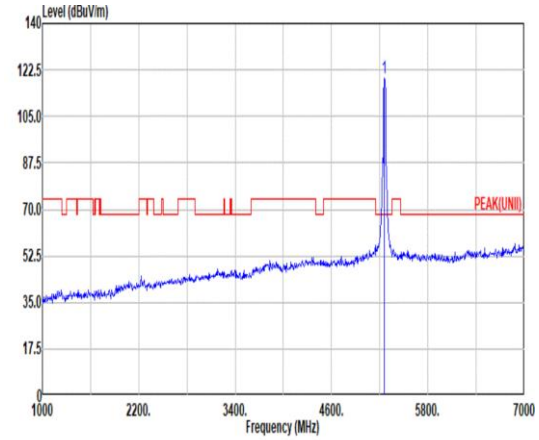 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5260.00 119.36 ------ ------ 108.78 32.99 10.45 32.86 0.00 189 86 PEAK
Avg	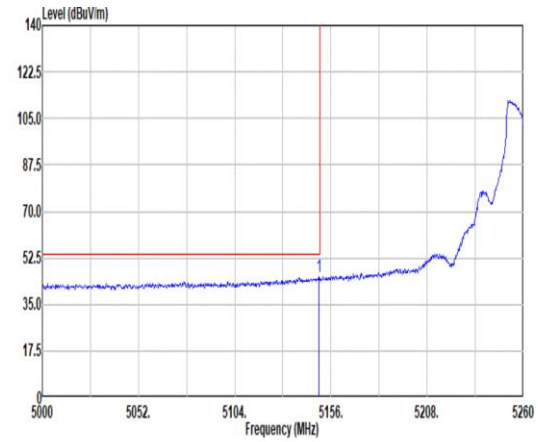 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.50 45.35 54.00 -8.65 34.75 33.10 10.37 32.87 0.00 189 86 AVERAGE	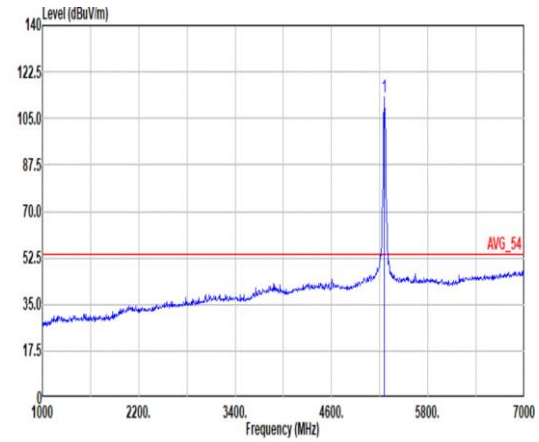 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5260.00 113.01 ------ ------ 102.43 32.99 10.45 32.86 0.00 189 86 AVERAGE

Mode	14	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz	
ANT	3+1	
Pol.	Vertical	Fundamental
Peak	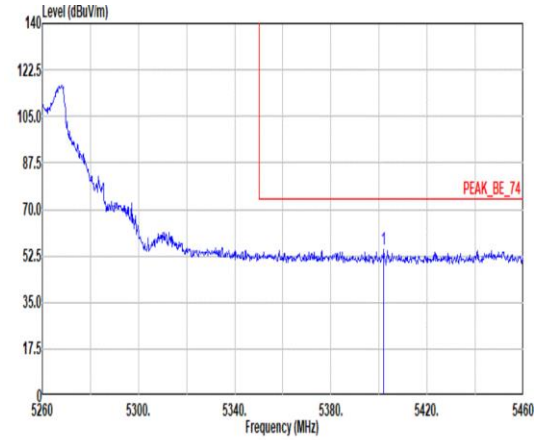 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5402.00 54.89 74.00 -19.11 44.40 32.80 10.54 32.85 0.00 189 86 PEAK	Blank
Avg	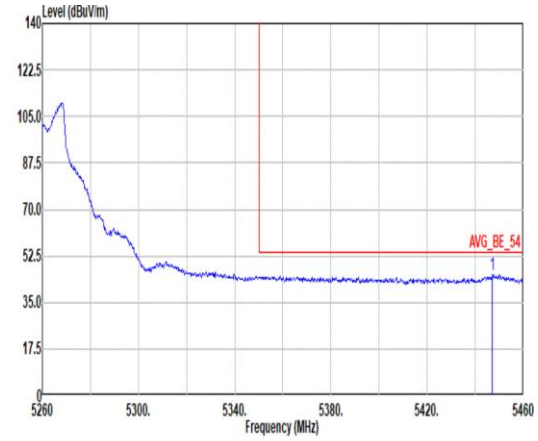 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5447.20 45.65 54.00 -8.35 35.10 32.80 10.59 32.84 0.00 189 86 AVERAGE	Blank

Mode	14	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz	
ANT	3+1	
Pol.	Horizontal	Vertical
Peak Avg	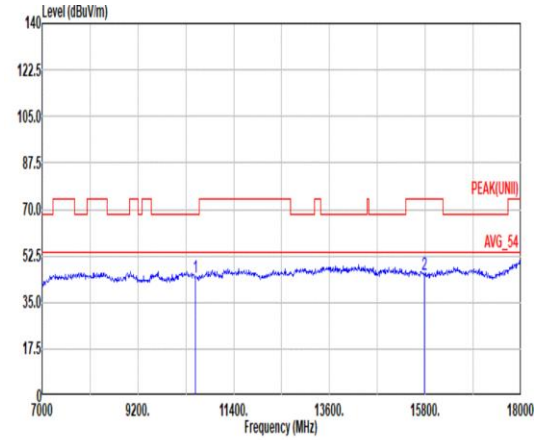 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10520.00 44.25 68.20 -23.95 48.68 38.50 17.58 60.79 0.28 -- -- Peak 2 15780.00 45.56 74.00 -28.44 47.28 38.08 21.70 61.74 0.24 -- -- Peak	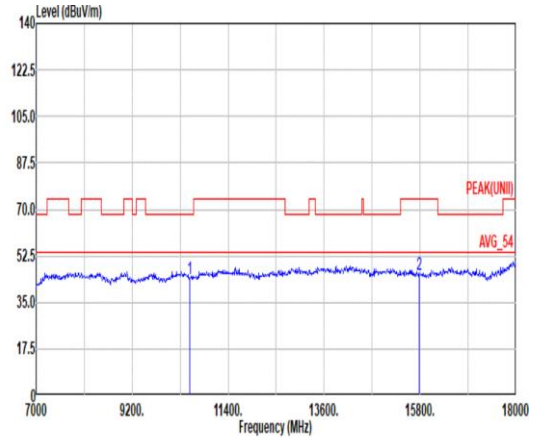 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10520.00 44.03 68.20 -24.17 48.46 38.50 17.58 60.79 0.28 -- -- Peak 2 15780.00 45.65 74.00 -28.35 47.37 38.08 21.70 61.74 0.24 -- -- Peak

Mode	14	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz	
ANT	3+1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	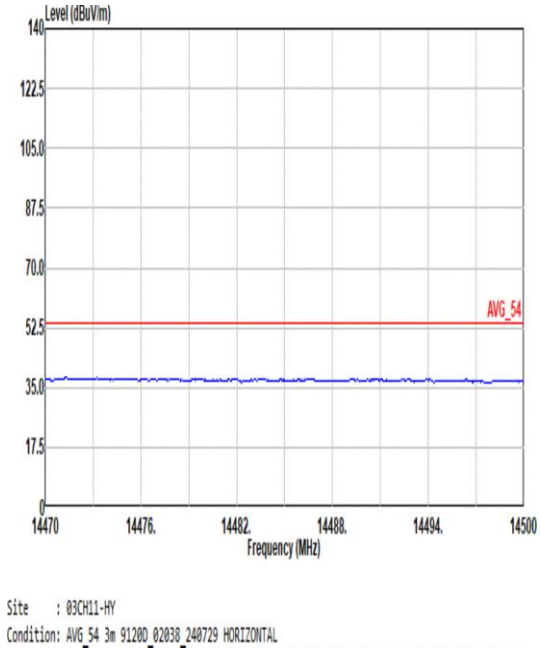	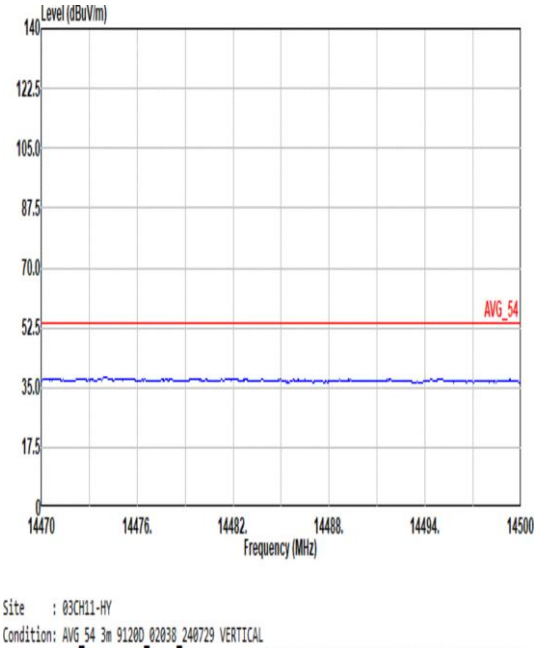
17.7G ~18G Avg	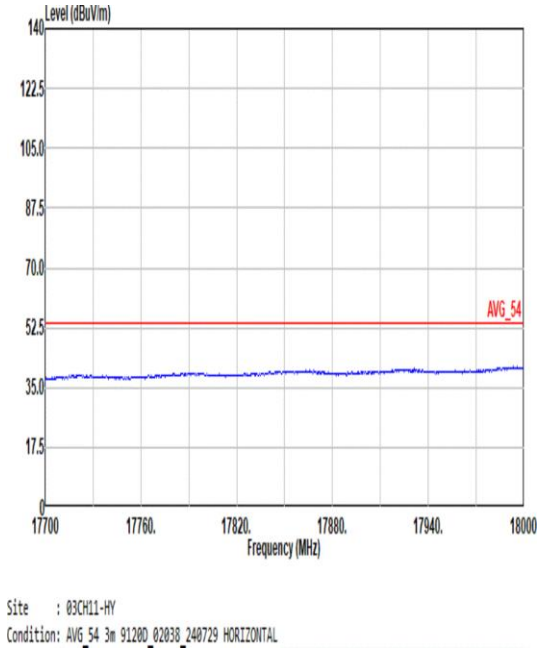	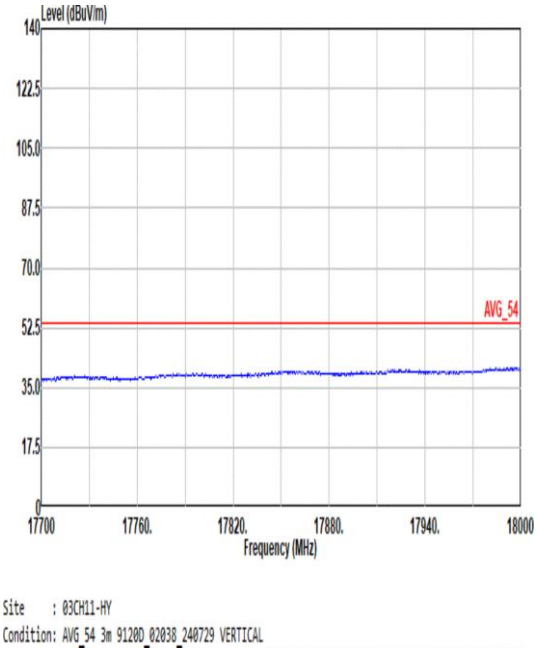

Mode	15	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz	
ANT	3+1	
Pol.	Horizontal	Fundamental
Peak	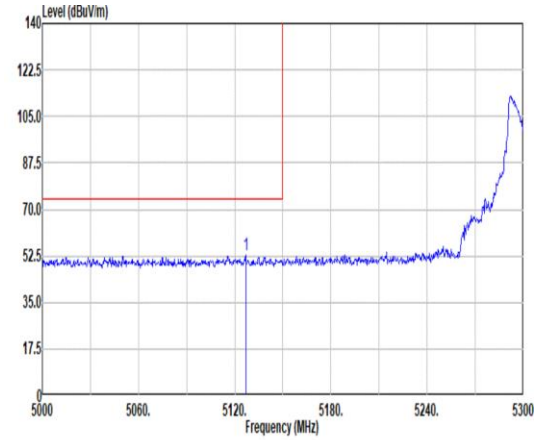 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5126.90 52.87 74.00 -21.13 42.38 33.01 10.35 32.87 0.00 400 343 PEAK	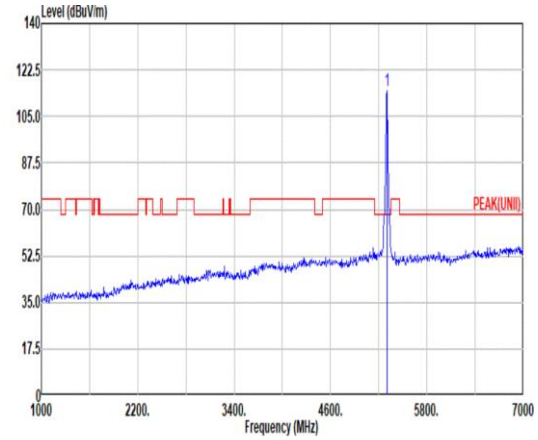 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 114.51 ------ ------ 103.99 32.90 10.48 32.86 0.00 400 343 PEAK
Avg	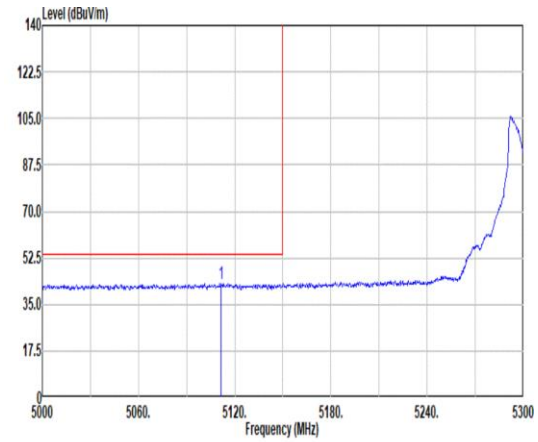 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5111.60 42.88 54.00 -11.12 32.47 32.95 10.33 32.87 0.00 400 343 AVERAGE	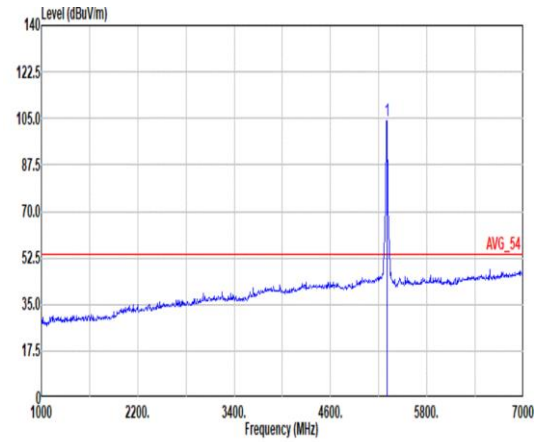 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 104.14 ------ ------ 93.61 32.92 10.47 32.86 0.00 400 343 AVERAGE

Mode	15	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz	
ANT	3+1	
Pol.	Horizontal	Fundamental
Peak	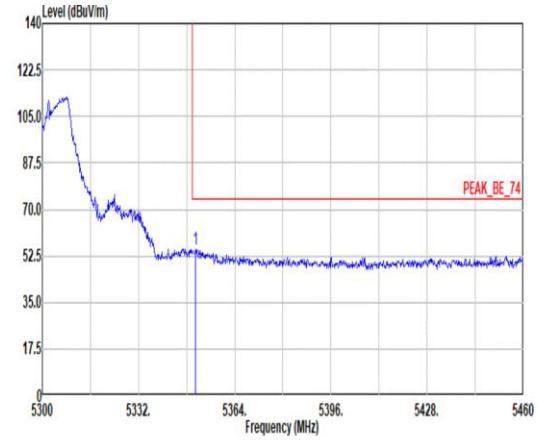 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.04 55.12 74.00 -18.88 44.56 32.90 10.51 32.85 0.00 400 343 PEAK	Blank
Avg	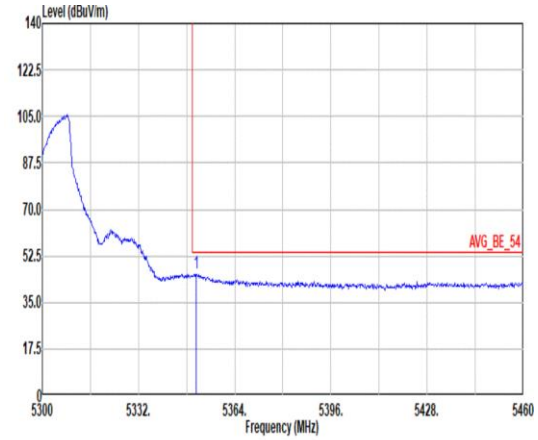 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 Horizontal : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.20 45.82 54.00 -8.18 35.26 32.90 10.51 32.85 0.00 400 343 AVERAGE	Blank

Mode	15	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz	
ANT	3+1	
Pol.	Vertical	Fundamental
Peak	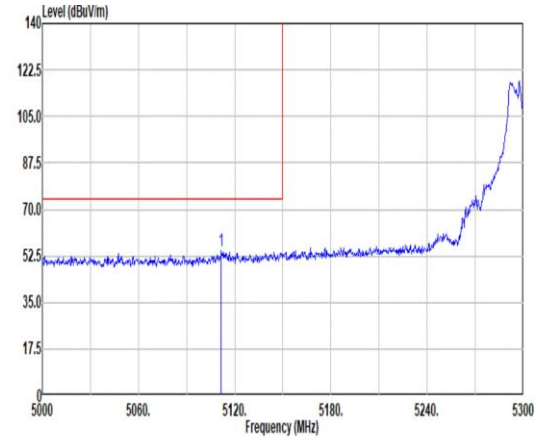 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5111.60 54.17 74.00 -19.83 43.76 32.95 10.33 32.87 0.00 190 72 PEAK	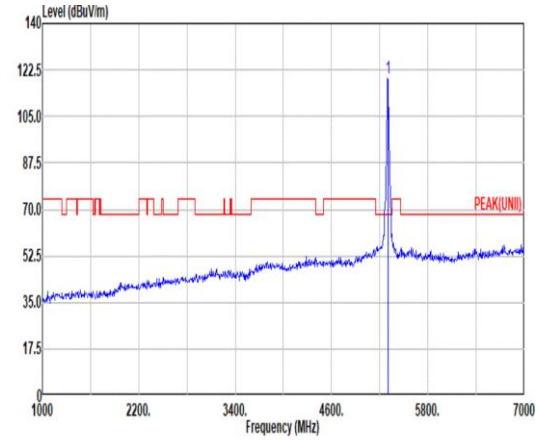 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 119.15 ------ ------ 108.63 32.91 10.47 32.86 0.00 190 72 PEAK
Avg	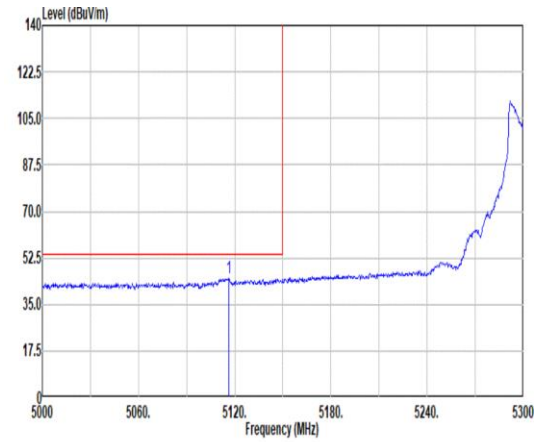 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5116.10 45.15 54.00 -8.85 34.72 32.96 10.34 32.87 0.00 190 72 AVERAGE	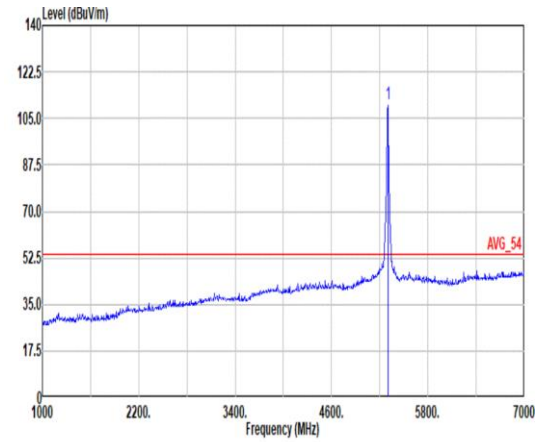 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 110.24 ------ ------ 99.72 32.90 10.48 32.86 0.00 190 72 AVERAGE

Mode	15	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz	
ANT	3+1	
Pol.	Vertical	Fundamental
Peak	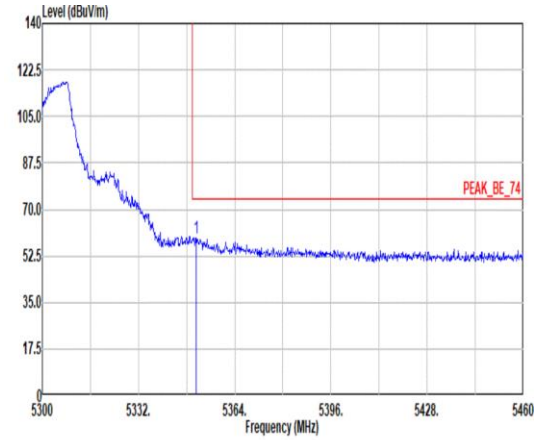 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.20 59.36 74.00 -14.64 48.80 32.90 10.51 32.85 0.00 190 72 PEAK	Blank
Avg	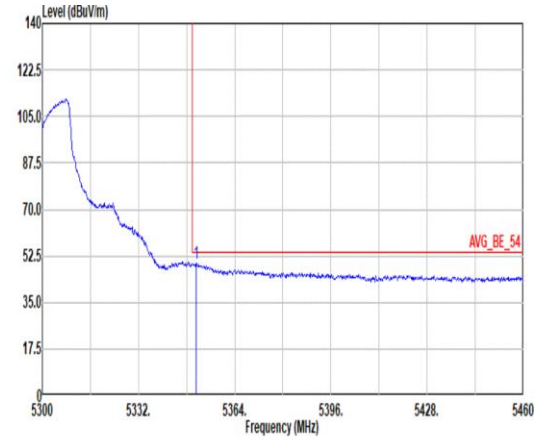 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 Vertical : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.20 49.89 54.00 -4.11 39.33 32.90 10.51 32.85 0.00 190 72 AVERAGE	Blank

Mode	15	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz	
ANT	3+1	
Pol.	Horizontal	Vertical
Peak Avg	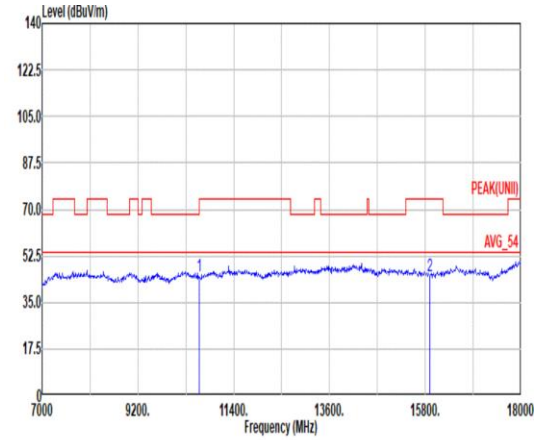 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10600.00 44.89 74.00 -29.11 49.13 38.80 17.61 60.93 0.28 -- -- Peak 2 15900.00 45.07 74.00 -28.93 46.49 38.00 21.76 61.44 0.26 -- -- Peak	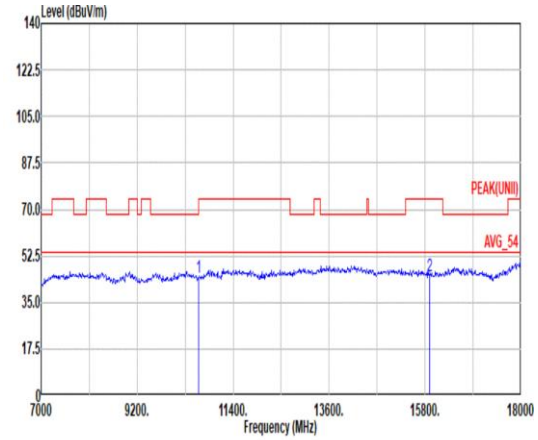 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10600.00 44.17 74.00 -29.83 48.41 38.80 17.61 60.93 0.28 -- -- Peak 2 15900.00 44.71 74.00 -29.29 46.13 38.00 21.76 61.44 0.26 -- -- Peak

Mode	15	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz	
ANT	3+1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	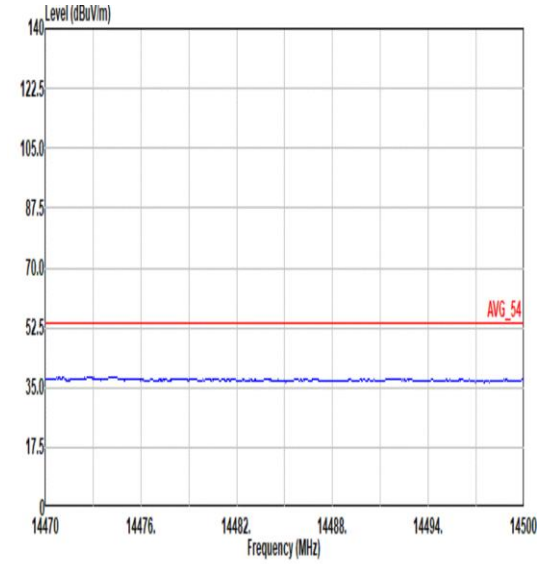 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 HORIZONTAL	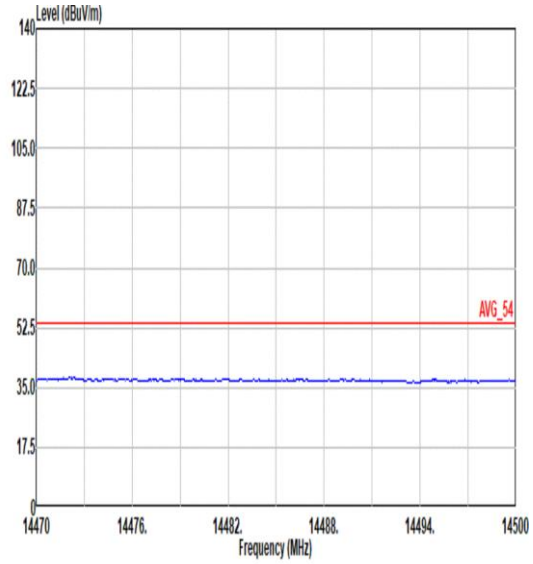 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 VERTICAL
17.7G ~18G Avg	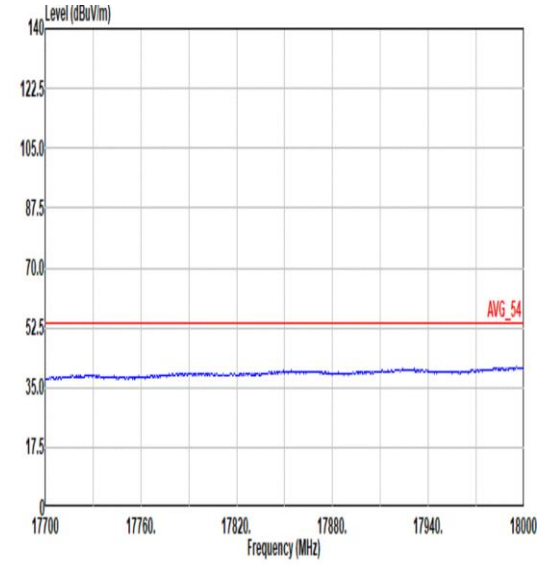 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 HORIZONTAL	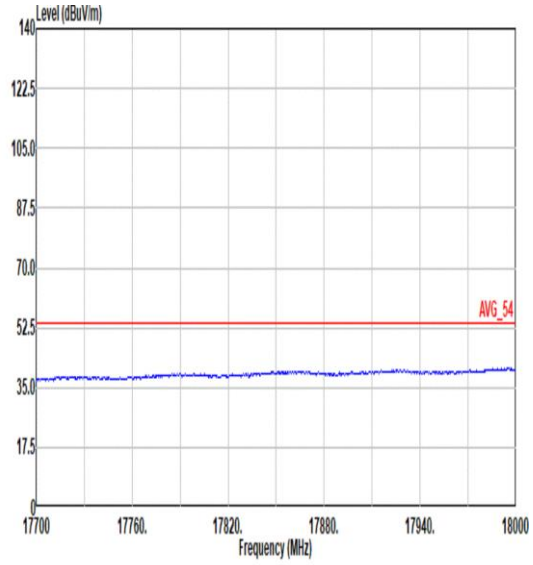 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 VERTICAL

Mode	16	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz	
ANT	3+1	
Pol.	Horizontal	Fundamental
Peak	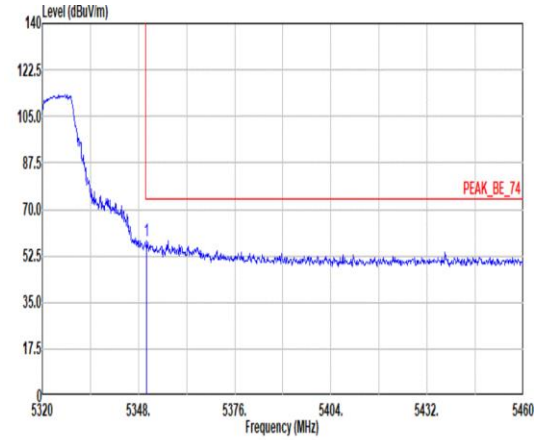 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.38 58.36 74.00 -15.64 47.80 32.90 10.51 32.85 0.00 300 330 PEAK	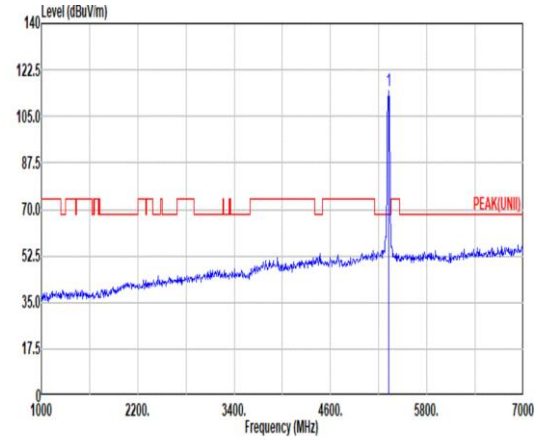 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 114.71 ------ ------ 104.17 32.90 10.49 32.85 0.00 300 330 PEAK
Avg	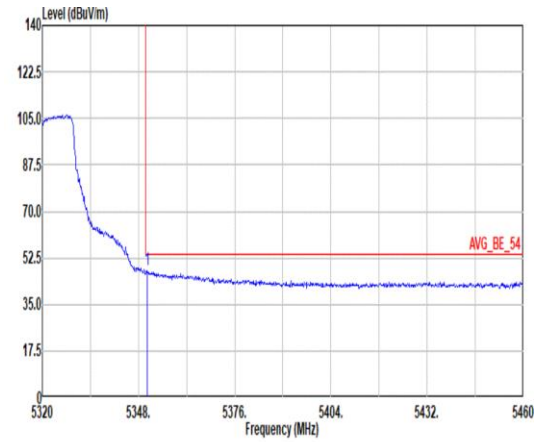 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.52 47.87 54.00 -6.13 37.31 32.90 10.51 32.85 0.00 300 330 AVERAGE	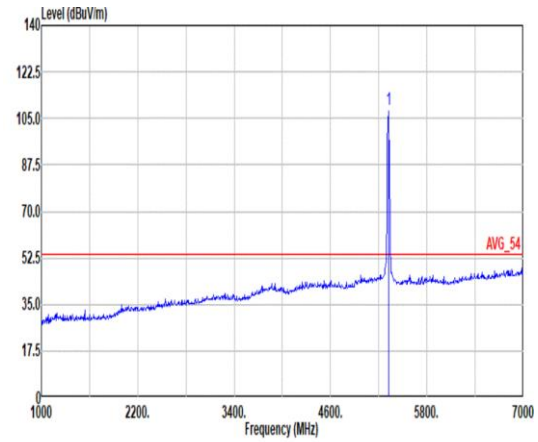 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 108.10 ------ ------ 97.56 32.90 10.49 32.85 0.00 300 330 AVERAGE

Mode	16	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz	
ANT	3+1	
Pol.	Vertical	Fundamental
Peak	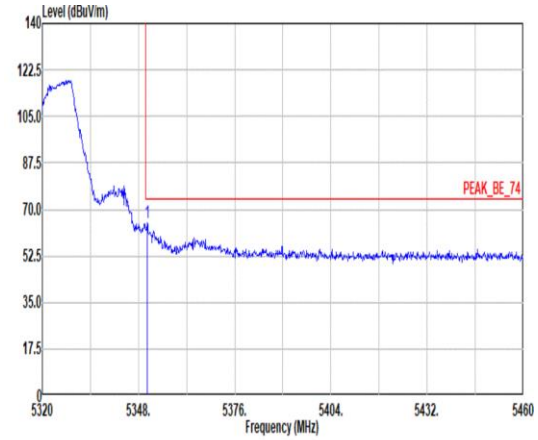 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.52 64.97 74.00 -9.03 54.41 32.90 10.51 32.85 0.00 211 37 PEAK	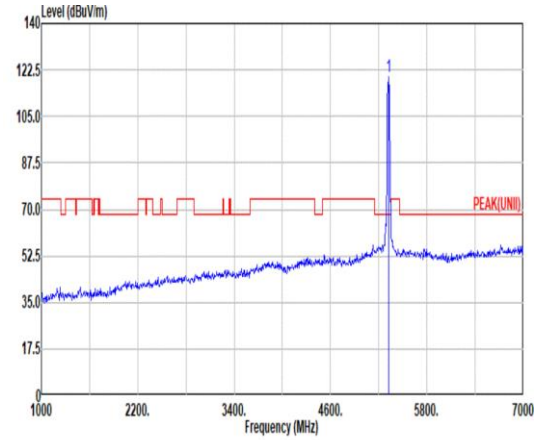 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 119.83 ------ ------ 109.29 32.90 10.49 32.85 0.00 211 37 PEAK
Avg	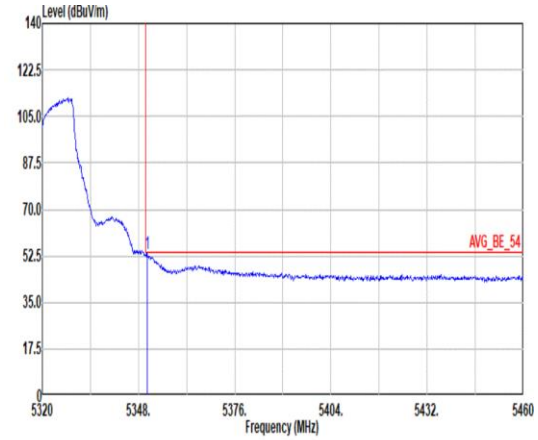 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.52 53.56 54.00 -0.44 43.00 32.90 10.51 32.85 0.00 211 37 AVERAGE	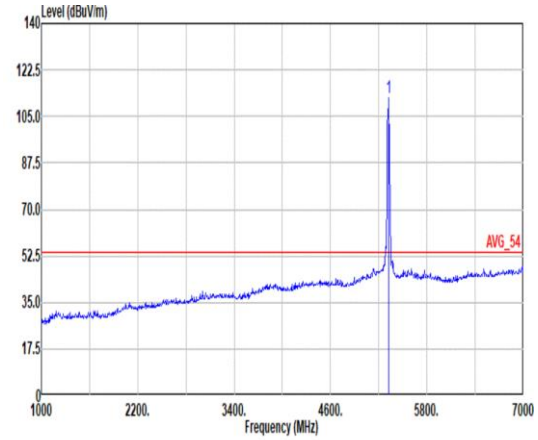 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 112.24 ------ ------ 101.70 32.90 10.49 32.85 0.00 211 37 AVERAGE

Mode	16	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz	
ANT	3+1	
Pol.	Horizontal	Vertical
Peak Avg	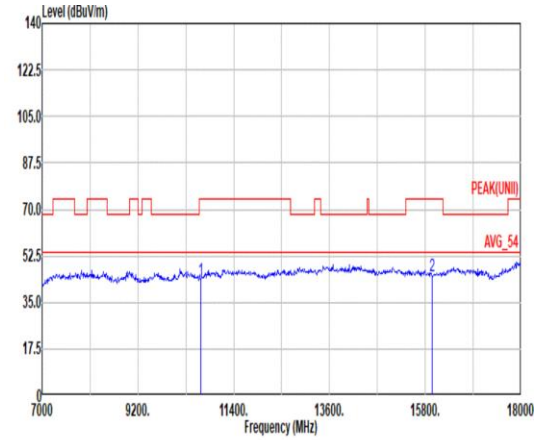 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10640.00 43.42 74.00 -30.58 47.56 38.96 17.62 61.00 0.28 -- -- Peak 2 15960.00 44.87 74.00 -29.13 46.43 37.66 21.79 61.28 0.27 -- -- Peak	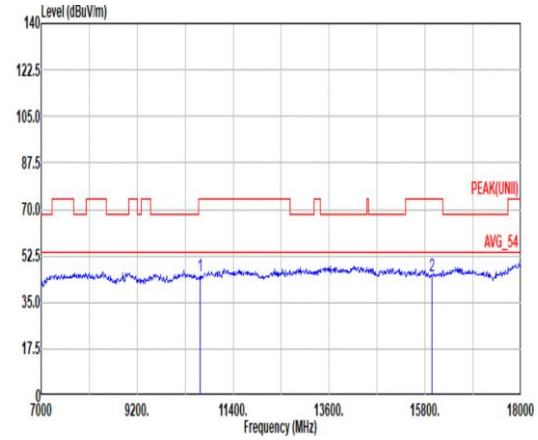 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10640.00 44.94 74.00 -29.06 49.08 38.96 17.62 61.00 0.28 -- -- Peak 2 15960.00 44.76 74.00 -29.24 46.32 37.66 21.79 61.28 0.27 -- -- Peak

Mode	16	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz	
ANT	3+1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	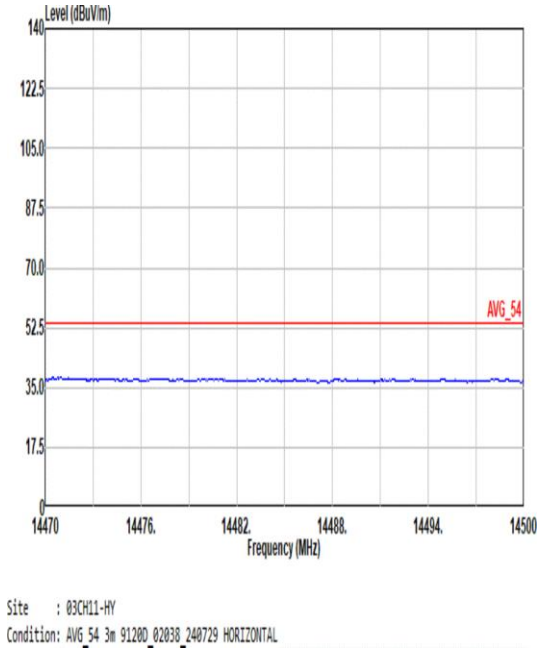	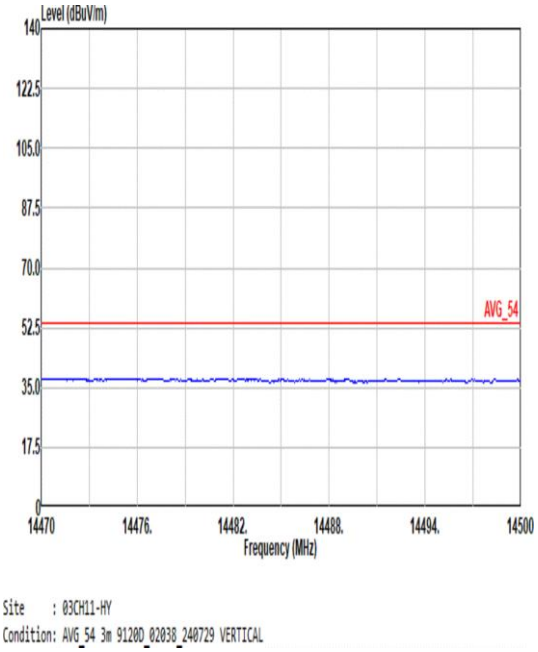
17.7G ~18G Avg	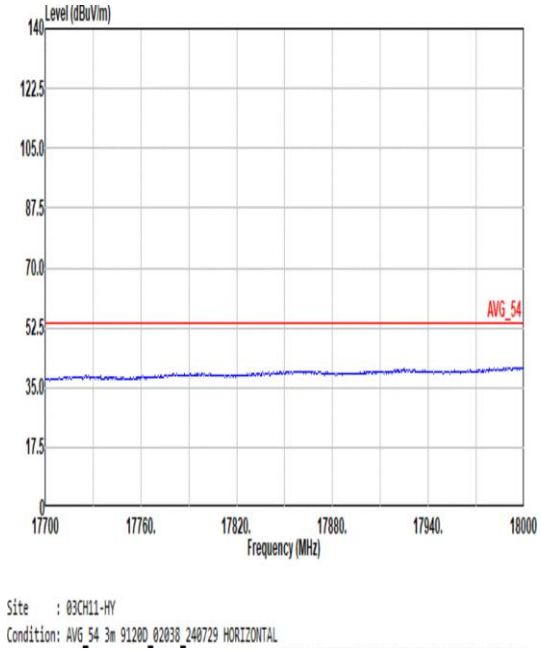	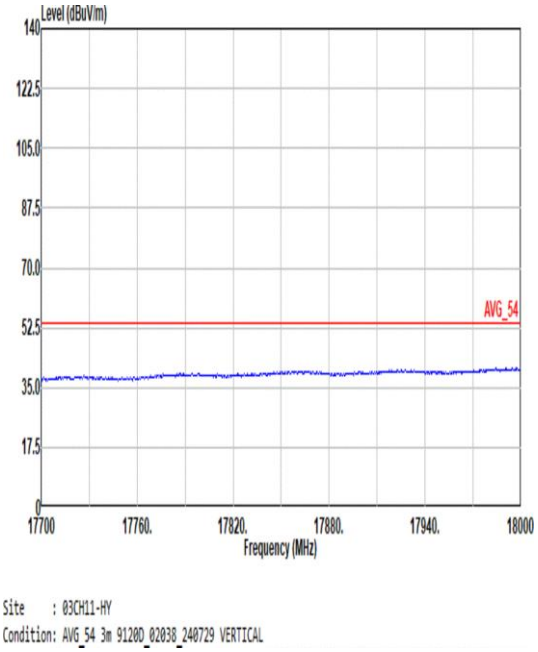

Mode	17	
	Band Edge	
	U-NII-2C_5.25-5.35_802.11n HT20_CH100_5500MHz	
ANT	3+1	
Pol.	Horizontal	Fundamental
Peak	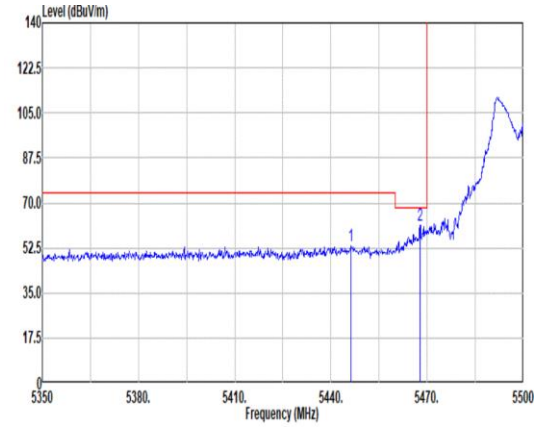 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5446.30 53.12 74.00 -20.88 42.57 32.80 10.59 32.84 0.00 400 338 PEAK 2 5467.75 61.08 68.20 -7.12 50.47 32.84 10.61 32.84 0.00 400 338 PEAK	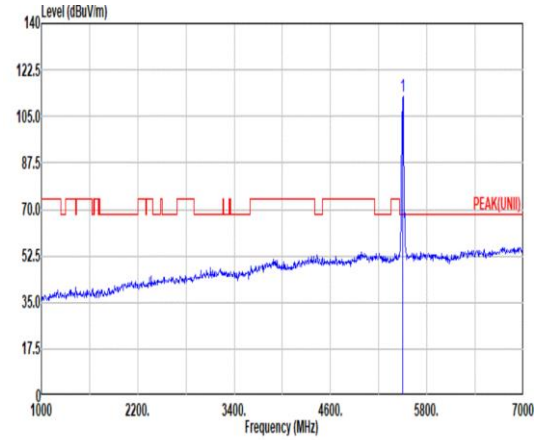 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 112.74 ------ ------ 102.02 32.90 10.66 32.84 0.00 400 338 PEAK
Avg	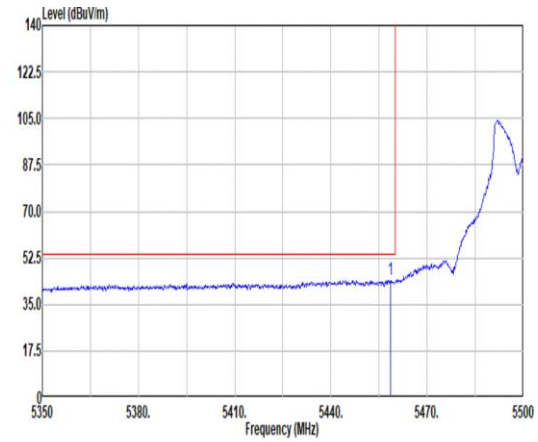 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.60 44.16 54.00 -9.84 33.58 32.82 10.60 32.84 0.00 400 338 AVERAGE	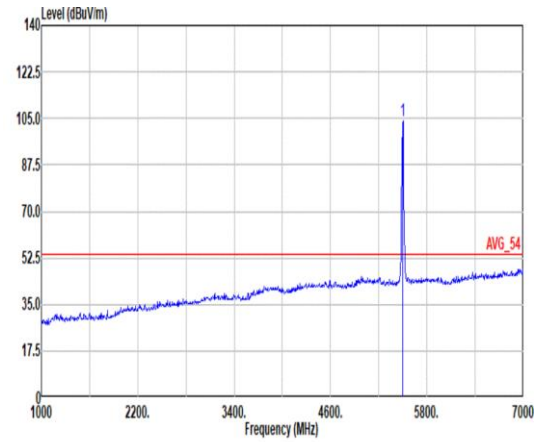 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 104.08 ------ ------ 93.36 32.90 10.66 32.84 0.00 400 338 AVERAGE

Mode	17	
	Band Edge	
	U-NII-2C_5.25-5.35_802.11n HT20_CH100_5500MHz	
ANT	3+1	
Pol.	Vertical	Fundamental
Peak	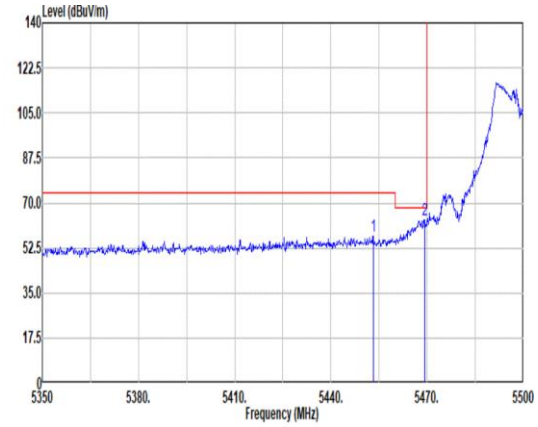 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5453.20 57.02 74.00 -16.98 46.45 32.81 10.60 32.84 0.00 200 35 PEAK 2 5469.25 63.49 68.20 -4.71 52.87 32.84 10.62 32.84 0.00 200 35 PEAK	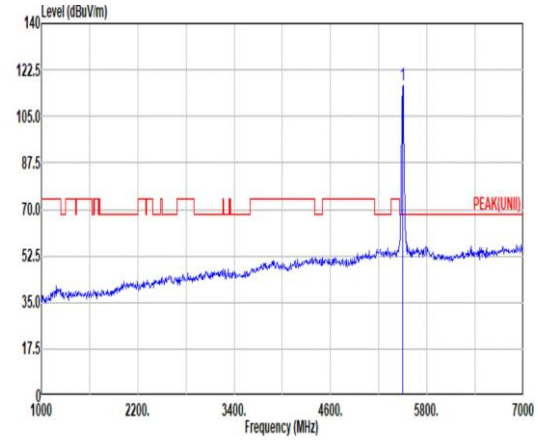 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 116.74 ------ ------ 106.02 32.90 10.66 32.84 0.00 200 35 PEAK
Avg	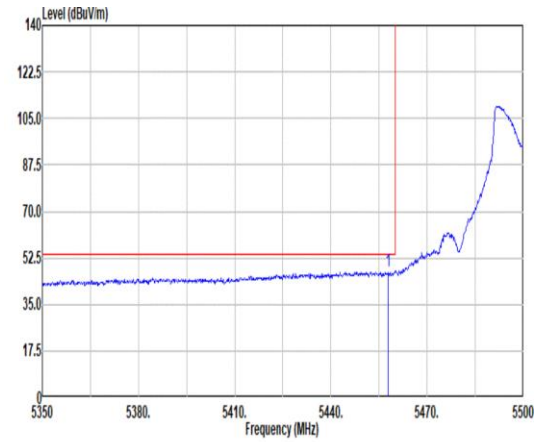 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.85 47.36 54.00 -6.64 36.78 32.82 10.60 32.84 0.00 200 35 AVERAGE	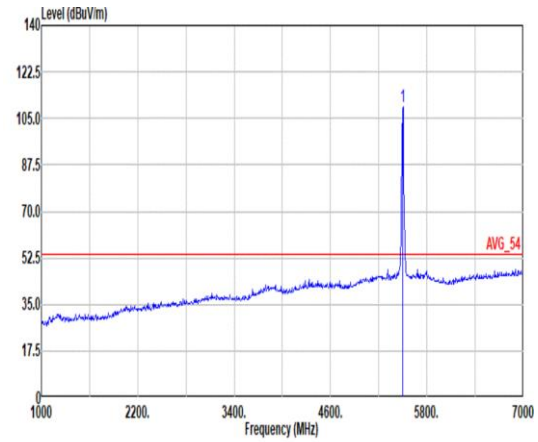 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 109.24 ------ ------ 98.52 32.90 10.66 32.84 0.00 200 35 AVERAGE

Mode	17	
	Harmonic	
	U-NII-2C_5.25-5.35_802.11n HT20_CH100_5500MHz	
ANT	3+1	
Pol.	Horizontal	Vertical
Peak Avg	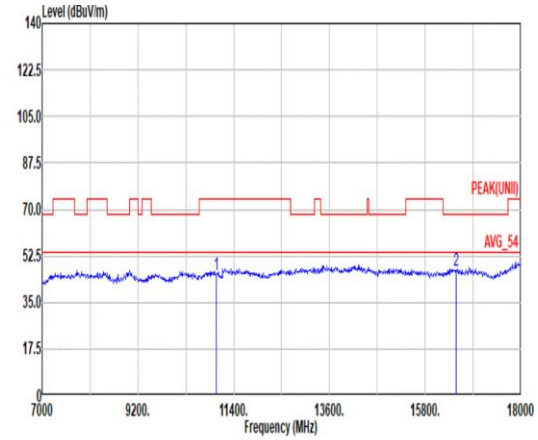 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11000.00 45.32 74.00 -28.68 50.33 38.60 17.73 61.63 0.29 -- -- Peak 2 16500.00 47.26 68.20 -20.94 45.71 38.80 22.42 59.98 0.31 -- -- Peak	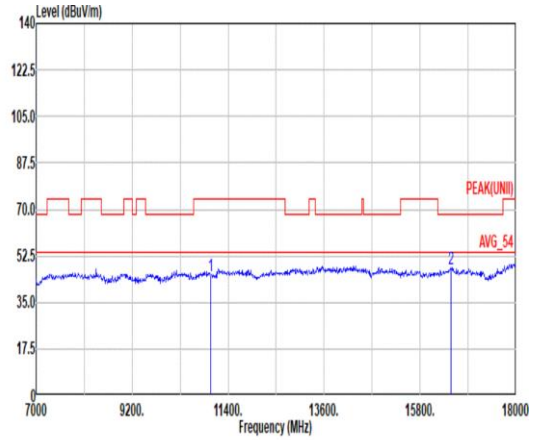 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11000.00 45.13 74.00 -28.87 50.14 38.60 17.73 61.63 0.29 -- -- Peak 2 16500.00 47.34 68.20 -20.86 45.79 38.80 22.42 59.98 0.31 -- -- Peak

Mode	17	
	Harmonic	
	U-NII-2C_5.25-5.35_802.11n HT20_CH100_5500MHz	
ANT	3+1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	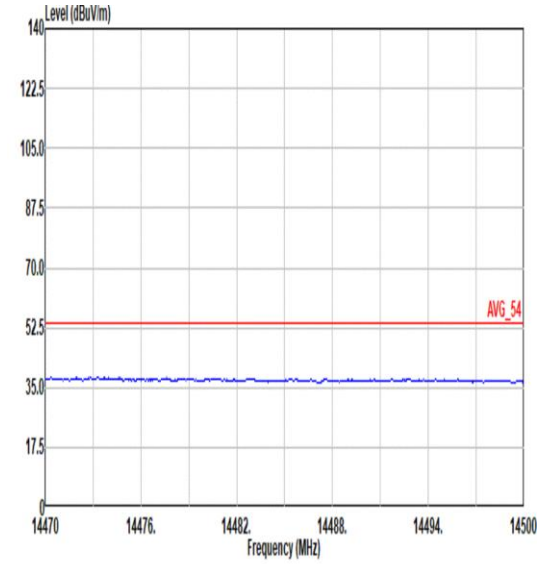	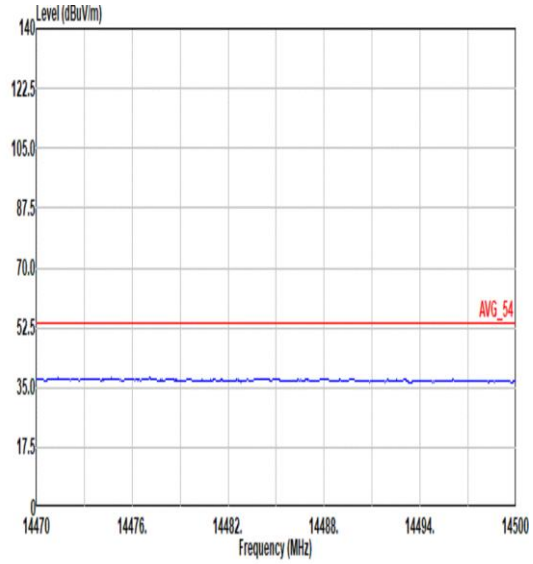
17.7G ~18G Avg	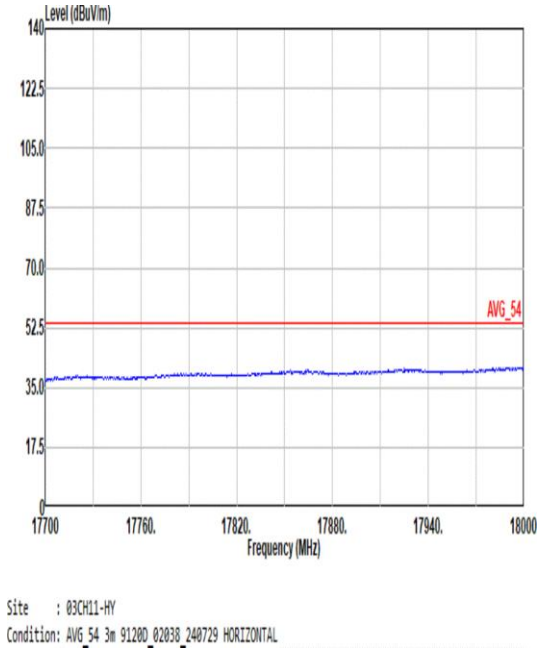	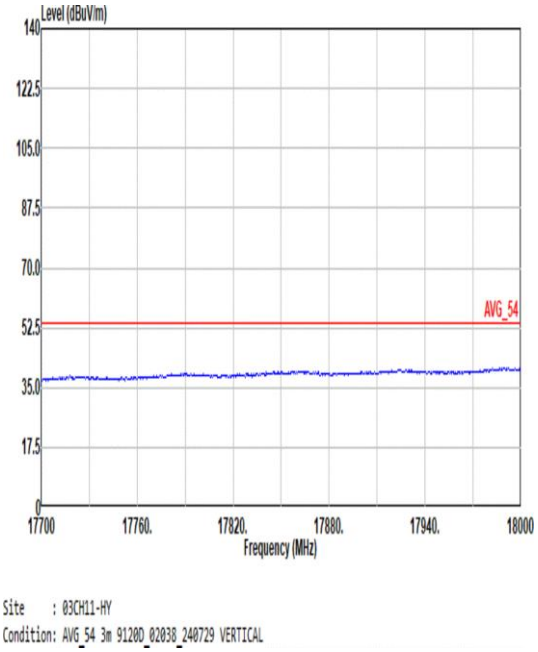

Mode	18	
	Band Edge - L	
	U-NII-2C_5.25-5.35_802.11n HT20_CH116_5580MHz	
ANT	3+1	
Pol.	Horizontal	Fundamental
Peak	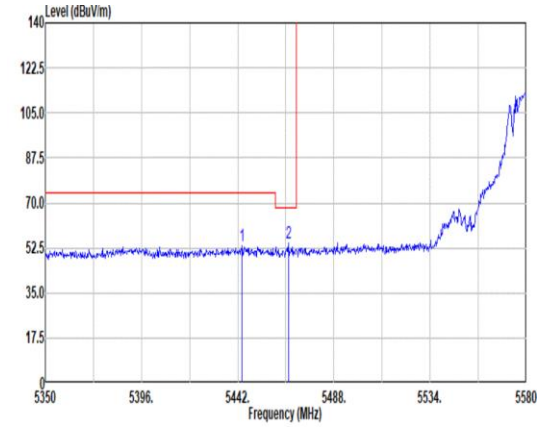 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5443.84 53.37 74.00 -20.63 42.82 32.80 10.59 32.84 0.00 104 322 PEAK 2 5466.15 54.53 68.20 -13.67 43.93 32.83 10.61 32.84 0.00 104 322 PEAK	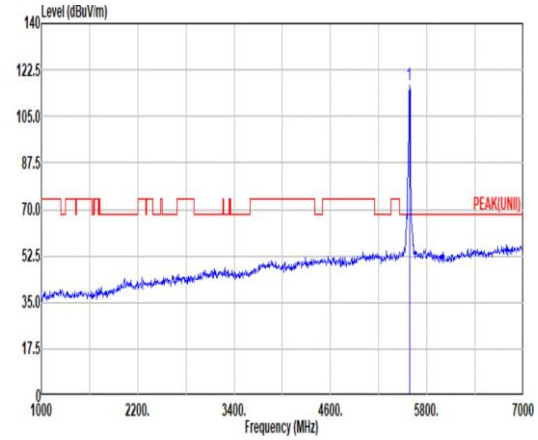 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 116.82 ------ ------ 106.19 32.76 10.74 32.87 0.00 104 322 PEAK
Avg	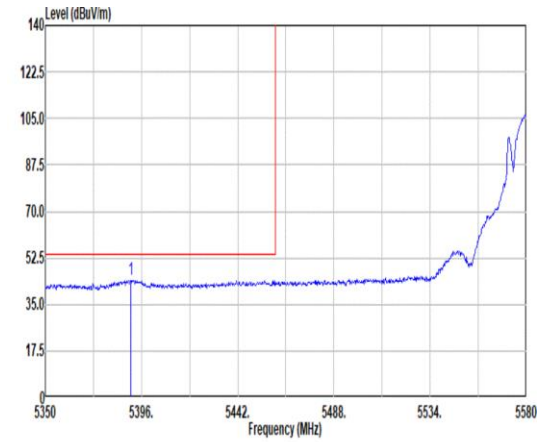 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5390.71 44.22 54.00 -9.78 33.72 32.82 10.53 32.85 0.00 104 322 AVERAGE	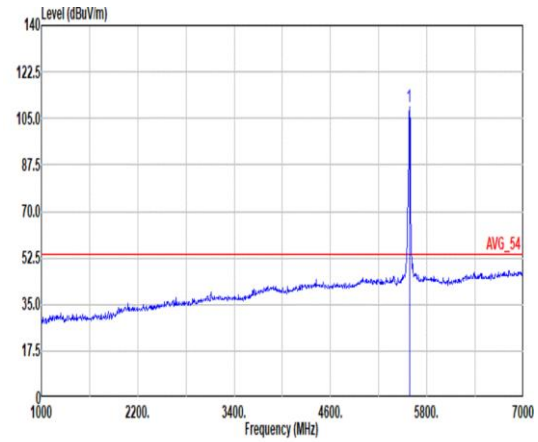 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 109.28 ------ ------ 98.65 32.76 10.74 32.87 0.00 104 322 AVERAGE

Mode	18	
	Band Edge - R	
	U-NII-2C_5.25-5.35_802.11n HT20_CH116_5580MHz	
ANT	3+1	
Pol.	Horizontal	Fundamental
Peak	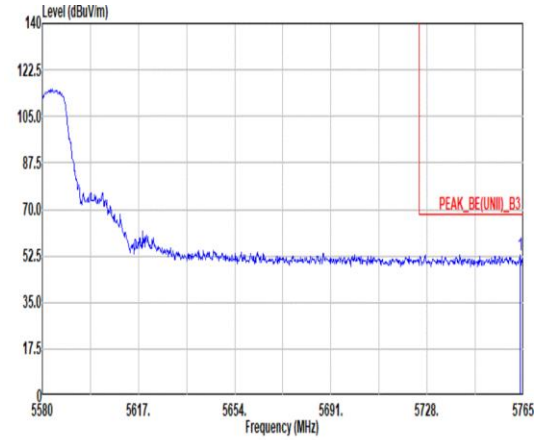 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq / Level / Limit Line / Margin / Read Level / Ant Factor / Cable Loss / Preamp Factor / Aux Factor / APos / TPos / Remark MHz / dBuV/m / dBuV/m / dB / dBuV / dB/m / dB / dB / dB / cm / deg 1 5763.71 52.97 68.20 -15.23 41.38 33.68 10.83 32.92 0.00 104 322 PEAK	Blank

Mode	18	
	Band Edge - L	
	U-NII-2C_5.25-5.35_802.11n HT20_CH116_5580MHz	
ANT	3+1	
Pol.	Vertical	Fundamental
Peak	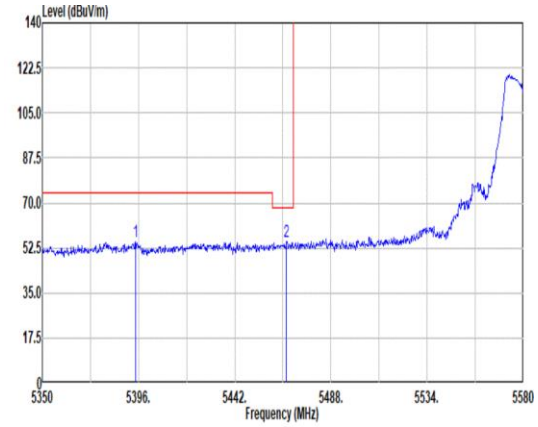 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5394.62 54.98 74.00 -19.02 44.48 32.81 10.54 32.85 0.00 175 38 PEAK 2 5466.84 54.85 68.20 -13.35 44.25 32.83 10.61 32.84 0.00 175 38 PEAK	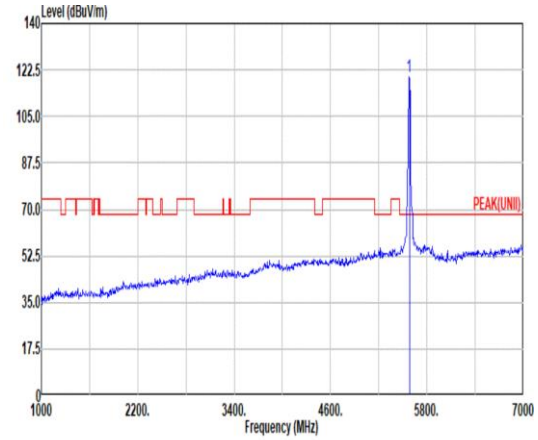 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5580.00 120.13 ------ ------ 109.45 32.81 10.73 32.86 0.00 175 38 PEAK
Avg	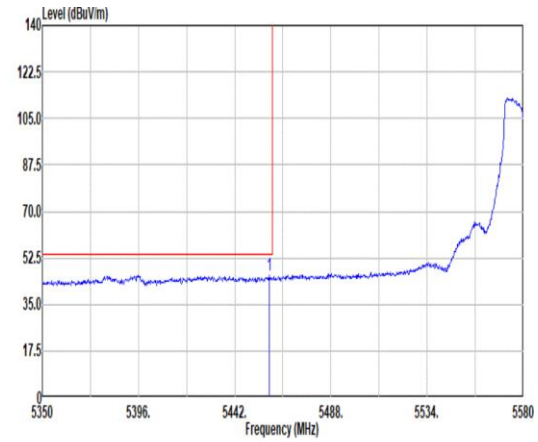 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5458.33 46.18 54.00 -7.82 35.60 32.82 10.60 32.84 0.00 175 38 AVERAGE	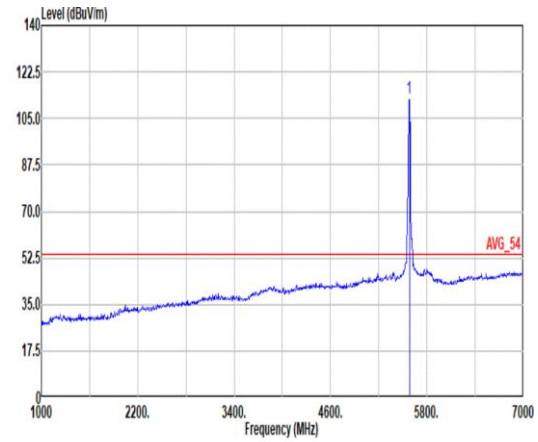 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5580.00 112.28 ------ ------ 101.60 32.81 10.73 32.86 0.00 175 38 AVERAGE

Mode	18	
	Band Edge - R	
	U-NII-2C_5.25-5.35_802.11n HT20_CH116_5580MHz	
ANT	3+1	
Pol.	Vertical	Fundamental
Peak	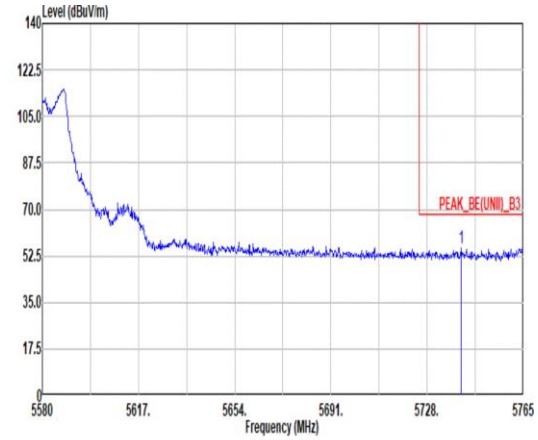 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5741.14 55.32 68.20 -12.88 43.86 33.56 10.82 32.92 0.00 175 38 PEAK	Blank

Mode	18	
	Harmonic	
	U-NII-2C_5.25-5.35_802.11n HT20_CH116_5580MHz	
ANT	3+1	
Pol.	Horizontal	Vertical
Peak Avg	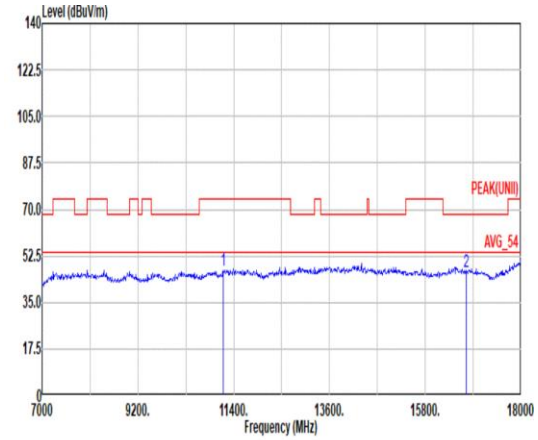 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11160.00 47.04 74.00 -26.96 51.94 38.62 17.90 61.71 0.29 -- -- Peak 2 16740.00 46.75 68.20 -21.45 45.13 38.00 22.72 59.43 0.33 -- -- Peak	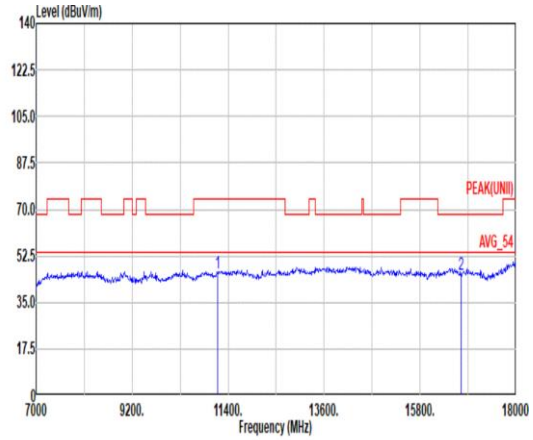 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11160.00 45.78 74.00 -28.22 50.68 38.62 17.90 61.71 0.29 -- -- Peak 2 16740.00 45.52 68.20 -22.68 43.90 38.00 22.72 59.43 0.33 -- -- Peak

Mode	18	
	Harmonic	
	U-NII-2C_5.25-5.35_802.11n HT20_CH116_5580MHz	
ANT	3+1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	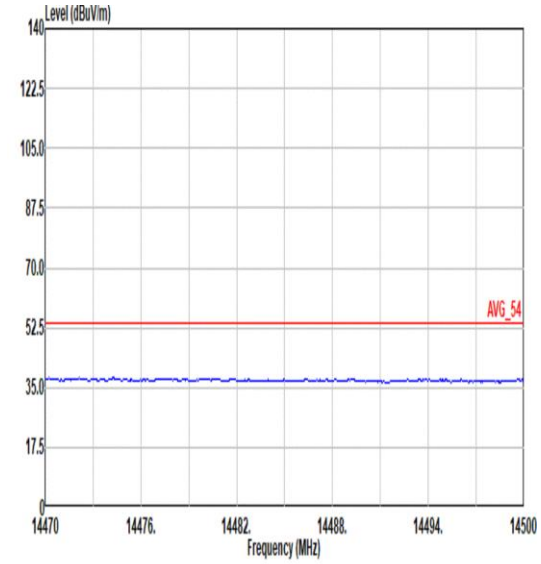 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 HORIZONTAL	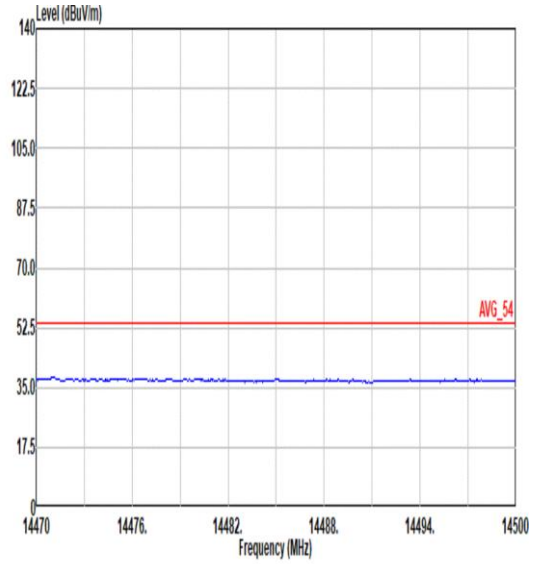 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 VERTICAL
17.7G ~18G Avg	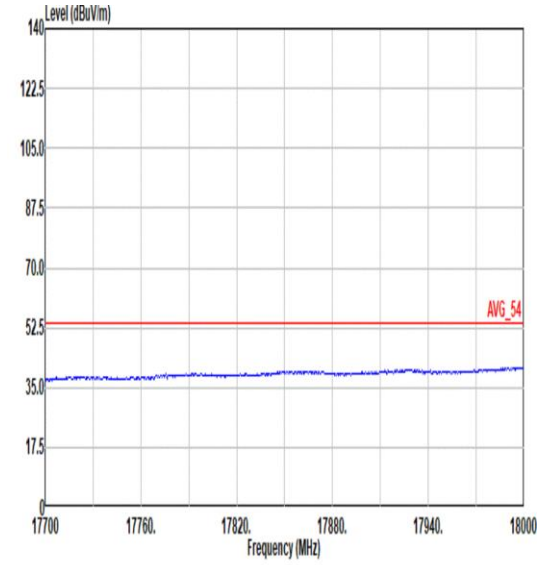 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 HORIZONTAL	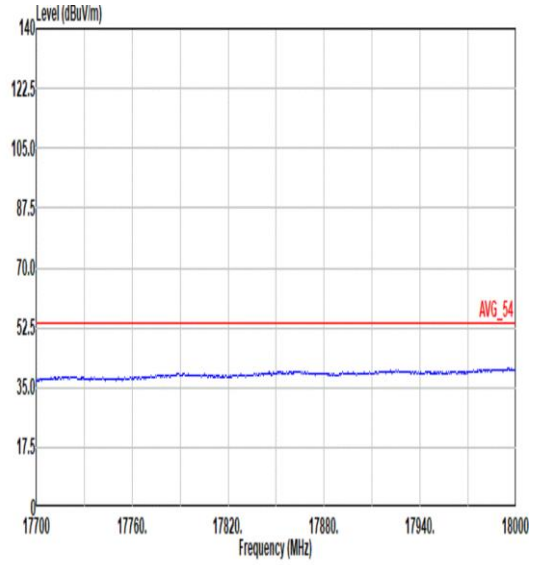 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 VERTICAL

Mode	19	
	Band Edge	
	U-NII-2C_5.25-5.35_802.11n HT20_CH140_5700MHz	
ANT	3+1	
Pol.	Horizontal	Fundamental
Peak	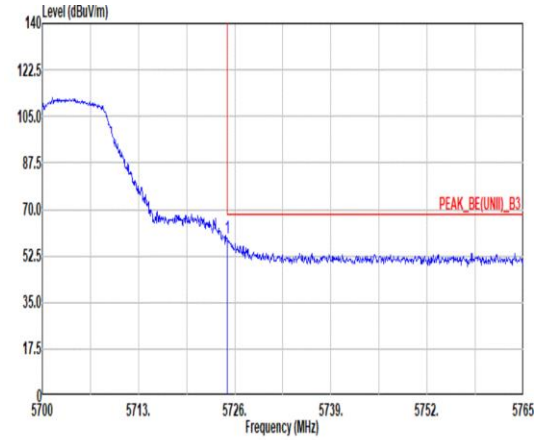 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5725.03 59.22 68.20 -8.98 47.81 33.50 10.82 32.91 0.00 203 314 PEAK	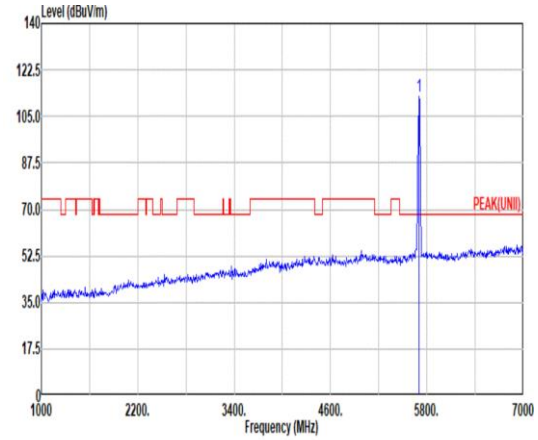 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 112.66 ------ ------ 101.34 33.42 10.81 32.91 0.00 203 314 PEAK
Avg	Blank	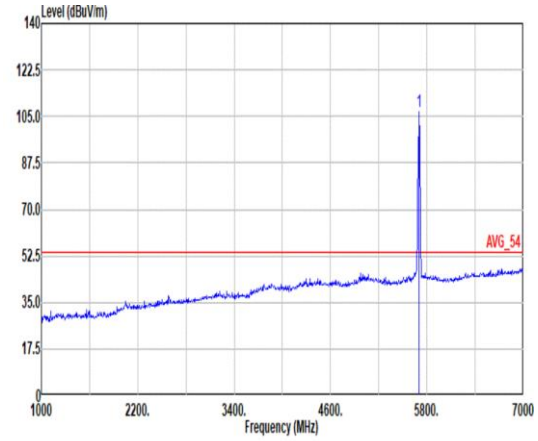 Site : 03CH11-HY Condition: AVG_54 3m 9120D_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 106.94 ------ ------ 95.62 33.42 10.81 32.91 0.00 203 314 AVERAGE