



FCC RADIO TEST REPORT

FCC ID : 2AEM4-9471214
Equipment : Wireless Router
Brand Name : eero
Model Name : PA10001
Applicant : eero LLC
660 3rd St Fl 4, San Francisco, California, 94107, United States
Manufacturer : eero LLC
660 3rd St Fl 4, San Francisco, California, 94107, United States
Standard : FCC Part 15 Subpart C §15.247

The product was received on Sep. 23, 2024 and testing was performed from Oct. 01, 2024 to Nov. 27, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	20
3.7 Antenna Requirements.....	22
4 List of Measuring Equipment	23
5 Measurement Uncertainty	25
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	



History of this test report

Report No.	Version	Description	Issue Date
FR492020A	01	Initial issue of report	Dec. 12, 2024
FR492020A	02	Revise Antenna Gain This report is an updated version, replacing the report issued on Dec. 12, 2024.	Dec. 17, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	0.38 dB under the limit at 2483.58 MHz
3.6	15.207	AC Conducted Emission	Pass	22.53 dB under the limit at 1.86 MHz
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Mila Chen

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature		
General Specs Bluetooth-LE, IEEE 802.15.4, Wi-Fi 2.4GHz 802.11b/g/n/ax/be and Wi-Fi 5GHz 802.11a/n/ac/ax/be.		
Antenna Type WLAN: <Ant. 0>: Dipole Antenna <Ant. 1>: Dipole Antenna Bluetooth-LE: Dipole Antenna IEEE 802.15.4: Dipole Antenna		
Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	3.02

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	CO05-HY (TAF Code: 1190)
Remark	The AC Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	TH05-HY, 03CH23-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH38_2478 MHz_2Mbps
	Mode 7: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH38_2478 MHz_2Mbps
	Mode 7: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: Bluetooth-LE Tx + AC Adapter (Luxshare_45W_Type A)
Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude 3420	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	PC	msi	PRO DP1 80A7	FCC DoC	N/A	Unshielded, 1.8m
3.	PC	msi	Aegis-B918	FCC DoC	N/A	Unshielded, 1.8m
4.	Button	SmartThings	IM6001-BTP01	2AF4S-IM6001-BTP01	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility "RadioControlConsole v4.0.0.0" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - For average measurement:
The procedure for method trace averaging is as follows:
 - a) RBW = 1 MHz.
 - b) VBW $\geq [3 \times \text{RBW}]$.
 - c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
 - d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - e) Sweep time = auto.


- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
- g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - i. If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
 - ii. If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

3.5.4 Test Setup


For radiated test below 30MHz

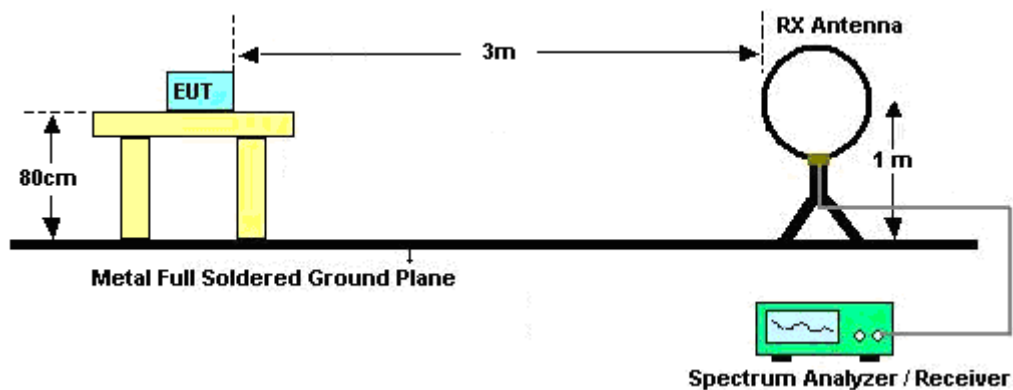


For radiated test from 30MHz to 1GHz

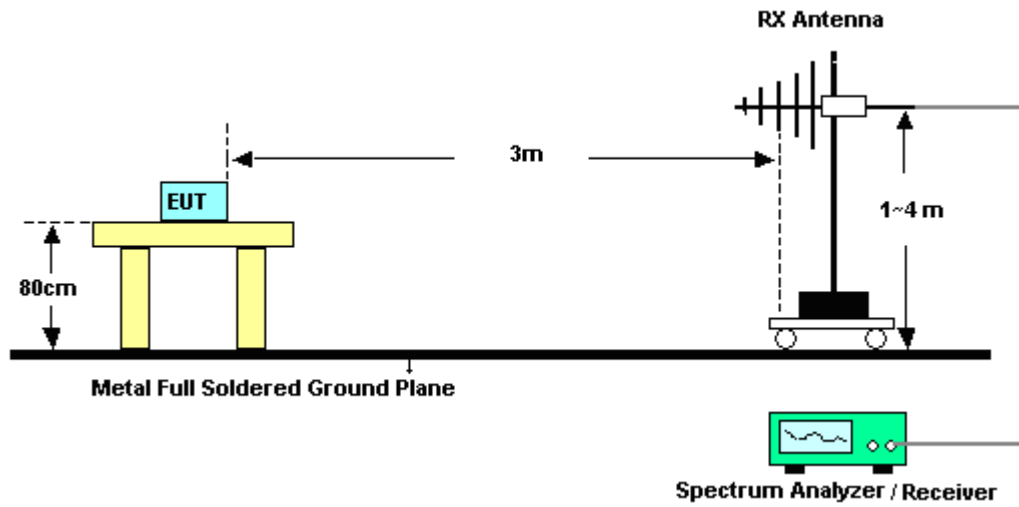

For radiated test from 1GHz to 18GHz

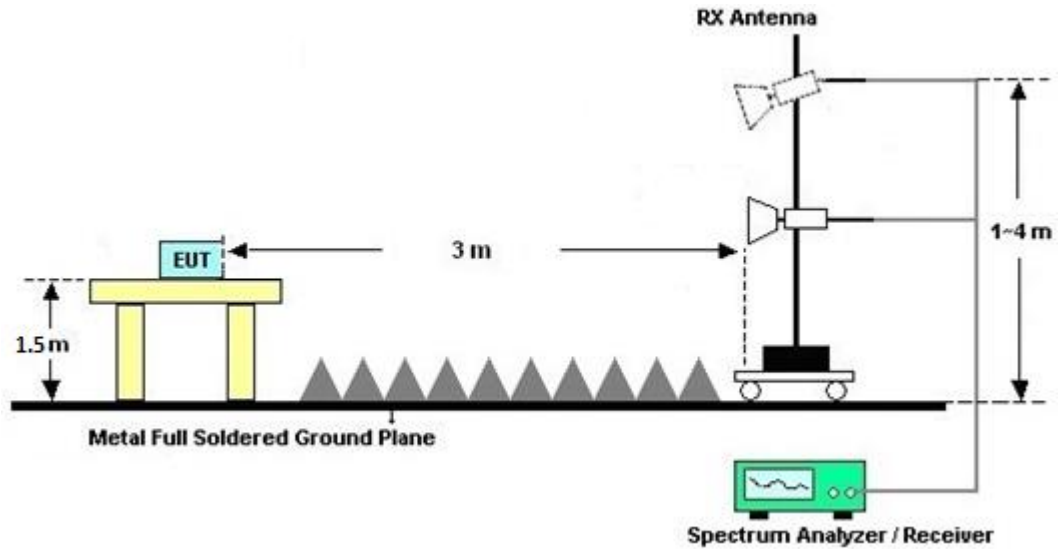

For radiated test above 18GHz

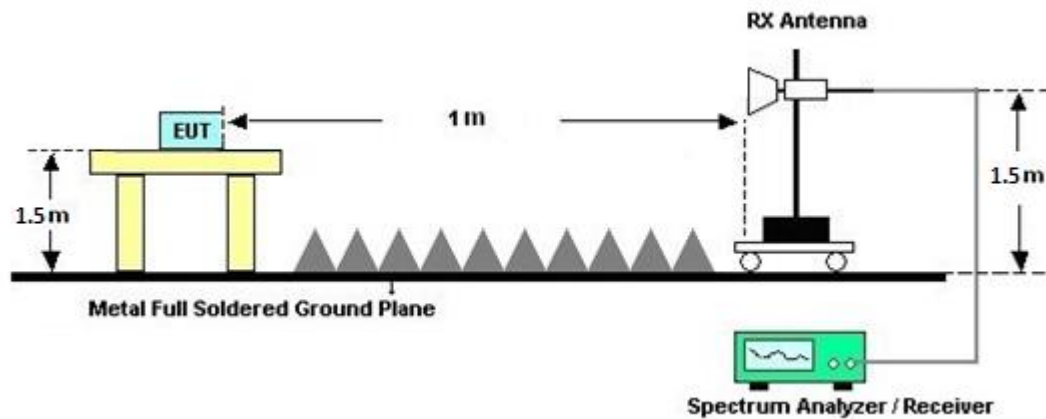

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

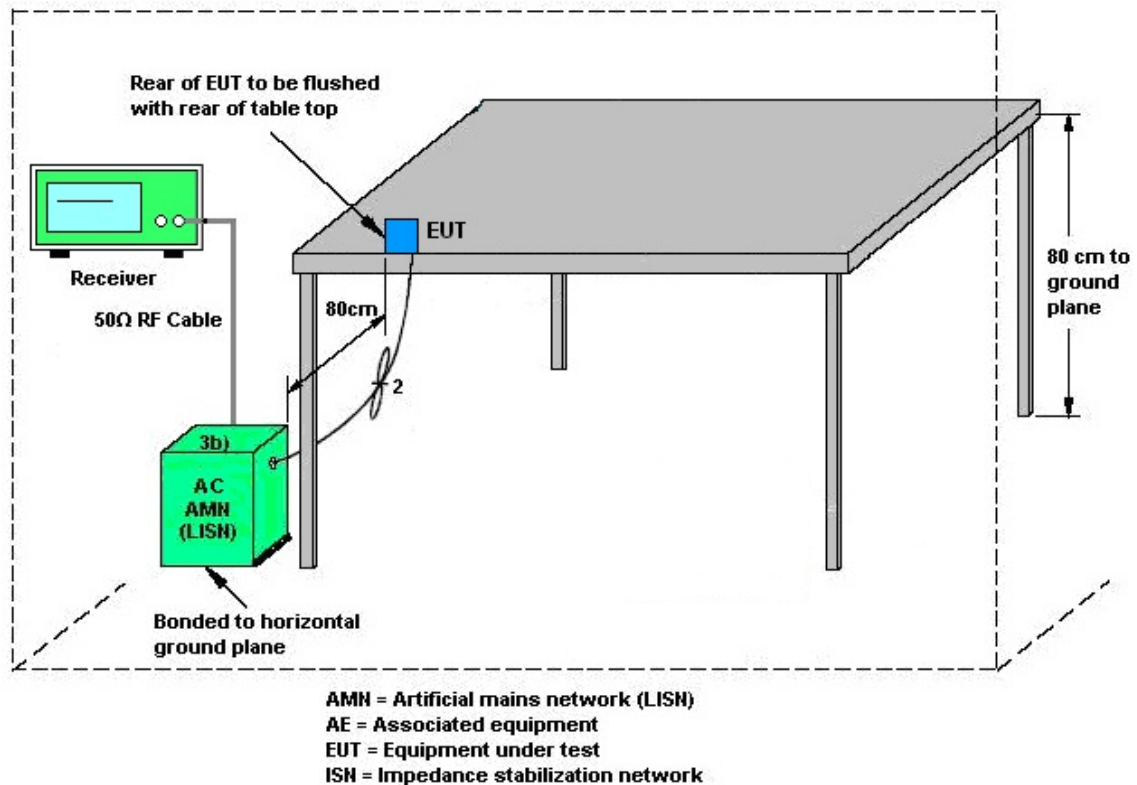

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Unique (non-standard) antenna connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Nov. 14, 2024~ Nov. 27, 2024	Aug. 28, 2025	Radiation (03CH23-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N-06	47020 & 06	30MHz~1GHz	Oct. 05, 2024	Nov. 14, 2024~ Nov. 27, 2024	Oct. 04, 2025	Radiation (03CH23-HY)
Amplifier	SONOMA	310N	421580	9kHz~1GHz	Jul. 14, 2024	Nov. 14, 2024~ Nov. 27, 2024	Jul. 13, 2025	Radiation (03CH23-HY)
Amplifier	EMEC	EM01G18GA	060878	N/A	Sep. 27, 2024	Nov. 14, 2024~ Nov. 27, 2024	Sep. 26, 2025	Radiation (03CH23-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C05A18EN	1GHz~18GHz	Jun. 20, 2024	Nov. 14, 2024~ Nov. 27, 2024	Jun. 19, 2025	Radiation (03CH23-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	1224	18GHz~40GHz	Jun. 24, 2024	Nov. 14, 2024~ Nov. 27, 2024	Jun. 23, 2025	Radiation (03CH23-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Sep. 02, 2024	Nov. 14, 2024~ Nov. 27, 2024	Sep. 01, 2025	Radiation (03CH23-HY)
Signal Analyzer	Keysight	N9010B	MY62170337	N/A	Aug. 21, 2024	Nov. 14, 2024~ Nov. 27, 2024	Aug. 20, 2025	Radiation (03CH23-HY)
Hygrometer	TECPEL	DTM-303A	TP210001	N/A	Oct. 24, 2024	Nov. 14, 2024~ Nov. 27, 2024	Oct. 23, 2025	Radiation (03CH23-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Nov. 14, 2024~ Nov. 27, 2024	N/A	Radiation (03CH23-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Nov. 14, 2024~ Nov. 27, 2024	N/A	Radiation (03CH23-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Nov. 14, 2024~ Nov. 27, 2024	N/A	Radiation (03CH23-HY)
Software	Audix	E3 6.09824_2019122	RK-002348	N/A	N/A	Nov. 14, 2024~ Nov. 27, 2024	N/A	Radiation (03CH23-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 06, 2024	Nov. 14, 2024~ Nov. 27, 2024	Mar. 05, 2025	Radiation (03CH23-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804395/2	N/A	Nov. 27, 2023	Nov. 14, 2024~ Nov. 25, 2024	Nov. 26, 2024	Radiation (03CH23-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804395/2	N/A	Nov. 26, 2024	Nov. 26, 2024~ Nov. 27, 2024	Nov. 25, 2025	Radiation (03CH23-HY)
RF Cable	EMC	EMC101Y	231115/231119 /231122	N/A	Nov. 27, 2023	Nov. 14, 2024~ Nov. 25, 2024	Nov. 26, 2024	Radiation (03CH23-HY)
RF Cable	EMC	EMC101Y	231115/231119 /231122	N/A	Nov. 26, 2024	Nov. 26, 2024~ Nov. 27, 2024	Nov. 25, 2025	Radiation (03CH23-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Oct. 01, 2024~ Oct. 31, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Nov. 01, 2024~ Nov. 25, 2024	Oct. 31, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	15I00041SNO 10 (NO:248)	10MHz~6GHz	Jan. 10, 2024	Oct. 01, 2024~ Nov. 25, 2024	Jan. 09, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Oct. 01, 2024~ Nov. 25, 2024	Aug. 22, 2025	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300485 (BOX4)	N/A	Apr. 08, 2024	Oct. 01, 2024~ Nov. 25, 2024	Apr. 07, 2025	Conducted (TH05-HY)
Software	Sporton	BTWiFi_Final_ver sion_241028	N/A	Conducted Other Test Item	N/A	Oct. 01, 2024~ Nov. 25, 2024	N/A	Conducted (TH05-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Nov. 25, 2024	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 06, 2023	Nov. 25, 2024	Dec. 05, 2024	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Oct. 14, 2024	Nov. 25, 2024	Oct. 13, 2025	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 14, 2024	Nov. 25, 2024	Nov. 13, 2025	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Nov. 25, 2024	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 30, 2024	Nov. 25, 2024	Jul. 29, 2025	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	MQT24082501	N/A	Oct. 15, 2024	Nov. 25, 2024	Oct. 14, 2025	Conduction (CO05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Sylvia Li	Temperature:	21~25	°C
Test Date:	2024/10/01~2024/11/25	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.049	0.693	0.50	Pass
BLE	1Mbps	1	19	2440	1.051	0.693	0.50	Pass
BLE	1Mbps	1	39	2480	1.050	0.690	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	19.20	30.00	3.02	22.22	36.00	Pass
BLE	1Mbps	1	19	2440	19.00	30.00	3.02	22.02	36.00	Pass
BLE	1Mbps	1	39	2480	18.30	30.00	3.02	21.32	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	19.18	7.24	3.02	8.00	Pass
BLE	1Mbps	1	19	2440	19.01	7.32	3.02	8.00	Pass
BLE	1Mbps	1	39	2480	18.60	6.49	3.02	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	CH 00	2402 MHz	2.096	1.393	0.50	Pass
BLE	2Mbps	1	CH 19	2440 MHz	2.103	1.359	0.50	Pass
BLE	2Mbps	1	CH 38	2478 MHz	2.101	1.340	0.50	Pass
BLE	2Mbps	1	CH 39	2480 MHz	2.097	1.441	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	CH 00	2402 MHz	19.10	30.00	3.02	22.12	36.00	Pass
BLE	2Mbps	1	CH 19	2440 MHz	19.00	30.00	3.02	22.02	36.00	Pass
BLE	2Mbps	1	CH 38	2478 MHz	18.80	30.00	3.02	21.82	36.00	Pass
BLE	2Mbps	1	CH 39	2480 MHz	15.30	30.00	3.02	18.32	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	CH 00	2402 MHz	18.59	4.87	3.02	8.00	Pass
BLE	2Mbps	1	CH 19	2440 MHz	17.92	4.30	3.02	8.00	Pass
BLE	2Mbps	1	CH 38	2478 MHz	18.02	4.47	3.02	8.00	Pass
BLE	2Mbps	1	CH 39	2480 MHz	14.17	0.33	3.02	8.00	Pass


Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




6dB Bandwidth

<1Mbps>


6 dB Bandwidth Plot on Channel 00

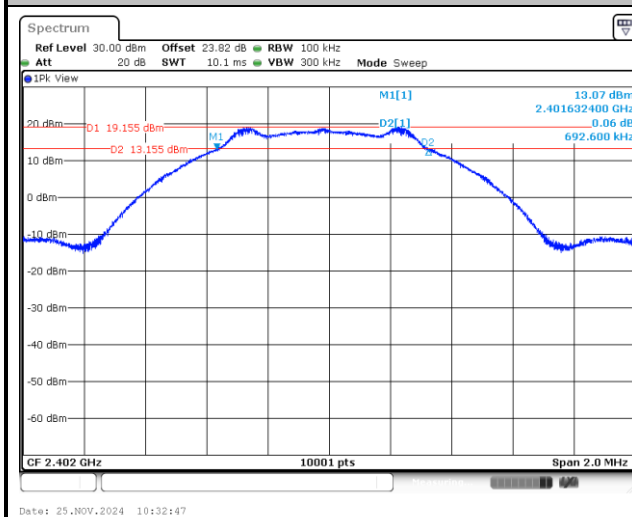

6 dB Bandwidth Plot on Channel 19

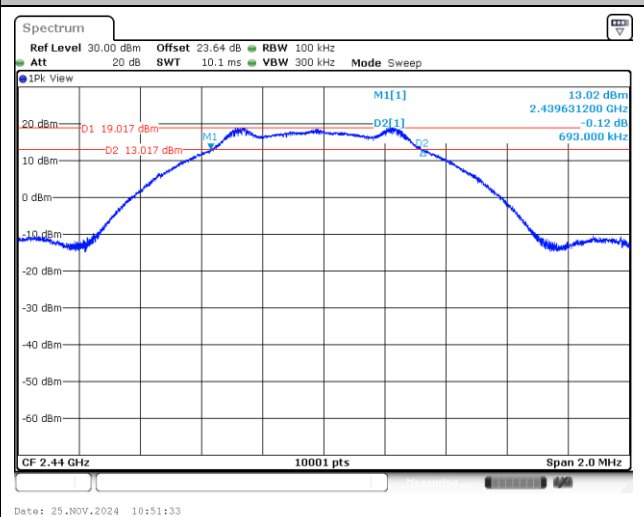


6 dB Bandwidth Plot on Channel 39

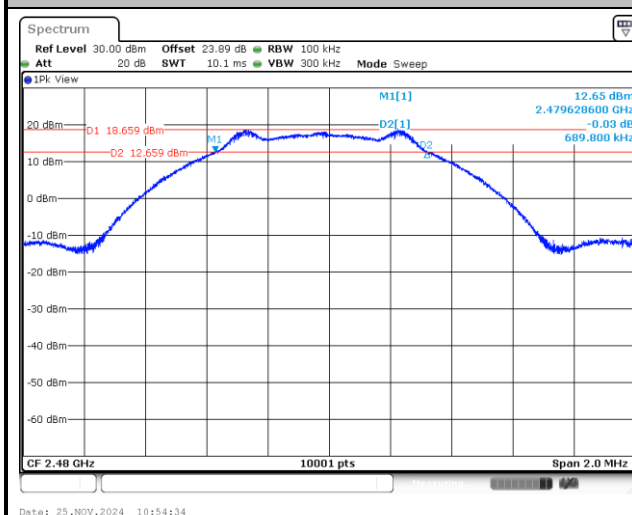




<2Mbps>


6 dB Bandwidth Plot on Channel 00

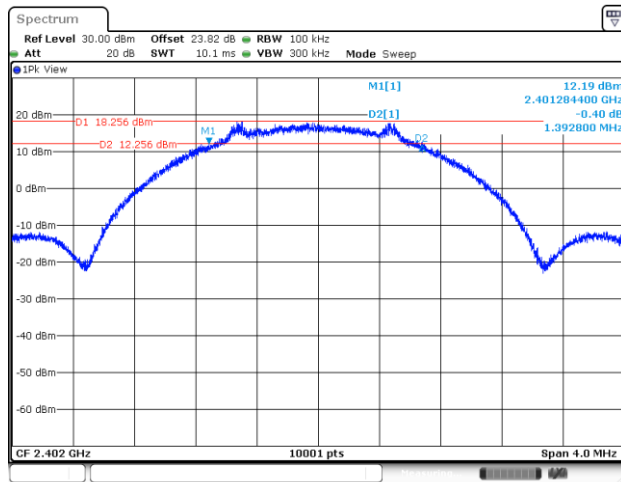


6 dB Bandwidth Plot on Channel 19

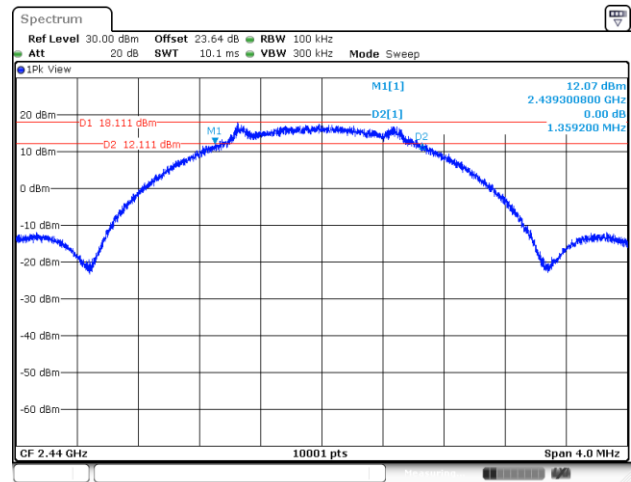

6 dB Bandwidth Plot on Channel 38

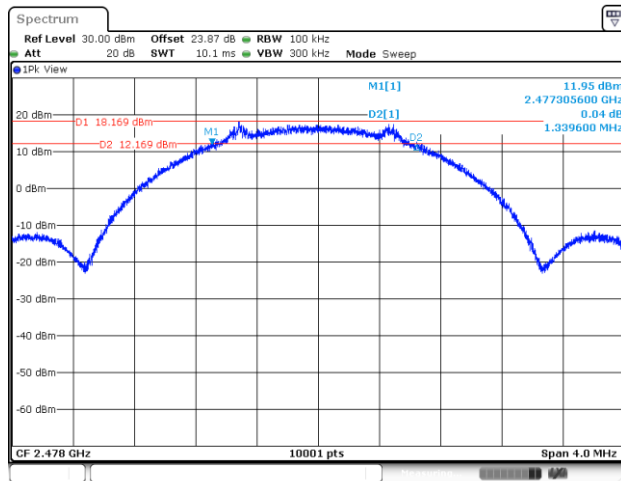

6 dB Bandwidth Plot on Channel 39

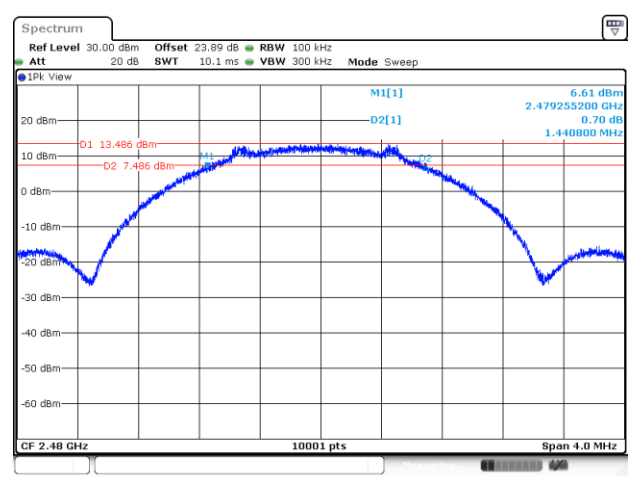





99% Occupied Bandwidth

<1Mbps>


99% Occupied Bandwidth Plot on Channel 00

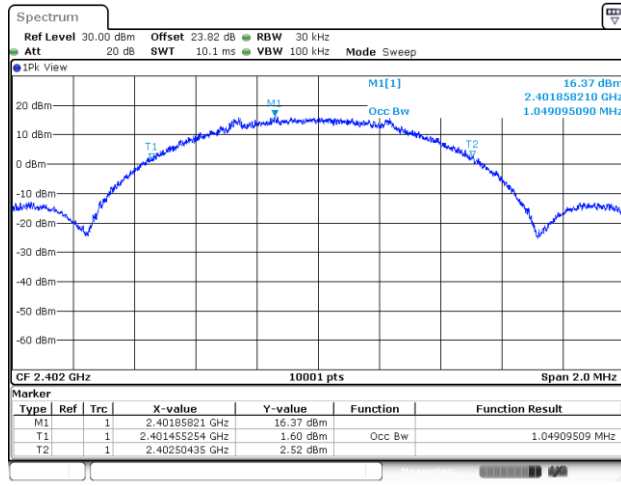

99% Occupied Bandwidth Plot on Channel 19

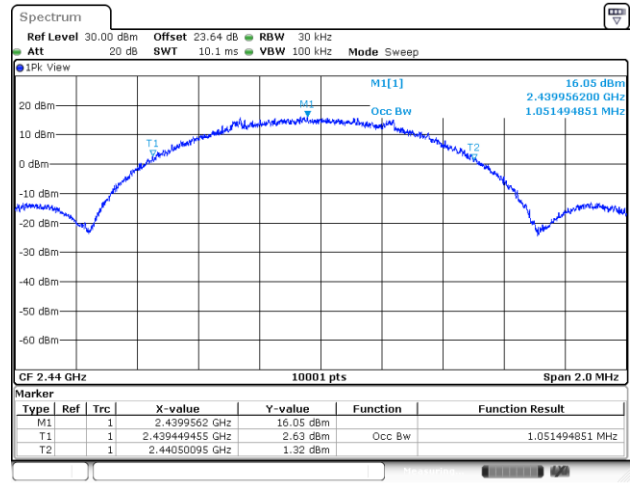


99% Occupied Bandwidth Plot on Channel 39

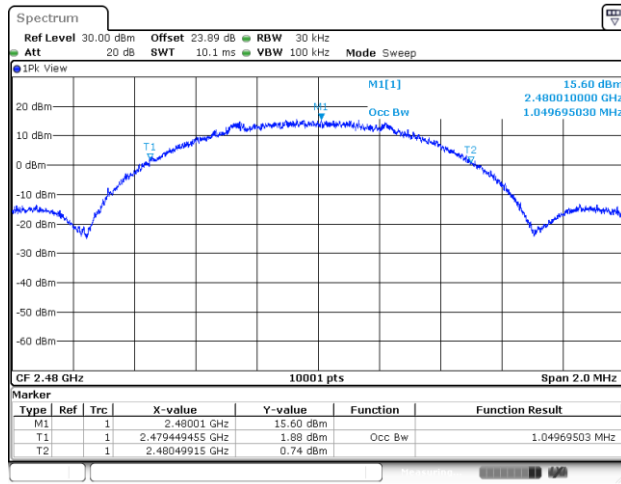




<2Mbps>


99% Occupied Bandwidth Plot on Channel 00

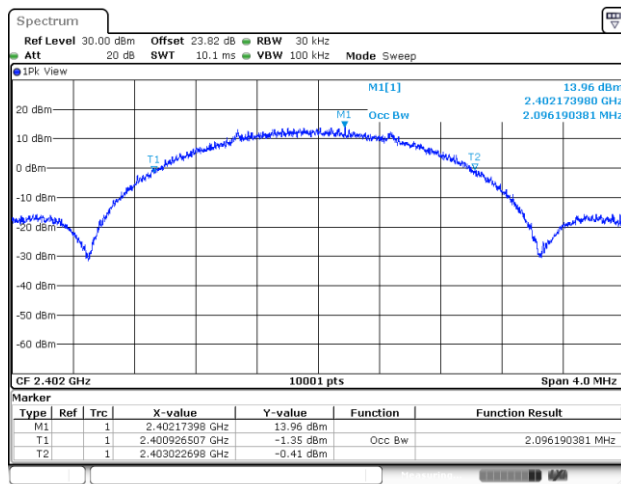


99% Occupied Bandwidth Plot on Channel 19

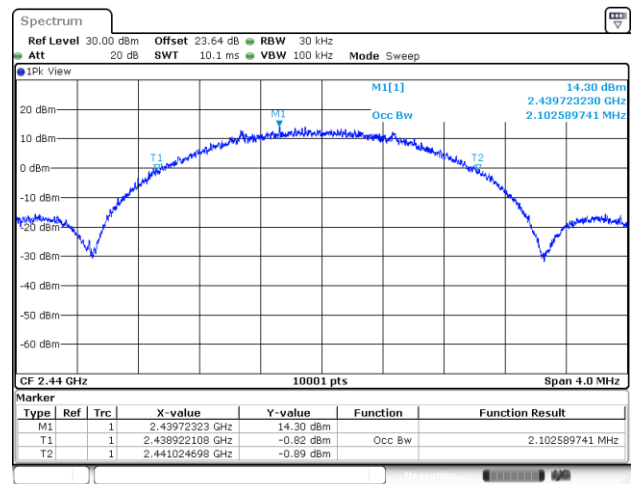

99% Occupied Bandwidth Plot on Channel 38

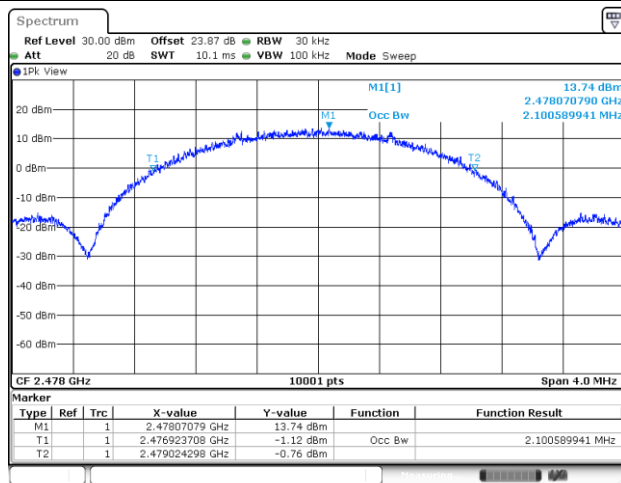

99% Occupied Bandwidth Plot on Channel 39

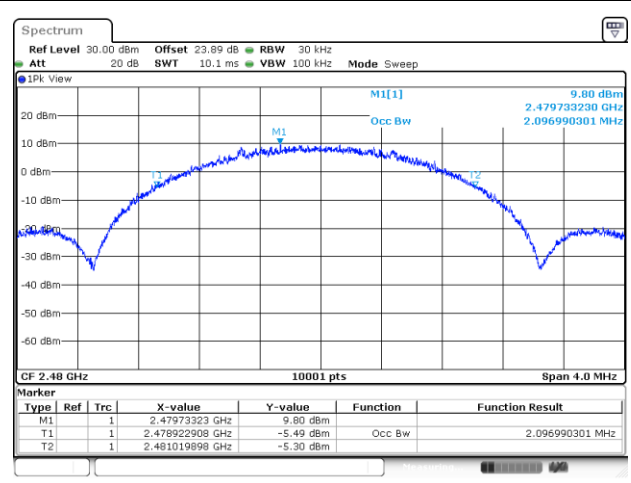





Power Spectral Density (dBm/3kHz)

<1Mbps>


Power Density (dBm/3kHz) Plot Channel 00

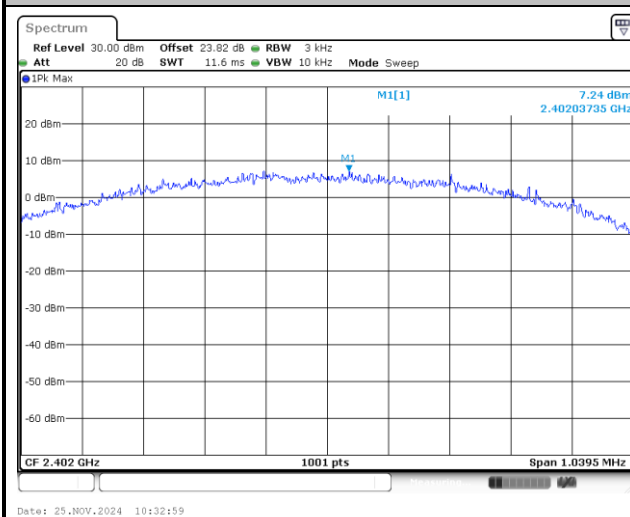

Power Density (dBm/3kHz) Plot Channel 19

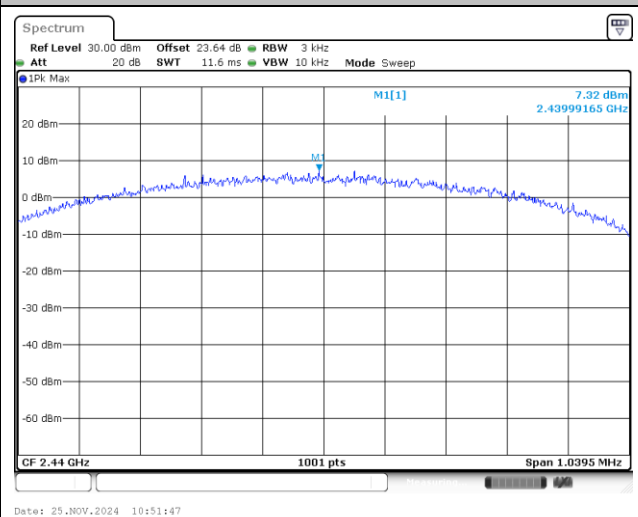


Power Density (dBm/3kHz) Plot Channel 39

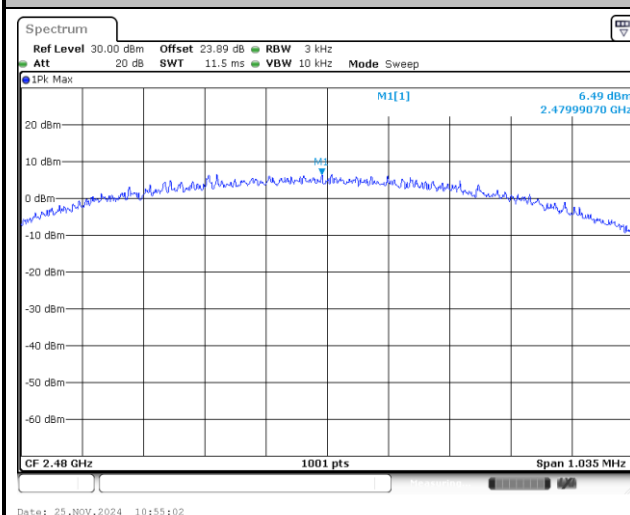




<2Mbps>


Power Density (dBm/3kHz) Plot Channel 00

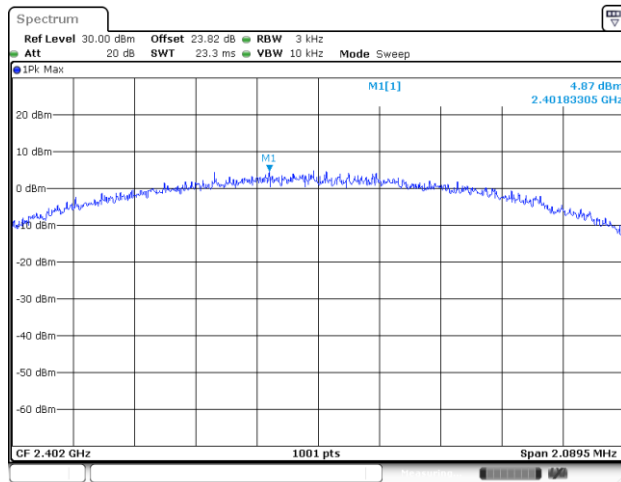


Power Density (dBm/3kHz) Plot Channel 19

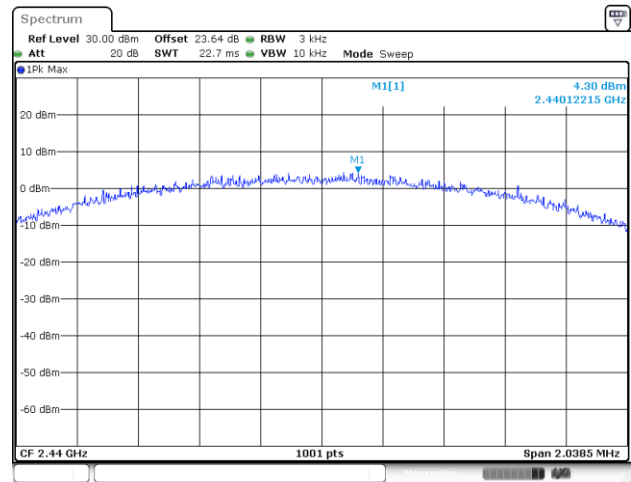

Power Density (dBm/3kHz) Plot Channel 38




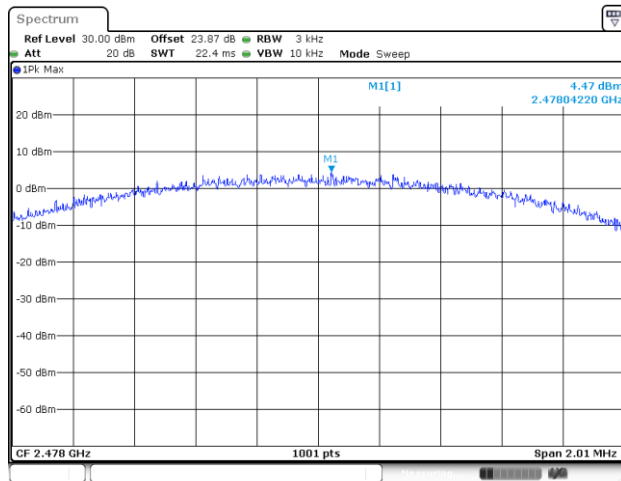


Power Density (dBm/3kHz) Plot Channel 39

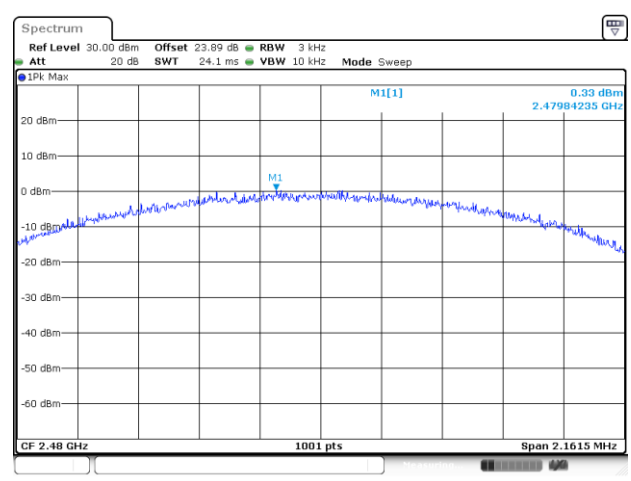

**Band Edge and Conducted Spurious Emission**


<1Mbps>

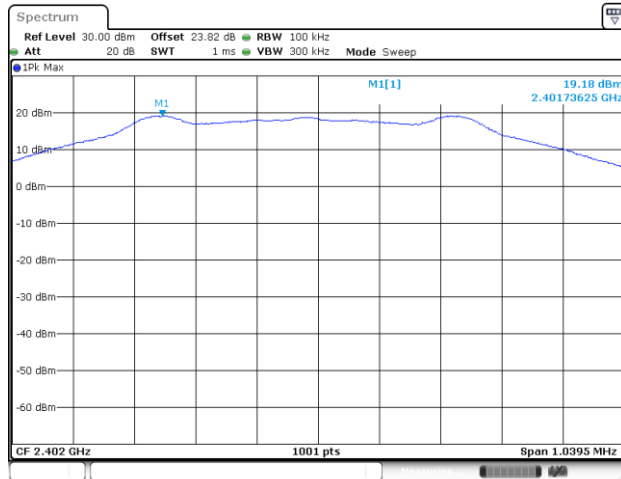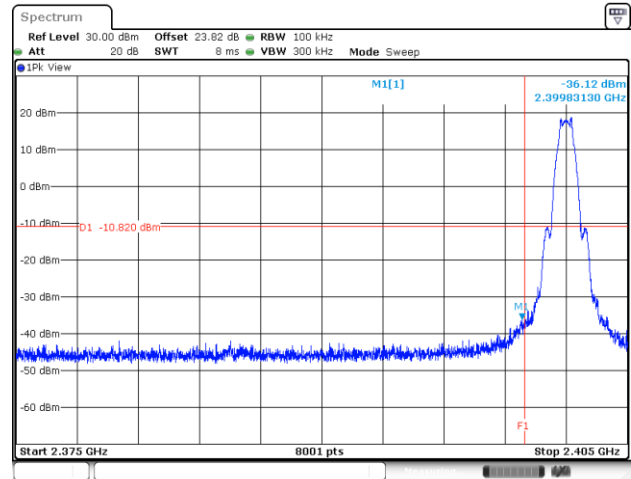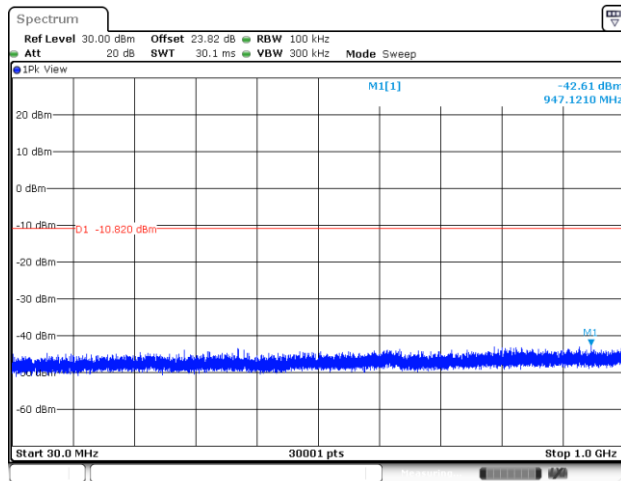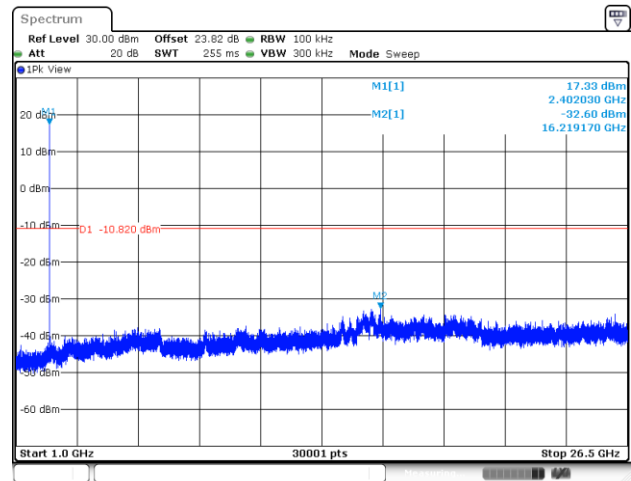Channel 00**100kHz PSD reference Level Plot****Low Channel Plot****Spurious Emission 30MHz~1GHz Plot****Spurious Emission 1GHz~26.5GHz Plot**




Channel 19

100kHz PSD reference Level Plot

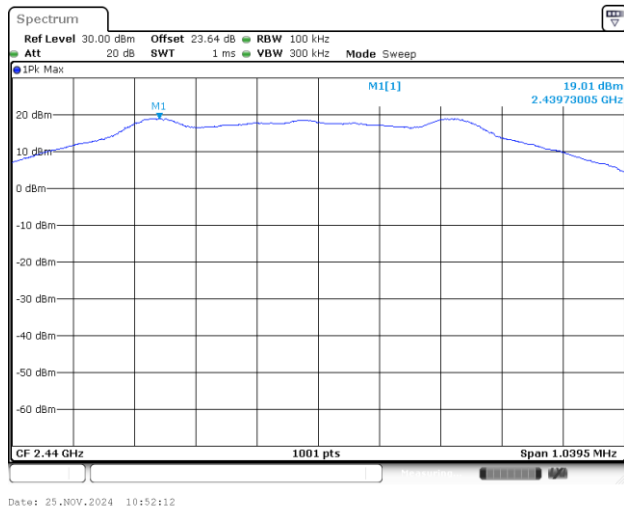


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

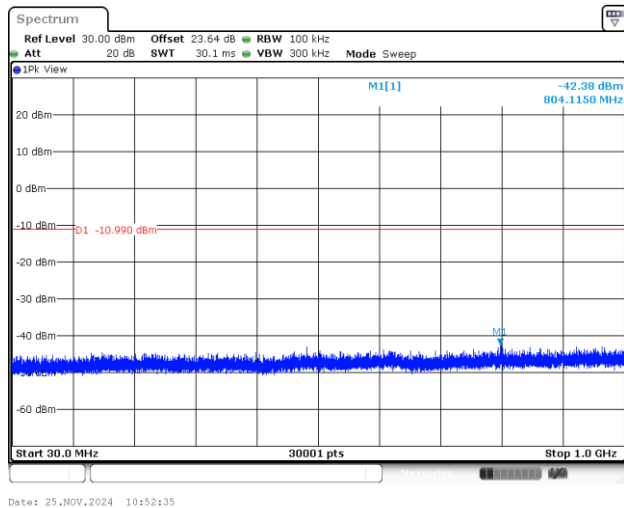


Spurious Emission 1GHz~26.5GHz Plot

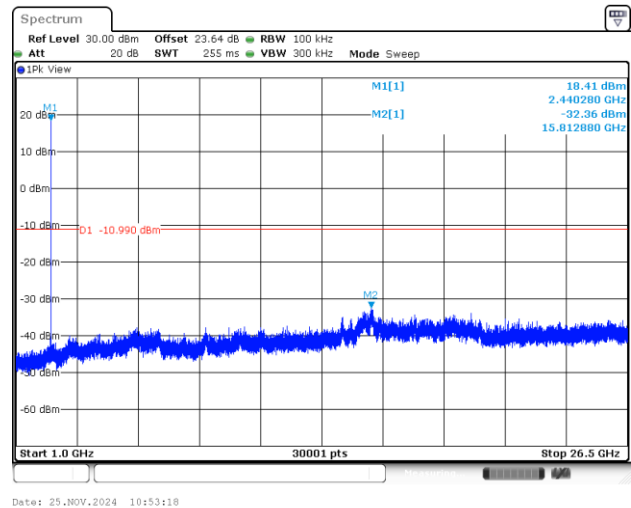




Channel 39

100kHz PSD reference Level Plot

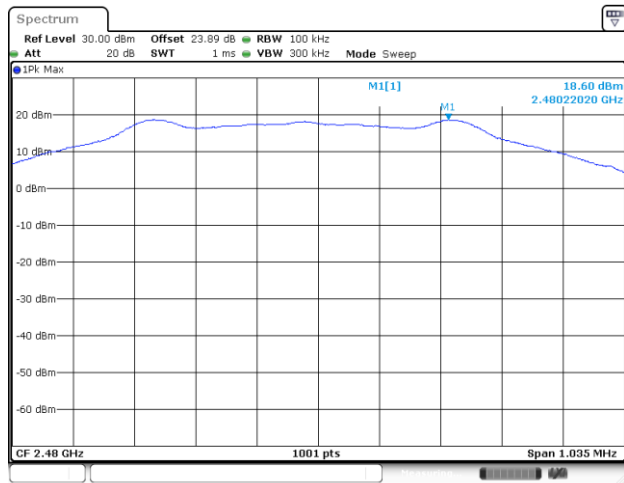


Date: 25.NOV.2024 10:55:27

High Channel Plot

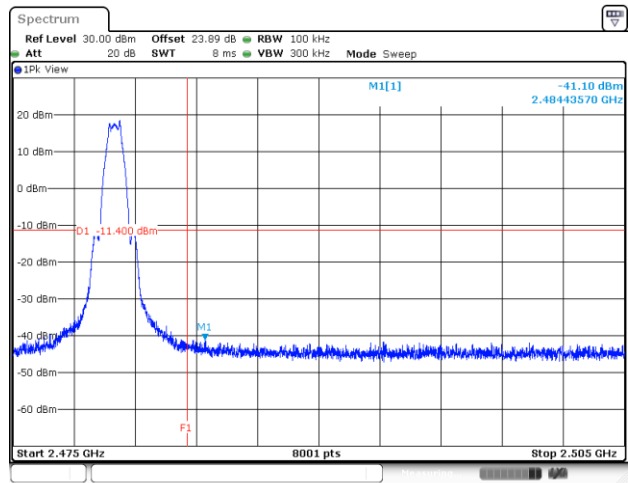


Date: 25.NOV.2024 10:56:25

Spurious Emission 30MHz~1GHz Plot

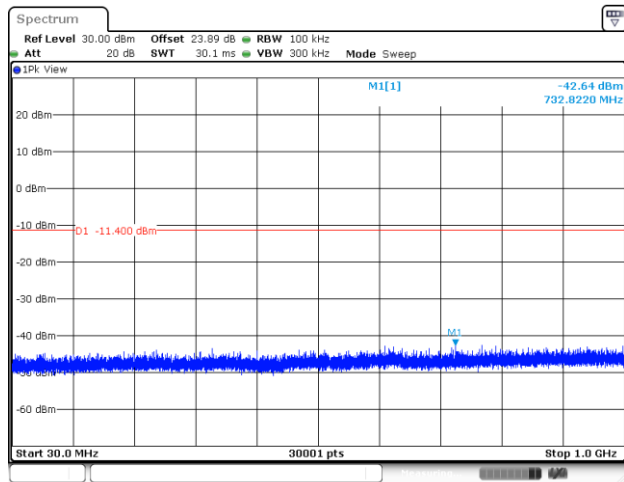

Date: 25.NOV.2024 10:55:51

Spurious Emission 1GHz~26.5GHz Plot

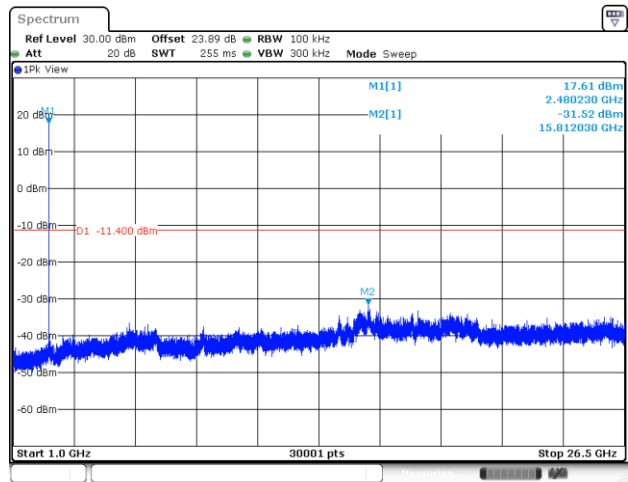


Date: 25.NOV.2024 10:56:11


<2Mbps>

Channel 00


100kHz PSD reference Level Plot

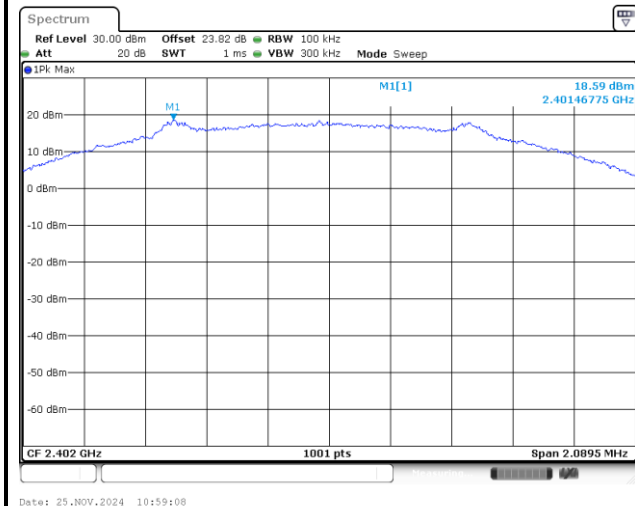


Low Channel Plot

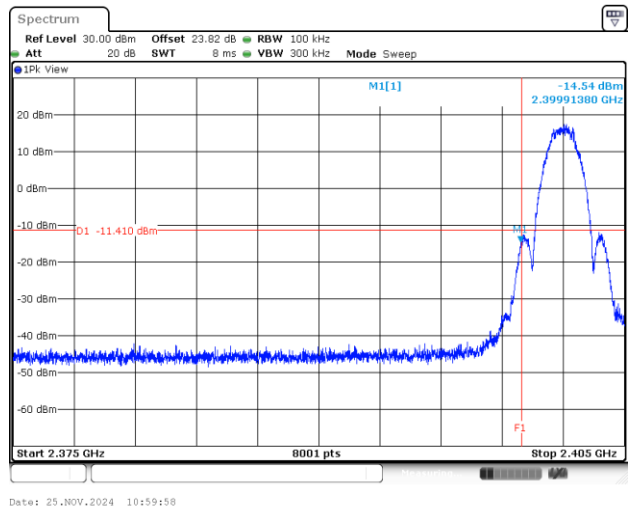

Spurious Emission 30MHz~1GHz Plot

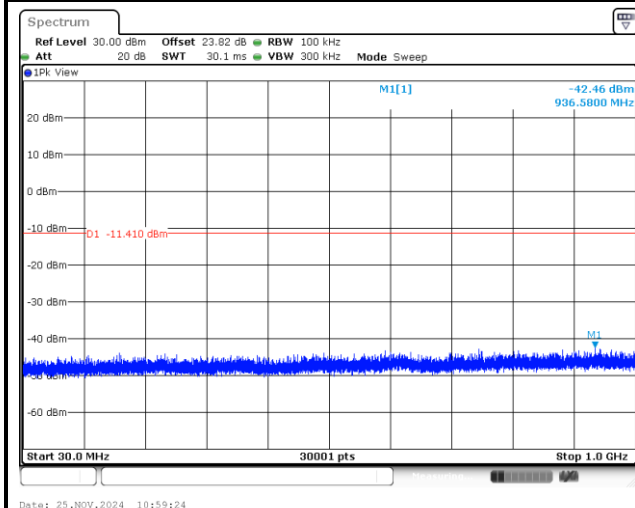


Spurious Emission 1GHz~26.5GHz Plot

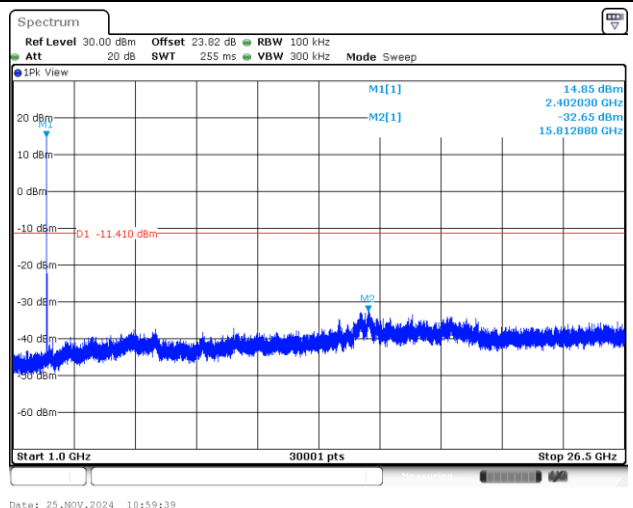




Channel 19

100kHz PSD reference Level Plot

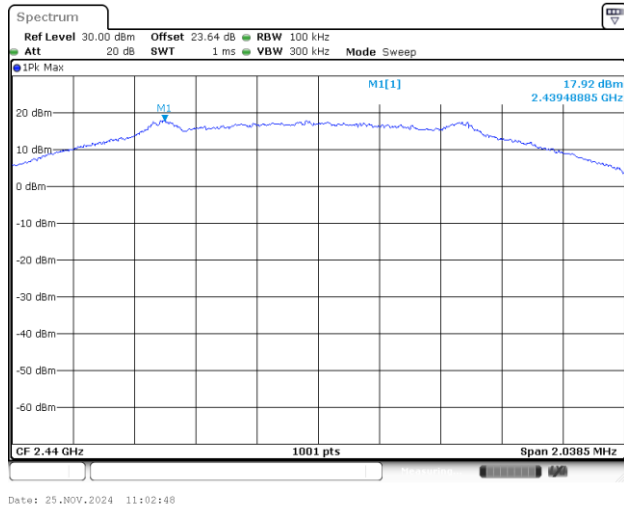


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

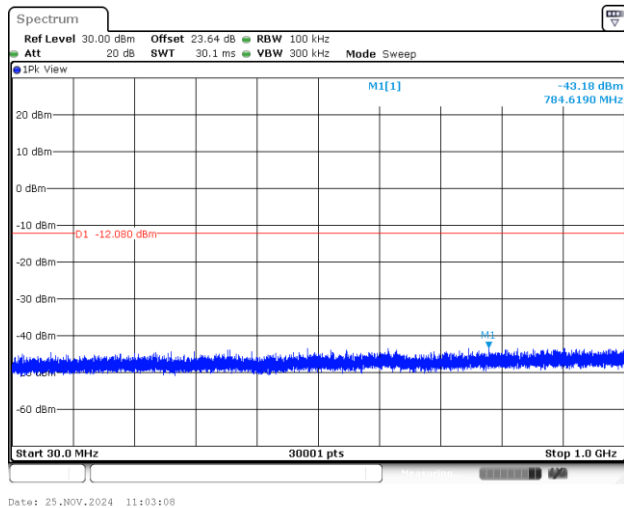


Spurious Emission 1GHz~26.5GHz Plot

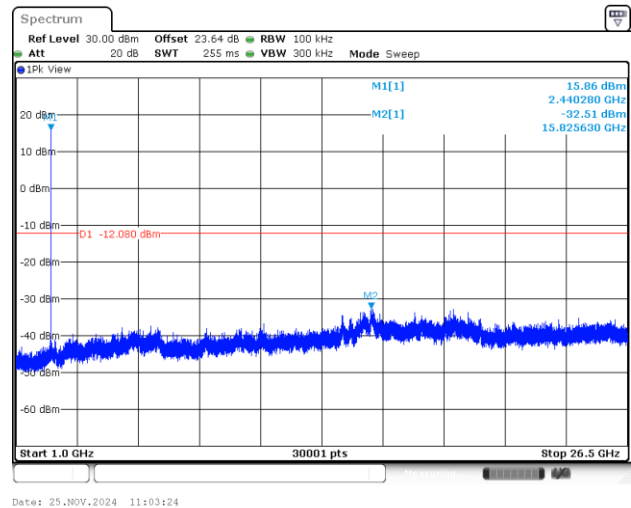




Channel 38

100kHz PSD reference Level Plot

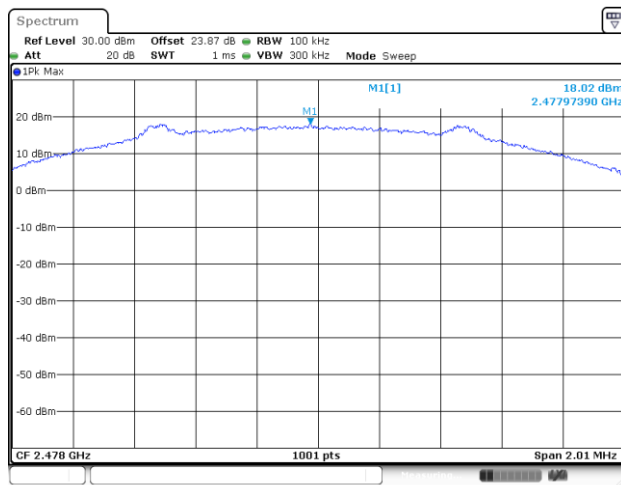


Date: 25.NOV.2024 11:23:33

Low Channel Plot

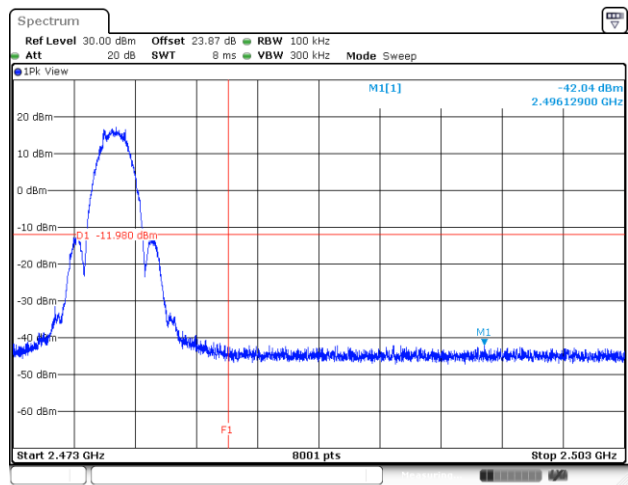


Date: 25.NOV.2024 11:24:56

Spurious Emission 30MHz~1GHz Plot

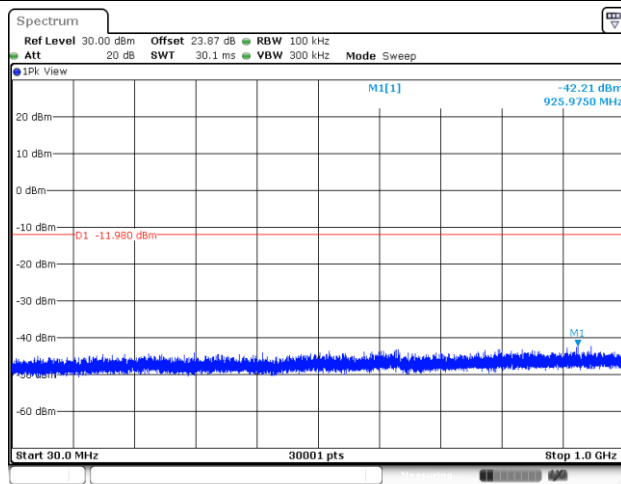

Date: 25.NOV.2024 11:23:53

Spurious Emission 1GHz~26.5GHz Plot

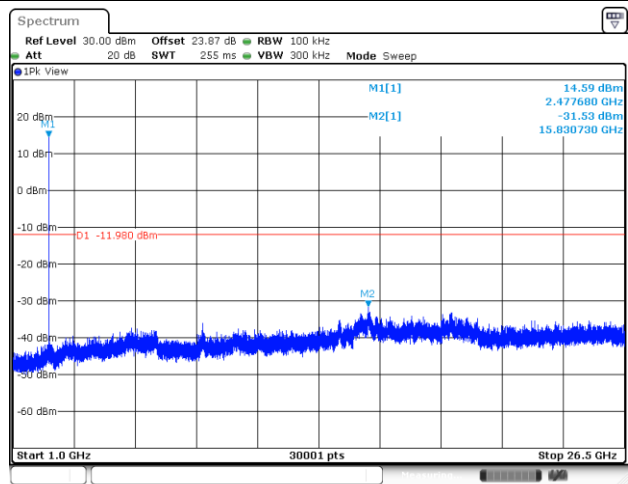


Date: 25.NOV.2024 11:24:15




Channel 39

100kHz PSD reference Level Plot

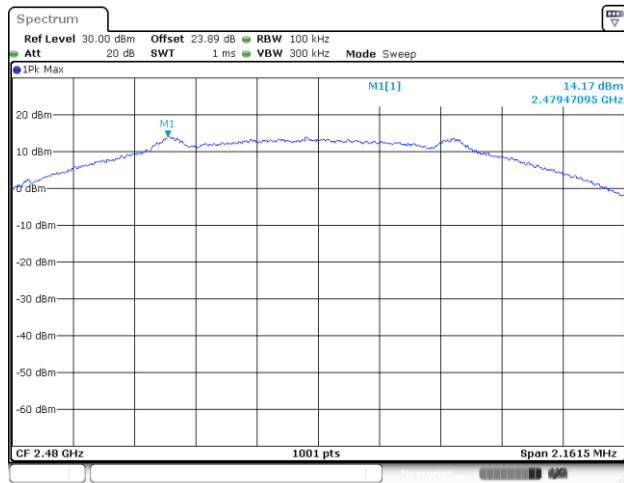


Date: 25.NOV.2024 11:28:04

High Channel Plot

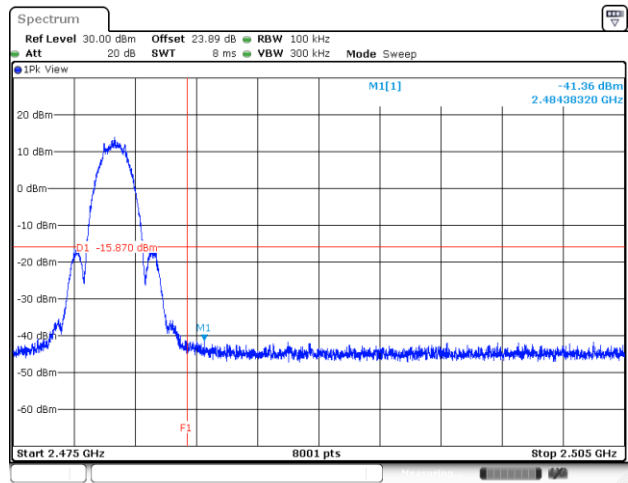


Date: 25.NOV.2024 11:29:37

Spurious Emission 30MHz~1GHz Plot

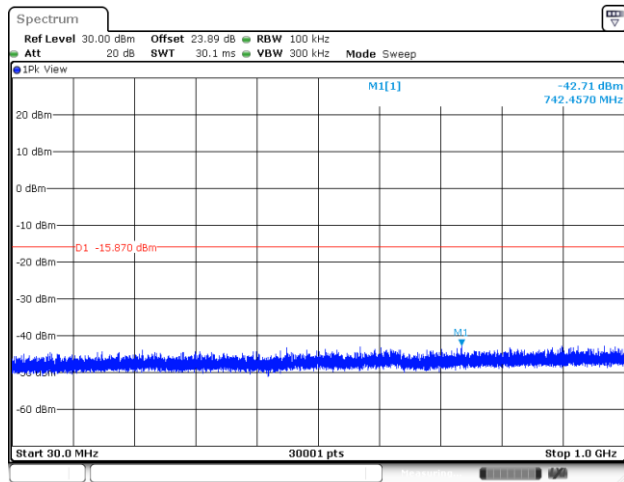

Date: 25.NOV.2024 11:28:28

Spurious Emission 1GHz~26.5GHz Plot

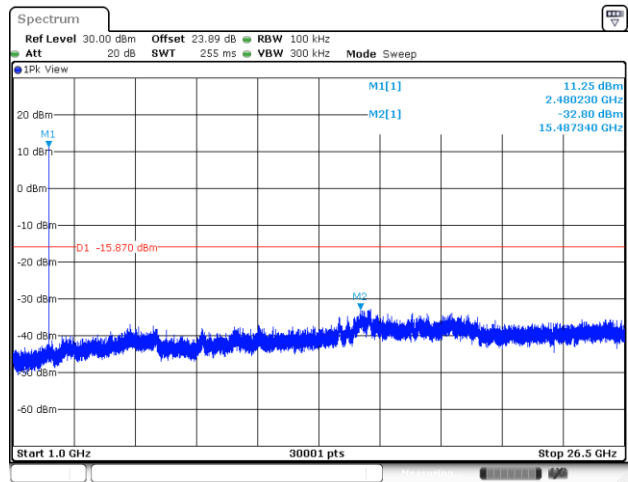

Date: 25.NOV.2024 11:29:05



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%


EUT Information

Report NO :492020

Test Voltage :120Vac/60Hz

Phase :Line

Full Spectrum

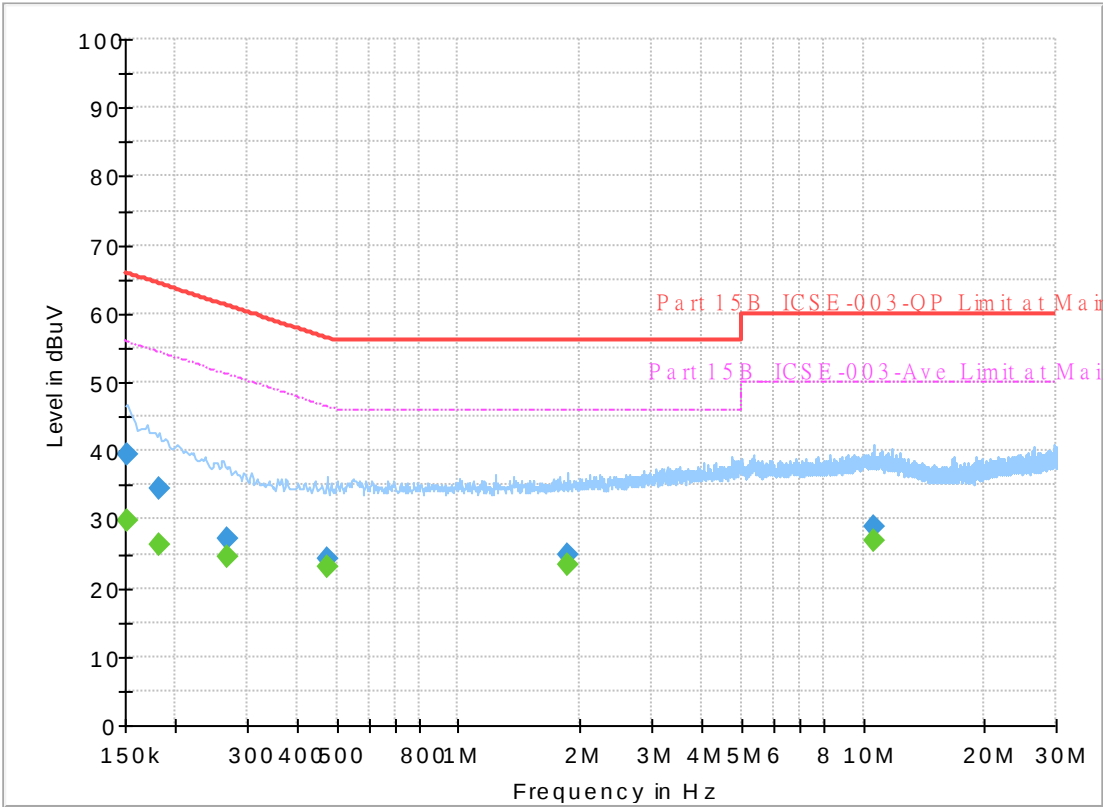

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	29.84	55.88	26.04	L1	OFF	19.8
0.152250	39.49	---	65.88	26.39	L1	OFF	19.8
0.181500	---	26.42	54.42	28.00	L1	OFF	19.8
0.181500	34.38	---	64.42	30.04	L1	OFF	19.8
0.269250	---	24.44	51.14	26.70	L1	OFF	19.8
0.269250	27.30	---	61.14	33.84	L1	OFF	19.8
0.474000	---	23.13	46.44	23.31	L1	OFF	19.8
0.474000	24.39	---	56.44	32.05	L1	OFF	19.8
1.857750	---	23.47	46.00	22.53	L1	OFF	19.9
1.857750	24.73	---	56.00	31.27	L1	OFF	19.9
10.641750	---	26.87	50.00	23.13	L1	OFF	20.3
10.641750	28.88	---	60.00	31.12	L1	OFF	20.3


EUT Information

Report NO : 492020

Test Voltage : 120Vac/60Hz

Phase : Neutral

Full Spectrum

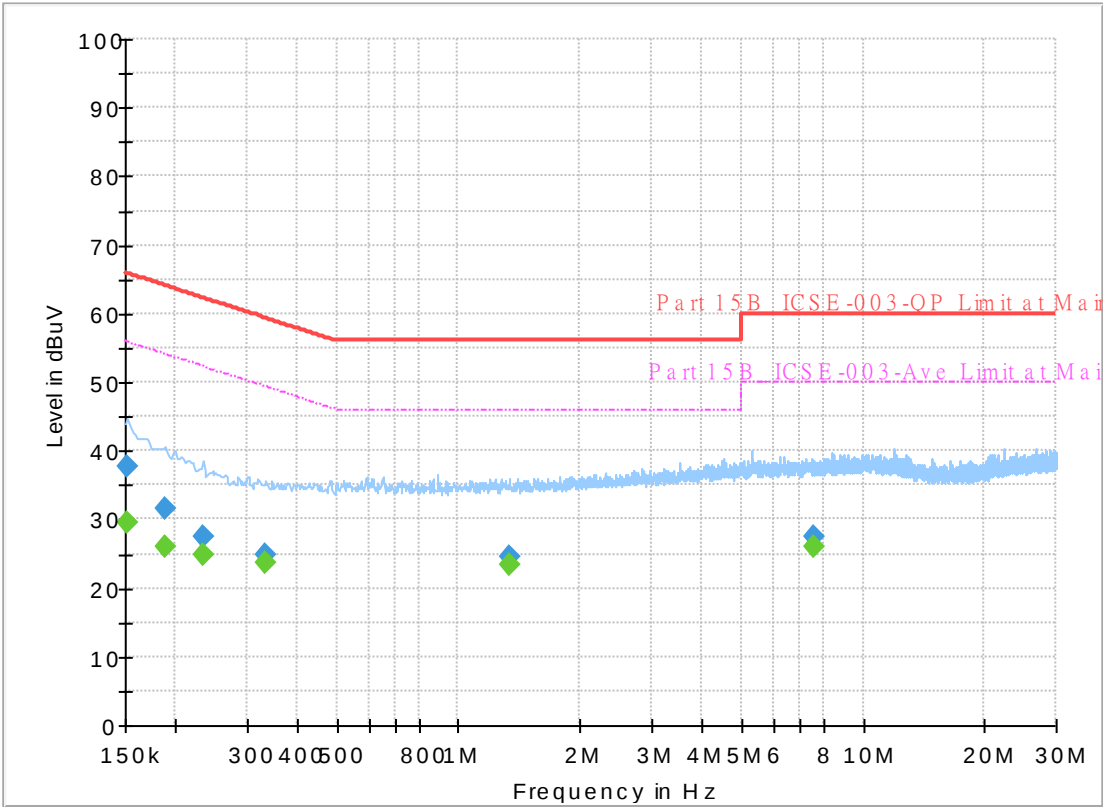

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	29.65	55.88	26.23	N	OFF	19.8
0.152250	37.70	---	65.88	28.18	N	OFF	19.8
0.188250	---	26.13	54.11	27.98	N	OFF	19.8
0.188250	31.64	---	64.11	32.47	N	OFF	19.8
0.233250	---	24.99	52.33	27.34	N	OFF	19.8
0.233250	27.58	---	62.33	34.75	N	OFF	19.8
0.334500	---	23.74	49.34	25.60	N	OFF	19.8
0.334500	24.76	---	59.34	34.58	N	OFF	19.8
1.338000	---	23.30	46.00	22.70	N	OFF	19.9
1.338000	24.47	---	56.00	31.53	N	OFF	19.9
7.584000	---	25.92	50.00	24.08	N	OFF	20.2
7.584000	27.62	---	60.00	32.38	N	OFF	20.2



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Leo Li, Karl Hou and Lucifer Jiang	Temperature :	21.7~22.5°C
		Relative Humidity :	51~57%

Note symbol

-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes

<1Mbps>

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	2	Bluetooth-LE	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	2	Bluetooth-LE	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	2	Bluetooth-LE	39	2480	1Mbps	-	-
Mode 8	2400-2483.5	2	Bluetooth-LE	39	2480	1Mbps	-	SHF
Mode 9	2400-2483.5	2	Bluetooth-LE	39	2480	1Mbps	-	LF

<2Mbps>

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 4	2400-2483.5	2	Bluetooth-LE	00	2402	2Mbps	-	-
Mode 5	2400-2483.5	2	Bluetooth-LE	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	2	Bluetooth-LE	38	2478	2Mbps	-	-
Mode 7	2400-2483.5	2	Bluetooth-LE	39	2480	2Mbps	-	-

C2. Summary of each worse mode

<1Mbps>





Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth-LE	00	2369.98	50.02	54.00	-3.98	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	00	4804.00	45.77	74.00	-28.23	V	Peak	Pass	-	Harmonic
2	Bluetooth-LE	19	2375.91	44.25	54.00	-9.75	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	19	7320.00	40.01	54.00	-13.99	V	Avg.	Pass	-	Harmonic
3	Bluetooth-LE	39	2483.58	53.62	54.00	-0.38	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	39	7440.00	39.91	54.00	-14.09	V	Avg.	Pass	-	Harmonic
8	SHF	39	18127.97	41.06	74.00	-32.94	H	Peak	Pass	-	SHF
9	LF	39	959.26	34.70	46.00	-11.30	V	Peak	Pass	-	LF

<2Mbps>





Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
4	Bluetooth-LE	00	2369.34	47.74	54.00	-6.26	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	00	4804.00	45.74	74.00	-28.26	V	Peak	Pass	-	Harmonic
5	Bluetooth-LE	19	2375.78	43.69	54.00	-10.31	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	19	7320.00	40.04	54.00	-13.96	V	Avg.	Pass	-	Harmonic
6	Bluetooth-LE	38	2483.52	45.20	54.00	-8.80	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	38	7434.00	38.73	54.00	-15.27	H	Avg.	Pass	-	Harmonic
7	Bluetooth-LE	39	2483.52	53.48	54.00	-0.52	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	39	7440.00	39.75	54.00	-14.25	V	Avg.	Pass	-	Harmonic





<1Mbps>

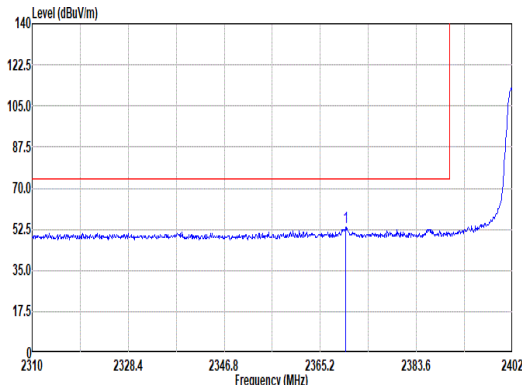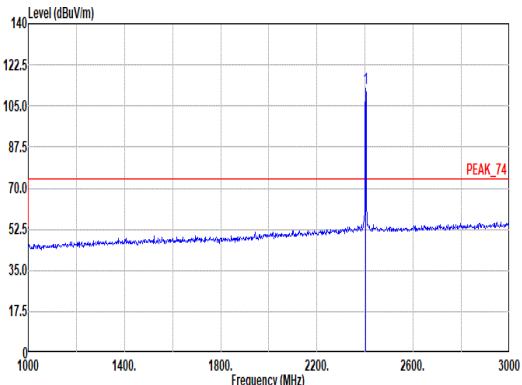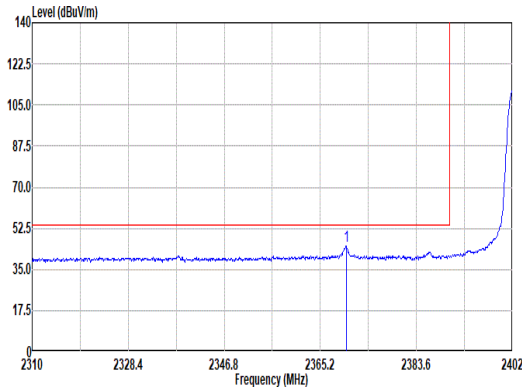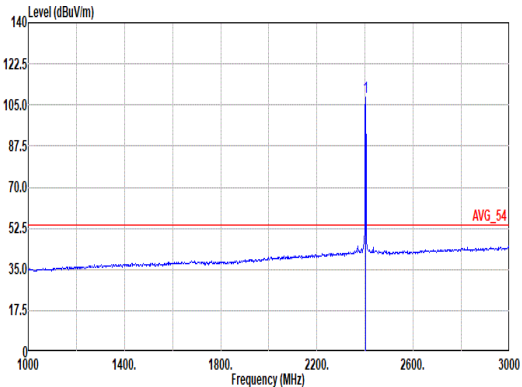Mode	1																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																			
ANT	2																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Level (dBuV/m) Frequency (MHz) Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2370.00</td><td>53.59</td><td>74.00</td><td>-20.41</td><td>40.67</td><td>27.20</td><td>7.30</td><td>31.95</td><td>10.37</td><td>100</td><td>82</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2370.00	53.59	74.00	-20.41	40.67	27.20	7.30	31.95	10.37	100	82	PEAK	 Level (dBuV/m) Frequency (MHz) Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>112.61</td><td>-----</td><td>-----</td><td>99.82</td><td>27.02</td><td>7.36</td><td>31.97</td><td>10.38</td><td>100</td><td>82</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	112.61	-----	-----	99.82	27.02	7.36	31.97	10.38	100	82	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2370.00	53.59	74.00	-20.41	40.67	27.20	7.30	31.95	10.37	100	82	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2402.00	112.61	-----	-----	99.82	27.02	7.36	31.97	10.38	100	82	PEAK																																																																																								
Avg.	 Level (dBuV/m) Frequency (MHz) Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2370.17</td><td>44.83</td><td>54.00</td><td>-9.17</td><td>31.92</td><td>27.19</td><td>7.30</td><td>31.95</td><td>10.37</td><td>100</td><td>82</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2370.17	44.83	54.00	-9.17	31.92	27.19	7.30	31.95	10.37	100	82	AVERAGE	 Level (dBuV/m) Frequency (MHz) Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>108.38</td><td>-----</td><td>-----</td><td>95.59</td><td>27.02</td><td>7.36</td><td>31.97</td><td>10.38</td><td>100</td><td>82</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	108.38	-----	-----	95.59	27.02	7.36	31.97	10.38	100	82	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2370.17	44.83	54.00	-9.17	31.92	27.19	7.30	31.95	10.37	100	82	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2402.00	108.38	-----	-----	95.59	27.02	7.36	31.97	10.38	100	82	AVERAGE																																																																																								

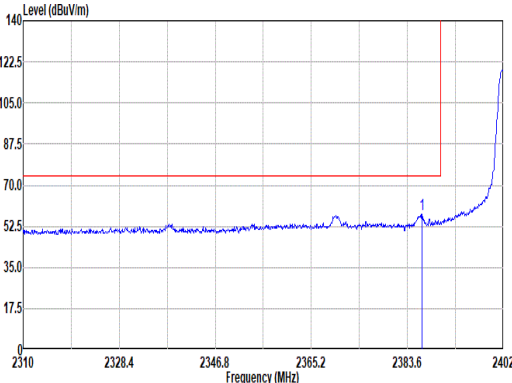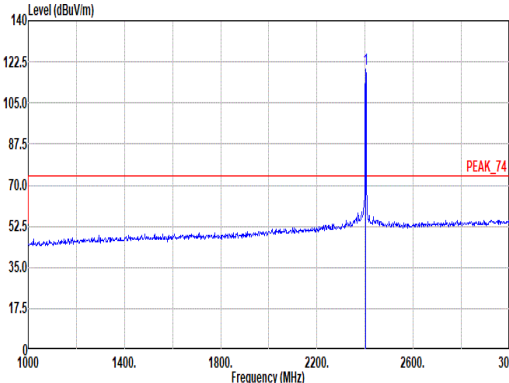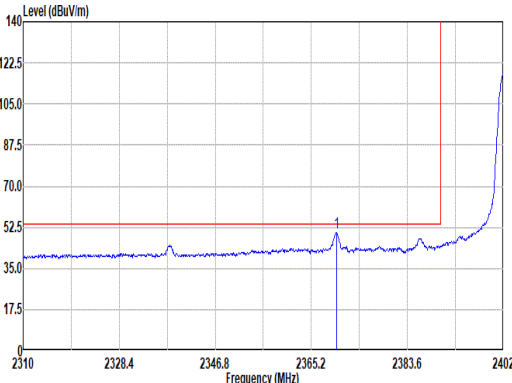
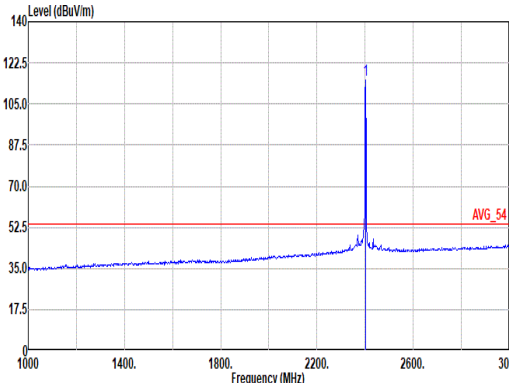


Mode	1																																																																																																											
	Band Edge																																																																																																											
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																											
ANT	2																																																																																																											
Pol.	Vertical						Fundamental																																																																																																					
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.45</td><td>57.60</td><td>74.00</td><td>-16.40</td><td>44.95</td><td>26.90</td><td>7.33</td><td>31.96</td><td>10.38</td><td>107</td><td>116 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2386.45	57.60	74.00	-16.40	44.95	26.90	7.33	31.96	10.38	107	116 PEAK	 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>119.21</td><td>-----</td><td>-----</td><td>106.42</td><td>27.02</td><td>7.36</td><td>31.97</td><td>10.38</td><td>107</td><td>116 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	119.21	-----	-----	106.42	27.02	7.36	31.97	10.38	107	116 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1	2386.45	57.60	74.00	-16.40	44.95	26.90	7.33	31.96	10.38	107	116 PEAK																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1	2402.00	119.21	-----	-----	106.42	27.02	7.36	31.97	10.38	107	116 PEAK																																																																																																	
Avg.	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2369.98</td><td>50.02</td><td>54.00</td><td>-3.98</td><td>37.10</td><td>27.20</td><td>7.30</td><td>31.95</td><td>10.37</td><td>107</td><td>116 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2369.98	50.02	54.00	-3.98	37.10	27.20	7.30	31.95	10.37	107	116 AVERAGE	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>115.15</td><td>-----</td><td>-----</td><td>102.36</td><td>27.02</td><td>7.36</td><td>31.97</td><td>10.38</td><td>107</td><td>116 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	115.15	-----	-----	102.36	27.02	7.36	31.97	10.38	107	116 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1	2369.98	50.02	54.00	-3.98	37.10	27.20	7.30	31.95	10.37	107	116 AVERAGE																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1	2402.00	115.15	-----	-----	102.36	27.02	7.36	31.97	10.38	107	116 AVERAGE																																																																																																	



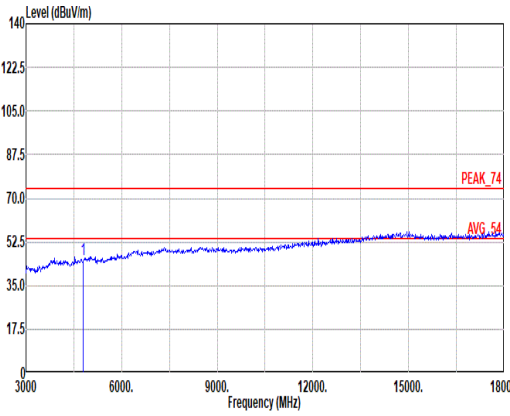
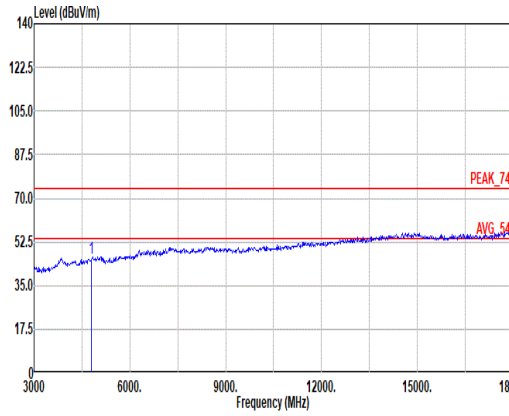


Mode	1																																																			
	Harmonic																																																			
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																			
ANT	2																																																			
Pol.	Horizontal						Vertical																																													
Peak Avg.																																																				
	Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4804.00</td><td>45.34</td><td>74.00</td><td>-28.66</td><td>34.09</td><td>32.51</td><td>10.56</td><td>33.15</td><td>1.33</td><td>--</td><td>-- PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4804.00	45.34	74.00	-28.66	34.09	32.51	10.56	33.15	1.33	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1 4804.00	45.34	74.00	-28.66	34.09	32.51	10.56	33.15	1.33	--	-- PEAK																																										
Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL																																																				
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4804.00</td><td>45.77</td><td>74.00</td><td>-28.23</td><td>34.52</td><td>32.51</td><td>10.56</td><td>33.15</td><td>1.33</td><td>--</td><td>-- PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4804.00	45.77	74.00	-28.23	34.52	32.51	10.56	33.15	1.33	--	-- PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1 4804.00	45.77	74.00	-28.23	34.52	32.51	10.56	33.15	1.33	--	-- PEAK																																										

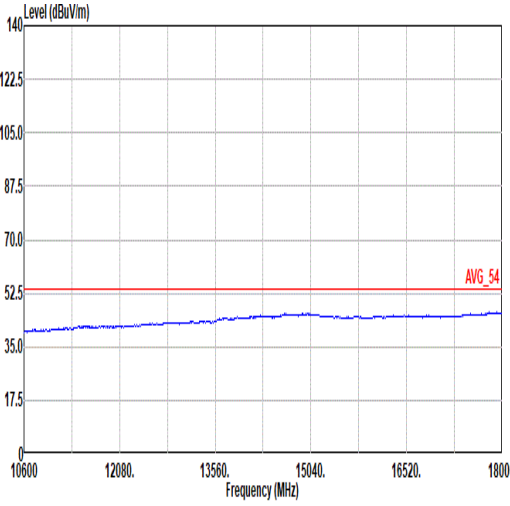
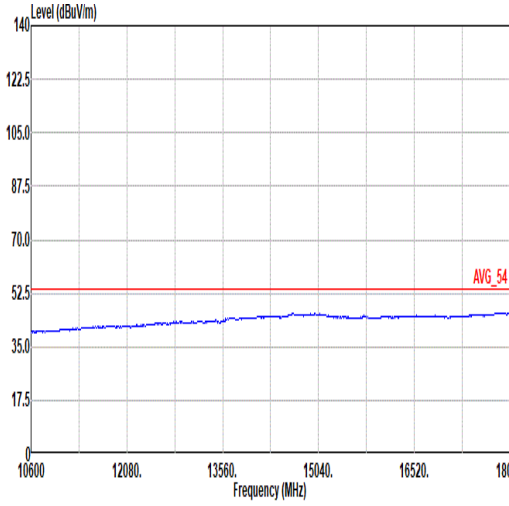


Mode	1	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G -18G Avg.	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

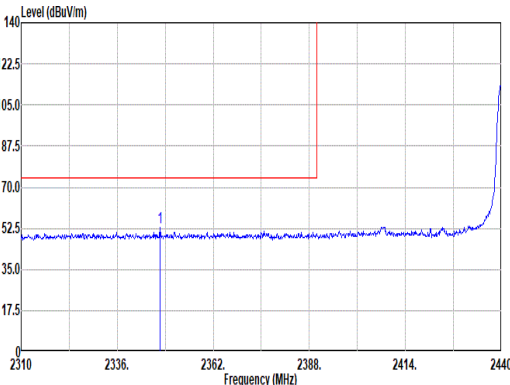
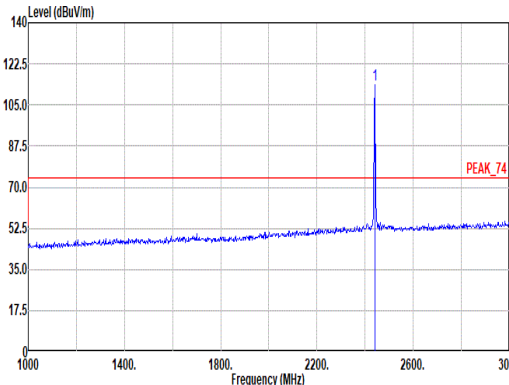
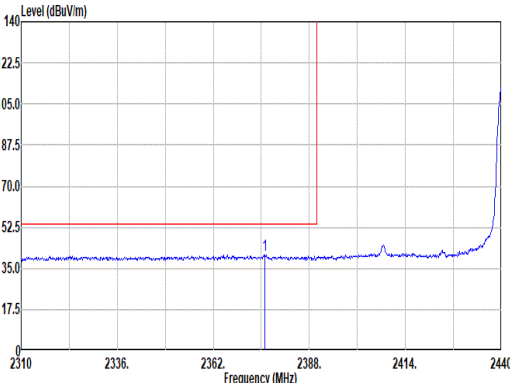
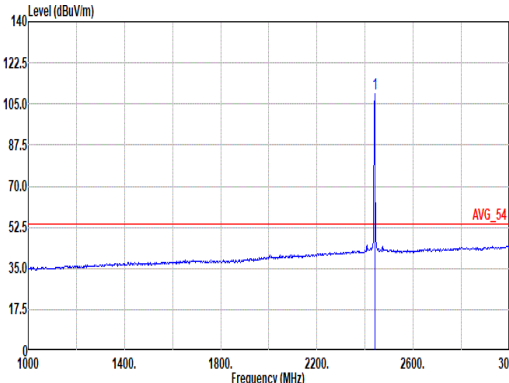


Mode	2																																																						
	Band Edge - L																																																						
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																						
ANT	2																																																						
Pol.	Horizontal																																																						
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2347.57</td><td>52.60</td><td>74.00</td><td>-21.40</td><td>39.61</td><td>27.10</td><td>7.26</td><td>31.94</td><td>10.37</td><td>91 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2347.57	52.60	74.00	-21.40	39.61	27.10	7.26	31.94	10.37	91 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																													
1	2347.57	52.60	74.00	-21.40	39.61	27.10	7.26	31.94	10.37	91 PEAK																																													
Fundamental	 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>113.46</td><td>-----</td><td>-----</td><td>100.77</td><td>26.90</td><td>7.41</td><td>32.00</td><td>10.38</td><td>100 91 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2440.00	113.46	-----	-----	100.77	26.90	7.41	32.00	10.38	100 91 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																													
1	2440.00	113.46	-----	-----	100.77	26.90	7.41	32.00	10.38	100 91 PEAK																																													
Avg.	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2376.04</td><td>40.76</td><td>54.00</td><td>-13.24</td><td>28.00</td><td>27.02</td><td>7.32</td><td>31.96</td><td>10.38</td><td>91 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2376.04	40.76	54.00	-13.24	28.00	27.02	7.32	31.96	10.38	91 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																													
1	2376.04	40.76	54.00	-13.24	28.00	27.02	7.32	31.96	10.38	91 AVERAGE																																													
AVERAGE	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>109.46</td><td>-----</td><td>-----</td><td>96.77</td><td>26.90</td><td>7.41</td><td>32.00</td><td>10.38</td><td>100 91 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2440.00	109.46	-----	-----	96.77	26.90	7.41	32.00	10.38	100 91 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																													
1	2440.00	109.46	-----	-----	96.77	26.90	7.41	32.00	10.38	100 91 AVERAGE																																													

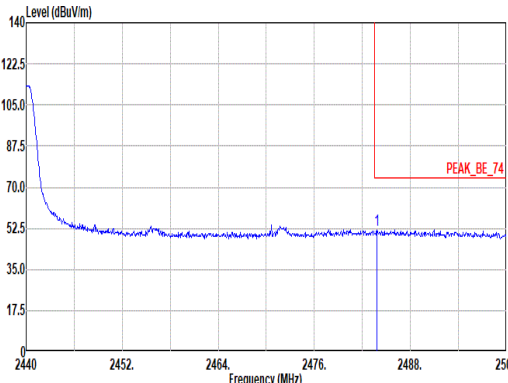
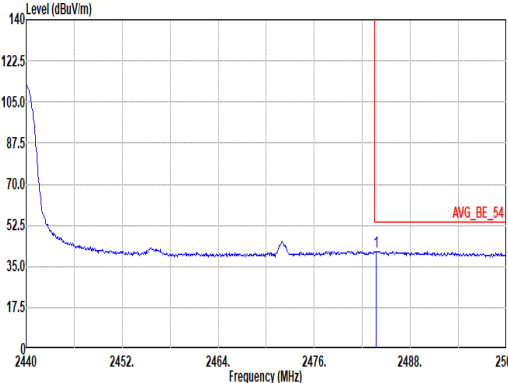


Mode	2																																																					
	Band Edge - R																																																					
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																					
ANT	2																																																					
Pol.	Horizontal						Fundamental																																															
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.00</td><td>51.83</td><td>74.00</td><td>-22.17</td><td>39.17</td><td>26.84</td><td>7.47</td><td>32.03</td><td>10.38</td><td>100</td><td>91 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2483.00	51.83	74.00	-22.17	39.17	26.84	7.47	32.03	10.38	100	91 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																												
1	2483.00	51.83	74.00	-22.17	39.17	26.84	7.47	32.03	10.38	100	91 PEAK																																											
Avg.	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.68</td><td>41.37</td><td>54.00</td><td>-12.63</td><td>28.71</td><td>26.84</td><td>7.47</td><td>32.03</td><td>10.38</td><td>100</td><td>91 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2483.68	41.37	54.00	-12.63	28.71	26.84	7.47	32.03	10.38	100	91 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																												
1	2483.68	41.37	54.00	-12.63	28.71	26.84	7.47	32.03	10.38	100	91 AVERAGE																																											

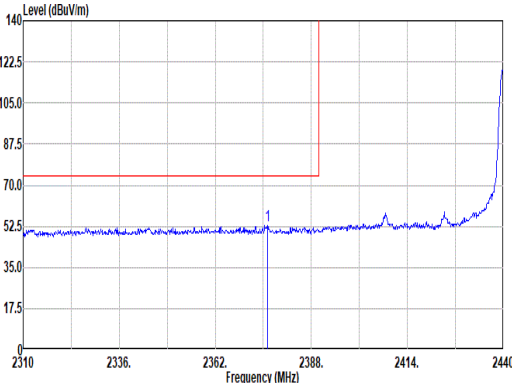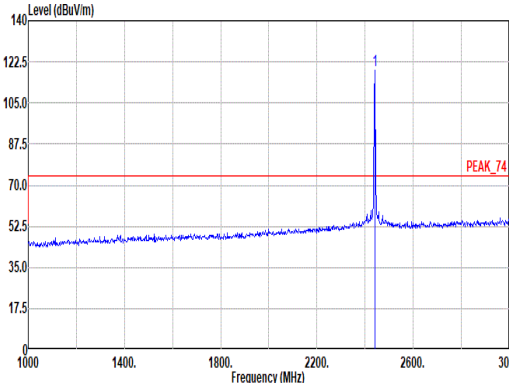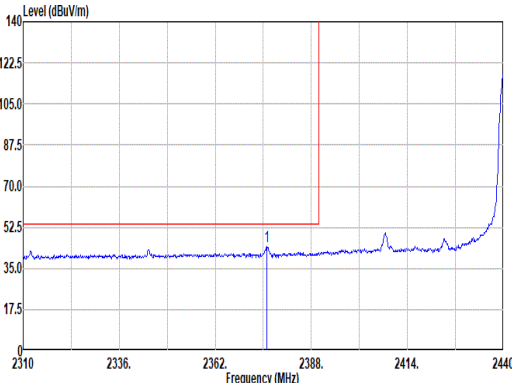
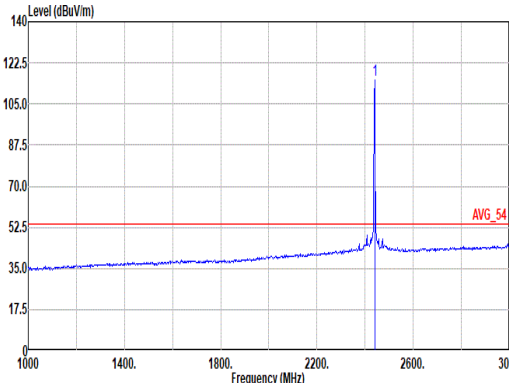


Mode	2																																																																																									
	Band Edge - L																																																																																									
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																									
ANT	2																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2376.17</td><td>52.76</td><td>74.00</td><td>-21.24</td><td>40.01</td><td>27.01</td><td>7.32</td><td>31.96</td><td>10.38</td><td>115</td><td>119 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2376.17	52.76	74.00	-21.24	40.01	27.01	7.32	31.96	10.38	115	119 PEAK	 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>119.05</td><td>-----</td><td>-----</td><td>106.36</td><td>26.90</td><td>7.41</td><td>32.00</td><td>10.38</td><td>115</td><td>119 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2440.00	119.05	-----	-----	106.36	26.90	7.41	32.00	10.38	115	119 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2376.17	52.76	74.00	-21.24	40.01	27.01	7.32	31.96	10.38	115	119 PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2440.00	119.05	-----	-----	106.36	26.90	7.41	32.00	10.38	115	119 PEAK																																																																															
Avg.	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2375.91</td><td>44.25</td><td>54.00</td><td>-9.75</td><td>31.49</td><td>27.02</td><td>7.32</td><td>31.96</td><td>10.38</td><td>115</td><td>119 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2375.91	44.25	54.00	-9.75	31.49	27.02	7.32	31.96	10.38	115	119 AVERAGE	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>115.01</td><td>-----</td><td>-----</td><td>102.32</td><td>26.90</td><td>7.41</td><td>32.00</td><td>10.38</td><td>115</td><td>119 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2440.00	115.01	-----	-----	102.32	26.90	7.41	32.00	10.38	115	119 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2375.91	44.25	54.00	-9.75	31.49	27.02	7.32	31.96	10.38	115	119 AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2440.00	115.01	-----	-----	102.32	26.90	7.41	32.00	10.38	115	119 AVERAGE																																																																															

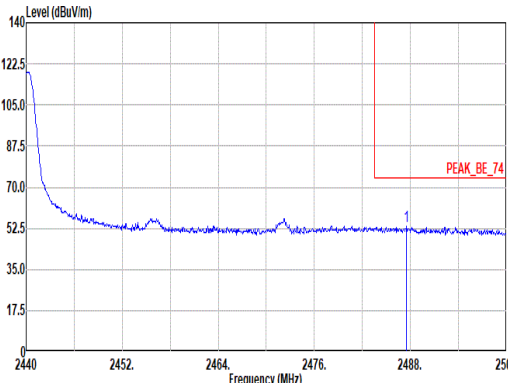
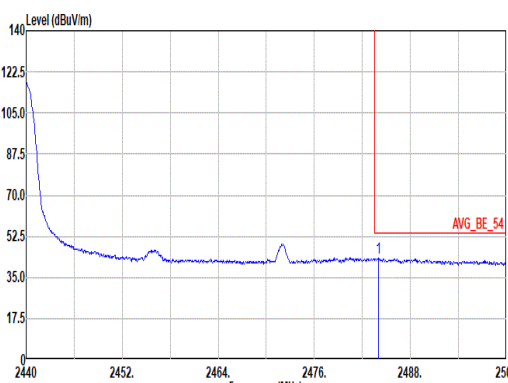


Mode	2																																																									
	Band Edge - R																																																									
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																									
ANT	2																																																									
Pol.	Vertical						Fundamental																																																			
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.52</td><td>53.51</td><td>74.00</td><td>-20.49</td><td>40.00</td><td>26.00</td><td>7.48</td><td>32.03</td><td>10.38</td><td>115</td><td>119</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2487.52	53.51	74.00	-20.49	40.00	26.00	7.48	32.03	10.38	115	119	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	2487.52	53.51	74.00	-20.49	40.00	26.00	7.48	32.03	10.38	115	119	PEAK																																														
Avg.	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.98</td><td>43.06</td><td>54.00</td><td>-10.94</td><td>30.40</td><td>26.04</td><td>7.47</td><td>32.03</td><td>10.38</td><td>115</td><td>119</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.98	43.06	54.00	-10.94	30.40	26.04	7.47	32.03	10.38	115	119	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	2483.98	43.06	54.00	-10.94	30.40	26.04	7.47	32.03	10.38	115	119	AVERAGE																																														



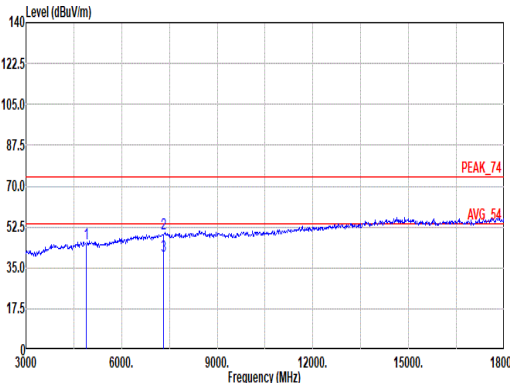
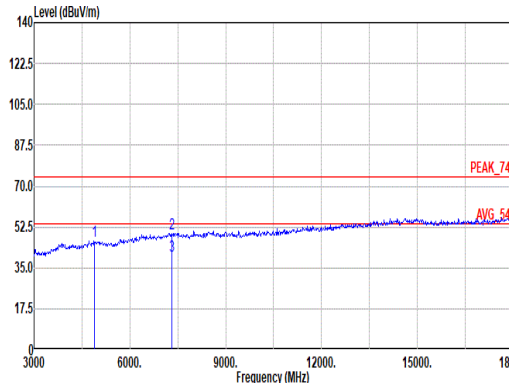


Mode	2																																																																																																																																																						
	Harmonic																																																																																																																																																						
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																																						
ANT	2																																																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																																																
Peak Avg.																																																																																																																																																							
	Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL						Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL																																																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>45.55</td><td>74.00</td><td>-28.45</td><td>34.07</td><td>32.66</td><td>10.52</td><td>33.17</td><td>1.47</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>49.82</td><td>74.00</td><td>-24.18</td><td>33.79</td><td>37.36</td><td>12.64</td><td>35.98</td><td>2.01</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>7320.00</td><td>39.97</td><td>54.00</td><td>-14.03</td><td>23.94</td><td>37.36</td><td>12.64</td><td>35.98</td><td>2.01</td><td>--</td><td>--</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	45.55	74.00	-28.45	34.07	32.66	10.52	33.17	1.47	--	--	PEAK	2	7320.00	49.82	74.00	-24.18	33.79	37.36	12.64	35.98	2.01	--	--	PEAK	3	7320.00	39.97	54.00	-14.03	23.94	37.36	12.64	35.98	2.01	--	--	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>46.24</td><td>74.00</td><td>-27.76</td><td>34.76</td><td>32.66</td><td>10.52</td><td>33.17</td><td>1.47</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>49.74</td><td>74.00</td><td>-24.26</td><td>33.71</td><td>37.36</td><td>12.64</td><td>35.98</td><td>2.01</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>7320.00</td><td>40.01</td><td>54.00</td><td>-13.99</td><td>23.98</td><td>37.36</td><td>12.64</td><td>35.98</td><td>2.01</td><td>--</td><td>--</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	46.24	74.00	-27.76	34.76	32.66	10.52	33.17	1.47	--	--	PEAK	2	7320.00	49.74	74.00	-24.26	33.71	37.36	12.64	35.98	2.01	--	--	PEAK	3	7320.00	40.01	54.00	-13.99	23.98	37.36	12.64	35.98	2.01	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4880.00	45.55	74.00	-28.45	34.07	32.66	10.52	33.17	1.47	--	--	PEAK																																																																																																																																											
2	7320.00	49.82	74.00	-24.18	33.79	37.36	12.64	35.98	2.01	--	--	PEAK																																																																																																																																											
3	7320.00	39.97	54.00	-14.03	23.94	37.36	12.64	35.98	2.01	--	--	Average																																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4880.00	46.24	74.00	-27.76	34.76	32.66	10.52	33.17	1.47	--	--	PEAK																																																																																																																																											
2	7320.00	49.74	74.00	-24.26	33.71	37.36	12.64	35.98	2.01	--	--	PEAK																																																																																																																																											
3	7320.00	40.01	54.00	-13.99	23.98	37.36	12.64	35.98	2.01	--	--	Average																																																																																																																																											



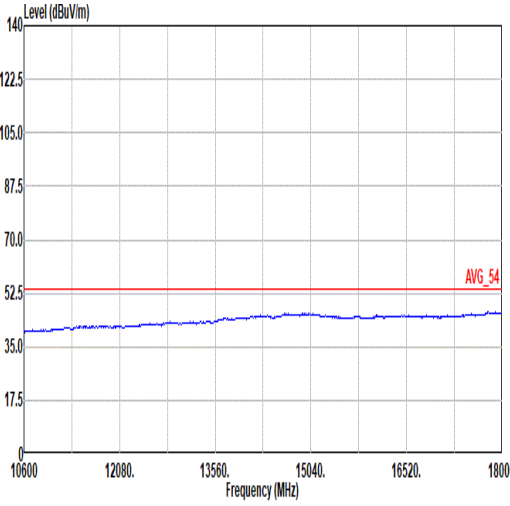
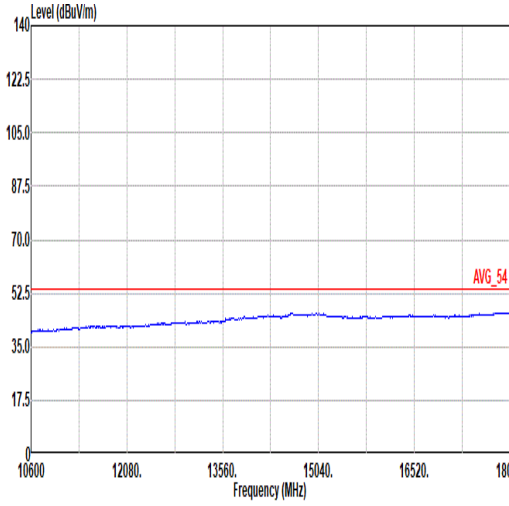


Mode	2	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G -18G Avg.	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

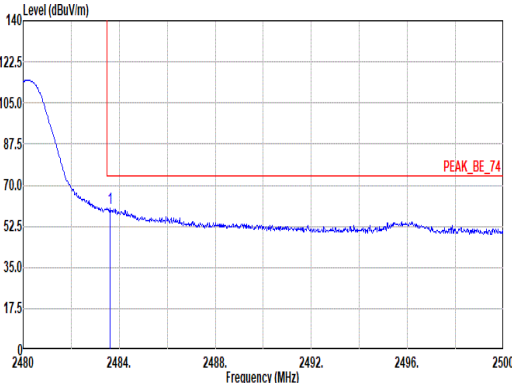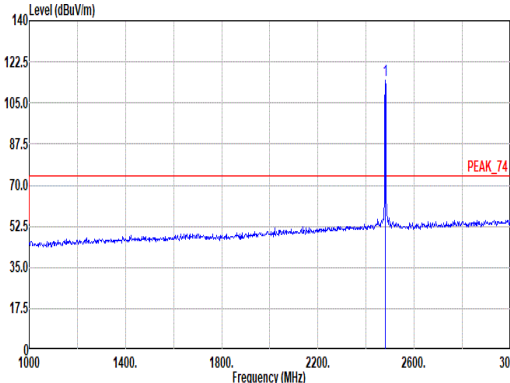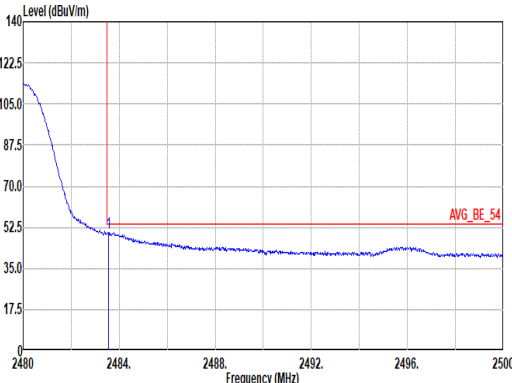
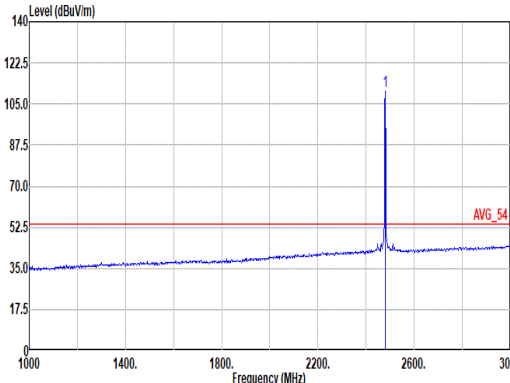


Mode	3																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																			
ANT	2																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.62</td><td>60.06</td><td>74.00</td><td>-13.92</td><td>47.42</td><td>26.84</td><td>7.47</td><td>32.03</td><td>10.38</td><td>103</td><td>90</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	60.06	74.00	-13.92	47.42	26.84	7.47	32.03	10.38	103	90	PEAK	 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>114.79</td><td>-----</td><td>-----</td><td>102.17</td><td>26.80</td><td>7.47</td><td>32.03</td><td>10.38</td><td>103</td><td>90</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	114.79	-----	-----	102.17	26.80	7.47	32.03	10.38	103	90	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.62	60.06	74.00	-13.92	47.42	26.84	7.47	32.03	10.38	103	90	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	114.79	-----	-----	102.17	26.80	7.47	32.03	10.38	103	90	PEAK																																																																																								
Avg.	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.54</td><td>50.11</td><td>54.00</td><td>-3.89</td><td>37.45</td><td>26.84</td><td>7.47</td><td>32.03</td><td>10.38</td><td>103</td><td>90</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	50.11	54.00	-3.89	37.45	26.84	7.47	32.03	10.38	103	90	AVERAGE	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>110.65</td><td>-----</td><td>-----</td><td>98.03</td><td>26.80</td><td>7.47</td><td>32.03</td><td>10.38</td><td>103</td><td>90</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	110.65	-----	-----	98.03	26.80	7.47	32.03	10.38	103	90	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.54	50.11	54.00	-3.89	37.45	26.84	7.47	32.03	10.38	103	90	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	110.65	-----	-----	98.03	26.80	7.47	32.03	10.38	103	90	AVERAGE																																																																																								

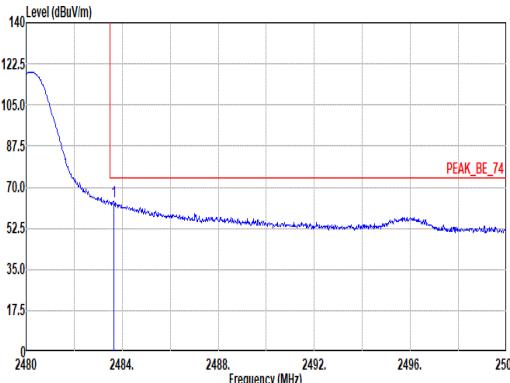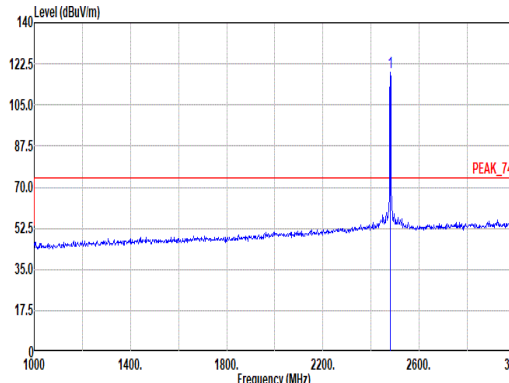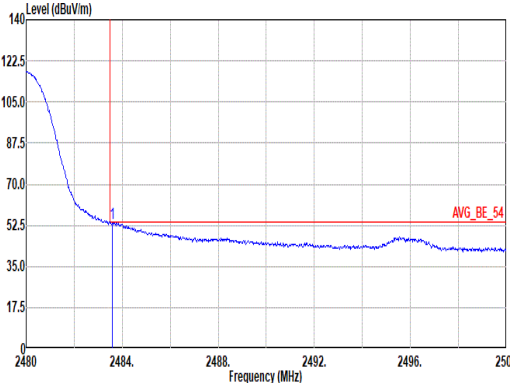
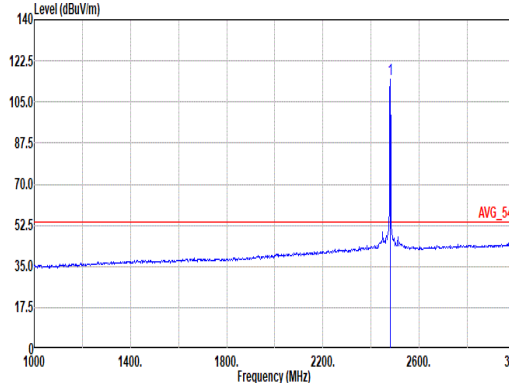


Mode	3																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																			
ANT	2																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.64</td><td>63.93</td><td>74.00</td><td>-10.07</td><td>51.27</td><td>26.04</td><td>7.47</td><td>32.03</td><td>10.38</td><td>113</td><td>113</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.64	63.93	74.00	-10.07	51.27	26.04	7.47	32.03	10.38	113	113	PEAK	 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>119.05</td><td>-----</td><td>-----</td><td>106.43</td><td>26.80</td><td>7.47</td><td>32.03</td><td>10.38</td><td>113</td><td>113</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	119.05	-----	-----	106.43	26.80	7.47	32.03	10.38	113	113	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.64	63.93	74.00	-10.07	51.27	26.04	7.47	32.03	10.38	113	113	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	119.05	-----	-----	106.43	26.80	7.47	32.03	10.38	113	113	PEAK																																																																																								
Avg.	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>53.62</td><td>54.00</td><td>-0.38</td><td>40.96</td><td>26.04</td><td>7.47</td><td>32.03</td><td>10.38</td><td>113</td><td>113</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.58	53.62	54.00	-0.38	40.96	26.04	7.47	32.03	10.38	113	113	AVERAGE	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>114.88</td><td>-----</td><td>-----</td><td>102.26</td><td>26.80</td><td>7.47</td><td>32.03</td><td>10.38</td><td>113</td><td>113</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	114.88	-----	-----	102.26	26.80	7.47	32.03	10.38	113	113	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.58	53.62	54.00	-0.38	40.96	26.04	7.47	32.03	10.38	113	113	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	114.88	-----	-----	102.26	26.80	7.47	32.03	10.38	113	113	AVERAGE																																																																																								

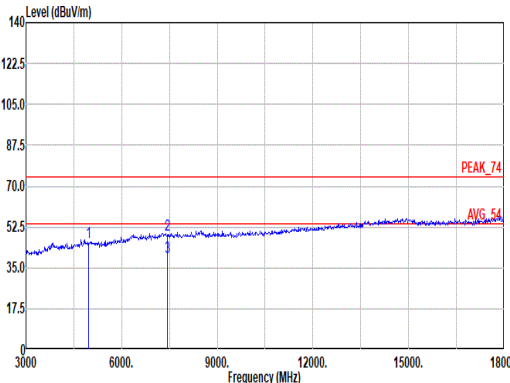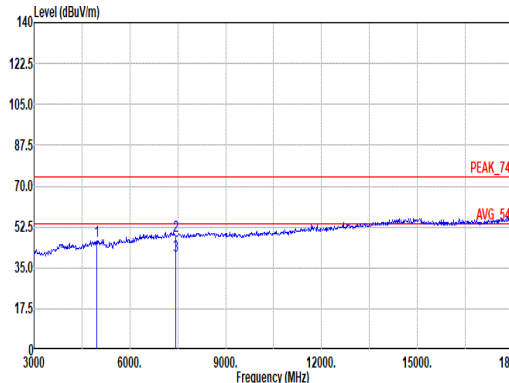

Mode	3																																																																																																																																																						
	Harmonic																																																																																																																																																						
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																																						
ANT	2																																																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																																																
Peak Avg.	 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>45.78</td><td>74.00</td><td>-28.22</td><td>34.06</td><td>32.80</td><td>10.48</td><td>33.18</td><td>1.62</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>49.37</td><td>74.00</td><td>-24.63</td><td>33.44</td><td>37.20</td><td>12.82</td><td>36.07</td><td>1.98</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>7440.00</td><td>39.66</td><td>54.00</td><td>-14.34</td><td>23.73</td><td>37.20</td><td>12.82</td><td>36.07</td><td>1.98</td><td>--</td><td>--</td><td>Average</td></tr></table>  Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>46.25</td><td>74.00</td><td>-27.75</td><td>34.53</td><td>32.80</td><td>10.48</td><td>33.18</td><td>1.62</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>48.85</td><td>74.00</td><td>-25.15</td><td>32.92</td><td>37.20</td><td>12.82</td><td>36.07</td><td>1.98</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>7440.00</td><td>39.91</td><td>54.00</td><td>-14.09</td><td>23.98</td><td>37.20</td><td>12.82</td><td>36.07</td><td>1.98</td><td>--</td><td>--</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	45.78	74.00	-28.22	34.06	32.80	10.48	33.18	1.62	--	--	PEAK	2	7440.00	49.37	74.00	-24.63	33.44	37.20	12.82	36.07	1.98	--	--	PEAK	3	7440.00	39.66	54.00	-14.34	23.73	37.20	12.82	36.07	1.98	--	--	Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	46.25	74.00	-27.75	34.53	32.80	10.48	33.18	1.62	--	--	PEAK	2	7440.00	48.85	74.00	-25.15	32.92	37.20	12.82	36.07	1.98	--	--	PEAK	3	7440.00	39.91	54.00	-14.09	23.98	37.20	12.82	36.07	1.98	--	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4960.00	45.78	74.00	-28.22	34.06	32.80	10.48	33.18	1.62	--	--	PEAK																																																																																																																																											
2	7440.00	49.37	74.00	-24.63	33.44	37.20	12.82	36.07	1.98	--	--	PEAK																																																																																																																																											
3	7440.00	39.66	54.00	-14.34	23.73	37.20	12.82	36.07	1.98	--	--	Average																																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4960.00	46.25	74.00	-27.75	34.53	32.80	10.48	33.18	1.62	--	--	PEAK																																																																																																																																											
2	7440.00	48.85	74.00	-25.15	32.92	37.20	12.82	36.07	1.98	--	--	PEAK																																																																																																																																											
3	7440.00	39.91	54.00	-14.09	23.98	37.20	12.82	36.07	1.98	--	--	Average																																																																																																																																											

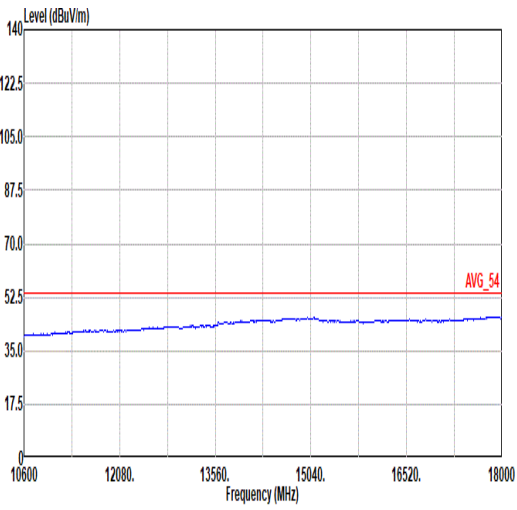
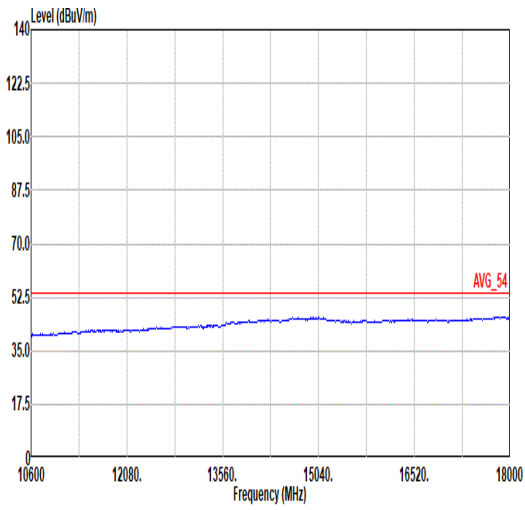


Mode	3	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G -18G Avg.	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL







Mode	8																																																																																							
	SHF																																																																																							
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																							
ANT	2																																																																																							
Pol.	Horizontal						Vertical																																																																																	
Peak																																																																																								
	Site : 03CH23-HY Condition: PEAK_74 1m SHF_1224_240624 HORIZONTAL						Site : 03CH23-HY Condition: PEAK_74 1m SHF_1224_240624 VERTICAL																																																																																	
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>18127.97</td><td>41.06</td><td>74.00</td><td>-32.94</td><td>59.92</td><td>37.54</td><td>17.67</td><td>64.53</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	18127.97	41.06	74.00	-32.94	59.92	37.54	17.67	64.53	-9.54	--	--	PEAK	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>18463.03</td><td>40.96</td><td>74.00</td><td>-33.04</td><td>59.21</td><td>38.00</td><td>17.88</td><td>64.59</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>						Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	18463.03	40.96	74.00	-33.04	59.21	38.00	17.88	64.59	-9.54	--	--
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																												
1	18127.97	41.06	74.00	-32.94	59.92	37.54	17.67	64.53	-9.54	--	--	PEAK																																																																												
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																												
1	18463.03	40.96	74.00	-33.04	59.21	38.00	17.88	64.59	-9.54	--	--	PEAK																																																																												

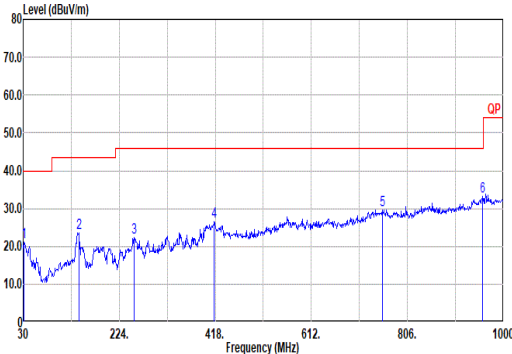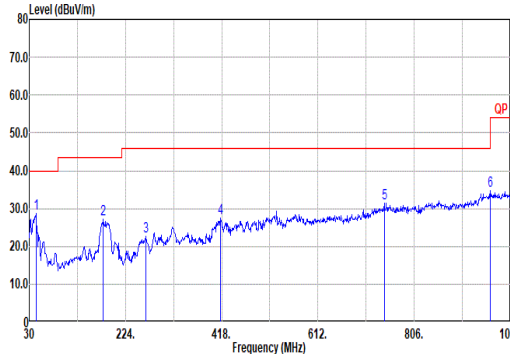





Mode	9																																																																																																																																																																																																																																	
	LF																																																																																																																																																																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																																																																																																																	
ANT	2																																																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																
QPI Peak	 Site : 03CH23-HY Condition: QP 3m Bilog_47020_241005 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.97</td><td>21.07</td><td>40.00</td><td>-18.93</td><td>28.37</td><td>24.25</td><td>1.07</td><td>32.65</td><td>0.03</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>142.52</td><td>23.66</td><td>43.50</td><td>-19.84</td><td>36.67</td><td>17.72</td><td>1.85</td><td>32.64</td><td>0.06</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>254.07</td><td>22.27</td><td>46.00</td><td>-23.73</td><td>33.20</td><td>19.23</td><td>2.39</td><td>32.63</td><td>0.08</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>416.06</td><td>26.70</td><td>46.00</td><td>-19.30</td><td>33.97</td><td>22.37</td><td>3.04</td><td>32.78</td><td>0.10</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>755.56</td><td>29.62</td><td>46.00</td><td>-16.38</td><td>29.87</td><td>28.39</td><td>3.91</td><td>32.67</td><td>0.12</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>957.32</td><td>33.06</td><td>46.00</td><td>-12.94</td><td>28.69</td><td>31.21</td><td>4.31</td><td>31.34</td><td>0.19</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	30.97	21.07	40.00	-18.93	28.37	24.25	1.07	32.65	0.03	--	--	--	Peak	2	142.52	23.66	43.50	-19.84	36.67	17.72	1.85	32.64	0.06	--	--	--	Peak	3	254.07	22.27	46.00	-23.73	33.20	19.23	2.39	32.63	0.08	--	--	--	Peak	4	416.06	26.70	46.00	-19.30	33.97	22.37	3.04	32.78	0.10	--	--	--	Peak	5	755.56	29.62	46.00	-16.38	29.87	28.39	3.91	32.67	0.12	--	--	--	Peak	6	957.32	33.06	46.00	-12.94	28.69	31.21	4.31	31.34	0.19	--	--	--	Peak	 Site : 03CH23-HY Condition: QP 3m Bilog_47020_241005 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>43.58</td><td>28.60</td><td>40.00</td><td>-11.40</td><td>42.40</td><td>17.63</td><td>1.18</td><td>32.64</td><td>0.03</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>179.38</td><td>27.15</td><td>43.50</td><td>-16.35</td><td>42.31</td><td>15.33</td><td>2.04</td><td>32.62</td><td>0.09</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>264.74</td><td>22.57</td><td>46.00</td><td>-23.43</td><td>32.80</td><td>19.89</td><td>2.44</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>416.06</td><td>27.59</td><td>46.00</td><td>-18.41</td><td>34.86</td><td>22.37</td><td>3.04</td><td>32.78</td><td>0.10</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>745.86</td><td>31.33</td><td>46.00</td><td>-14.67</td><td>31.67</td><td>28.38</td><td>3.89</td><td>32.72</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>959.26</td><td>34.70</td><td>46.00</td><td>-11.30</td><td>30.23</td><td>31.27</td><td>4.32</td><td>31.32</td><td>0.20</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	43.58	28.60	40.00	-11.40	42.40	17.63	1.18	32.64	0.03	--	--	--	Peak	2	179.38	27.15	43.50	-16.35	42.31	15.33	2.04	32.62	0.09	--	--	--	Peak	3	264.74	22.57	46.00	-23.43	32.80	19.89	2.44	32.63	0.07	--	--	--	Peak	4	416.06	27.59	46.00	-18.41	34.86	22.37	3.04	32.78	0.10	--	--	--	Peak	5	745.86	31.33	46.00	-14.67	31.67	28.38	3.89	32.72	0.11	--	--	--	Peak	6	959.26	34.70	46.00	-11.30	30.23	31.27	4.32	31.32	0.20	--	--	--	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																				
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																																					
1	30.97	21.07	40.00	-18.93	28.37	24.25	1.07	32.65	0.03	--	--	--	Peak																																																																																																																																																																																																																					
2	142.52	23.66	43.50	-19.84	36.67	17.72	1.85	32.64	0.06	--	--	--	Peak																																																																																																																																																																																																																					
3	254.07	22.27	46.00	-23.73	33.20	19.23	2.39	32.63	0.08	--	--	--	Peak																																																																																																																																																																																																																					
4	416.06	26.70	46.00	-19.30	33.97	22.37	3.04	32.78	0.10	--	--	--	Peak																																																																																																																																																																																																																					
5	755.56	29.62	46.00	-16.38	29.87	28.39	3.91	32.67	0.12	--	--	--	Peak																																																																																																																																																																																																																					
6	957.32	33.06	46.00	-12.94	28.69	31.21	4.31	31.34	0.19	--	--	--	Peak																																																																																																																																																																																																																					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																																						
1	43.58	28.60	40.00	-11.40	42.40	17.63	1.18	32.64	0.03	--	--	--	Peak																																																																																																																																																																																																																					
2	179.38	27.15	43.50	-16.35	42.31	15.33	2.04	32.62	0.09	--	--	--	Peak																																																																																																																																																																																																																					
3	264.74	22.57	46.00	-23.43	32.80	19.89	2.44	32.63	0.07	--	--	--	Peak																																																																																																																																																																																																																					
4	416.06	27.59	46.00	-18.41	34.86	22.37	3.04	32.78	0.10	--	--	--	Peak																																																																																																																																																																																																																					
5	745.86	31.33	46.00	-14.67	31.67	28.38	3.89	32.72	0.11	--	--	--	Peak																																																																																																																																																																																																																					
6	959.26	34.70	46.00	-11.30	30.23	31.27	4.32	31.32	0.20	--	--	--	Peak																																																																																																																																																																																																																					





<2Mbps>

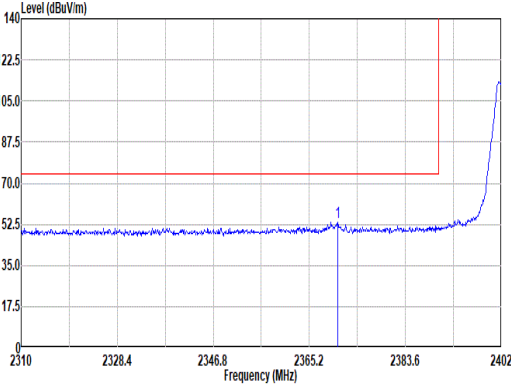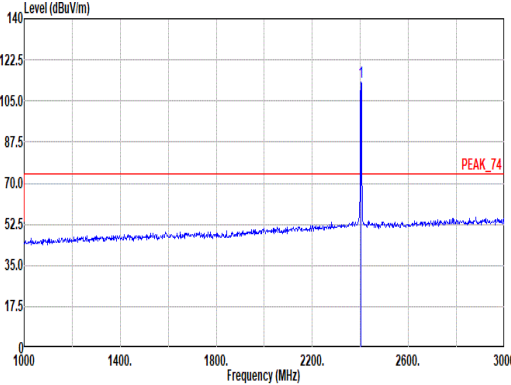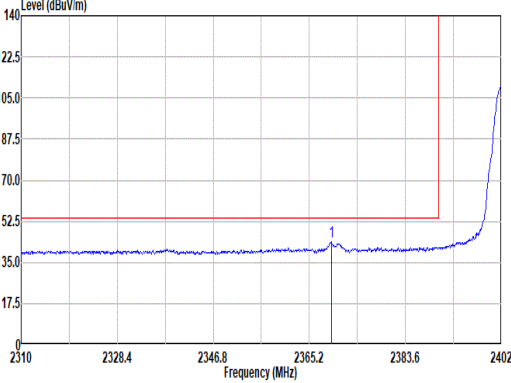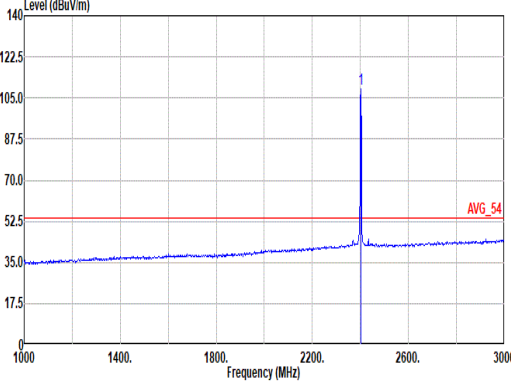Mode	4																																																																																													
	Band Edge																																																																																													
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																													
ANT	2																																																																																													
Pol.	Horizontal						Fundamental																																																																																							
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2370.63</td><td>53.53</td><td>74.00</td><td>-20.47</td><td>40.62</td><td>27.18</td><td>7.31</td><td>31.95</td><td>10.37</td><td>101</td><td>267</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2370.63	53.53	74.00	-20.47	40.62	27.18	7.31	31.95	10.37	101	267	PEAK	 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>113.12</td><td>-----</td><td>-----</td><td>100.33</td><td>27.02</td><td>7.36</td><td>31.97</td><td>10.38</td><td>101</td><td>267</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2402.00	113.12	-----	-----	100.33	27.02	7.36	31.97	10.38	101	267	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	2370.63	53.53	74.00	-20.47	40.62	27.18	7.31	31.95	10.37	101	267	PEAK																																																																																		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	2402.00	113.12	-----	-----	100.33	27.02	7.36	31.97	10.38	101	267	PEAK																																																																																		
Avg.	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2369.43</td><td>43.63</td><td>54.00</td><td>-10.37</td><td>30.71</td><td>27.20</td><td>7.30</td><td>31.95</td><td>10.37</td><td>101</td><td>267</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2369.43	43.63	54.00	-10.37	30.71	27.20	7.30	31.95	10.37	101	267	AVERAGE	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>109.05</td><td>-----</td><td>-----</td><td>96.26</td><td>27.02</td><td>7.36</td><td>31.97</td><td>10.38</td><td>101</td><td>267</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2402.00	109.05	-----	-----	96.26	27.02	7.36	31.97	10.38	101	267	AVERAGE
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	2369.43	43.63	54.00	-10.37	30.71	27.20	7.30	31.95	10.37	101	267	AVERAGE																																																																																		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	2402.00	109.05	-----	-----	96.26	27.02	7.36	31.97	10.38	101	267	AVERAGE																																																																																		

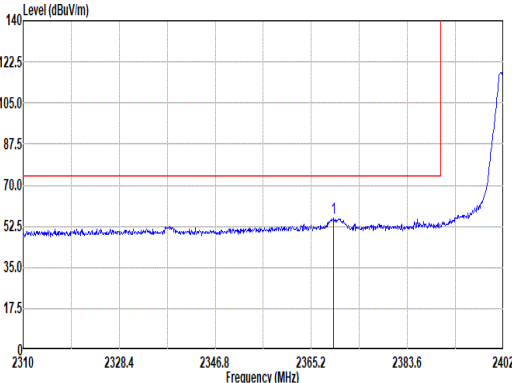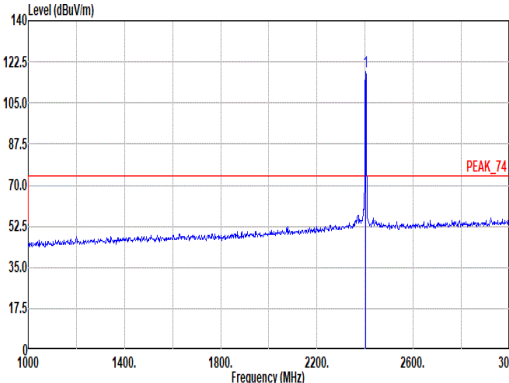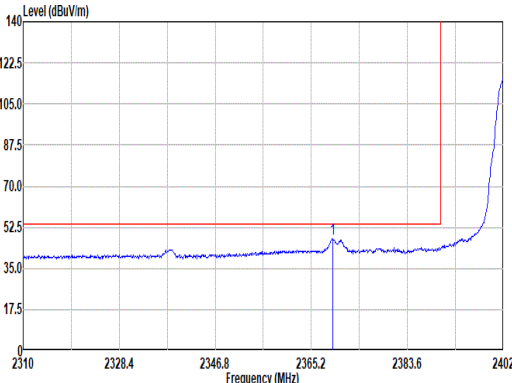
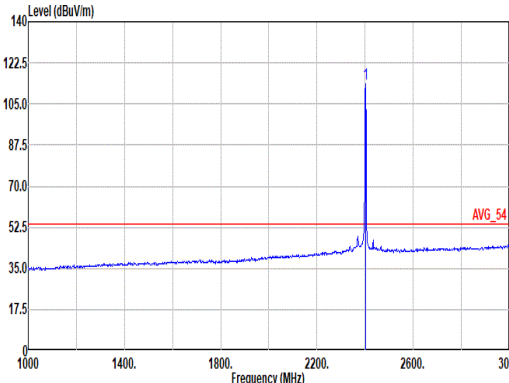


Mode	4																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																		
ANT	2																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2369.52</td><td>56.18</td><td>74.00</td><td>-17.82</td><td>43.26</td><td>27.20</td><td>7.30</td><td>31.95</td><td>10.37</td><td>127</td><td>248</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2369.52	56.18	74.00	-17.82	43.26	27.20	7.30	31.95	10.37	127	248	PEAK	Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>118.25</td><td>-----</td><td>-----</td><td>105.46</td><td>27.02</td><td>7.36</td><td>31.97</td><td>10.38</td><td>127</td><td>248</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	118.25	-----	-----	105.46	27.02	7.36	31.97	10.38	127	248
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2369.52	56.18	74.00	-17.82	43.26	27.20	7.30	31.95	10.37	127	248	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	118.25	-----	-----	105.46	27.02	7.36	31.97	10.38	127	248	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2369.34</td><td>47.74</td><td>54.00</td><td>-6.26</td><td>34.82</td><td>27.20</td><td>7.30</td><td>31.95</td><td>10.37</td><td>127</td><td>248</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2369.34	47.74	54.00	-6.26	34.82	27.20	7.30	31.95	10.37	127	248	AVERAGE	Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>113.63</td><td>-----</td><td>-----</td><td>100.84</td><td>27.02</td><td>7.36</td><td>31.97</td><td>10.38</td><td>127</td><td>248</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	113.63	-----	-----	100.84	27.02	7.36	31.97	10.38	127	248
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2369.34	47.74	54.00	-6.26	34.82	27.20	7.30	31.95	10.37	127	248	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	113.63	-----	-----	100.84	27.02	7.36	31.97	10.38	127	248	AVERAGE																																																																																							



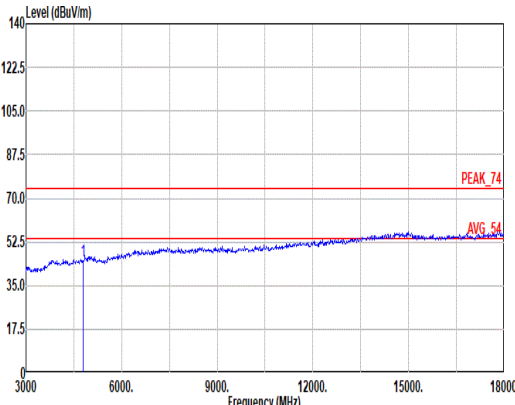
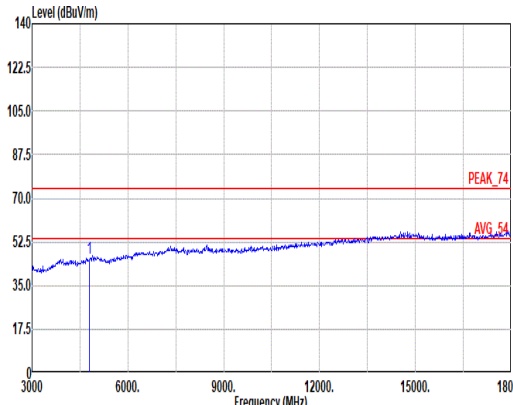


Mode	4										
	Harmonic										
	2400-2483.5_Bluetooth-LE_CH00_2402MHz										
ANT	2										
Pol.	Horizontal						Vertical				
Peak Avg.											
	Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL						Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL				
	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4804.00	44.79	74.00	-29.21	33.54	32.51	10.56	33.15	1.33	--	PEAK
	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4804.00	45.74	74.00	-28.26	34.49	32.51	10.56	33.15	1.33	--	PEAK

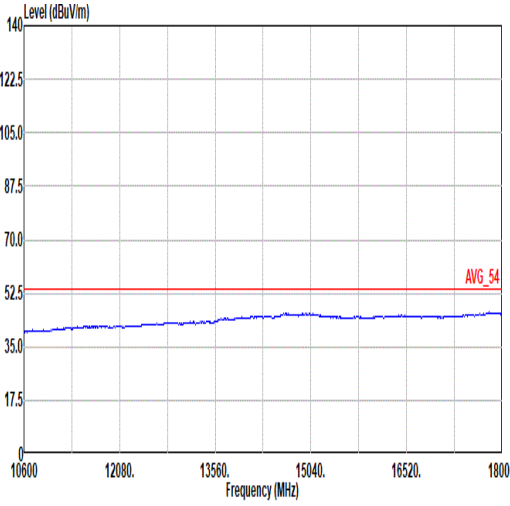
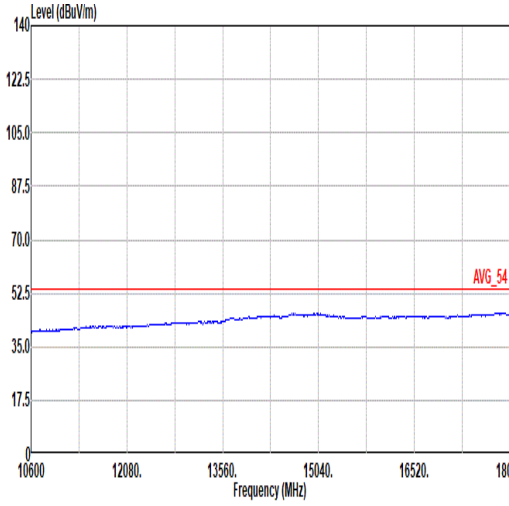


Mode	4	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G -18G Avg.	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

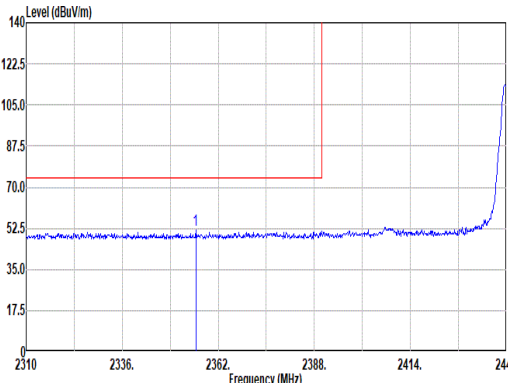
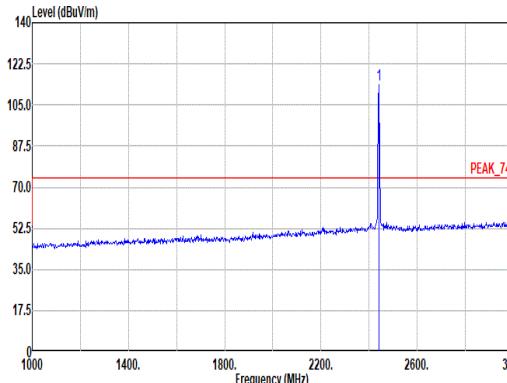
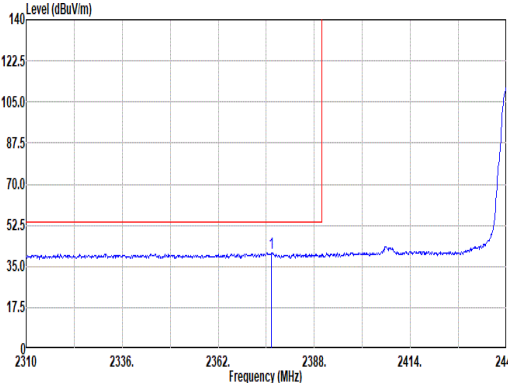
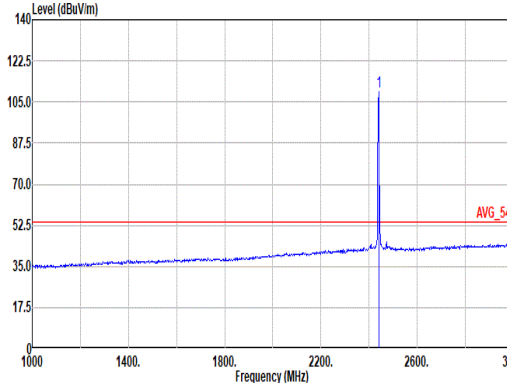


Mode	5																																																																																															
	Band Edge - L																																																																																															
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																															
ANT	2																																																																																															
Pol.	Horizontal					Fundamental																																																																																										
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2355.09</td><td>51.92</td><td>74.00</td><td>-22.08</td><td>39.05</td><td>27.16</td><td>7.28</td><td>31.94</td><td>105</td><td>267</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2355.09	51.92	74.00	-22.08	39.05	27.16	7.28	31.94	105	267	PEAK	 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>113.75</td><td>-----</td><td>-----</td><td>101.06</td><td>26.90</td><td>7.41</td><td>32.00</td><td>105</td><td>267</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	113.75	-----	-----	101.06	26.90	7.41	32.00	105	267	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2355.09	51.92	74.00	-22.08	39.05	27.16	7.28	31.94	105	267	PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2440.00	113.75	-----	-----	101.06	26.90	7.41	32.00	105	267	PEAK																																																																																					
Avg.	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2376.43</td><td>40.91</td><td>54.00</td><td>-13.09</td><td>28.16</td><td>27.01</td><td>7.32</td><td>31.96</td><td>105</td><td>267</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2376.43	40.91	54.00	-13.09	28.16	27.01	7.32	31.96	105	267	AVERAGE	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>109.17</td><td>-----</td><td>-----</td><td>96.48</td><td>26.90</td><td>7.41</td><td>32.00</td><td>105</td><td>267</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	109.17	-----	-----	96.48	26.90	7.41	32.00	105	267	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2376.43	40.91	54.00	-13.09	28.16	27.01	7.32	31.96	105	267	AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2440.00	109.17	-----	-----	96.48	26.90	7.41	32.00	105	267	AVERAGE																																																																																					

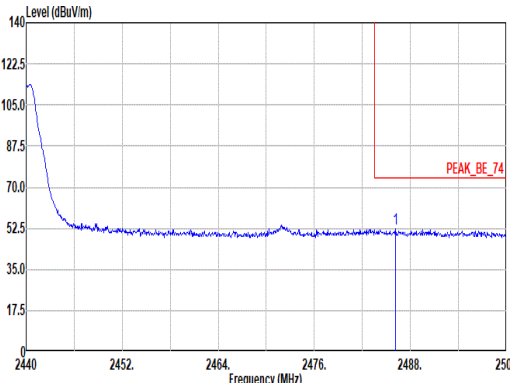
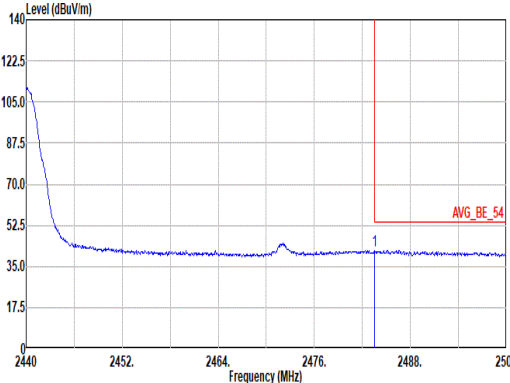


Mode	5																																																						
	Band Edge - R																																																						
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																						
ANT	2																																																						
Pol.	Horizontal						Fundamental																																																
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.14</td><td>52.37</td><td>74.00</td><td>-21.63</td><td>39.68</td><td>26.06</td><td>7.48</td><td>32.03</td><td>10.38</td><td>105</td><td>267</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2486.14	52.37	74.00	-21.63	39.68	26.06	7.48	32.03	10.38	105	267	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																														
1	2486.14	52.37	74.00	-21.63	39.68	26.06	7.48	32.03	10.38	105	267	PEAK																																											
Avg.	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>41.67</td><td>54.00</td><td>-12.33</td><td>29.01</td><td>26.04</td><td>7.47</td><td>32.03</td><td>10.38</td><td>105</td><td>267</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.56	41.67	54.00	-12.33	29.01	26.04	7.47	32.03	10.38	105	267	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																														
1	2483.56	41.67	54.00	-12.33	29.01	26.04	7.47	32.03	10.38	105	267	AVERAGE																																											

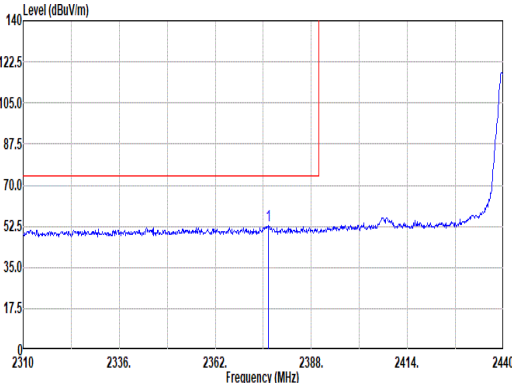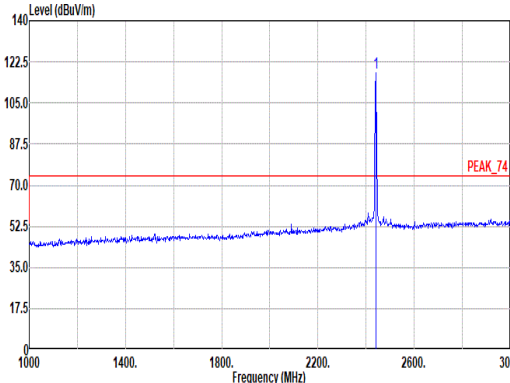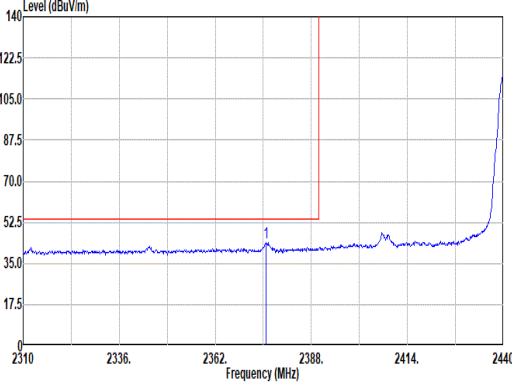
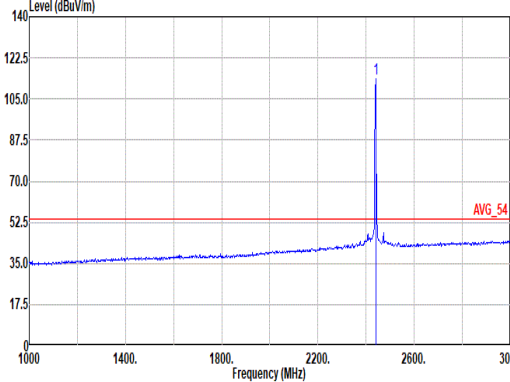


Mode	5																																																																																																							
	Band Edge - L																																																																																																							
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																							
ANT	2																																																																																																							
Pol.	Vertical						Fundamental																																																																																																	
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2376.43</td><td>52.88</td><td>74.00</td><td>-21.12</td><td>40.13</td><td>27.01</td><td>7.32</td><td>31.96</td><td>10.38</td><td>117</td><td>247</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2376.43	52.88	74.00	-21.12	40.13	27.01	7.32	31.96	10.38	117	247	PEAK	 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>118.05</td><td>-----</td><td>-----</td><td>105.36</td><td>26.90</td><td>7.41</td><td>32.00</td><td>10.38</td><td>117</td><td>247</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2440.00	118.05	-----	-----	105.36	26.90	7.41	32.00	10.38	117	247	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2376.43	52.88	74.00	-21.12	40.13	27.01	7.32	31.96	10.38	117	247	PEAK																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2440.00	118.05	-----	-----	105.36	26.90	7.41	32.00	10.38	117	247	PEAK																																																																																												
Avg.	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2375.78</td><td>43.69</td><td>54.00</td><td>-10.31</td><td>30.92</td><td>27.03</td><td>7.32</td><td>31.96</td><td>10.38</td><td>117</td><td>247</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2375.78	43.69	54.00	-10.31	30.92	27.03	7.32	31.96	10.38	117	247	AVERAGE	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>113.67</td><td>-----</td><td>-----</td><td>100.98</td><td>26.90</td><td>7.41</td><td>32.00</td><td>10.38</td><td>117</td><td>247</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2440.00	113.67	-----	-----	100.98	26.90	7.41	32.00	10.38	117	247	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2375.78	43.69	54.00	-10.31	30.92	27.03	7.32	31.96	10.38	117	247	AVERAGE																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2440.00	113.67	-----	-----	100.98	26.90	7.41	32.00	10.38	117	247	AVERAGE																																																																																												

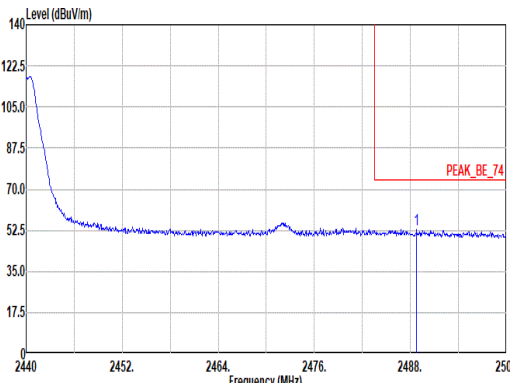
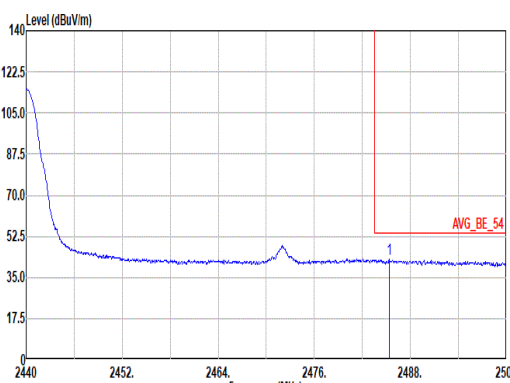


Mode	5																																													
	Band Edge - R																																													
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																													
ANT	2																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.78</td><td>52.83</td><td>74.00</td><td>-21.17</td><td>40.11</td><td>26.09</td><td>7.48</td><td>32.03</td><td>10.38</td><td>117</td><td>247</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.78	52.83	74.00	-21.17	40.11	26.09	7.48	32.03	10.38	117	247	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2487.78	52.83	74.00	-21.17	40.11	26.09	7.48	32.03	10.38	117	247	PEAK																																		
Avg.	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.36</td><td>42.57</td><td>54.00</td><td>-11.43</td><td>29.09</td><td>26.85</td><td>7.48</td><td>32.03</td><td>10.38</td><td>117</td><td>247</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.36	42.57	54.00	-11.43	29.09	26.85	7.48	32.03	10.38	117	247	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2485.36	42.57	54.00	-11.43	29.09	26.85	7.48	32.03	10.38	117	247	AVERAGE																																		



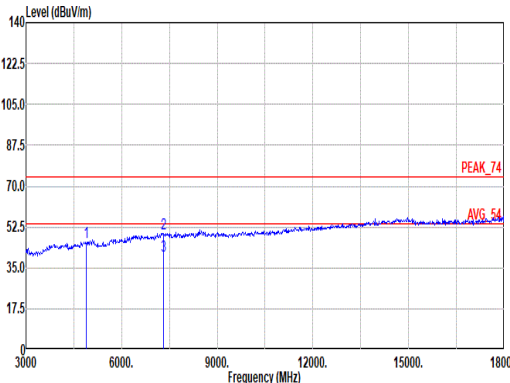
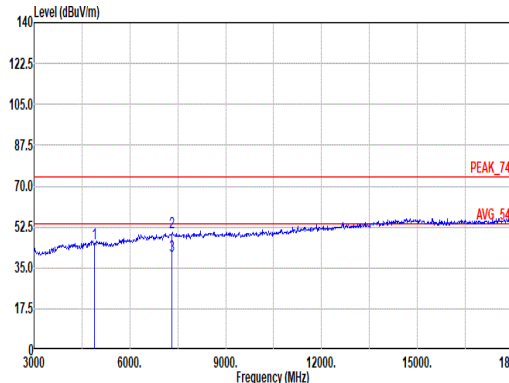


Mode	5																																																																																																																																																							
	Harmonic																																																																																																																																																							
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																																							
ANT	2																																																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																																																	
Peak Avg.	 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>46.01</td><td>74.00</td><td>-27.99</td><td>34.53</td><td>32.66</td><td>10.52</td><td>33.17</td><td>1.47</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>49.40</td><td>74.00</td><td>-24.60</td><td>33.37</td><td>37.36</td><td>12.64</td><td>35.98</td><td>2.01</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>7320.00</td><td>40.02</td><td>54.00</td><td>-13.98</td><td>23.99</td><td>37.36</td><td>12.64</td><td>35.98</td><td>2.01</td><td>--</td><td>--</td><td>Average</td></tr></table>  Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>45.55</td><td>74.00</td><td>-28.45</td><td>34.07</td><td>32.66</td><td>10.52</td><td>33.17</td><td>1.47</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>49.94</td><td>74.00</td><td>-24.06</td><td>33.91</td><td>37.36</td><td>12.64</td><td>35.98</td><td>2.01</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>7320.00</td><td>40.04</td><td>54.00</td><td>-13.96</td><td>24.01</td><td>37.36</td><td>12.64</td><td>35.98</td><td>2.01</td><td>--</td><td>--</td><td>Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	46.01	74.00	-27.99	34.53	32.66	10.52	33.17	1.47	--	--	PEAK	2	7320.00	49.40	74.00	-24.60	33.37	37.36	12.64	35.98	2.01	--	--	PEAK	3	7320.00	40.02	54.00	-13.98	23.99	37.36	12.64	35.98	2.01	--	--	Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	45.55	74.00	-28.45	34.07	32.66	10.52	33.17	1.47	--	--	PEAK	2	7320.00	49.94	74.00	-24.06	33.91	37.36	12.64	35.98	2.01	--	--	PEAK	3	7320.00	40.04	54.00	-13.96	24.01	37.36	12.64	35.98	2.01	--	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																														
1	4880.00	46.01	74.00	-27.99	34.53	32.66	10.52	33.17	1.47	--	--	PEAK																																																																																																																																												
2	7320.00	49.40	74.00	-24.60	33.37	37.36	12.64	35.98	2.01	--	--	PEAK																																																																																																																																												
3	7320.00	40.02	54.00	-13.98	23.99	37.36	12.64	35.98	2.01	--	--	Average																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																														
1	4880.00	45.55	74.00	-28.45	34.07	32.66	10.52	33.17	1.47	--	--	PEAK																																																																																																																																												
2	7320.00	49.94	74.00	-24.06	33.91	37.36	12.64	35.98	2.01	--	--	PEAK																																																																																																																																												
3	7320.00	40.04	54.00	-13.96	24.01	37.36	12.64	35.98	2.01	--	--	Average																																																																																																																																												



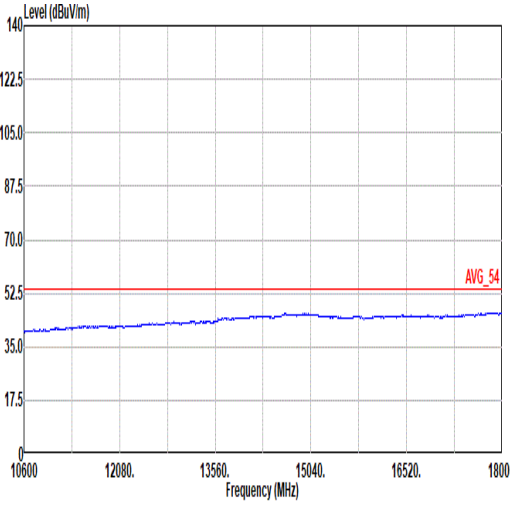
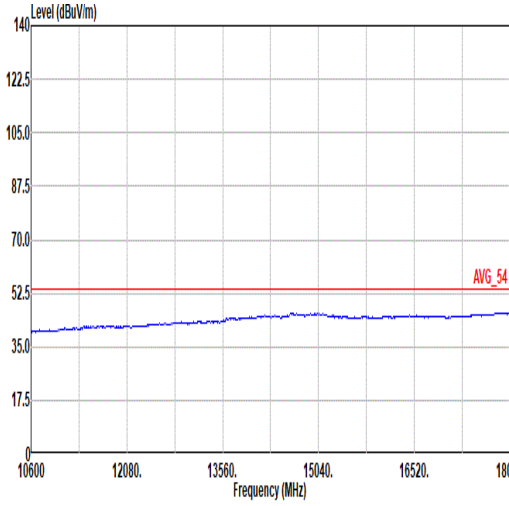


Mode	5	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg.	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

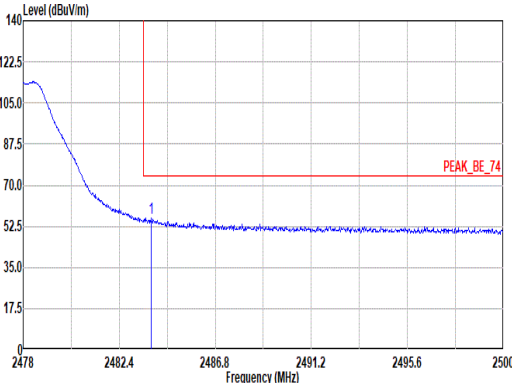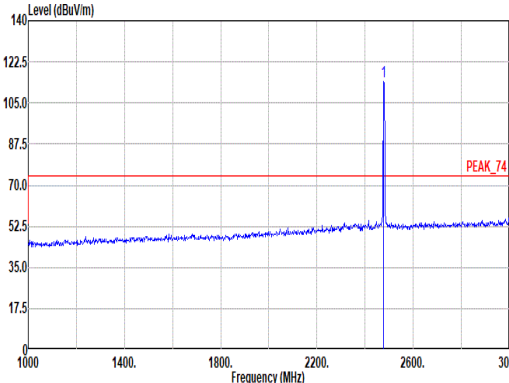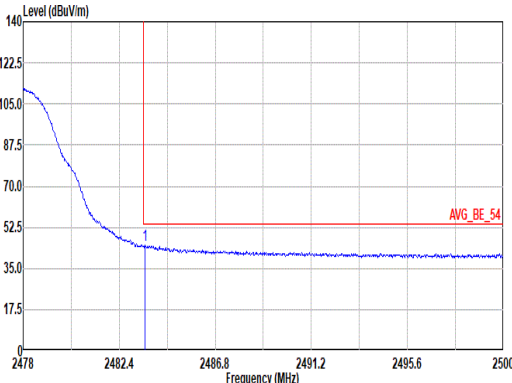
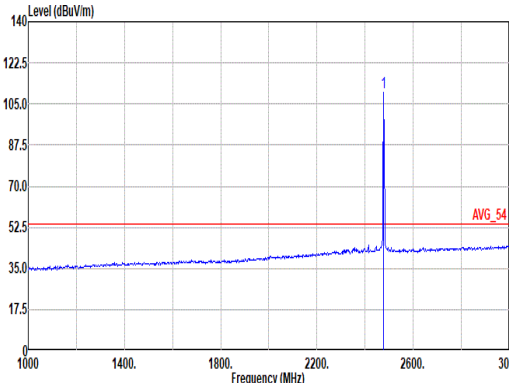


Mode	6																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																																			
ANT	2																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.05</td><td>55.84</td><td>74.00</td><td>-18.16</td><td>43.18</td><td>26.84</td><td>7.47</td><td>32.03</td><td>10.38</td><td>400</td><td>183</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.05	55.84	74.00	-18.16	43.18	26.84	7.47	32.03	10.38	400	183	PEAK	 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>114.21</td><td>-----</td><td>-----</td><td>101.59</td><td>26.80</td><td>7.47</td><td>32.03</td><td>10.38</td><td>400</td><td>183</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	114.21	-----	-----	101.59	26.80	7.47	32.03	10.38	400	183	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.05	55.84	74.00	-18.16	43.18	26.84	7.47	32.03	10.38	400	183	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2478.00	114.21	-----	-----	101.59	26.80	7.47	32.03	10.38	400	183	PEAK																																																																																								
Avg.	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.57</td><td>44.68</td><td>54.00</td><td>-9.32</td><td>32.02</td><td>26.84</td><td>7.47</td><td>32.03</td><td>10.38</td><td>400</td><td>183</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.57	44.68	54.00	-9.32	32.02	26.84	7.47	32.03	10.38	400	183	AVERAGE	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>109.77</td><td>-----</td><td>-----</td><td>97.15</td><td>26.80</td><td>7.47</td><td>32.03</td><td>10.38</td><td>400</td><td>183</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	109.77	-----	-----	97.15	26.80	7.47	32.03	10.38	400	183	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.57	44.68	54.00	-9.32	32.02	26.84	7.47	32.03	10.38	400	183	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2478.00	109.77	-----	-----	97.15	26.80	7.47	32.03	10.38	400	183	AVERAGE																																																																																								

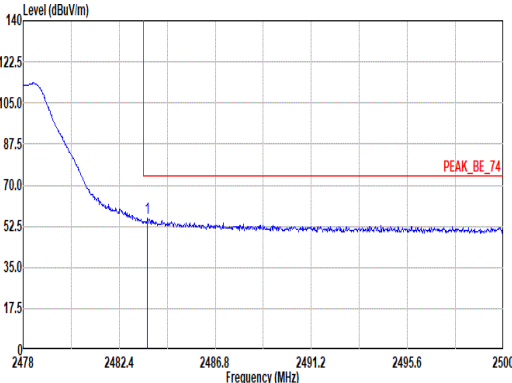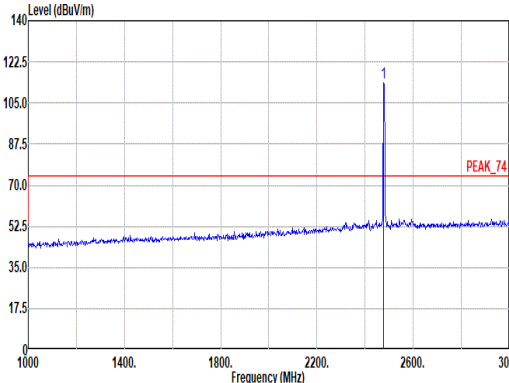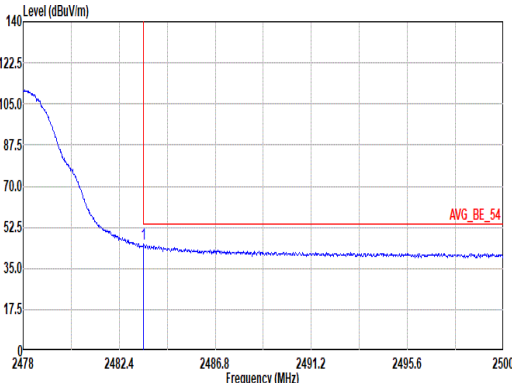
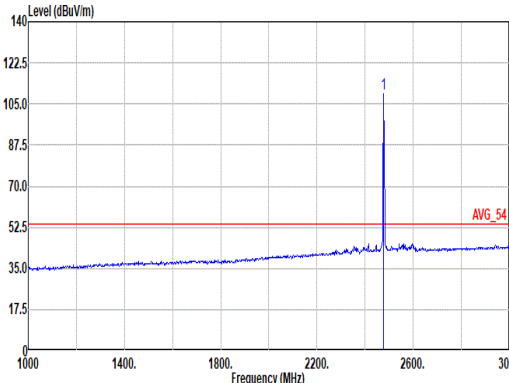


Mode	6																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																																		
ANT	2																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
Avg.																																																																																																			
	Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.70</td><td>55.99</td><td>74.00</td><td>-18.01</td><td>43.33</td><td>26.04</td><td>7.47</td><td>32.03</td><td>10.38</td><td>300</td><td>86</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.70	55.99	74.00	-18.01	43.33	26.04	7.47	32.03	10.38	300	86	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>113.57</td><td>-----</td><td>-----</td><td>100.95</td><td>26.00</td><td>7.47</td><td>32.03</td><td>10.38</td><td>300</td><td>86</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	113.57	-----	-----	100.95	26.00	7.47	32.03	10.38	300	86	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.70	55.99	74.00	-18.01	43.33	26.04	7.47	32.03	10.38	300	86	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2478.00	113.57	-----	-----	100.95	26.00	7.47	32.03	10.38	300	86	PEAK																																																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>45.20</td><td>54.00</td><td>-8.80</td><td>32.54</td><td>26.04</td><td>7.47</td><td>32.03</td><td>10.38</td><td>300</td><td>86</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	45.20	54.00	-8.80	32.54	26.04	7.47	32.03	10.38	300	86	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>109.26</td><td>-----</td><td>-----</td><td>96.64</td><td>26.00</td><td>7.47</td><td>32.03</td><td>10.38</td><td>300</td><td>86</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	109.26	-----	-----	96.64	26.00	7.47	32.03	10.38	300	86	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.52	45.20	54.00	-8.80	32.54	26.04	7.47	32.03	10.38	300	86	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2478.00	109.26	-----	-----	96.64	26.00	7.47	32.03	10.38	300	86	AVERAGE																																																																																							



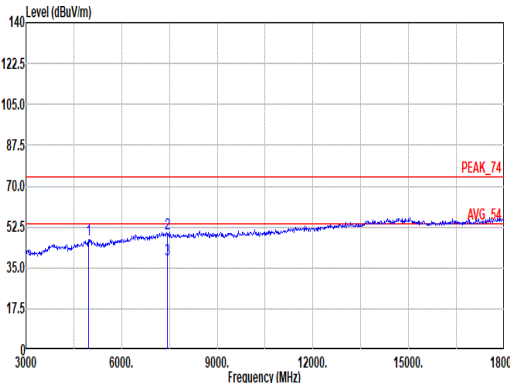
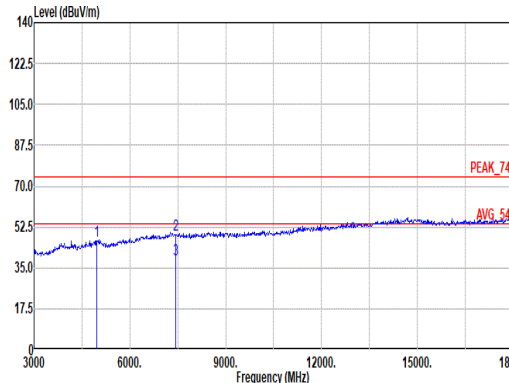


Mode	6												
	Harmonic												
	2400-2483.5_Bluetooth-LE_CH38_2478MHz												
ANT	2												
Pol.	Horizontal						Vertical						
Peak Avg.													
	Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL												
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	
1	4956.00	46.86	74.00	-27.14	35.14	32.80	10.48	33.18	1.62	--	--	--	PEAK
2	7434.00	49.58	74.00	-24.42	33.64	37.20	12.82	36.06	1.98	--	--	--	PEAK
3	7434.00	38.73	54.00	-15.27	22.79	37.20	12.82	36.06	1.98	--	--	--	Average
													
	Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL												
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	
1	4956.00	46.66	74.00	-27.34	34.94	32.80	10.48	33.18	1.62	--	--	--	PEAK
2	7434.00	49.18	74.00	-24.82	33.24	37.20	12.82	36.06	1.98	--	--	--	PEAK
3	7434.00	38.71	54.00	-15.29	22.77	37.20	12.82	36.06	1.98	--	--	--	Average



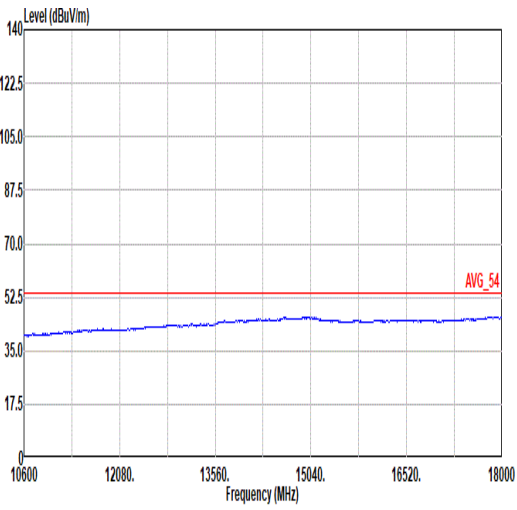
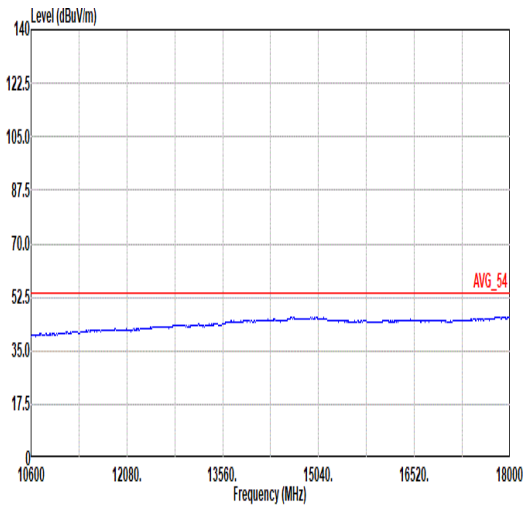


Mode	6	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH38_2478MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg.	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

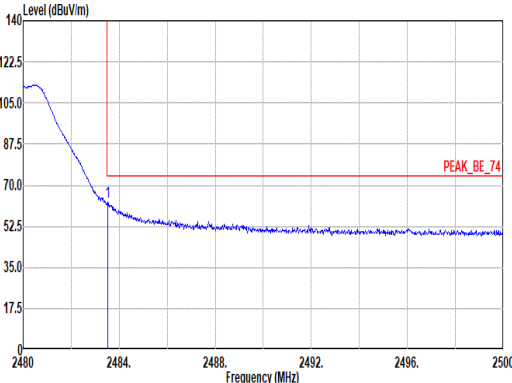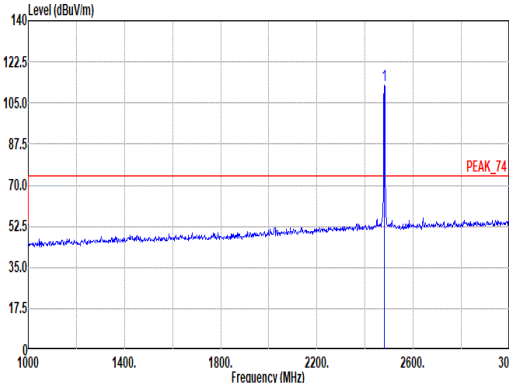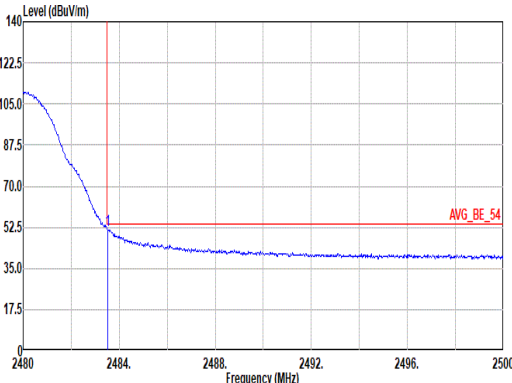
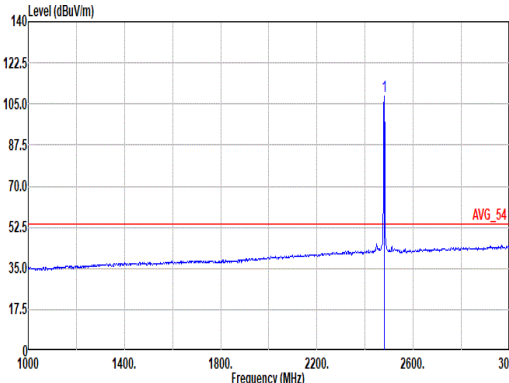


Mode	7																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																			
ANT	2																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>62.61</td><td>74.00</td><td>-11.39</td><td>49.95</td><td>26.84</td><td>7.47</td><td>32.03</td><td>10.38</td><td>104</td><td>267</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	62.61	74.00	-11.39	49.95	26.84	7.47	32.03	10.38	104	267	PEAK	 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>112.71</td><td>-----</td><td>-----</td><td>100.09</td><td>26.80</td><td>7.47</td><td>32.03</td><td>10.38</td><td>104</td><td>267</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	112.71	-----	-----	100.09	26.80	7.47	32.03	10.38	104	267	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.52	62.61	74.00	-11.39	49.95	26.84	7.47	32.03	10.38	104	267	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	112.71	-----	-----	100.09	26.80	7.47	32.03	10.38	104	267	PEAK																																																																																								
Avg.	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>51.51</td><td>54.00</td><td>-2.49</td><td>38.85</td><td>26.84</td><td>7.47</td><td>32.03</td><td>10.38</td><td>104</td><td>267</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	51.51	54.00	-2.49	38.85	26.84	7.47	32.03	10.38	104	267	AVERAGE	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>108.31</td><td>-----</td><td>-----</td><td>95.69</td><td>26.80</td><td>7.47</td><td>32.03</td><td>10.38</td><td>104</td><td>267</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	108.31	-----	-----	95.69	26.80	7.47	32.03	10.38	104	267	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.52	51.51	54.00	-2.49	38.85	26.84	7.47	32.03	10.38	104	267	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	108.31	-----	-----	95.69	26.80	7.47	32.03	10.38	104	267	AVERAGE																																																																																								

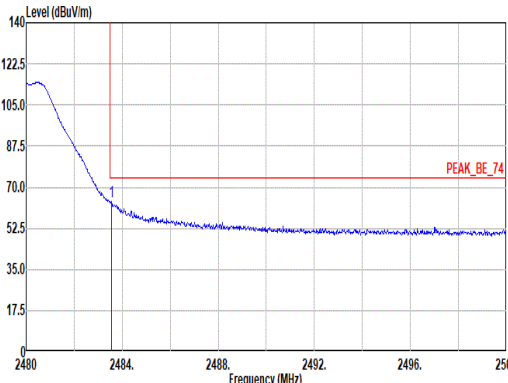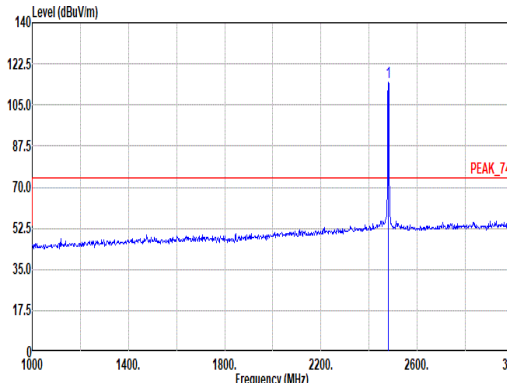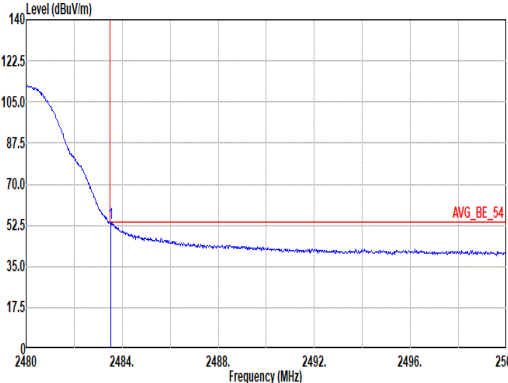
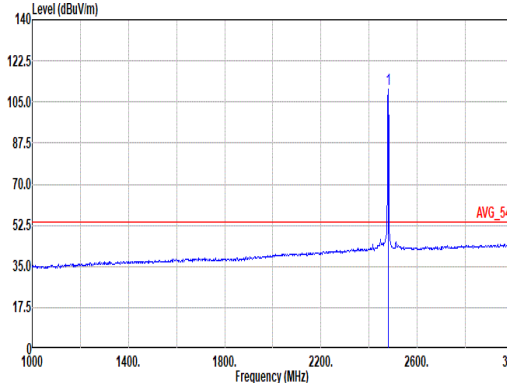


Mode	7																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																		
ANT	2																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>64.10</td><td>74.00</td><td>-9.90</td><td>51.44</td><td>26.04</td><td>7.47</td><td>32.03</td><td>10.38</td><td>111</td><td>251</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	64.10	74.00	-9.90	51.44	26.04	7.47	32.03	10.38	111	251	PEAK	Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>114.77</td><td>-----</td><td>-----</td><td>102.15</td><td>26.80</td><td>7.47</td><td>32.03</td><td>10.38</td><td>111</td><td>251</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	114.77	-----	-----	102.15	26.80	7.47	32.03	10.38	111	251
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.54	64.10	74.00	-9.90	51.44	26.04	7.47	32.03	10.38	111	251	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	114.77	-----	-----	102.15	26.80	7.47	32.03	10.38	111	251	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>53.48</td><td>54.00</td><td>-0.52</td><td>40.02</td><td>26.04</td><td>7.47</td><td>32.03</td><td>10.38</td><td>111</td><td>251</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	53.48	54.00	-0.52	40.02	26.04	7.47	32.03	10.38	111	251	AVERAGE	Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>110.49</td><td>-----</td><td>-----</td><td>97.87</td><td>26.80</td><td>7.47</td><td>32.03</td><td>10.38</td><td>111</td><td>251</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	110.49	-----	-----	97.87	26.80	7.47	32.03	10.38	111	251
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.52	53.48	54.00	-0.52	40.02	26.04	7.47	32.03	10.38	111	251	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	110.49	-----	-----	97.87	26.80	7.47	32.03	10.38	111	251	AVERAGE																																																																																							

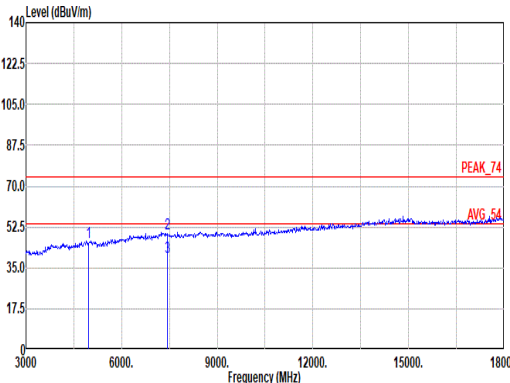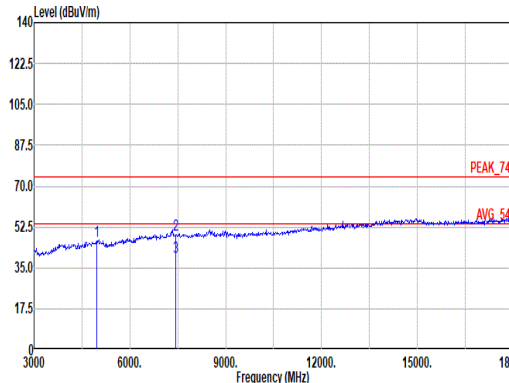

Mode	7																																																																																																																																																							
	Harmonic																																																																																																																																																							
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																																							
ANT	2																																																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																																																	
Peak Avg.																																																																																																																																																								
	Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL						Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL																																																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>45.98</td><td>74.00</td><td>-28.02</td><td>34.26</td><td>32.80</td><td>10.48</td><td>33.18</td><td>1.62</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>49.74</td><td>74.00</td><td>-24.26</td><td>33.81</td><td>37.20</td><td>12.82</td><td>36.07</td><td>1.98</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>7440.00</td><td>39.75</td><td>54.00</td><td>-14.25</td><td>23.82</td><td>37.20</td><td>12.82</td><td>36.07</td><td>1.98</td><td>--</td><td>--</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	45.98	74.00	-28.02	34.26	32.80	10.48	33.18	1.62	--	--	PEAK	2	7440.00	49.74	74.00	-24.26	33.81	37.20	12.82	36.07	1.98	--	--	PEAK	3	7440.00	39.75	54.00	-14.25	23.82	37.20	12.82	36.07	1.98	--	--	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>46.24</td><td>74.00</td><td>-27.76</td><td>34.52</td><td>32.80</td><td>10.48</td><td>33.18</td><td>1.62</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>49.22</td><td>74.00</td><td>-24.78</td><td>33.29</td><td>37.20</td><td>12.82</td><td>36.07</td><td>1.98</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>7440.00</td><td>39.75</td><td>54.00</td><td>-14.25</td><td>23.82</td><td>37.20</td><td>12.82</td><td>36.07</td><td>1.98</td><td>--</td><td>--</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	46.24	74.00	-27.76	34.52	32.80	10.48	33.18	1.62	--	--	PEAK	2	7440.00	49.22	74.00	-24.78	33.29	37.20	12.82	36.07	1.98	--	--	PEAK	3	7440.00	39.75	54.00	-14.25	23.82	37.20	12.82	36.07	1.98	--	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																														
1	4960.00	45.98	74.00	-28.02	34.26	32.80	10.48	33.18	1.62	--	--	PEAK																																																																																																																																												
2	7440.00	49.74	74.00	-24.26	33.81	37.20	12.82	36.07	1.98	--	--	PEAK																																																																																																																																												
3	7440.00	39.75	54.00	-14.25	23.82	37.20	12.82	36.07	1.98	--	--	Average																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																														
1	4960.00	46.24	74.00	-27.76	34.52	32.80	10.48	33.18	1.62	--	--	PEAK																																																																																																																																												
2	7440.00	49.22	74.00	-24.78	33.29	37.20	12.82	36.07	1.98	--	--	PEAK																																																																																																																																												
3	7440.00	39.75	54.00	-14.25	23.82	37.20	12.82	36.07	1.98	--	--	Average																																																																																																																																												

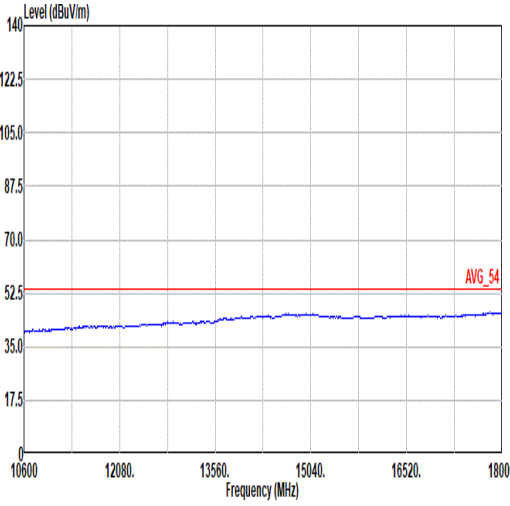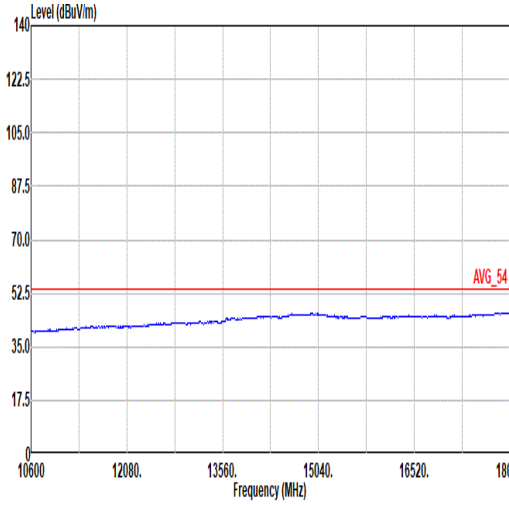


Mode	7	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G -18G Avg.	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	Duty Factor(dB)
Bluetooth - LE for 1Mbps	100.00	-	0.00
Bluetooth - LE for 2Mbps	100.00	-	0.00

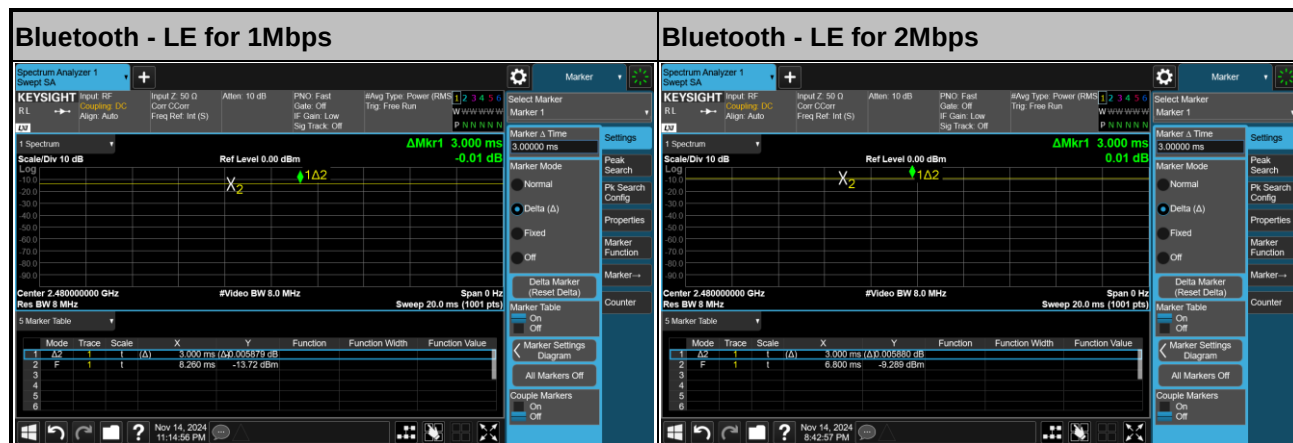

—THE END—