
FCC Test Report

Report No.: AGC04183150401FE07

FCC ID : 2AEMHM4GLTE
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Mobile Phone
BRAND NAME : OEM
MODEL NAME : M4GLTE
CLIENT : Shenzhen RF Technology Co., Ltd
DATE OF ISSUE : May 14, 2015
STANDARD(S) : FCC Part 15 Rules
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 14, 2015	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. SYSTEM DESCRIPTION	5
3. MEASUREMENT UNCERTAINTY.....	5
4. PRODUCT INFORMATION	6
5. SUPPORT EQUIPMENT.....	7
6. TEST FACILITY	8
7. FCCLINE CONDUCTED EMISSION TEST	10
7.1. LIMITS OF LINE CONDUCTED EMISSION TEST	10
7.2. BLOCK DIAGRAM OF TEST SETUP	10
7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST	11
7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST	12
8. FCC RADIATED EMISSION TEST.....	14
8.1. LIMITS OF RADIATED EMISSION TEST	14
8.2. BLOCK DIAGRAM OF TEST SETUP	14
8.3. PROCEDURE OF RADIATED EMISSION TEST	15
8.4. TEST RESULT OF RADIATED EMISSION TEST	16
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	18
APPENDIX B: PHOTOGRAPHS OF EUT	19

1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen RF Technology Co., Ltd
Address	F/3~5, BuildingD, Longhua Baokun Industrial Zone, Baoan District, Shenzhen, China
Manufacturer	Shenzhen RF Technology Co., Ltd
Address	F/3~5, BuildingD, Longhua Baokun Industrial Zone, Baoan District, Shenzhen, China
Product Designation	Mobile Phone
Brand Name	OEM
Test Model	M4GLTE
Measurement Procedure	ANSI C63.4: 2003
Date of test	Apr.27, 2015 to May 13,2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-IT/AC

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, the measurement procedure according to ANSI C63.4:2003. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Prepared By



Bart Xie May 14, 2015

Checked By



Kidd Yang May 14, 2015

Authorized By



Solger Zhang May 14, 2015

2. SYSTEM DESCRIPTION

EUT test procedure:

1. Connect EUT and peripheral devices (PC) through USB port.
2. Power on the EUT, use the software to transfer data between EUT and PC.
3. Make sure the EUT operates normally during the test.

Test Mode

TEST MODE DESCRIPTION		
NO.	TEST MODE DESCRIPTION	WORST
1	USB (connection for data transferring)	V

Note:
1.V means EMI worst mode
2 .Other modes have been verified through VOC mode.

3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Conducted measurement: +/- 2.75dB

Radiated measurement: +/- 3.2Db

Summary Of Test Results

FCC Rules	Description Of Test	Result
§15.107	Conduction Emission	Compliant
§15.109	Radiated Emission	Compliant

4. PRODUCT INFORMATION

Housing Type	plastics
Adapter Input	AC100-240V, 50-60Hz, 0.3A
Adapter Output	DC5V, 1A

I/O Port Information (Applicable Not Applicable)

I/O Port of EUT			
I/O Port Type	Q'TY	Cable	Tested with
USB Port	1	1.0 m, unshielded	1
Earphone Port	1	N/A	N/A

5. SUPPORT EQUIPMENT

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
Laptop	Dell	INSPIRON	--	1	1.5m unshielded

Note: All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

6. TEST FACILITY

Site	Compliance Certification Services (Shenzhen) Inc.
Location	No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China
Description	Test Firm Registration Number: 441872

TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	100694	07/25/2014	07/24/2015
LISN	R&S	ESH3-Z5	838979/009	07/25/2014	07/24/2015
SPECTRUM ANALYZER	AGILENT	E4440A	US41421290	02/17/2015	02/16/2016
WIDEBAND FREQUENCY ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	08/16/2014	08/15/2015
HORN ANTENNA	EM	EM-AH-10180	67	02/17/2015	02/16/2016
AMPLIFIER	EM	EM30180	0607030	02/17/2015	02/16/2016
POSITIONING CONTROLLER	MF	MF-7802	1050034	07/25/2014	07/24/2015

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model	S/N	Calibration Date	Calibration Due.
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	Mar.01, 2015	Mar.01, 2016
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	Mar.09, 2015	Mar.08, 2016
Amplifier	MITEQ	AM-1604-3000	1123808	Mar.18, 2015	Mar.17, 2016
High Noise Amplifier	Agilent	8449B	3008A01838	Mar.18, 2015	Mar.17, 2016
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	July 10, 2014	July 09, 2015
Bilog Antenna	SCHAFFNER	CBL6143	5082	Mar.01, 2015	Mar.01, 2016
Horn Antenna	SCHWARZBECK	BBHA9120	D286	Mar.01, 2015	Mar.01, 2016
Loop Antenna	COM-POWER	AL-130	121044	Sep.27, 2014	Sep.26, 2015
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	Feb.28, 2015	Feb.27, 2016
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model	S/N	Calibration Date	Calibration Due.
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	Mar.09, 2015	Mar.08, 2016
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	Mar.09, 2015	Mar.08, 2016
LISN	EMCO	3825/2	8901-1459	Mar.09, 2015	Mar.08, 2016
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	Mar.04, 2015	Mar.03, 2016
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

7. FCC LINE CONDUCTED EMISSION TEST


7.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

7.2. BLOCK DIAGRAM OF TEST SETUP

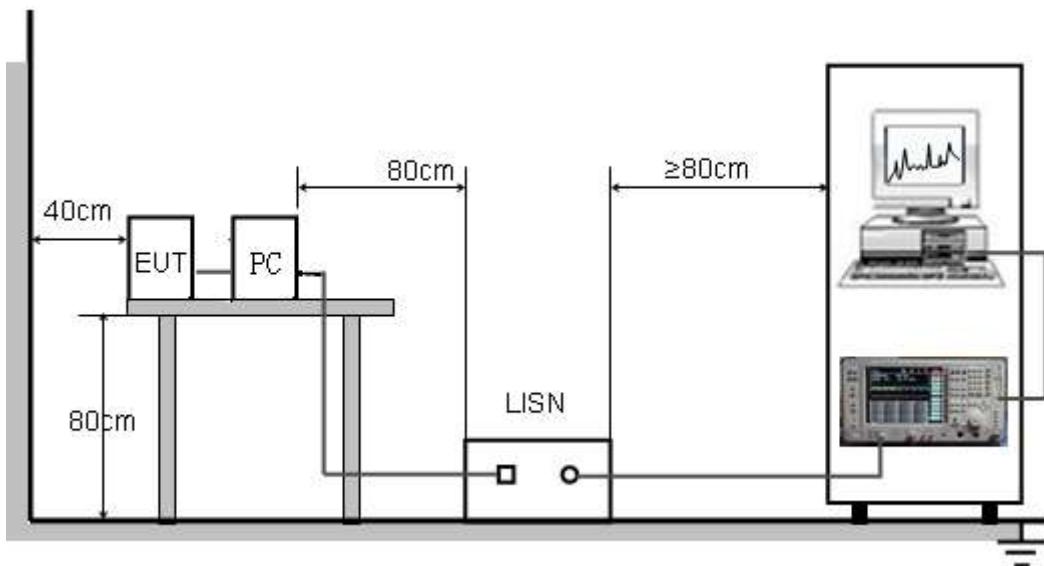


7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received DC5V power from PC with receive AC120V/60Hz power from a LISN.
- (5) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (6) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- (7) During the above scans, the emissions were maximized by cable manipulation.
- (8) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- (9) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.

The test data of the worst case condition (mode 1) was reported on the Summary Data page.


7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST
LINE CONDUCTED EMISSION TEST-L

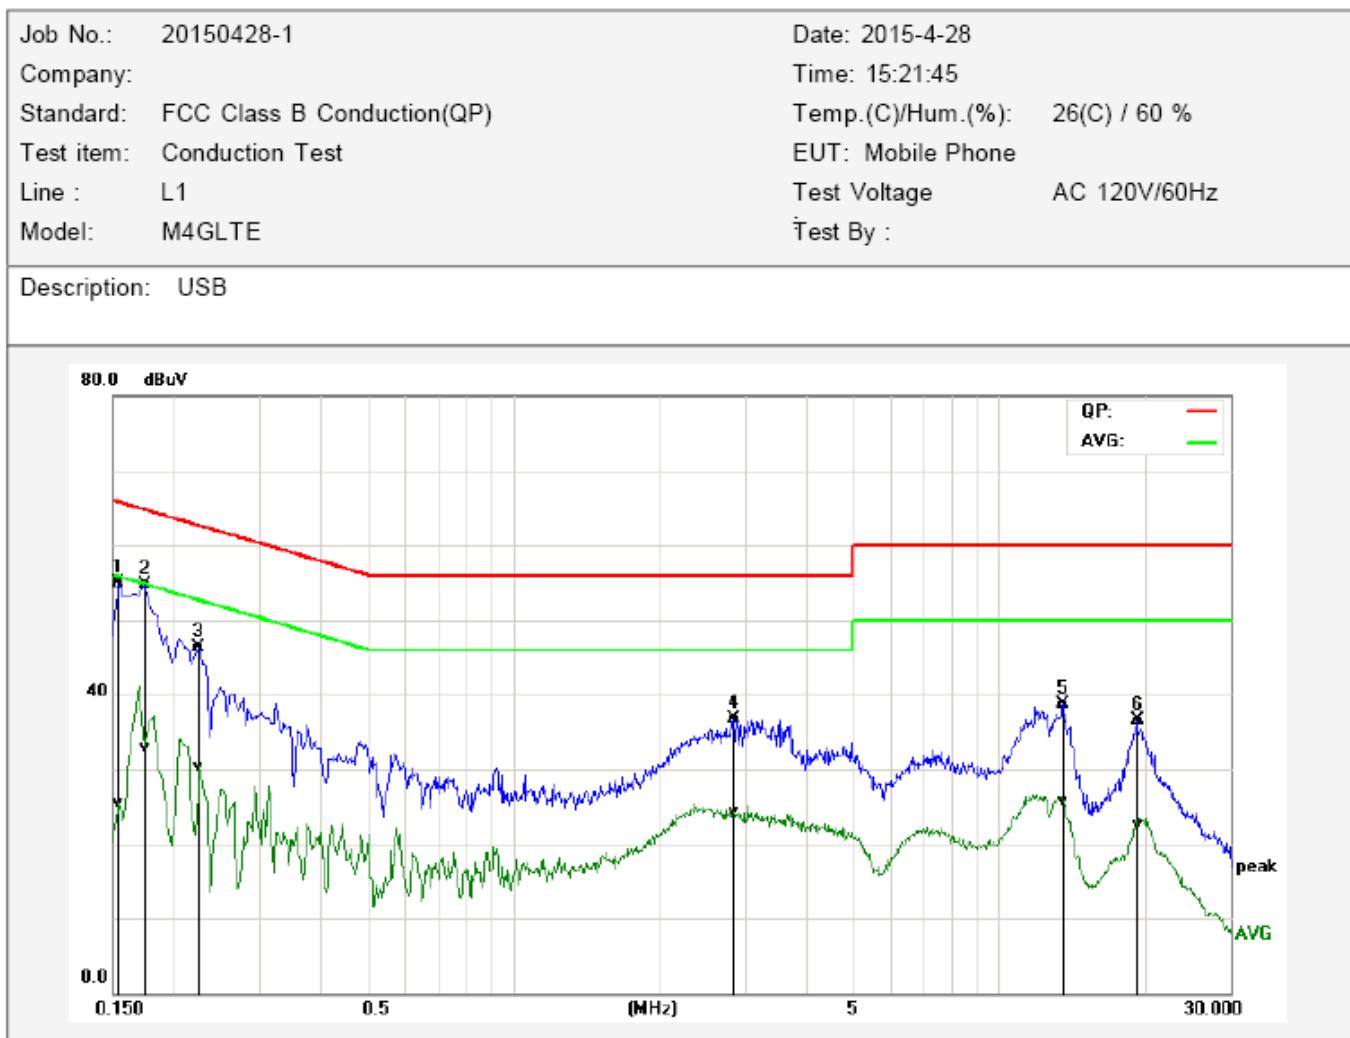

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.1539	45.33	15.85	9.59	54.92	25.44	65.78	55.79	-10.86	-30.35	Pass
2*	0.1740	44.98	23.30	9.63	54.61	32.93	64.76	54.77	-10.15	-21.84	Pass
3P	0.2260	36.67	20.52	9.69	46.36	30.21	62.59	52.60	-16.23	-22.39	Pass
4P	2.8420	26.91	14.57	9.71	36.62	24.28	56.00	46.00	-19.38	-21.72	Pass
5P	13.6100	28.87	15.79	9.90	38.77	25.69	60.00	50.00	-21.23	-24.31	Pass
6P	19.3180	26.59	12.76	9.84	36.43	22.60	60.00	50.00	-23.57	-27.40	Pass

RESULT: PASS

LINE CONDUCTED EMISSION TEST-N

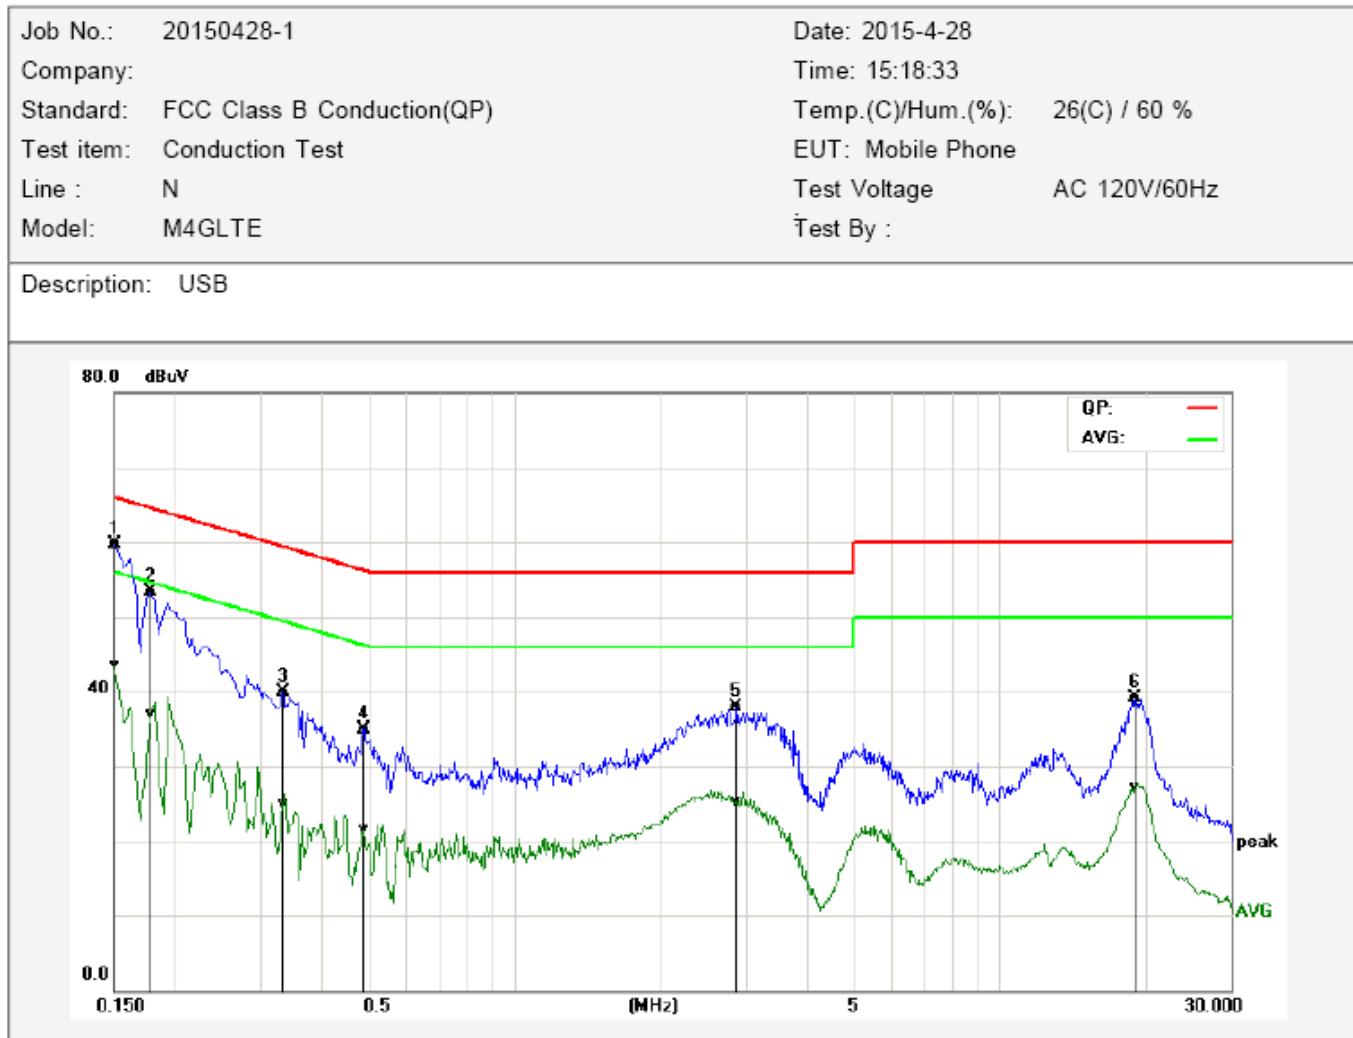

No.	Frequency (MHz)	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading (dBuV)	reading (dBuV)	factor (dB)	result (dBuV)	result (dBuV)	limit (dBuV)	limit (dBuV)	margin (dB)	margin (dB)	
1*	0.1500	49.91	33.81	9.78	59.69	43.59	65.99	56.00	-6.30	-12.41	Pass
2P	0.1780	43.53	27.09	9.79	53.32	36.88	64.57	54.58	-11.25	-17.70	Pass
3P	0.3339	30.22	15.11	9.75	39.97	24.86	59.35	49.35	-19.38	-24.49	Pass
4P	0.4900	25.17	11.92	9.68	34.85	21.60	56.17	46.17	-21.32	-24.57	Pass
5P	2.8740	28.20	15.64	9.74	37.94	25.38	56.00	46.00	-18.06	-20.62	Pass
6P	19.0580	29.46	17.33	9.73	39.19	27.06	60.00	50.00	-20.81	-22.94	Pass

RESULT: PASS

8. FCC RADIATED EMISSION TEST


8.1. LIMITS OF RADIATED EMISSION TEST

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m/ Q.P.)
30~88	3	40.0
88~216	3	43.5
216~960	3	46.0
Above 960	3	54.0

Note: The lower limit shall apply at the transition frequency.

8.2. BLOCK DIAGRAM OF TEST SETUP

System Diagram of Connections between EUT and Simulators

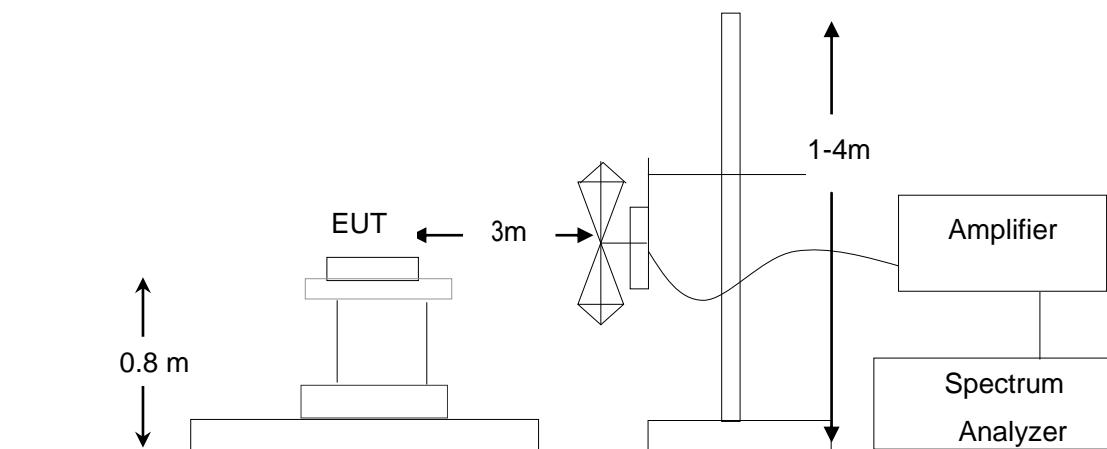

8.3. PROCEDURE OF RADIATED EMISSION TEST


- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received DC 5V power from PC with receive AC120V/60Hz power from socket under the turntable through a LISN.
- (5) The antenna was placed at 3 meter away from the EUT as stated in FCC Part 15. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- (6) The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- (7) The test mode(s) were scanned during the test:
- (8) Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P./Peak reading is presented.

The test data of the worst case condition (mode 1) was reported on the Summary Data page.

8.4. TEST RESULT OF RADIATED EMISSION TEST

Radiated Emission Test at 3m Distance-Horizontal

Job No.:	20150428	Ant.Polar.:	Horizontal
Standard:	FCC Part15 Class B (30-1000MHz)	Test Distance:	3m
Test item:	Radiated Emission Measurement	Power:	AC 120V/60Hz
Temp.(C)/Hum.(%RH):	24(C)/52%RH	Date:2015-4-28	Time:17:09:25
Company:		EUT:	
Model:	M4GLTE	Test By:	Jimmy
Test Mode:	USB		

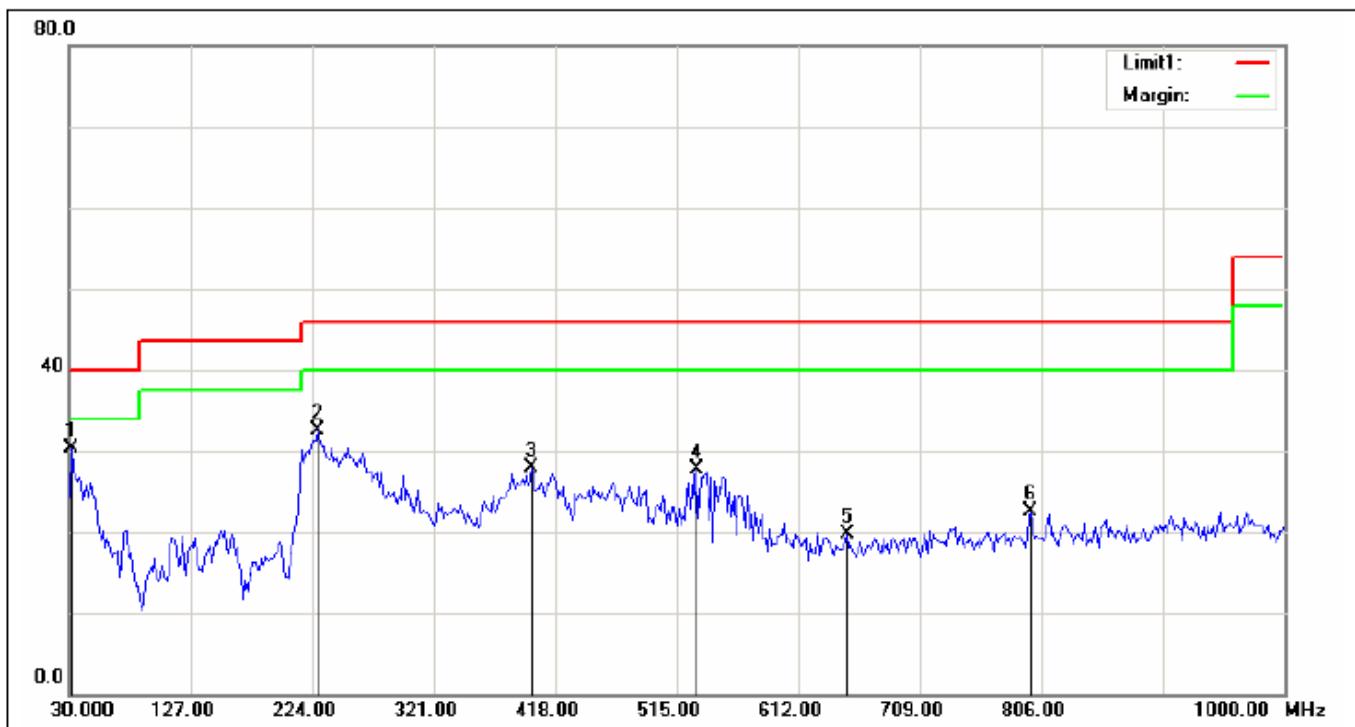


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1*	31.6167	42.90	-12.61	30.29	40.00	-9.71			peak
2	228.8500	54.28	-21.68	32.60	46.00	-13.40			peak
3	398.6000	43.98	-16.14	27.84	46.00	-18.16			peak
4	531.1667	41.59	-13.82	27.77	46.00	-18.23			peak
5	650.8000	32.15	-12.51	19.64	46.00	-26.36			peak
6	797.9167	33.54	-11.13	22.41	46.00	-23.59			peak

RESULT: PASS

Radiated Emission Test at 3m Distance-Vertical

Job No.:	20150428	Ant.Polar.:	Vertical
Standard:	FCC Part15 Class B (30-1000MHz)	Test Distance:	3m
Test item:	Radiated Emission Measurement	Power:	AC 120V/60Hz
Temp.(C)/Hum.(%RH):	24(C)/52%RH	Date:2015-4-28	Time:17:10:21
Company:		EUT:	
Model:	M4GLTE	Test By:	Jimmy
Test Mode:	USB		

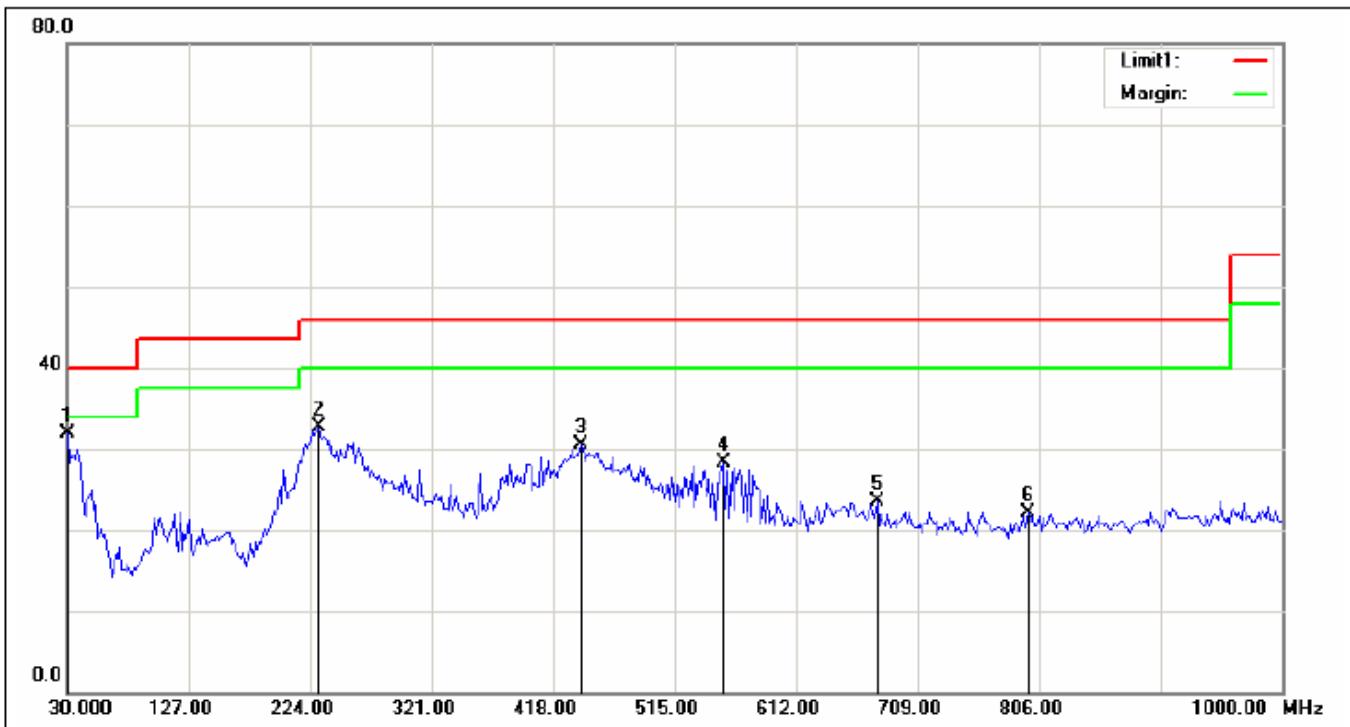

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1*	30.0000	43.62	-11.64	31.98	40.00	-8.02			peak
2	230.4667	54.47	-21.83	32.64	46.00	-13.36			peak
3	440.6333	46.17	-15.67	30.50	46.00	-15.50			peak
4	553.8000	41.38	-13.16	28.22	46.00	-17.78			peak
5	676.6666	35.87	-12.33	23.54	46.00	-22.46			peak
6	797.9166	33.32	-11.13	22.19	46.00	-23.81			peak

RESULT: PASS

Note: All Other modes above 1GHz have more than 20db margin, no recording in the report

Result = Reading + Factor, Margin = Result – Limit.

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP




FCC RADIATED EMISSION TEST SETUP




APPENDIX B: PHOTOGRAPHS OF EUT
TOTAL VIEW OF EUT



TOP VIEW OF EUT

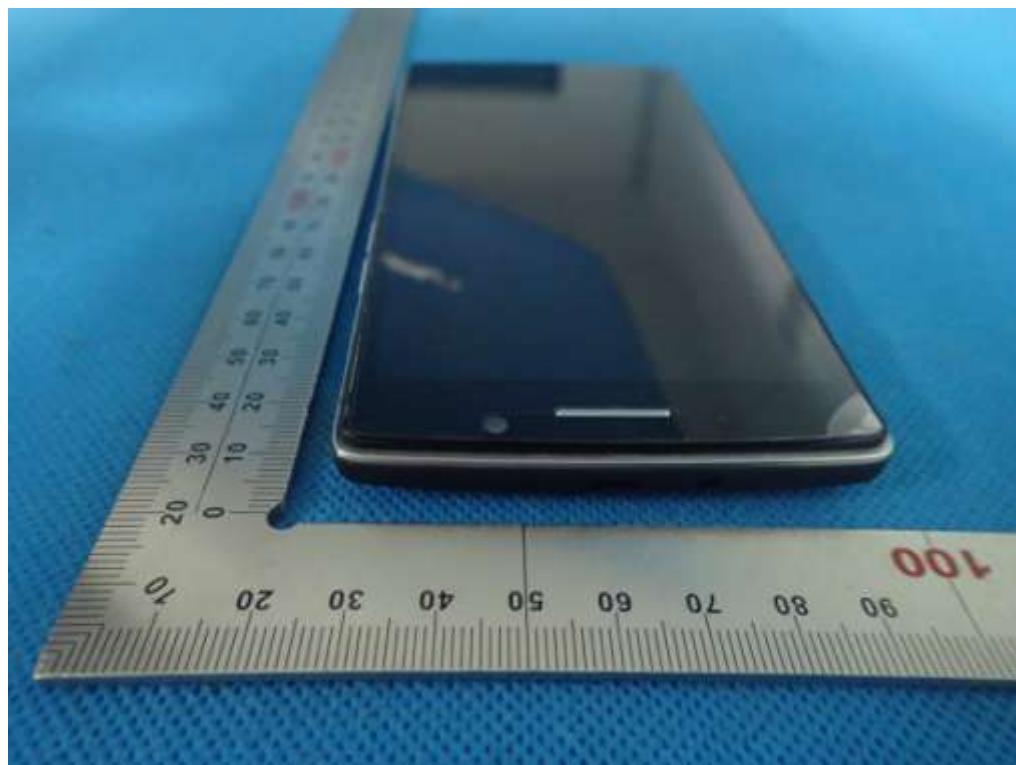

BOTTOM VIEW OF EUT

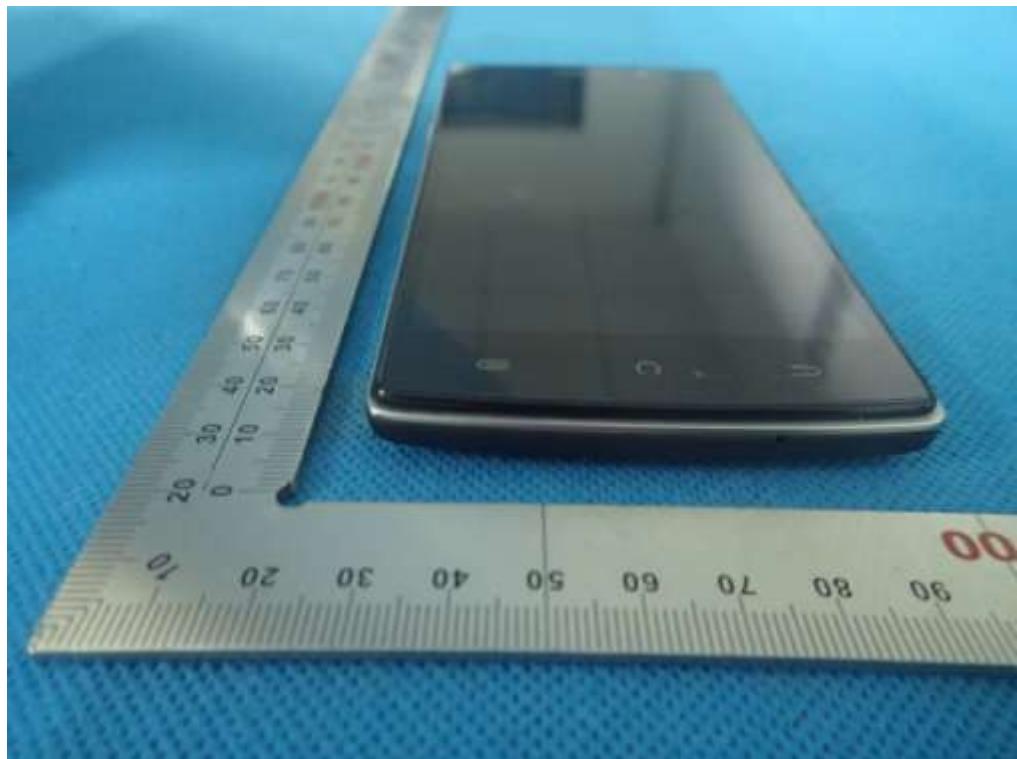

FRONT VIEW OF EUT



BACK VIEW OF EUT




LEFT VIEW OF EUT



RIGHT VIEW OF EUT



OPEN VIEW OF EUT-1

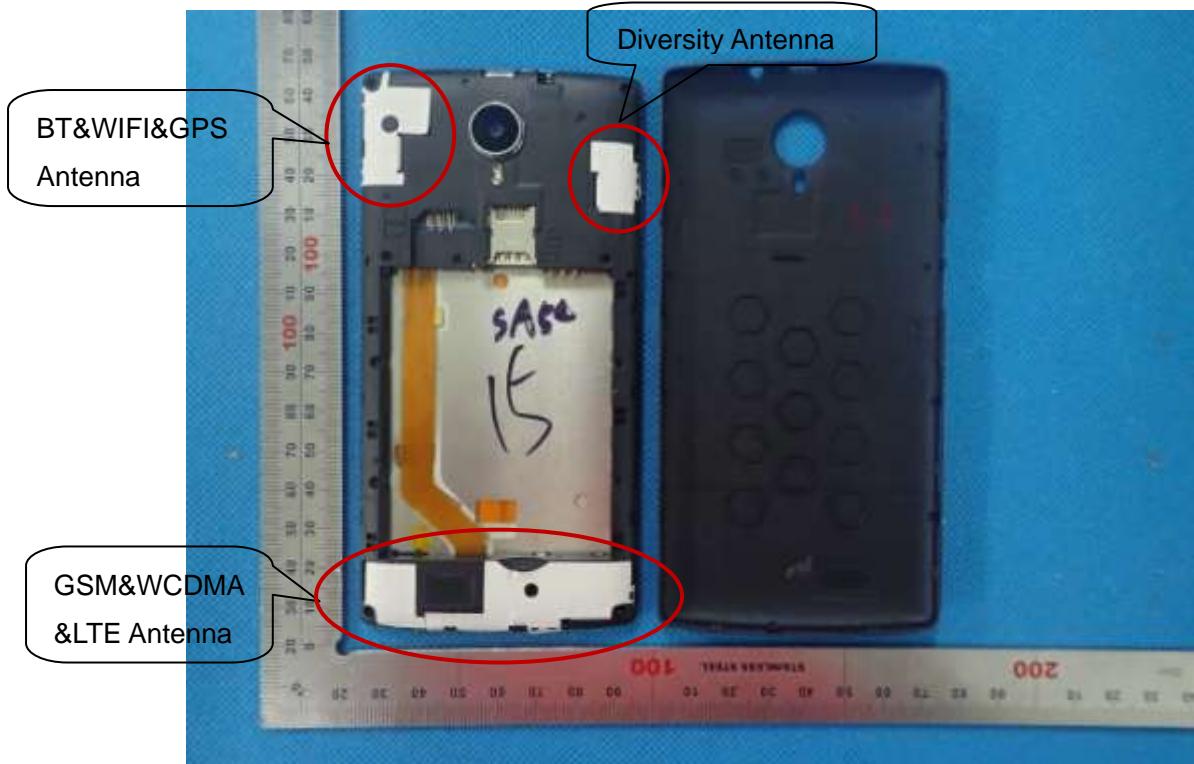


OPEN VIEW OF EUT-2




OPEN VIEW OF EUT-3



INTERNAL VIEW OF EUT-1

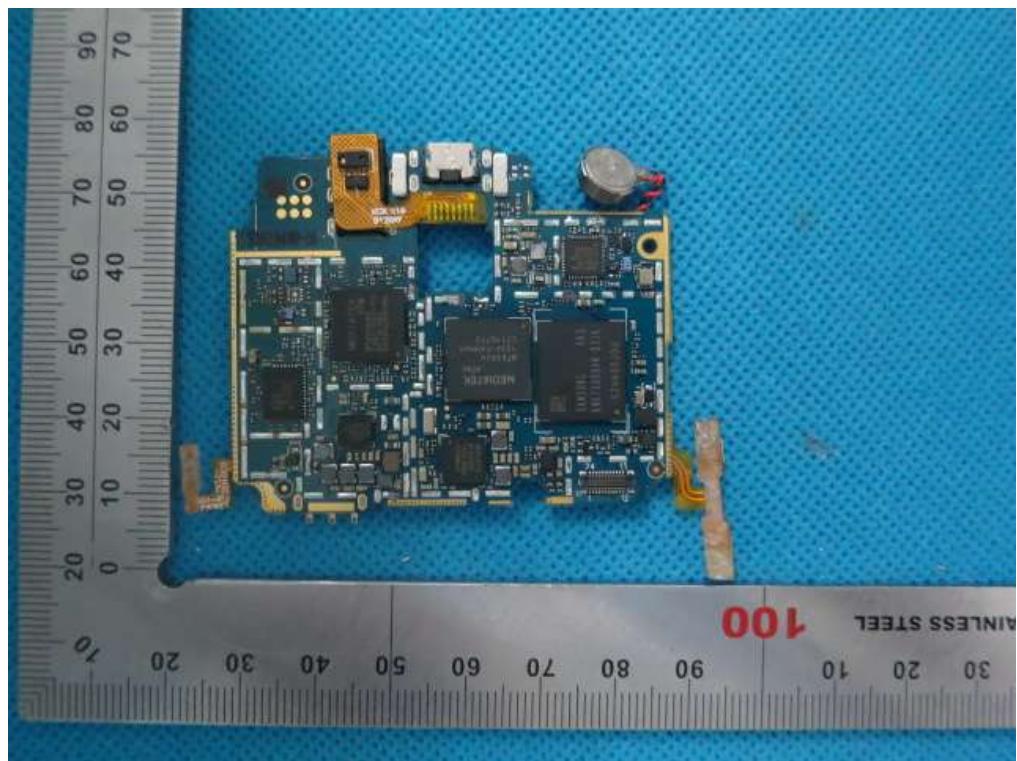

INTERNAL VIEW OF EUT-2

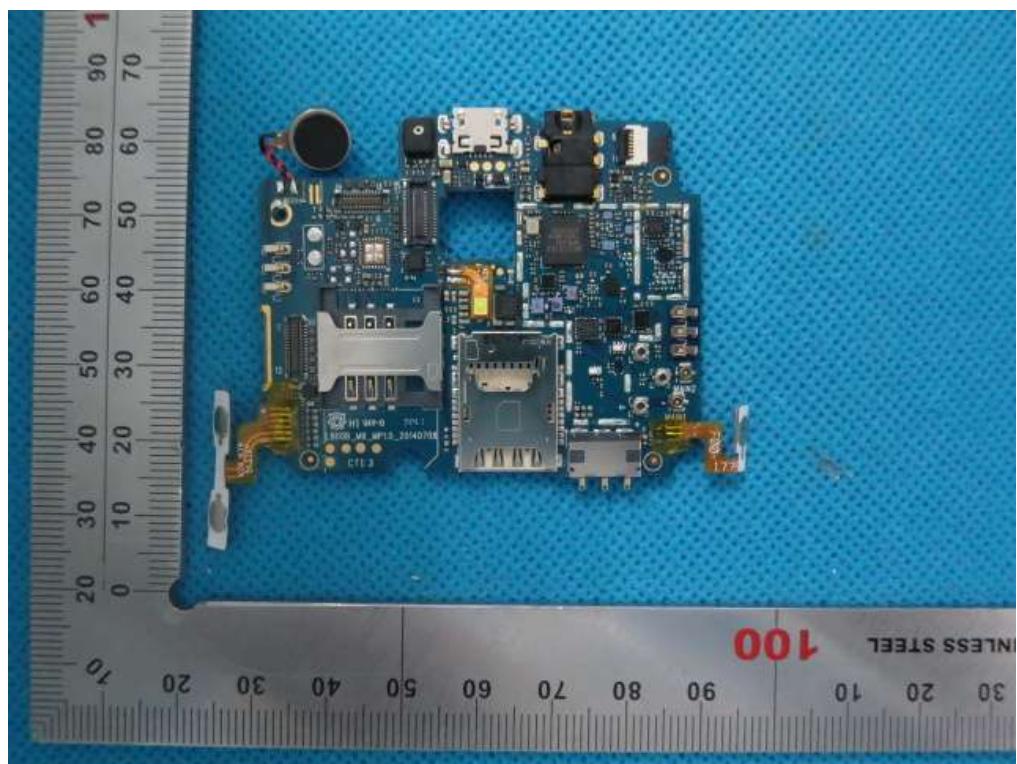

----END OF REPORT----