

# Shenzhen Toby Technology Co., Ltd.

Report No.: TB-FCC143816 Page: 1 of 39

# FCC Radio Test Report FCC ID: 2AEMJSB5-MAIN

# **Original Grant**

Report No. : TB-FCC143816

**Applicant**: SW Technology Limited

**Equipment Under Test (EUT)** 

**EUT Name**: Baby Safety-main unit

Model No. : SB5

Brand Name : N/A

**Receipt Date** : 2015-04-03

**Test Date** : 2015-04-03 to 2015-04-28

**Issue Date** : 2015-04-28

**Standards** : FCC Part 15, Subpart C (15.247:2014)

**Test Method** : ANSI C63.10: 2013

**Conclusions : PASS** 

In the configuration tested, the EUT complied with the standards specified above,

The EUT technically complies with the FCC and IC requirements

Test/Witness


Engineer

Approved&

Authorized

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

TB-RF-074-1.0





Page: 2 of 39

# **Contents**

CO	NTENTS	2
1.	GENERAL INFORMATION ABOUT EUT	4
	1.1 Client Information	4
	1.2 General Description of EUT (Equipment Under Test)	
	1.3 Block Diagram Showing the Configuration of System Tested	
	1.4 Description of Support Units	
	1.5 Description of Test Mode	5
	1.6 Description of Test Software Setting	6
	1.7 Test Facility	7
2.	TEST SUMMARY	8
3.	CONDUCTED EMISSION TEST	9
	3.1 Test Standard and Limit	9
	3.2 Test Setup	9
	3.3 Test Procedure	9
	3.4 Test Equipment Used	10
	3.5 EUT Operating Mode	10
	3.6 Test Data	10
4.	RADIATED EMISSION TEST	10
	4.1 Test Standard and Limit	11
	4.2 Test Setup	12
	4.3 Test Procedure	13
	4.4 EUT Operating Condition	13
	4.5 Test Equipment	14
	4.6 Test Data	14
5.	RESTRICTED BANDS REQUIREMENT	23
	5.1 Test Standard and Limit	23
	5.2 Test Setup	23
	5.3 Test Procedure	23
	5.4 EUT Operating Condition	23
	5.5 Test Equipment	24
	5.6 Test Data	24
6.	BANDWIDTH TEST	30
	6.1 Test Standard and Limit	30
	6.2 Test Setup	30
	6.3 Test Procedure	30
	6.4 EUT Operating Condition	30
	6.5 Test Equipment	
	6.6 Test Data	31
<b>7</b> .	PEAK OUTPUT POWER TEST	33



Page: 3 of 39

	7.1 Test Standard and Limit	33
	7.2 Test Setup	33
	7.3 Test Procedure	
	7.4 EUT Operating Condition	33
	7.5 Test Equipment	33
	7.6 Test Data	34
8.	POWER SPECTRAL DENSITY TEST	36
	8.1 Test Standard and Limit	36
	8.2 Test Setup	
	8.3 Test Procedure	36
	8.4 EUT Operating Condition	36
	8.5 Test Equipment	
	8.6 Test Data	
9.	ANTENNA REQUIREMENT	39
	9.1 Standard Requirement	39
	9.2 Antenna Connected Construction	
	9.3 Result	



Page: 4 of 39

# 1. General Information about EUT

#### 1.1 Client Information

**Applicant**: SW Technology Limited

Address : Room A206 2nd Floor, Building 24, Science and Technology Park

Industrial Esate, Keyuan Road #5, Nanshan, Shenzhen, China

Manufacturer : SW Technology Limited

Address : Room A206 2nd Floor, Building 24, Science and Technology Park

Industrial Esate, Keyuan Road #5, Nanshan, Shenzhen, China

#### 1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	Baby Safety-main unit	Baby Safety–main unit		
Models No.		SB5	SB5		
Model Difference	:	N/A			
		Operation Frequency: 2402MHz~2480MHz			
Draduct		Number of Channel:	Bluetooth 4.0 (BLE): 40 channels see note(3)		
Product Description		RF Output Power:	4.12 dBm Conducted Power		
		Antenna Gain:	1 dBi Integral Antenna		
		Modulation Type:	GFSK		
		Bit Rate of Transmitter:	1Mbps(GFSK)		
Power Supply	:	DC power by battery			
Power Rating	:	DC 3V by 2*1.5V AAA Battery.			
Connecting I/O Port(S)	:	Please refer to the User's Manual			

#### Note:

- (1) This Test Report is FCC Part 15.247 for Bluetooth BLE, the test procedure follows the FCC KDB 558074 D01 DTS Meas Guidance v03r02.
- (2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (3) Antenna information provided by the applicant.
- (4) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460



Page: 5 of 39

02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

## 1.3 Block Diagram Showing the Configuration of System Tested

#### **TX Mode**

EUT

## 1.4 Description of Support Units

The EUT has been tested as an independent unit.

# 1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test				
Final Test Mode	Description			
Mode 1	TX Mode			



Report No.: TB-FCC143816 Page: 6 of 39

For Radiated Test			
Final Test Mode	Description		
Mode 2	TX Mode		
Mode 3	TX Mode		
Mode 3	(Channel 00/20/39)		

#### Note:

(1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

According to ANSI C63.4 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

Bluetooth BLE Mode: GFSK Modulation Transmitting mode.

- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a mobile unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

#### 1.6 Description of Test Software Setting

During testing channel& Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF setting.

Product SW/HW Version :		N/A	
Radio SW/HW Version:	N/A		
Test Software Version	Bluetooth Test.exe		
Frequency	2402 MHz	2480 MHz	
GFSK	DEF	DEF	DEF
π/4-DQPSK	DEF	DEF	DEF
8-DPSK	DEF	DEF	DEF



Page: 7 of 39

#### 1.7 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U <sub>Lab</sub> )	
	Level Accuracy:		
Conducted Emission	9kHz~150kHz	±3.42 dB	
	150kHz to 30MHz	±3.42 dB	
Radiated Emission	Level Accuracy:	+4.60 dB	
Radiated Emission	9kHz to 30 MHz	±4.60 db	
Dedicted Emission	Level Accuracy:	14 40 dD	
Radiated Emission	30MHz to 1000 MHz	±4.40 dB	
Dadioted Emission	Level Accuracy:	+4.20 dB	
Radiated Emission	Above 1000MHz	±4.20 UD	

#### 1.8 Test Facility

The testing was performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at:

1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China.

At the time of testing, the following bodies accredited the Laboratory:

#### **CNAS (L5813)**

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

#### FCC List No.: (811562)

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562.

#### IC Registration No.: (11950A-1)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

#### IC Registration No.: (11950A-1)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.



Page: 8 of 39

# 2. Test Summary

FCC Part 15 Subpart C(15.247)/RSS-210: 2010					
Standar	d Section	Test Item	Judgment	Remark	
FCC	IC	rest item	Juagment	Remark	
15.203	1	Antenna Requirement	PASS	N/A	
15.207 RSS-GEN 7.2.4 Conducted Emission			N/A	N/A	
15.205 RSS-GEN 7.2.2 Restricted Bands		PASS	N/A		
15.247(a)(2)	RSS-210 A.8.2(a)	6dB Bandwidth	PASS	N/A	
15.247(b) RSS-210 A.8.4(4)		Peak Output Power	PASS	N/A	
15.247(e) RSS-210 A.8.2(b)		Power Spectral Density	PASS	N/A	
15.247(d)	RSS-210 Annex 8 (A8.5)	Transmitter Radiated Spurious Emission	PASS	N/A	

**Note:** "/" for no requirement for this test item.

N/A is an abbreviation for Not Applicable.



Page: 9 of 39

## 3. Conducted Emission Test

#### 3.1 Test Standard and Limit

3.1.1Test Standard FCC Part 15.207

#### 3.1.2 Test Limit


#### **Conducted Emission Test Limit**

Fraguency	Maximum RF Line Voltage (dBμV)		
Frequency	Quasi-peak Level	Average Level	
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

#### Notes:

- (1) \*Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 3.2 Test Setup

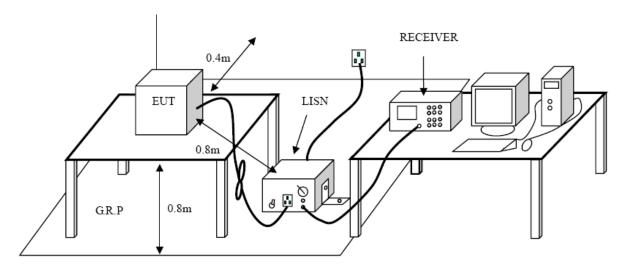

#### 3.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.



Page: 10 of 39

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

## 3.4 Test Equipment Used

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test	ROHDE&		400004	Aug. 08, 2014	Aug. 07, 2015
Receiver	SCHWARZ	ESCI	100321	Aug. 00, 2014	Aug. 07, 2015
50ΩCoaxial	Anritsu	MP59B	X10321	Aug. 08, 2014	Aug. 07, 2015
Switch	Aillitsu	MESSE	X10321	Aug. 08, 2014	Aug. 07, 2015
L.I.S.N	Rohde & Schwarz	ENV216	101131	Aug. 08, 2014	Aug. 07, 2015
L.I.S.N	SCHWARZBECK	NNBL 8226-2	8226-2/164	Aug. 08, 2014	Aug. 07, 2015

# 3.5 EUT Operating Mode

Please refer to the description of test mode.

#### 3.6 Test Data

The test is not applicable.



Page: 11 of 39

# 4. Radiated Emission Test

#### 4.1 Test Standard and Limit

4.1.1 Test Standard FCC Part 15.209

4.1.2 Test Limit

#### Radiated Emission Limits (9kHz~1000MHz)

Radiated Emission Emits (5KHZ-1000MHz)							
Frequency (MHz	Field Strength (microvolt/meter)	Measurement Distance (meters)					
0.009~0.490	2400/F(KHz)	300					
0.490~1.705	24000/F(KHz)	30					
1.705~30.0	30	30					
30~88	100	3					
88~216	150	3					
216~960	200	3					
Above 960	500	3					

#### Radiated Emission Limit (Above 1000MHz)

Frequency	Class A (dBuV	/m)(at 3 M)	Class B (dBuV	//m)(at 3 M)
(MHz)	Peak	Average	Peak	Average
Above 1000	80	60	74	54


#### Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)




Page: 12 of 39

# 4.2 Test Setup

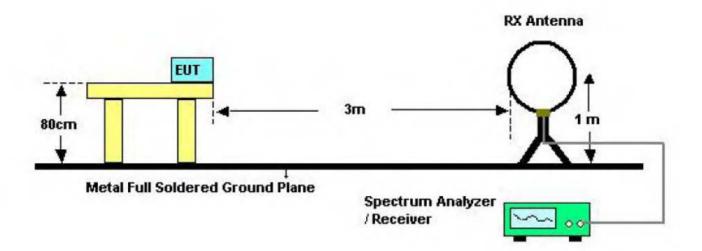


Below 30MHz Test Setup

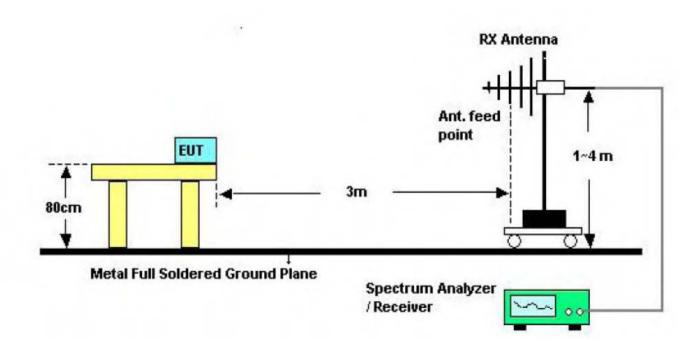

Below 1000MHz Test Setup

Report No.: TB-FCC143816
Page: 13 of 39



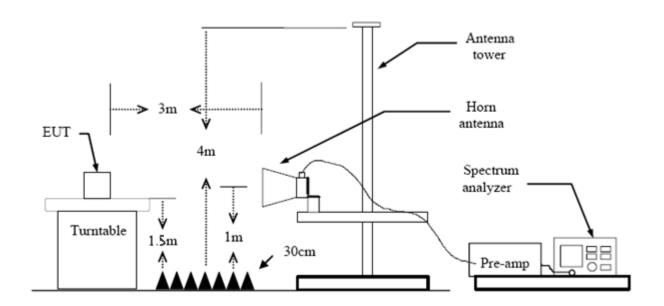

Above 1GHz Test Setup

#### 4.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.



Page: 14 of 39

# 4.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

# 4.5 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Aug. 08, 2014	Aug. 07, 2015
Spectrum Analyzer	Rohde & Schwarz	FSP30	DE25181	Aug. 08, 2014	Aug. 07, 2015
EMI Test Receiver	Rohde & Schwarz	ESCI	101165	Aug. 08, 2014	Aug. 07, 2015
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar. 06, 2015	Mar.05, 2016
Bilog Antenna	ETS-LINDGREN	3142E	00117542	Mar. 06, 2015	Mar.05, 2016
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar. 06, 2015	Mar.05, 2016
Horn Antenna	ETS-LINDGREN	3117	00143209	Mar. 06, 2015	Mar.05, 2016
Pre-amplifier	HP	11909A	185903	Mar. 06, 2015	Mar.05, 2016
Pre-amplifier	HP	8447B	3008A00849	Mar. 06, 2015	Mar.05, 2016
Cable	HUBER+SUHNE R	100	SUCOFLEX	Mar. 06, 2015	Mar.05, 2016
Signal Generator	Rohde & Schwarz	SML03	IKW682-054	Feb. 10, 2015	Feb.09, 2016
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A

#### 4.6 Test Data


Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=1 kHz with Peak Detector for Average Values.

Test data please refer the following pages.



Page: 15 of 39

EUT:	Baby Safety-main unit	Model:	SB5				
Temperature:	25 ℃	Relative Humidity:	55%				
Test Voltage:	DC 3V						
Ant. Pol.	Horizontal	Horizontal					
Test Mode:	BLE TX 2402 Mode						
Remark:	Only worse case is reported	Only worse case is reported					

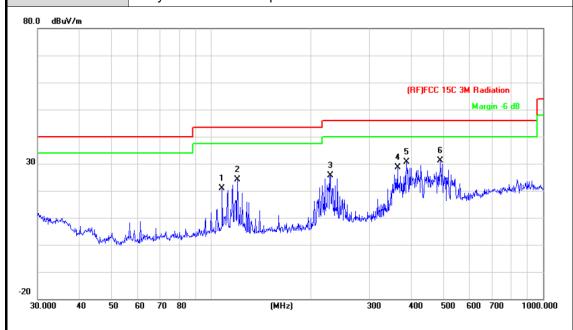

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB	Detector
1		107.8877	42.72	-21.86	20.86	43.50	-22.64	peak
2		119.8556	46.70	-22.50	24.20	43.50	-19.30	peak
3	:	228.4904	44.86	-19.15	25.71	46.00	-20.29	peak
4	;	364.2595	43.25	-14.52	28.73	46.00	-17.27	peak
5	,	387.9920	44.30	-13.60	30.70	46.00	-15.30	peak
6	* '	489.0269	42.83	-11.65	31.18	46.00	-14.82	peak


<sup>\*:</sup>Maximum data x:Over limit !:over margin



16 of 39 Page:

7		D	77
		IK	Υ
<u> </u>	. •	_	-

EUT:	Baby Safety-main unit	Model:	SB5				
Temperature:	25 ℃	Relative Humidity:	55%				
Test Voltage:	DC 3V	DC 3V					
Ant. Pol.	Vertical						
Test Mode:	BLE TX 2402 Mode						
Remark:	Only worse case is reported						
80.0 dBuV/m							

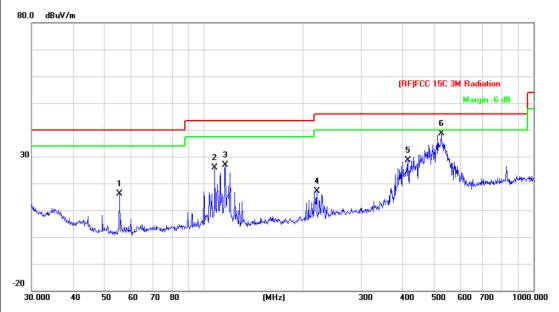


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		55.4147	40.56	-24.47	16.09	40.00	-23.91	peak
2		107.8877	47.86	-21.86	26.00	43.50	-17.50	peak
3		116.1321	49.04	-22.26	26.78	43.50	-16.72	peak
4		219.8449	36.60	-19.54	17.06	46.00	-28.94	peak
5		416.1791	41.53	-12.88	28.65	46.00	-17.35	peak
6	*	524.5541	48.82	-10.17	38.65	46.00	-7.35	peak

<sup>\*:</sup>Maximum data x:Over limit !:over margin




EUT: Model: SB5 Baby Safety-main unit Temperature: **25** ℃ **Relative Humidity:** 55% DC 3V **Test Voltage:** Ant. Pol. Horizontal **Test Mode:** BLE Mode TX 2402 MHz Remark: No report for the emission which more than 10 dB below the prescribed limit.

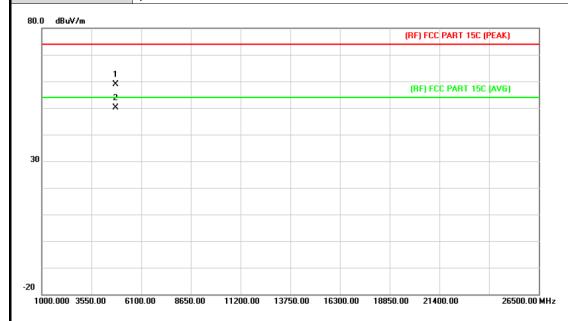

N	o. Ml	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4803.733	45.52	13.44	58.96	74.00	-15.04	peak
2	*	4803.967	36.69	13.44	50.13	54.00	-3.87	AVG



EUT: Model: SB5 Baby Safety-main unit Temperature: **25** ℃ **Relative Humidity:** 55% DC 3V **Test Voltage:** Ant. Pol. Vertical **Test Mode:** BLE Mode TX 2402 MHz Remark: No report for the emission which more than 10 dB below the prescribed limit.

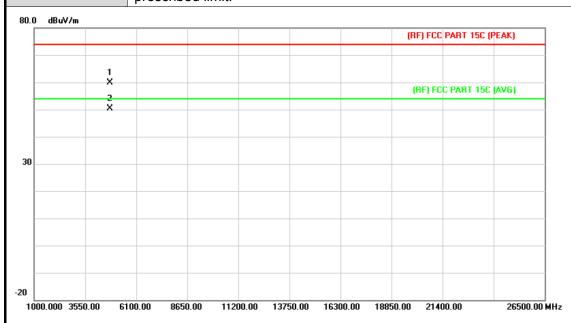

	No.	Mk.	Freq.	Reading Level		Measure- ment	Limit	Over	
			MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
_	1		4803.913	46.51	13.44	59.95	74.00	-14.05	peak
_	2	*	4803.973	37.06	13.44	50.50	54.00	-3.50	AVG



EUT: Baby Safety-main unit Model: SB5

Temperature: 25 °C Relative Humidity: 55%


Test Voltage: DC 3V

Ant. Pol. Horizontal

Test Mode: BLE Mode TX 2442 MHz

Remark:

No report for the emission which more than 10 dB below the prescribed limit.

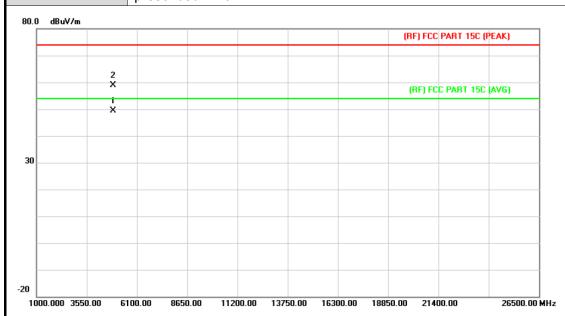


	No.	Mk.	Freq.	_	Correct Factor	Measure- ment	Limit	Over	
			MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
-	1	*	4883.934	35.45	13.92	49.37	54.00	-4.63	AVG
	2		4884.000	45.05	13.92	58.97	74.00	-15.03	peak



20 of 39 Page:

EUT:	Baby Safety-main unit	Model:	SB5				
Temperature:	25 ℃	Relative Humidity:	55%				
Test Voltage:	DC 3V	DC 3V					
Ant. Pol.	Vertical						
Test Mode:	BLE Mode TX 2442 MHz						
Remark:	No report for the emissio prescribed limit.	n which more than 10 c	dB below the				

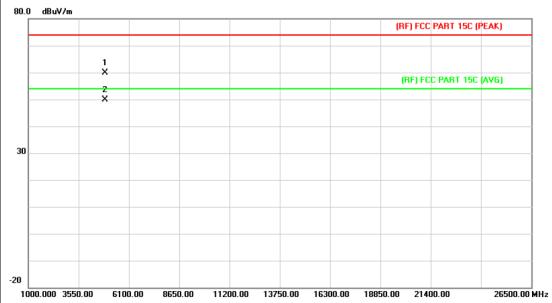


N	О.	Mk.	Freq.	_	Correct Factor	Measure- ment	Limit	Over	
			MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1			4883.745	46.06	13.92	59.98	74.00	-14.02	peak
2	,	*	4883.979	36.01	13.92	49.93	54.00	-4.07	AVG



21 of 39 Page:


EUT:	Baby Safety-main unit	Model:	SB5							
Temperature:	25 ℃	Relative Humidity:	55%							
Test Voltage:	DC 3V									
Ant. Pol.	Horizontal	Horizontal								
Test Mode:	BLE Mode TX 2480 MHz									
Remark:	No report for the emissio	No report for the emission which more than 10 dB below the								
	prescribed limit.									

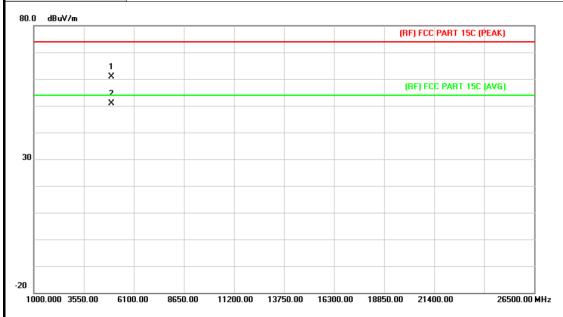

N	Ο.	Mk.	Freq.	Reading Level		Measure- ment	Limit	Over	
			MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1			4959.418	46.64	14.36	61.00	74.00	-13.00	peak
2	5	k	4960.063	36.58	14.36	50.94	54.00	-3.06	AVG



EUT: Model: SB5 Baby Safety-main unit Temperature: **25** ℃ **Relative Humidity:** 55% DC 3V **Test Voltage:** Ant. Pol. Vertical **Test Mode:** BLE Mode TX 2480 MHz Remark: No report for the emission which more than 10 dB below the prescribed limit.

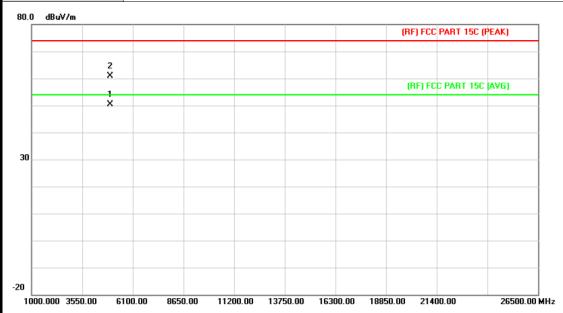

No	. Mk	. Freq.	•	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4960.018	36.10	14.36	50.46	54.00	-3.54	AVG
2		4960.027	46.61	14.36	60.97	74.00	-13.03	peak



Page: 23 of 39

# 5. Restricted Bands Requirement


#### 5.1 Test Standard and Limit

5.1.1 Test Standard FCC Part 15.209 FCC Part 15.205

#### 5.1.2 Test Limit

Restricted Frequency	Class B (dBuV/m)(at 3 M)							
Band (MHz)	Peak	Average						
2310 ~2390	74	54						
2483.5 ~2500	74	54						

#### 5.2 Test Setup

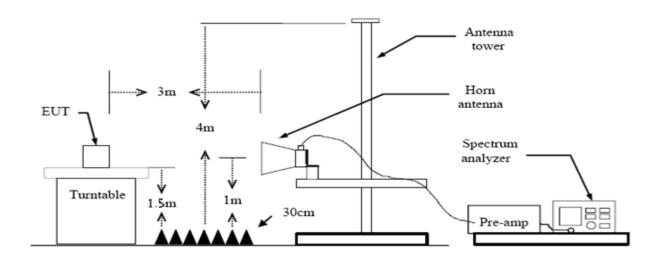

#### 5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked



Page: 24 of 39

and then Quasi Peak detector mode re-measured.

- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

#### 5.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

#### 5.5 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Aug. 08, 2014	Aug. 07, 2015
Spectrum Analyzer	Rohde & Schwarz	FSP30	DE25181	Aug. 08, 2014	Aug. 07, 2015
EMI Test Receiver	Rohde & Schwarz	ESCI	101165	Aug. 08, 2014	Aug. 07, 2015
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar. 06, 2015	Mar. 05, 2016
Bilog Antenna	ETS-LINDGREN	3142E	00117542	Mar. 06, 2015	Mar. 05, 2016
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar. 06, 2015	Mar. 05, 2016
Horn Antenna	ETS-LINDGREN	3117	00143209	Mar. 06, 2015	Mar. 05, 2016
Pre-amplifier	HP	11909A	185903	Mar. 06, 2015	Mar. 05, 2016
Pre-amplifier	HP	8447B	3008A00849	Mar. 06, 2015	Mar. 05, 2016
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar. 06, 2015	Mar. 05, 2016
Signal Generator	Rohde & Schwarz	SML03	IKW682-054	Feb. 10, 2015	Feb.09, 2016
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A

#### 5.6 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=1 kHz with Peak Detector for Average Values.

Test data please refer the following pages.





(1) Radiation Test

UT:			Baby	/ Safety-mai	in unit	Model:		SB5	
em	peratu	re:	25 °	C		Relative	<b>Humidity:</b>	55%	
est	Voltag	e:	DC 3	BV					
nt.	Pol.		Horiz	zontal					
est	Mode:		BLE	Mode TX 24	02 MHz				
em	ark:		N/A						
110.0	) dBu∀/m								
								4 3	
								$\Lambda$	
							(RF) FCC PAI	RT 15C (PEA	K)
60							(BE) ECC P	ART 15C (AV	6)
						1 /	ant rac pay	<u> </u>	
							× //		
							2 X	<u>_</u>	·
10.0 23	17.000 23	27.00	2337.00	2347.00 235	7.00 2367.00	2377.00	2387.00 2397.00		2417.00 MI
				Reading	Correct	Measure-			
Ν	lo. Mk	. Fr	eq.	Level	Factor	ment	Limit	Over	
		M	Hz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detecto
1		2390	.000	46.74	0.77	47.51	74.00	-26.49	peal
2		2390	.000	32.32	0.77	33.09	54.00	-20.91	AVG
3	*	2402	.000	90.66	0.82	91.48	Fundamental F	requency	AVG
4	Χ	2402	.200	95.31	0.82	96.13	Fundamental F	requency	peal





UT:			Baby	Safety-ma	in unit	Model:		SB5					
em	peratu	re:	25 °C	C		Relative	Humidity:	55%					
est	Voltag	je:	DC 3	V				'					
\nt.	Pol.		Verti	cal									
est	Mode		BLE	Mode TX 24	180 MHz								
Rem	ark:		N/A										
110.0	dBuV/m												
-								4 ¥					
								Ň					
							(RF) FCC PA	RT 15C (PEAK	)				
60													
						(RF) FCC F	ART 15C (AVG	1					
							^						
						Λ	2 X	L.					
-													
10.0	17.000 23	27 00	2337.00	2347.00 235	7.00 2367.00	2377.00 2	387.00 2397.00	1 2	417.00 MH				
			2001.00	2011.00		2011.00	2001.00	_					
				Reading	Correct	Measure-							
Ν	lo. Mk	. F	req.	Level	Factor	ment	Limit	Over					
		N	ИHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detecto				
1		2390	0.000	48.55	0.77	49.32	74.00	-24.68	peak				
2		2390	0.000	31.86	0.77	32.63	54.00	-21.37	AVG				
3	*	240	1.900	87.72	0.82	88.54	Fundamental I	requency	AVG				
4	Х	2402	2.000	92.12	0.82	92.94	Fundamental I	Frequency	peak				



EUT: Baby Safety-main unit Model: SB5 Temperature: **25** ℃ **Relative Humidity:** 55% **Test Voltage:** DC 3V Ant. Pol. Horizontal **Test Mode:** BLE Mode TX 2480 MHz Remark: N/A 100.0 dBuV/m 2 **X** (RF) FCC PART 15C (PEAK) (RF) FCC PART 15C (AVG) 50 2565.00 MHz 2465.000 2475.00 2485.00 2495.00 2505.00 2515.00 2525.00 2535.00 2545.00 Reading Correct Measure-Over Limit No. Mk. Freq. Level Factor ment dBuV MHz dBuV/m dBuV/m dΒ Detector dB/m 2479.800 87.07 88.22 AVG 1 1.15 **Fundamental Frequency** 2 92.70 Χ 2480.000 91.55 1.15 peak **Fundamental Frequency** 3 2483.500 59.62 1.17 60.79 74.00 -13.21 peak 4 2483.500 46.78 1.17 47.95 54.00 -6.05 AVG



Page: 28 of 39




UT:			Bab	y Safet	y–ma	in unit	M	odel:			S	B5		
emp	eratu	re:	25	$^{\circ}$ C			R	elativ	e Hu	midity	: 5	5%		
est \	Voltag	e:	DC	3V										
\nt. F	Pol.		Vert	ical										
est I	Mode:		BLE	Mode	TX 24	480 MH	Z							
Rema	ark:		N/A											
100.0	dBuV/m													
		1 X												]
		Å								(R	F) FCC F	PART 15C (PE/	AK)	
			3								BE) FCC	PART 15C (A)	v6)	
50		X X								,,,,,,	TAIT 13C (A	,,,		
	- manual Man	/	more			~	<u> </u>	~		<b>~</b>			e/\	4
0.0 2465	.000 247	5.00 2	2485.00	2495.00	250	5.00 25	15.00	252	5.00	2535.00	2545.	00	2565.00	_ MH
No	o. Mk.	Fr	eq.	Read Lev	_	Corre			asure ent	- Lin	nit	Over		
		MI	Hz	dBı	ιV	dB/m			uV/m	dBı	uV/m	dB	Detec	cto
1	Х	2479	.900	91.	84	1.15		92	2.99	Funda	mental	Frequency	pea	ak
2	*	2479	.900	87.	68	1.15		88	3.83	Funda	mental	Frequency	ΑV	'G
3		2483	.500	54.	28	1.17	,	55	5.45	74	.00	-18.55	pea	ak
4		2483	.500	47.	36	1.17	,	48	3.53	54	.00	-5.47	ΑV	'G
		1	D '		. 0-	rect Fa	-4-							





Page: 29 of 39

#### (2) Conducted Test

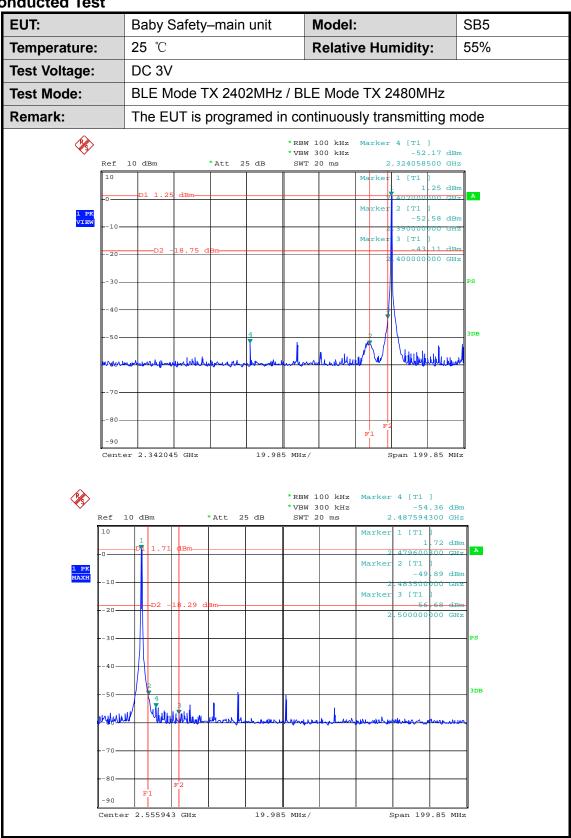



Page: 30 of 39

#### 6. Bandwidth Test


#### 6.1 Test Standard and Limit

6.1.1 Test Standard FCC Part 15.247 (a)(2)

6.1.2 Test Limit

FCC P	art 15 Subpart C(15.247)/R	SS-210
Test Item	Limit	Frequency Range(MHz)
Bandwidth	>=500 KHz (6dB bandwidth)	2400~2483.5

#### 6.2 Test Setup



#### 6.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (3)Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:100 kHz, and Video Bandwidth:300 kHz, Detector: Peak, Sweep Time set auto.

# 6.4 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, middle and high channel for the test.

# 6.5 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Aug. 08, 2014	Aug.07, 2015




Page: 31 of 39

# 6.6 Test Data

EUT:		Bab	y Safe	ety-n	nain u	nit	Мо	del				SB5		
Temperature	<b>)</b> :	25	$^{\circ}$				Rel	ativ	∕e Hu	ımidi	ty:	55%		
Test Voltage	:	DC	3V			·								
Test Mode:		BLE	TX M	lode										
Channel fre	quenc	у	6dB	Ban	dwidt	:h	99	9%	Ban	dwidt		Lim	nit	
(MHz	)			(kH	z)				(kHz	z)		(kHz)		
2402				720.	00		1032.00							
2442					1032.00						>=5	00		
2480			702.00					1032.00						
		BLE Mode												
					:	2402	MHz	2						
						* RBW	100 }	Hz	Delta	1 [T1 ]	1			
<b>**</b>	Ref 10	dBm		*Att	25 dB		300 l		720	000000	0.26 dE			
	10 Off	et 2	đВ						OBW 1		000 MH			
1 PK MAXH	-0	D1 -3.	18 dBm-		<b></b>	-				. 401626		m. A		
MAXH	-10	D2	-9.18 dB	T1	/			T2	Temp 1	-16	3W] 5.15 dE 1000 GH			
	20			/				P	Temp 2	[T1 OF	BW]	im		
	30		/							.402516	5000 GH	PS		
	40		<b>-</b>						\					
		/										3DB		
	50 Nh										M.			
	60													
	70											_		
	-80						F2							
	-90			F										
	Center :	2.402 (	SHz		300	0 kHz/				Sp	an 3 M	Hz		
Date:	28.AP	R.2015	09:2	2:28										



Page: 32 of 39

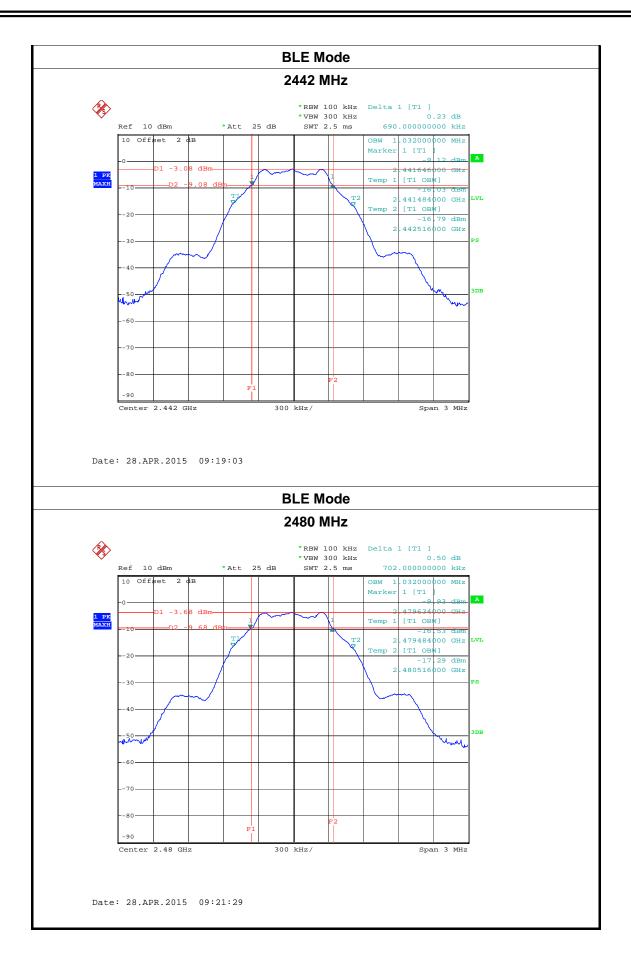



Page: 33 of 39

# 7. Peak Output Power Test


#### 7.1 Test Standard and Limit

7.1.1 Test Standard FCC Part 15.247 (b)

#### 7.1.2 Test Limit

FCC Part 15 Subpart C(15.247)/RSS-210				
Test Item	Limit	Frequency Range(MHz)		
Peak Output Power	1 Watt or 30 dBm	2400~2483.5		

#### 7.2 Test Setup



#### 7.3 Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement is according to section 9.1.1 of KDB 558074 D01 DTS Meas Guidance v03r02.

- (1) Set the RBW≥DTS Bandwidth
- (2) Set VBW≥3\*RBW
- (3) Set Span≥3\*RBW
- (4) Sweep time=auto
- (5) Detector= peak
- (6) Trace mode= maxhold.
- (7) Allow trace to fully stabilize, and then use peak marker function to determine the peak amplitude level.

## 7.4 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

# 7.5 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Aug. 08, 2014	Aug.07, 2015




Report No.: TB-FCC143816
Page: 34 of 39

7.6 Test Data

EUT:	Bab	Baby Safety-main un			nit	Model:			SB5		
Temperature:	25	25 ℃				Relative Humidity:			55%		
Test Voltage:	DC	DC 3V									
Test Mode:	BLE	TX N	/lode								
Channel freque	ency (N	cy (MHz) Test F			Resul	Result (dBm)			Limit (dBm)		
2402					4.01	4.01					
2442					4.12	2			30		
2480					4.09	)					
			<u> </u>	В	LE M	ode					
				2	402 N	ИHz					
•											
\$ <u>\$</u> \$					*RBW 1	8 MHz			.01 dBm		
Ref	10 dBm	1	*Att 2	5 dB	SWT 2	2.5 ms	2	.401982	000 GHz	1	
10				1							
-0				1			-			A	
1 PK				1							
-0				1						A	
1 PK				1						<b>A</b>	
1 PK MAXH				1						PS	
-0				1							
-0 -0 -0 -0 -0 -0 -0 -0 -0 -0 -0 -0 -0 -				1						PS	
-0											
-0 -0 -0 -0 -0 -0 -0 -0 -0 -0 -0 -0 -0 -										PS	
-20										PS	
-0 -0 -0 -0 -0 -0 -0 -0 -0 -0 -0 -0 -0 -										PS	
-20										PS	



Page: 35 of 39

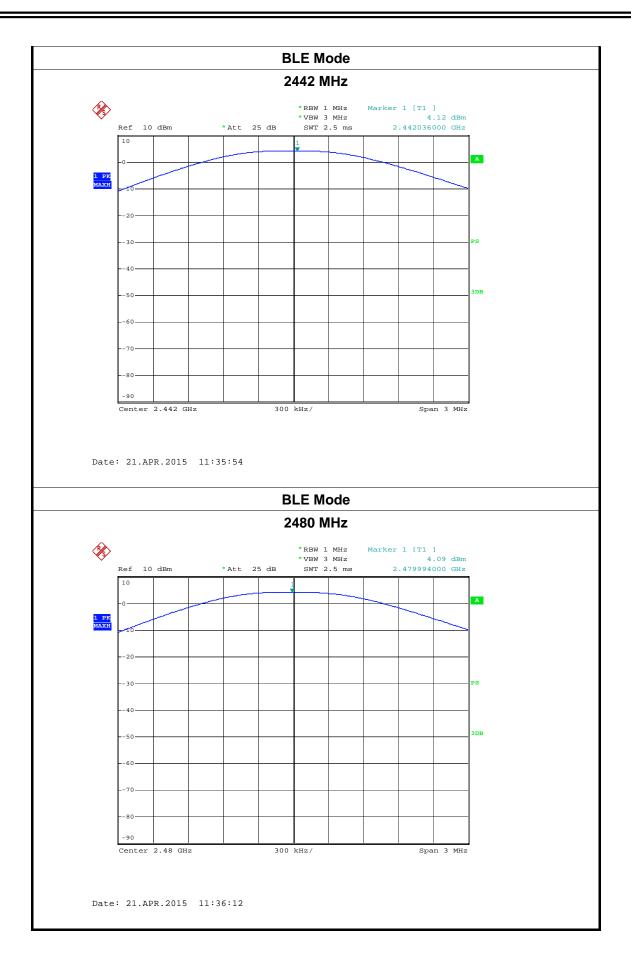



Page: 36 of 39

# 8. Power Spectral Density Test


#### 8.1 Test Standard and Limit

8.1.1 Test Standard FCC Part 15.247 (e)

8.1.2 Test Limit

FCC Part 15 Subpart C(15.247)					
Test Item	Limit	Frequency Range(MHz)			
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5			

#### 8.2 Test Setup



#### 8.3 Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v03r02.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyser center frequency to DTS channel center frequenyc.
- (3) Set the span to 1.5 times the DTS bandwidth.
- (4) Set the RBW to: 3 kHz(5) Set the VBW to: 10 kHz
- (6) Detector: peak (7) Sweep time: auto
- (8) Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

# 8.4 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, Midle and high channel for the test.



Report No.: TB-FCC143816
Page: 37 of 39

# 8.5 Test Equipment


Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum	Agilent	E4407B	MY45106456	Aug. 08, 2014	Aug.07, 2015
Analyzer	3	L4407B		3 11,	3 3 7 7 3

# 8.6 Test Data

EUT:	Baby Safe	ety-main unit	Model:		SB5	
Temperature:	25 ℃		Relative Humidity:		55%	
Test Voltage:	DC 3V		-			
Test Mode:	BLE TX Mode					
Channel Frequency	uency	Power	Density		Limit (dBm)	
(MHz)		(3 kH	z/dBm)			
2402			.43			
2442	2442		.49		8	
2480			.32			
			Mode			
		2402	2 MHz			
		* RI	BW 3 kHz Mark	ter 1 [T1 ]		
Ref 10	dBm		BW 10 kHz TT 90 ms	-7.43 d 2.402011200 d		
10					A	
1 PK		1				
-10	~	MMMMM	WWW.	4		
20	manda	Man Man	1 M. AM MIN	M rus.	,	
\\\\_30\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	V V V V			Way Can	PS	
40						
50					3DB	
60						
70						
80						
-90 Center	2.402 GHz	80 kHz/		Span 800	kHz	
Date: 21 Ap	R.2015 11:1	1:42				
		· <del>-</del>				



Page: 38 of 39

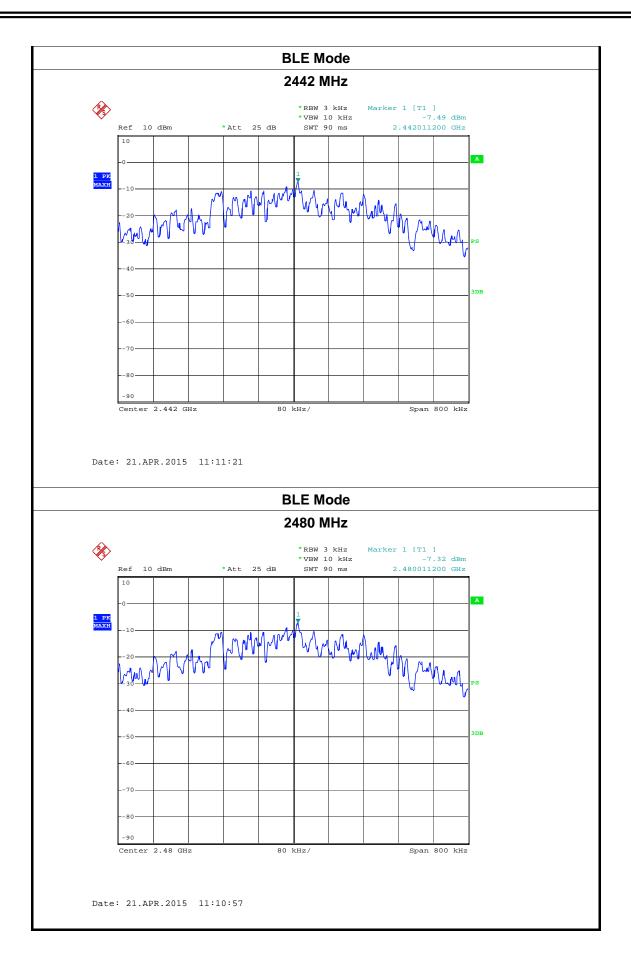



Page: 39 of 39

# 9. Antenna Requirement

#### 9.1 Standard Requirement

9.1.1 Standard FCC Part 15.203

#### 9.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 9.2 Antenna Connected Construction

The directional gains of the antenna used for transmitting is 1 dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

#### 9.3 Result

The EUT antenna is a Dipole Integral Antenna. It complies with the standard requirement.

A	ntenna Type
▼ Permanent atta	ached antenna
□ Unique connec	tor antenna
□ Professional	installation antenna