

# RF TEST REPORT



Report No.: 15050006-FCC-R1

Applicant	Fenghua Tiancheng Plastic Electronics Co.,Ltd	
Product Name	INTELLIGENT CONTROLLER	
Model No.	CRZ-8X8	
Test Standard	FCC Part 15.249: 2014; C63.10: 2013	
Test Date	May 07 to June 03, 2015	
Issue Date	June 04, 2015	
Test Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
Wiky Jam	Chris You	
Wiky Jam Test Engineer	Chris You Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	15050006-FCC-R1
Page	3 of 34

This page has been left blank intentionally.

## CONTENTS

1. REPORT REVISION HISTORY .....	5
2. CUSTOMER INFORMATION .....	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	6
5. TEST SUMMARY .....	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....	9
6.1 ANTENNA REQUIREMENT.....	9
6.2 AC LINE CONDUCTED EMISSIONS .....	10
6.3 RADIATED SPURIOUS EMISSIONS .....	14
6.4 FIELD STRENGTH MEASUREMENT .....	18
6.5 20DB BANDWIDTH TESTING.....	20
6.6 BAND EDGE.....	22
ANNEX A. TEST INSTRUMENT.....	24
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	25
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	30
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST .....	33
ANNEX E. DECLARATION OF SIMILARITY .....	34

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
15050006-FCC-R1	NONE	Original	June 04, 2015

## 2. Customer information

Applicant Name	Fenghua Tiancheng Plastic Electronics Co.,Ltd
Applicant Add	No.66 Dongfeng Road Fenghua Zhejiang China
Manufacturer	Fenghua Tiancheng Plastic Electronics Co.,Ltd
Manufacturer Add	No.66 Dongfeng Road Fenghua Zhejiang China

## 3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

#### **4. Equipment under Test (EUT) Information**

Description of EUT: INTELLIGENT CONTROLLER

Main Model: CRZ-8X8

Serial Model: N/A

Date EUT received: April 09, 2015

Test Date(s): May 07 to June 03, 2015

Antenna Gain: WIFI: -0.5 dBi  
15.249: 4.5 dBi

Input Power: AC 120V 60Hz

Trade Name : CRZ

FCC ID: 2AENLCRZ

Test Report No.	15050006-FCC-R1
Page	7 of 34

Port: Power Port,

Equipment Category : DXT

Type of Modulation: 802.11b/g/n: DSSS, OFDM  
15.249: DSSS

RF Operating Frequency (ies): WIFI:802.11b/g/n(20M): 2412-2462 MHz  
WIFI:802.11n(40M): 2422-2452 MHz  
15.249: 1 Channel

## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.249(a), §15.249(d)	Radiated Fundamental / Radiated Spurious Emissions	Compliance
§15.249(a)	Field Strength Measurement	Compliance
§15.249©	20 dB Bandwidth	Compliance
§15.249(d)	Band Edge	Compliance

### Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

## **6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS**

### **6.1 Antenna Requirement**

#### **Standard Requirement:**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

#### **Antenna Connector Construction**

The EUT has 2 antennas:

A Whip antenna, the gain is 4.5 dBi for ZIGBEE.


A Whip antenna, the gain is -0.5 dBi for WIFI.

**The antenna meets up with the ANTENNA REQUIREMENT.**

**Test Result: Pass**

## 6.2 AC Line Conducted Emissions

Temperature	24°C
Relative Humidity	62%
Atmospheric Pressure	1012mbar
Test date :	May 28, 2015
Tested By :	Wiky Jam

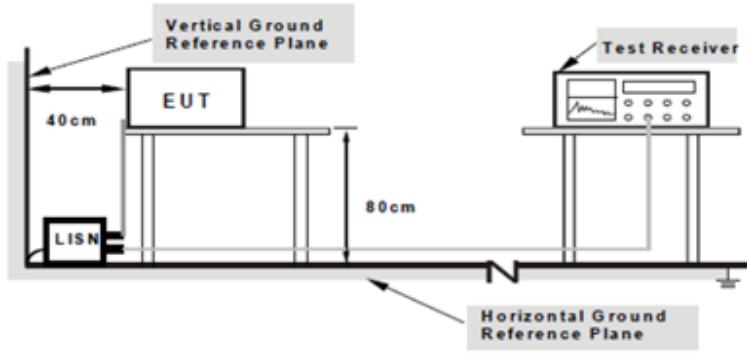
Spec	Item	Requirement	Applicable														
§15.207	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dB<math>\mu</math>V)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB $\mu$ V)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB $\mu$ V)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup			 <p><b>Note:</b></p> <ol style="list-style-type: none"> <li>1. Support units were connected to second LISN.</li> <li>2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</li> </ol>														
Procedure			<ol style="list-style-type: none"> <li>1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li> <li>2. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</li> <li>3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</li> </ol>														

	<ol style="list-style-type: none"> <li>4. All other supporting equipment were powered separately from another main supply.</li> <li>5. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.</li> <li>7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.</li> <li>8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).</li> </ol>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

**Test Data**     Yes       N/A

**Test Plot**     Yes (See below)       N/A


Test Mode:	Transmitting Mode
------------	-------------------

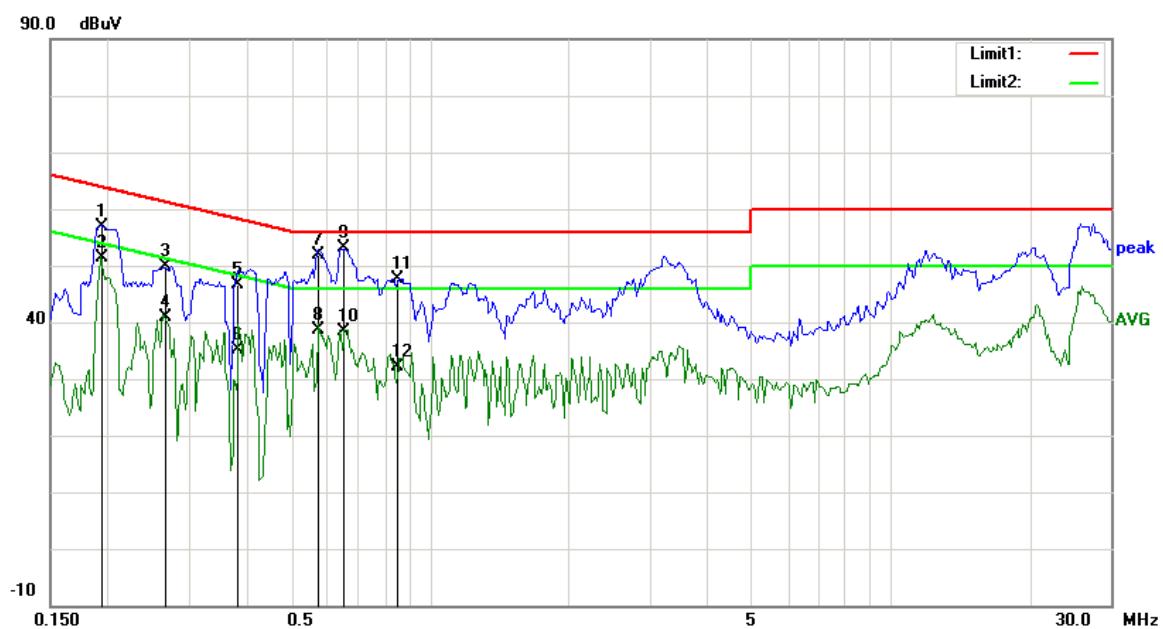

### Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dB $\mu$ V/m)	Detector	Corrected (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1	L1	0.1945	43.83	QP	13.03	56.86	63.84	-6.98
2	L1	0.1945	38.34	AVG	13.03	51.37	53.84	-2.47
3	L1	0.2672	37.04	QP	12.76	49.80	61.20	-11.40
4	L1	0.2672	28.00	AVG	12.76	40.76	51.20	-10.44
5	L1	0.3844	34.39	QP	12.33	46.72	58.18	-11.46
6	L1	0.3844	22.82	AVG	12.33	35.15	48.18	-13.03
7	L1	0.5731	40.04	QP	11.83	51.87	56.00	-4.13
8	L1	0.5731	26.76	AVG	11.83	38.59	46.00	-7.41
9	L1	0.6539	41.26	QP	11.75	53.01	56.00	-2.99
10	L1	0.6539	26.51	AVG	11.75	38.26	46.00	-7.74
11	L1	0.8483	36.08	QP	11.55	47.63	56.00	-8.37
12	L1	0.8483	20.46	AVG	11.55	32.01	46.00	-13.99

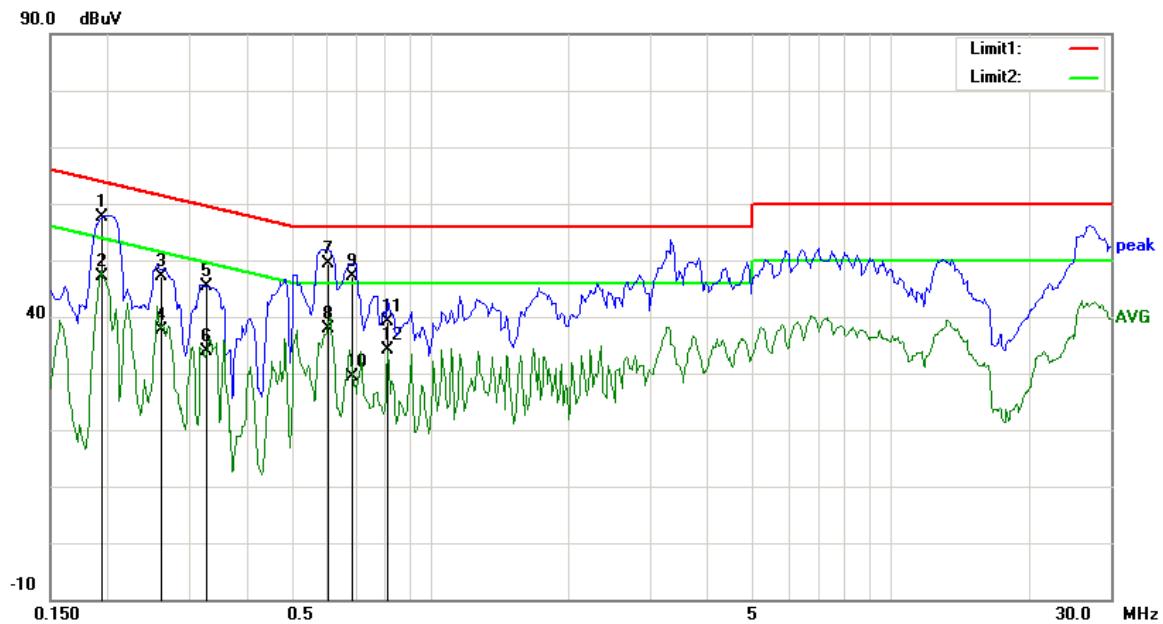

### Test Data


Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dB $\mu$ V/m)	Detector	Corrected (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1	N	0.1945	44.59	QP	13.03	57.62	63.84	-6.22
2	N	0.1945	34.13	AVG	13.03	47.16	53.84	-6.68
3	N	0.2594	34.23	QP	12.79	47.02	61.45	-14.43
4	N	0.2594	24.73	AVG	12.79	37.52	51.45	-13.93
5	N	0.3268	32.89	QP	12.54	45.43	59.53	-14.10
6	N	0.3268	21.24	AVG	12.54	33.78	49.53	-15.75
7	N	0.6070	37.66	QP	11.79	49.45	56.00	-6.55
8	N	0.6070	26.18	AVG	11.79	37.97	46.00	-8.03
9	N	0.6790	35.41	QP	11.72	47.13	56.00	-8.87
10	N	0.6790	17.67	AVG	11.72	29.39	46.00	-16.61
11	N	0.8102	27.46	QP	11.59	39.05	56.00	-16.95
12	N	0.8102	22.44	AVG	11.59	34.03	46.00	-11.97

## 6.3 Radiated Spurious Emissions

Temperature	24°C
Relative Humidity	62%
Atmospheric Pressure	1012mbar
Test date :	May 28, 2015
Tested By :	Wiky Jam

### Requirement(s):

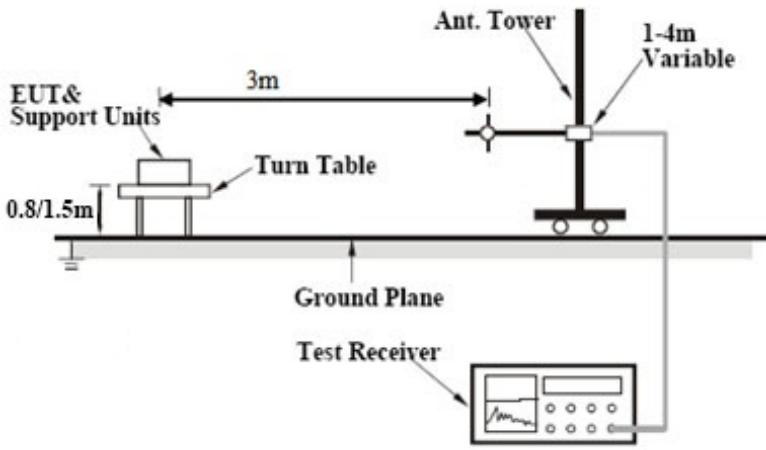Spec	Requirement	Applicable															
§15.209, §15.205, §15.249(a) & §15.249(d)	<p>The emissions from the Low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges.</p> <p>The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:</p> <table border="1"> <thead> <tr> <th>Fundamental frequency</th> <th>Field strength of fundamental (millivolts/meter)</th> <th>Field strength of harmonics (microvolts/meter)</th> </tr> </thead> <tbody> <tr> <td>902– 928 MHz</td> <td>50</td> <td>500</td> </tr> <tr> <td>2400– 2483.5 MHz</td> <td>50</td> <td>500</td> </tr> <tr> <td>5725– 5875 MHz</td> <td>50</td> <td>500</td> </tr> <tr> <td>24.0– 24.25 GHz</td> <td>250</td> <td>2500</td> </tr> </tbody> </table>	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)	902– 928 MHz	50	500	2400– 2483.5 MHz	50	500	5725– 5875 MHz	50	500	24.0– 24.25 GHz	250	2500	<input checked="" type="checkbox"/>
Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)															
902– 928 MHz	50	500															
2400– 2483.5 MHz	50	500															
5725– 5875 MHz	50	500															
24.0– 24.25 GHz	250	2500															
Test Setup	 <p>The diagram illustrates the test setup for radiated spurious emissions. An 'EUT &amp; Support Units' is mounted on a 'Turn Table' at a height of '0.8/1.5m' above a 'Ground Plane'. The turn table is positioned 3m away from an 'Ant. Tower' which is connected to a '1-4m Variable' antenna. A 'Test Receiver' is connected to the turn table to measure the emissions.</p>																
Procedure	<ul style="list-style-type: none"> <li>- Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function</li> <li>- For emission frequencies measured below 1GHz, a pre-scan is performed in a</li> </ul>																


	<p>shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1GHZ, a pre-scan also be performed with a meter measuring distance before final test.</p> <ul style="list-style-type: none"> <li>- For emission frequencies measured below and above 1GHz, set the spectrum analyzer on a 100kHz and 1MHz resolution bandwidth respectively for each frequency measured in step 2.</li> <li>- The search antenna is to be raised and lowered over a range from 1 to 4m in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, the change the orientation of EUT on the test table over a range from 0 to 360°. With a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.</li> <li>- Repeat step 4 until all frequencies need to be measured was complete.</li> <li>- Repeat step5 with search antenna in vertical polarized orientations.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A

**Test Mode:** Transmitting Mode

**(Below 1GHz)**

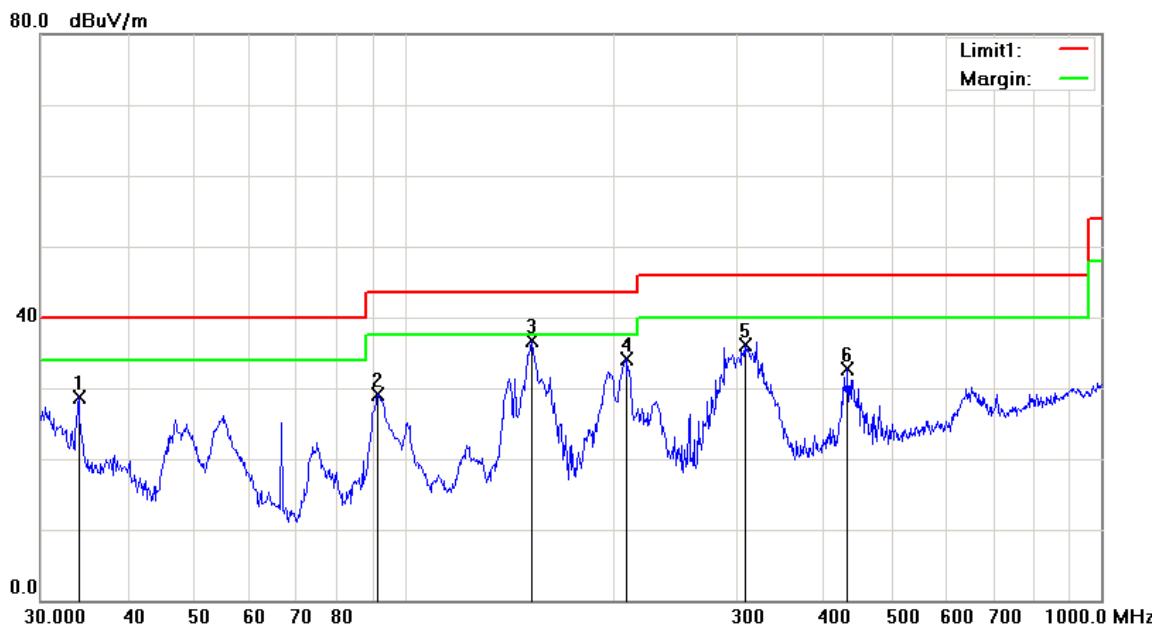

**Test Data**

**Horizontal Polarity Plot @3m**

No.	P/L	Frequency (MHz)	Reading (dB $\mu$ V/m)	Detector	Corrected (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Degree (°)
1	H	34.0365	31.87	peak	-3.24	28.63	40.00	-11.37	188	360
2	H	91.4949	42.19	peak	-13.00	29.19	43.50	-14.31	200	154
3	H	152.1297	45.03	peak	-8.38	36.65	43.50	-6.85	200	110
4	H	207.8501	42.89	peak	-8.81	34.08	43.50	-9.42	200	20
5	H	307.8313	42.69	peak	-6.68	36.01	46.00	-9.99	100	343
6	H	432.5457	36.11	peak	-3.50	32.61	46.00	-13.39	100	231



### Test Data

#### Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBµV/m)	Detector	Corrected (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Degree (°)
1	V	30.6234	38.35	QP	-0.72	37.63	40.00	-2.37	100	121
2	V	47.8994	45.48	QP	-12.24	33.24	40.00	-6.76	100	1
3	V	54.4876	45.39	QP	-13.70	31.69	40.00	-8.31	100	241
4	V	91.9744	47.60	QP	-12.88	34.72	43.50	-8.78	100	57
5	V	193.7728	40.61	peak	-9.04	31.57	43.50	-11.93	200	269
6	V	304.6100	39.07	peak	-6.77	32.30	46.00	-13.70	100	192

#### Above 1GHz


#### Channel (2470 MHz)

Frequency (MHz)	SA Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4940	35.41	AV	V	34.6	6.76	31.92	44.85	54	-9.15
4940	34.72	AV	H	34.7	6.76	31.92	44.26	54	-9.74
4940	48.59	PK	V	34.6	6.76	31.92	58.03	74	-15.97
4940	47.94	PK	H	34.7	6.76	31.92	57.48	74	-16.52

## 6.4 Field Strength Measurement

Temperature	25°C
Relative Humidity	59%
Atmospheric Pressure	1010 mbar
Test date :	May 13, 2015
Tested By :	Wiky Jam

### Requirement(s):

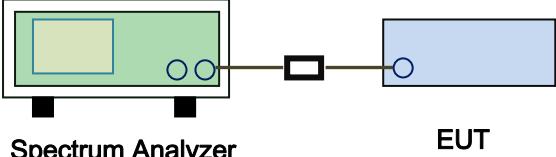
Spec	Requirement	Applicable																					
§15.249(a)	<table border="1"> <tr> <td>Fundamental frequency</td> <td>Field strength of fundamental (millivolts/meter)</td> <td>Field strength of harmonics (microvolts/meter)</td> <td></td> </tr> <tr> <td>902–928 MHz .....</td> <td>50</td> <td>500</td> <td><input checked="" type="checkbox"/></td> </tr> <tr> <td>2400–2483.5 MHz .....</td> <td>50</td> <td>500</td> <td></td> </tr> <tr> <td>5725–5875 MHz .....</td> <td>50</td> <td>500</td> <td></td> </tr> <tr> <td>24.0–24.25 GHz .....</td> <td>250</td> <td>2500</td> <td></td> </tr> </table>	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)		902–928 MHz .....	50	500	<input checked="" type="checkbox"/>	2400–2483.5 MHz .....	50	500		5725–5875 MHz .....	50	500		24.0–24.25 GHz .....	250	2500			
Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)																					
902–928 MHz .....	50	500	<input checked="" type="checkbox"/>																				
2400–2483.5 MHz .....	50	500																					
5725–5875 MHz .....	50	500																					
24.0–24.25 GHz .....	250	2500																					
Test Setup	 <b>Spectrum Analyzer</b> <b>EUT</b>																						
Test Procedure	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.																						
Remark																							
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail																						

Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A


## Field Strength Measurement

**Average:**

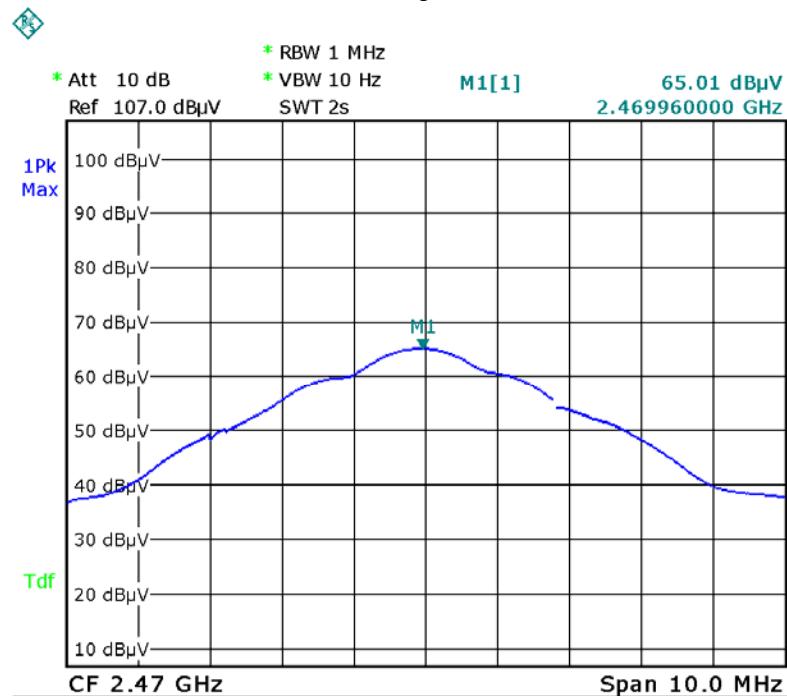

Date: 8.JUN.2015 14:34:23

**Peak:**

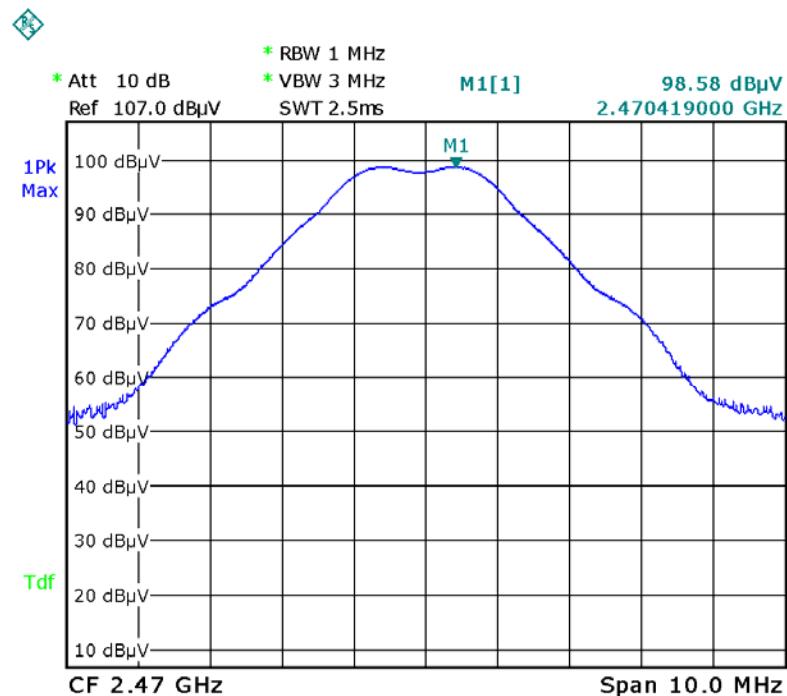


Date: 8.JUN.2015 14:33:18

## 6.5 20dB Bandwidth Testing

Temperature	25°C
Relative Humidity	53%
Atmospheric Pressure	1021mbar
Test date :	May 21, 2015
Tested By :	Wiky Jam

### Requirement(s):

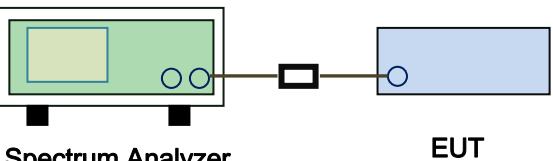Spec	Item	Requirement	Applicable
§15.215(c)	a)	<p>Radiated Emissions Measurement Uncertainty</p> <p>All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 1GHz ( 3m &amp; 10m ) &amp; 1GHz above ( 3m ) is +5.6/-4.5dB.</p>	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure		<ul style="list-style-type: none"> <li>- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.</li> <li>- Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.</li> <li>- Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.</li> <li>- Repeat above procedures until all frequencies measured were complete.</li> </ul>	
Remark			


Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
Test Data	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> N/A
Test Plot	<input checked="" type="checkbox"/> Yes (See below)	<input type="checkbox"/> N/A

## 20dB Bandwidth measurement result

Fundamental Frequency (MHz)	20dB Bandwidth ( MHz )	Result
2470	3.016	Pass

## Test Plots

### 20dB Bandwidth measurement result

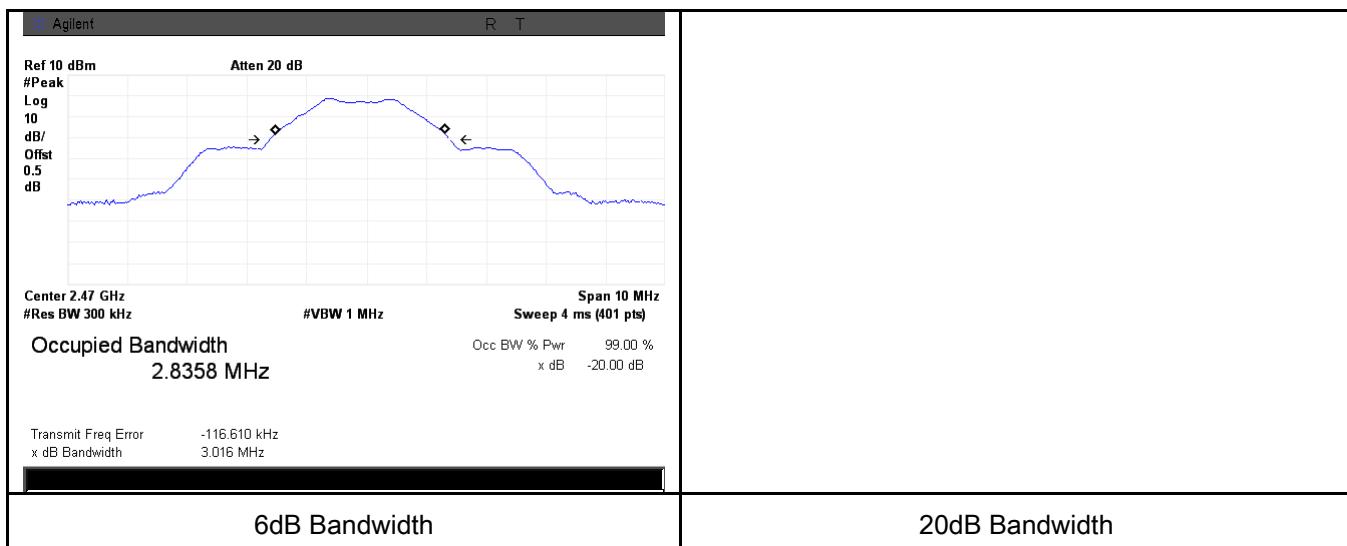

## 6.6 Band Edge


Temperature	25°C
Relative Humidity	59%
Atmospheric Pressure	1010 mbar
Test date :	May 13, 2015
Tested By :	Wiky Jam

Spec	Item	Requirement	Applicable
§15.249(d)	a)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.	<input checked="" type="checkbox"/>
Test Setup		 <p style="text-align: center;"><b>Spectrum Analyzer</b>                                    <b>EUT</b></p>	
Test Procedure		<ul style="list-style-type: none"> <li>- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.</li> <li>- Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.</li> <li>- Set both RBW and VBW of spectrum analyzer to 1MHz.</li> <li>- Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.</li> <li>- Repeat above procedures until all measured frequencies were complete.</li> </ul>	
Remark			
Result		<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	

Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A

## Test Plots

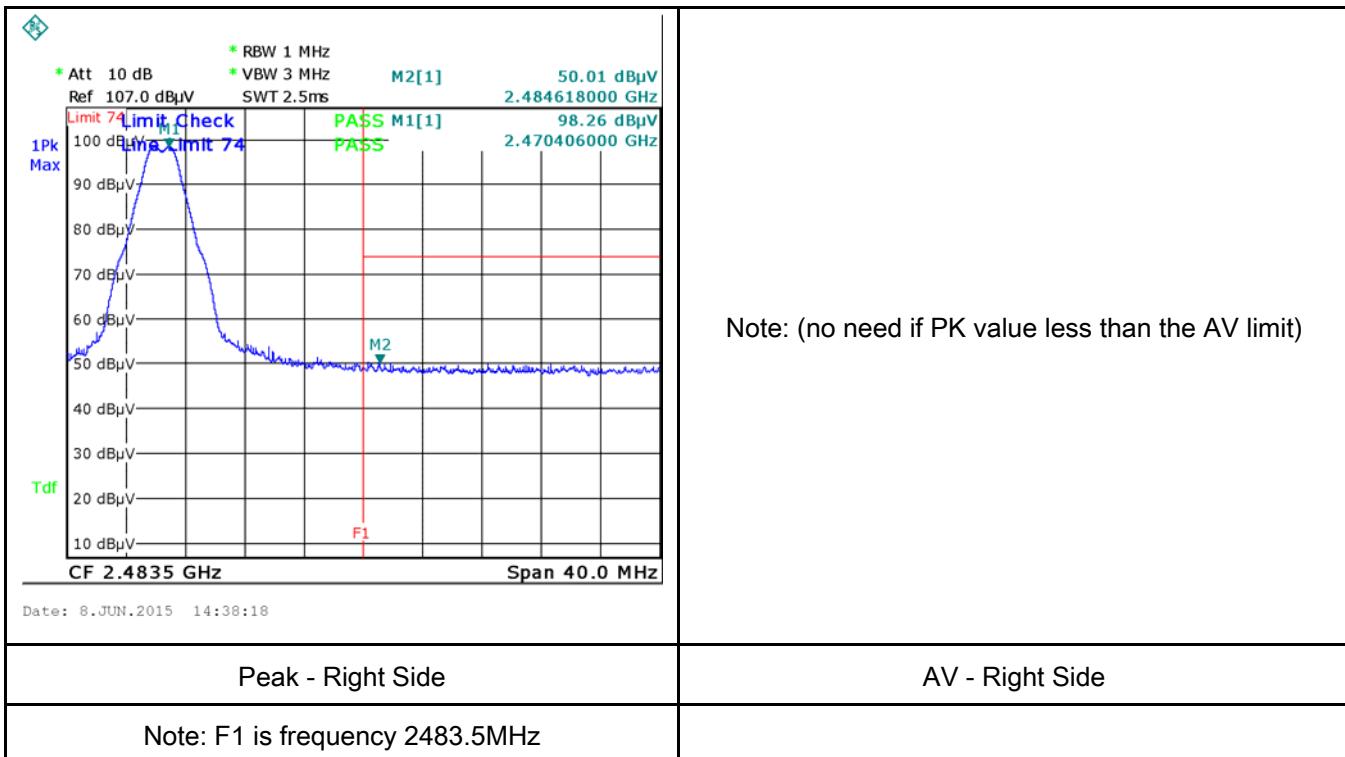


## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
<b>AC Line Conducted</b>					
EMI test receiver	ESCS30	8471241027	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
<b>RF conducted test</b>					
Agilent ESA-E SERIES	E4407B	MY45108319	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>					
EMI test receiver	ESL6	100262	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/20/2014	11/19/2015	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/22/2014	09/21/2015	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>

## Annex B. EUT And Test Setup Photographs

### Annex B.i. Photograph: EUT External Photo

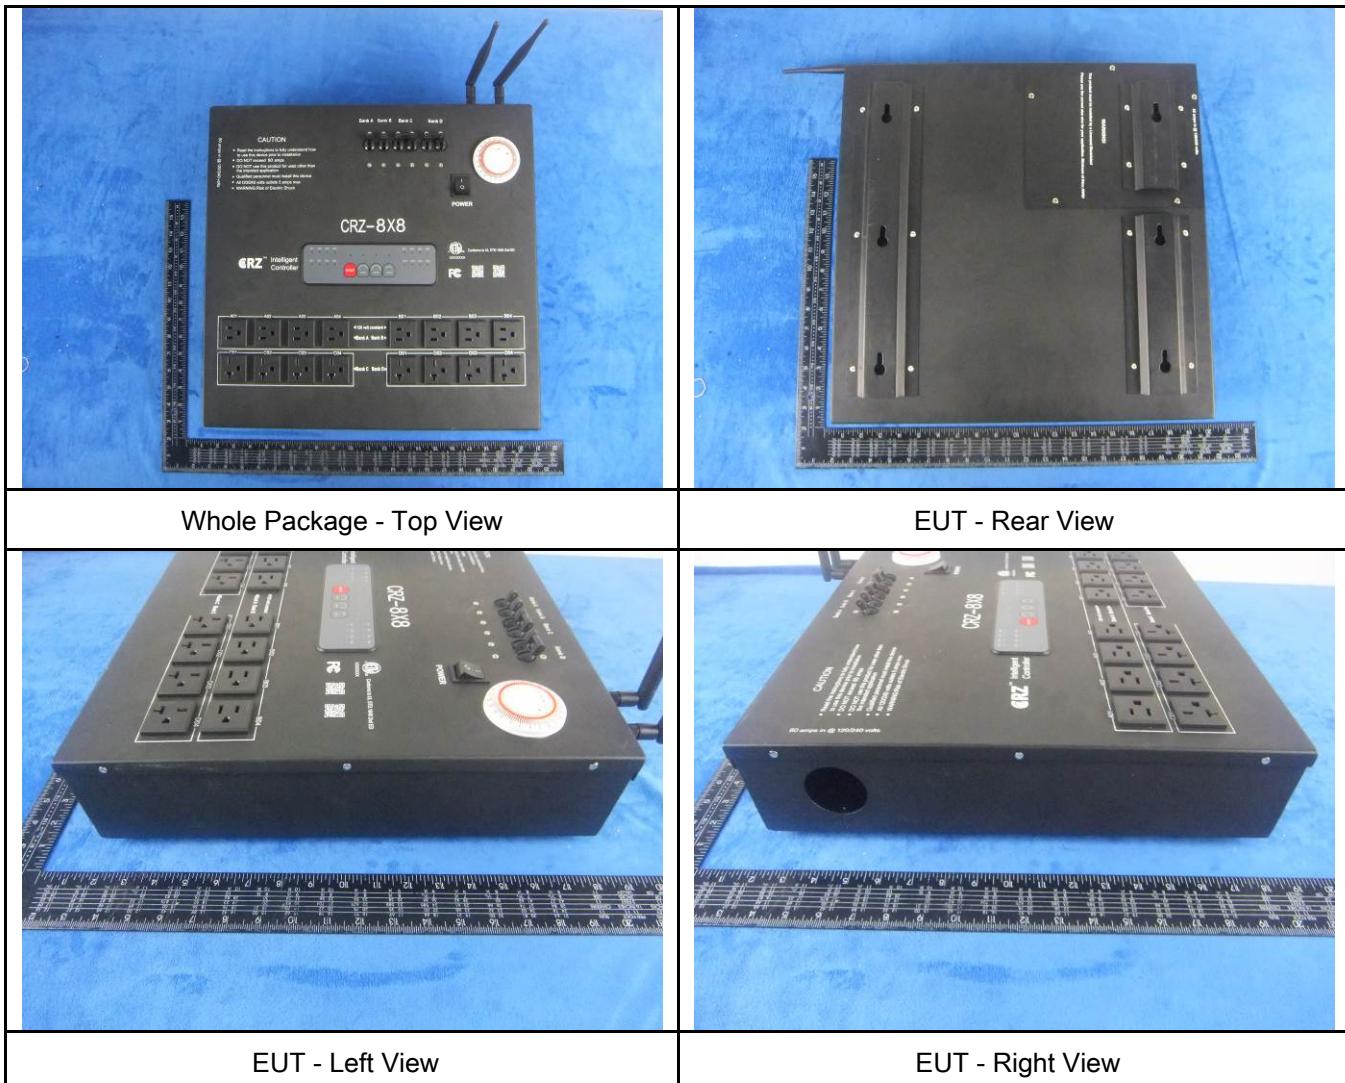

Test Report No.	15050006-FCC-R1
Page	26 of 34




EUT - Top View




EUT - Bottom View

Annex B.ii. Photograph: EUT Internal Photo

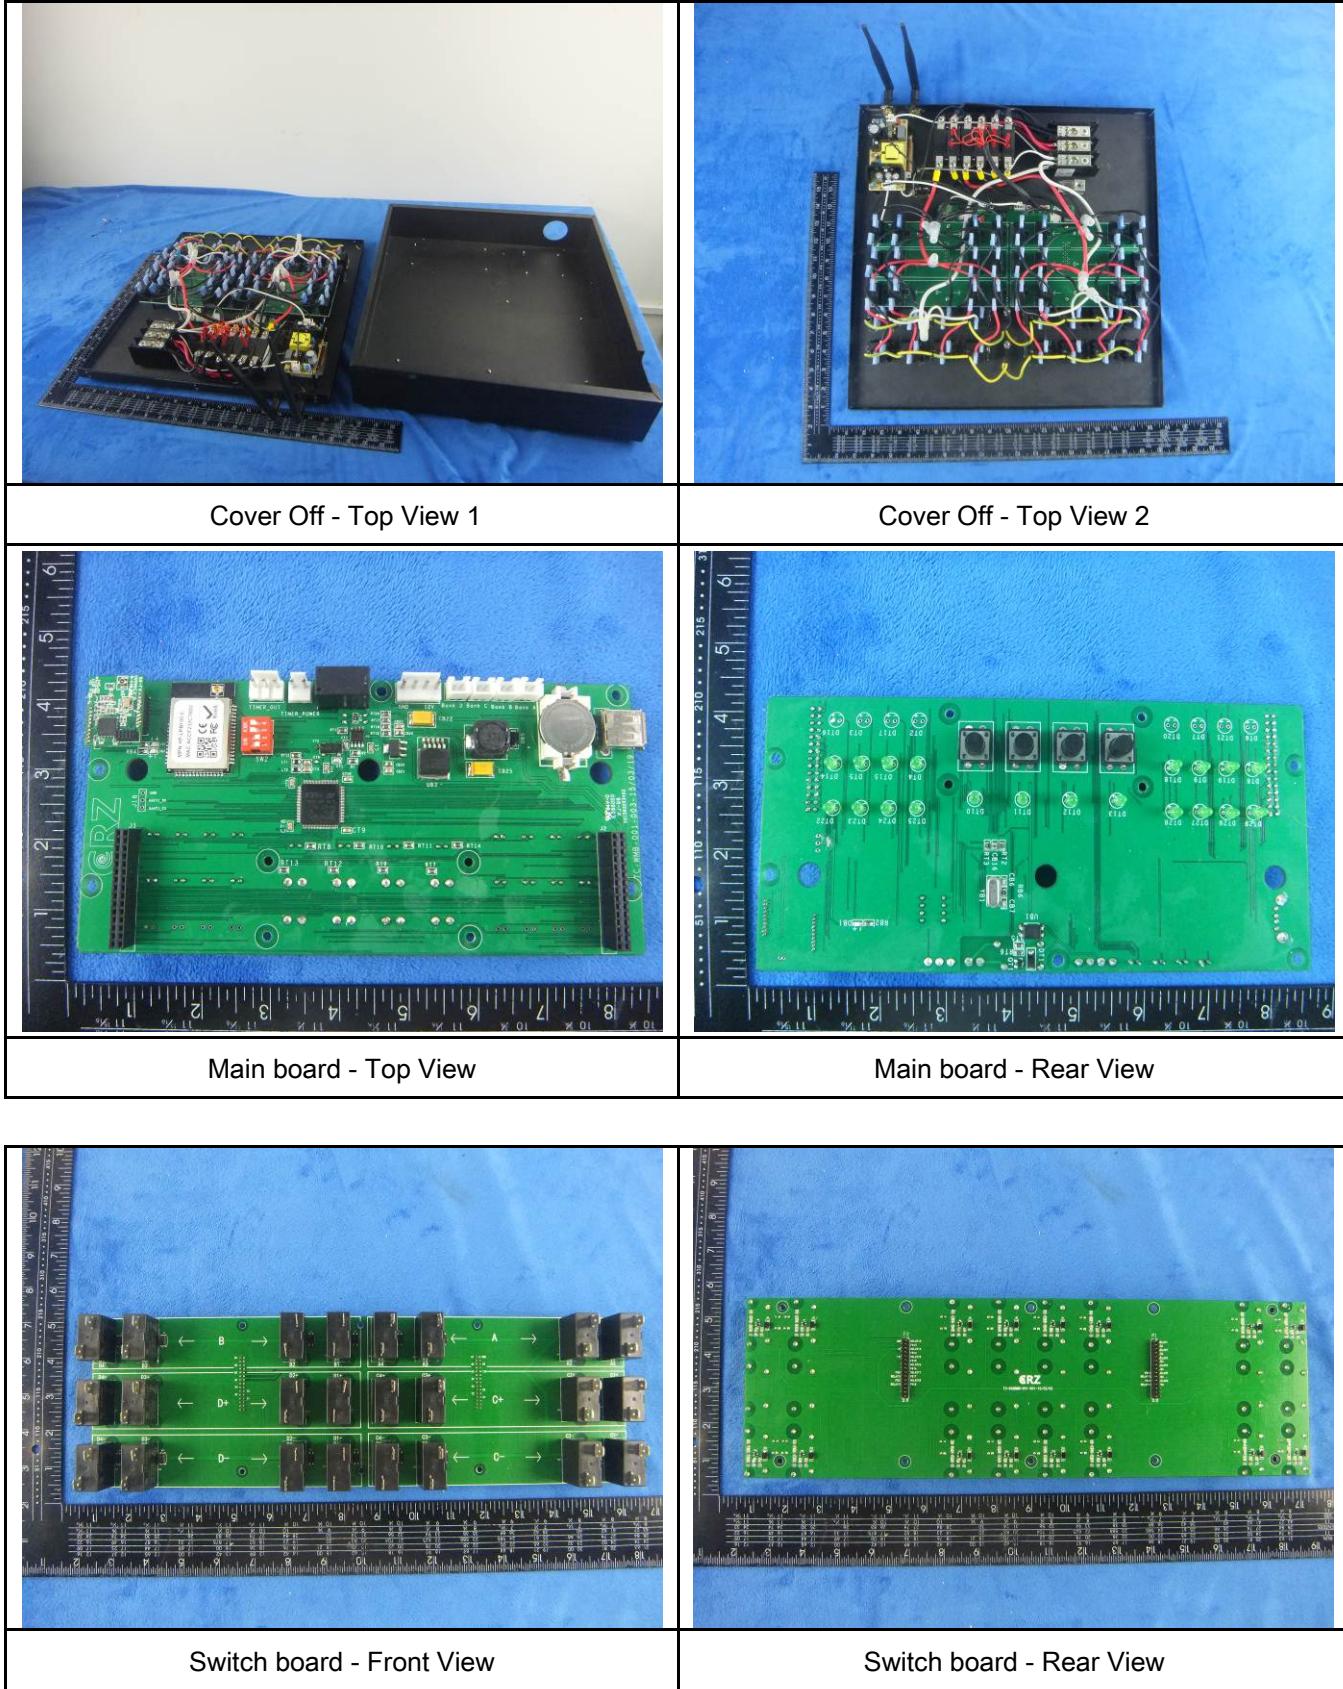



Power board - Front View

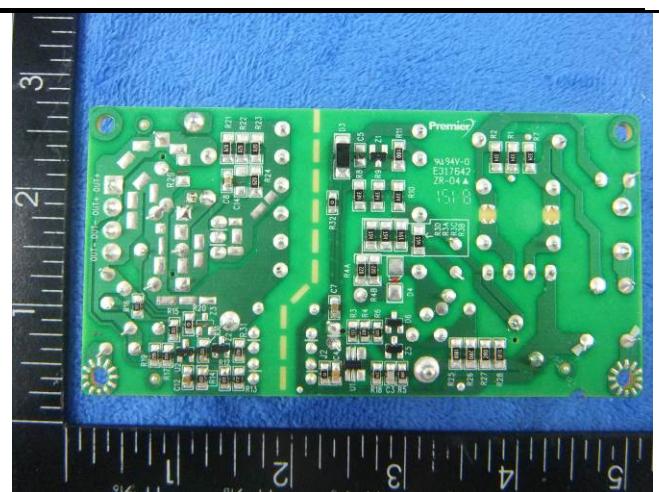

Power board - Rear View




WIFI - Antenna View



ZIGBEE - Antenna View


### Annex B.iii. Photograph: Test Setup Photo

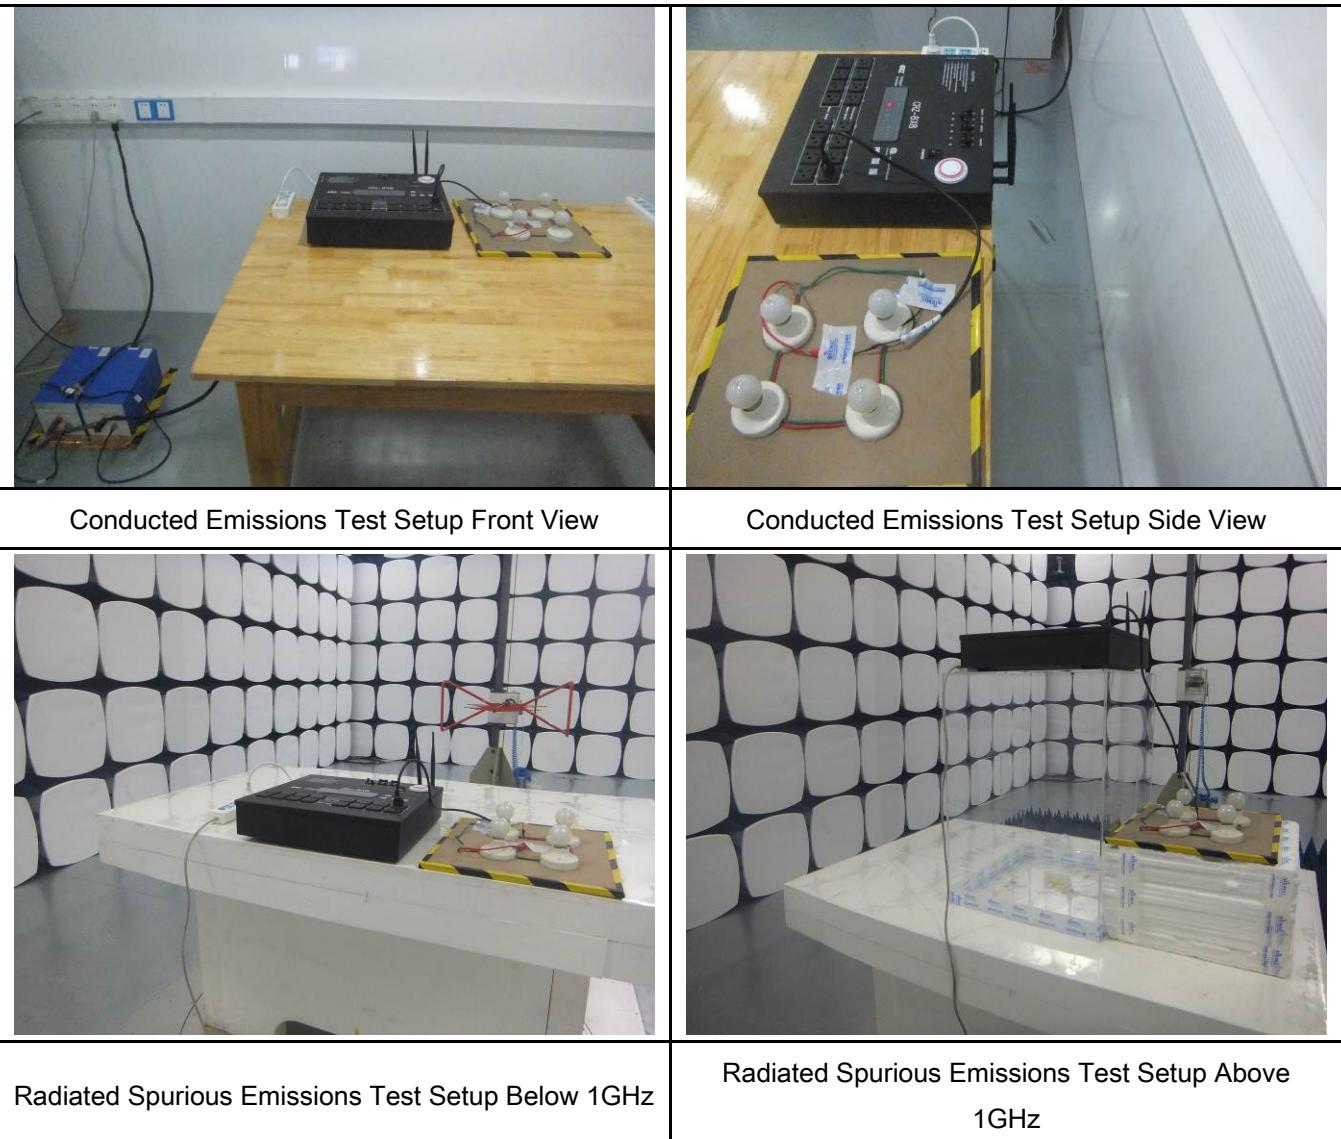


## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for AC Line Conducted Emissions

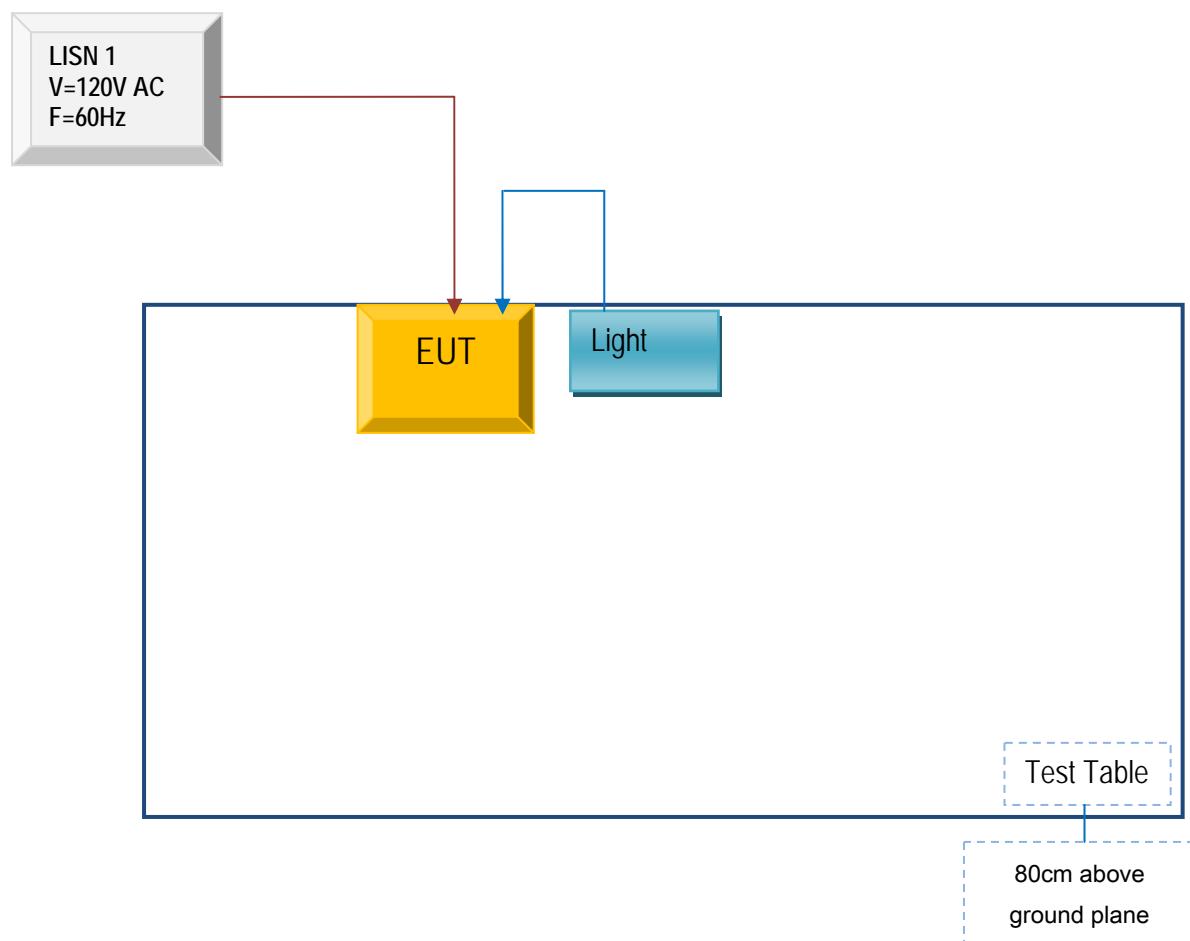

## Block Configuration Diagram for Radiated Emissions

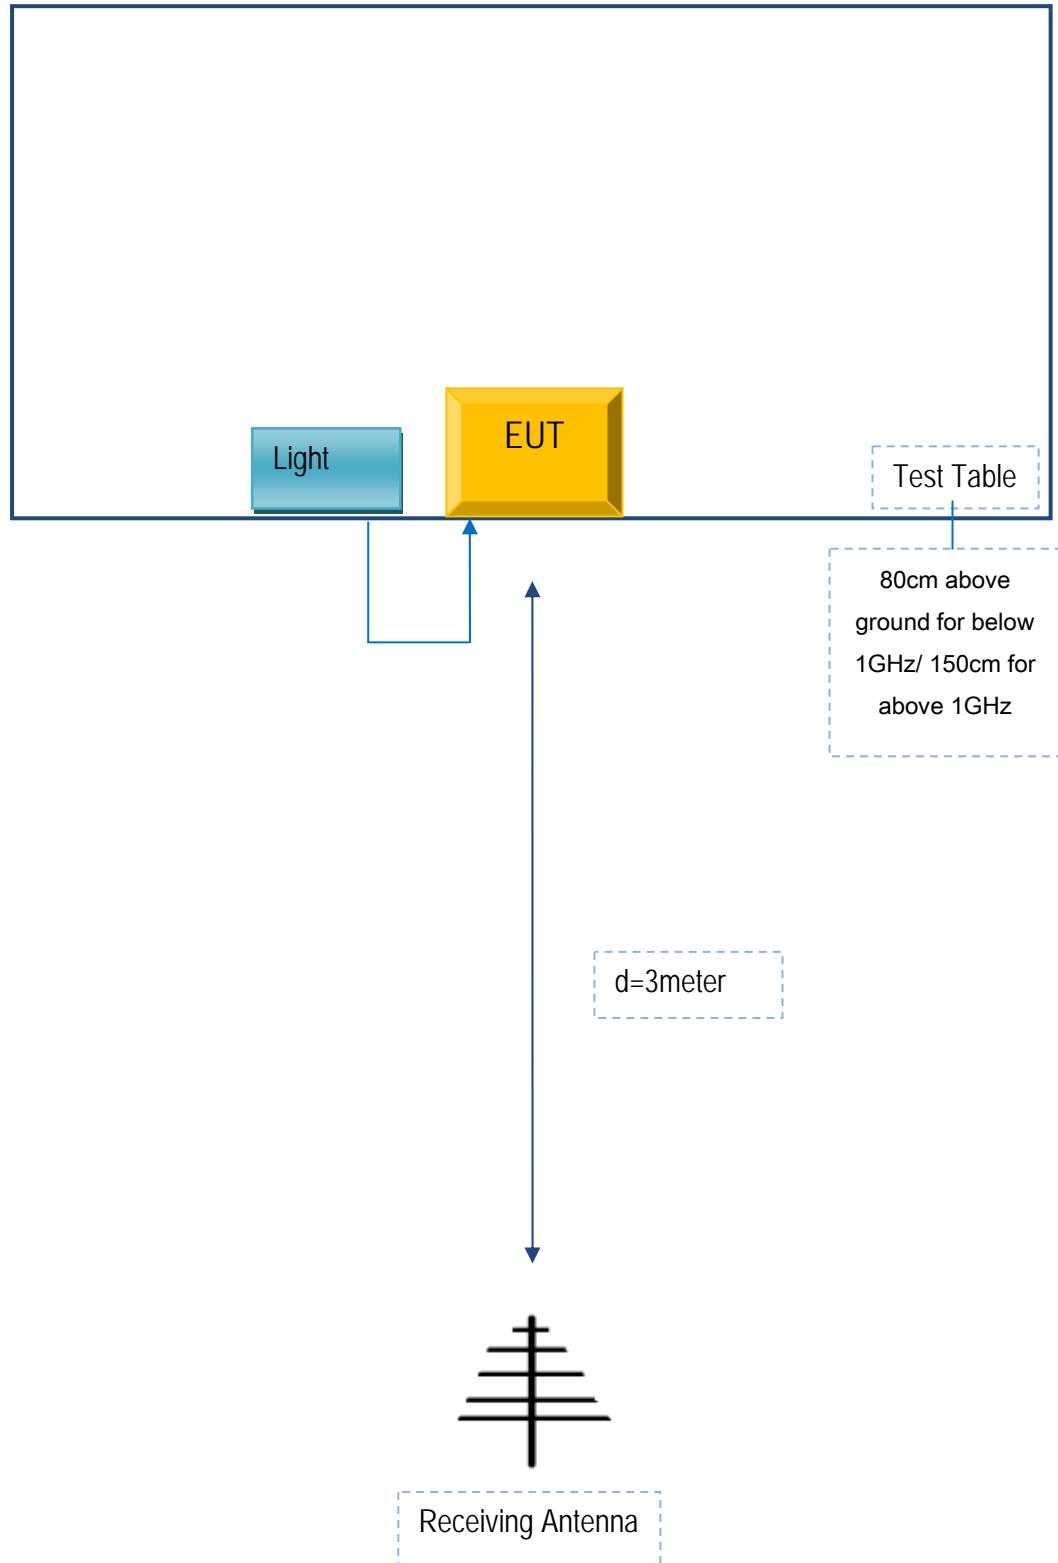

### Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
N/A	N/A	N/A	N/A	N/A

Test Report No.	15050006-FCC-R1
Page	33 of 34

## Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Test Report No.	15050006-FCC-R1
Page	34 of 34

## Annex E. DECLARATION OF SIMILARITY

N/A