

Testing Tomorrow's Technology

Application

For

**Part 2, Subpart J, Paragraph 2.907 Equipment Authorization of Certification for an
Intentional Radiator per Part 15, Subpart C, paragraphs 15.207, 15.209 and Part
15, Subpart F, paragraph 15.509**

For the

Headsight, Inc.

**Terrahawk
Model: HT5200**

FCC ID: 2AEP2-THAWK1

**UST Project: 17-0097
Issue Date: June 13, 2017**

Total Pages in This Report: 51

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**



I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: Alan Ghasiani

Name: Alan Ghasiani

Title: Compliance Engineer – President

Date: June 13, 2017



NVLAP LAB CODE 200162-0

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

MEASUREMENT TECHNICAL REPORT

COMPANY NAME: Headsight, Inc.

MODEL: HT5200

FCC ID: 2AEP2-THAWK1

DATE: June 13, 2017

This report concerns (check one): Original grant Class II change

Equipment type: UWB Transmitter, GPR device

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes No

If yes, defer until: N/A
date

agrees to notify the Commission by N/A
date
of the intended date of announcement of the product so that the grant can be
issued on that date.

Report prepared by:

US Tech
3505 Francis Circle
Alpharetta, GA30004
Phone Number: (770) 740-0717
Fax Number: (770) 740-1508

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

Table of Contents

<u>ParagraphTitle</u>	<u>Page</u>
1 General Information.....	7
1.1 Purpose of this Report	7
1.2 Characterization of Test Sample.....	7
1.3 Product Description	7
1.4 Configuration of Tested System.....	8
1.5 Test Facility.....	8
1.6 Related Submittals.....	8
2 Tests and Measurements	10
2.1 Test Equipment.....	10
2.2 Modifications to EUT Hardware	11
2.3 Frequency Range of Radiated Measurements (Part 15.33, 15.521(h))	11
2.3.1 Intentional Radiator.....	11
2.4 Measurement Detector Function and Bandwidth (CFR 15.35)	12
2.4.1 Detector Function and Associated Bandwidth	12
2.4.2 Corresponding Peak and Average Requirements.....	12
2.5 EUT Antenna Requirements (CFR 15.203)	13
2.6 Restricted Bands of Operation (Part 15.205).....	14
2.7 Intentional Radiator, Power Line Conducted Emissions (CFR 15.207).....	14
2.8 Intentional Radiator, Radiated Emissions (CFR 15.509 (f), 15.521 (g)).....	14
2.8.1 Pulse Repetition Frequency and Duty Cycle.....	16
2.9 UWB bandwidth (CFR 15.509 (a), 15.521(e)).....	17
2.10 UWB Purpose, Part 90 License, and Coordination (CFR 15.509 (b)).....	20
2.11 Remote Switch (CFR 15.509 (c)).....	20
2.12 Unintentional Radiator, Power line Emissions (CFR 15.207, 15.521 (j))	20
2.13 Radiated Emissions at or Below 960 MHz (CFR 15.509 (d), 15.209)).....	20
2.14 Radiated Emissions above 960 MHz (CFR 15.509 (d), 15.521(d,g,h), 15.209).....	25
2.15 Radiated Emissions in the GPS band (CFR 15.509 (e), 15.521(g))	30
2.16 Measurement Uncertainty	51
2.16.1 Conducted Emissions Measurement Uncertainty	51
2.16.2 Radiated Emissions Measurement Uncertainty	51

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

List of Figures

Figures	Title	Page
Figure 1.	Block Diagram of Test Configuration	13
Figure 2.	Pulse Repetition Frequency.....	16
Figure 3.	TX on Period	17
Figure 4.	UWB f_L , f_M , f_H Measurement Plot	18
Figure 5.	UWB 99% and -10dB Bandwidth	19
Figure 6.	Plot 1 @ 1 Meter Dual Unit	32
Figure 7.	Plot 2 @ 1 Meter Dual Unit	33
Figure 8.	Plot 3 @ 1 Meter Dual Unit	34
Figure 9.	Plot 4 @ 1 Meter Dual Unit	35
Figure 10.	Plot 1 @ 2 Meters Dual Unit	37
Figure 11.	Plot 2 @ 2 Meters Dual Unit	38
Figure 12.	Plot 3 @ 2 Meters Dual Unit	39
Figure 13.	Plot 4 @ 2 Meters Dual Unit	40
Figure 14.	Plot 1 @ 3 Meters Dual Unit	42
Figure 15.	Plot 2 @ 3 Meters Dual Unit	43
Figure 16.	Plot 3 @ 3 Meters Dual Unit	44
Figure 17.	Plot 4 @ 3 Meters Dual Unit	45
Figure 18.	Plot 1 @ 3.7 Meters Dual Unit	47
Figure 19.	Plot 2 @ 3.7 Meters Dual Unit	48
Figure 20.	Plot 3 @ 3.7 Meters Dual Unit	49
Figure 21.	Plot 4 @ 3.7 Meters Dual Unit	50

List of Tables

Table	Title	Page
Table 1.	EUT and Peripherals.....	9
Table 2.	Test Instruments	10
Table 3.	Allowed Antenna(s).....	13
Table 4.	Peak Intentional Radiated Emissions (CFR 15.509 (f)).....	15
Table 5.	Radiated Emissions Test Data Below 960 MHz @ 1 m Dual Unit.....	21
Table 6.	Radiated Emissions Test Data Below 960 MHz @ 2 m Dual Unit.....	22
Table 7.	Radiated Emissions Test Data Below 960 MHz @ 3 m Dual Unit.....	23
Table 8.	Radiated Emissions Test Data Below 960 MHz @ 3.7 m Dual Unit.....	24
Table 9.	Radiated Emissions above 960 MHz, CFR 15.509 (d), 15.521(g)	25
Table 10.	Radiated Emissions from Transmitter Test Data Above 960 MHz @ 1 m Dual Unit	26

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

Table 11. Radiated Emissions from Transmitter Test Data Above 960 MHz @ 2 m Dual Unit	27
Table 12. Radiated Emissions from Transmitter Test Data Above 960 MHz @ 3 m Dual Unit	28
Table 13. Radiated Emissions from Transmitter Test Data Above 960 MHz @ 3.7m Dual Unit	29
Table 14. Radiated Emissions in the GPS band (CFR 15.509 (e), 15.221(g)).....	30
Table 15. Worst Case Radiated Emissions Test Data in The GPS Bands @ 1 m Dual Unit	31
Table 16. Worst Case Radiated Emissions Test Data In The GPS Bands @ 2m Dual Unit	36
Table 17. Worst Case Radiated Emissions Test Data In The GPS Bands @ 3m Dual Unit	41
Table 18. Worst Case Radiated Emissions Test Data In The GPS Bands @ 3.7m Dual Unit	46

List of Attachments

Agency Agreement
Application Forms
Letter of Confidentiality
Equipment Label(s)
Block Diagram(s)
Schematic(s)
Test Configuration Photographs
Internal and External Photographs
Antenna Photographs
Theory of Operation
RF Exposure
User's Manual
FCC KDB Correspondence

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

1 General Information

1.1 Purpose of this Report

This report is prepared as a means of conveying test results and information concerning the suitability of this exact product for public distribution according to the FCC Rules and Regulations Part 15, Section 509, 521, 525 and based on the FCC Waiver docket DA 17-207, released March 1, 2017.

1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on Aug 25, 2016 and May 18, 2017 in good operating condition.

1.3 Product Description

The Equipment under Test (EUT) is the Headsight, Inc.Terrahawk, ModelNumber HT5200. The EUT is a DC powered, non-contact radar height sensor used exclusively on mobile agricultural equipment to determine the distance between the ground and mounting position. The EUT is normally mounted between 1 inch and 12 feet above the ground and during operation is always positioned to emit towards the ground. There is no data port on the EUT.

Frequency of operation: 1.510 Ghz to 6.425 Ghz

Center Frequency: 3.9675 Ghz

Maximum Radiated Emission Frequency: 5.209 Ghz

Number of channels: 1 ch

Antenna Type: FlatEarth Planar Modified Bowtie Antenna

Antenna Gain: 4 to 6.0 dBi

Firmware version: Onyx3.29a

Note: Multiple Terrahawk transmitters intended to be mounted on a single piece of agricultural equipment shall be positioned for operation with a minimum separation distance of 1.5 m between transmitters. Due to capability, per FCC advice, the EUT was tested in both a single configuration and a multiple (dual) configuration, where the two EUT were separated by 1.5 m from each other.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

1.4 Configuration of Tested System

The Test Sample was tested per *ANSI C63.10:2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (2013)* and per FCC Part 15 Subpart F.

A list of EUT and Peripherals is found in Table 1 below. A block diagram of the tested system is shown in Figure 1. Test configuration photographs are provided in separate Appendices.

1.5 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA30004. This site has been fully described and registered with the FCC, with designation number 186022.

1.6 Related Submittals

The EUT is subject to the following FCC authorizations:

- a) Certification under section 15.509 as a transmitter.
- b) Verification under 15.101 as a digital device and receiver.

The Verification requirement shares many common report elements with the Certification report. Therefore the data presented in this report shall also be used to show compliance with the Verification requirements of Part 15.107 & 15.109.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

Table 1. EUT and Peripherals

PERIPHERAL MANUFACTURER.	MODEL NUMBER	SERIAL NUMBER	FCC Number	CABLES P/D
Headsight, Inc.	HT5200	Engineering Sample	Pending: 2AEP2-THAWK1	1 m U P
Antenna See antenna details	--	--	--	--
Laptop computer	Dell	Various	Various	1.5 m U P

U= Unshielded
S= Shielded
P= Power
D= Data

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

2 Tests and Measurements

2.1 Test Equipment

The table below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are indicated.

Table 2. Test Instruments

TEST INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	CALIBRATION DUE DATE
SPECTRUM ANALYZER	E4407B	AGILENT	US41442935	6/11/2017
SPECTRUM ANALYZER	E4407B	AGILENT	US41442935	6/22/2018
SPECTRUM ANALYZER	8593E	HEWLETT PACKARD	3205A00124	8/23/2017
HORN ANTENNA	SAS-571	A.H. Systems	605	8/25/2017 2 yr
LOG PERIODIC ANTENNA	3146	EMCO	9305-3600	5/1/2019 2 yr.
BICONICAL ANTENNA	3110B	EMCO	9307-1431	8/25/2017 2 yr
LOOP ANTENNA	SAS-200/562	A.H. Systems	142	9/28/2017 2 yr
PRE-AMPLIFIER	8447D	HEWLETT-PACKARD	1937A02980	11/01/2017
PRE-AMPLIFIER	8449B	HEWLETT-PACKARD	3008A00480	10/26/2017
HORN ANTENNA	3116	EMO	9505-2255	1/27/2017 2 yr.

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

2.2 Modifications to EUT Hardware

No physical modifications were made by US Tech in order to bring the EUT into compliance with FCC Part 15, Subpart F Intentional Radiator Limits for the transmitter portion of the EUT.

2.3 Frequency Range of Radiated Measurements (Part 15.33, 15.521(h))

2.3.1 Intentional Radiator

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 5th harmonic of the peak level of fundamental frequency generated or 40 GHz, whichever is the lowest.

The highest frequency used to determine the frequency range over which measurements are made shall be based on the center frequency (fc). If the center frequency is less than 10 GHz there is no requirement to measure beyond 40 GHz.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

2.4 Measurement Detector Function and Bandwidth (CFR 15.35)

The radiated and conducted emissions limits shown herein are based on the following:

FCC Part 15.207, 15.209, 15.509

2.4.1 Detector Function and Associated Bandwidth

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPRQuasi-peak detector function and related measurement bandwidths (i.e. 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the Quasi-peak device are used.

2.4.2 Corresponding Peak and Average Requirements

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

2.5 EUT Antenna Requirements (CFR 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. Only the antenna(s) listed in Table 4 will be used with this module.

Table 3. Allowed Antenna(s)

REPORT REFERENCE	MANUFACTURER	TYPE OF ANTENNA	MODEL	GAIN dB _i	TYPE OF CONNECTOR
Antenna	Flat Earth, Inc	Bowtie	BT6100	4.0 to 6.0dBi	Internally connected

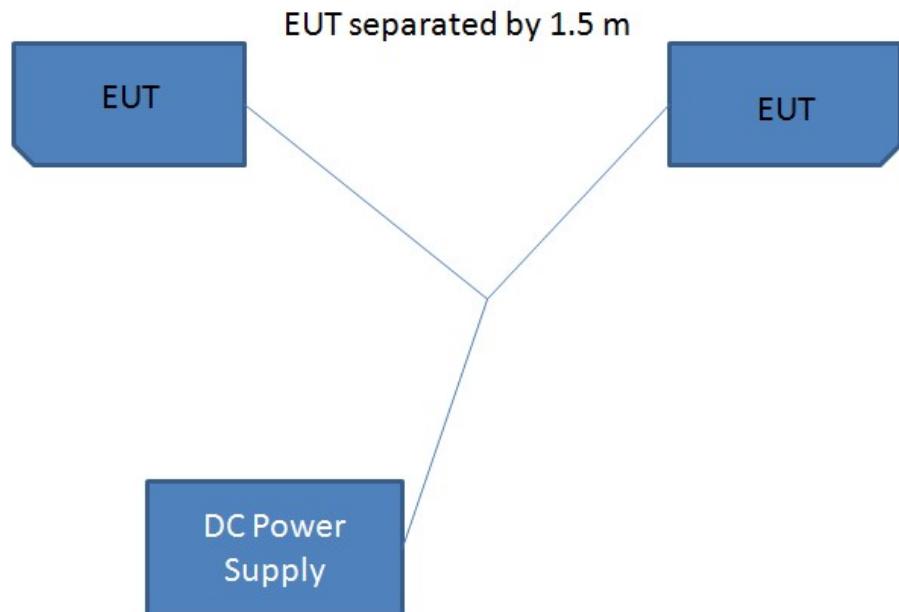


Figure 1. Block Diagram of Test Configuration

Note: EUT was tested in both single and dual configurations.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

2.6 Restricted Bands of Operation (Part 15.205)

Only spurious emissions can fall in the frequency bands of CFR 15.205. The field strength of these spurious cannot exceed the limits of 15.209. Radiated harmonics and other Spurious are examined for this requirement see paragraph 2.1

2.7 Intentional Radiator, Power Line Conducted Emissions (CFR 15.207)

The EUT is battery powered. The EUT is indirectly connected the AC mains for testing purposes only. During normal operation the EUT is battery powered and will not be operated while directly or indirectly connected to the AC mains. This test was not applicable.

2.8 Intentional Radiator, Radiated Emissions (CFR 15.509 (f), 15.521 (g))

UWB devices where the highest radiated emission, f_M (The frequency at which the highest radiated emission occurs), is above 960 MHz have a limit on the peak level of the emission within a 50 MHz bandwidth of 0 dBm EIRP. A different RBW was used, therefore the peak emissions limit was adjusted per CFR 15.521 (g). The limit was also converted to peak field strength at 3 meters.

The antenna was positioned as it would be in normal operation and the fundamental emission was maximized to ensure the maximum reading and measured with the receiving antenna in both horizontal and vertical position. Below is the measured peak radiated emission at 3 meters.

RBW used: 1 MHz

$$\begin{aligned}\text{Peak EIRP Limit} &= 20 \log (\text{RBW}/50) \text{dBm EIRP} \\ &= 20 \log(1/50) \text{ dBm EIRP} \\ &= -33.97 \text{dBm EIRP}\end{aligned}$$

$$\begin{aligned}\text{Peak Field Strength Limit} &= -33.97 \text{dBm EIRP} + 95.2 \\ &= 61.22 \text{dBuV/m}\end{aligned}$$

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

Table 4. Peak Intentional Radiated Emissions (CFR 15.509 (f))

Frequency (MHz)	Distance / Polarization	Raw Test Data (dBuV)	Correction Factors (dB/m)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)
5200.00	3.0m./VERT	47.64	3.50	51.14	61.22	10.0
5188.00	3.0m./HORZ	48.03	3.65	51.68	61.22	9.5

Sample Calculation at 5200 MHz:

Raw Test Data	47.64	dBuV
+ Correction Factors	3.50	dBm
Results	51.14	dBuV/m

Test Date: Sept 15, 2016

Tested By
Signature:



Name: George Yang

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

2.8.1 Pulse Repetition Frequency and Duty Cycle

The device employs pulse modulation and has a repetition rate of 41.66 Hz. The pulse signal has been verified below.

Pulse Rate: 41.66 Hz
Period= 24 mSec
Frequency= 1/seconds= 1/0.024 secs = 41.66 Hz

Duty Cycle correction factor: -13.6 dB
 $20 \log (TX_{on}/(TX_{on}+TX_{off})) = 20 \log (5ms/24ms) = -13.6 \text{ dB}$

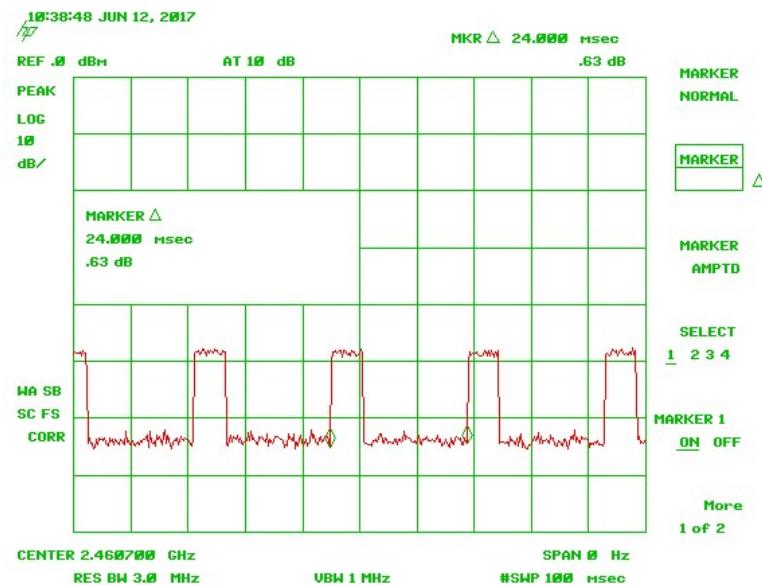


Figure 2. Pulse Repetition Frequency

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

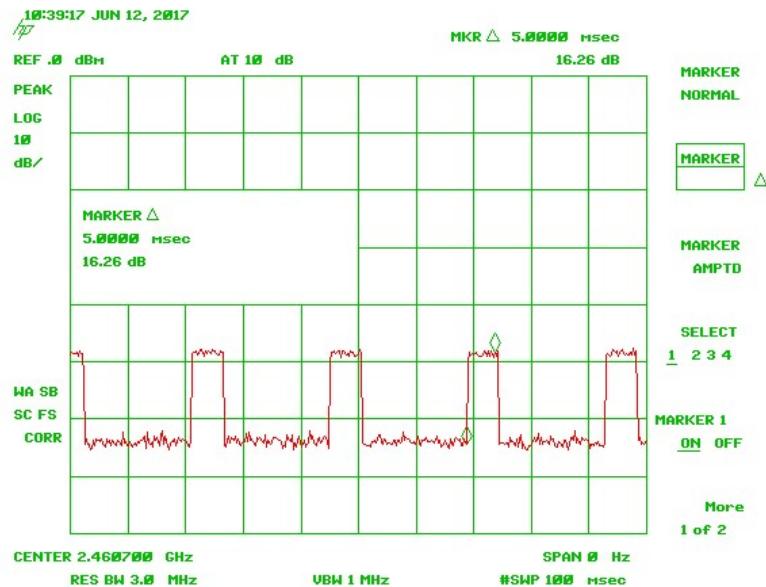


Figure 3. TX on Period

2.9 UWB bandwidth (CFR 15.509 (a), 15.521(e))

The bandwidth of an imaging system under 15.509 must be below 10.6 GHz. The bandwidth is defined as the frequency band bounded by the points that are 10 db below the highest radiated emissions, as based on the complete transmission system including the antenna. The upper boundary is designated f_H and the lower boundary is designated f_L . The frequency at which the highest radiated emission occurs is designated f_M . If multiple bandwidths occur, then the maximum bandwidth is used.

The bandwidth was determined from a radiated measurement using the designated antenna with which EUT will operate in the final product. The receiving antenna's height was repeatedly varied from 1 m to 4 m and the polarity was adjusted several times. The turn table on which the EUT was placed was also rotated several times. This ensured that the true bandwidth of the EUT was measured. Below is the measured UWB bandwidth with the receiving antenna horizontal and vertical. Both polarities met the 10.6 GHz limit.

Emissions are contained within 1.510 GHz to 6.425 GHz which is below 10.6 GHz.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

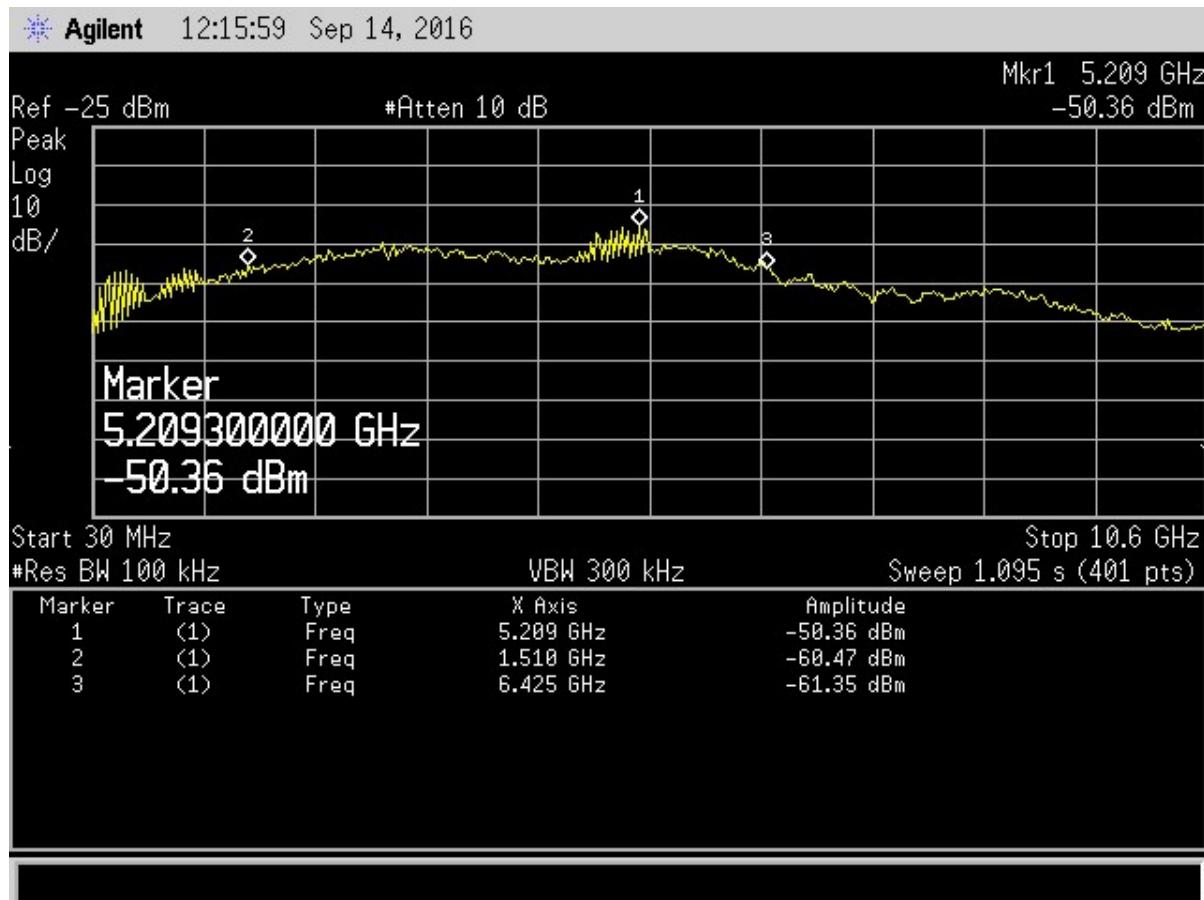


Figure 4. UWB f_L , f_M , f_H Measurement Plot

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

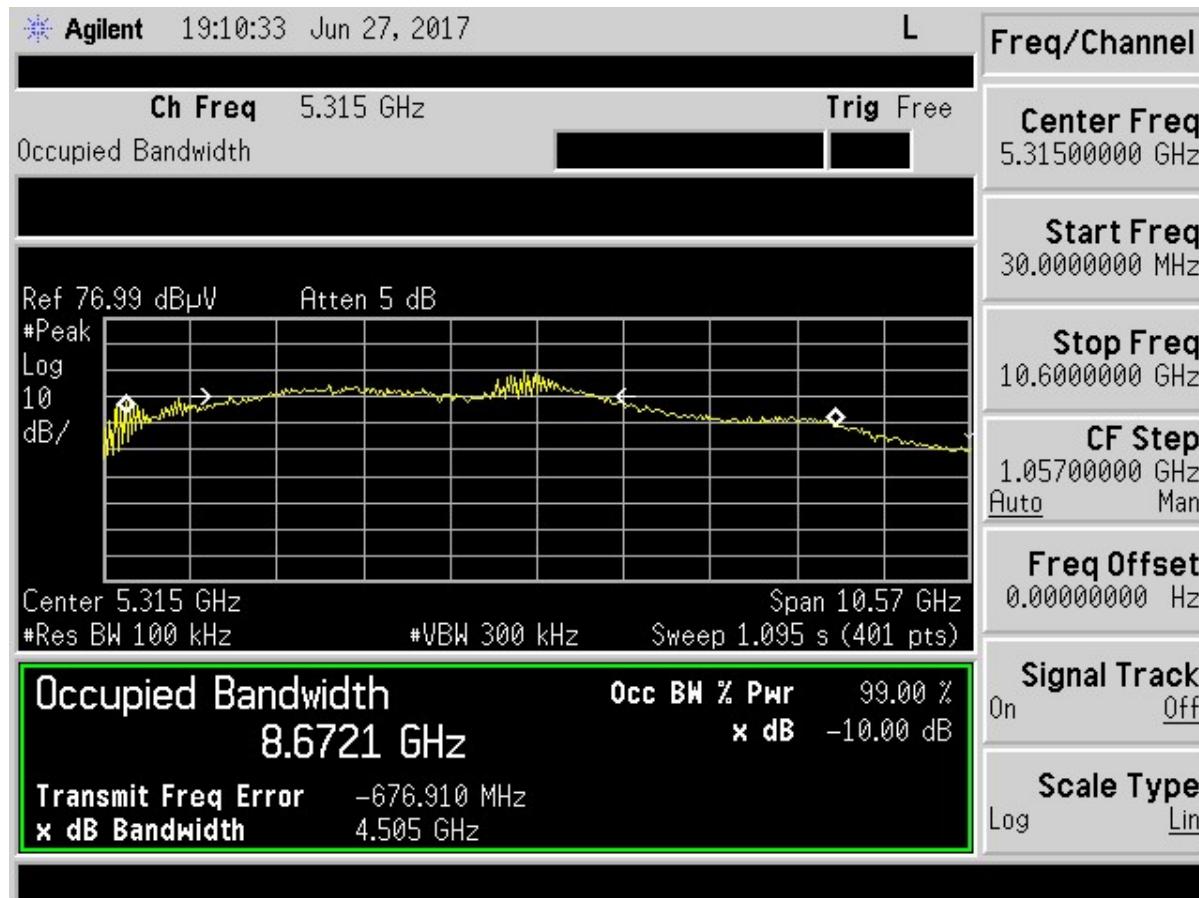


Figure 5. UWB 99% and -10dB Bandwidth

The EUT has a fractional bandwidth of > 0.20 when calculated using the formula referenced in 15.503(c): $2(F_H-F_L)/(F_H+F_L) = 2(6.425-1.510 \text{ GHz})/(6.425+1.510 \text{ GHz}) = 1.23, > 0.20.$

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

2.10 UWB Purpose, Part 90 License, and Coordination (CFR 15.509 (b))

The EUT, operating under CFR 15.509, is limited to GPR and wall imaging systems operating under the FCC Waiver agreement, DA 17-207, Waiver conditions. The details of the waiver conditions are include as a separate exhibit.

Based on the waiver, operation of this device shall be limited to parties eligible for licensing under the provisions of Part 90 of the Commission's rules (e.g. persons regularly involved in activities such as the operation of farms, ranches, or similar land areas, for the quantity production of crops or plants; including soil plowing, soil conditioning, seeding, fertilizing, or harvesting for agricultural activities. No operation in city gardens or on trees is permitted.

2.11 Remote Switch (CFR 15.509 (c))

A GPR that is designed to operate while being hand-held or a wall-imaging system must contain a manually operated switch or a remote switch that causes the transmitter to cease operation within 10 seconds of being released.

Since the EUT is not hand-held, and is not a wall-imaging system, it is exempt from this requirement.

2.12 Unintentional Radiator, Power line Emissions (CFR 15.207, 15.521 (j))

This EUT will not have access to the AC Main power line; therefore this requirement is not applicable.

2.13 Radiated Emissions at or Below 960 MHz (CFR 15.509 (d), 15.209)

The radiated emissions at or below 960 MHz from the transmitter shall not exceed the emissions levels in CFR 15.209. Furthermore the emissions due to the digital circuitry of the EUT must also comply with the limits for 15.209.

EUT was tested in single configuration and with dual configuration. The test results show that there are negligible differences between having a single configuration or dual configuration. The test results for dual configuration have been selected and presented here as a representative case.

The worst-case radiated emission for the EUT in the range of below 960 MHz was 0.8 dB below the limit at 74.52 MHz at a test height of 2m. All other radiated emissions were at least 2.9dB below the limits. This data can be found in the tables below.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

Table 5.Radiated Emissions Test Data Below 960 MHz @ 1 m Dual Unit

30 MHz to 960 MHz							
Test: Radiated Emissions				Client: Headsight, Inc.			
Project: 17-0097				Model: HT5200			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/Polarization	Margin (dB)	Detector PK, or QP
205.65	46.74	-13.26	33.48	43.5	3m./VERT	10.0	PK
235.50	55.41	-12.35	43.06	46.0	3m./HORZ	2.9	PK
235.50	54.94	-12.35	42.59	46.0	3m./HORZ	3.4	QP
All other emission found are 20 dB or greater from the applicable limit.							
All emissions from the lowest operating clock frequency to 30 MHz were at greater than 20 dB from the applicable limits.							

Sample Calculation at 205.65 MHz:

Magnitude of Measured Frequency	46.74 dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	-13.26 dB/m
Corrected Result	33.48 dBuV/m

Test Date: May 18, 2017

Tested By

Signature: Robert Nevels

Name: Robert Nevels

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification/ RSS 220
 2AEP2-THAWK1
 17-0097
 June 13, 2017
 Headsight, Inc.
 HT5200

Table 6.Radiated Emissions Test Data Below 960 MHz @ 2 m Dual Unit

30 MHz to 960 MHz								
Test: Radiated Emissions				Client: Headsight, Inc.				
Project: 17-0097				Model: HT5200				
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/Polarization	Margin (dB)	Detector PK, or QP	
77.42	50.63	-17.49	33.14	40.0	3m./HORZ	6.9	PK	
136.70	51.45	-14.00	37.45	43.5	3m./HORZ	6.0	QP	
203.40	48.68	-13.94	34.74	43.5	3m./VERT	8.8	PK	
208.24	42.60	-13.45	29.15	43.5	3m./HORZ	14.3	PK	
74.52	57.44	-18.25	39.19	40.0	3m./VERT	0.8	QP	
193.30	50.73	-11.27	39.46	43.5	3m./VERT	4.0	QP	

All other emission found are 20 dB or greater from the applicable limit.
 All emissions from the lowest operating clock frequency to 30 MHz were at greater than 20 dB from the applicable limits.

Sample Calculation at 77.42 MHz:

Magnitude of Measured Frequency	50.63 dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	-17.49 dB/m
Corrected Result	33.14 dBuV/m

Test Date: May 18, 2017

Tested By

Signature: Robert Nevels

Name: Robert Nevels

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification/ RSS 220
 2AEP2-THAWK1
 17-0097
 June 13, 2017
 Headsight, Inc.
 HT5200

Table 7.Radiated Emissions Test Data Below 960 MHz @ 3 m Dual Unit

30 MHz to 960 MHz							
Test: Radiated Emissions				Client: Headsight, Inc.			
Project: 17-0097				Model: HT5200			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/Polarization	Margin (dB)	Detector PK, or QP
203.38	46.31	-13.26	33.05	43.5	3m./VERT	10.5	QP
119.34	45.63	-13.98	31.65	43.5	3m./VERT	11.9	PK
138.82	45.77	-12.97	32.80	43.5	3m./VERT	10.7	PK
164.73	47.70	-11.28	36.42	43.5	3m./VERT	7.1	PK
All other emission found are 20 dB or greater from the applicable limit.							
All emissions from the lowest operating clock frequency to 30 MHz were at greater than 20 dB from the applicable limits.							

Sample Calculation at 203.38 MHz:

Magnitude of Measured Frequency	46.31 dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	-13.26 dB/m
Corrected Result	33.05 dBuV/m

Test Date: May 18, 2017

Tested By

Signature: *Robert Nevels*

Name: Robert Nevels

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification/ RSS 220
 2AEP2-THAWK1
 17-0097
 June 13, 2017
 Headsight, Inc.
 HT5200

Table 8.Radiated Emissions Test Data Below 960 MHz @ 3.7 m Dual Unit

30 MHz to 960 MHz								
Test: Radiated Emissions				Client: Headsight, Inc.				
Project: 17-0097				Model: HT5200				
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/Polarization	Margin (dB)	Detector PK, or QP	
411.92	37.17	-7.44	29.73	46.0	3m./HORZ	16.3	PK	
993.40	35.87	3.82	39.69	54.0	3m./HORZ	14.3	PK	
204.29	50.35	-13.26	37.09	43.5	3m./VERT	6.4	PK	
798.80	35.48	0.42	35.90	46.0	3m./VERT	10.1	PK	
969.20	37.07	2.37	39.44	54.0	3m./VERT	14.6	PK	
42.18	35.61	-13.80	21.81	40.0	3m./HORZ	18.2	PK	
170.77	37.55	-12.32	25.23	43.5	3m./HORZ	18.3	PK	
82.68	39.26	-17.15	22.11	40.0	3m./VERT	17.9	PK	
143.81	36.83	-12.43	24.40	43.5	3m./VERT	19.1	PK	
201.14	35.62	-12.71	22.91	43.5	3m./HORZ	20.6	PK	
411.92	37.17	-7.44	29.73	46.0	3m./HORZ	16.3	PK	
All other emission found are 20 dB or greater from the applicable limit.								
All emissions from the lowest operating clock frequency to 30 MHz were at greater than 20 dB from the applicable limits.								

Sample Calculation at 411.92 MHz:

Magnitude of Measured Frequency	37.17 dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	-7.44 dB/m
Corrected Result	29.73 dBuV/m

Test Date: May 18, 2017

Tested By

Signature: Robert Nevels

Name: Robert Nevels

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

2.14 Radiated Emissions above 960 MHz (CFR 15.509 (d), 15.521(d,g,h), 15.209)

The radiated emissions above 960 MHz from the transmitter shall comply with the AVG limits in Table 5 when measured using a resolution bandwidth of 1 MHz. The following are the worst case emissions with the receiving antenna in both horizontal and vertical polarities. The emissions were maximized using a Peak Detector, and the final measurement was taken using an Average Detector.

Table 9. Radiated Emissions above 960 MHz, CFR 15.509 (d), 15.521(g)

Frequency Range (MHz)	EIRP Limit (dBm)	Field Strength Limit at 3 meters (dBuV/m)
960 -1610	-65.3	30.0
1610 – 1990	-53.3	42.0
1990 – 3100	-51.3	44.0
3100 - 10600	-41.3	54.0
Above 10600	-51.3	44.0

EUT was tested in single configuration and with dual configuration. The test results show that there are negligible differences between having a single configuration or dual configuration. The test results for dual configuration have been selected and presented here as a representative case.

The worst-case radiated emission for the EUT in the range above 960 MHz was 1.5 dB below the limit at 2034.40 MHz at a test height of 2m. All other radiated emissions were at least 1.6dB below the CFR 15.509 limits. This data can be found in the table below.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

Table 10. Radiated Emissions from Transmitter Test Data Above 960 MHz @ 1 m Dual Unit

Above 960 MHz							
Test: Radiated Emissions				Client: Headsight, Inc.			
Project: 17-0097				Model: HT5200			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	AVG Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
1349.30	35.38	-10.52	24.86	29.9	3.0m./VERT	5.0	AVG
2999.70	33.83	-4.61	29.22	43.9	3.0m./VERT	14.7	AVG
1500.10	37.57	-9.41	28.16	29.9	3.0m./HORZ	1.7	AVG
2658.00	33.94	-3.05	30.89	43.9	3.0m./HORZ	13.0	AVG

All other emission found are 20 dB or greater from the applicable limit.

Sample Calculation at 1349.30 MHz:

Magnitude of Measured Frequency	35.38	dBuV
+ Antenna Factor + Cable Loss + Amplifier Gain	-10.52	dB/m
Corrected Result	24.86	dBuV/m

Test Date: May 18, 2017

Tested By

Signature:



Name: Robert Nevels

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification/ RSS 220
 2AEP2-THAWK1
 17-0097
 June 13, 2017
 Headsight, Inc.
 HT5200

Table 11. Radiated Emissions from Transmitter Test Data Above 960 MHz @ 2 m Dual Unit

Above 960 MHz							
Test: Radiated Emissions				Client: Headsight, Inc.			
Project: 17-0097				Model: HT5200			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	AVG Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
1276.90	35.28	-7.85	27.43	30.0	3.0m./VERT	2.6	AVG
2034.40	45.93	-3.43	42.50	44.0	3.0m./VERT	1.5	AVG
3288.00	45.21	0.58	45.79	54.0	3.0m./VERT	8.2	AVG
1649.90	47.26	-7.27	40.00	42.0	3.0m./HORZ	2.0	AVG
2250.85	46.05	-3.75	42.30	44.0	3.0m./HORZ	1.7	AVG
3981.00	46.22	1.97	48.19	54.0	3.0m./HORZ	5.8	AVG
All other emission found are 20 dB or greater from the applicable limit.							

Sample Calculation at 1276.90 MHz:

Magnitude of Measured Frequency	35.28 dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	-7.85 dB/m
Corrected Result	27.43 dBuV/m

Test Date: May 18, 2017

Tested By

Signature: Robert Nevels

Name: Robert Nevels

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification/ RSS 220
 2AEP2-THAWK1
 17-0097
 June 13, 2017
 Headsight, Inc.
 HT5200

Table 12. Radiated Emissions from Transmitter Test Data Above 960 MHz @ 3 m DualUnit

Above 960 MHz							
Test: Radiated Emissions				Client: Headsight, Inc.			
Project: 17-0097				Model: HT5200			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	AVG Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
1649.90	47.65	-7.27	40.39	42.0	3.0m./HORZ	1.6	AVG
2200.90	31.75	-3.75	28.00	44.0	3.0m./HORZ	16.0	AVG
3269.00	46.14	0.57	46.71	54.0	3.0m./HORZ	7.3	AVG
1273.60	34.14	-7.85	26.29	30.0	3.0m./VERT	3.7	AVG
1649.90	44.55	-7.26	37.29	42.0	3.0m./VERT	4.7	AVG
2223.10	46.03	-3.81	42.22	44.0	3.0m./VERT	1.8	AVG
3213.00	45.86	0.58	46.44	54.0	3.0m./VERT	7.6	AVG
All other emission found are 20 dB or greater from the applicable limit.							

Sample Calculation at 1649.90 MHz:

Magnitude of Measured Frequency	47.65 dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	-7.27 dB/m
Corrected Result	40.39 dBuV/m

Test Date: May 18, 2017

Tested By

Signature: Robert Nevels

Name: Robert Nevels

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

Table 13. Radiated Emissions from Transmitter Test Data Above 960 MHz @ 3.7m Dual Unit

Above 960 MHz							
Test: Radiated Emissions				Client: Headsight, Inc.			
Project: 17-0097				Model: HT5200			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	AVG Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
1649.00	43.82	-7.26	36.56	42.0	3.0m./VERT	5.4	AVG
3063.00	34.29	-0.28	34.01	44.0	3.0m./VERT	10.0	AVG
3943.00	33.82	1.96	35.78	54.0	3.0m./VERT	18.2	AVG
1649.00	46.07	-7.27	38.81	42.0	3.0m./HORZ	3.2	AVG
2442.00	32.87	-3.33	29.54	44.0	3.0m./HORZ	14.5	AVG
3962.50	34.53	1.97	36.50	54.0	3.0m./HORZ	17.5	AVG

All other emission found are 20 dB or greater from the applicable limit.

Sample Calculation at 1649.00 MHz:

Magnitude of Measured Frequency	43.82 dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	-7.26 dB/m
Corrected Result	36.56 dBuV/m

Test Date: May 18, 2017

Tested By

Signature:



Name: Robert Nevels

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

2.15 Radiated Emissions in the GPS band (CFR 15.509 (e), 15.521(g))

In addition to the radiated emissions limits from CFR 15.509 (d), the transmitter shall not exceed the following average limits, in Table 8 when measured using a resolution bandwidth of no less than 1 kHz.

Note: measurement taken with a resolution bandwidth of greater than 1 kHz was corrected using the following equation: recorded measurement (dBuV) + 10 log (RBW_{ref}/RBW_{meas})

Table 14. Radiated Emissions in the GPS band (CFR 15.509 (e), 15.221(g))

Frequency Range (MHz)	EIRP Limit (dBm)	Field Strength Limit at 3 meters (dBuV/m)
1164-1240	-75.3	19.9
1559-1610	-75.3	19.9

The EUT was configured according to ANSI C63.10, Clause 10. During the testing the EUT was rated 360 degrees and the receive antenna was elevated between 1m and 4m to measure and record the maximum emissions being generated by the EUT. The receive antenna was oriented in both the horizontal and vertical polarity. The worst case data is recorded and presented in the tables below.

In each of these bands, the emissions from the transmitter were maximized using a larger bandwidth and the peak detector, then the resolution bandwidth was decreased and the final measurement was taken using the average detector. The spectrum analyzer settings were set to the following parameters:

Frequency start and stop: 1164 MHz to 1240 MHz and 1559 MHz to 1610 MHz. The resolution bandwidth was set to 1 kHz or 3 kHz, when the measurements were performed at 3 kHz a correction factor was used to correct the data collected at 3 kHz back to 1 kHz using the equation noted in the paragraph above. The video bandwidth was set to greater than or equal to the resolution bandwidth. The detector used was Peak or Average. The worse case emissions are seen below.

EUT was tested in single configuration and in dual configuration. The test results show that there are negligible differences between having a single configuration or dual configuration. The test results for dual configuration have been selected and presented here as a representative case.

The worst-case radiated emission for the EUT in the GPS band was 1.5 dB below the limit at 1600.00 MHz at a test height of 1m. All other radiated emissions were at least 2.6dB below the CFR 15.509 limits. This data can be found in the tables below.

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification/ RSS 220
 2AEP2-THAWK1
 17-0097
 June 13, 2017
 Headsight, Inc.
 HT5200

Table 15. Worst Case Radiated Emissions Test Data in The GPS Bands @ 1 m Dual Unit

1164 – 1240 MHz and 1559- 1610 MHz								
Test: Radiated Emissions					Client: Headsight, Inc.			
Project: 17-0097					Model: HT5200			
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CA-AMP (dB/m)	Results (dBuV/m)	AVG Limits (dBuV/m)	Antenna Distance/Polarization	Margin (dB)	Detector PK, or AVG
1199.91	33.55	-4.70	-21.71	7.14	19.9	3.0m./HORZ	12.8	PK
1600.06	29.52	-4.70	-21.09	3.74	19.9	3.0m./HORZ	16.2	PK
1199.91	40.39	-4.70	-21.55	14.14	19.9	3.0m./VERT	5.8	PK
1600.05	31.14	-4.70	-21.08	5.36	19.9	3.0m./VERT	14.5	PK

Note: measurements collected with a RBW of 3 kHz therefore a correction factor was applied in the additional factor column.

Note: A duty cycle correction factor of -13.6 dB was included in the AF+CA-AMP column to correct from PK to AVG detection.

Sample Calculation at 1600.06 MHz:

Magnitude of Measured Frequency	29.52 dBuV
+Additional Factor	-4.70 dB
+Antenna Factor + Cable Loss+ Amplifier Gain	-21.09 dB/m
Corrected Result	3.74 dBuV/m

Test Date: June 27, 2017

Tested By

Signature: Robert Nevels

Name: Robert Nevels

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

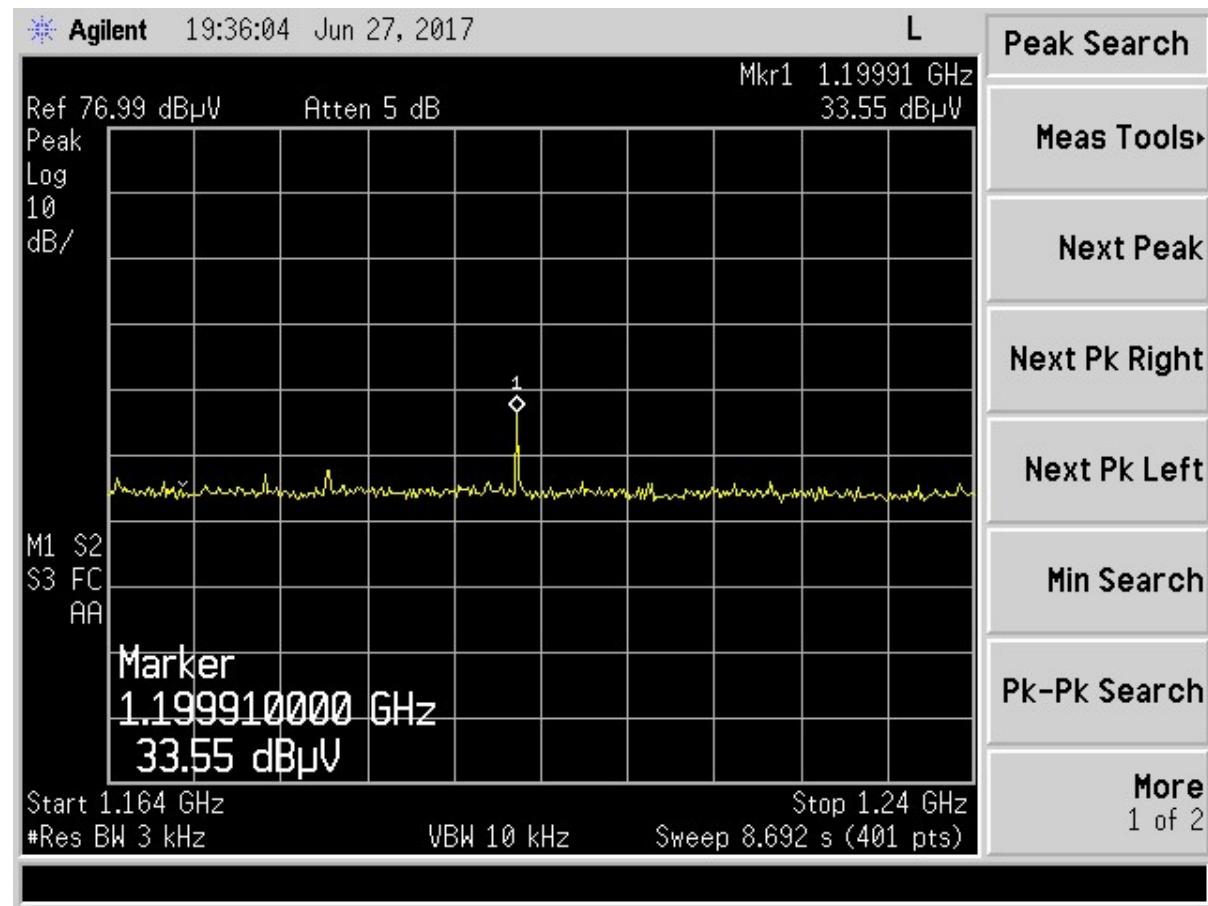


Figure 6. Plot 1 @ 1 Meter Dual Unit

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

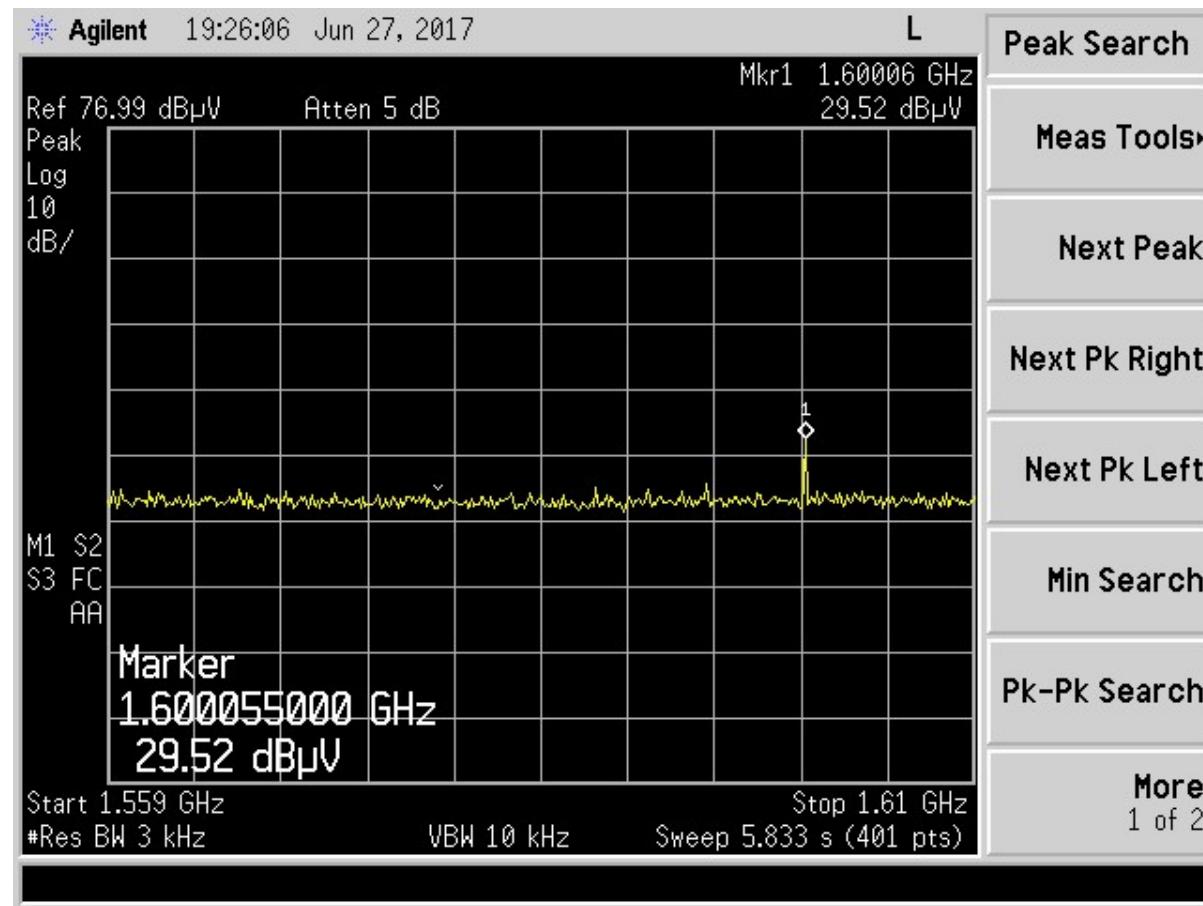


Figure 7. Plot 2 @ 1 Meter Dual Unit

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

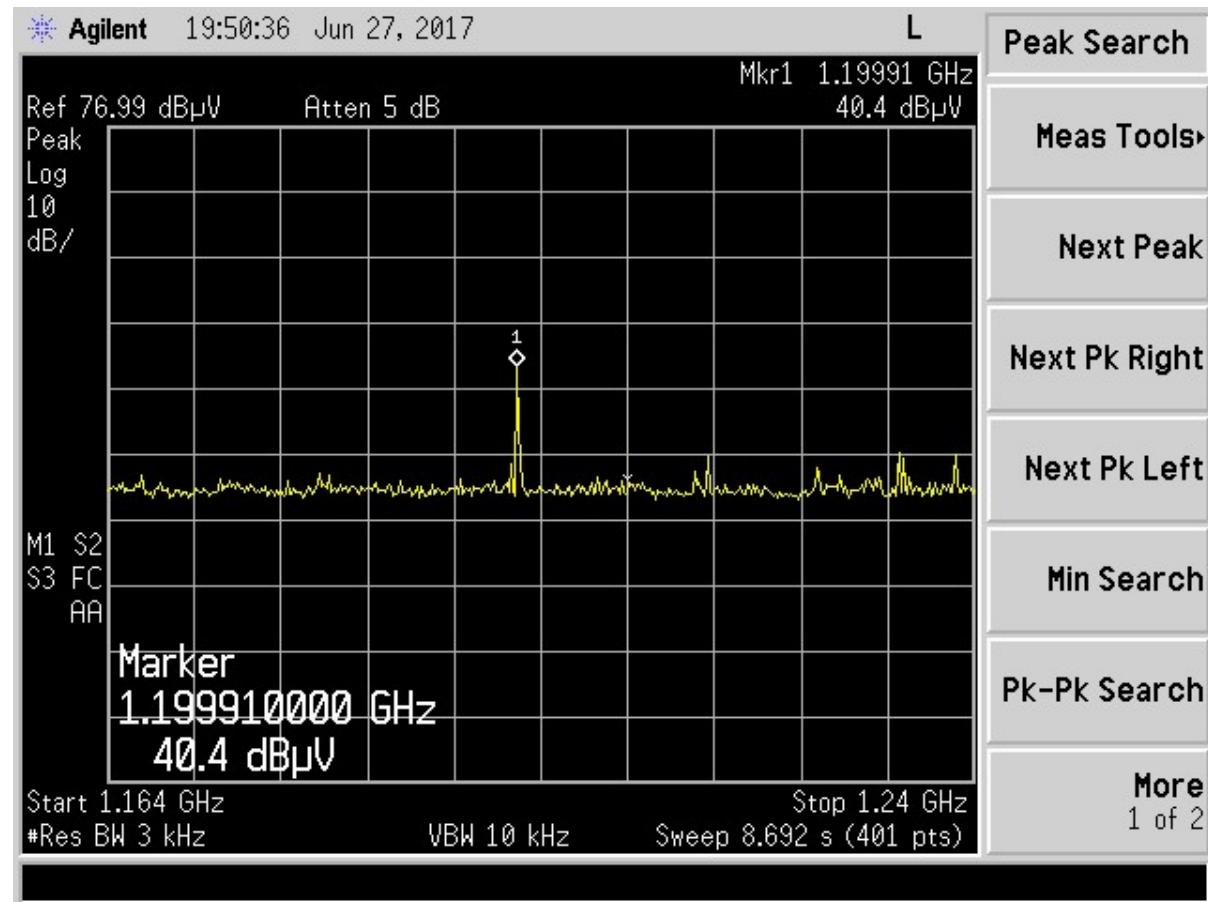


Figure 8. Plot 3 @ 1 Meter Dual Unit

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

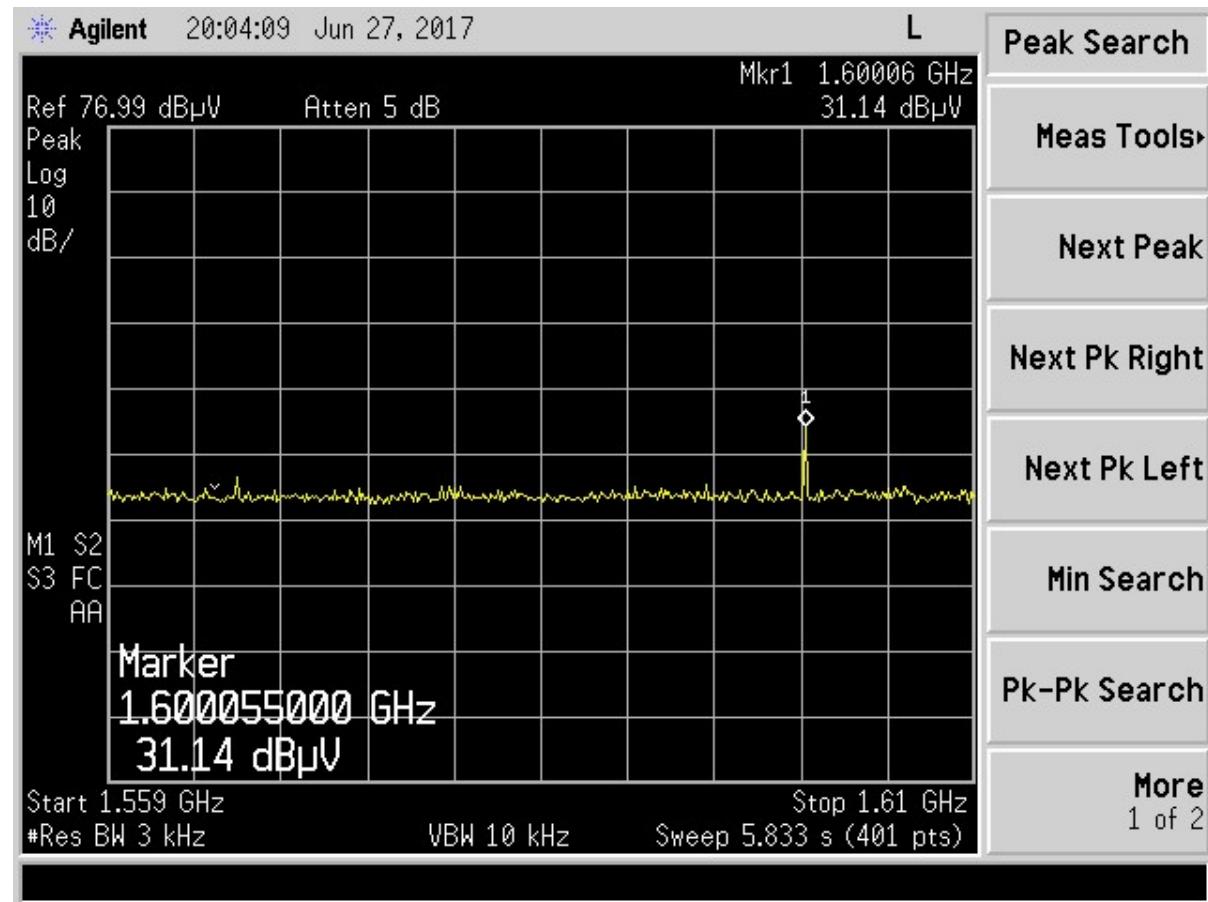


Figure 9. Plot 4 @ 1 Meter Dual Unit

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification/ RSS 220
 2AEP2-THAWK1
 17-0097
 June 13, 2017
 Headsight, Inc.
HT5200

Table 16. Worst Case Radiated Emissions Test Data In The GPS Bands @ 2m Dual Unit

1164 – 1240 MHz and 1559- 1610 MHz									
Test: Radiated Emissions					Client: Headsight, Inc.				
Project: 17-0097					Model: HT5200				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CA-AMP (dB/m)	Results (dBuV/m)	Avg Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG	
1199.91	40.82	-4.70	-21.08	14.57	19.9	3.0m./VERT	5.3	PK	
1600.06	41.07	-4.70	-21.71	15.29	19.9	3.0m./VERT	4.6	PK	
1199.91	38.45	-4.70	-21.55	12.04	19.9	3.0m./HORZ	7.9	PK	
1600.06	39.93	-4.70	-21.09	14.15	19.9	3.0m./HORZ	5.8	PK	

Note: measurements collected with a RBW of 3 kHz therefore a correction factor was applied in the additional factor column.

Note: A duty cycle correction factor of -13.6 dB was included in the AF+CA-AMP column to correct from PK to AVG detection.

Sample Calculation at 1199.91 MHz:

Magnitude of Measured Frequency	40.82	dBuV
+Additional Factor	-4.70	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	-21.08	dB/m
Corrected Result	14.57	dBuV/m

Test Date: May 18, 2017

Tested By

Signature: Robert Nevels

Name: Robert Nevels

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

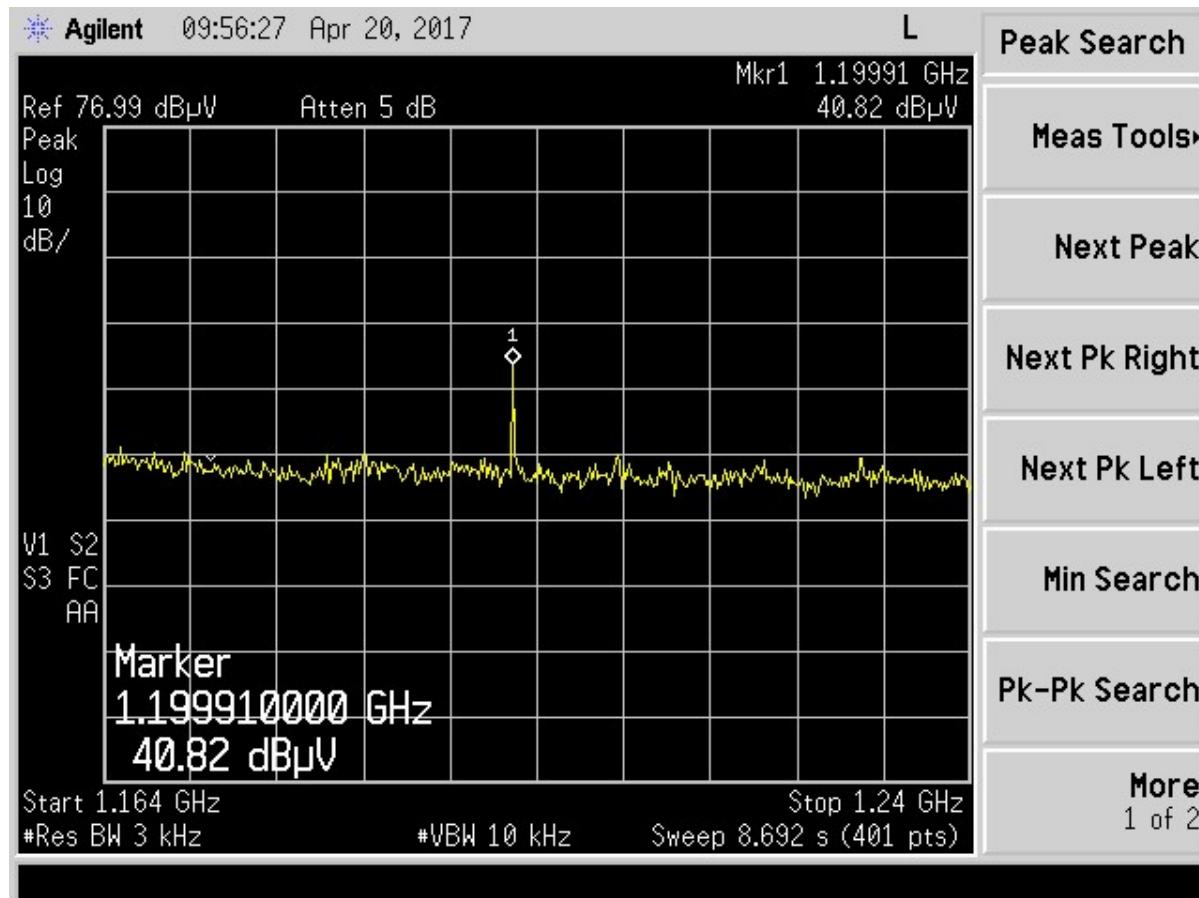


Figure 10. Plot 1 @ 2 Meters Dual Unit

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

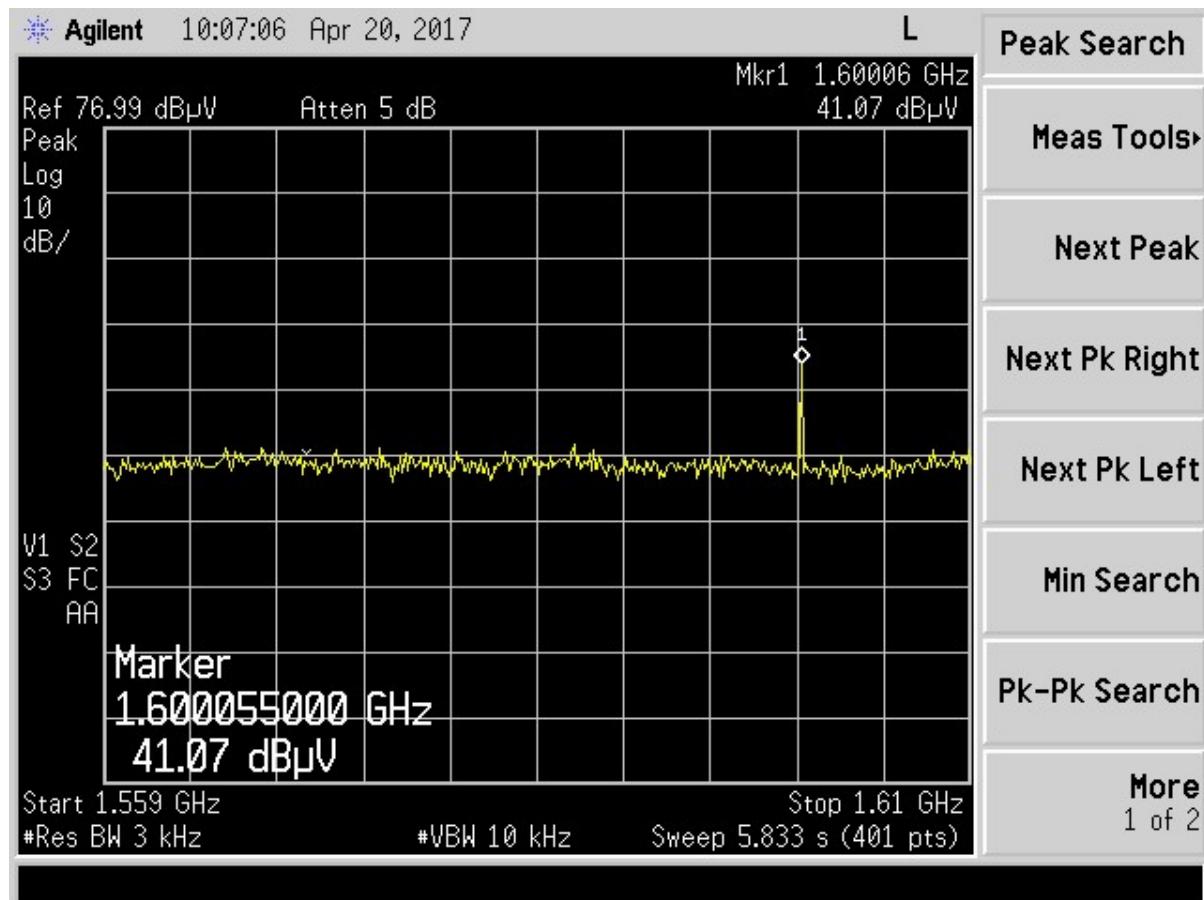


Figure 11. Plot 2 @ 2 Meters Dual Unit

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

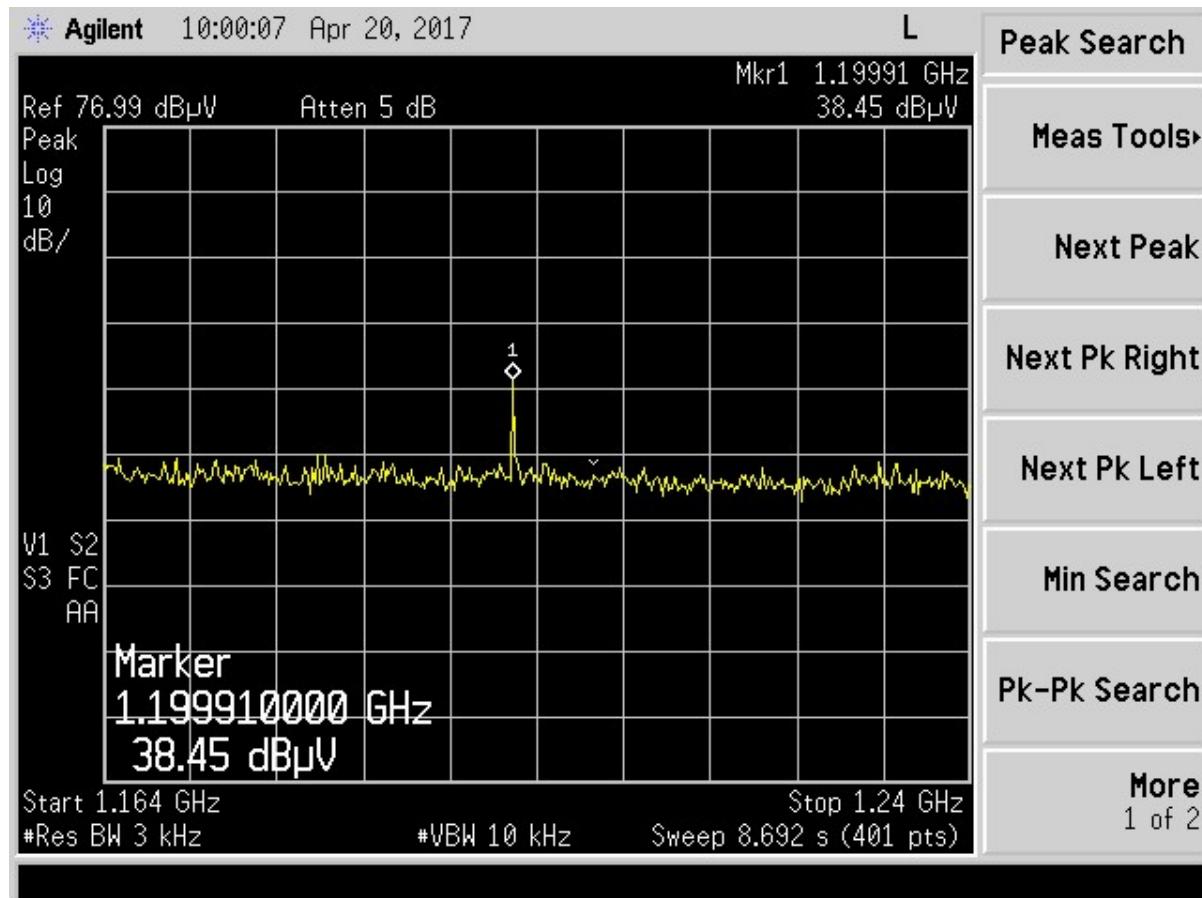


Figure 12. Plot 3 @ 2 Meters Dual Unit

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

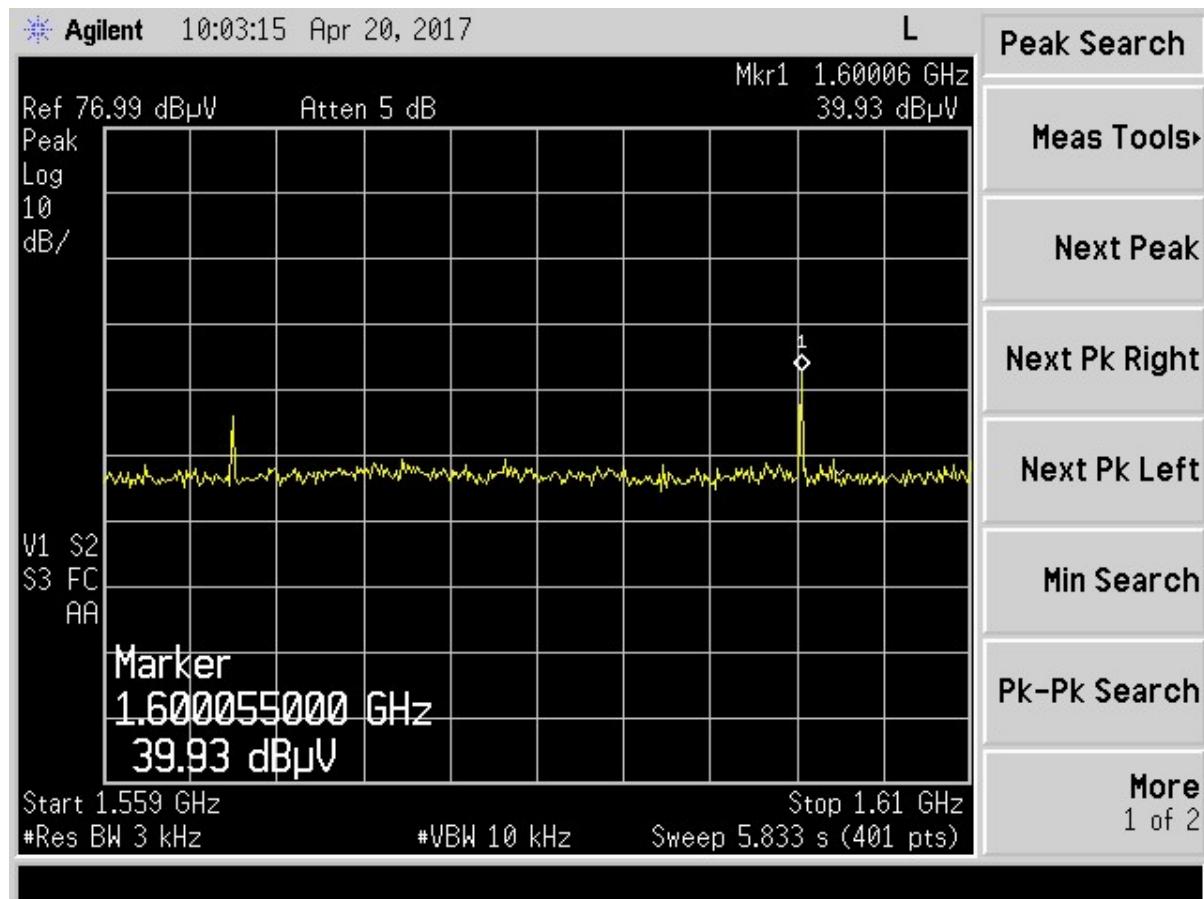


Figure 13. Plot 4 @ 2 Meters Dual Unit

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification/ RSS 220
 2AEP2-THAWK1
 17-0097
 June 13, 2017
 Headsight, Inc.
 HT5200

Table 17. Worst Case Radiated Emissions Test Data In The GPS Bands @ 3m Dual Unit

1164 – 1240 MHz and 1559- 1610 MHz								
Test: Radiated Emissions					Client: Headsight, Inc.			
Project: 17-0097					Model: HT5200			
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CA-AMP (dB/m)	Results (dBuV/m)	AVG Limits (dBuV/m)	Antenna Distance/Polarization	Margin (dB)	Detector PK, or AVG
1199.91	37.37	-4.70	-21.55	11.12	19.9	3.0m./VERT	8.8	PK
1199.91	43.75	-4.70	-21.71	17.34	19.9	3.0m./HORZ	2.6	PK
1600.06	36.53	-4.70	-21.09	10.75	19.9	3.0m./HORZ	9.2	PK
1600.06	37.16	-4.70	-21.09	11.38	19.9	3.0m./VERT	8.5	PK

Note: measurements collected with a RBW of 3 kHz therefore a correction factor was applied in the additional factor column.

Note: A duty cycle correction factor of -13.6 dB was included in the AF+CA-AMP column to correct from PK to AVG detection.

Sample Calculation at 1199.91 MHz:

Magnitude of Measured Frequency	37.37 dBuV
+Additional Factor	-4.70 dB
+Antenna Factor + Cable Loss+ Amplifier Gain	-21.55 dB/m
Corrected Result	11.12 dBuV/m

Test Date: May 18, 2017

Tested By

Signature: Robert Nevels

Name: Robert Nevels

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

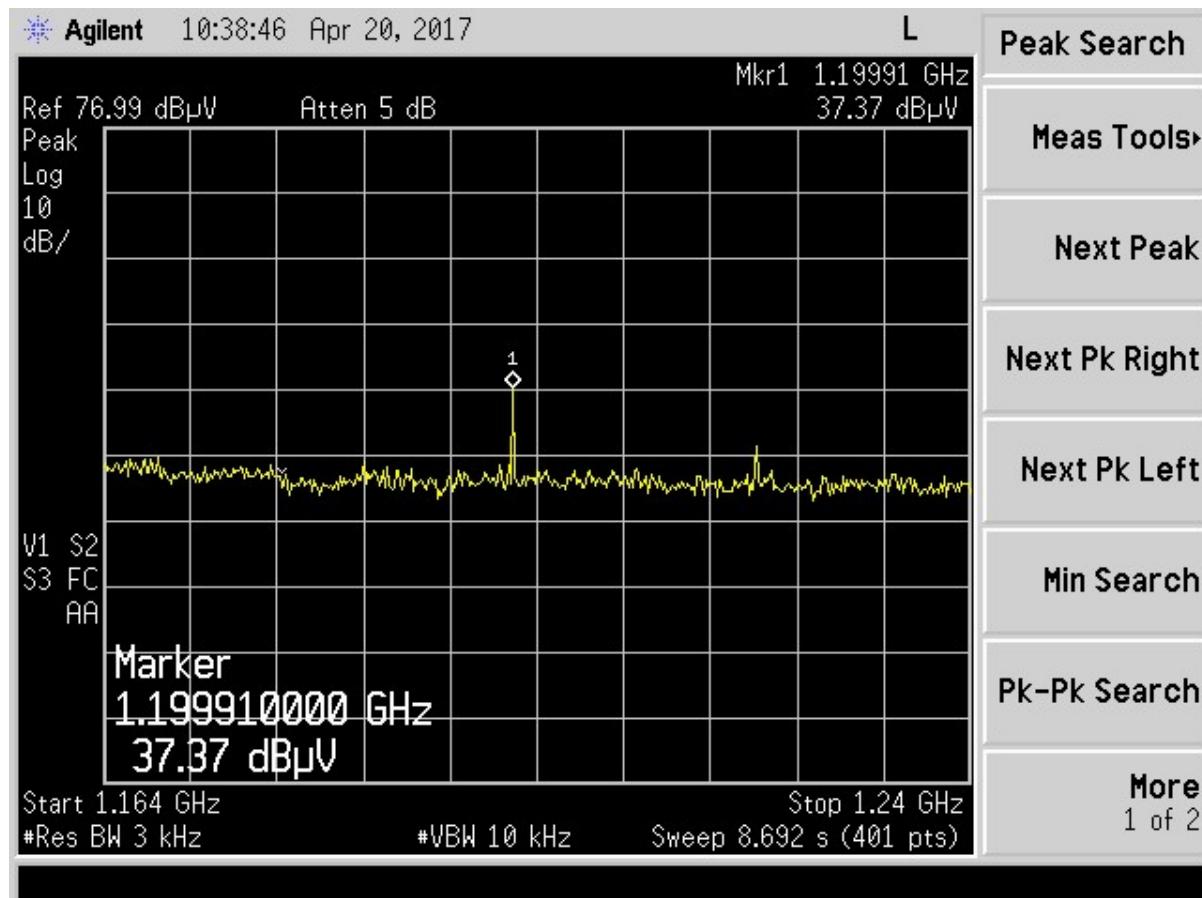


Figure 14. Plot 1 @ 3 Meters Dual Unit

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

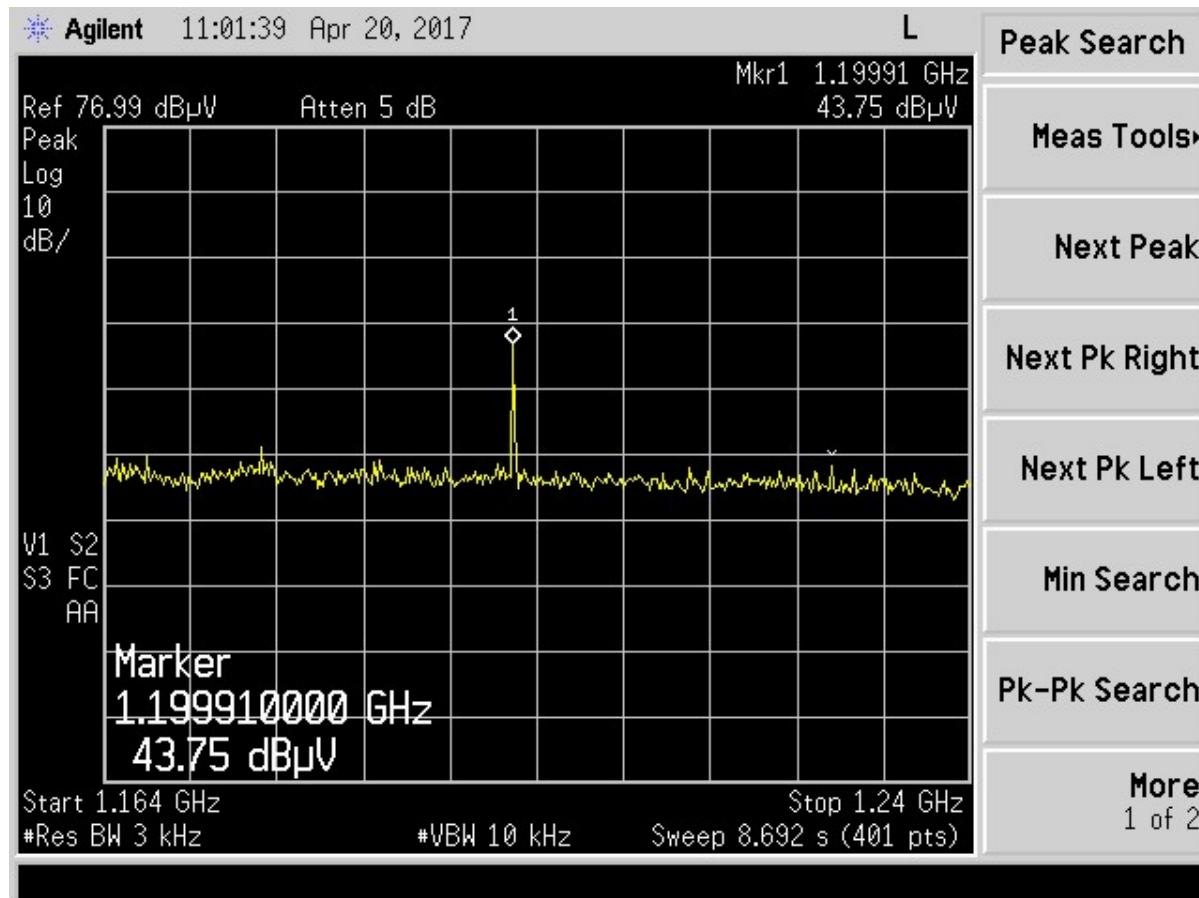


Figure 15. Plot 2 @ 3 Meters Dual Unit

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

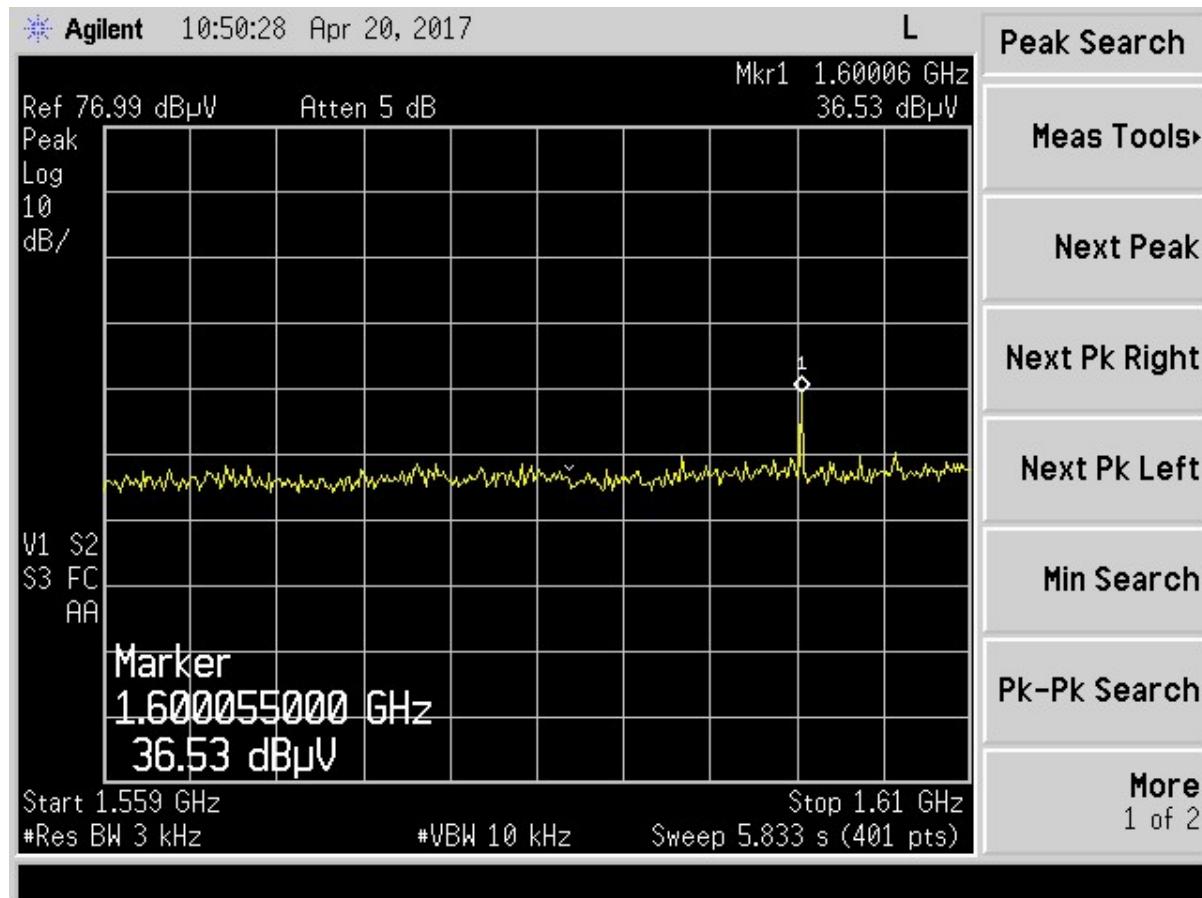


Figure 16. Plot 3 @ 3 Meters Dual Unit

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

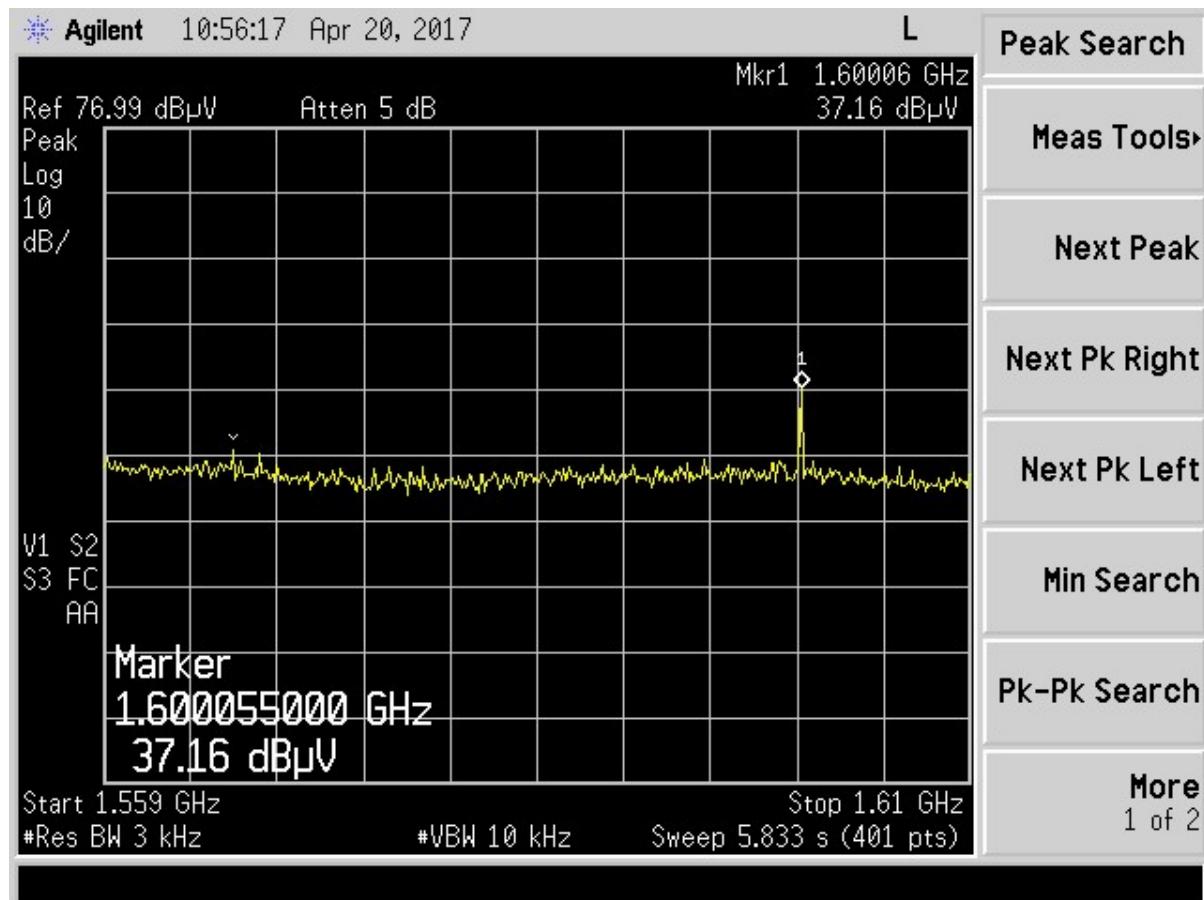


Figure 17. Plot 4 @ 3 Meters Dual Unit

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification/ RSS 220
 2AEP2-THAWK1
 17-0097
 June 13, 2017
 Headsight, Inc.
 HT5200

Table 18. Worst Case Radiated Emissions Test Data In The GPS Bands @ 3.7m Dual Unit

1164 – 1240 MHz and 1559- 1610 MHz									
Test: Radiated Emissions					Client: Headsight, Inc.				
Project: 17-0097					Model: HT5200				
Frequency (MHz)	Test Data (dBuv)	Additional Factor	AF+CA-AMP (dB/m)	Results (dBuV/m)	Avg Limits (dBuv/m)	Antenna Distance/Polarization	Margin (dB)	Detector PK, or AVG	
1600.06	35.59	-4.70	-21.08	9.81	19.9	3.0m./VERT	10.1	PK	
1199.91	43.05	-4.70	-21.71	16.64	19.9	3.0m./HORZ	3.3	PK	
1199.91	36.84	-4.70	-21.55	10.59	19.9	3.0m./VERT	9.3	PK	
1600.06	31.35	-4.70	-21.09	5.57	19.9	3.0m./HORZ	14.3	PK	

Note: measurements collected with a RBW of 3 kHz therefore a correction factor was applied in the additional factor column.


Note: A duty cycle correction factor of -13.6 dB was included in the AF+CA-AMP column to correct from PK to AVG detection.

Sample Calculation at 1600.06 MHz:

Magnitude of Measured Frequency	35.59 dBuV
+Additional Factor	-4.70 dB
+Antenna Factor + Cable Loss+ Amplifier Gain	-21.08 dB/m
Corrected Result	9.81 dBuV/m

Test Date: May 18, 2017

Tested By

Signature: 

Name: Robert Nevels

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

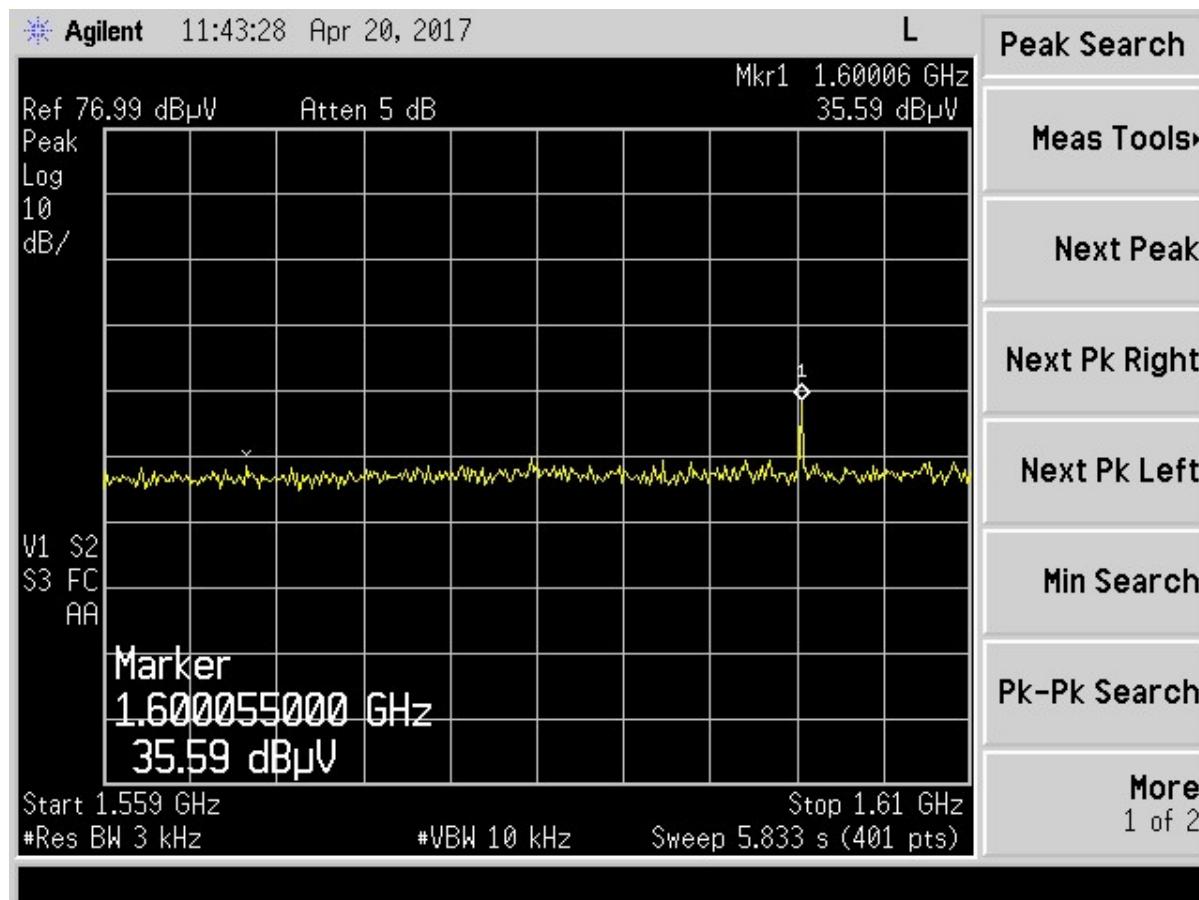


Figure 18. Plot 1 @ 3.7 Meters Dual Unit

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

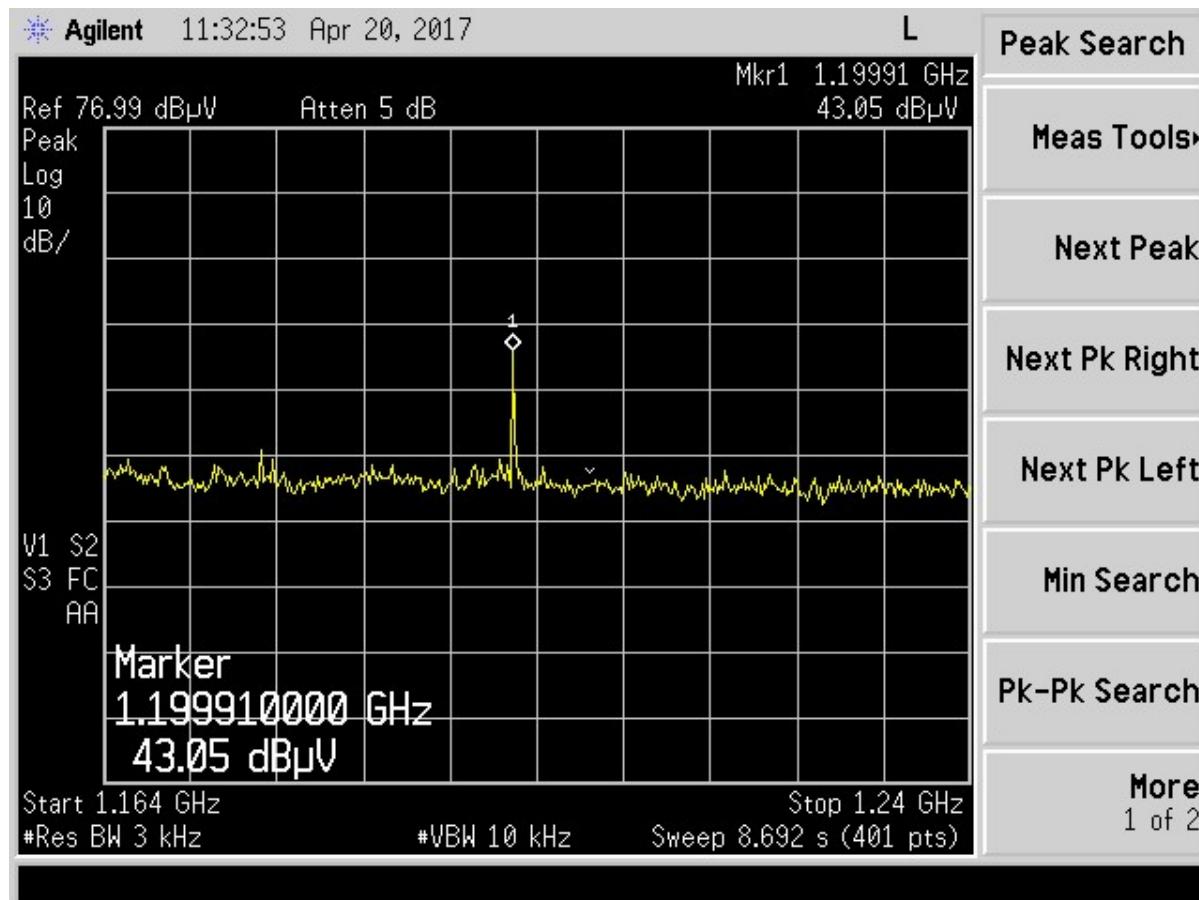


Figure 19. Plot 2 @ 3.7 Meters Dual Unit

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

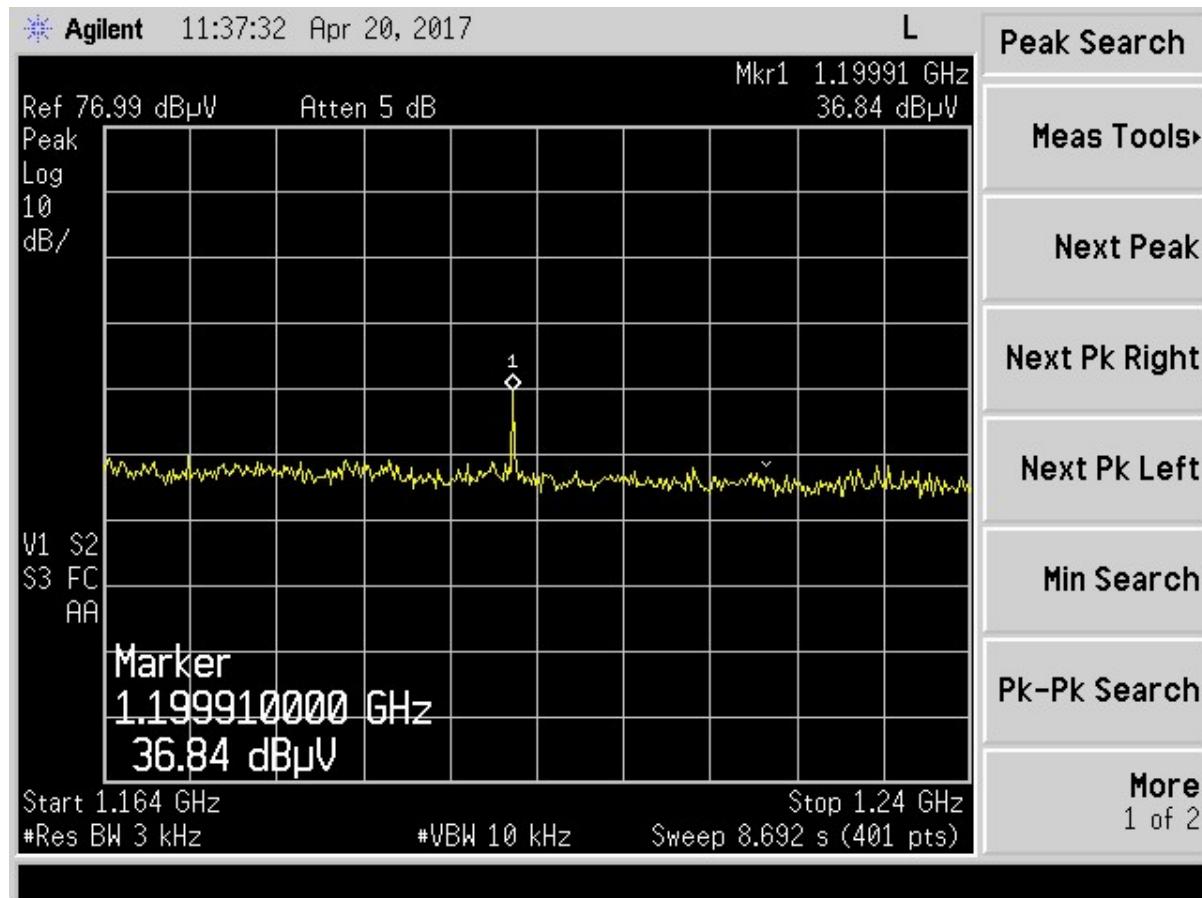


Figure 20. Plot 3 @ 3.7 Meters Dual Unit

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

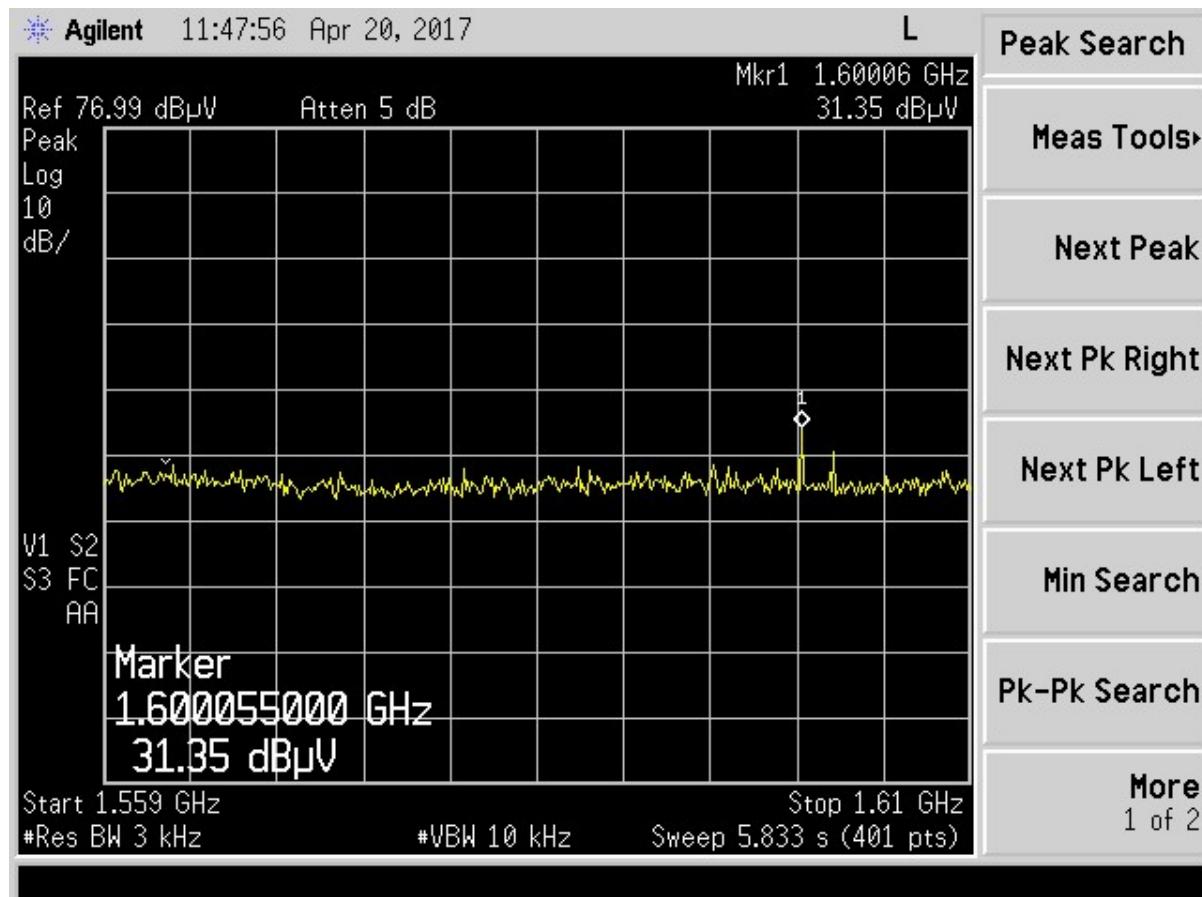


Figure 21. Plot 4 @ 3.7 Meters Dual Unit

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 220
2AEP2-THAWK1
17-0097
June 13, 2017
Headsight, Inc.
HT5200

2.16 Measurement Uncertainty

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4. A coverage factor of $k=2$ was used to give a level of confidence of approximately 95%.

2.16.1 Conducted Emissions Measurement Uncertainty

Measurement Uncertainty (within a 95% confidence level) for this test is $\pm 2.78\text{dB}$.

This test is not applicable.

2.16.2 Radiated Emissions Measurement Uncertainty

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is $\pm 5.39\text{dB}$. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is $\pm 5.18\text{dB}$.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is $\pm 5.21\text{dB}$.

The data listed in this test report does not have sufficient margin to negate the effects of uncertainty. Therefore, the EUT conditionally meets this requirement.