

FCC PART 22/24 TEST REPORT

FCC Part 22 /Part 24

Report Reference No....... JTT20150500102

FCC ID.....: 2AEP7N401

Compiled by

(position+printed name+signature)..: File administrators Kevin Liu

Supervised by

(position+printed name+signature)..: Project Engineer Kevin Liu

Approved by

(position+printed name+signature)..: RF Manager Eric Wang

Date of issue...... May 18, 2015

Representative Laboratory Name .: SHENZHEN JIETONG INFORMATION TECHNOLOGY CO., LTD

Address No.12 Building Shangsha, Innovation & Technology Park, Futian

District, Shenzhen, P.R.China

Testing Laboratory Name Shenzhen Academy of Metrology and Quality Inspection

Applicant's name...... Noblex Argentina S.A.

ARGENTINA.

Test specification:

FCC Part 22: PUBLIC MOBILE SERVICES

kevm Lin

TRF Originator...... SHENZHEN JIETONG INFORMATION TECHNOLOGY CO., LTD.

SHENZHEN JIETONG INFORMATION TECHNOLOGY CO., LTDAII rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN JIETONG INFORMATION TECHNOLOGY CO., LTD as copyright owner and source of the material. SHENZHEN JIETONG INFORMATION TECHNOLOGY CO., LTD takess no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description Smart Phone

Trade Mark NOBLEX

Manufacturer...... AMER MOBILE CO.,LIMITED

Model/Type reference...... N401

Listed Models N/A

Ratings DC 3.70V

Modulation QPSK

Hardware version: TMBIc

Frequency...... WCDMA Band II & WCDMA Band V

Result..... PASS

TEST REPORT

Test Report No. :	JTT20150500102	May 18, 2015	
	31120130300102	Date of issue	

Equipment under Test : Smart Phone

Model /Type : N401

Listed Models : N/A

Applicant : Noblex Argentina S.A.

Address : Jaramillo 3670 – CIUDAD AUTONOMA DE BUENOS

AIRES - ARGENTINA.

Manufacturer : AMER MOBILE CO.,LIMITED

Address : Room A30, 9th floor, Silvercorp International Tower No

707-713, Nathan Road, mongkok, Kowloon, Hong Kong

Test Result:	PASS

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	TEST STANDARDS	<u> 4</u>
<u>2.</u>	SUMMARY	<u>5</u>
2.1.	General Remarks	5
2.2.	Product Description	5
2.3.	Equipment under Test	6
2.4.	Short description of the Equipment under Test (EUT)	6
2.5.	Internal Identification of AE used during the test	7
2.6. 2.7.	Normal Accessory setting	7
2.7. 2.8.	EUT configuration Related Submittal(s) / Grant (s)	7 7
2.8. 2.9.	Modifications	7
2.10.	General Test Conditions/Configurations	8
2.11.	Note	8
3.	TEST ENVIRONMENT	9
3.1.	Address of the test laboratory	9
3.2.	Test Facility	9
3.3.	Environmental conditions	9
3.4.	Test Description	9
3.5.	Equipments Used during the Test	10
<u>4 .</u>	TEST CONDITIONS AND RESULTS	12
4.1.	Output Power	12
4.2.	Radiated Spurious Emssion	15
4.3.	Occupied Bandwidth and Emission Bandwith	18
4.4.	Band Edge Compliance	21
4.5.	Spurious Emssion on Antenna Port	24
4.6.	Frequency Stability Test	44
_		
5	TEST SETUP PHOTOS OF THE FUT	46

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Part 22 (10-1-12 Edition): PRIVATE LAND MOBILE RADIO SERVICES.

FCC Part 24(10-1-12 Edition): PUBLIC MOBILE SERVICES

<u>TIA/EIA 603 D June 2010:</u> Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

47 CFR FCC Part 15 Subpart B: - Unintentional Radiators

FCC Part 2: FREQUENCY ALLOCA-TIONS AND RADIO TREATY MAT-TERS; GENERAL RULES AND REG-ULATIONS

ANSI C63.4:2009: Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

FCCKDB971168D01 Power Meas License Digital Systems

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample		Apr 20, 2015
Testing commenced on	:	Apr 21, 2015
Testing concluded on	:	May 20, 2015

2.2. Product Description

The **Noblex Argentina S.A.**'s Model: N401 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	Smart Phone		
Model Number	N401		
Mar Place at Trans	GMSK for GSM/GPRS/EDGE, 8-PSK for EDGE only		
Modilation Type	Downlink,QPSK for UMTS		
Antenna Type	Internal		
UMTS Operation Frequency Band	Device supported UMTS FDD Band II and FDD Band V		
	IEEE 802.11b:2412-2462MHz		
MI AN ECC Operation fraguency	IEEE 802.11g:2412-2462MHz		
WLAN FCC Operation frequency	IEEE 802.11n HT20:2412-2462MHz		
	IEEE 802.11n HT40:2422-2452MHz		
BT CE Operation frequency	2402MHz-2480MHz		
HSDPA Release Version	Release 10		
HSUPA Release Version	Release 6		
DC-HSUPA Release Version	Not Supported		
WCDMA Release Version	R99		
	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)		
WLAN FCC Modulation Type	IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)		
WEAN FOO Modulation Type	IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK)		
	IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)		
BT Modulation Type	GFSK (BT 4.0)/GFSK,8DPSK,π/4DQPSK(BT 3.0+EDR)		
Hardware version	TMBIc		
Software version	Newsan_NOBLEX_AR_SW_V1.0_HW_V1.0_20150417		
Android version	Android 4.4.2		
GPS function	Supported		
WLAN	Supported 802.11b/802.11g/802.11n		
Bluetooth	Supported BT 4.0/BT 3.0+EDR		
GSM/EDGE/GPRS	Supported GSM/GPRS/EDGE		
GSM/EDGE/GPRS Power Class	GSM900:Power Class 4/DCS1800:Power Class 1		
GSM/EDGE/GPRS Operation Frequency	GSM900 :880MHz-915MHz/DCS1800:1710MHz-1785MHz		
GSM/EDGE/GPRS Operation Frequency	GSM900/DCS1800/GPRS900/ GPRS		
Band	1800/EDGE900/EDGE1800		
GSM Release Version	R99		
GPRS/EDGE Multislot Class	GPRS/EDGE: Multi-slot Class 12		
Extreme temp. Tolerance	-30°C to +50°C		
Extreme vol. Limits	3.40VDC to 4.20VDC (nominal: 3.70VDC)		
GPRS operation mode	Class B		

2.3. Equipment under Test

Power supply system utilised

Power supply voltage	:	0	120V / 60 Hz	0	115V / 60Hz
		0	12 V DC	0	24 V DC
		•	Other (specified in blank bel	ow)	

DC 3.70V

Test frequency list

Test Mode	TX/RX	RF Channel			
i est iviode	I A/KA	Low(L)	Middle (M)	High (H)	
	TX	Channel 128	Channel 190	Channel 251	
GSM850	1 ^	824.2 MHz	836.6 MHz	848.8 MHz	
GSIVIOSU	RX	Channel 128	Channel 190	Channel 251	
	NA NA	869.2 MHz	881.6 MHz	893.8 MHz	
Test Mode	TX/RX		RF Channel		
1 est Mode	I A/KA	Low(L)	Middle (M)	High (H)	
	TX	Channel 512	Channel 661	Channel 810	
GSM1900	17	1850.2 MHz	1880.0 MHz	1909.8 MHz	
G21VI 1900	RX	Channel 512	Channel 661	Channel 810	
	KA	1930.2 MHz	1960.0 MHz	1989.8 MHz	
Test Mode	TX/RX	RF Channel			
i est iviode		Low(L)	Middle (M)	High (H)	
	TX RX	Channel 4132	Channel 4182	Channel 4233	
WCDMA850		826.4 MHz	836.4 MHz	846.6 MHz	
WCDIVIAOSU		Channel 4357	Channel 4407	Channel 4458	
	ľΛ	871.4 MHz	881.4 MHz	891.6 MHz	
Test Mode	TX/RX	RF Channel			
i est iviode		Low(L)	Middle (M)	High (H)	
	TX	Channel 9262	Channel 9400	Channel 9538	
WCDMA1900	۱۸	1852.4 MHz	1880.0 MHz	1907.6 MHz	
WCDIVIA 1900	RX	Channel 9662	Channel 9800	Channel 9938	
	ľΛ	1932.4 MHz	1960.0 MHz	1987.6 MHz	

2.4. Short description of the Equipment under Test (EUT)

2.4.1 General Description

N401 is subscriber equipment in the WCDMA/GSM system. The HSPA/UMTS frequency band is Band II, Band V; The GSM/GPRS/EDGE (EDGE downlink only) frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only Band II and Band V and GSM850 and PCS1900 bands test data included in this report. The Smart Phone implements such functions as RF signal receiving/transmitting, HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and SIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

2.4.2 Technical Specification

Characteristics	Description		
Radio System Type	⊠GSM/⊠UMTS		
	GSM850/WCDMA850	Transmission(TX): 824 to 849MHz	
Supported Fraguency Bango	G2M920/WCDMA920	Receiving(RX): 869 to 894MHz	
Supported Frequency Range	CSM1000AMCDMA1000	Transmission(TX): 1850 to 1910MHz	
	GSM1900/WCDMA1900	Receiving(RX): 1930 to 1990MHz	
TX and RX Antenna Ports	TX& RX port:	1	
Supported Channel Bandwidth	GSM system:	200 kHz	
Designation of Emissions	UMTS system:	5 MHz	
(Note: the necessary bandwidth of which	GSM850:	250KGXW	
is the worst value from the measured	GSM1900:	248KGXW	
occupied bandwidths for each type of	UMTS 850:	4M67F9W	
channel bandwidth configuration.)	UMTS 1900:	4M67F9W	

2.5. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Charger

AE1

Model: S005UA0500100

INPUT: 100-240V 50/60Hz 0.15A OUTPUT: DC 5.0V,1000mAh

2.6. Normal Accessory setting

Fully charged battery was used during the test.

2.7. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- O supplied by the lab

0	Power Cable	Length (m):	/
		Shield :	/
		Detachable :	/
0	Multimeter	Manufacturer:	/
		Model No. :	/

2.8. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID**: **2AEP7N401** filing to comply with FCC Part 22 and Part 24 Rules

2.9. Modifications

No modifications were implemented to meet testing criteria.

^{*}AE ID: is used to identify the test sample in the lab internally.

2.10. General Test Conditions/Configurations

2.10.1 Test Modes

NOTE: The test mode(s) are selected according to relevant radio technology specifications.

Test Mode	Test Modes Description
GSM/TM1	GSM system, GSM,GMSK modulation
GSM/TM2	GSM system, GPRS, GMSK modulation
GSM/TM3	GSM system, EDGE, GMSK modulation
UMTS/TM1	WCDMA system, QPSK modulation
UMTS/TM2	HSDPA system, QPSK modulation
UMTS/TM3	HSUPA system, QPSK modulation

Note:

- 1. This EUT owns two SIM cards, after we perform the pretest for these two SIM cards; we found the SIM 1 is the worst case, so its result is recorded in this report.
- 2. EDGE and GPRS use same modulation type (GMSK), we test only GPRS according to 3GPPP TS 151 010 requirement.

2.10.2 Test Environment

Environment Parameter	Selected Values During Tests			
Relative Humidity	Ambient			
Temperature	TN	Ambient		
	VL	3.4V		
Voltage	VN	3.7V		
	VH	4.2V		

NOTE: VL=lower extreme test voltage VN=nominal voltage VH=upper extreme test voltage TN=normal temperature

2.11. Note

1. The EUT is a Smart Phone with WCDMA/GSM/GPRS/EDGE,WiFi and Bluetooth fuction,The functions of the EUT listed as below:

	Test Standards	Reference Report
GSM/GPRS/EDGE	FCC Part 22/FCC Part 24	JTT20150500101
WCDMA	FCC Part 22/FCC Part 24	JTT20150500102
Bluetooth	FCC Part 15 C 15.247	JTT20150500103
BLE	FCC Part 15 C 15.247	JTT20150500104
WiFi	FCC Part 15 C 15.247	JTT20150500105
USB Port	FCC Part 15 B	JTT20150500106
SAR	FCC Part 2 §2.1093	JTT20150500107

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Academy of Metrology and Quality Inspection

No.4 TongFa Road, Xili TownNanshan District, Shenzhen, China The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration information:

Shenzhen Academy of Metrology and Quality Inspection No.4 TongFa Road, Xili TownNanshan District, Shenzhen, China Test Firm FCC Registration number: 806614

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

⁽¹⁾ expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

3.4. Test Description

3.4.1 Cellular Band (824-849MHz paired with 869-894MHz)

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Output Power	§2.1046, §22.913	FCC: ERP ≤ 7W.	Pass
Modulation Characteristics	§2.1047	Digital modulation	N/A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §22.917	≤-13dBm/1%*EBW, in 1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: ≤ -13dBm/100kHz, from 9kHz to 10th harmonics but outside authorized operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: ≤ -13dBm/100kHz.	Pass
Frequency Stability	§2.1055, §22.355	≤ ±2.5ppm.	Pass
NOTE 1: For the verdict, t	he "N/A" denotes	s "not applicable", the "N/T" de notes "not tested".	

3.4.2 PCS Band (1850-1915MHz paired with 1930-1995MHz)

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic)	§2.1046,	EIRP≤2W	Pass

Radiated Output Power	§24.232		
Peak-Average Ratio	§2.1046, §24.232	FCC:Limit≤13dB	N/A
Modulation Characteristics	§2.1047	Digital modulation	N/A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §24.238	≤ -13dBm/1%*EBW, In 1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238	≤-13dBm/1MHz, from 9kHz to10th harmonics but outside authorized Operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238	≤ -13dBm/1MHz.	Pass
Frequency Stability	§2.1055, §24.235	FCC: within authorized frequency block.	Pass
NOTE 1: For the verdict, t	he "N/A" denotes	s "not applicable", the "N/T" de notes "not tested".	

Remark:

1. The measurement uncertainty is not included in the test result.

3.5. Equipments Used during the Test

No.	Equipment	Manufacturer	Model No.	Last Cal.
SB2603	EMI Test Receiver	Rohde & Schwarz	ESCS30	Dec.19, 2014
SB3321	AMN	Rohde & Schwarz	ESH2-Z5	Jan.18, 2015
SB2604	AMN	Rohde & Schwarz	ESH3-Z5	Nov.18, 2014
SB8501/09	EMI Test Receiver	Rohde & Schwarz	ESU40	Jan.19, 2015
SB8501/04	Bilog Antenna	Schwarzbeck	VULB9163	Jan.21, 2013
SB5472/02	Bilog Antenna	Schwarzbeck	VULB9163	Jan.18, 2015
SB3435	Horn Antenna	Rohde & Schwarz	HF906	Jan.19, 2015
SB3434	Horn Antenna	Rohde & Schwarz	HF906	Jan.19, 2015
SB3435/01	Amplifier(1-18GHz)	Rohde & Schwarz		Jan.19, 2015
SB3435/02	Amplifier(18-40GHz)	Rohde & Schwarz		Jan.19, 2015
SB5392/02	Horn Antenna	Amplifier Research	AT4560	Jan.19, 2015
SB3450/01	3m Semi-anechoic chamber	Albatross Projects	9X6X6	Oct.09, 2014
SB8501/01	Communication Test Unit	Agilent	8960	Jan.05, 2015
SB9721/02	Signal Analyzer	Agilent	N9020A	Jan.05, 2015
SB3611	DC Power Supply	KENWOOD	PDS36-10	Apr 24, 2014
SB6691	Climatic Chamber	NANYA	DW-0150	Apr 29, 2014
No.	Equipment	Manufacturer	Model No.	Last Cal.
SB2603	EMI Test Receiver	Rohde & Schwarz	ESCS30	Dec.19, 2014
SB3321	AMN	Rohde & Schwarz	ESH2-Z5	Jan.18, 2015
SB2604	AMN	Rohde & Schwarz	ESH3-Z5	Nov.18, 2015
SB8501/09	EMI Test Receiver	Rohde & Schwarz	ESU40	Jan.19, 2015

SB8501/04	Bilog Antenna	Schwarzbeck	VULB9163	Jan.21, 2013
SB5472/02	Bilog Antenna	Schwarzbeck	VULB9163	Jan.18, 2015
SB3435	Horn Antenna	Rohde & Schwarz	HF906	Jan.19, 2015
SB3434	Horn Antenna	Rohde & Schwarz	HF906	Jan.19, 2015
SB3435/01	Amplifier(1-18GHz)	Rohde & Schwarz		Jan.19, 2015
SB3435/02	Amplifier(18-40GHz)	Rohde & Schwarz		Jan.19, 2015
SB5392/02	Horn Antenna	Amplifier Research	AT4560	May.17, 2013
SB3450/01	3m Semi-anechoic chamber	Albatross Projects	9X6X6	Oct.09, 2014
SB8501/01	Communication Test Unit	Agilent	8960	Jan.05, 2015
SB9721/02	Signal Analyzer	Agilent	N9020A	Jan.05, 2015
SB3611	DC Power Supply	KENWOOD	PDS36-10	Apr 24, 2014
SB6691	Climatic Chamber	NANYA	DW-0150	Apr 29, 2014
SB3345	Loop Antenna	Schwarzbeck	FMZB1516	Jan.20, 2015
N/A	EMI TEST Software	Rohde&Schwarz	ESK1	N/A
N/A	EMI TEST Software	Rohde&Schwarz	EMC32	N/A

The calibration interval was one year.

4. TEST CONDITIONS AND RESULTS


4.1. Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (8960) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

4.1.1. Conducted Output Power

TEST CONFIGURATION

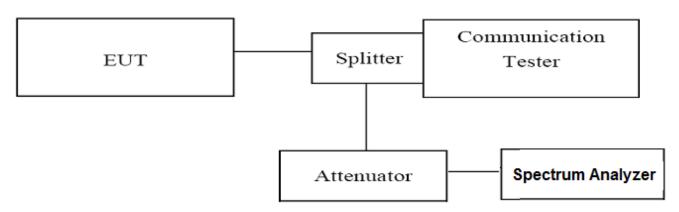

TEST PROCEDURE

- 1. The EUT was set up for the max output power with pseudo random data modulation.
- 2. The power was measured with Agilent Spectrum Analyzer N9020A (peak)
- These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1907.60 MHz for WCDMA band II; 826.40 MHz, 836.60 MHz and 846.60 MHz for WCDMA band V. (low, middle and high of operational frequency range).

TEST CONDITION

RBW	VBW	Sweep Time	Span
10MHz	10MHz	800ms	50MHz

TEST RESULTS

UMTS/TM1/WCDMA V		
Channel	Frequency (MHz)	Output Power(dBm)
4132	826.40	21.84
4183	836.60	21.77
4233	846.60	21.49

UMTS/TM1/WCDMA II		
Channel	Frequency (MHz)	Output Power(dBm)
9262	1852.40	21.68
9400	1880.00	21.94
9538	1907.60	21.83


4.1.2. Radiated Output Power

TEST DESCRIPTION

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(e) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

TEST CONFIGURATION

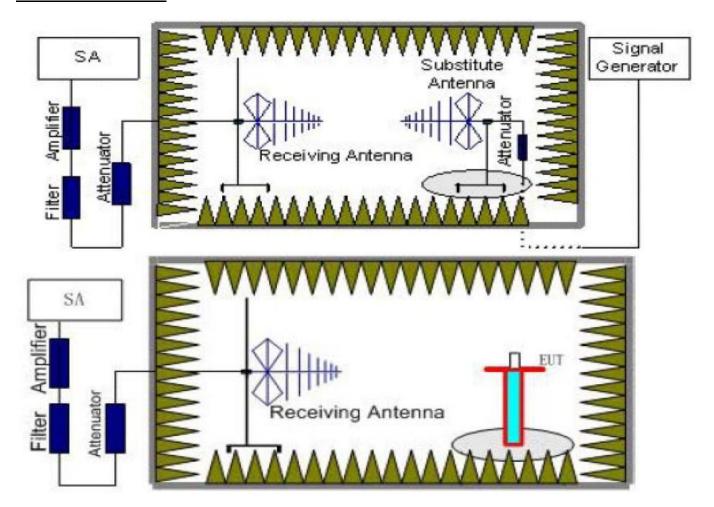

TEST PROCEDURE

- 1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test.Set Test Receiver or Spectrum RBW=10MHz,VBW=10MHz, And the maximum value of the receiver should be recorded as (P_r).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

Report No.:JTT20150500102

A amplifier should be connected to the Signal Source output port. And the cable should be connect
between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}) ,the Substitution Antenna Gain
(G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

Power(EIRP)= P_{Mea} - P_{Ag} - P_{cl} + G_a

- We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below: $Power(EIRP) = P_{Mea} P_{cl} + G_a$
- 6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST LIMIT

Note: We test the H direction and V direction and V direction is worse.

According to 22.913(a) and 24.232(c), the ERP should be not exceeding following table limits:

	Burst Peak EIRP
WCDMA Band II	33dBm (2W)

	Burst Peak ERP
WCDMA Band V	38.45dBm (7W)

TEST RESULTS

UMTS/TM1/WCDMA Band II							
Frequency (MHz)	Polarization						
1852.4	17.81	V					
1880.0	17.64	V					
1907.6	17.54	V					


UMTS/TM1/ WCDMA Band V								
Frequency (MHz)								
826.40	20.20	V						
836.60	20.28	V						
846.60	20.60	V						

4.2. Radiated Spurious Emssion

TEST APPLICABLE

According to the TIA/EIA 603D:2010 test method, The Receiver or Spectrum was scanned from 9 KHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II and WCDMA Band V.

TEST CONFIGURATION

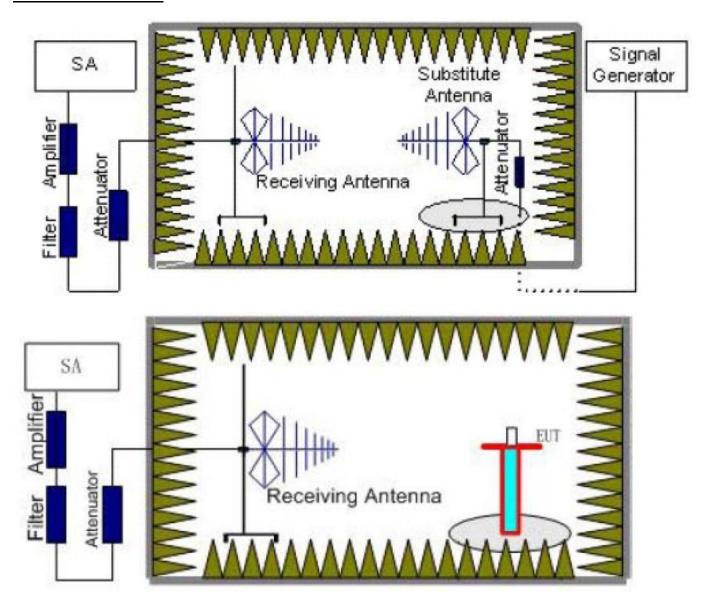

TEST PROCEDURE

- 1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}) ,the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test. The measurement results are obtained as described below:
 - Power(EIRP)= P_{Mea} P_{Ag} P_{cl} + G_a
- 6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi.
- 8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
UMTS/TM1/	0.03~1	100KHz	300KHz	10
WCDMA Band V	1~2	1 MHz	3 MHz	2
VVCDIVIA Bariu V	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
UMTS/TM1/	2~5	1 MHz	3 MHz	3
WCDMA Band II	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

TEST LIMITS

According to 24.238 and 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
	Low	9KHz-10GHz	PASS
UMTS/TM1/ WCDMA Band V	Middle	9KHz -10GHz	PASS
Ballu V	High	9KHz -10GHz	PASS
	Low	9KHz -20GHz	PASS
UMTS/TM1/ WCDMA Band II	Middle	9KHz -20GHz	PASS
Ballu II	High	9KHz -20GHz	PASS

	UMTS/TM1/ WCDMA Band V											
	Channel Nu	ımber: 4132		-	Test Frequence	cy: 826.40 Mł	Ηz					
Frequency P _{Mea} Path Antenna (MHz) (dBm) Loss Gain			Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization						
1652.80	-39.83	4.32	6.77	2.15	-39.53	-13.00	Н					
2479.20				2.15		-13.00	Н					
1652.80	-35.16	4.32	6.77	2.15	-34.86	-13.00	V					
2479.20				2.15		-13.00	V					

	UMTS/TM1/ WCDMA Band V											
	Channel Nu	mber: 4183		-	Test Frequen	cy: 836.60 Mł	Ηz					
Frequency P _{Mea} Path Antenna (MHz) (dBm) Loss Gain				Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization					
1673.20	-38.08	4.55	6.77	2.15	-38.01	-13.00	Н					
2509.80				2.15		-13.00	Н					
1673.20	-34.66	4.55	6.77	2.15	-34.59	-13.00	V					
2509.80				2.15		-13.00	V					

	UMTS/TM1/ WCDMA Band V											
	Channel Nu	mber: 4233		-	Test Frequen	cy: 846.60 MF	Ηz					
Frequency (MHz)	Frequency P _{Mea} Path Antenna				Peak ERP(dBm)	Limit (dBm)	Polarization					
1693.20	-41.84	4.29	6.83	2.15	-41.45	-13.00	Н					
2539.80				2.15		-13.00	Н					
1693.20	-38.89	4.29	6.83	2.15	-38.5	-13.00	V					
2539.80				2.15		-13.00	V					

UMTS/TM1/ WCDMA Band II											
	Channel Nu	mber: 9262		Test Frequency: 1852.40 MHz			Hz				
Frequency P _{Mea} Path Antenna (MHz) (dBm) Loss Gain				Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization				
3704.80	-43.26	4.55	12.34	2.15	-37.62	-13.00	Н				
5557.20				2.15		-13.00	Н				
3704.80	-46.43	4.55	12.34	2.15	-40.79	-13.00	V				
5557.20				2.15		-13.00	V				

			LIMTO/TMA/	MCDMA Band	II.							
	UMTS/TM1/ WCDMA Band II											
	Channel Nu	ımber: 9400			est Frequenc	y: 1880.00 M	Hz					
Frequency	P _{Mea}	Path	Antenna	Correction	Peak	Limit	Delevisetien					
(MHz)	(dBm)	Loss	Gain	(dB)	ERP(dBm)	(dBm)	Polarization					
3760.00	-41.94	4.55	12.40	2.15	-36.24	-13.00	Н					
5640.00				2.15		-13.00	Н					
3760.00	-45.97	4.55	12.40	2.15	-40.27	-13.00	V					
5640.00				2.15		-13.00	V					

UMTS/TM1/ WCDMA Band II											
	Channel Nu	ımber: 9538		Test Frequency: 1907.60 MHz			Hz				
Frequency P _{Mea} Path Antenna (MHz) (dBm) Loss Gain				Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization				
3815.20	-43.14	4.51	12.43	2.15	-37.37	-13.00	Н				
5722.80				2.15		-13.00	Н				
3815.20	-47.45	4.51	12.43	2.15	-41.68	-13.00	V				
5722.80				2.15		-13.00	V				

Note:


- In general, the worse case attenuation requirement shown above was applied.
 *** means that the emission level is too low to be measured or at least 20 dB down than the limit.

4.3. Occupied Bandwidth and Emission Bandwith

TEST APPLICABLE

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of WCDMA Band II and WCDMA band V. The table below lists the measured 99% Bandwidth and -26dBc Bandwidth.

TEST CONFIGURATION

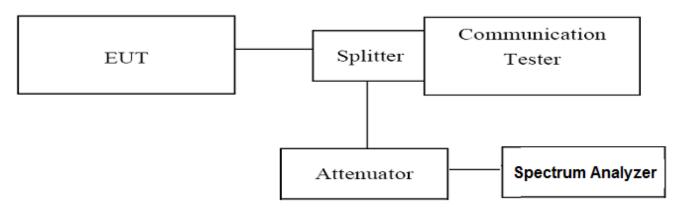


TEST PROCEDURE

- 1. The EUT was set up for the max output power with pseudo random data modulation;
- 2. The Occupied bandwidth and Emission Bandwidth were measured with Aglient Spectrum Analyzer N9020A (peak);
- Set RBW=100KHz,VBW=30KHz,Span=10MHz,SWT=1.267ms;
- 4. Set SPA Max hold and View, Set 99% Occupied Bandwidth/ Set -26dBc Occupied Bandwidth
- 5. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1709.80 MHz for WCDMA band II; 826.40 MHz, 836.60 MHz and 846.60 MHz for WCDMA band V. (low, middle and high of operational frequency range).


TEST RESULTS

	UMTS/TM1/ WCDMA Band II									
Channel Number	Frequency (MHz)	Occupied Bandwidth (99% BW) (kHz)	Emission Bandwidth (26 dBc BW) (kHz)	Verdict						
9262	1852.4	4166.1	4670.0	PASS						
9400	1880.0	4164.9	4707.0	PASS						
9538	1907.6	4167.4	4701.0	PASS						


	UMTS/TM1/ WCDMA Band V										
Channel Number	Frequency (MHz)	Occupied Bandwidth (99% BW) (kHz)	Emission Bandwidth (26 dBc BW) (kHz)	Verdict							
4132	826.40	4160.6	4667	PASS							
4183	836.60	4153.5	4651	PASS							
4233	846.60	4167.3	4678	PASS							

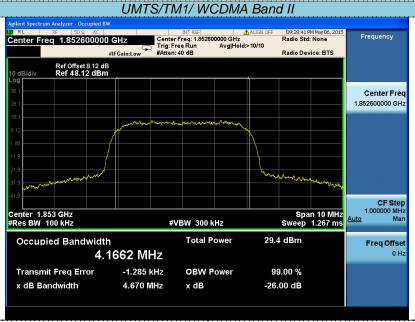


Channel 9262

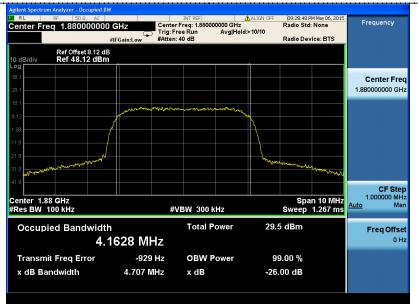

Channel 9400

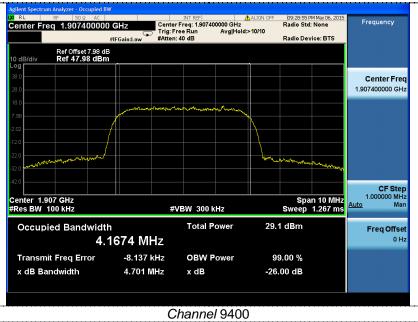


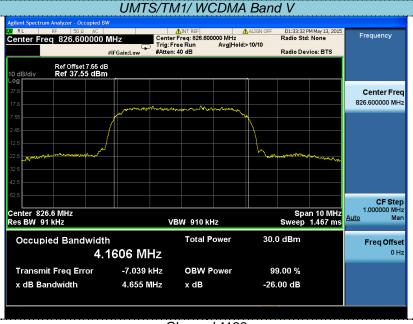

Channel 4132



Channel 4183

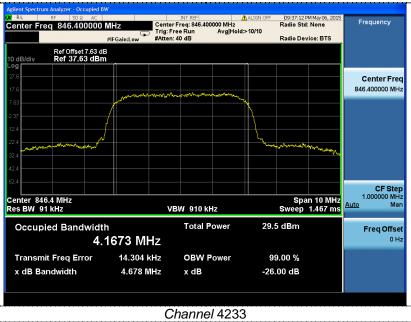


4.4. Band Edge Compliance

TEST APPLICABLE

During the process of testing, the EUT was controlled via Aglient Digital Radio Communication tester (8960) to ensure max power transmission and proper modulation.

TEST CONFIGURATION

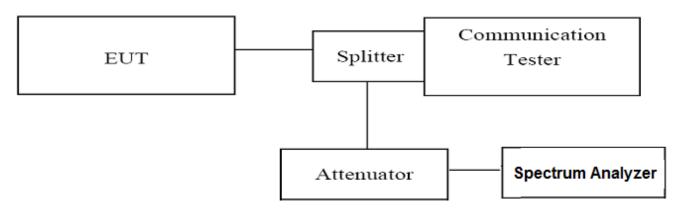

TEST PROCEDURE

- 1. The EUT was set up for the max output power with pseudo random data modulation;
- 2. The power was measured with Aglient Spectrum Analyzer N9020A;
- 3. Set RBW=51KHz,VBW=200KHz,Span=5MHz,SWT=1ms,Dector: RMS;
- 4. These measurements were done at 2 frequencies, 1850.20 MHz and 1709.80 MHz for WCDMA band II; 826.40 MHz and 846.60 MHz for WCDMA band V. (low and high of operational frequency range).

TEST RESULTS

UMTS/TM1/WCDMA Band II								
Channal	Eroguenov	Measureme	ent Results	Limit				
Channel Number	Frequency (MHz)	Frequency (MHz)	Values (dBm)	(dBm)	Refer to Plot	Verdict		
9262	1852.4	1850.00	-27.380	-13.00	Plot 4.4.1 A	PASS		
9538	1907.6	1910.07	-24.482	-13.00	Plot 4.4.1 B	PASS		

UMTS/TM1/WCDMA Band V								
Channal	Eroguenev	Measureme	ent Results	Limit				
Channel Number	Frequency (MHz)	Frequency (MHz)	Values (dBm)	(dBm)	Refer to Plot	Verdict		
4132	826.40	824.00	-29.97	-13.00	Plot 4.4.2 A	PASS		
4233	846.60	849.00	-31.46	-13.00	Plot 4.4.2 B	PASS		



(Plot 4.5.1 A: Channel 9262: 1852.4MHz WCDMA Band II)



(Plot 4.5.1 B: Channel 9538: 1907.6MHz WCDMA Band II)



(Plot 4.5.2 A: Channel 4132: 826.4MHz @ WCDMA Band V)



(Plot 4.5.2 B: Channel 4233: 846.6MHz @ WCDMA Band V)


4.5. Spurious Emssion on Antenna Port

TEST APPLICABLE

The following steps outline the procedure used to measure the conducted emissions from the EUT.

- Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated
 from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier
 frequency. For the equipment of WCDMA band II, this equates to a frequency range of 9 KHz to 20GHz,
 data taken from 9 KHz to 25 GHz.For WCDMA Band V, data taken from 9 KHz to 13.6 GHz.
- 2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; if the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give an optimal sweep time according the selected span and RBW.
- The procedure to get the conducted spurious emission is as follows:
 The trace mode is set to MaxHold to get the highest signal at each frequency;
 Wait 25 seconds;
 Get the result.
- 4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

TEST CONFIGURATION

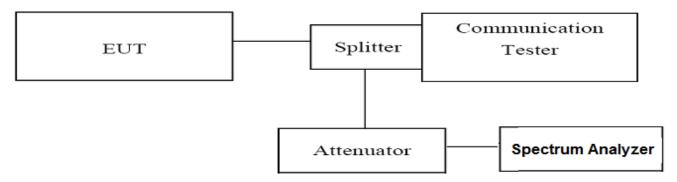

TEST PROCEDURE

- 1. The EUT was set up for the max output power with pseudo random data modulation;
- 2. The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak) and Agilent Spectrum Analyzer N9020A (peak);
- 3. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1709.80 MHz for WCDMA band II; 826.40 MHz, 836.60 MHz and 846.60 MHz for WCDMA band V. (low, middle and high of operational frequency range).

TEST LIMIT

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST RESULTS

4.6.1 For UMTS/TM1/WCDMA Band II Test Results

A. Test Verdict

Test Mode/ Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBm)	Verdict
		9KHz-150KHz	Plot 4.5.1 A1	-13.00	PASS
		150KHz-30MHz	Plot 4.5.1 A2	-13.00	PASS
		30MHz-1GHz	Plot 4.5.1 A3	-13.00	PASS
UMTS/TM1/WCDMA Band II/9262	1852.40	1GHz-7GHz	Plot 4.5.1 A4	-13.00	PASS
Dallu II/9202		7GHz-13.6GHz	Plot 4.5.1 A5	-13.00	PASS
		13.6GHz-13.8GHz	Plot 4.5.1 A6	-13.00	PASS
		13.8GHz-25GHz	Plot 4.5.1 A7	-13.00	PASS
		9KHz-150KHz	Plot 4.5.1 B1	-13.00	PASS
		150KHz-30MHz	Plot 4.5.1 B2	-13.00	PASS
		30MHz-1GHz Plot 4.5.1 B3	Plot 4.5.1 B3	-13.00	PASS
UMTS/TM1/WCDMA Band II/9400	1880.00	1GHz-7GHz	Plot 4.5.1 B4	-13.00	PASS
Dallu 11/9400		7GHz-13.6GHz	Plot 4.5.1 B5	-13.00	PASS
		13.6GHz-13.8GHz	Plot 4.5.1 B6 -13.00	PASS	
		13.8GHz-25GHz	Plot 4.5.1 B7	-13.00	PASS
		9KHz-150KHz	Plot 4.5.1 C1	-13.00	PASS
	1907.60	150KHz-30MHz	Plot 4.5.1 C2	-13.00	PASS
		30MHz-1GHz	Plot 4.5.1 C3	-13.00	PASS
UMTS/TM1/WCDMA Band II/9538		1GHz-7GHz	Plot 4.5.1 C4	-13.00	PASS
Danu 11/9000		7GHz-13.6GHz	Plot 4.5.1 C5	-13.00	PASS
		13.6GHz-13.8GHz	Plot 4.5.1 C6	-13.00	PASS
		13.8GHz-25GHz	Plot 4.5.1 C7	-13.00	PASS


Note:

- 1. In general, the worse case attenuation requirement shown above was applied.
- 2. *** means that the emission level is too low to be measured or at least 20 dB down than the limit.


B. Test Plots




(Plot 4.5.1 A1: Channel 9262: 1852.4MHz @ Traffic WCDMA Band II)

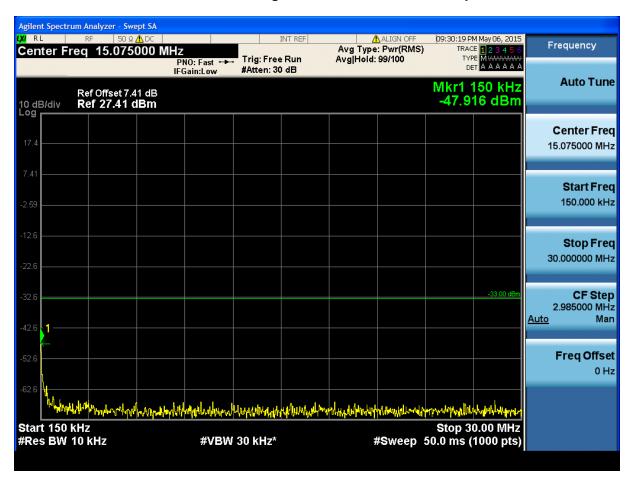


(Plot 4.5.1 A2: Channel 9262: 1852.4MHz @ Traffic WCDMA Band II)

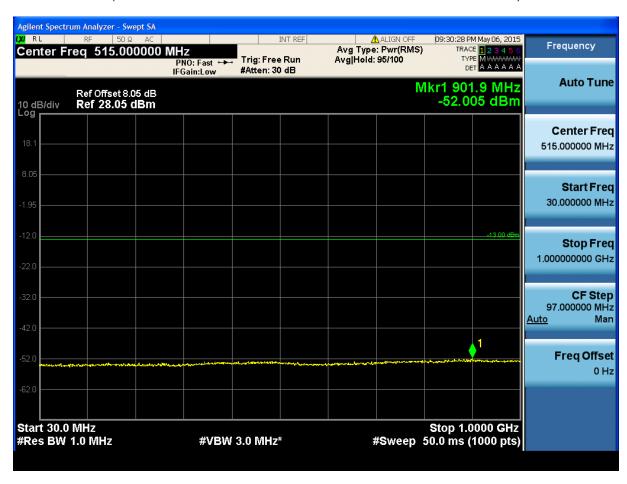

(Plot 4.5.1 A3: Channel 9262: 1852.4MHz @ Traffic WCDMA Band II)

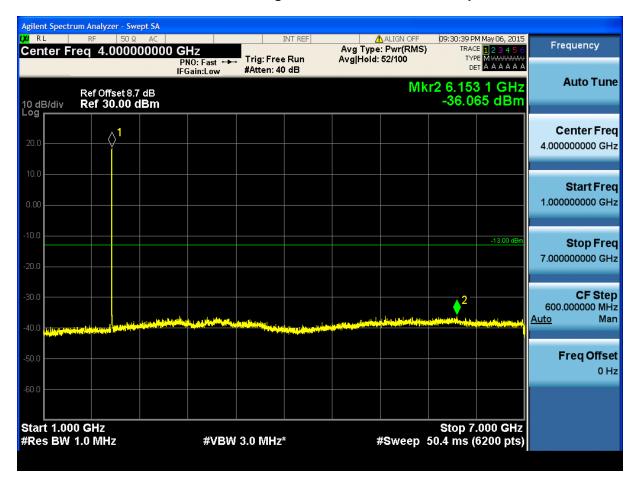


(Plot 4.5.1 A4: Channel 9262: 1852.4MHz @ Traffic WCDMA Band II)

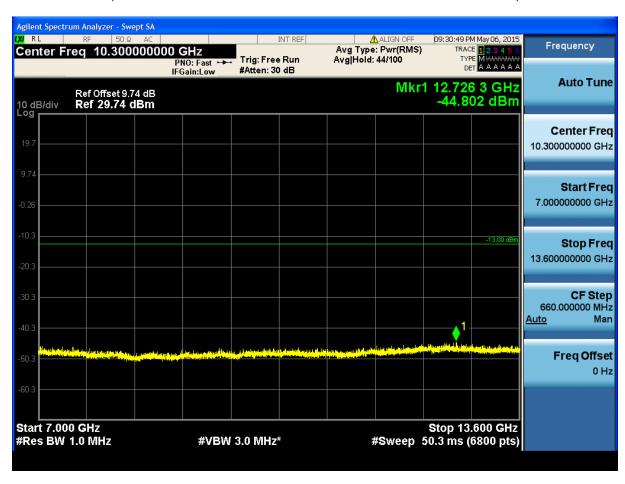


(Plot 4.5.1 A5: Channel 9262: 1852.4MHz @ Traffic WCDMA Band II)



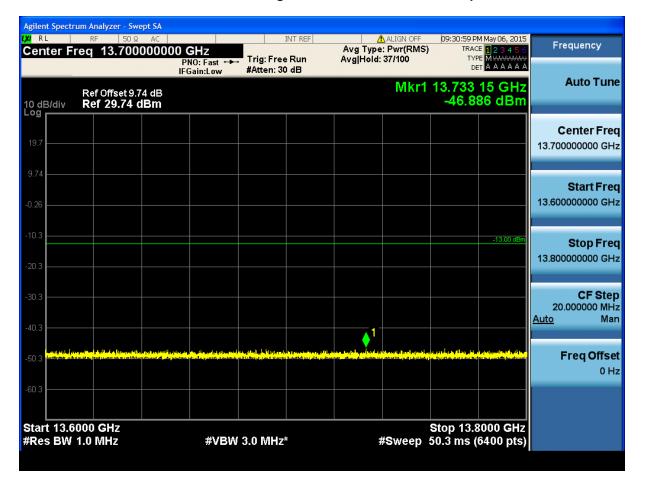


(Plot 4.5.1 A6: Channel 9262: 1852.4MHz @ Traffic WCDMA Band II)

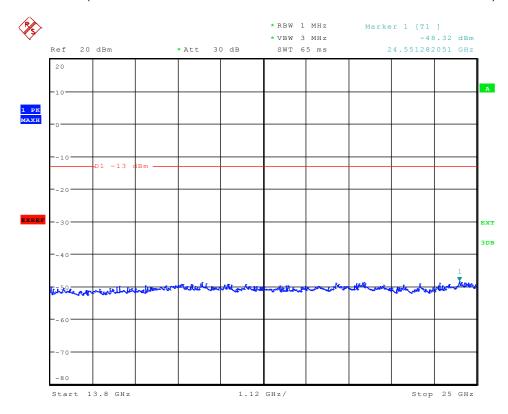


Date: 13.MAY.2015 10:20:44



(Plot 4.5.1 B1: Channel 9400: 1880.0MHz @ Traffic WCDMA Band II)

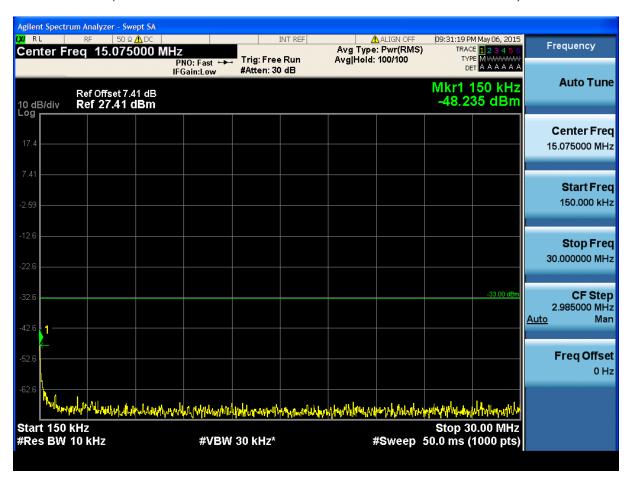


(Plot 4.5.1 B2: Channel 9400: 1880.0MHz @ Traffic WCDMA Band II)

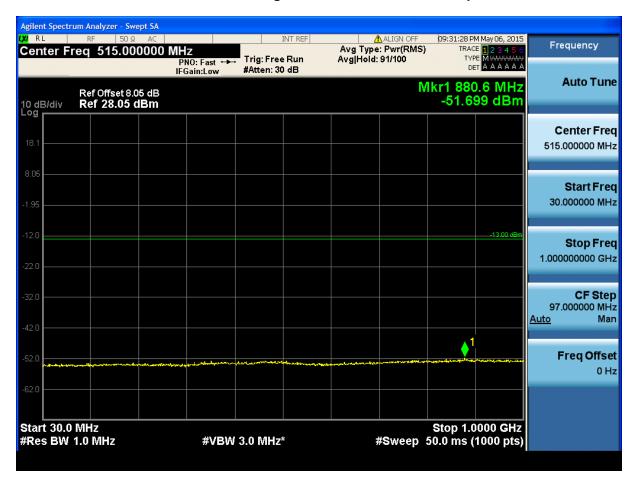


(Plot 4.5.1 B3: Channel 9400: 1880.0MHz @ Traffic WCDMA Band II)



(Plot 4.5.1 B4: Channel 9400: 1880.0MHz @ Traffic WCDMA Band II)

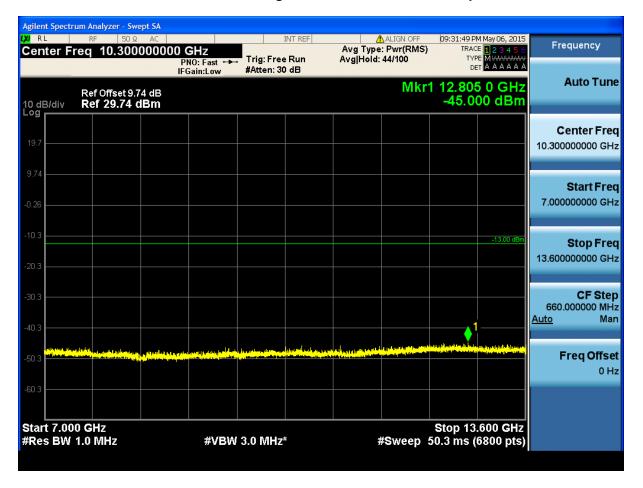


(Plot 4.5.1 B5: Channel 9400: 1880.0MHz @ Traffic WCDMA Band II)

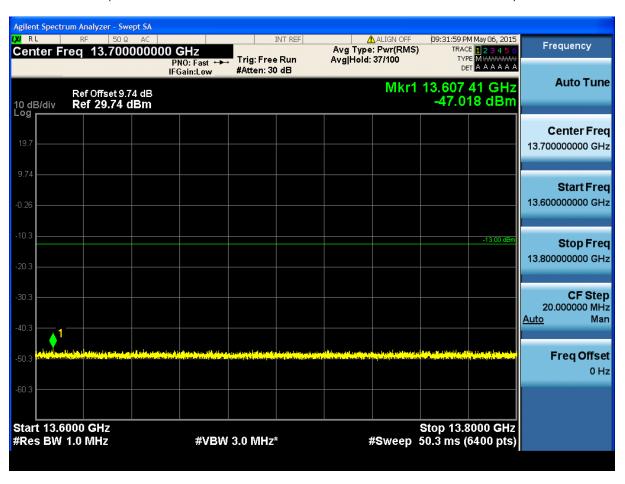

(Plot 4.5.1 B6: Channel 9400: 1880.0MHz @ Traffic WCDMA Band II)

Stop 25 GHz

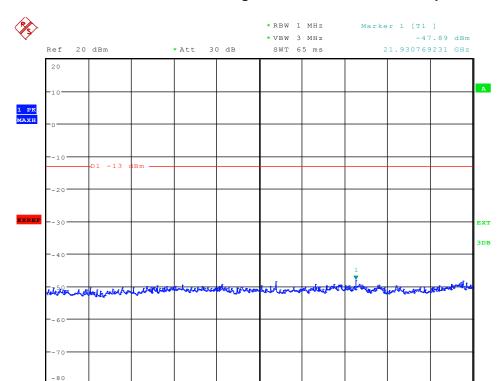

1.12 GHz/


Date: 13.MAY.2015 10:21:02

Start 13.8 GHz


(Plot 4.5.1 B7: Channel 9400: 1880.0MHz @ Traffic WCDMA Band II)




(Plot 4.5.1 C1: Channel 9538: 1907.6MHz @ Traffic WCDMA Band II)

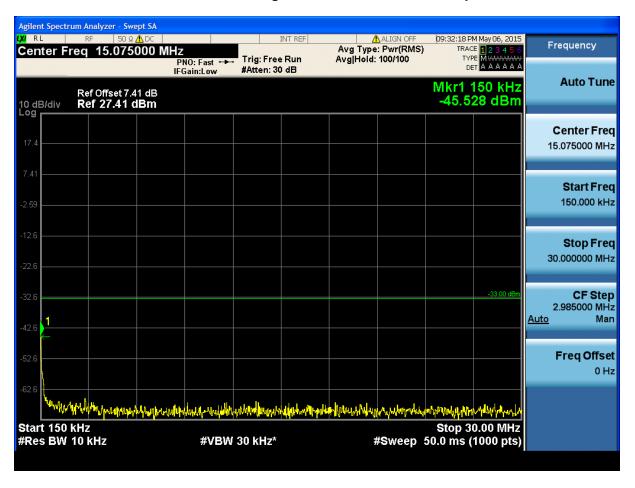


(Plot 4.5.1 C2: Channel 9538: 1907.6MHz @ Traffic WCDMA Band II)

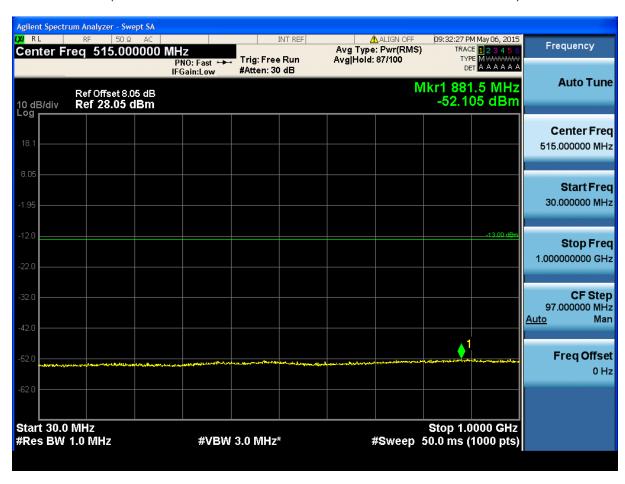


(Plot 4.5.1 C3: Channel 9538: 1907.6MHz @ Traffic WCDMA Band II)

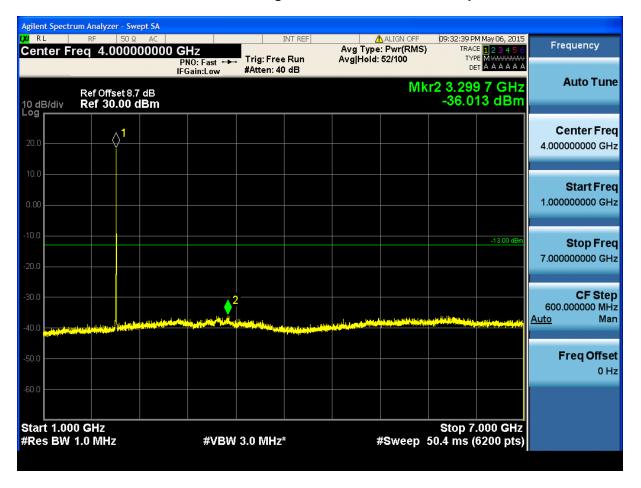


(Plot 4.5.1 C4: Channel 9538: 1907.6MHz @ Traffic WCDMA Band II)

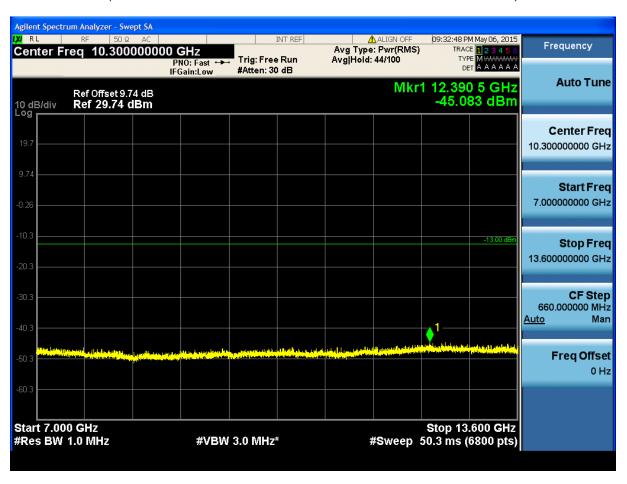

(Plot 4.5.1 C5: Channel 9538: 1907.6MHz @ Traffic WCDMA Band II)

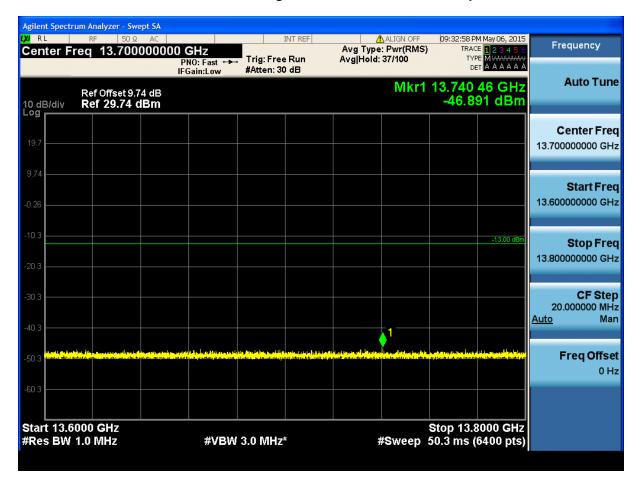

(Plot 4.5.1 C6: Channel 9538: 1907.6MHz @ Traffic WCDMA Band II)

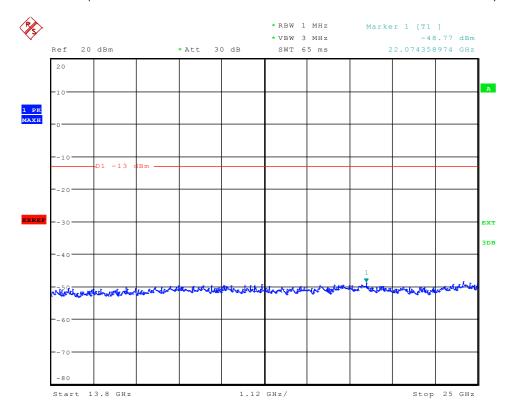

Date: 13.MAY.2015 10:21:24

(Plot 4.5.1 C7: Channel 9538: 1907.6MHz @ Traffic WCDMA Band II)

4.6.2 For UMTS/TM1/WCDMA Band V Test Results

A. Test Verdict

Test Mode/ Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBm)	Verdict
		9KHz-150KHz	Plot 4.5.2 A1	-13.00	PASS
		150KHz-30MHz	Plot 4.5.2 A2	-13.00	PASS
UMTS/TM1/WCDMA Band V/4132	826.40	30MHz-1GHz	Plot 4.5.2 A3	-13.00	PASS
Dallu V/4132		1GHz-7GHz	Plot 4.5.2 A4	-13.00	PASS
		7GHz-13.6GHz	Plot 4.5.2 A5	-13.00	PASS
		9KHz-150KHz	Plot 4.5.2 B1	-13.00	PASS
UMTS/TM1/WCDMA		150KHz-30MHz	Plot 4.5.2 B2	-13.00	PASS
Band V/4183	836.60	30MHz-1GHz	Plot 4.5.2 B3	-13.00	PASS
Dallu V/4103		1GHz-7GHz	Plot 4.5.2 B4	-13.00	PASS
		7GHz-13.6GHz	Plot 4.5.2 B5	-13.00	PASS
		9KHz-150KHz	Plot 4.5.2 C1	-13.00	PASS
		150KHz-30MHz	Plot 4.5.2 C2	-13.00	PASS
UMTS/TM1/WCDMA	846.60	30MHz-1GHz	Plot 4.5.2 C3	-13.00	PASS
Band V/4233		1GHz-7GHz	Plot 4.5.2 C4	-13.00	PASS
		7GHz-13.6GHz	Plot 4.5.2 C5	-13.00	PASS
		7GHz-13.6GHz	Plot 4.5.2 D5	-13.00	PASS

Page 36 of 46


Note:

- 1. In general, the worse case attenuation requirement shown above was applied.
- 2."---" means that the emission level is too low to be measured or at least 20 dB down than the limit.


B. Test Plots




(Plot 4.5.2 A1: Channel 4132: 826.40 MHz @ WCDMA Band V)

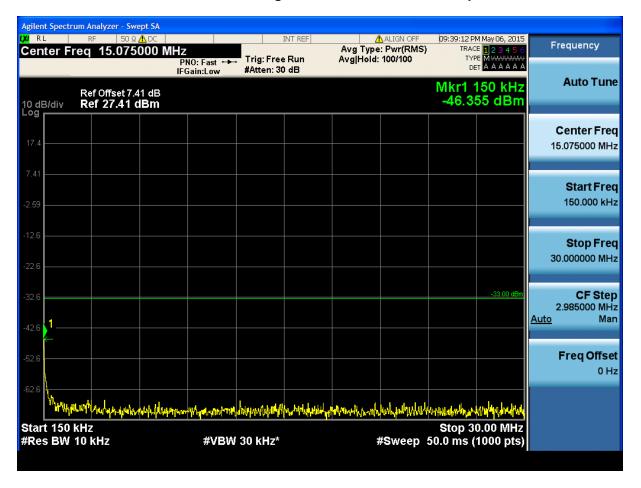


(Plot 4.5.2 A2: Channel 4132: 826.40 MHz @ WCDMA Band V)

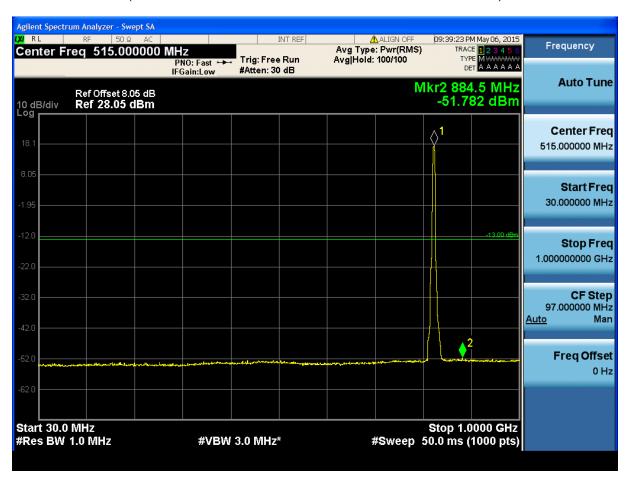

(Plot 4.5.2 A3: Channel 4132: 826.40 MHz @ WCDMA Band V)

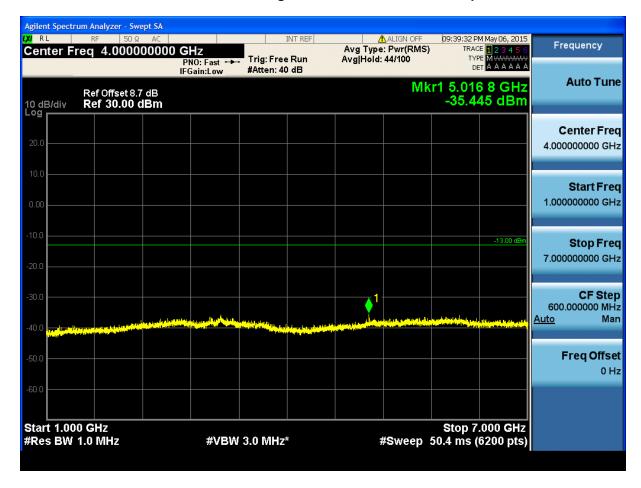


(Plot 4.5.2 A4: Channel 4132: 826.40 MHz @ WCDMA Band V)

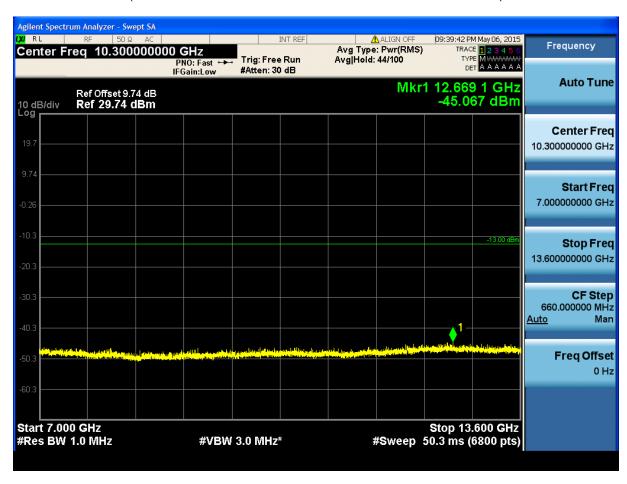


(Plot 4.5.2 A5: Channel 4132: 826.40 MHz @ WCDMA Band V)



(Plot 4.5.2 B1: Channel 4183: 836.60 MHz @ WCDMA Band V)

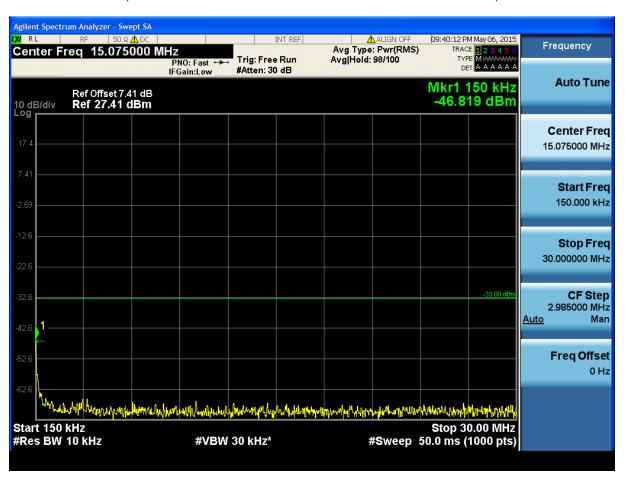

(Plot 4.5.2 B2: Channel 4183: 836.60 MHz @ WCDMA Band V)

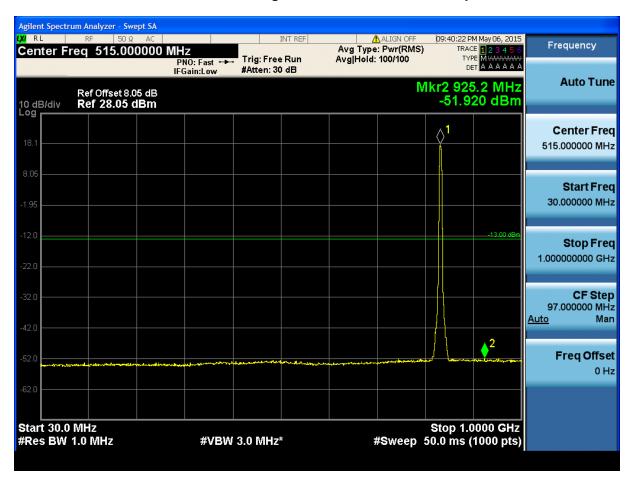

(Plot 4.5.2 B3: Channel 4183: 836.60 MHz @ WCDMA Band V)




(Plot 4.5.2 B4: Channel 4183: 836.60 MHz @ WCDMA Band V)




(Plot 4.5.2 B5: Channel 4183: 836.60 MHz @ WCDMA Band V)




(Plot 4.5.2 C1: Channel 4233: 846.60 MHz @ WCDMA Band V)

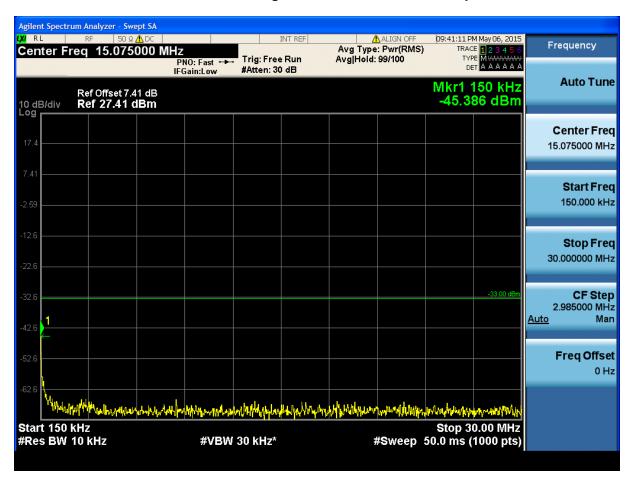

(Plot 4.5.2 C2: Channel 4233: 846.60 MHz @ WCDMA Band V)

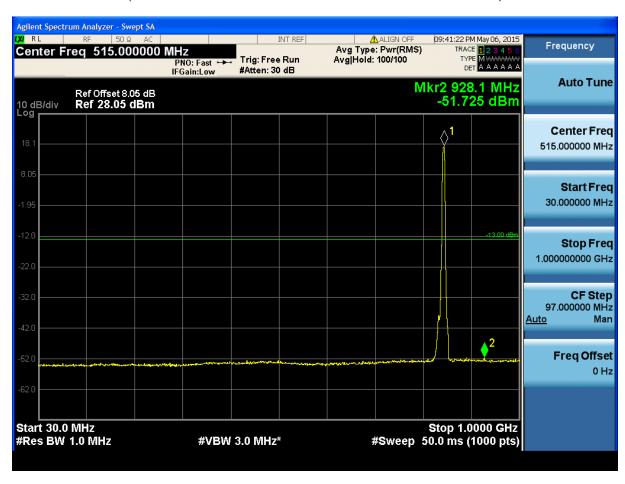

(Plot 4.5.2 C3: Channel 4233: 846.60 MHz @ WCDMA Band V)

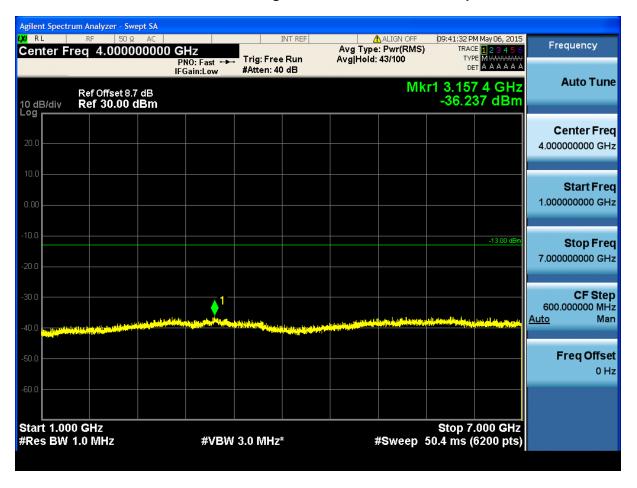

(Plot 4.5.2 C4: Channel 4233: 846.60 MHz @ WCDMA Band V)



(Plot 4.5.2 C5: Channel 4233: 846.60 MHz @ WCDMA Band V)

4.6. Frequency Stability Test

TEST APPLICABLE


- 1. According to FCC Part 2 Section 2.1055 (a)(1), the frequency stability shall be measured with variation of ambient temperature from -30℃ to +50℃ centigrade.
- 2. According to FCC Part 2 Section 2.1055 (E) (2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
- 3. Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried voltage equipment and the end voltage point was 3.40V.

TEST PROCEDURE

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1. Measure the carrier frequency at room temperature:
- 2. Subject the EUT to overnight soak at -30°C;
- With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on middle channel of PCS 1900 and GSM850, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming;
- 4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 0.5 hours at each temperature, unpowered, before making measurements;
- 5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 0.5 hours unpowered, to allow any self-heating to stabilize, before continuing;
- 6. Subject the EUT to overnight soak at +50°C;
- With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming;
- 8. Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 0.5 hours at each temperature, unpowered, before making measurements;
- 9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure;

TEST CONFIGURATION

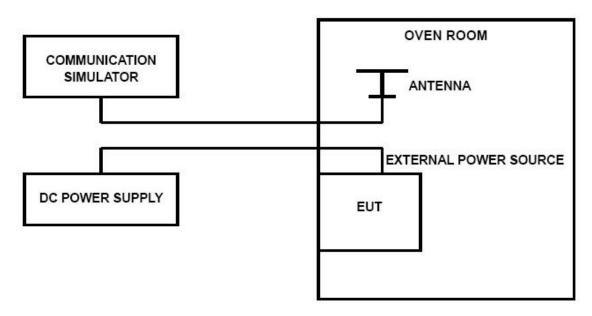

TEST LIMITS

For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized

frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.40VDC and 4.20VDC, with a nominal voltage of 3.70DC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

For equipment powered by primary supply voltage


According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

TEST RESULTS

UMTS/TM1/WCDMA Band II						
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict	
3.40	25	4.50	0.00	2.50	PASS	
3.70	25	-8.08	0.00	2.50	PASS	
4.20	25	-1.83	0.00	2.50	PASS	
3.70	-30	-1.96	0.00	2.50	PASS	
3.70	-20	-2.47	0.00	2.50	PASS	
3.70	-10	-2.16	0.00	2.50	PASS	
3.70	0	-1.72	0.00	2.50	PASS	
3.70	10	-2.47	0.00	2.50	PASS	
3.70	20	-0.59	0.00	2.50	PASS	
3.70	30	-2.42	0.00	2.50	PASS	
3.70	40	-2.44	0.00	2.50	PASS	
3.70	50	-1.57	0.00	2.50	PASS	

UMTS/TM1/WCDMA Band V						
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict	
3.40	20	4.30	0.01	2.50	PASS	
3.70	20	-3.75	0.00	2.50	PASS	
4.20	20	-1.13	0.00	2.50	PASS	
3.70	-30	-1.63	0.00	2.50	PASS	
3.70	-20	-1.06	0.00	2.50	PASS	
3.70	-10	-2.57	0.00	2.50	PASS	
3.70	0	-2.04	0.00	2.50	PASS	
3.70	10	-2.27	0.00	2.50	PASS	
3.70	20	-1.12	0.00	2.50	PASS	
3.70	30	-0.64	0.00	2.50	PASS	
3.70	40	-2.30	0.00	2.50	PASS	
3.70	50	-1.20	0.00	2.50	PASS	

5. Test Setup Photos of the EUT

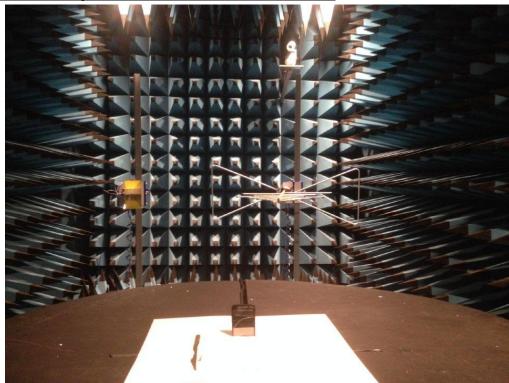

.....End of Report.....