

TEST REPORT

Reference No...... : WTX25X09245774W002
FCC ID : 2AEPIBLACKG4
Applicant : COLOMBIANA DE COMERCIO S.A.
Address : Car. 43E No 8-71, Medellin, Colombia
Manufacturer : Sichuan Koobee Communication Equipment Co., Ltd.
Address : 3 Floor, Building 2, 69 Gangyuan Road West Section, Lingang Development Zone, Yibin City, Sichuan Province, China
Product Name : Smart Phone
Model No...... : Black G4
Standards : FCC Part 22H,FCC Part 24E, FCC Part 27
Date of Receipt sample : 2025-08-06
Date of Test..... : 2025-08-06 to 2025-09-17
Date of Issue : 2025-09-17
Test Report Form No. : WTX_Part 22_ Part 24_ Part 27W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:


Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Approved by:

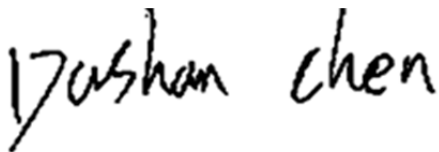

Dashan Chen/Project Engineer

Silin Chen/Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION..... 4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 4
1.2 TEST STANDARDS 7
1.3 TEST METHODOLOGY 7
1.4 TEST FACILITY 7
1.5 EUT SETUP AND TEST MODE 8
1.6 MEASUREMENT UNCERTAINTY 12
1.7 TEST EQUIPMENT LIST AND DETAILS 13

2. SUMMARY OF TEST RESULTS 16

3. RF OUTPUT POWER..... 17
3.1 STANDARD APPLICABLE 17
3.2 TEST PROCEDURE 17
3.3 SUMMARY OF TEST RESULTS/PLOTS..... 17

4. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER 31
4.1 STANDARD APPLICABLE 31
4.2 TEST PROCEDURE 31
4.3 SUMMARY OF TEST RESULTS..... 31

5. EMISSION BANDWIDTH 32
5.1 STANDARD APPLICABLE..... 32
5.2 TEST PROCEDURE 32
5.3 SUMMARY OF TEST RESULTS/PLOTS..... 32

6. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL 33
6.1 STANDARD APPLICABLE 33
6.2 TEST PROCEDURE 33
6.3 SUMMARY OF TEST RESULTS/PLOTS..... 34

7. SPURIOUS RADIATED EMISSIONS 35
7.1 STANDARD APPLICABLE..... 35
7.2 TEST PROCEDURE 35
7.3 SUMMARY OF TEST RESULTS/PLOTS..... 35

8. FREQUENCY STABILITY 57
8.1 STANDARD APPLICABLE..... 57
8.2 TEST PROCEDURE 57
8.3 SUMMARY OF TEST RESULTS/PLOTS..... 57

APPENDIX PHOTOGRAPHS 58

Report version

Version No.	Date of issue	Description
Rev.00	2025-09-17	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT:	
Product Name:	Smart Phone
Trade Name:	Kalley
Model No.:	Black G4
Adding Model(s):	/
Rated Voltage:	Battery: DC 3.89V DC 5.0V=== 2.0A charging from adapter
Battery:	5900mAh
Adapter Model:	Model No.: ES166F-US-0500200 Input: 100-240V~, 50/60Hz, 0.5A Output: 5.0V===2.0A Manufacturer: SHENZHEN EAST SUN ELECTRONICS CO., LTD.
Software Version:	Kalley_Black_G4_V01_20250718
Hardware Version:	KC26NQ_01
IMEI:	/
Device Category:	Portable Device
<i>The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT:	
4G	
Support Networks:	FDD-LTE
Support Band:	FDD-LTE Band 2, 4, 5, 7, 12, 13, 41, 66
Uplink Frequency:	FDD-LTE Band 2: Tx: 1850-1910MHz, FDD-LTE Band 4: Tx: 1710-1755MHz, FDD-LTE Band 5: Tx: 824-849MHz, FDD-LTE Band 7: Tx: 2500-2570MHz, FDD-LTE Band 12: Tx: 699-716MHz, FDD-LTE Band 13: Tx: 777-787MHz, FDD-LTE Band 41: Tx: 2496-2690MHz FDD-LTE Band 66: Tx: 1710-1780MHz
Downlink Frequency:	FDD-LTE Band 2: Rx: 1930-1990MHz, FDD-LTE Band 4: Rx: 2110-2155MHz, FDD-LTE Band 5: Rx: 869-894MHz, FDD-LTE Band 7: Rx: 2620-2690MHz, FDD-LTE Band 12: Rx: 729-746MHz, FDD-LTE Band 13: Rx: 746-756MHz, FDD-LTE Band 41: Rx: 2496-2690MHz FDD-LTE Band 66: Rx: 2110-2200MHz
RF Output Power:	FDD-LTE Band 2: 23.72dBm, FDD-LTE Band 4: 23.48dBm, FDD-LTE Band 5: 24.03dBm, FDD-LTE Band 7: 23.43dBm, FDD-LTE Band 12: 23.98dBm, FDD-LTE Band 13: 23.93dBm, FDD-LTE Band 41: 22.61dBm FDD-LTE Band 66: 23.51dBm
ERP/EIRP:	FDD-LTE Band 2: 22.11dBm(QPSK), 21.84dBm(16QAM) FDD-LTE Band 4: 22.03dBm(QPSK), 21.88dBm(16QAM) FDD-LTE Band 5: 21.44dBm(QPSK), 20.91dBm(16QAM) FDD-LTE Band 7: 22.54dBm(QPSK), 22.21dBm(16QAM) FDD-LTE Band 12: 20.72dBm(QPSK), 20.46dBm(16QAM) FDD-LTE Band 13: 20.83dBm(QPSK), 20.47dBm(16QAM) FDD-LTE Band 41: 21.66dBm(QPSK), 21.40dBm(16QAM) FDD-LTE Band 66: 22.12dBm(QPSK), 21.98dBm(16QAM)
Type of Emission:	FDD-LTE Band 2: 18M0G7D, 18M1W7D FDD-LTE Band 4: 18M1G7D, 18M0W7D FDD-LTE Band 5: 9M02G7D, 9M02W7D FDD-LTE Band 7: 18M1G7D, 18M0W7D FDD-LTE Band 12: 9M05G7D, 9M02W7D FDD-LTE Band 13: 8M99G7D, 8M99W7D FDD-LTE Band 41: 18M0G7D, 18M0W7D FDD-LTE Band 66: 18M0G7D, 18M1W7D

Type of Modulation:	QPSK, 16QAM
Antenna Type:	Internal antenna
Antenna Gain:	FDD-LTE Band 2: -1.57dBi, FDD-LTE Band 4: -1.39dBi, FDD-LTE Band 5: -2.53dBi, FDD-LTE Band 7: -0.87dBi, FDD-LTE Band 12: -3.12dBi, FDD-LTE Band 13: -3.07dBi, FDD-LTE Band 41: -0.87dBi FDD-LTE Band 66: -1.39dBi
<i>Note The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations.

FCC Rules Part 22: Private Land Mobile Radio Services.

FCC Rules Part 24: Public Mobile Services.

FCC Rules Part 27: Miscellaneous Wireless Communications Services.

TIA/EIA 603 E March 2016: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services.

KDB 971168 D01 Power Meas License Digital Systems v03r01: Measurement Guidance for Certification of Licensed Digital Transmitters.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603 E/ KDB 971168/ ANSI C63.26. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	FDD-LTE Band 2	Low, Middle, High Channels
TM2	FDD-LTE Band 4	Low, Middle, High Channels
TM3	FDD-LTE Band 5	Low, Middle, High Channels
TM4	FDD-LTE Band 7	Low, Middle, High Channels
TM5	FDD-LTE Band 12	Low, Middle, High Channels
TM6	FDD-LTE Band 13	Low, Middle, High Channels
TM7	FDD-LTE Band 41	Low, Middle, High Channels
TM8	FDD-LTE Band 66	Low, Middle, High Channels

Testing Configure			
Support Band	Test Mode BW(MHz)	Channel Frequency	Channel Number
LTE Band 2	1.4	1850.7 MHz	18607
		1880.0 MHz	18900
		1909.3 MHz	19193
	3	1851.5 MHz	18615
		1880.0 MHz	18900
		1908.5 MHz	19185
	5	1852.5 MHz	18625
		1880.0 MHz	18900
		1907.5 MHz	19175
	10	1855.0 MHz	18650
		1880.0 MHz	18900
		1905.0 MHz	19150
	15	1857.5 MHz	18675
		1880.0 MHz	18900
		1902.5 MHz	19125
20	1860.0 MHz	18700	
	1880.0 MHz	18900	
	1900.0 MHz	19100	

LTE Band 4	1.4	1710.7 MHz	19957
		1732.5 MHz	20175
		1754.3 MHz	20393
	3	1711.5 MHz	19965
		1732.5 MHz	20175
		1753.5 MHz	20385
	5	1712.5 MHz	19975
		1732.5 MHz	20175
		1752.5 MHz	20375
	10	1715.0 MHz	20000
		1732.5 MHz	20175
		1750.0 MHz	20350
	15	1717.5 MHz	20025
		1732.5 MHz	20175
		1747.5 MHz	20325
20	1720.0 MHz	20050	
	1732.5 MHz	20175	
	1745.0 MHz	20300	
LTE Band 5	1.4	824.7 MHz	20407
		836.5 MHz	20525
		848.3 MHz	20643
	3	825.5 MHz	20415
		836.5 MHz	20525
		847.5 MHz	20635
	5	826.5 MHz	20425
		836.5 MHz	20525
		846.5 MHz	20625
	10	829.0 MHz	20450
		836.5 MHz	20525
		844.0 MHz	20600

LTE Band 7	5	2502.5 MHz	20775
		2535.0 MHz	21100
		2567.5 MHz	21425
	10	2505.0 MHz	20800
		2535.0 MHz	21100
		2565.0 MHz	21400
	15	2507.5 MHz	20825
		2535.0 MHz	21100
		2562.5 MHz	21375
	20	2510.0 MHz	20850
		2535.0 MHz	21100
		2560.0 MHz	21350
LTE Band 12	1.4	699.7 MHz	23017
		707.5 MHz	23095
		715.3 MHz	23173
	3	700.5 MHz	23025
		707.5 MHz	23095
		714.5 MHz	23165
	5	701.5 MHz	23035
		707.5 MHz	23095
		713.5 MHz	23155
	10	704.0 MHz	23060
		707.5 MHz	23095
		711.0 MHz	23130
LTE Band 13	5	779.5 MHz	23205
		782.0 MHz	23230
		784.5 MHz	23255
	10	782.0 MHz	23230
LTE Band 41	5	2498.5 MHz	39675
		2593.0 MHz	40620
		2687.5MHz	41565
	10	2501.0 MHz	39700
		2593.0 MHz	40620
		2685.0 MHz	41540
	15	2503.5 MHz	39725
		2593.0 MHz	40620
		2682.5 MHz	41515
	20	2687.5 MHz	39750
		2593.0 MHz	40620
		2680.0 MHz	41490

LTE Band 66	1.4	1710.7MHz	131979
		1744.9 MHz	132321
		1779.2 MHz	132664
	3	1711.5 MHz	131987
		1744.9 MHz	132321
		1778.4MHz	132656
	5	1712.5 MHz	131997
		1744.9 MHz	132321
		1777.4 MHz	132646
	10	1715.0 MHz	132022
		1744.9 MHz	132321
		1774.9 MHz	132621
	15	1722.5 MHz	132097
		1744.9 MHz	132321
		1767.4 MHz	132546
20	1720.0 MHz	132072	
	1744.9 MHz	132321	
	1759.9 MHz	132471	
Note: the transmitter has been tested on all communications mode compliance test and record the worst case.			

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~75 %
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Unshielded	Without Ferrite
Earphone Cable	1.2	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	0.57dB
Occupied Bandwidth	Conducted	0.015MHz
Frequency Stability	Conducted	2.3%
Transmitter Spurious Emissions	Conducted	0.42dB
Transmitter Spurious Emissions	Radiated	30-200MHz, 4.52dB
		0.2-1GHz 5.56dB
		1-6GHz, 3.84dB
		6-18GHz, 3.92dB

1.7 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041 A1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2025-02-23	2026-02-22
WTXE1022 A1002	GSM Tester	Rohde & Schwarz	CMU200	114403	2025-02-23	2026-02-22
WTXE1104 A1001	MXG Vector Signal Generator	Agilent	N5182A	MY47420108	2025-02-23	2026-02-22
WTXE1104 A1002	DC Power Supply	Agilent	E3634A	MY40009294	2025-02-23	2026-02-22
WTXE1104 A1003	EXG Analog Signal Generator	KEYSIGHT	N5173B	MY61252892	2025-02-23	2026-02-22
WTXE1104 A1004	Spectrum Analyzer	Rohde&Schwarz	FSV40-N	101559	2025-02-23	2026-02-22
WTXE1018 A1001	Power Divider	Weinschel	1506A	PM204	2025-02-23	2026-02-22
WTXE1104 A1005-2	Band Reject Filter Group	Tonscend	JS0806-F	23A806F0658	2025-02-23	2026-02-22
WTXE1103 A1003	Attenuator	Pasternack	PE4007-4	/	2025-02-23	2026-02-22
WTXE1003 A1-005	Coaxial Cable	/	0M4RFC	/	2025-02-23	2026-02-22
<input type="checkbox"/> Chamber A: Below 1GHz						
WTXE1005 A1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2025-02-23	2026-02-22
WTXE1001 A1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2025-02-23	2026-02-22
WTXE1007 A1001	Amplifier	HP	8447F	2805A03475	2025-02-23	2026-02-22
WTXE1010 A1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2026-02-25
WTXE1010 A1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2025-02-23	2026-02-22
WTXE1104 A1032-1	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104 A1032-2	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104 A1032-3	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22

<input type="checkbox"/> Chamber A: Above 1GHz						
WTXE1005 A1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2025-02-23	2026-02-22
WTXE1001 A1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2025-02-23	2026-02-22
WTXE1065 A1001	Amplifier	C&D	PAP-1G18	2002	2025-02-23	2026-02-22
WTXE1010 A1005	Horn Antenna	ETS	3117	00086197	2025-02-23	2026-02-22
WTXE1010 A1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2026-03-16
WTXE1003 A1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2025-02-23	2026-02-22
WTXE1004 A1-001	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2025-02-23	2026-02-22
WTXE1104 A1033-1	Coaxial Cable	/	C16-07-07	/	2025-02-23	2026-02-22
WTXE1104 A1033-2	Coaxial Cable	/	C16-07-07	/	2025-02-23	2026-02-22
WTXE1104 A1033-3	Coaxial Cable	/	C16-07-07	/	2025-02-23	2026-02-22
<input type="checkbox"/> Chamber B:Below 1GHz						
WTXE1010 A1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038 A1001	Amplifier	Agilent	8447D	2944A104 57	2025-02-23	2026-02-22
WTXE1001 A1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2025-02-23	2026-02-22
WTXE1104 A1031-1	Coaxial Cable	/	1.5MRFC-LWB 3	/	2025-02-23	2026-02-22
WTXE1104 A1031-2	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22
WTXE1104 A1031-3	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22
<input checked="" type="checkbox"/> Chamber C:Below 1GHz						
WTXE1093 A1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2025-02-23	2026-02-22
WTXE1010 A1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
WTXE1007	Amplifier	HP	8447F	2944A038	2025-02-23	2026-02-22

A1002				69		
WTXE1010 A1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2026-02-25
WTXE1104 A1034-1	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104 A1034-2	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104 A1034-3	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
<input checked="" type="checkbox"/> Chamber C: Above 1GHz						
WTXE1093 A1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2025-02-23	2026-02-22
WTXE1103 A1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103 A1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2025-02-23	2026-02-22
WTXE1010 A1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2026-03-16
WTXE1003 A1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2025-02-23	2026-02-22
WTXE1104 A1035-1	Coaxial Cable	/	RC-18G-N-M	/	2025-02-23	2026-02-22
WTXE1104 A1035-2	Coaxial Cable	/	RC-18G-N-M	/	2025-02-23	2026-02-22
WTXE1104 A1035-3	Coaxial Cable	/	RC-18G-N-M	/	2025-02-23	2026-02-22

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission A)	Farad	EZ-EMC	RA-03A1 (1.1.4.2)
EMI Test Software (Radiated Emission B)	Farad	EZ-EMC	RA-03A1 (1.1.4.2)
EMI Test Software (Radiated Emission C)	Farad	EZ-EMC	RA-03A1-2 (1.1.4.2)
LTE Test System*	Tonscend	JS1120-1	V2.5

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§2.1046, §22.913(a)(2), §24.232(c), §27.50(b)(10), §27.50(c)(10), §27.50(d)(4), §27.50(h)(2)	RF Output Power	Compliant
§24.232(d), §27.50(d)(5)	Peak-to-average Ratio (PAR) of Transmitter	Compliant
§2.1049	Emission Bandwidth	Compliant
§2.1053, §22.917(a), §24.238(a), §27.53(c)(2), §27.53(g), §27.53(h) §27.53(m)(4)	Spurious Emissions at Antenna Terminal	Compliant
§2.1053, §22.917(a), §24.238(a), §27.53(c)(2), §27.53(g), §27.53(h) §27.53(m)(4)	Spurious Radiation Emissions	Compliant
§2.1051, §22.917(a), §24.238(a), §27.53(c)(2), §27.53(g), §27.53(h), §27.53(m)(4)	Out of Band Emissions	Compliant
§2.1055, §22.355, §24.235, §27.54	Frequency Stability	Compliant

3. RF Output Power

3.1 Standard Applicable

According to §22.913(a)(2), the ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.


According to §24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755MHz band and mobile and portable stations operating in the 1695-1710MHz and 1755-1780MHz bands are limited to 1 watt EIRP.

According to §27.50(c)(10), portable stations (hand-held devices) in the 698-746 MHz band are limited to 3 watts ERP.

3.2 Test Procedure

- Conducted output power test method:

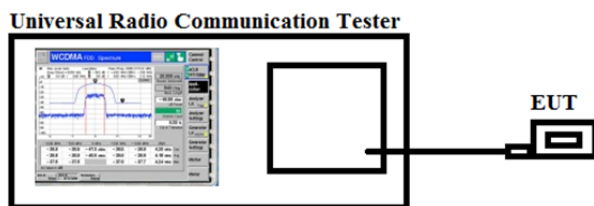

- Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

3.3 Summary of Test Results/Plots

Max. Radiated Power:**LTE Band 2**

Channel Bandwidth	Modulation	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Verdict
1.4MHz	QPSK	Low	H	19.04	33	Pass
			V	22.01	33	Pass
		Middle	H	18.34	33	Pass
			V	20.99	33	Pass
		High	H	18.26	33	Pass
			V	20.24	33	Pass
	16QAM	Low	H	18.99	33	Pass
			V	21.59	33	Pass
		Middle	H	18.31	33	Pass
			V	20.71	33	Pass
		High	H	17.85	33	Pass
			V	19.81	33	Pass
3MHz	QPSK	Low	H	18.36	33	Pass
			V	21.36	33	Pass
		Middle	H	17.92	33	Pass
			V	20.20	33	Pass
		High	H	17.86	33	Pass
			V	19.91	33	Pass
	16QAM	Low	H	18.91	33	Pass
			V	21.28	33	Pass
		Middle	H	17.69	33	Pass
			V	20.11	33	Pass
		High	H	17.48	33	Pass
			V	19.76	33	Pass
5MHz	QPSK	Low	H	18.77	33	Pass
			V	21.95	33	Pass
		Middle	H	18.02	33	Pass
			V	20.87	33	Pass
		High	H	18.13	33	Pass
			V	19.83	33	Pass
	16QAM	Low	H	18.90	33	Pass
			V	21.32	33	Pass
		Middle	H	18.03	33	Pass
			V	20.49	33	Pass
		High	H	17.70	33	Pass
			V	19.69	33	Pass

Channel Bandwidth	Modulation	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Verdict
10MHz	QPSK	Low	H	18.62	33	Pass
			V	21.52	33	Pass
		Middle	H	17.80	33	Pass
			V	20.44	33	Pass
		High	H	17.85	33	Pass
			V	19.78	33	Pass
	16QAM	Low	H	18.30	33	Pass
			V	21.03	33	Pass
		Middle	H	18.07	33	Pass
			V	20.65	33	Pass
		High	H	17.79	33	Pass
			V	19.71	33	Pass
15MHz	QPSK	Low	H	18.28	33	Pass
			V	21.41	33	Pass
		Middle	H	17.39	33	Pass
			V	20.02	33	Pass
		High	H	17.49	33	Pass
			V	19.40	33	Pass
	16QAM	Low	H	18.30	33	Pass
			V	20.67	33	Pass
		Middle	H	17.62	33	Pass
			V	20.61	33	Pass
		High	H	17.45	33	Pass
			V	19.50	33	Pass
20MHz	QPSK	Low	H	18.92	33	Pass
			V	21.70	33	Pass
		Middle	H	18.35	33	Pass
			V	22.11	33	Pass
		High	H	17.71	33	Pass
			V	21.25	33	Pass
	16QAM	Low	H	18.80	33	Pass
			V	21.42	33	Pass
		Middle	H	18.35	33	Pass
			V	21.84	33	Pass
		High	H	17.33	33	Pass
			V	20.95	33	Pass

LTE Band 4

Channel Bandwidth	Modulation	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Verdict
1.4MHz	QPSK	Low	H	18.98	30	Pass
			V	22.03	30	Pass
		Middle	H	18.41	30	Pass
			V	21.12	30	Pass
		High	H	17.80	30	Pass
			V	20.75	30	Pass
	16QAM	Low	H	18.95	30	Pass
			V	21.88	30	Pass
		Middle	H	18.32	30	Pass
			V	20.68	30	Pass
		High	H	17.54	30	Pass
			V	20.70	30	Pass
3MHz	QPSK	Low	H	18.32	30	Pass
			V	21.88	30	Pass
		Middle	H	17.76	30	Pass
			V	21.02	30	Pass
		High	H	17.74	30	Pass
			V	20.04	30	Pass
	16QAM	Low	H	18.37	30	Pass
			V	21.75	30	Pass
		Middle	H	17.66	30	Pass
			V	20.40	30	Pass
		High	H	16.86	30	Pass
			V	20.68	30	Pass
5MHz	QPSK	Low	H	18.61	30	Pass
			V	21.92	30	Pass
		Middle	H	18.05	30	Pass
			V	20.86	30	Pass
		High	H	17.41	30	Pass
			V	20.70	30	Pass
	16QAM	Low	H	18.56	30	Pass
			V	21.63	30	Pass
		Middle	H	18.29	30	Pass
			V	20.61	30	Pass
		High	H	17.39	30	Pass
			V	20.64	30	Pass

Channel Bandwidth	Modulation	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Verdict
10MHz	QPSK	Low	H	18.92	30	Pass
			V	21.22	30	Pass
		Middle	H	18.23	30	Pass
			V	20.88	30	Pass
		High	H	17.29	30	Pass
			V	20.42	30	Pass
	16QAM	Low	H	18.44	30	Pass
			V	21.46	30	Pass
		Middle	H	17.71	30	Pass
			V	20.40	30	Pass
		High	H	16.85	30	Pass
			V	20.30	30	Pass
15MHz	QPSK	Low	H	18.74	30	Pass
			V	21.15	30	Pass
		Middle	H	18.06	30	Pass
			V	20.63	30	Pass
		High	H	17.10	30	Pass
			V	20.10	30	Pass
	16QAM	Low	H	18.14	30	Pass
			V	21.08	30	Pass
		Middle	H	17.46	30	Pass
			V	20.19	30	Pass
		High	H	16.61	30	Pass
			V	19.93	30	Pass
20MHz	QPSK	Low	H	18.72	30	Pass
			V	20.92	30	Pass
		Middle	H	18.22	30	Pass
			V	20.18	30	Pass
		High	H	16.49	30	Pass
			V	19.63	30	Pass
	16QAM	Low	H	18.29	30	Pass
			V	20.98	30	Pass
		Middle	H	17.40	30	Pass
			V	19.57	30	Pass
		High	H	16.14	30	Pass
			V	19.77	30	Pass

LTE Band 5

Channel Bandwidth	Modulation	Channel	Antenna Polar	ERP (dBm)	Limit (dBm)	Verdict
1.4MHz	QPSK	Low	H	18.06	38.45	Pass
			V	21.28	38.45	Pass
		Middle	H	17.57	38.45	Pass
			V	20.58	38.45	Pass
		High	H	16.22	38.45	Pass
			V	20.21	38.45	Pass
	16QAM	Low	H	17.98	38.45	Pass
			V	20.64	38.45	Pass
		Middle	H	16.90	38.45	Pass
			V	19.58	38.45	Pass
		High	H	16.23	38.45	Pass
			V	20.01	38.45	Pass
3MHz	QPSK	Low	H	18.18	38.45	Pass
			V	21.33	38.45	Pass
		Middle	H	17.77	38.45	Pass
			V	20.60	38.45	Pass
		High	H	16.73	38.45	Pass
			V	20.27	38.45	Pass
	16QAM	Low	H	18.15	38.45	Pass
			V	20.61	38.45	Pass
		Middle	H	17.34	38.45	Pass
			V	19.95	38.45	Pass
		High	H	16.71	38.45	Pass
			V	19.97	38.45	Pass
5MHz	QPSK	Low	H	18.38	38.45	Pass
			V	21.39	38.45	Pass
		Middle	H	17.20	38.45	Pass
			V	20.81	38.45	Pass
		High	H	16.18	38.45	Pass
			V	19.70	38.45	Pass
	16QAM	Low	H	17.76	38.45	Pass
			V	20.32	38.45	Pass
		Middle	H	17.69	38.45	Pass
			V	19.71	38.45	Pass
		High	H	16.25	38.45	Pass
			V	19.95	38.45	Pass

Channel Bandwidth	Modulation	Channel	Antenna Polar	ERP (dBm)	Limit (dBm)	Verdict
10MHz	QPSK	Low	H	18.39	38.45	Pass
			V	21.44	38.45	Pass
		Middle	H	17.99	38.45	Pass
			V	20.82	38.45	Pass
		High	H	17.01	38.45	Pass
			V	20.35	38.45	Pass
	16QAM	Low	H	18.31	38.45	Pass
			V	20.91	38.45	Pass
		Middle	H	17.70	38.45	Pass
			V	20.39	38.45	Pass
		High	H	16.72	38.45	Pass
			V	20.21	38.45	Pass

LTE Band 7

Channel Bandwidth	Modulation	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Verdict
5MHz	QPSK	Low	H	18.52	33	Pass
			V	22.47	33	Pass
		Middle	H	19.07	33	Pass
			V	21.83	33	Pass
		High	H	17.72	33	Pass
			V	21.01	33	Pass
	16QAM	Low	H	18.26	33	Pass
			V	22.14	33	Pass
		Middle	H	18.07	33	Pass
			V	21.52	33	Pass
		High	H	17.49	33	Pass
			V	20.75	33	Pass
10MHz	QPSK	Low	H	19.30	33	Pass
			V	22.13	33	Pass
		Middle	H	19.02	33	Pass
			V	21.95	33	Pass
		High	H	18.24	33	Pass
			V	21.04	33	Pass
	16QAM	Low	H	18.91	33	Pass
			V	21.84	33	Pass
		Middle	H	18.73	33	Pass
			V	22.01	33	Pass
		High	H	17.82	33	Pass
			V	21.06	33	Pass
15MHz	QPSK	Low	H	18.60	33	Pass
			V	21.86	33	Pass
		Middle	H	18.83	33	Pass
			V	21.75	33	Pass

		High	H	17.71	33	Pass
			V	21.32	33	Pass
	16QAM	Low	H	18.42	33	Pass
			V	21.61	33	Pass
		Middle	H	18.69	33	Pass
			V	21.73	33	Pass
	High	H	17.82	33	Pass	
		V	20.82	33	Pass	

Channel Bandwidth	Modulation	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Verdict
20MHz	QPSK	Low	H	19.35	33	Pass
			V	21.63	33	Pass
		Middle	H	19.29	33	Pass
			V	22.09	33	Pass
		High	H	18.48	33	Pass
			V	22.54	33	Pass
	16QAM	Low	H	19.10	33	Pass
			V	22.07	33	Pass
		Middle	H	18.90	33	Pass
			V	22.04	33	Pass
		High	H	18.02	33	Pass
			V	22.21	33	Pass

LTE Band 12

Channel Bandwidth	Modulation	Channel	Antenna Polar	ERP (dBm)	Limit (dBm)	Verdict
1.4MHz	QPSK	Low	H	17.09	34.77	Pass
			V	20.06	34.77	Pass
		Middle	H	16.50	34.77	Pass
			V	19.78	34.77	Pass
		High	H	15.65	34.77	Pass
			V	20.12	34.77	Pass
	16QAM	Low	H	16.88	34.77	Pass
			V	19.93	34.77	Pass
		Middle	H	16.23	34.77	Pass
			V	20.36	34.77	Pass
		High	H	15.29	34.77	Pass
			V	19.30	34.77	Pass
3MHz	QPSK	Low	H	17.32	34.77	Pass
			V	20.63	34.77	Pass
		Middle	H	17.00	34.77	Pass
			V	20.42	34.77	Pass
		High	H	16.14	34.77	Pass
			V	19.80	34.77	Pass
	16QAM	Low	H	17.24	34.77	Pass
			V	20.03	34.77	Pass
		Middle	H	16.63	34.77	Pass
			V	20.27	34.77	Pass
		High	H	15.67	34.77	Pass
			V	19.89	34.77	Pass
5MHz	QPSK	Low	H	17.01	34.77	Pass
			V	20.19	34.77	Pass
		Middle	H	16.51	34.77	Pass
			V	19.94	34.77	Pass
		High	H	15.99	34.77	Pass
			V	19.76	34.77	Pass
	16QAM	Low	H	16.74	34.77	Pass
			V	20.16	34.77	Pass
		Middle	H	16.20	34.77	Pass
			V	20.12	34.77	Pass
		High	H	15.43	34.77	Pass
			V	19.49	34.77	Pass

Channel Bandwidth	Modulation	Channel	Antenna Polar	ERP (dBm)	Limit (dBm)	Verdict
10MHz	QPSK	Low	H	17.69	34.77	Pass
			V	20.72	34.77	Pass
		Middle	H	17.16	34.77	Pass
			V	20.58	34.77	Pass
		High	H	16.21	34.77	Pass
			V	20.19	34.77	Pass
	16QAM	Low	H	17.46	34.77	Pass
			V	20.46	34.77	Pass
		Middle	H	17.05	34.77	Pass
			V	20.40	34.77	Pass
		High	H	16.11	34.77	Pass
			V	20.14	34.77	Pass

LTE Band 13

Channel Bandwidth	Modulation	Channel	Antenna Polar	ERP (dBm)	Limit (dBm)	Verdict
5MHz	QPSK	Low	H	17.75	34.77	Pass
			V	20.83	34.77	Pass
		Middle	H	17.55	34.77	Pass
			V	19.98	34.77	Pass
		High	H	16.69	34.77	Pass
			V	19.05	34.77	Pass
	16QAM	Low	H	17.66	34.77	Pass
			V	20.47	34.77	Pass
		Middle	H	17.22	34.77	Pass
			V	19.69	34.77	Pass
		High	H	16.24	34.77	Pass
			V	18.76	34.77	Pass
10MHz	QPSK	Low	H	17.52	34.77	Pass
			V	20.54	34.77	Pass
	16QAM	Low	H	17.37	34.77	Pass
			V	19.77	34.77	Pass

LTE Band 41

Channel Bandwidth	Modulation	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Verdict
5MHz	QPSK	Low	H	18.30	33	Pass
			V	21.52	33	Pass
		Middle	H	17.44	33	Pass
			V	20.98	33	Pass
		High	H	16.95	33	Pass
			V	20.72	33	Pass
	16QAM	Low	H	18.46	33	Pass
			V	20.60	33	Pass
		Middle	H	17.44	33	Pass
			V	20.76	33	Pass
		High	H	17.21	33	Pass
			V	19.76	33	Pass
10MHz	QPSK	Low	H	18.35	33	Pass
			V	21.39	33	Pass
		Middle	H	17.42	33	Pass
			V	21.34	33	Pass
		High	H	17.02	33	Pass
			V	20.82	33	Pass
	16QAM	Low	H	18.26	33	Pass
			V	20.86	33	Pass
		Middle	H	17.32	33	Pass
			V	21.31	33	Pass
		High	H	17.21	33	Pass
			V	20.25	33	Pass
15MHz	QPSK	Low	H	18.10	33	Pass
			V	21.23	33	Pass
		Middle	H	17.44	33	Pass
			V	20.79	33	Pass
		High	H	17.35	33	Pass
			V	20.04	33	Pass
	16QAM	Low	H	18.39	33	Pass
			V	20.92	33	Pass
		Middle	H	17.31	33	Pass
			V	21.29	33	Pass
		High	H	16.46	33	Pass
			V	20.41	33	Pass

Channel Bandwidth	Modulation	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Verdict
20MHz	QPSK	Low	H	18.56	33	Pass
			V	21.50	33	Pass
		Middle	H	17.75	33	Pass
			V	21.66	33	Pass
		High	H	17.37	33	Pass
			V	20.82	33	Pass
	16QAM	Low	H	18.48	33	Pass
			V	21.13	33	Pass
		Middle	H	17.55	33	Pass
			V	21.40	33	Pass
		High	H	17.23	33	Pass
			V	20.50	33	Pass

LTE Band 66

Channel Bandwidth	Modulation	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Verdict
1.4MHz	QPSK	Low	H	18.66	30	Pass
			V	21.69	30	Pass
		Middle	H	18.07	30	Pass
			V	21.33	30	Pass
		High	H	17.43	30	Pass
			V	20.45	30	Pass
	16QAM	Low	H	17.70	30	Pass
			V	21.15	30	Pass
		Middle	H	17.56	30	Pass
			V	20.20	30	Pass
		High	H	17.86	30	Pass
			V	19.58	30	Pass
3MHz	QPSK	Low	H	18.54	30	Pass
			V	21.76	30	Pass
		Middle	H	18.19	30	Pass
			V	20.94	30	Pass
		High	H	17.74	30	Pass
			V	20.43	30	Pass
	16QAM	Low	H	18.10	30	Pass
			V	21.86	30	Pass
		Middle	H	18.03	30	Pass
			V	20.53	30	Pass
		High	H	17.95	30	Pass
			V	19.82	30	Pass
5MHz	QPSK	Low	H	18.61	30	Pass
			V	21.84	30	Pass
		Middle	H	17.71	30	Pass
			V	20.92	30	Pass
		High	H	17.77	30	Pass
			V	20.39	30	Pass
	16QAM	Low	H	18.45	30	Pass
			V	21.13	30	Pass
		Middle	H	17.43	30	Pass
			V	20.77	30	Pass
		High	H	17.65	30	Pass
			V	19.38	30	Pass

Channel Bandwidth	Modulation	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Verdict
10MHz	QPSK	Low	H	18.52	30	Pass
			V	21.44	30	Pass
		Middle	H	17.43	30	Pass
			V	20.70	30	Pass
		High	H	17.60	30	Pass
			V	20.01	30	Pass
	16QAM	Low	H	18.01	30	Pass
			V	20.89	30	Pass
		Middle	H	17.00	30	Pass
			V	20.34	30	Pass
		High	H	17.22	30	Pass
			V	19.29	30	Pass
15MHz	QPSK	Low	H	18.30	30	Pass
			V	21.64	30	Pass
		Middle	H	17.68	30	Pass
			V	20.25	30	Pass
		High	H	17.00	30	Pass
			V	19.65	30	Pass
	16QAM	Low	H	18.09	30	Pass
			V	20.64	30	Pass
		Middle	H	17.04	30	Pass
			V	20.34	30	Pass
		High	H	17.55	30	Pass
			V	19.19	30	Pass
20MHz	QPSK	Low	H	18.97	30	Pass
			V	21.56	30	Pass
		Middle	H	18.54	30	Pass
			V	22.12	30	Pass
		High	H	18.19	30	Pass
			V	20.56	30	Pass
	16QAM	Low	H	18.46	30	Pass
			V	21.84	30	Pass
		Middle	H	18.20	30	Pass
			V	21.98	30	Pass
		High	H	17.96	30	Pass
			V	20.18	30	Pass

Max. Conducted Output Power

Please refer to Appendix A: Average Power Output Data

Test result: Pass

4. Peak-to-average Ratio (PAR) of Transmitter

4.1 Standard Applicable

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.


According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

4.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled.
2. Frequency = carrier center frequency.
3. Measurement BW > Emission bandwidth of signal.
4. The signal analyzer was set to collect one million samples to generate the CCDF curve.
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power.

Test Configuration for the emission bandwidth testing:

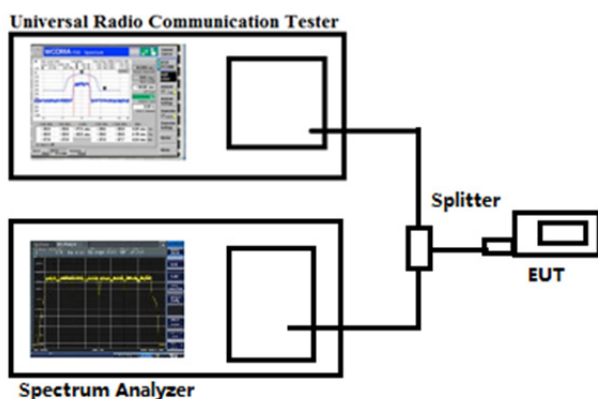

4.3 Summary of Test Results

Please refer to Appendix B: Peak-to-Average Ratio

Test result: Pass

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

5. Emission Bandwidth

5.1 Standard Applicable

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.


According to §24.238(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

According to §27.53, the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

5.2 Test Procedure

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Test Configuration for the emission bandwidth testing:

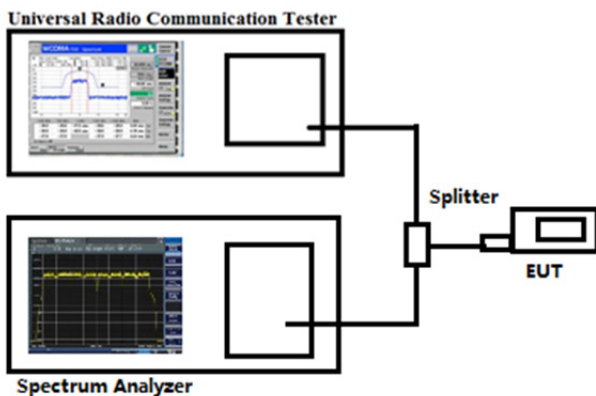

5.3 Summary of Test Results/Plots

Please refer to Appendix C: 26dB Bandwidth and Occupied Bandwidth

Test result: Pass

6. Out of Band Emissions at Antenna Terminal

6.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.


According to §27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

According to §27.53(m)(4), for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log(P)$ dB on all frequencies between 2490.5MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5MHz.

6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic.

Test Configuration for the out of band emissions testing:

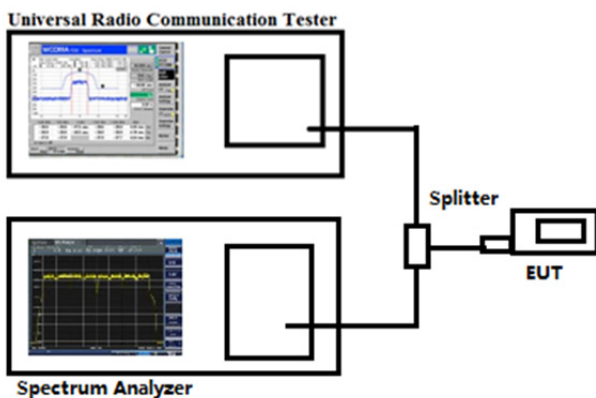

Reference No.: WTX25X09245774W002

6.3 Summary of Test Results/Plots

Please refer to Appendix D & E: Band Edge & Conducted Spurious Emission

Test result: Pass

7. Spurious Radiated Emissions

7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to §27.53(g) the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

7.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA-603-E and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$


7.3 Summary of Test Results/Plots

Note: 1. this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

2. All test modes (different bandwidth and different modulation) are performed, but only the worst case is recorded in this report.


➤ Spurious Emissions Below 1GHz
1860.0MHz (20MHz, QPSK)

Test Mode	FDD_LTE Band 2	Polarity:	Horizontal
-----------	----------------	-----------	------------

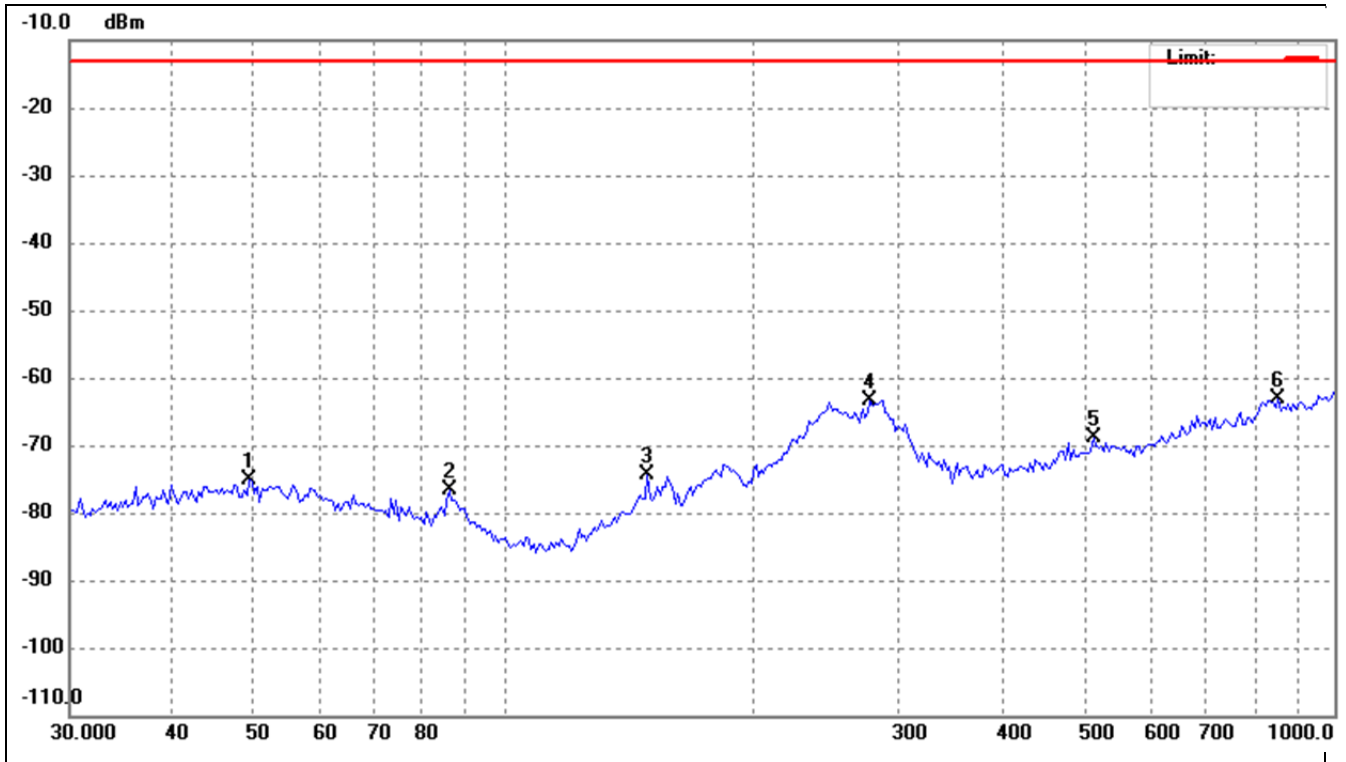

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	49.4087	-78.68	3.44	-75.24	-13.00	-62.24	ERP
2	86.0796	-74.81	-1.75	-76.56	-13.00	-63.56	ERP
3	148.9175	-75.05	0.75	-74.30	-13.00	-61.30	ERP
4	276.3818	-69.71	6.36	-63.35	-13.00	-50.35	ERP
5	512.9478	-76.39	7.41	-68.98	-13.00	-55.98	ERP
6	856.7597	-76.63	13.42	-63.21	-13.00	-50.21	ERP


Test Mode	FDD_LTE Band 2	Polarity:	Vertical
-----------	----------------	-----------	----------

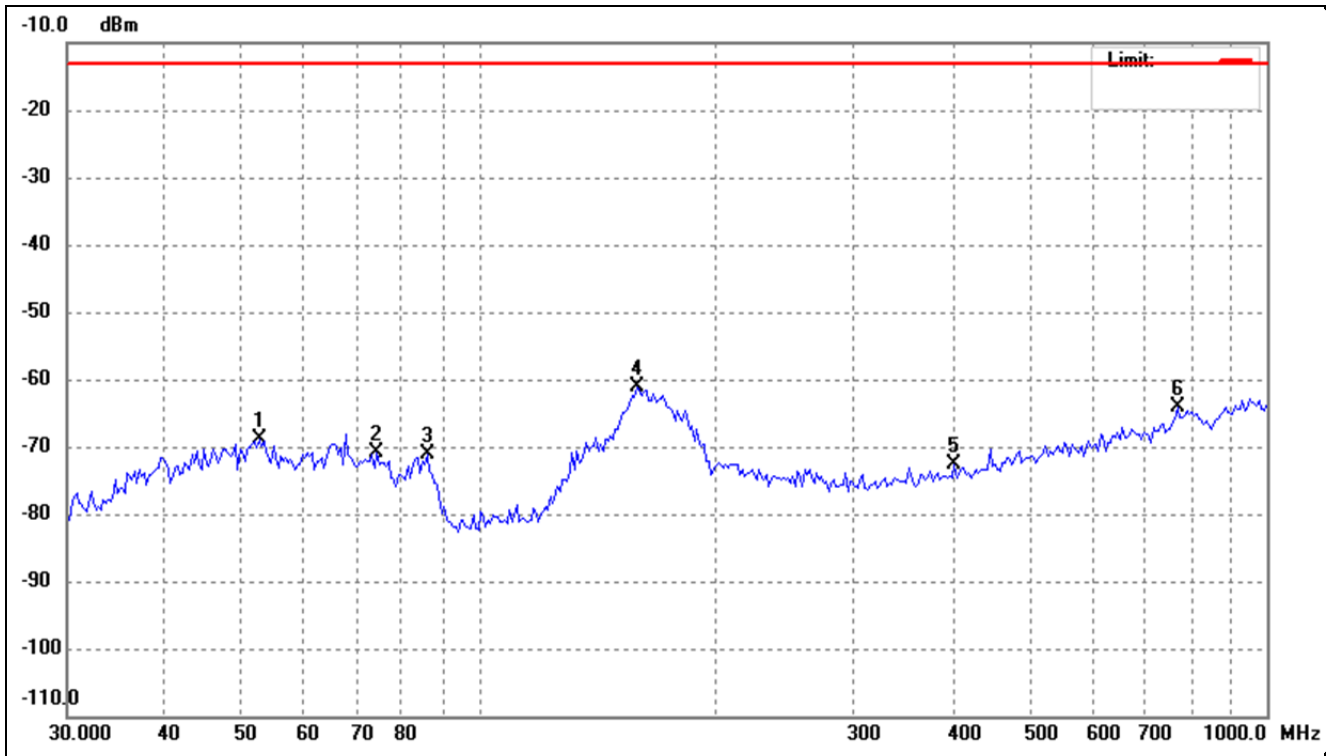

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	52.6345	-72.42	3.45	-68.97	-13.00	-55.97	ERP
2	74.2696	-72.83	1.94	-70.89	-13.00	-57.89	ERP
3	86.0796	-69.92	-1.23	-71.15	-13.00	-58.15	ERP
4	158.6399	-68.59	7.39	-61.20	-13.00	-48.20	ERP
5	401.1050	-78.08	5.39	-72.69	-13.00	-59.69	ERP
6	771.0475	-76.11	11.92	-64.19	-13.00	-51.19	ERP


1710.7MHz (1.4MHz, QPSK)

Test Mode	FDD_LTE Band 4	Polarity:	Horizontal
-----------	----------------	-----------	------------

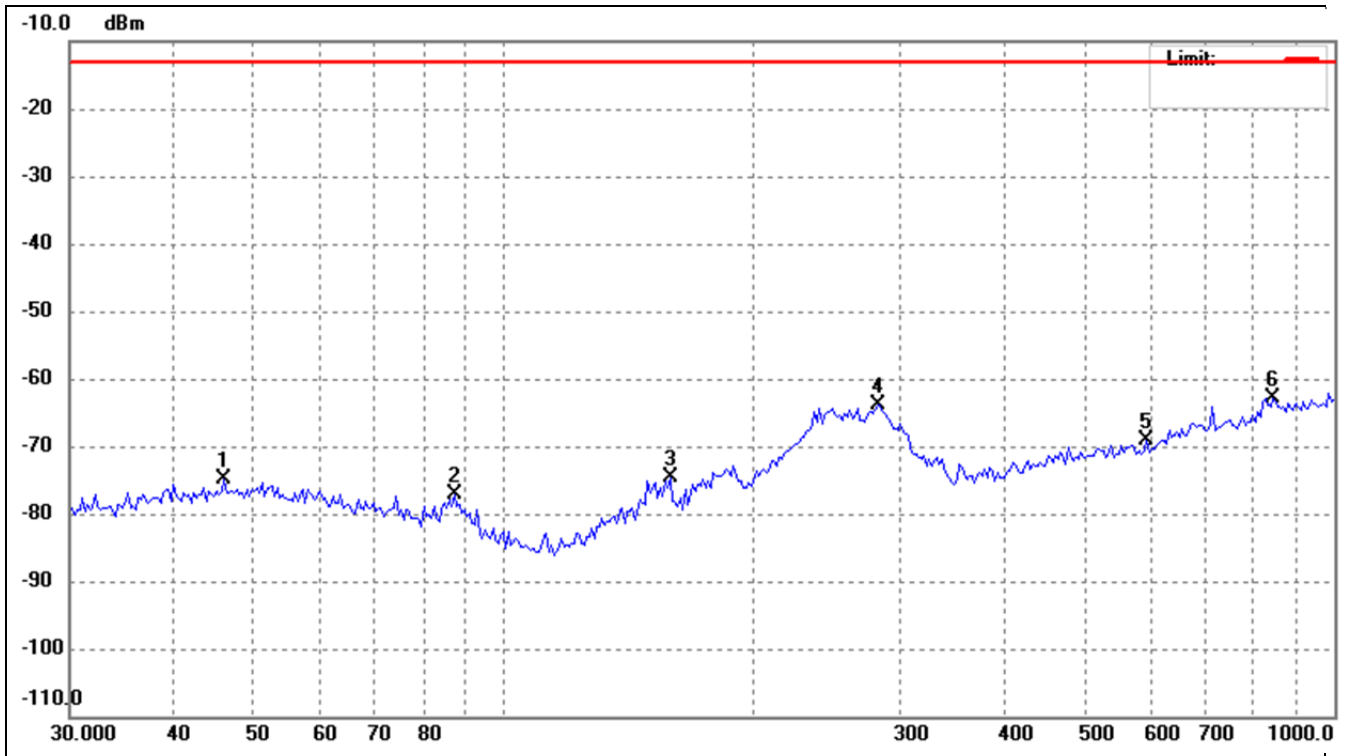

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	46.0558	-78.10	3.13	-74.97	-13.00	-61.97	ERP
2	87.2980	-75.06	-1.97	-77.03	-13.00	-64.03	ERP
3	158.6399	-75.56	0.97	-74.59	-13.00	-61.59	ERP
4	282.2702	-69.74	5.87	-63.87	-13.00	-50.87	ERP
5	594.5143	-77.19	8.14	-69.05	-13.00	-56.05	ERP
6	844.8028	-76.49	13.63	-62.86	-13.00	-49.86	ERP


Test Mode	FDD_LTE Band 4	Polarity:	Vertical
-----------	----------------	-----------	----------

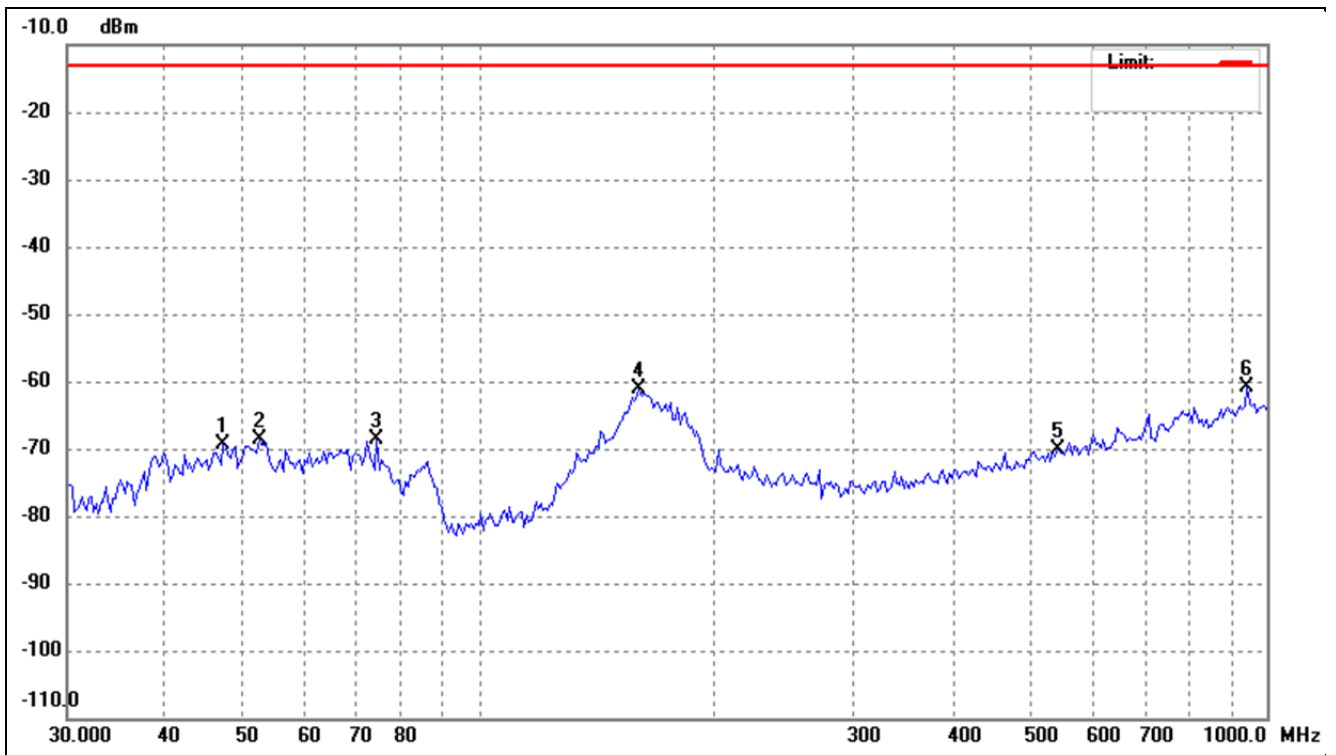

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	47.3688	-72.65	3.25	-69.40	-13.00	-56.40	ERP
2	52.6345	-72.10	3.45	-68.65	-13.00	-55.65	ERP
3	74.2696	-70.66	1.94	-68.72	-13.00	-55.72	ERP
4	159.7586	-68.96	7.83	-61.13	-13.00	-48.13	ERP
5	542.6104	-78.09	7.88	-70.21	-13.00	-57.21	ERP
6	945.3336	-73.34	12.59	-60.75	-13.00	-47.75	ERP


829.0MHz (10 MHz, QPSK)

Test Mode	FDD_LTE Band 5	Polarity:	Horizontal
-----------	----------------	-----------	------------

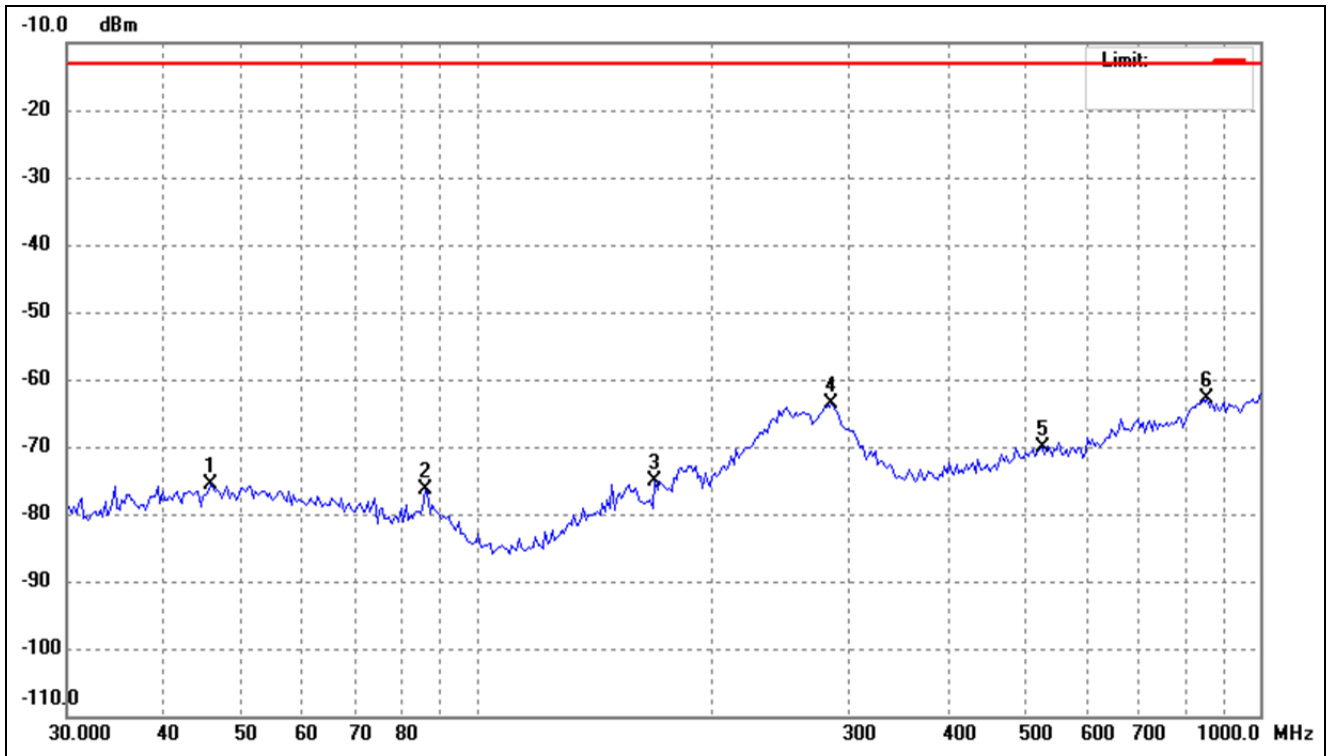

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	45.7333	-78.60	3.09	-75.51	-13.00	-62.51	ERP
2	86.0796	-74.57	-1.75	-76.32	-13.00	-63.32	ERP
3	168.9970	-76.00	0.98	-75.02	-13.00	-62.02	ERP
4	284.2607	-69.43	5.70	-63.73	-13.00	-50.73	ERP
5	527.5707	-77.56	7.54	-70.02	-13.00	-57.02	ERP
6	856.7597	-76.28	13.42	-62.86	-13.00	-49.86	ERP


Test Mode	FDD_LTE Band 5	Polarity:	Vertical
-----------	----------------	-----------	----------

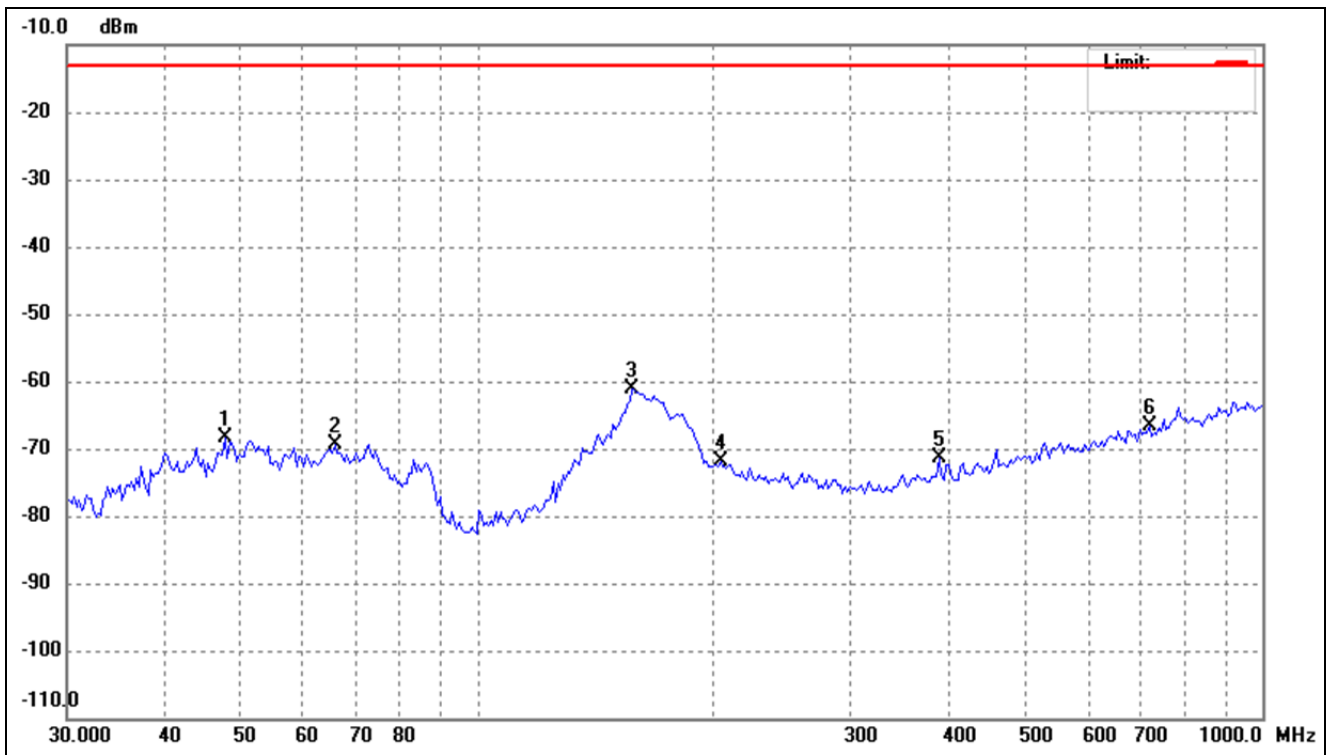

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	47.7028	-71.62	3.28	-68.34	-13.00	-55.34	ERP
2	65.9067	-72.59	3.17	-69.42	-13.00	-56.42	ERP
3	157.5290	-68.15	6.95	-61.20	-13.00	-48.20	ERP
4	204.3052	-73.01	1.21	-71.80	-13.00	-58.80	ERP
5	387.2565	-76.42	5.11	-71.31	-13.00	-58.31	ERP
6	718.7246	-77.10	10.57	-66.53	-13.00	-53.53	ERP


2507.5MHz (15 MHz, QPSK)

Test Mode	FDD_LTE Band 7	Polarity:	Horizontal
-----------	----------------	-----------	------------

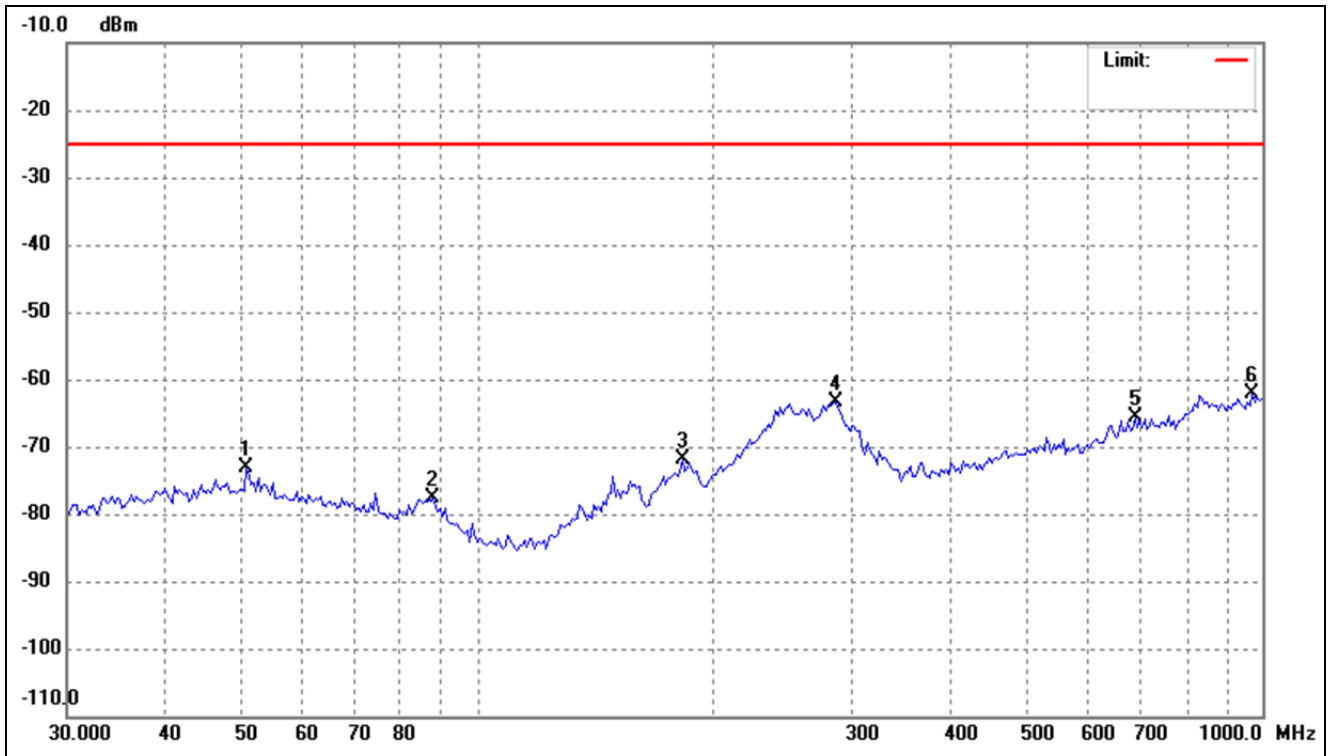

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	50.8172	-76.57	3.40	-73.17	-25.00	-48.17	ERP
2	87.9136	-75.65	-2.07	-77.72	-25.00	-52.72	ERP
3	182.5785	-72.74	0.85	-71.89	-25.00	-46.89	ERP
4	286.2653	-68.99	5.53	-63.46	-25.00	-38.46	ERP
5	689.0510	-76.31	10.68	-65.63	-25.00	-40.63	ERP
6	972.2827	-75.83	13.81	-62.02	-25.00	-37.02	ERP


Test Mode	FDD_LTE Band 7	Polarity:	Vertical
-----------	----------------	-----------	----------

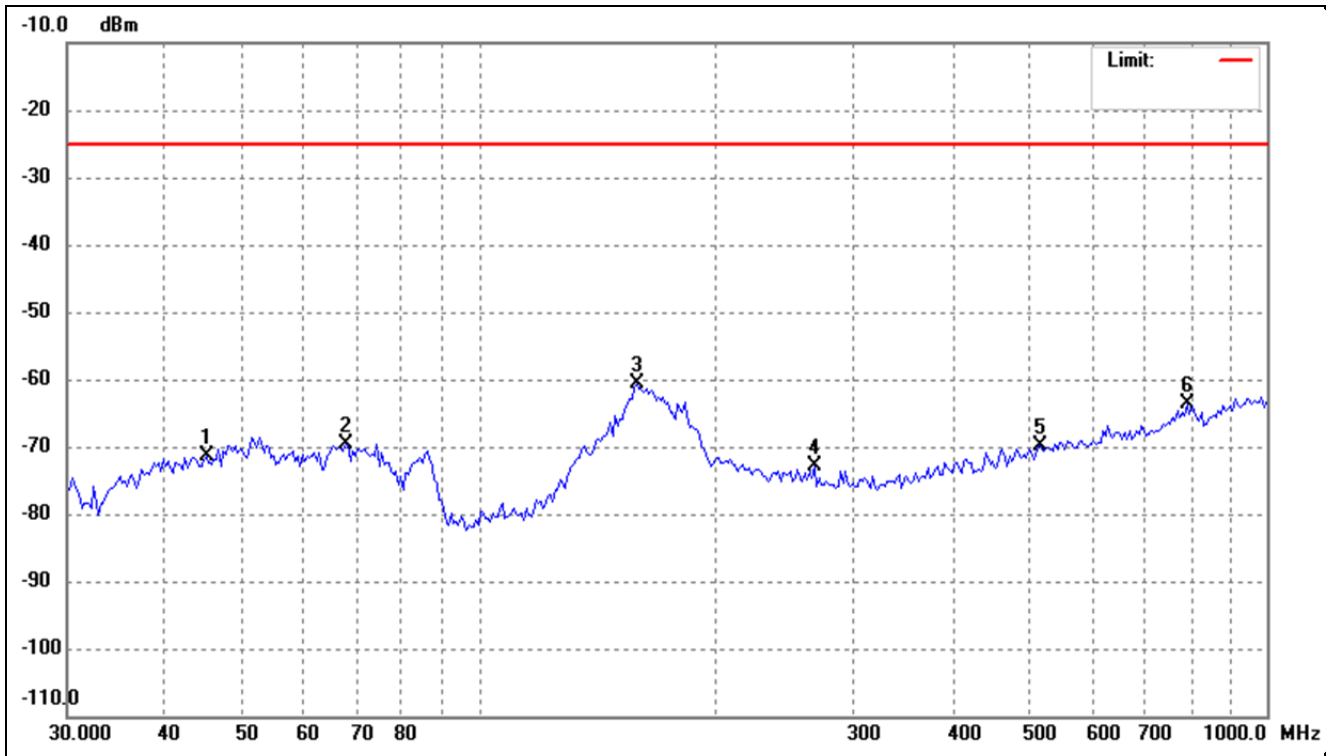

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	45.0951	-74.29	3.03	-71.26	-25.00	-46.26	ERP
2	67.7856	-72.65	3.14	-69.51	-25.00	-44.51	ERP
3	158.6399	-67.91	7.39	-60.52	-25.00	-35.52	ERP
4	266.8395	-74.61	1.69	-72.92	-25.00	-47.92	ERP
5	516.5651	-77.24	7.44	-69.80	-25.00	-44.80	ERP
6	793.0281	-76.14	12.48	-63.66	-25.00	-38.66	ERP


704.0MHz (10MHz, QPSK)

Test Mode	FDD_LTE Band 12	Polarity:	Horizontal
-----------	-----------------	-----------	------------

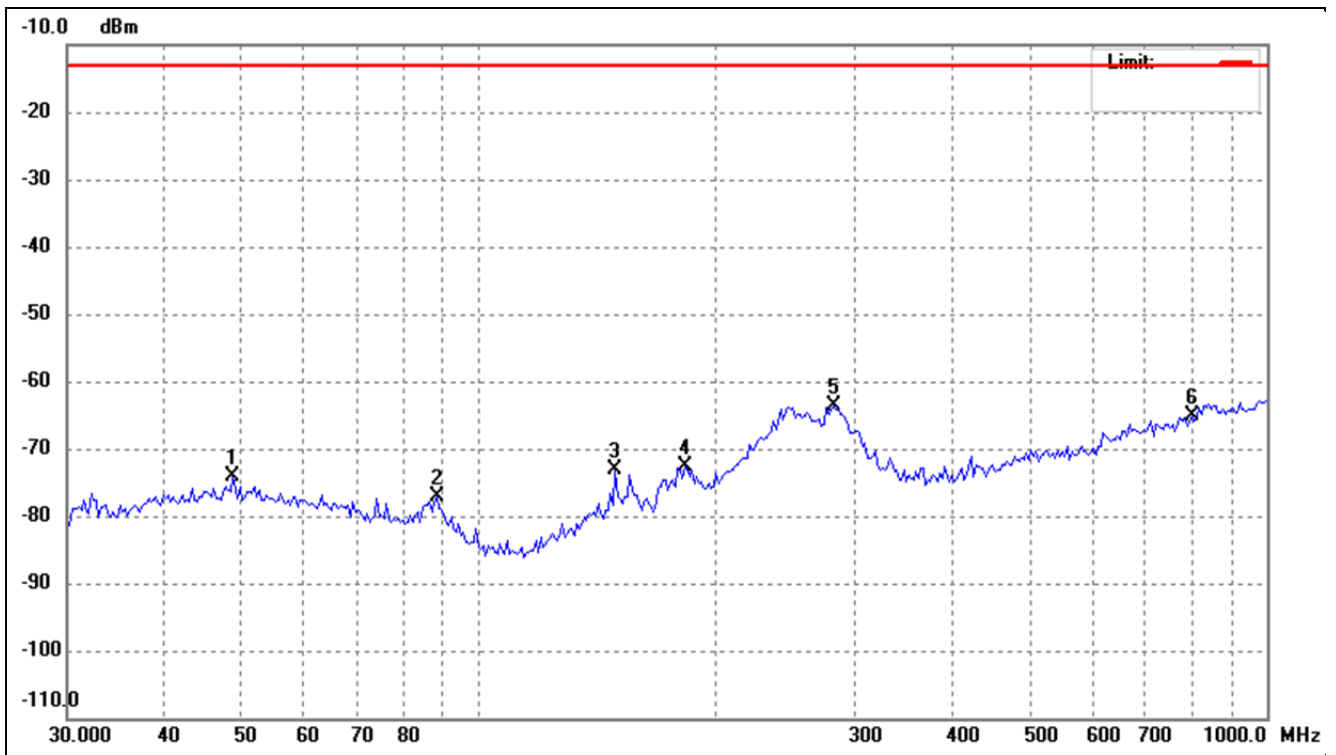

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	48.7191	-77.60	3.38	-74.22	-13.00	-61.22	ERP
2	88.5336	-74.99	-2.18	-77.17	-13.00	-64.17	ERP
3	148.9175	-73.79	0.75	-73.04	-13.00	-60.04	ERP
4	182.5785	-73.53	0.85	-72.68	-13.00	-59.68	ERP
5	282.2702	-69.40	5.87	-63.53	-13.00	-50.53	ERP
6	804.2523	-76.73	11.69	-65.04	-13.00	-52.04	ERP


Test Mode	FDD_LTE Band 12	Polarity:	Vertical
-----------	-----------------	-----------	----------

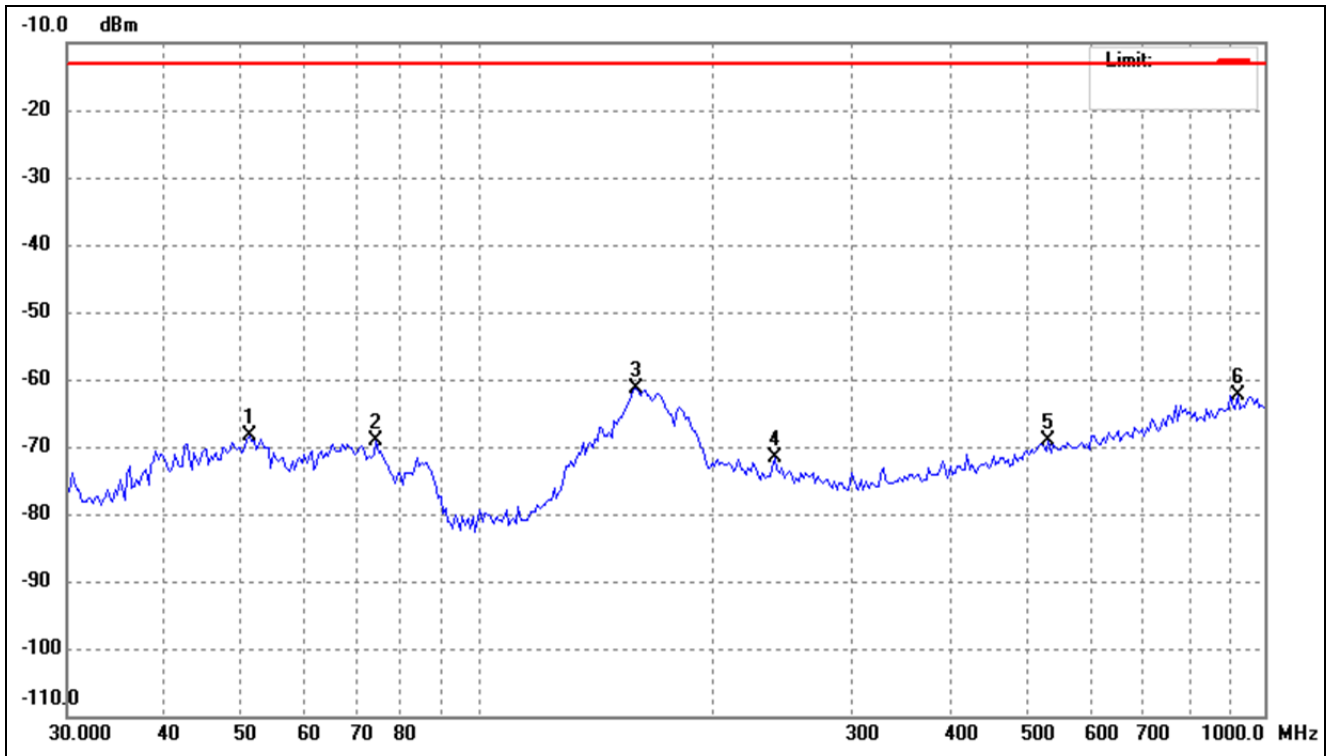

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	51.1756	-71.82	3.48	-68.34	-13.00	-55.34	ERP
2	74.2696	-71.08	1.94	-69.14	-13.00	-56.14	ERP
3	158.6399	-68.67	7.39	-61.28	-13.00	-48.28	ERP
4	238.4626	-72.64	0.95	-71.69	-13.00	-58.69	ERP
5	531.2910	-76.86	7.69	-69.17	-13.00	-56.17	ERP
6	925.6132	-74.82	12.44	-62.38	-13.00	-49.38	ERP


782.0MHz (10MHz, QPSK)

Test Mode	FDD_LTE Band 13	Polarity:	Horizontal
-----------	-----------------	-----------	------------

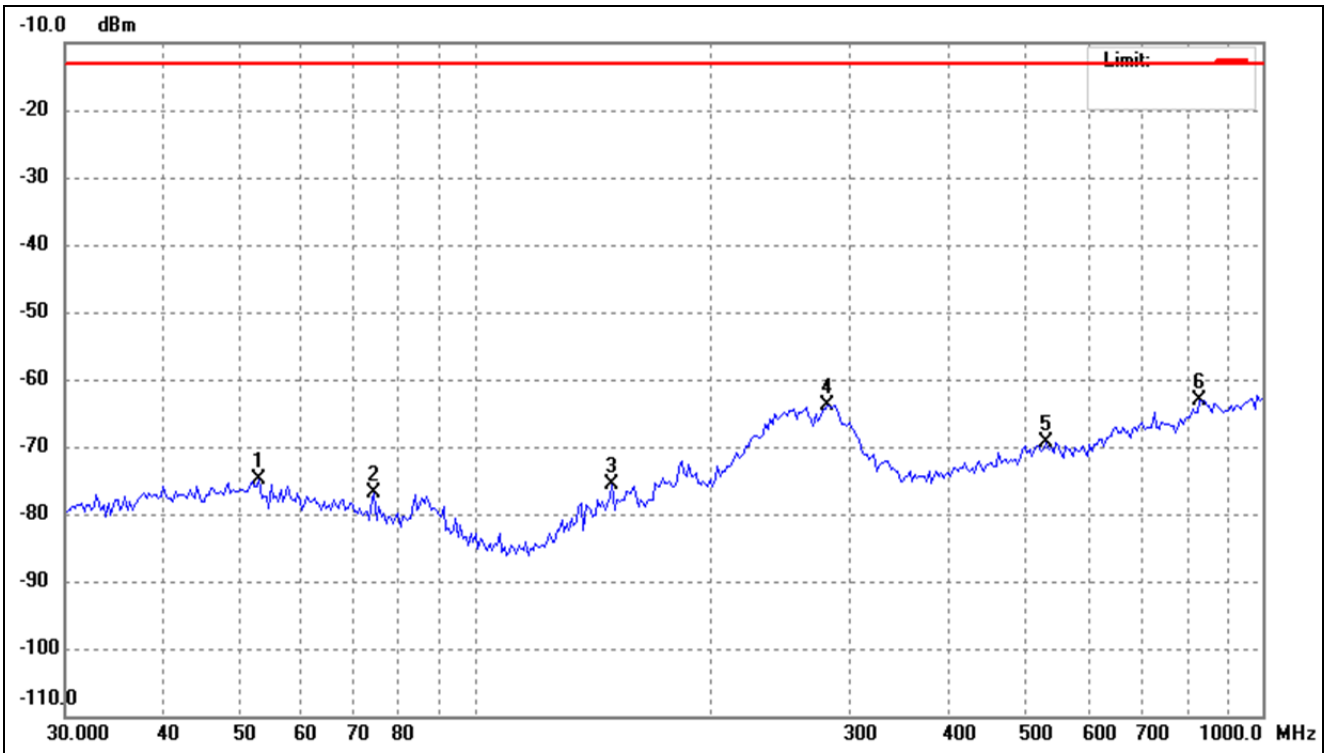

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	53.0056	-78.11	3.13	-74.98	-13.00	-61.98	ERP
2	74.2696	-77.21	0.32	-76.89	-13.00	-63.89	ERP
3	148.9175	-76.31	0.75	-75.56	-13.00	-62.56	ERP
4	280.2936	-69.83	6.03	-63.80	-13.00	-50.80	ERP
5	531.2910	-76.95	7.57	-69.38	-13.00	-56.38	ERP
6	833.0127	-76.43	13.37	-63.06	-13.00	-50.06	ERP

Test Mode	FDD_LTE Band 13	Polarity:	Vertical
-----------	-----------------	-----------	----------

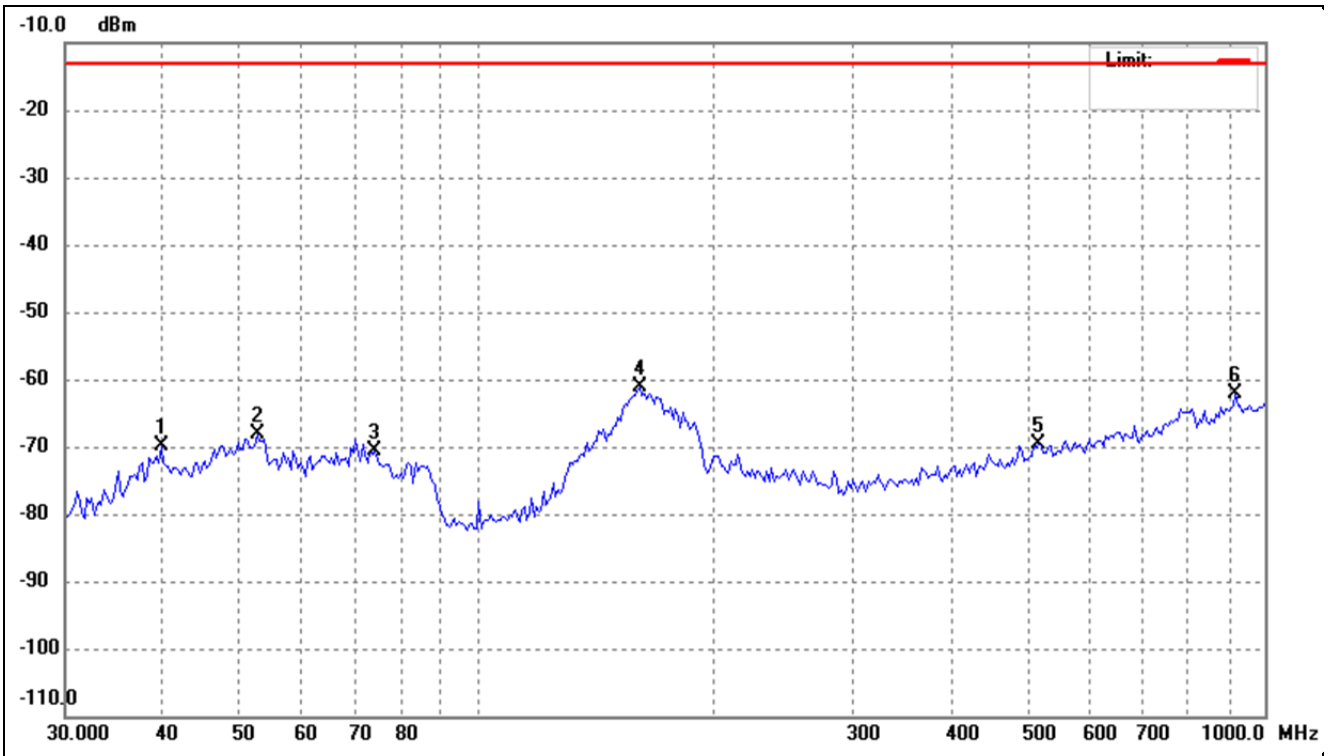

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	39.7371	-72.42	2.53	-69.89	-13.00	-56.89	ERP
2	52.6345	-71.49	3.45	-68.04	-13.00	-55.04	ERP
3	74.2696	-72.45	1.94	-70.51	-13.00	-57.51	ERP
4	160.8852	-68.89	7.77	-61.12	-13.00	-48.12	ERP
5	516.5651	-77.17	7.44	-69.73	-13.00	-56.73	ERP
6	919.1315	-74.56	12.39	-62.17	-13.00	-49.17	ERP


2687.5MHz (20MHz, QPSK)

Test Mode	FDD_LTE Band 41	Polarity:	Horizontal
-----------	-----------------	-----------	------------



No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	51.5365	-77.97	3.31	-74.66	-25.00	-49.66	ERP
2	74.2696	-76.92	0.32	-76.60	-25.00	-51.60	ERP
3	148.9175	-74.32	0.75	-73.57	-25.00	-48.57	ERP
4	284.2607	-68.80	5.70	-63.10	-25.00	-38.10	ERP
5	554.1708	-76.90	7.78	-69.12	-25.00	-44.12	ERP
6	925.6132	-75.65	13.47	-62.18	-25.00	-37.18	ERP


Test Mode	FDD_LTE Band 41	Polarity:	Vertical
-----------	-----------------	-----------	----------

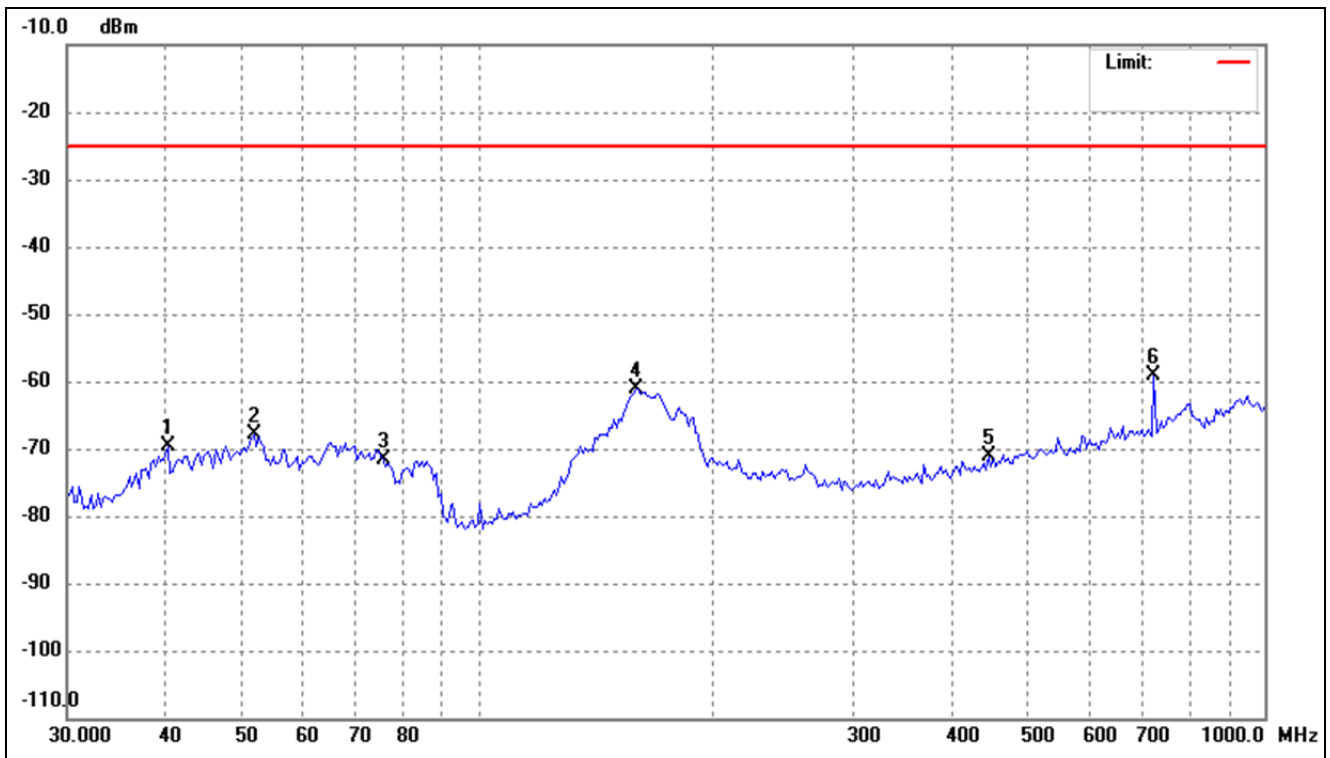

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	40.2995	-72.09	2.58	-69.51	-25.00	-44.51	ERP
2	51.8999	-71.37	3.46	-67.91	-25.00	-42.91	ERP
3	75.8520	-73.21	1.52	-71.69	-25.00	-46.69	ERP
4	158.6399	-68.46	7.39	-61.07	-25.00	-36.07	ERP
5	445.6932	-77.23	6.19	-71.04	-25.00	-46.04	ERP
6	723.7930	-69.78	10.70	-59.08	-25.00	-34.08	ERP


1722.5MHz (15MHz, QPSK)

Test Mode	FDD_LTE Band 66	Polarity:	Horizontal
-----------	-----------------	-----------	------------

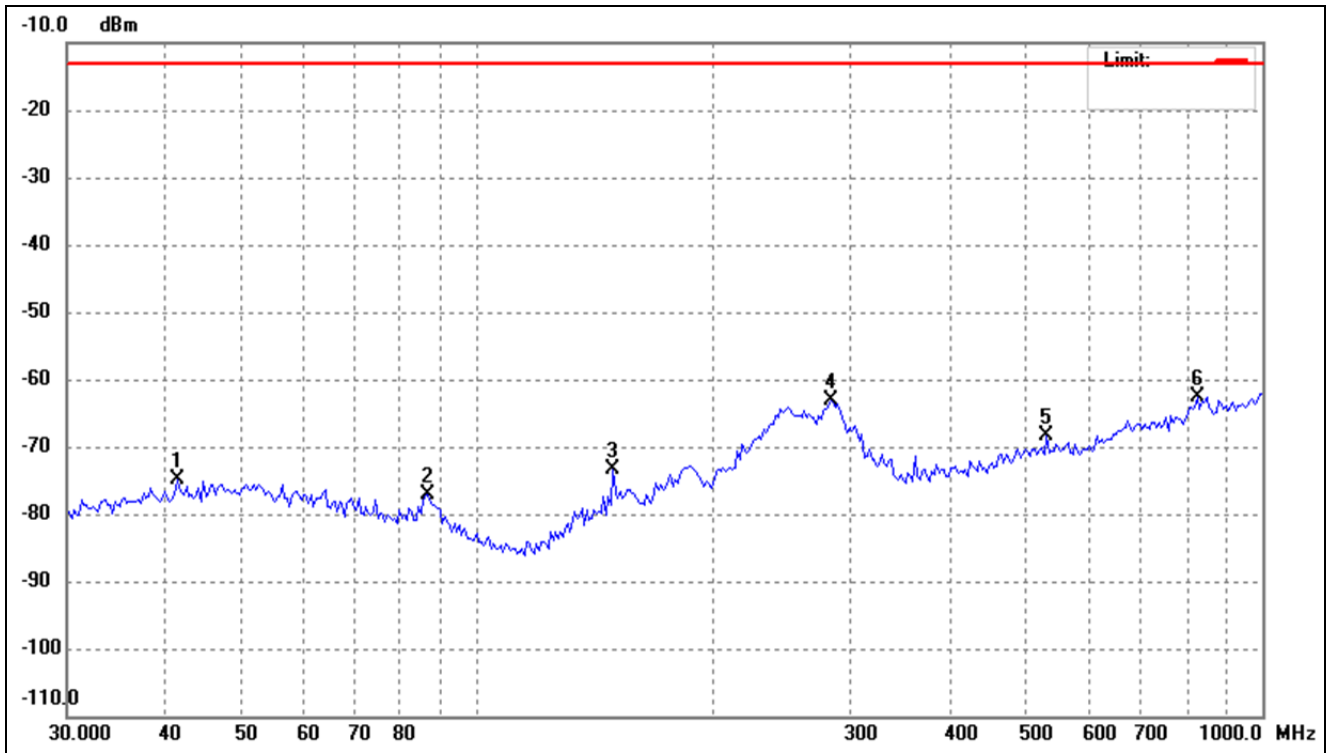

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	41.4483	-77.54	2.69	-74.85	-13.00	-61.85	ERP
2	86.6867	-75.20	-1.86	-77.06	-13.00	-64.06	ERP
3	148.9175	-74.24	0.75	-73.49	-13.00	-60.49	ERP
4	282.2702	-68.91	5.87	-63.04	-13.00	-50.04	ERP
5	531.2910	-75.83	7.57	-68.26	-13.00	-55.26	ERP
6	827.1795	-75.85	13.24	-62.61	-13.00	-49.61	ERP

Test Mode	FDD_LTE Band 66	Polarity:	Vertical
-----------	-----------------	-----------	----------

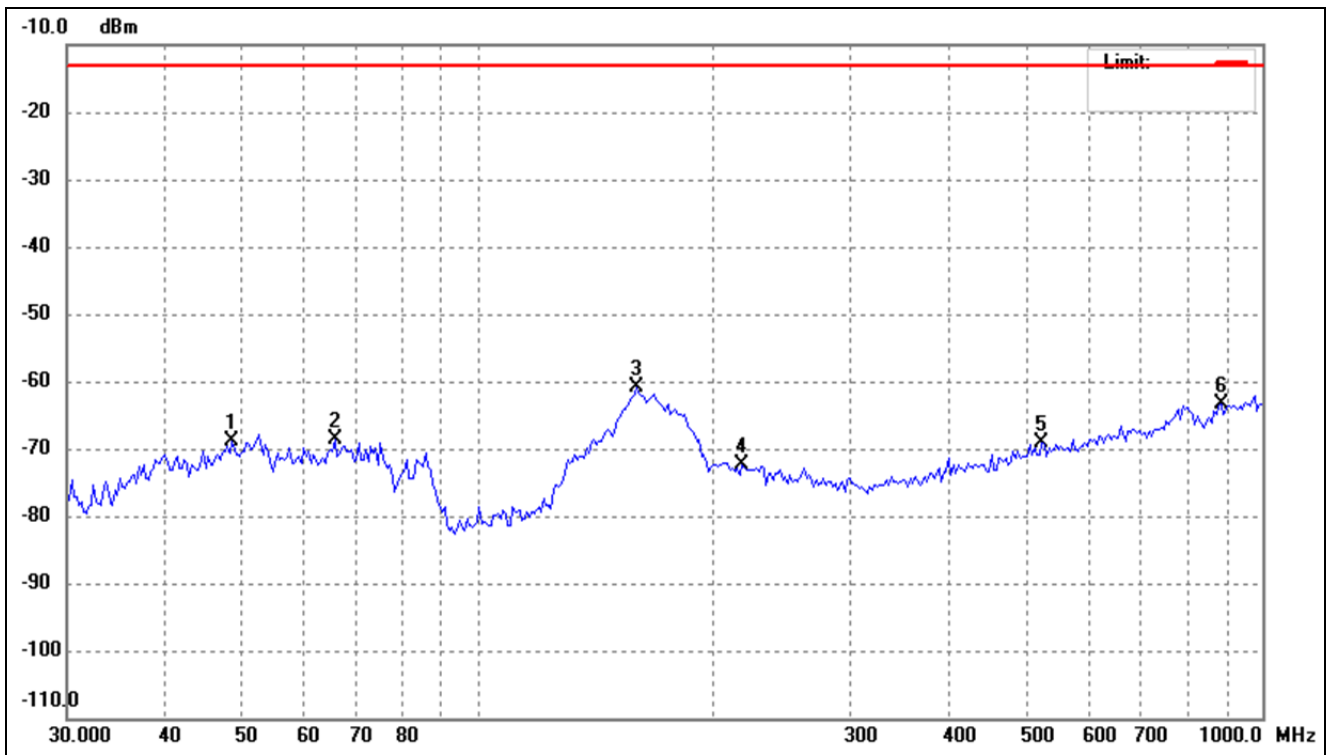

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	48.7191	-72.33	3.38	-68.95	-13.00	-55.95	ERP
2	65.9067	-71.74	3.17	-68.57	-13.00	-55.57	ERP
3	159.7586	-68.82	7.83	-60.99	-13.00	-47.99	ERP
4	217.6437	-73.52	1.11	-72.41	-13.00	-59.41	ERP
5	523.8763	-76.73	7.57	-69.16	-13.00	-56.16	ERP
6	887.3978	-75.49	12.15	-63.34	-13.00	-50.34	ERP

Note: Margin= (Reading+ Correct)- Limit

➤ Spurious Emissions Above 1GHz

For FDD_LTE Band 2 Mode

5MHz, QPSK

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1852.5MHz)						
3705.00	-46.54	10.64	-35.9	-13	-22.9	H
5557.50	-53.61	13.54	-40.07	-13	-27.07	H
3705.00	-46.32	10.64	-35.68	-13	-22.68	V
5557.50	-57.52	13.54	-43.98	-13	-30.98	V
Middle Channel (1880.0MHz)						
3760.00	-49.67	10.64	-39.03	-13	-26.03	H
5640.00	-53.55	13.54	-40.01	-13	-27.01	H
3760.00	-46.96	10.64	-36.32	-13	-23.32	V
5640.00	-57.77	13.54	-44.23	-13	-31.23	V
High Channel (1907.5MHz)						
3815.00	-48.94	10.74	-38.2	-13	-25.20	H
5722.50	-54.24	13.71	-40.53	-13	-27.53	H
3815.00	-49.46	10.74	-38.72	-13	-25.72	V
5722.50	-57.22	13.71	-43.51	-13	-30.51	V

For FDD_LTE Band 4 Mode

5MHz, QPSK

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1712.5MHz)						
3425.00	-46.7	8.65	-38.05	-13	-25.05	H
5137.50	-52.33	12.03	-40.3	-13	-27.3	H
3425.00	-47.53	8.65	-38.88	-13	-25.88	V
5137.50	-55.76	12.03	-43.73	-13	-30.73	V
Middle Channel (1732.5MHz)						
3465.00	-49.38	8.91	-40.47	-13	-27.47	H
5197.50	-54.36	12.29	-42.07	-13	-29.07	H
3465.00	-48.15	8.91	-39.24	-13	-26.24	V
5197.50	-54.37	12.29	-42.08	-13	-29.08	V
High Channel (1752.5MHz)						
3505.00	-47.52	9.11	-38.41	-13	-25.41	H
5257.50	-55.38	12.56	-42.82	-13	-29.82	H
3505.00	-47.04	9.11	-37.93	-13	-24.93	V
5257.50	-55.79	12.56	-43.23	-13	-30.23	V

For FDD_LTE Band 5 Mode

1.4MHz, QPSK

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (824.7MHz)						
1649.40	-47.75	4.94	-42.81	-13	-29.81	H
2474.10	-52.04	8.46	-43.58	-13	-30.58	H
1649.40	-49.27	4.94	-44.33	-13	-31.33	V
2474.10	-55.47	8.46	-47.01	-13	-34.01	V
Middle Channel (836.5MHz)						
1673.00	-49.6	5.11	-44.49	-13	-31.49	H
2509.50	-52.75	8.54	-44.21	-13	-31.21	H
1673.00	-47.78	5.11	-42.67	-13	-29.67	V
2509.50	-56.12	8.54	-47.58	-13	-34.58	V
High Channel (848.3MHz)						
1696.60	-47.4	5.25	-42.15	-13	-29.15	H
2544.90	-54.71	8.57	-46.14	-13	-33.14	H
1696.60	-46.07	5.25	-40.82	-13	-27.82	V
2544.90	-56.89	8.57	-48.32	-13	-35.32	V

For FDD_LTE Band 7 Mode

5MHz, QPSK

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (2502.5MHz)						
5005.00	-46.45	11.66	-34.79	-25	-9.79	H
7507.50	-55.55	15.09	-40.46	-25	-15.46	H
5005.00	-47.19	11.66	-35.53	-25	-10.53	V
7507.50	-56.63	15.09	-41.54	-25	-16.54	V
Middle Channel (2535MHz)						
5070.00	-49.16	11.78	-37.38	-25	-12.38	H
7605.00	-54.31	15.21	-39.1	-25	-14.10	H
5070.00	-48.88	11.78	-37.1	-25	-12.10	V
7605.00	-57.56	15.21	-42.35	-25	-17.35	V
High Channel (2567.5MHz)						
5135.00	-46.11	11.89	-34.22	-25	-9.22	H
7702.50	-54.01	15.32	-38.69	-25	-13.69	H
5135.00	-49.47	11.89	-37.58	-25	-12.58	V
7702.50	-57.89	15.32	-42.57	-25	-17.57	V

For FDD_LTE Band 12 Mode

1.4MHz, QPSK

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (669.7MHz)						
1339.40	-48.31	4.01	-44.3	-13	-31.3	H
2009.10	-52.87	7.32	-45.55	-13	-32.55	H
1339.40	-48.38	4.01	-44.37	-13	-31.37	V
2009.10	-54.84	7.32	-47.52	-13	-34.52	V
Middle Channel (707.5MHz)						
1415.00	-49.08	4.11	-44.97	-13	-31.97	H
2122.50	-52.52	7.54	-44.98	-13	-31.98	H
1415.00	-47.73	4.11	-43.62	-13	-30.62	V
2122.50	-55.54	7.54	-48	-13	-35	V
High Channel (715.3MHz)						
1430.6	-48.98	4.35	-44.63	-13	-31.63	H
2145.9	-55.52	7.88	-47.64	-13	-34.64	H
1430.6	-48.25	4.35	-43.9	-13	-30.9	V
2145.9	-57.44	7.88	-49.56	-13	-36.56	V

For FDD_LTE Band 13 Mode

5MHz, QPSK

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (779.5MHz)						
1559.00	-46.14	4.52	-41.62	-13	-28.62	H
2338.50	-53.27	7.96	-45.31	-13	-32.31	H
1559.00	-49.83	4.52	-45.31	-13	-32.31	V
2338.5	-57.69	7.96	-49.73	-13	-36.73	V
Middle Channel (782.0MHz)						
1564.00	-46.29	4.68	-41.61	-13	-28.61	H
2346.00	-53.43	8.02	-45.41	-13	-32.41	H
1564.00	-47.82	4.68	-43.14	-13	-30.14	V
2346.00	-55.31	8.05	-47.26	-13	-34.26	V
High Channel (784.5MHz)						
1569.00	-47.92	4.85	-43.07	-13	-30.07	H
2353.5	-52.85	8.26	-44.59	-13	-31.59	H
1569.00	-48.7	4.85	-43.85	-13	-30.85	V
2353.5	-57.27	8.26	-49.01	-13	-36.01	V

For FDD_LTE Band 41Mode

5MHz, QPSK

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (2498.5MHz)						
5145.00	-46.14	11.89	-34.25	-25	-9.25	H
7717.50	-53.16	15.22	-37.94	-25	-12.94	H
5145.00	-49.65	11.89	-37.76	-25	-12.76	V
7717.50	-54.74	15.22	-39.52	-25	-14.52	V
Middle Channel (2593.0MHz)						
5190.00	-49.82	12.32	-37.5	-25	-12.5	H
7785.00	-54.71	15.98	-38.73	-25	-13.73	H
5190.00	-46.53	12.62	-33.91	-25	-8.91	V
7785.00	-57.13	15.98	-41.15	-25	-16.15	V
High Channel (2687.5MHz)						
5235.00	-47.72	12.84	-34.88	-25	-9.88	H
7852.50	-54.64	16.11	-38.53	-25	-13.53	H
5235.00	-49.01	12.84	-36.17	-25	-11.17	V
7852.50	-54.06	16.11	-37.95	-25	-12.95	V

For FDD_LTE Band 66 Mode

1.4MHz, QPSK

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1710.7MHz)						
3420.77	-46.97	9.22	-37.75	-13	-24.75	H
5131.47	-53.41	11.35	-42.06	-13	-29.06	H
3420.77	-46.36	9.22	-37.14	-13	-24.14	V
5131.47	-55.03	11.35	-43.68	-13	-30.68	V
Middle Channel (1745MHz)						
3490.00	-49.46	9.53	-39.93	-13	-26.93	H
5235.00	-53.95	11.98	-41.97	-13	-28.97	H
3490.00	-46.24	9.53	-36.71	-13	-23.71	V
5235.00	-54.29	11.98	-42.31	-13	-29.31	V
High Channel (1779.3MHz)						
3558.60	-49.58	9.82	-39.76	-13	-26.76	H
5337.90	-55.56	12.35	-43.21	-13	-30.21	H
3558.60	-49.03	9.82	-39.21	-13	-26.21	V
5337.90	-57.48	12.35	-45.13	-13	-32.13	V

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Frequency Stability

8.1 Standard Applicable

According to §22.355, §24.235, §27.54 the limit is 2.5ppm.

8.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

8.3 Summary of Test Results/Plots

Please refer to Appendix F: Frequency Stability

Test result: Pass

APPENDIX PHOTOGRAPHS

Please refer to "ANNEX"

**** END OF REPORT ****