

SAR TEST REPORT

Reference No. : WTD25D06165706W011
FCC ID : 2AEPIBLACKZ2
Applicant : COLOMBIANA DE COMERCIO S.A.
Address : Car. 43E No 8-71, Medellin, Colombia
Manufacturer : Sichuan Koobee Communication Equipment Co., Ltd.
Address : 3 Floor, Building 2, 69 Gangyuan Road West Section, Lingang
Development Zone, Yibin City, Sichuan Province, China
Product : Smart Phone
Model(s) : Black Z2
Brand Name : Kalley
Standards : FCC 47 CFR Part2(2.1093)
ANSI/IEEE C95.1-2006
IEC/IEEE 62209-1528:2020
& Published RF Exposure KDB Procedures
Date of Receipt sample : 2025-06-25
Date of Test : 2025-07-12 to 2025-07-17
Date of Issue : 2025-08-13
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:
Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China
Tel: +86-769-2267 6998
Fax: +86-769-2267 6828

Compiled by:

Frank Yin

Frank Yin / Project Engineer

Approved by:


Deval Qin / Designated Reviewer

2 Contents

	Page
1 COVER PAGE	1
2 CONTENTS	2
3 REVISION HISTORY	4
4 GENERAL INFORMATION	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 TEST FACILITY	8
5 SUMMARY OF TEST RESULTS	9
6 EQUIPMENT USED DURING TEST	10
6.1 EQUIPMENT LIST	10
7 SAR INTRODUCTION	11
7.1 INTRODUCTION	11
7.2 SAR DEFINITION	11
8 SAR MEASUREMENT SETUP	12
9 EXPOSURE LIMIT	21
10 SYSTEM AND LIQUID VALIDATION	22
10.1 SYSTEM VALIDATION	22
10.2 LIQUID VALIDATION	25
11 TYPE A MEASUREMENT UNCERTAINTY	34
12 OUTPUT POWER VERIFICATION	37
12.1 TEST CONDITION	37
12.2 TEST PROCEDURES	37
12.3 TEST RESULT	38
13 EXPOSURE CONDITIONS CONSIDERATION	165
13.1 EUT ANTENNA LOCATION	165
13.2 TEST POSITION CONSIDERATION	165
13.3 RF EXPOSURE	166
14 SAR TEST RESULTS	168
14.1 TEST CONDITION	168
14.2 GENERALLY TEST PROCEDURES	168
14.3 SAR SUMMARY TEST RESULT	169
15 SAR MEASUREMENT REFERENCE	199
15.1 REFERENCES	199
15.2 MAXIMUM SAR MEASUREMENT PLOTS	200
16 CALIBRATION REPORTS-PROBE AND DIPOLE	229
17 SAR SYSTEM PHOTOS	319

18 **SETUP PHOTOS**.....320

19 **EUT PHOTOS**322

3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD25D06165706W011	2025-06-25	2025-07-12 to 2025-07-17	2025-08-13	Original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	Smart Phone
Model(s):	Black Z2
Model Description:	The product has two configurations, single card and dual card, other parts are the same. The EUT is dual card in this report.
Test Sample No.:	1-1/1
Bluetooth Version:	V5.0
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/ n HT40 5G-802.11a/ n(HT20/40)/ac(VHT20/40/80)
GSM Band(s):	GSM 850/1900MHz
GPRS/EGPRS Class:	12
WCDMA Band(s):	FDD Band II/IV/V
LTE Band(s):	FDD Band 2/4/5/7/12/13/41/66
GPS:	Support
Hardware Version:	KE34NM_01
Software Version:	Kalley_BLACK_Z2_V02_20250705
Note:	This EUT has two SIM card slots, and use same one RF module. We found that RF parameters are the same, when we insert the card 1 and card 2. So we usually performed the test under main card slot 1.

4.2 Details of E.U.T.

Operation Frequency:	BLE: 2402~2480MHz Bluetooth: 2402~2480MHz 2.4G Wi-Fi: 802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz 5G Wi-Fi: 802.11a/n(HT20)/ac (VHT20): U-NII-1: 5180-5240MHz, U-NII-2A: 5260-5320MHz(DFS), U-NII-2C: 5500-5700MHz(DFS), U-NII-3: 5745-5825MHz 802.11n(HT40)/ac (VHT40): U-NII-1: 5190-5230MHz, U-NII-2A: 5270-5310MHz(DFS), U-NII-2C: 5510-5670MHz(DFS), U-NII-3: 5755-5795MHz 802.11ac (VHT80): U-NII-1: 5210MHz, U-NII-2A: 5290MHz(DFS), U-NII-2C: 5530-5610MHz(DFS), U-NII-3: 5775MHz NFC: 13.56MHz GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
----------------------	---

	WCDMA Band II: 1850~1910MHz
	WCDMA Band IV: 1710~1755MHz
	WCDMA Band V: 824~849MHz
	LTE Band 2: 1850~1910MHz
	LTE Band 4: 1710~1755MHz
	LTE Band 5: 824~849MHz
	LTE Band 7: 2500~2570MHz
	LTE Band 12: 699~716MHz
	LTE Band 13: 777~787MHz
	LTE Band 41: 2496~2690MHz
	LTE Band 66: 1710~1780MHz
Max. RF output power:	BLE 1M: -1.82dBm, BLE 2M: -2.65dBm
	Bluetooth: 12.48dBm
	2.4G Wi-Fi: 16.52dBm
	5G Wi-Fi:
	U-NII-1: 10.73dBm
	U-NII-2A: 12.21dBm
	U-NII-2C: 13.22dBm
	U-NII-3: 14.26dBm
	NFC: -37.63dBm EIRP
	GSM 850: 32.70dBm
	GSM 1900: 30.30dBm
	WCDMA Band II: 22.75dBm
	WCDMA Band IV: 22.13dBm
	WCDMA Band V: 22.78dBm
	LTE Band 2: 22.51dBm
	LTE Band 4: 22.98dBm
	LTE Band 5: 23.49dBm
	LTE Band 7: 22.16dBm
	LTE Band 12: 23.47dBm
	LTE Band 13: 23.44dBm
	LTE Band 41: 22.03dBm
	LTE Band 66: 23.22dBm
Max.SAR:	0.765W/kg 1g Head Tissue
	1.082W/kg 1g Body Tissue
	1.069W/kg 1g Hotspot
Max Simultaneous SAR	1.405W/kg
Type of Modulation:	BLE: GFSK
	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
	2.4G Wi-Fi: DSSS, OFDM
	5G Wi-Fi: OFDM
	NFC: ASK
	GSM,GPRS: GMSK
	EDGE: GMSK, 8PSK
	WCDMA: BPSK
	LTE: QPSK, 16QAM
Antenna installation	BLE/Bluetooth/2.4G Wi-Fi: Internal antenna
	5G Wi-Fi: Internal antenna
	NFC: Internal antenna
	GSM/WCDMA/LTE: Internal antenna

Antenna Gain: BLE/Bluetooth/2.4G Wi-Fi: 1.89dBi
5G Wi-Fi: 3.08dBi
GSM 850: -0.68dBi
GSM 1900: -1.82dBi
WCDMA Band II: -1.82dBi
WCDMA Band IV: -1.58dBi
WCDMA Band V: -0.68dBi
LTE Band 2: -1.82dBi
LTE Band 4: -1.58dBi
LTE Band 5: -0.68dBi
LTE Band 7: -0.47dBi
LTE Band 12: -3.15dBi
LTE Band 13: -3.15dBi
LTE Band 41: -0.47dBi
LTE Band 66: -1.58dBi

Note:

#: The antenna gain is provided by the applicant, and the applicant should be responsible for its authenticity, WALTEK lab has not verified the authenticity of its information.

Ratings: Battery: DC 3.89V, 5900mAh, 22.951Wh
DC 5.0V=== 3.0A charging from adapter

Adapter: Model No.: ES166A-US-1200167
Input: 100-240V~, 50/60Hz, 0.6A
Output: 5.0V===3.0A, 15.0W; 9.0V===2.22A, 20.0W;
12.0V===1.67A, 20.0W
(PPS): 5.0-11.0V===1.8A (20.0W MAX)
Manufacturer: Shenzhen East Sun Electronics Co., Ltd.

4.3 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

5 Summary of Test Results

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Head SAR	Body-worn (10mm Gap)	Hotspot (10mm Gap)	SAR _{1g} Limit (W/kg)
	Maximum SAR _{1g} (W/kg)	Maximum SAR _{1g} (W/kg)	Maximum SAR _{1g} (W/kg)	
GSM	0.552	0.539	0.463	1.6
WCDMA	0.523	0.815	0.455	1.6
LTE	0.607	1.082	1.069	1.6
WLAN 2.4GHz	0.336	0.193	0.197	1.6
Bluetooth	0.281	0.167	0.169	1.6
WLAN 5GHz	0.765	0.323	0.384	1.6
Simultaneous Transmission	1.372	1.405	1.392	1.6

Remark:

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and IEEE Std C95.1: 2019, and had been tested in accordance with the measurement methods and procedure specified in KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02.

6 Equipment Used during Test

6.1 Equipment List

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Calibration Due
6 AXIS ROBOT	KUKA	KR6 R900 SIXX	502635	N/A	N/A
SATIMO Test Software	MVG	OPENSAR	OPENSAR V_4_02_27	N/A	N/A
PHANTOM TABLE	MVG	N/A	SAR_1215_01	N/A	N/A
SAM PHANTOM	MVG	SAM118	SN 11/15 SAM118	N/A	N/A
MultiMeter	Keithley	MiltiMeter 2000	4073942	2025-02-25	2026-02-24
S-Parameter Network Analyzer	Agilent	8753E	JP38160684	2024-09-15	2025-09-14
Universal Radio Communication Tester	ROHDE&SCHWARZ	CMU200	114798	2025-07-04	2026-07-03
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	127818	2025-04-19	2026-04-18
E-Field Probe	MVG	SSE2	2523-EPGO-417	2024-07-29	2025-07-28
DIPOLE 750	MVG	SID750	SN 09/15 DIP 0G750-357	2023-08-08	2026-08-07
DIPOLE 835	MVG	SID835	SN 09/15 DIP 0G835-358	2023-08-08	2026-08-07
DIPOLE 1800	MVG	SID1800	SN 09/15 DIP 1G800-360	2023-08-08	2026-08-07
DIPOLE 1900	MVG	SID1900	SN 09/15 DIP 1G900-361	2023-08-08	2026-08-07
DIPOLE 2450	MVG	SID2450	SN 09/15 DIP 2G450-363	2023-08-08	2026-08-07
DIPOLE 2600	MVG	SID2600	SN 16/15 DIP 2G600-376	2023-08-08	2026-08-07
Limesar Dielectric Probe	MVG	SCLMP	SN 11/15 OCPG 69	2025-02-24	2026-02-23
Power Amplifier	BONN	BLWA 0830 -160/100/40D	128740	2025-07-04	2026-07-03
Signal Generator	R&S	SMB100A	105942	2025-07-04	2026-07-03
Power Meter	R&S	NRP2	102031	2025-07-04	2026-07-03
Power Meter	R&S	NRVD	102284	2025-07-04	2026-07-03
USB Wideband Power Sensor	Malaysia Keysight	U2021XA	MY54340009	2025-07-04	2026-07-03
USB Wideband Power Sensor	Malaysia Keysight	U2021XA	MY54340010	2025-07-04	2026-07-03

7 SAR Introduction

7.1 Introduction

This measurement report shows compliance of the EUT with ANSI/IEEE C95.1-2006 and FCC 47 CFR Part2 (2.1093). The test procedures, as described in IEC/IEEE 62209-1528: 2020 Standard for Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices –Part 1528: Human models, instrumentation, and procedures(Frequency range of 4 MHz to 10 GHz)

7.2 SAR Definition

- ✧ SAR : Specific Absorption Rate
- ✧ The SAR characterize the absorption of energy by a quantity of tissue
- ✧ This is related to a increase of the temperature of these tissues during a time period.

$$DAS = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

$$DAS = \frac{\sigma E^2}{\rho}$$

$$DAS = c_h \left. \frac{dT}{dt} \right|_{t=0}$$

SAR definition

$$SAR = \frac{\sigma E^2}{\rho}$$

- ✧ SAR : Specific Absorption Rate

- σ : Liquid conductivity

$$\circ \epsilon_r = \epsilon' - j\epsilon'' \text{ (complex permittivity of liquid)}$$

$$\circ \sigma = \frac{\epsilon'' \omega}{\epsilon_0}$$

- ρ : Liquid density


$$\circ \rho = 1000 \text{ g/L} = 1000 \text{ Kg/m}^3$$

where:

σ = conductivity of the tissue (S/m)
 ρ = mass density of the tissue (kg/m³)
 E = rms electric field strength (V/m)

8 SAR Measurement Setup

SAR bench sub-systems

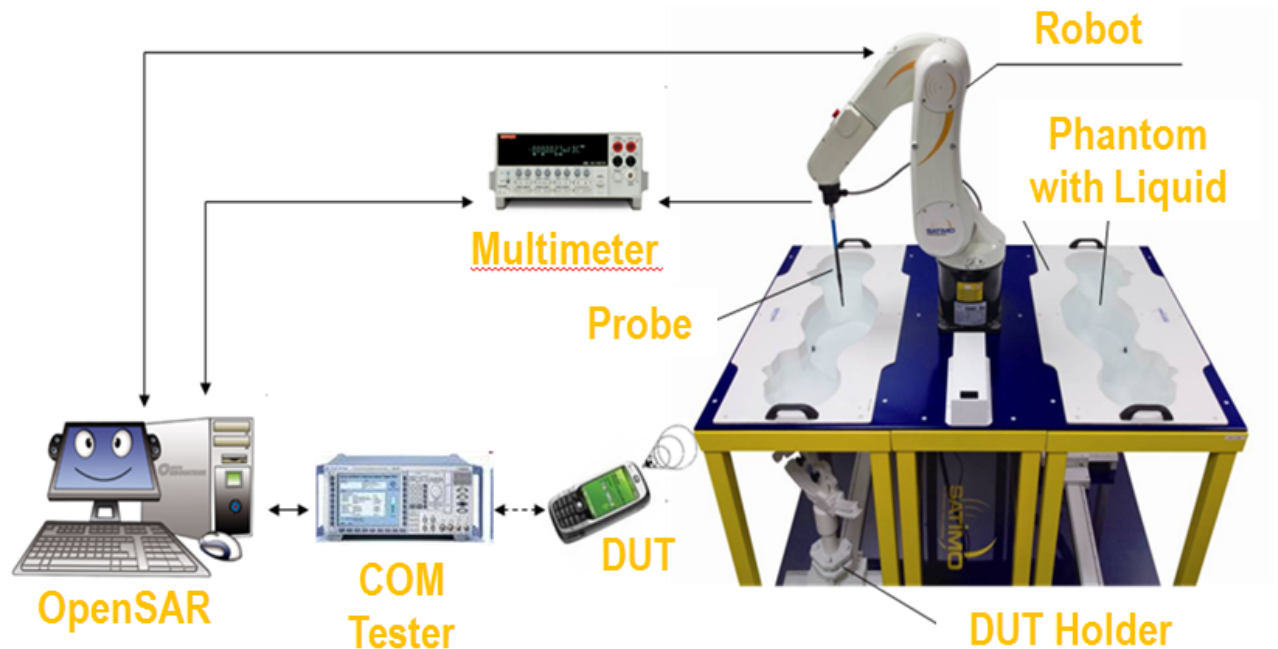




Scanning System (robot)

- ✎ It must be able to scan all the volume of the phantom to evaluate the tridimensional distribution of SAR.
- ✎ Must be able to set the probe orthogonal of the surface of the phantom ($\pm 30^\circ$).
- ✎ Detects stresses on the probe and stop itself if necessary to keep the integrity of the probe.



SAM Phantom (Specific Anthropomorphic Mannequin)

- ✦ The probe scanning of the E-Field is done in the 2 half of the normalized head.
- ✦ The normalized shape of the phantom corresponds to the dimensions of 90% of an adult head size.
- ✦ The materials for the phantom should not affect the radiation of the device under test (DUT)
 - Permittivity < 5
- ✦ The head is filled with tissue simulating liquid.
- ✦ The hand holding the DUT does not have to be modeled.

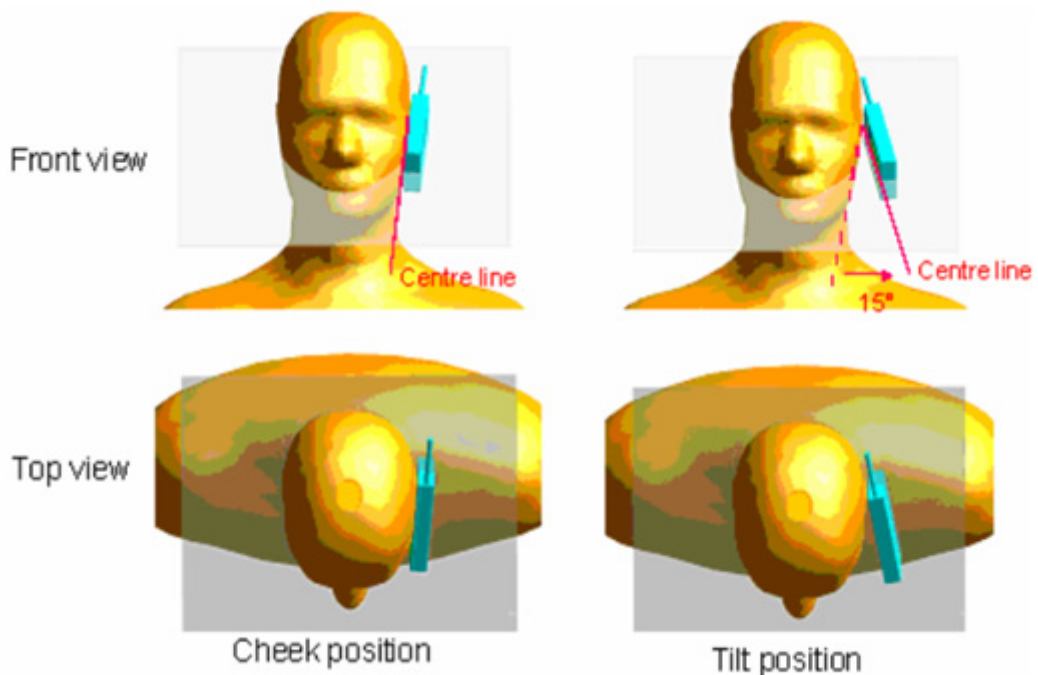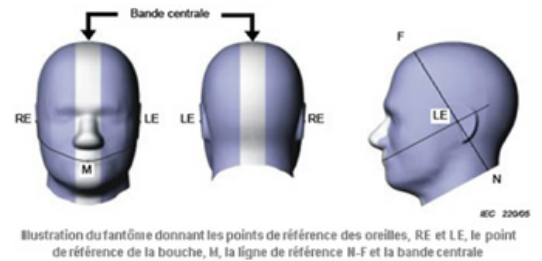

The OPENSAR system for performing compliance tests consist of the following items:

1. A standard high precision 6-axis robot (KUKA) with controller and software.
2. KUKA Control Panel (KCP).
3. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
4. The functions of the PC plug-in card are to perform the time critical task such as signal filtering, surveillance of the robot operation fast movement interrupts.
5. A computer operating Windows 7.
6. OPENSAR software.
7. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
8. The SAM phantom enabling testing left-hand right-hand and body usage.
9. The Position device for handheld EUT.
10. Tissue simulating liquid mixed according to the given recipes (see Application Note).
11. System validation dipoles to validate the proper functioning of the system.

Data Evaluation

The OPENSAR software automatically executes the following procedure to calculate the field units from the microvolt readings at the probe connector. The parameters used in the valuation are stored in the configuration modules of the software:

Probe Parameters	- Sensitivity	Norm _i
	- Conversion factor	ConvFi
	- Diode compression point Dcpi	
Device Parameter	- Frequency	f
	- Crest factor	cf
Media Parametrs	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can either be found in the component documents or be imported into the software from the configuration files issued for the OPENSAR components.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Where V_i = Compensated signal of channel i ($i = x, y, z$)

U_i = Input signal of channel i ($i = x, y, z$)

cf = Crest factor of exciting field (DASY parameter)

dcp_i = Diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

Where V_i = Compensated signal of channel i ($i = x, y, z$)

Norm_i = Sensor sensitivity of channel i ($i = x, y, z$)
μV/(V/m)² for E0field Probes

ConvF = Sensitivity enhancement in solution

a_{ij} = Sensor sensitivity factors for H-field probes

$$\begin{aligned}
 f &= \text{Carrier frequency (GHz)} \\
 E_i &= \text{Electric field strength of channel } i \text{ in V/m} \\
 H_i &= \text{Magnetic field strength of channel } i \text{ in A/m}
 \end{aligned}$$

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

$$\begin{aligned}
 \text{where } SAR &= \text{local specific absorption rate in mW/g} \\
 E_{\text{tot}} &= \text{total field strength in V/m} \\
 \sigma &= \text{conductivity in [mho/m] or [siemens/m]} \\
 \rho &= \text{equivalent tissue density in g/cm}^3
 \end{aligned}$$

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{\text{pwe}} = \frac{E_{\text{tot}}^2}{3770} \quad \text{or} \quad P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

$$\begin{aligned}
 \text{where } P_{\text{pwe}} &= \text{Equivalent power density of a plane wave in mW/cm}^2 \\
 E_{\text{tot}} &= \text{total electric field strength in V/m} \\
 H_{\text{tot}} &= \text{total magnetic field strength in A/m}
 \end{aligned}$$

SAR Evaluation – Peak Spatial - Average

The procedure for assessing the peak spatial-average SAR value consists of the following steps

- **Power Reference Measurement**

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

- **Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in OPENSAR software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, grid was at to 15 mm by 15 mm and can be edited by a user.

- **Zoom Scan**

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures 5 x 5 x 7 points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly (The default number inserted is 1).

- **Power Drift measurement**

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have OPENSAR software stop the measurements if this limit is exceeded.

SAR Evaluation – Peak SAR

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528 standard. It can be conducted for 1 g and 10 g. The OPENSAR system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maximum searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. They are used in the Cube Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the fourth order least square polynomial method for extrapolation. For a grid using 5x5x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1 g and 10 g cubes.

Definition of Reference Points

Ear Reference Point

Figure 6.2 shows the front, back and side views of the SAM Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 6.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].

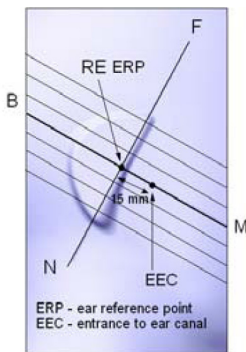


Figure 6.1 Close-up side view of ERP's



Figure 6.2 Front, back and side view of SAM

Device Reference Points

Two imaginary lines on the device need to be established: the vertical centerline and the horizontal line. The test device is placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Fig. 6.3). The “test device reference point” is then located at the same level as the center of the ear reference point. The test device is positioned so that the “vertical centerline” is bisecting the front surface of the device at its top and bottom edges, positioning the “ear reference point” on the outer surface of both the left and right head phantoms on the ear reference point [5].

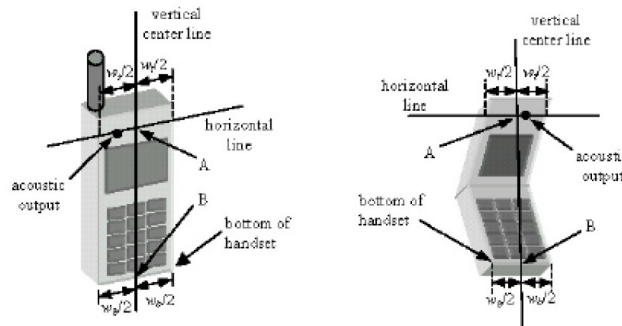


Figure 6.3 Handset Vertical Center & Horizontal Line Reference Points

Test Configuration – Positioning for Cheek / Touch

1. Position the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure below), such that the plane defined by the vertical center line and the horizontal line of the device is approximately parallel to the sagittal plane of the phantom

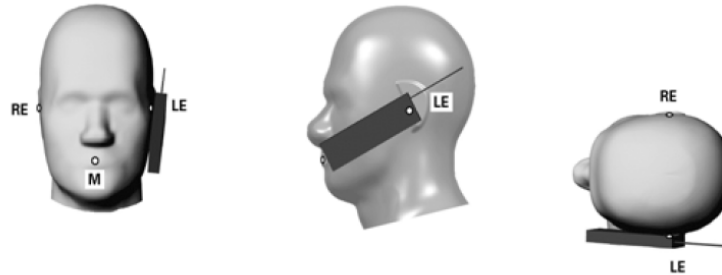


Figure 7.1 Front, Side and Top View of Cheek/Touch Position

2. Translate the device towards the phantom along the line passing through RE and LE until the device touches the ear.
3. While maintaining the device in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
4. Rotate the device around the vertical centerline until the device (horizontal line) is symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE and maintaining the device contact with the ear, rotate the device about the line NF until any point on the device is in contact with a phantom point below the ear (cheek). See Figure below.




Figure 7.2 Side view w/ relevant markings

Test Configuration – Positioning for Ear / 15° Tilt

With the test device aligned in the Cheek/Touch Position”:

1. While maintaining the orientation of the device, retract the device parallel to the reference plane far enough to enable a rotation of the device by 15 degrees.
2. Rotate the device around the horizontal line by 15 degrees.
3. While maintaining the orientation of the device, move the device parallel to the reference plane until any part of the device touches the head. (In this position, point A is located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the device shall be reduced. The tilted position is obtained when any part of the device is in contact with the ear as well as a second part of the device is in contact with the head (see Figure below).


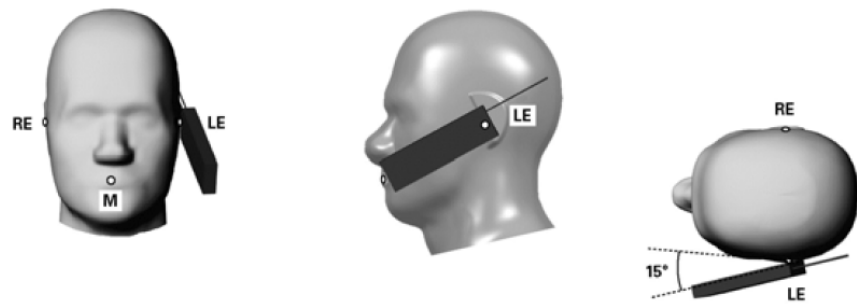


Figure 7.3 Front, Side and Top View of Ear/15° Tilt Position

Test Position – Body Configurations

Body Worn Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1.0 cm or holster surface and the flat phantom to 0 cm.

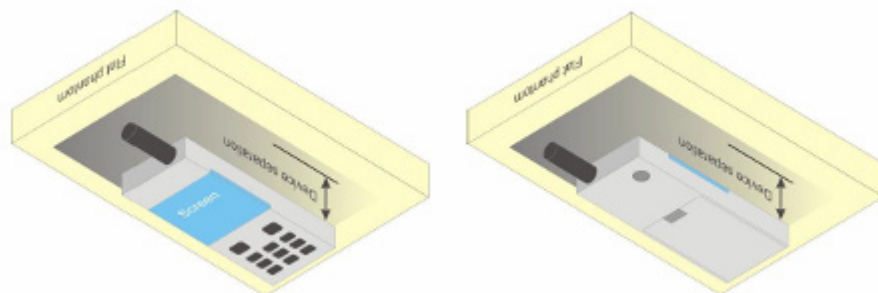

9 Exposure limit

In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and cautions statements are included in the user's manual.

Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 8.1 Human Exposure Limits

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR ¹ Brain	1.60	8.00
SPATIAL AVERAGE SAR ² Whole Body	0.08	0.40
SPATIAL PEAK SAR ³ Hands, Feet, Ankles, Wrists	4.00	20.00


¹ The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

² The Spatial Average value of the SAR averaged over the whole body.

³ The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

10 System and liquid validation

10.1 System validation

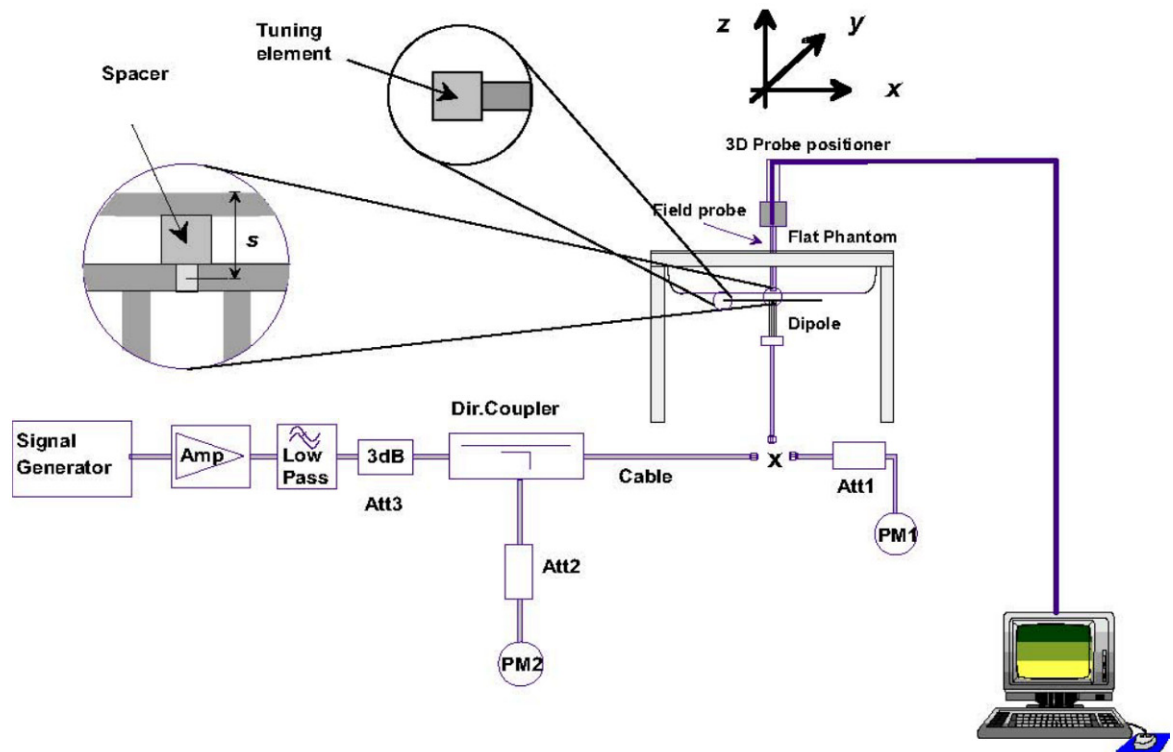

Verification Setup Block Diagram



Dipole Antenna Setup Photo

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 30 dBm (1000 mW) before dipole is connected.

Numerical reference SAR values (W/kg) for reference dipole and flat phantom

Frequency (MHz)	1g SAR	10g SAR	Local SAR at surface(above feed-point)	Local SAR at surface(y = 2 cm offset from feedpoint)
300	3.02	2.04	4.40	2.10
450	4.92	3.28	7.20	3.20
750	8.49	5.55	12.6	4.59
835	9.56	6.22	14.1	4.90
900	10.9	6.99	16.4	5.40
1450	29.0	16.0	50.2	6.50
1800	38.4	20.1	69.5	6.80
1900	39.7	20.5	72.1	6.60
2000	41.1	21.1	74.6	6.50
2450	52.4	24.0	104	7.70
2600	55.3	24.6	113	8.29
3000	63.8	25.7	140	9.50

Table 1: system validation (1g)

Measurement Date	Frequency (MHz)	Liquid Type (head/body)	1W Target SAR1g (W/kg)	Measured SAR1g (W/kg)	1W Normalized SAR1g (W/kg)	Desired Tolerance (%)	Actual Tolerance (%)
2025-07-16	750	head	8.78	0.939	9.39	±10	6.95
2025-07-17	835	head	9.57	0.952	9.52	±10	-0.52
2025-07-12	1800	head	38.73	4.125	41.25	±10	6.51
2025-07-14	1900	head	39.51	4.110	41.10	±10	4.02
2025-07-15	2450	head	54.33	5.533	55.33	±10	1.84
2025-07-15	2600	head	56.23	5.425	54.25	±10	-3.52

Remark: 1. system check input power: 100mW.

2. Referring to IEEE 1528:2013, Section 8.2, The system check shall be performed at a test frequency that is within ±10% or ±100 MHz of the compliance test mid-band frequency, so the 1750 MHz system verification is made of 1800MHz Dipole.

10.2 liquid validation

The dielectric parameters were checked prior to assessment using the HP85070C dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

KDB 865664 recommended Tissue Dielectric Parameters

The head and body tissue parameters given in this below table should be used to measure the SAR of transmitters operating in 100 MHz to 6 GHz frequency range. The tissue dielectric parameters of the tissue medium at the test frequency should be within the tolerance required in this document. The dielectric parameters should be linearly interpolated between the closest pair of target frequencies to determine the applicable dielectric parameters corresponding to the device test frequency.

The head tissue dielectric parameters recommended by IEEE Std 1528-2013 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in 1528 are derived from tissue dielectric parameters computed from the 4-Cole-Cole equations described above and extrapolated according to the head parameters specified in 1528.

Target Frequency	Head Tissue		Body Tissue	
MHz	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
750	41.9	0.89	55.5	0.96
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
2600	39.0	1.96	52.5	2.16
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness Power drifts in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Table 2: Recommended Dielectric Performance of Tissue

Recommended Dielectric Performance of Tissue						
Head/Body						
Ingredients (% by weight)	Frequency (MHz)					
	750	835	1800	1900	2450	2600
Water	40.52	41.45	55.2	54.9	62.7	54.8
Salt (Nacl)	1.61	1.45	0.3	0.18	0.5	0.1
Sugar	57.67	56.0	0.0	0.0	0.0	0.0
HEC	0.1	1.0	0.0	0.0	0.0	0.0
Bactericide	0.1	0.1	0.0	0.0	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	44.5	44.92	0.0	45.1
Dielectric	40.93	42.54	40.0	39.9	39.8	39.0
Conductivity	0.87	0.91	1.40	1.42	1.88	1.96

Table 3: Dielectric Performance of Head Tissue Simulating Liquid


Temperature: 23.7°C , Relative humidity: 60.5%				
Frequency(MHz)	Measured Date	Description	Dielectric Parameters	
			ϵ_r	$\sigma(\text{s/m})$
750	2025-07-16	Target Value $\pm 5\%$ window	41.90 39.81 — 44.00	0.89 0.85 — 0.93
		Measurement Value	42.13	0.91
835	2025-07-17	Target Value $\pm 5\%$ window	41.50 39.43 — 43.58	0.90 0.86 — 0.95
		Measurement Value	41.50	0.90
1800	2025-07-12	Target Value $\pm 5\%$ window	40.00 38.00 — 42.00	1.40 1.33 — 1.47
		Measurement Value	38.61	1.43
1900	2025-07-14	Target Value $\pm 5\%$ window	40.00 38.00 — 42.00	1.40 1.33 — 1.47
		Measurement Value	39.96	1.35
2450	2025-07-15	Target Value $\pm 5\%$ window	39.2 37.24 — 41.16	1.80 1.71 — 1.89
		Measurement Value	39.23	1.79
2600	2025-07-15	Target Value $\pm 5\%$ window	39.0 37.05 — 40.95	1.96 1.87 — 2.05
		Measurement Value	39.09	1.89

System Verification Plots


Product Description: Dipole

Model: SID750


Test Date: 2025-07-16

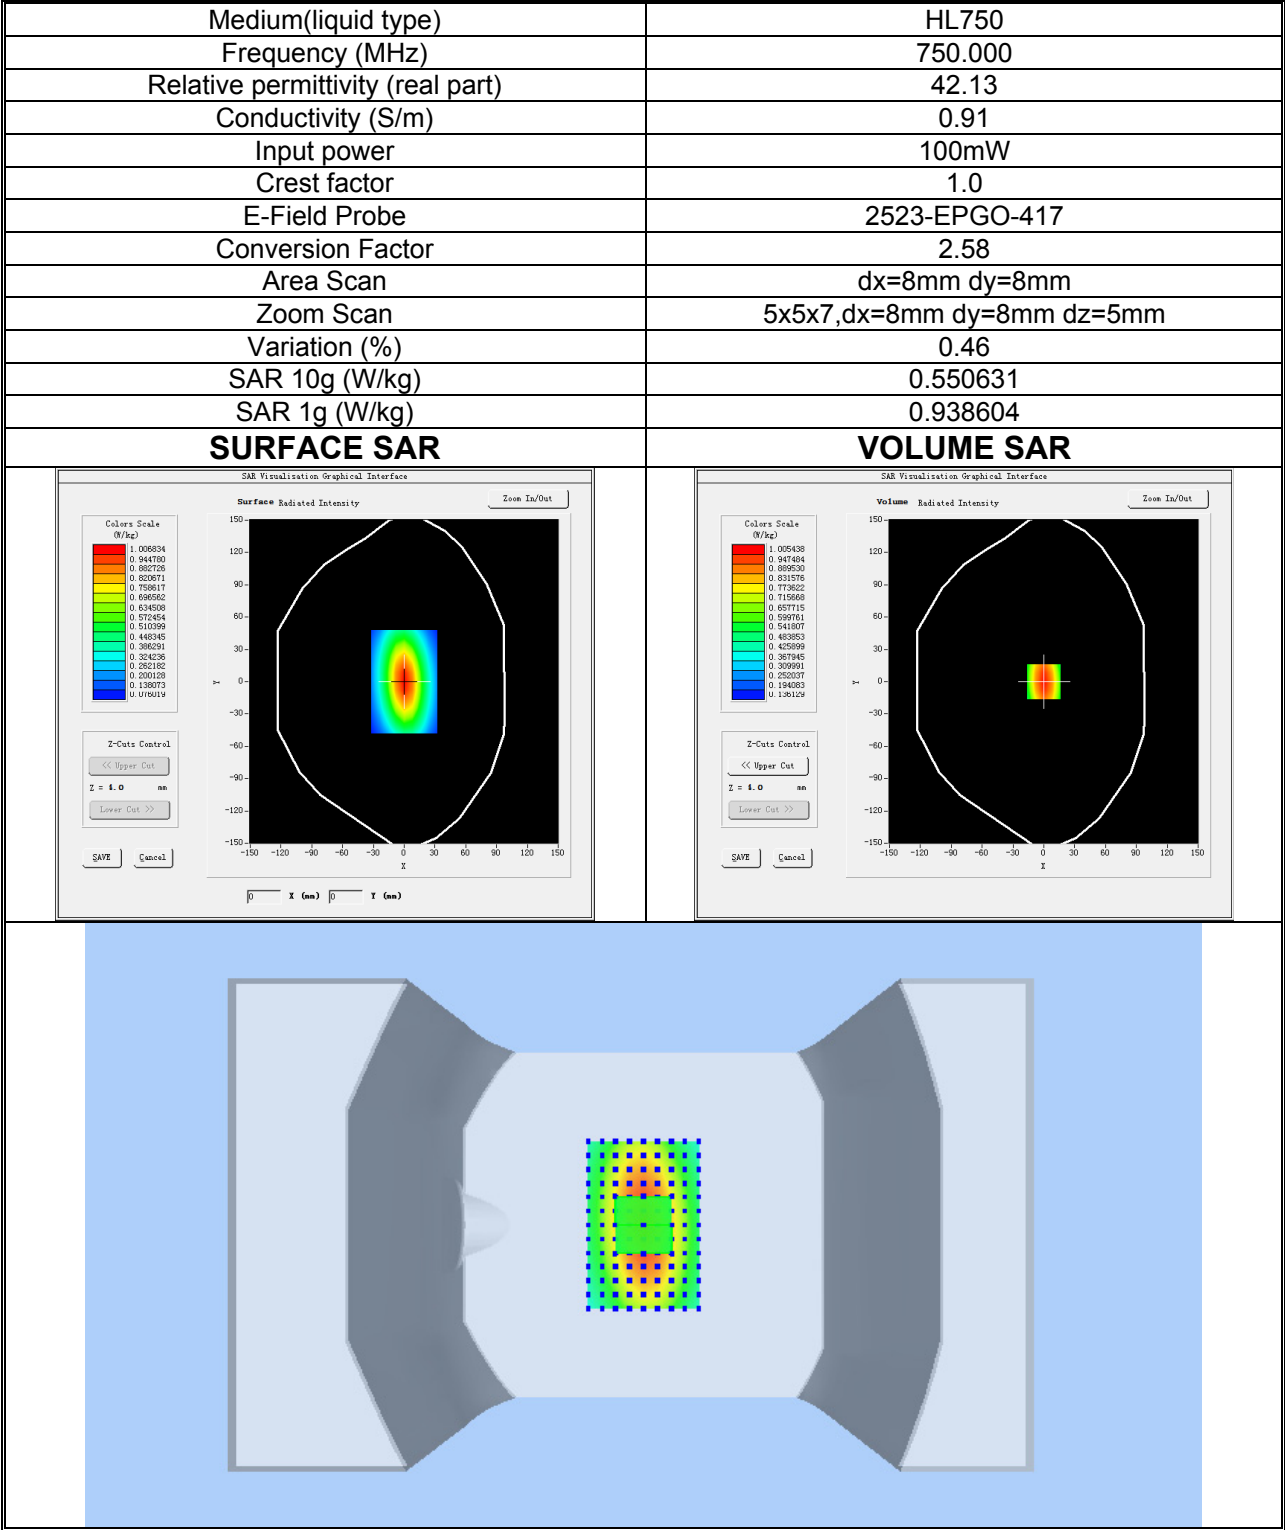


Product Description: Dipole
Model: SID835
Test Date: 2025-07-17

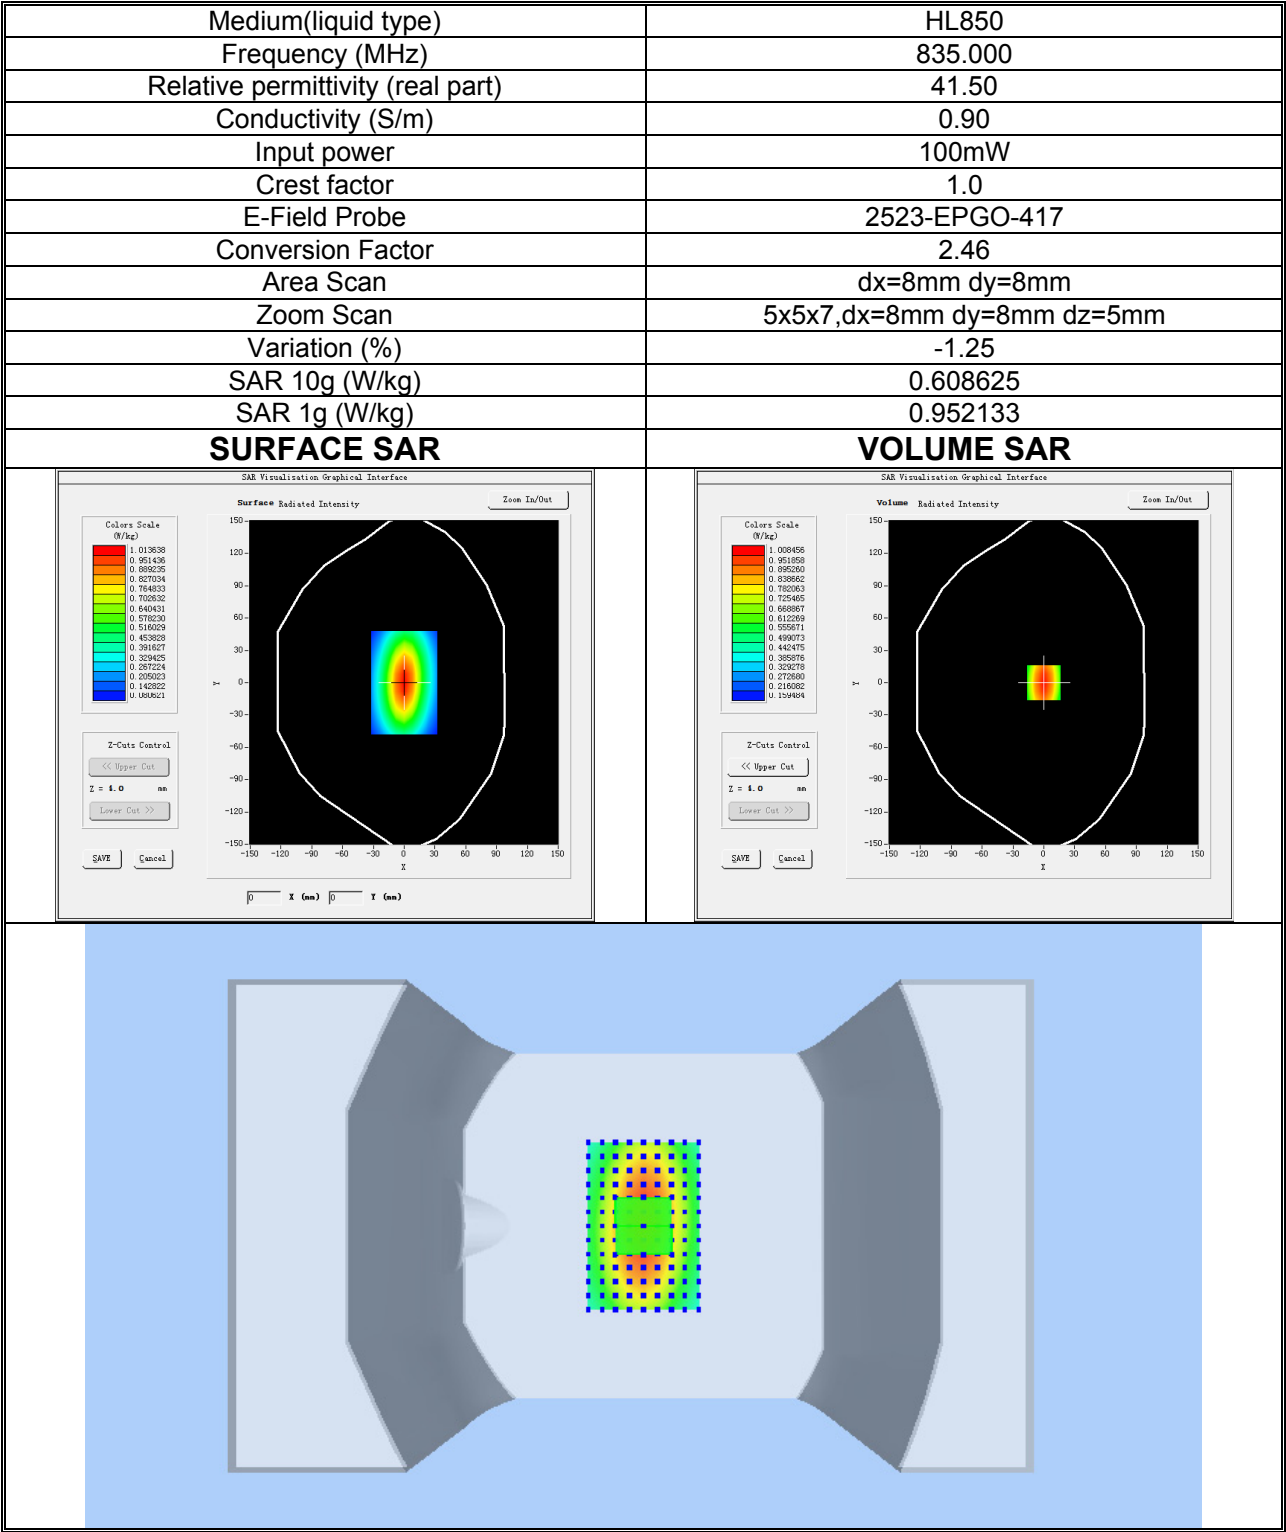




Product Description: Dipole
Model: SID1800
Test Date: 2025-07-12

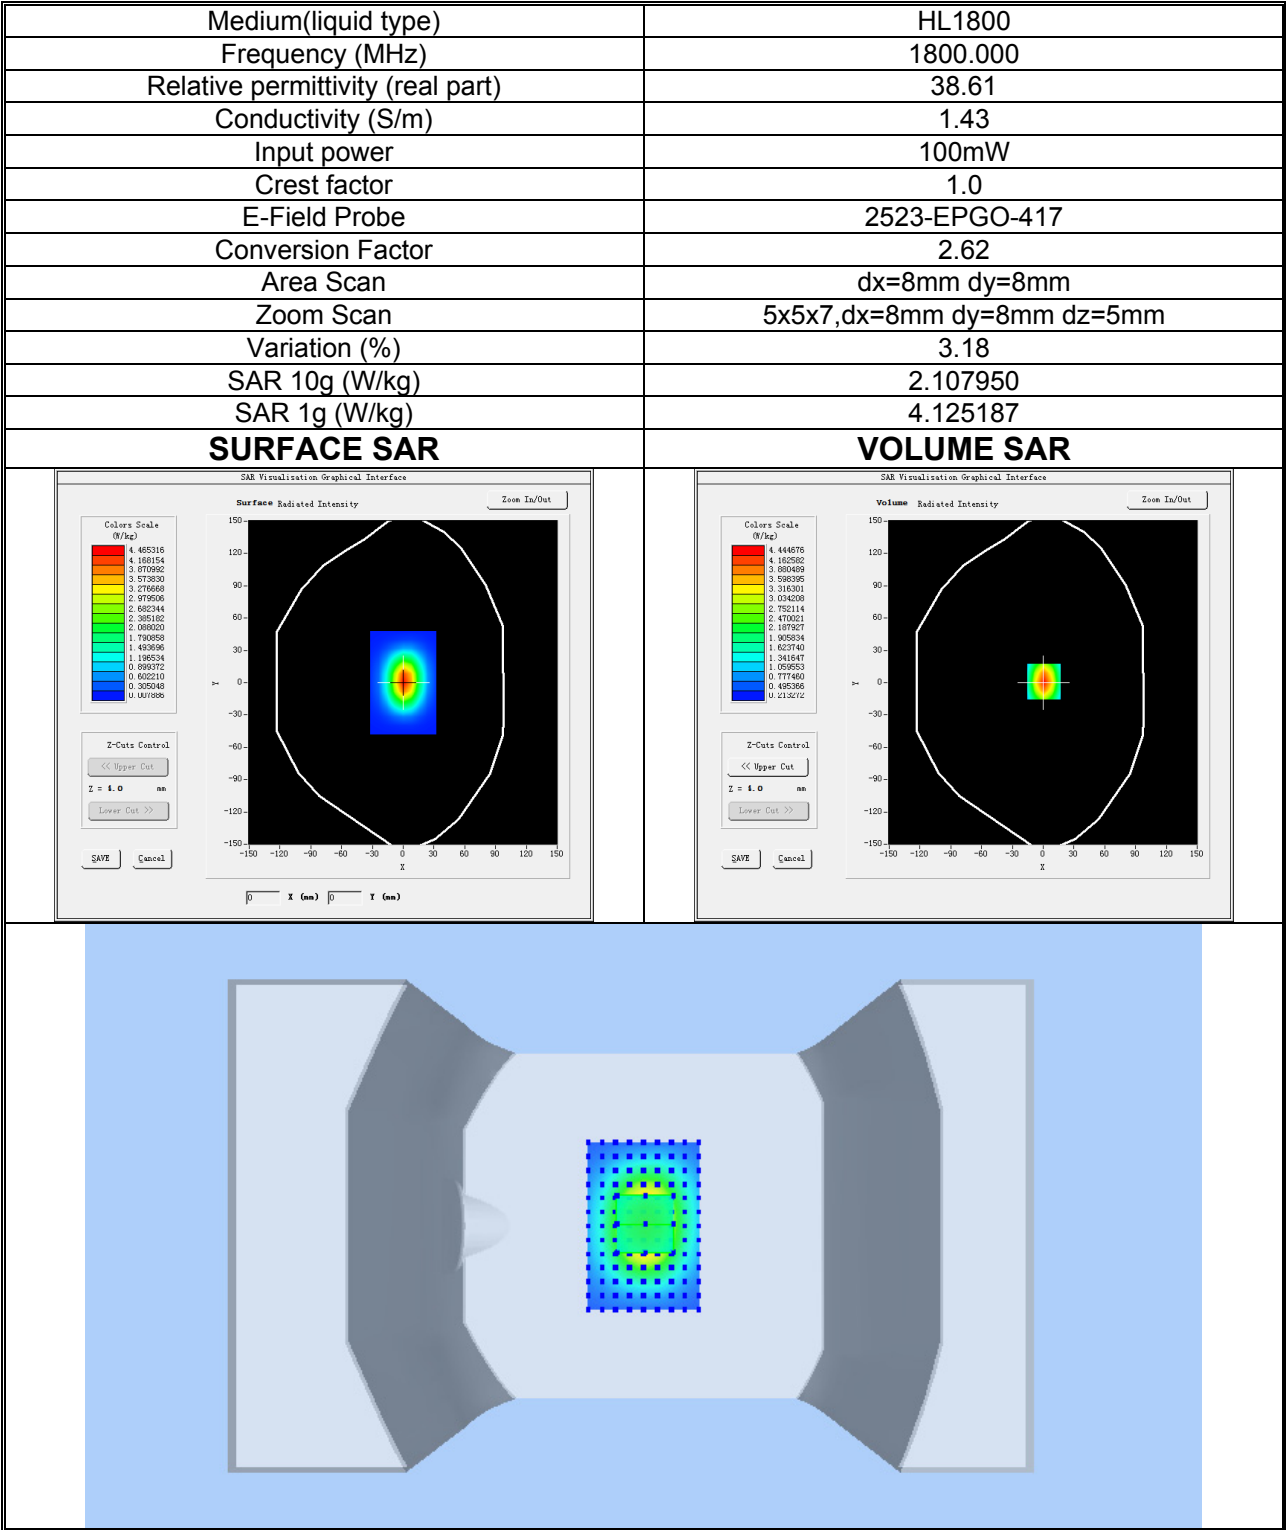


Product Description: Dipole
Model: SID1900
Test Date: 2025-07-14

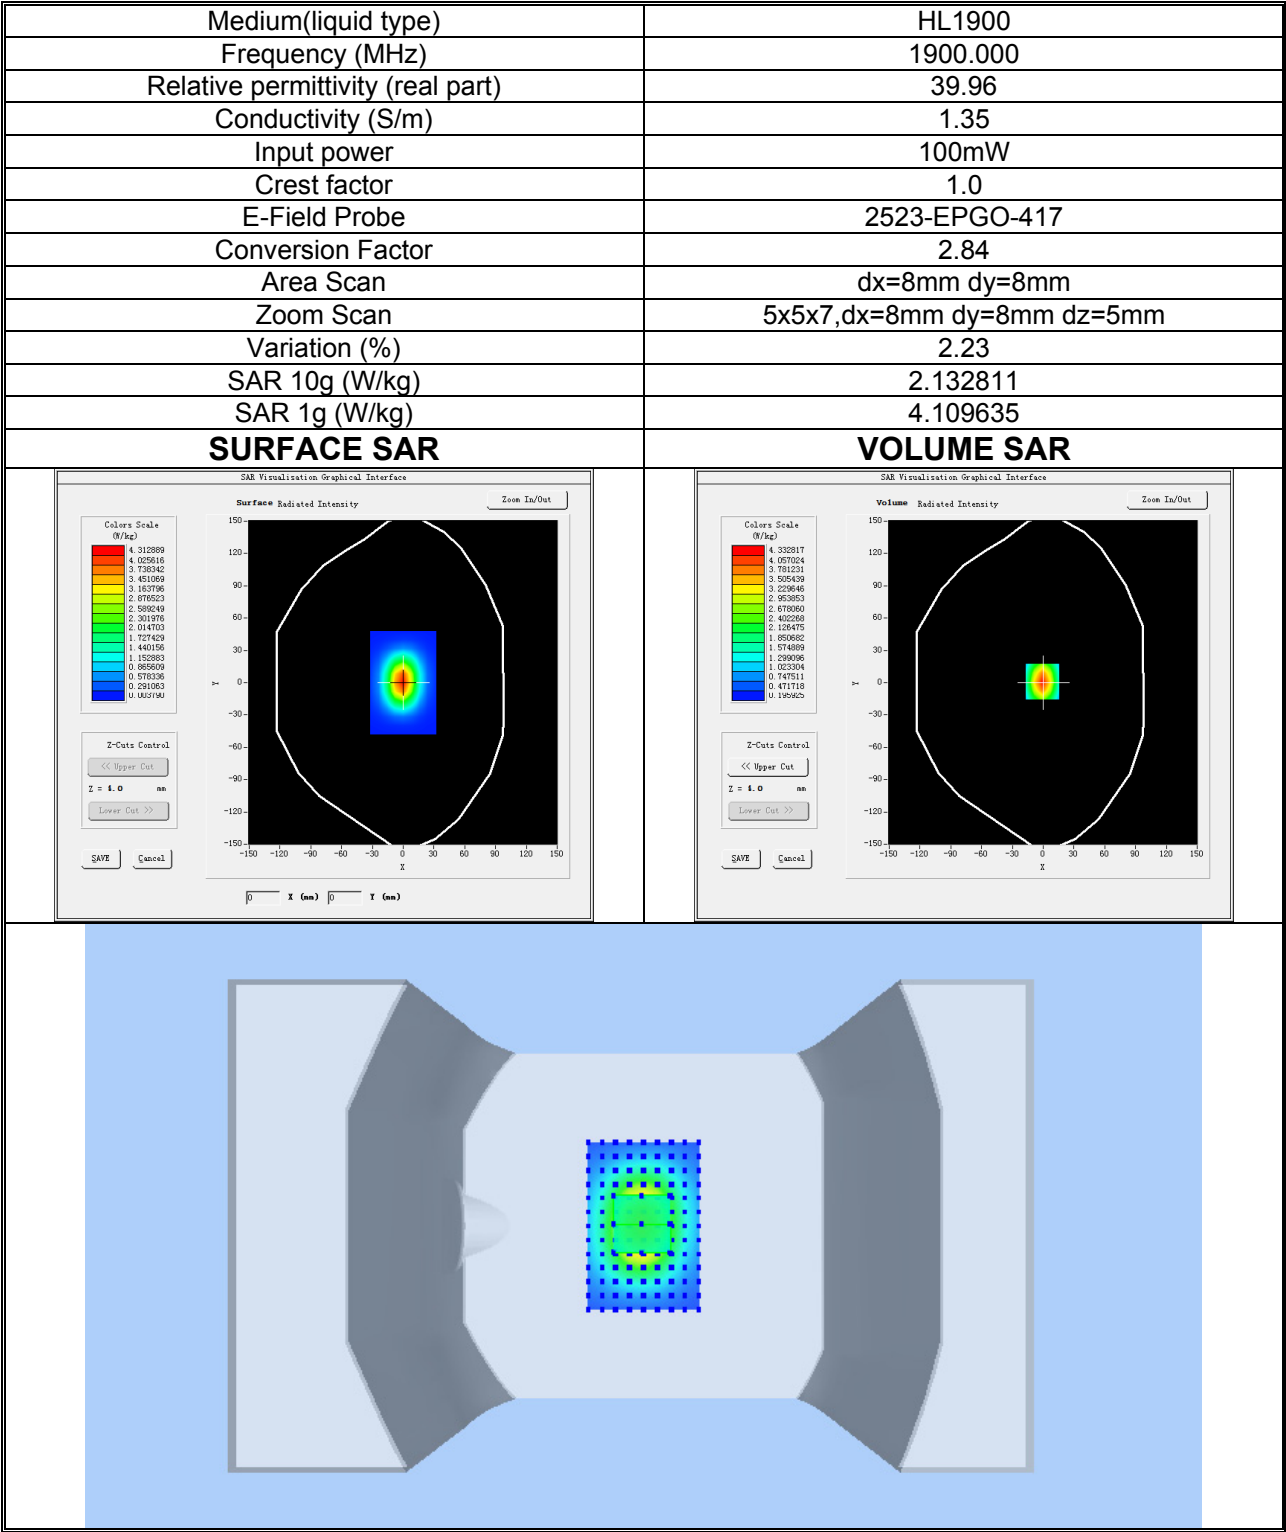

Product Description: Dipole
Model: SID2450
Test Date: 2025-07-15

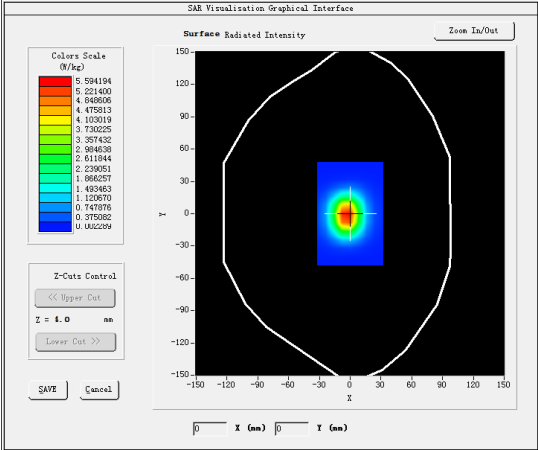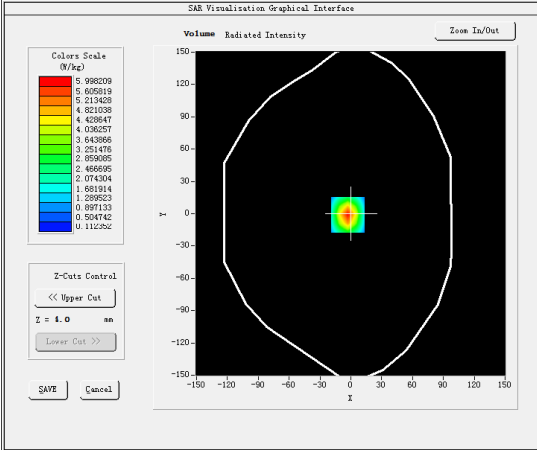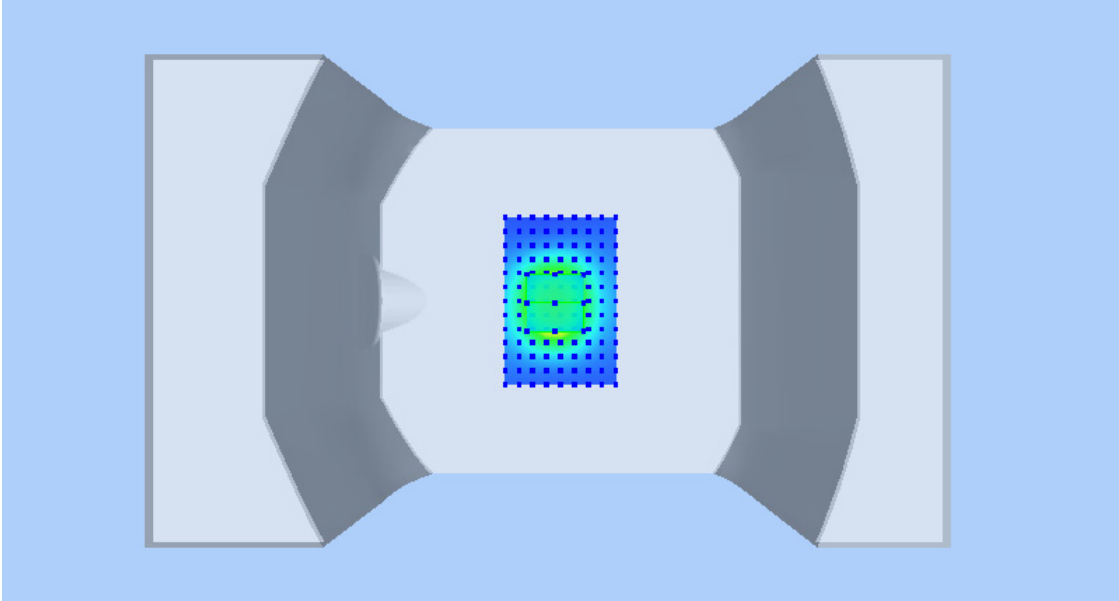Medium(liquid type)	HL2450
Frequency (MHz)	2450.000
Relative permittivity (real part)	39.23
Conductivity (S/m)	1.79
Input power	100mW
Crest factor	1.0
E-Field Probe	2523-EPGO-417
Conversion Factor	3.01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	1.15
SAR 10g (W/kg)	2.691752
SAR 1g (W/kg)	5.533409
SURFACE SAR	VOLUME SAR
	
	

Product Description: Dipole
Model: SID2600
Test Date: 2025-07-15

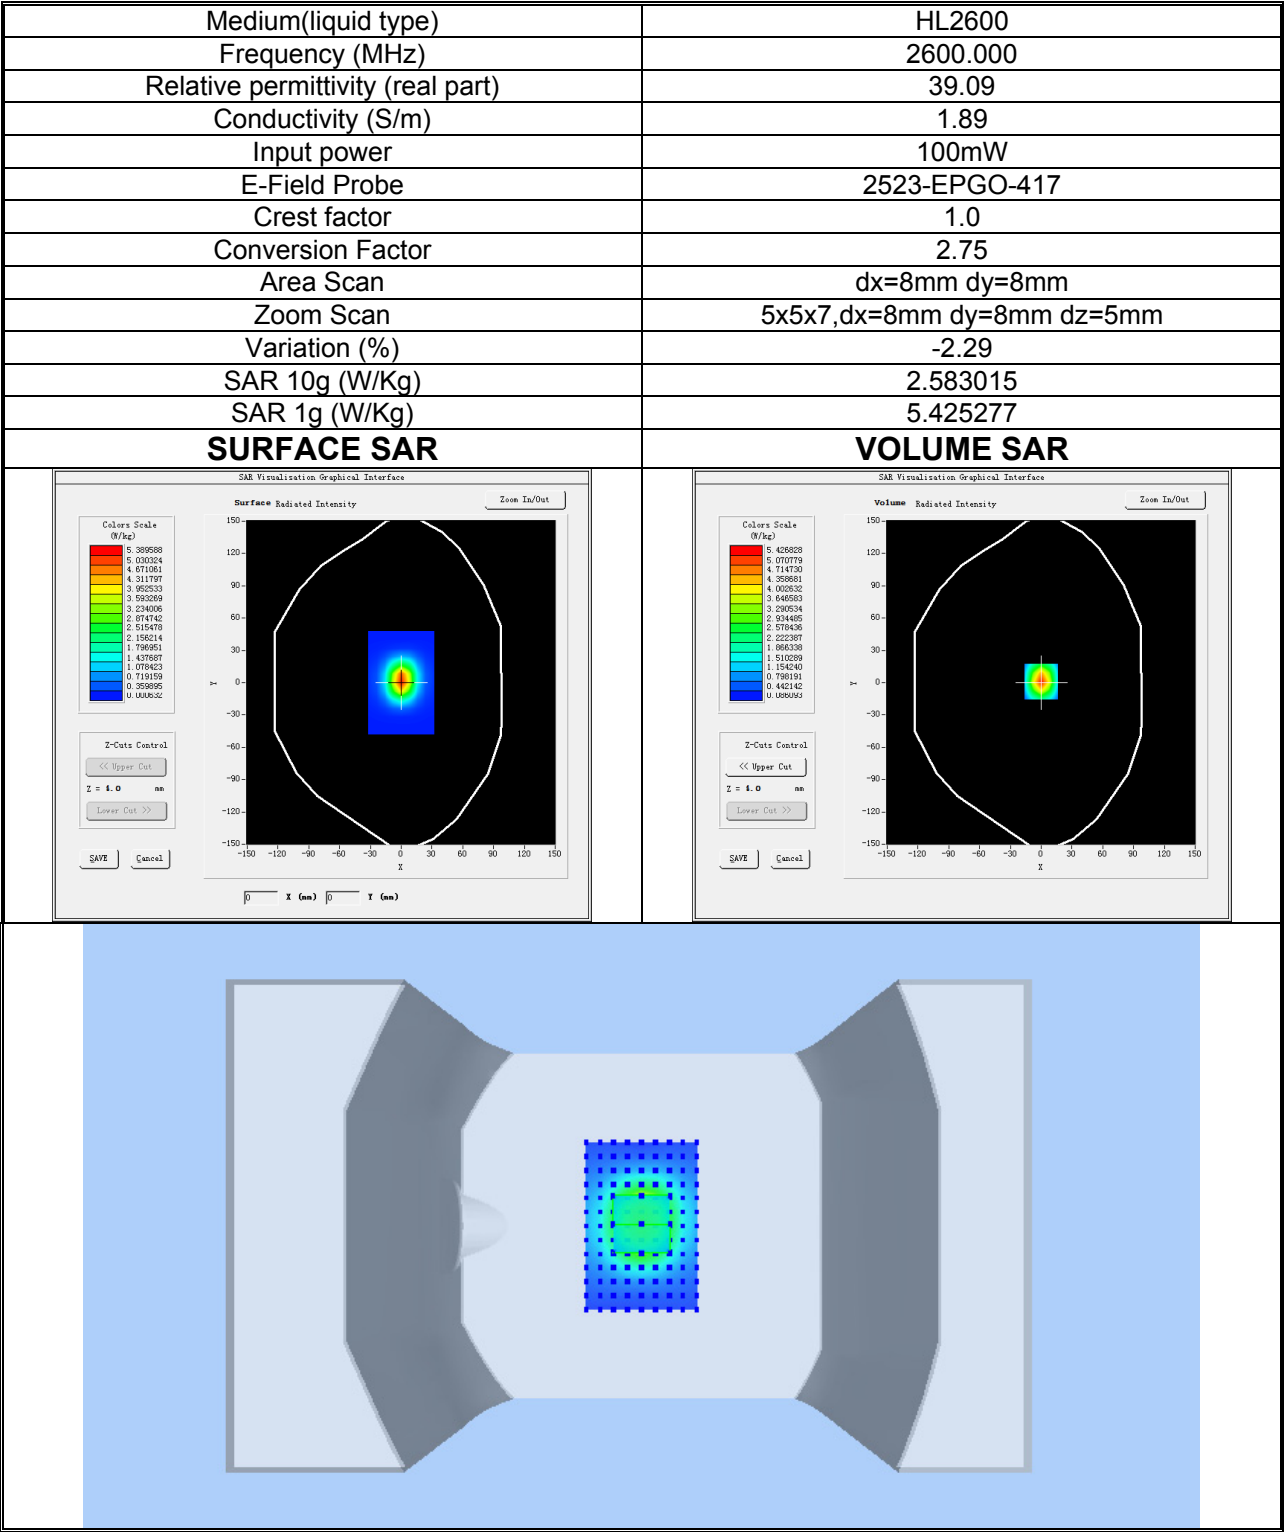

11 Type a Measurement Uncertainty

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table below :

Uncertainty Distribution	Normal	Rectangle	Triangular	U Shape
Multi-plying Factor(a)	$1/k(b)$	$1 / \sqrt{3}$	$1 / \sqrt{6}$	$1 / \sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type -sum- by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %.

The COMOSAR Uncertainty Budget is show in below table:

UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK								
a	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System								
Probe calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	$\sqrt{3}$	$(1_{Cp})^{1/2}$	$(1_{Cp})^{1/2}$	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	2.41	2.41	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	0.00	N	1	1	1	0.00	0.00	∞
Readout Electronics	0.50	N	1	1	1	0.50	0.50	∞
Reponse Time	0.0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF ambient Conditions - Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.40	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Dipole								
Deviation of experimental source from numerical source	4.00	N	1	1	1	4.00	4.00	∞
Input power and SAR drift measurement	5.00	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole axis to liquid Distance	2.00	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (Shape and thickness tolerances)	4.00	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation (in permittivity and conductivity)	2.00	N	1	1	1	2.00	1.68	∞
Liquid conductivity (temperature uncertainty)	2.50	N	1	0.78	0.71	1.95	1.77	∞
Liquid conductivity - measurement uncertainty	4.00	N	1	0.23	0.26	0.92	1.04	M
Liquid permittivity (temperature uncertainty)	2.50	N	1	0.78	0.71	1.95	1.77	∞
Liquid permittivity - measurement uncertainty	5.00	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				10.21	10.12	
Expanded Uncertainty (95% Confidence interval)		k				19.91	19.73	

UNCERTAINTY EVALUATION FOR HANDSET SAR TEST								
a	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System								
Probe calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	$\sqrt{3}$	$(1_{Cp})^{\wedge 1/2}$	$(1_{Cp})^{\wedge 1/2}$	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	$(Cp)^{\wedge 1/2}$	$(Cp)^{\wedge 1/2}$	2.41	2.41	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3.00	N	1	1	1	3.00	3.00	∞
Readout Electronics	0.50	N	1	1	1	0.50	0.50	∞
Reponse Time	0.0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF ambient Conditions - Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.40	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algoritms for Max. SAR Evaluation	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test sample Related								
Test sample positioning	2.60	N	1	1	1	2.60	2.60	N-1
Device Holder Uncertainty	3.00	N	1	1	1	3.00	3.00	N-1
Output power Variation - SAR drift measurement	5.00	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	2.00	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (Shape and thickness tolerances)	4.00	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation (in permittivity and conductivity)	2.00	N	1	1	1	2.00	1.68	∞
Liquid conductivity (temperature uncertainty)	2.50	N	1	0.78	0.71	1.95	1.77	∞
Liquid conductivity - measurement uncertainty	4.00	N	1	0.23	0.26	0.92	1.04	M
Liquid permittivity (temperature uncertainty)	2.50	N	1	0.78	0.71	1.95	1.77	∞
Liquid permittivity - measurement uncertainty	5.00	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				10.63	10.54	
Expanded Uncertainty (95% Confidence interval)		k				20.73	20.56	

12 Output Power Verification

12.1 Test Condition

1. Conducted Measurement
EUT was set for low, mid, high channel with modulated mode and highest RF output power.
The base station simulator was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ± 1.5 dB.
3. Environmental Conditions

Temperature	23.7°C
Relative Humidity	60.5%
Atmospheric Pressure	1003mbar

12.2 Test Procedures

Smart Phone radio output power measurement

1. The transmitter output port was connected to base station emulator.
2. Establish communication link between emulator and EUT and set EUT to operate at maximum output power all the time.
3. Select lowest, middle, and highest channels for each band and different possible test mode.
4. Measure the conducted peak burst power and conducted average burst power from EUT antenna port.

Other radio output power measurement:

The output power was measured using power meter at low, mid, and hi channels.

Source-based Time Averaged Burst Power Calculation:

For TDMA, the following duty cycle factor was used to calculate the source-based time average power

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Duty cycle factor	-9.03 dB	-6.02 dB	-4.26 dB	-3.01 dB
Crest Factor	8	4	2.66	2

Remark: *Time slot duty cycle factor = $10 * \log(\text{Time Slot Duty Cycle})$*

Source based time averaged power = Maximum burst averaged power (1 Uplink) – 9.03 dB

Source based time averaged power = Maximum burst averaged power (2 Uplink) – 6.02 dB

Source based time averaged power = Maximum burst averaged power (3 Uplink) – 4.26 dB

Source based time averaged power = Maximum burst averaged power (4 Uplink) – 3.01 dB

12.3 Test Result

Summary of Power Reduction:

1. Device is support Receiver ON/ Hotspot / Sensor ON reduced power, there are GSM1900&WCDMA B2/4<E B2/4/7/41/66 support Receiver ON, there are GSM1900&WCDMA B2/4<E B2/4/7/41/66 support Hotspot, there are GSM1900&WCDMA B2/4<E B2/4/7/41/66 support Sensor ON. The priority order is Receiver ON to Hotspot to Sensor on.

2. WIFI2.4GHz&WIFI5GHz are support Receiver ON;

Reduced Power off	Receiver ON	Hotspot	Sensor ON
Power Level P1	Power Level P2	Power Level P3	Power Level P4

Note:

The power management for SAR compliance at different exposure conditions (head, hotspot).

The device will invoke corresponding work scenarios power level base on frequency bands/antennas.

Refer to the KDB388624 D02 Pre-Approval Guidance List v18r03.

Power Level P1:

Burst Average Power (dBm)								
Band	GSM 850				GSM 1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice	32.60	32.70	32.65	32±1	30.26	30.25	29.80	30±1
GPRS 1 slots	32.68	32.69	32.69	32±1	30.30	30.17	29.82	30±1
GPRS 2 slots	32.27	32.26	32.17	32±1	29.84	29.71	29.42	29±1
GPRS 3 slots	32.03	31.91	31.84	32±1	29.49	29.37	29.20	29±1
GPRS 4 slots	31.59	31.51	31.51	31±1	29.13	28.99	28.86	29±1
EGPRS 1 slots	26.47	26.55	26.59	26±1	26.09	26.16	26.24	26±1
EGPRS 2 slots	26.01	26.06	26.19	26±1	25.61	25.63	25.76	25±1
EGPRS 3 slots	25.75	25.73	25.91	25±1	25.38	25.31	25.52	25±1
EGPRS 4 slots	25.57	25.57	25.75	25±1	25.09	25.11	25.34	25±1
Remark : GPRS, CS1 coding scheme. EGPRS, MCS5 coding scheme. Multi 1 Slot , Support Max 4 downlink, 1 uplink , 5 working link Multi 2 Slots , Support Max 4 downlink, 2 uplink , 5 working link Multi 3 Slots , Support Max 4 downlink, 3 uplink , 5 working link Multi 4 Slots , Support Max 4 downlink, 4 uplink , 5 working link								

Source Based time Average Power (dBm)								
Band	GSM 850				GSM 1900			
Channel	128	190	251	Time Average factor	512	661	810	Time Average factor
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice	23.57	23.67	23.62	-9.03	21.23	21.22	20.77	-9.03
GPRS 1 slots	23.65	23.66	23.66	-9.03	21.27	21.14	20.79	-9.03
GPRS 2 slots	26.25	26.24	26.15	-6.02	23.82	23.69	23.40	-6.02
GPRS 3 slots	27.77	27.65	27.58	-4.26	25.23	25.11	24.94	-4.26
GPRS 4 slots	28.58	28.50	28.50	-3.01	26.12	25.98	25.85	-3.01
EGPRS 1 slots	17.44	17.52	17.56	-9.03	17.06	17.13	17.21	-9.03
EGPRS 2 slots	19.99	20.04	20.17	-6.02	19.59	19.61	19.74	-6.02
EGPRS 3 slots	21.49	21.47	21.65	-4.26	21.12	21.05	21.26	-4.26
EGPRS 4 slots	22.56	22.56	22.74	-3.01	22.08	22.10	22.33	-3.01
Remark : Time average factor = 1 uplink , $10 \cdot \log(1/8) = -9.03\text{dB}$, 2 uplink , $10 \cdot \log(2/8) = -6.02\text{dB}$, 3 uplink , $10 \cdot \log(3/8) = -4.26\text{dB}$, 4 uplink , $10 \cdot \log(4/8) = -3.01\text{dB}$ Source based time average power = Burst Average power + Time Average factor								

WCDMA - Average Power (dBm)								
Band	WCDMA Band II				WCDMA Band V			
Channel	9262	9400	9538	Tune up Power tolerant	4132	4183	4233	Tune up Power tolerant
Frequency (MHz)	1852.4	1880	1907.6	/	826.4	836.6	846.6	/
RMC 12.2k	22.52	22.75	22.69	22±1	22.69	22.78	22.77	22±1
HSDPA Subtest-1	21.46	21.68	21.95	21±1	21.95	21.75	21.76	21±1
HSDPA Subtest-2	21.05	21.15	21.47	21±1	21.47	21.24	21.25	21±1
HSDPA Subtest-3	20.75	20.88	21.22	21±1	21.22	21.02	20.91	21±1
HSDPA Subtest-4	20.43	20.53	20.90	20±1	20.90	20.71	20.49	20±1
HSUPA Subtest-1	21.00	21.23	21.15	21±1	21.15	21.38	21.42	21±1
HSUPA Subtest-2	20.56	20.77	20.65	20±1	20.65	20.87	20.94	20±1
HSUPA Subtest-3	20.29	20.44	20.42	20±1	20.42	20.61	20.59	20±1
HSUPA Subtest-4	20.01	20.14	20.23	20±1	20.23	20.36	20.29	20±1
HSUPA Subtest-5	19.71	19.82	19.88	19±1	19.88	20.02	19.97	20±1

WCDMA - Average Power (dBm)				
Band	WCDMA Band IV			
Channel	1312	1413	1513	Tune up Power tolerant
Frequency (MHz)	1712.4	1732.6	1752.6	/
RMC 12.2k	22.10	22.13	22.13	22±1
HSDPA Subtest-1	21.00	21.04	21.08	21±1
HSDPA Subtest-2	20.58	20.57	20.56	20±1
HSDPA Subtest-3	20.37	20.27	20.21	20±1
HSDPA Subtest-4	20.01	19.95	19.87	20±1
HSUPA Subtest-1	20.69	20.62	20.59	20±1
HSUPA Subtest-2	20.20	20.07	20.14	20±1
HSUPA Subtest-3	19.99	19.80	19.90	19±1
HSUPA Subtest-4	19.73	19.58	19.62	19±1
HSUPA Subtest-5	19.41	19.28	19.34	19±1

Power Level P2&P3:

Burst Average Power (dBm)								
Band	GSM 1900(P2)				GSM 1900(P3)			
Channel	512	661	810	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	1850.2	1880	1909.8	/	1850.2	1880	1909.8	/
GSM Voice	25.31	25.60	25.73	25±1	27.56	27.12	27.24	27±1
GPRS 1 slots	25.03	25.12	25.36	25±1	27.03	26.81	27.12	26.5±1
GPRS 2 slots	24.96	25.09	25.36	25±1	26.84	26.39	26.75	26±1
GPRS 3 slots	25.12	25.25	25.43	25±1	26.39	26.75	25.86	26±1
GPRS 4 slots	24.23	24.65	25.09	24.5±1	26.12	25.94	26.42	25.5±1
EGPRS 1 slots	19.85	19.36	18.97	19±1	22.03	21.75	21.99	21.5±1
EGPRS 2 slots	18.25	18.36	18.03	17.5±1	20.45	20.58	20.64	20±1
EGPRS 3 slots	17.86	17.36	17.08	17±1	19.52	19.64	19.45	19±1
EGPRS 4 slots	17.06	16.89	16.75	16.5±1	19.03	19.26	18.78	18.5±1
Remark : GPRS, CS1 coding scheme. EGPRS, MCS5 coding scheme. Multi 1 Slot , Support Max 4 downlink, 1 uplink , 5 working link Multi 2 Slots , Support Max 4 downlink, 2 uplink , 5 working link Multi 3 Slots , Support Max 4 downlink, 3 uplink , 5 working link Multi 4 Slots , Support Max 4 downlink, 4 uplink , 5 working link								

Source Based time Average Power (dBm)								
Band	GSM 1900(P2)				GSM 1900(P3)			
Channel	128	190	251	Time Average factor	512	661	810	Time Average factor
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice	16.28	16.57	16.70	-9.03	18.53	18.09	18.21	-9.03
GPRS 1 slots	16.00	16.09	16.33	-9.03	18.00	17.78	18.09	-9.03
GPRS 2 slots	18.94	19.07	19.34	-6.02	20.82	20.37	20.73	-6.02
GPRS 3 slots	20.86	20.99	21.17	-4.26	22.13	22.49	21.60	-4.26
GPRS 4 slots	21.22	21.64	22.08	-3.01	23.11	22.93	23.41	-3.01
EGPRS 1 slots	10.82	10.33	9.94	-9.03	13.00	12.72	12.96	-9.03
EGPRS 2 slots	12.23	12.34	12.01	-6.02	14.43	14.56	14.62	-6.02
EGPRS 3 slots	13.60	13.10	12.82	-4.26	15.26	15.38	15.19	-4.26
EGPRS 4 slots	14.05	13.88	13.74	-3.01	16.02	16.25	15.77	-3.01
Remark : Time average factor = 1 uplink , $10 \cdot \log(1/8) = -9.03\text{dB}$, 2 uplink , $10 \cdot \log(2/8) = -6.02\text{dB}$, 3 uplink , $10 \cdot \log(3/8) = -4.26\text{dB}$, 4 uplink , $10 \cdot \log(4/8) = -3.01\text{dB}$ Source based time average power = Burst Average power + Time Average factor								

Note: DUT were set in GPRS(4Tx slots) for GSM850 and GSM 1900 due to the Maximum source-base time average output power for body SAR.

WCDMA - Average Power (dBm)								
Band	WCDMA Band II(P2)				WCDMA Band II(P3)			
Channel	9262	9400	9538	Tune up Power tolerant	9262	9400	9538	Tune up Power tolerant
Frequency (MHz)	1852.4	1880	1907.6	/	1852.4	1880	1907.6	/
RMC 12.2k	16.48	16.10	16.10	16±1	18.58	18.13	18.42	18±1
HSDPA Subtest-1	15.39	15.09	15.05	15±1	17.15	17.45	17.32	17±1
HSDPA Subtest-2	15.06	15.13	15.20	15±1	17.05	17.24	17.19	17±1
HSDPA Subtest-3	15.21	15.04	15.16	15±1	17.32	17.18	17.42	17±1
HSDPA Subtest-4	15.09	15.03	15.08	15±1	17.17	16.97	17.28	17±1
HSUPA Subtest-1	15.04	14.66	14.58	15±1	16.85	16.54	16.92	17±1
HSUPA Subtest-2	14.85	14.72	14.64	15±1	16.72	16.62	16.64	17±1
HSUPA Subtest-3	14.93	14.82	14.43	15±1	16.43	16.37	16.45	17±1
HSUPA Subtest-4	14.43	14.23	14.18	14±1	16.12	16.05	15.86	16±1
HSUPA Subtest-5	13.95	14.03	13.97	14±1	15.84	15.92	16.03	16±1

WCDMA - Average Power (dBm)								
Band	WCDMA Band IV(P2)				WCDMA Band IV(P3)			
Channel	1312	1413	1513	Tune up Power tolerant	1312	1413	1513	Tune up Power tolerant
Frequency (MHz)	1712.4	1732.6	1752.6	/	1712.4	1732.6	1752.6	/
RMC 12.2k	16.32	16.25	16.43	16±1	19.63	19.42	19.53	19±1
HSDPA Subtest-1	15.32	15.16	15.37	15±1	18.42	18.31	18.40	18±1
HSDPA Subtest-2	15.12	15.09	15.04	15±1	18.15	18.24	18.17	18±1
HSDPA Subtest-3	15.03	14.96	15.10	15±1	18.30	18.42	18.26	18±1
HSDPA Subtest-4	15.07	15.12	15.23	15±1	18.02	18.11	17.94	18±1
HSUPA Subtest-1	14.76	14.84	14.75	15±1	17.46	17.68	17.80	18±1
HSUPA Subtest-2	14.56	14.36	14.73	15±1	17.60	17.51	17.39	18±1
HSUPA Subtest-3	14.45	14.52	14.60	15±1	17.40	17.28	17.19	18±1
HSUPA Subtest-4	14.52	14.32	14.27	14±1	16.85	16.87	17.04	17±1
HSUPA Subtest-5	13.85	13.78	13.80	14±1	16.85	17.03	16.87	17±1

Power Level P4:

Burst Average Power (dBm)				
Band	GSM 1900			
Channel	512	661	810	Tune up Power tolerant
Frequency (MHz)	1850.2	1880	1909.8	/
GSM Voice	28.44	28.49	28.74	28±1
GPRS 1 slots	28.00	28.11	28.39	27.5±1
GPRS 2 slots	27.87	28.17	28.46	27.5±1
GPRS 3 slots	28.22	28.37	28.40	27.5±1
GPRS 4 slots	27.20	27.73	27.99	27±1
EGPRS 1 slots	22.94	22.44	21.97	22±1
EGPRS 2 slots	21.27	21.23	20.92	21.5±1
EGPRS 3 slots	20.76	20.36	19.97	20±1
EGPRS 4 slots	20.05	19.96	19.83	19.5±1
Remark : GPRS, CS1 coding scheme. EGPRS, MCS5 coding scheme. Multi 1 Slot , Support Max 4 downlink, 1 uplink , 5 working link Multi 2 Slots , Support Max 4 downlink, 2 uplink , 5 working link Multi 3 Slots , Support Max 4 downlink, 3 uplink , 5 working link Multi 4 Slots , Support Max 4 downlink, 4 uplink , 5 working link				

Source Based time Average Power (dBm)				
Band	GSM 1900			
Channel	128	190	251	Time Average factor
Frequency (MHz)	824.2	836.6	848.8	/
GSM Voice	19.41	19.46	19.71	-9.03
GPRS 1 slots	18.97	19.08	19.36	-9.03
GPRS 2 slots	21.85	22.15	22.44	-6.02
GPRS 3 slots	23.96	24.11	24.14	-4.26
GPRS 4 slots	24.19	24.72	24.98	-3.01
EGPRS 1 slots	13.91	13.41	12.94	-9.03
EGPRS 2 slots	15.25	15.21	14.90	-6.02
EGPRS 3 slots	16.50	16.10	15.71	-4.26
EGPRS 4 slots	17.04	16.95	16.82	-3.01
Remark : Time average factor = 1 uplink , $10 \cdot \log(1/8) = -9.03\text{dB}$, 2 uplink , $10 \cdot \log(2/8) = -6.02\text{dB}$, 3 uplink , $10 \cdot \log(3/8) = -4.26\text{dB}$, 4 uplink , $10 \cdot \log(4/8) = -3.01\text{dB}$ Source based time average power = Burst Average power + Time Average factor				

Note: DUT were set in GPRS(4Tx slots) for GSM850 and GSM 1900 due to the Maximum source-base time average output power for body SAR.

WCDMA - Average Power (dBm)								
Band	WCDMA Band II				WCDMA Band IV			
Channel	1312	1413	1513	Tune up Power tolerant	1312	1413	1513	Tune up Power tolerant
Frequency (MHz)	1712.4	1732.6	1752.6	/	1712.4	1732.6	1752.6	/
RMC 12.2k	20.35	20.34	20.52	20±1	20.46	20.14	20.44	20±1
HSDPA Subtest-1	19.31	19.27	19.35	19±1	19.43	19.26	19.26	19±1
HSDPA Subtest-2	19.25	19.18	18.93	19±1	18.99	19.08	18.92	19±1
HSDPA Subtest-3	18.90	18.85	18.99	19±1	18.93	19.07	19.21	19±1
HSDPA Subtest-4	19.06	19.13	19.10	19±1	19.07	19.10	19.35	19±1
HSUPA Subtest-1	18.78	18.83	18.75	19±1	18.87	18.97	18.86	19±1
HSUPA Subtest-2	18.59	18.26	18.64	19±1	18.59	18.39	18.75	19±1
HSUPA Subtest-3	18.57	18.53	18.73	19±1	18.34	18.65	18.72	19±1
HSUPA Subtest-4	18.40	18.43	18.36	18±1	18.53	18.22	18.17	18±1
HSUPA Subtest-5	17.83	17.91	17.97	18±1	17.94	17.69	17.89	18±1

LTE Power Reduction

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Power Level P1:**LTE Band 2:**

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	18607	1850.7	QPSK	1	0	21.95	21.5±1	/
				1	2	21.91	21.5±1	/
				1	5	21.98	21.5±1	/
				3	0	21.92	21.5±1	/
				3	1	21.86	21.5±1	/
				3	2	21.94	21.5±1	/
				6	0	20.86	21.5±1	1.0
			16QAM	1	0	22.39	21.5±1	1.0
				1	2	22.3	21.5±1	1.0
				1	5	22.34	21.5±1	1.0
				3	0	20.99	21.5±1	1.0
				3	1	20.98	21.5±1	1.0
				3	2	21	21.5±1	1.0
				6	0	20.06	20.0±1	1.0
	18900	1880	QPSK	1	0	22.09	21.5±1	/
				1	2	22.07	21.5±1	/
				1	5	22.07	21.5±1	/
				3	0	21.8	21.5±1	/
				3	1	21.86	21.5±1	/
				3	2	21.84	21.5±1	/
				6	0	20.86	21.5±1	1.0
			16QAM	1	0	21.64	21.0±1	1.0
				1	2	21.66	21.0±1	1.0
				1	5	21.71	21.0±1	1.0
				3	0	20.82	21.0±1	1.0
				3	1	20.8	21.0±1	1.0
				3	2	20.89	21.0±1	1.0
				6	0	19.53	19.0±1	1.0
	19193	1909.3	QPSK	1	0	21.98	21.0±1	/
				1	2	21.98	21.0±1	/
				1	5	21.98	21.0±1	/
				3	0	21.89	21.0±1	/
				3	1	21.91	21.0±1	/
				3	2	21.87	21.0±1	/
				6	0	20.8	21.0±1	1.0
			16QAM	1	0	21.66	21.0±1	1.0
				1	2	21.69	21.0±1	1.0
				1	5	21.65	21.0±1	1.0
				3	0	21.28	21.0±1	1.0
				3	1	21.27	21.0±1	1.0
				3	2	21.34	21.0±1	1.0
				6	0	20.09	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	18615	1851.5	QPSK	1	0	21.83	21.0±1	/
				1	8	21.82	21.0±1	/
				1	14	21.74	21.0±1	/
				6	0	20.76	21.0±1	1.0
				6	4	20.79	21.0±1	1.0
				6	9	20.77	21.0±1	1.0
				15	0	20.87	21.0±1	1.0
			16QAM	1	0	21.99	22.0±1	1.0
				1	8	22.01	22.0±1	1.0
				1	14	21.99	22.0±1	1.0
				6	0	19.95	20.0±1	1.0
				6	4	19.97	20.0±1	1.0
				6	9	19.96	20.0±1	1.0
				15	0	20.01	20.0±1	1.0
	18900	1880	QPSK	1	0	22.03	21.5±1	/
				1	8	22.00	21.5±1	/
				1	14	22.01	21.5±1	/
				6	0	20.76	21.5±1	1.0
				6	4	20.78	21.5±1	1.0
				6	9	20.88	21.5±1	1.0
				15	0	20.89	21.5±1	1.0
			16QAM	1	0	21.64	20.7±1	1.0
				1	8	21.53	20.7±1	1.0
				1	14	21.56	20.7±1	1.0
				6	0	19.92	20.7±1	1.0
				6	4	19.95	20.7±1	1.0
				6	9	20.09	20.7±1	1.0
				15	0	19.84	20.7±1	1.0
	19185	1908.5	QPSK	1	0	22.01	21.5±1	/
				1	8	21.97	21.5±1	/
				1	14	21.92	21.5±1	/
				6	0	20.82	21.5±1	1.0
				6	4	20.81	21.5±1	1.0
				6	9	20.67	21.5±1	1.0
				15	0	20.84	21.5±1	1.0
			16QAM	1	0	21.75	20.8±1	1.0
				1	8	21.69	20.8±1	1.0
				1	14	21.73	20.8±1	1.0
				6	0	19.93	20.8±1	1.0
				6	4	19.94	20.8±1	1.0
				6	9	19.94	20.8±1	1.0
				15	0	19.89	20.8±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	18625	1852.5	QPSK	1	0	21.85	21.0±1	/
				1	12	21.85	21.0±1	/
				1	24	21.78	21.0±1	/
				12	0	20.75	21.0±1	1.0
				12	6	20.79	21.0±1	1.0
				12	11	20.81	21.0±1	1.0
				25	0	20.77	21.0±1	1.0
			16QAM	1	0	21.07	20.5±1	1.0
				1	12	20.99	20.5±1	1.0
				1	24	21.08	20.5±1	1.0
				12	0	19.96	20.5±1	1.0
				12	6	19.96	20.5±1	1.0
				12	11	19.89	20.5±1	1.0
				25	0	20.14	20.5±1	1.0
	18900	1880	QPSK	1	0	21.89	21.0±1	/
				1	12	21.86	21.0±1	/
				1	24	21.94	21.0±1	/
				12	0	20.8	21.0±1	1.0
				12	6	20.79	21.0±1	1.0
				12	11	20.94	21.0±1	1.0
				25	0	20.89	21.0±1	1.0
			16QAM	1	0	21.65	20.8±1	1.0
				1	12	21.63	20.8±1	1.0
				1	24	21.74	20.8±1	1.0
				12	0	19.85	20.8±1	1.0
				12	6	19.89	20.8±1	1.0
				12	11	20	20.8±1	1.0
				25	0	19.96	20.8±1	1.0
	19175	1907.5	QPSK	1	0	21.73	21.0±1	/
				1	12	21.65	21.0±1	/
				1	24	21.74	21.0±1	/
				12	0	20.78	21.0±1	1.0
				12	6	20.81	21.0±1	1.0
				12	11	20.73	21.0±1	1.0
				25	0	20.85	21.0±1	1.0
			16QAM	1	0	21.35	20.5±1	1.0
				1	12	21.26	20.5±1	1.0
				1	24	21.21	20.5±1	1.0
				12	0	19.94	20.5±1	1.0
				12	6	19.94	20.5±1	1.0
				12	11	19.89	20.5±1	1.0
				25	0	19.87	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	18650	1855	QPSK	1	0	21.88	21.0±1	/
				1	24	21.8	21.0±1	/
				1	49	21.8	21.0±1	/
				25	0	20.77	21.0±1	1.0
				25	12	20.72	21.0±1	1.0
				25	24	20.89	21.0±1	1.0
				50	0	20.84	21.0±1	1.0
			16QAM	1	0	21.97	22.0±1	1.0
				1	24	22.12	22.0±1	1.0
				1	49	22.02	22.0±1	1.0
				25	0	19.99	20.0±1	1.0
				25	12	19.96	20.0±1	1.0
				25	24	20.01	20.0±1	1.0
				50	0	19.9	20.0±1	1.0
	18900	1880	QPSK	1	0	21.79	21.0±1	/
				1	24	21.86	21.0±1	/
				1	49	21.93	21.0±1	/
				25	0	20.8	21.0±1	1.0
				25	12	20.9	21.0±1	1.0
				25	24	20.83	21.0±1	1.0
				50	0	20.76	21.0±1	1.0
			16QAM	1	0	22.34	21.5±1	1.0
				1	24	22.25	21.5±1	1.0
				1	49	22.35	21.5±1	1.0
				25	0	20	20.0±1	1.0
				25	12	20.06	20.0±1	1.0
				25	24	20.04	20.0±1	1.0
				50	0	19.92	20.0±1	1.0
	19150	1905	QPSK	1	0	22.06	21.5±1	/
				1	24	22.03	21.5±1	/
				1	49	21.98	21.5±1	/
				25	0	20.9	20.0±1	1.0
				25	12	20.79	20.0±1	1.0
				25	24	20.81	20.0±1	1.0
				50	0	20.91	20.0±1	1.0
			16QAM	1	0	21.74	20.9±1	1.0
				1	24	21.8	20.9±1	1.0
				1	49	21.68	20.9±1	1.0
				25	0	20.15	20.9±1	1.0
				25	12	20.17	20.9±1	1.0
				25	24	20.06	20.9±1	1.0
				50	0	19.96	20.9±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	18675	1857.5	QPSK	1	0	21.83	21.0±1	/
				1	37	21.85	21.0±1	/
				1	74	21.8	21.0±1	/
				36	0	20.9	21.0±1	1.0
				36	16	20.74	21.0±1	1.0
				36	35	20.84	21.0±1	1.0
				75	0	20.81	21.0±1	1.0
			16QAM	1	0	22.26	21.5±1	1.0
				1	37	22.14	21.5±1	1.0
				1	74	22.16	21.5±1	1.0
				36	0	19.93	19.0±1	1.0
				36	16	19.95	19.0±1	1.0
				36	35	19.97	19.0±1	1.0
				75	0	19.99	19.0±1	1.0
	18900	1880	QPSK	1	0	21.91	21.5±1	/
				1	37	21.87	21.5±1	/
				1	74	22	21.5±1	/
				36	0	20.73	21.5±1	1.0
				36	16	20.8	21.5±1	1.0
				36	35	20.95	21.5±1	1.0
				75	0	20.71	21.5±1	1.0
			16QAM	1	0	21.58	20.7±1	1.0
				1	37	21.58	20.7±1	1.0
				1	74	21.69	20.7±1	1.0
				36	0	20.06	20.7±1	1.0
				36	16	19.97	20.7±1	1.0
				36	35	20.07	20.7±1	1.0
				75	0	20.01	20.7±1	1.0
	19125	1902.5	QPSK	1	0	22	21.5±1	/
				1	37	21.87	21.5±1	/
				1	74	21.77	21.5±1	/
				36	0	20.96	21.5±1	1.0
				36	16	20.89	21.5±1	1.0
				36	35	20.84	21.5±1	1.0
				75	0	20.91	21.5±1	1.0
			16QAM	1	0	22.51	21.6±1	1.0
				1	37	22.37	21.6±1	1.0
				1	74	22.31	21.6±1	1.0
				36	0	20.17	20.0±1	1.0
				36	16	19.98	20.0±1	1.0
				36	35	19.99	20.0±1	1.0
				75	0	20.05	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	18700	1860	QPSK	1	0	22.04	21.5±1	/
				1	49	21.94	21.5±1	/
				1	99	21.93	21.5±1	/
				50	0	20.79	21.5±1	1.0
				50	24	20.9	21.5±1	1.0
				50	49	20.83	21.5±1	1.0
				100	0	20.79	21.5±1	1.0
			16QAM	1	0	21.16	20.5±1	1.0
				1	49	21.2	20.5±1	1.0
				1	99	21.19	20.5±1	1.0
				50	0	19.94	20.5±1	1.0
				50	24	19.96	20.5±1	1.0
				50	49	19.9	20.5±1	1.0
				100	0	19.98	20.5±1	1.0
	18900	1880	QPSK	1	0	21.79	21.0±1	/
				1	49	21.78	21.0±1	/
				1	99	21.9	21.0±1	/
				50	0	20.77	21.0±1	1.0
				50	24	20.82	21.0±1	1.0
				50	49	20.88	21.0±1	1.0
				100	0	20.85	21.0±1	1.0
			16QAM	1	0	21.25	20.5±1	1.0
				1	49	21.25	20.5±1	1.0
				1	99	21.37	20.5±1	1.0
				50	0	19.87	20.5±1	1.0
				50	24	19.94	20.5±1	1.0
				50	49	19.94	20.5±1	1.0
				100	0	19.89	20.5±1	1.0
	19100	1900	QPSK	1	0	22.15	21.2±1	/
				1	49	22.17	21.2±1	/
				1	99	21.99	21.2±1	/
				50	0	21.01	21.2±1	1.0
				50	24	21	21.2±1	1.0
				50	49	20.84	21.2±1	1.0
				100	0	21.09	21.2±1	1.0
			16QAM	1	0	21.65	20.7±1	1.0
				1	49	21.69	20.7±1	1.0
				1	99	21.4	20.7±1	1.0
				50	0	20.08	20.7±1	1.0
				50	24	20.05	20.7±1	1.0
				50	49	19.91	20.7±1	1.0
				100	0	20.14	20.7±1	1.0

LTE Band 4:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	19957	1710.7	QPSK	1	0	22.43	22.0±1	/
				1	2	22.49	22.0±1	/
				1	5	22.45	22.0±1	/
				3	0	22.42	22.0±1	/
				3	1	22.46	22.0±1	/
				3	2	22.41	22.0±1	/
				6	0	21.33	22.0±1	1.0
			16QAM	1	0	22.95	22.0±1	1.0
				1	2	22.89	22.0±1	1.0
				1	5	22.98	22.0±1	1.0
				3	0	21.58	21.0±1	1.0
				3	1	21.67	21.0±1	1.0
				3	2	21.53	21.0±1	1.0
				6	0	20.57	21.0±1	1.0
	20175	1732.5	QPSK	1	0	22.07	22.0±1	/
				1	2	22.14	22.0±1	/
				1	5	22.17	22.0±1	/
				3	0	22.11	22.0±1	/
				3	1	22.1	22.0±1	/
				3	2	22.12	22.0±1	/
				6	0	21.09	22.0±1	1.0
			16QAM	1	0	22.4	21.5±1	1.0
				1	2	22.43	21.5±1	1.0
				1	5	22.38	21.5±1	1.0
				3	0	21.14	21.5±1	1.0
				3	1	21.17	21.5±1	1.0
				3	2	21.14	21.5±1	1.0
				6	0	19.82	19.0±1	1.0
	20393	1754.3	QPSK	1	0	22.21	21.5±1	/
				1	2	22.19	21.5±1	/
				1	5	22.23	21.5±1	/
				3	0	22.05	21.5±1	/
				3	1	22.11	21.5±1	/
				3	2	22.06	21.5±1	/
				6	0	21.03	21.5±1	1.0
			16QAM	1	0	21.36	21.0±1	1.0
				1	2	21.32	21.0±1	1.0
				1	5	21.32	21.0±1	1.0
				3	0	21.09	21.0±1	1.0
				3	1	21.16	21.0±1	1.0
				3	2	21.07	21.0±1	1.0
				6	0	20.23	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	19965	1711.5	QPSK	1	0	22.41	22.0±1	/
				1	8	22.4	22.0±1	/
				1	14	22.3	22.0±1	/
				6	0	21.42	22.0±1	1.0
				6	4	21.38	22.0±1	1.0
				6	9	21.28	22.0±1	1.0
				15	0	21.45	22.0±1	1.0
			16QAM	1	0	22.63	22.0±1	1.0
				1	8	22.59	22.0±1	1.0
				1	14	22.39	22.0±1	1.0
				8	0	20.54	20.0±1	1.0
				8	4	20.51	20.0±1	1.0
				8	9	20.44	20.0±1	1.0
				15	0	20.57	20.0±1	1.0
	20175	1732.5	QPSK	1	0	22.15	21.5±1	/
				1	8	22.1	21.5±1	/
				1	14	22.06	21.5±1	/
				6	0	21.11	21.5±1	1.0
				6	4	21.04	21.5±1	1.0
				6	9	20.99	21.5±1	1.0
				15	0	21.08	21.5±1	1.0
			16QAM	1	0	22.38	21.5±1	1.0
				1	8	22.36	21.5±1	1.0
				1	14	22.36	21.5±1	1.0
				6	0	20.43	20.0±1	1.0
				6	4	20.45	20.0±1	1.0
				6	9	20.47	20.0±1	1.0
				15	0	20.23	20.0±1	1.0
	20385	1753.5	QPSK	1	0	22.29	21.5±1	/
				1	8	22.33	21.5±1	/
				1	14	22.31	21.5±1	/
				6	0	21	21.5±1	1.0
				6	4	21.05	21.5±1	1.0
				6	9	21.03	21.5±1	1.0
				15	0	21	21.5±1	1.0
			16QAM	1	0	22.14	21.5±1	1.0
				1	8	22.18	21.5±1	1.0
				1	14	22.19	21.5±1	1.0
				8	0	20.23	20.0±1	1.0
				8	4	20.28	20.0±1	1.0
				8	9	20.26	20.0±1	1.0
				15	0	20.08	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	19975	1712.5	QPSK	1	0	22.37	22.0±1	/
				1	49	22.32	22.0±1	/
				1	99	22.22	22.0±1	/
				12	0	21.43	22.0±1	1.0
				12	24	21.31	22.0±1	1.0
				12	49	21.28	22.0±1	1.0
				25	0	21.28	22.0±1	1.0
			16QAM	1	0	21.67	21.0±1	1.0
				1	49	21.49	21.0±1	1.0
				1	99	21.56	21.0±1	1.0
				12	0	20.54	21.0±1	1.0
				12	24	20.39	21.0±1	1.0
				12	49	20.37	21.0±1	1.0
				25	0	20.62	21.0±1	1.0
	20175	1732.5	QPSK	1	0	22.16	21.5±1	/
				1	49	22.16	21.5±1	/
				1	99	22.19	21.5±1	/
				12	0	21.07	21.5±1	1.0
				12	24	21.15	21.5±1	1.0
				12	49	21.14	21.5±1	1.0
				25	0	21	21.5±1	1.0
			16QAM	1	0	21.88	21.0±1	1.0
				1	49	21.89	21.0±1	1.0
				1	99	21.94	21.0±1	1.0
				12	0	20.19	21.0±1	1.0
				12	24	20.19	21.0±1	1.0
				12	49	20.21	21.0±1	1.0
				25	0	20.26	21.0±1	1.0
	20375	1752.5	QPSK	1	0	21.98	21.0±1	/
				1	49	21.97	21.0±1	/
				1	99	21.98	21.0±1	/
				12	0	21.07	21.0±1	1.0
				12	24	20.99	21.0±1	1.0
				12	49	21.1	21.0±1	1.0
				25	0	21.06	21.0±1	1.0
			16QAM	1	0	21.54	21.0±1	1.0
				1	49	21.57	21.0±1	1.0
				1	99	21.57	21.0±1	1.0
				12	0	20.18	21.0±1	1.0
				12	24	20.23	21.0±1	1.0
				12	49	20.13	21.0±1	1.0
				25	0	20.15	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20000	1715	QPSK	1	0	22.36	22.0±1	/
				1	49	22.31	22.0±1	/
				1	99	22.3	22.0±1	/
				25	0	21.28	22.0±1	1.0
				25	24	21.31	22.0±1	1.0
				25	49	21.22	22.0±1	1.0
				50	0	21.28	22.0±1	1.0
			16QAM	1	0	22.58	21.5±1	1.0
				1	49	22.44	21.5±1	1.0
				1	99	22.44	21.5±1	1.0
				25	0	20.36	20.0±1	1.0
				25	24	20.42	20.0±1	1.0
				25	49	20.44	20.0±1	1.0
				50	0	20.43	20.0±1	1.0
	20175	1732.5	QPSK	1	0	22.22	22.0±1	/
				1	49	22.13	22.0±1	/
				1	99	22.16	22.0±1	/
				25	0	21.11	22.0±1	1.0
				25	24	21.1	22.0±1	1.0
				25	49	21.1	22.0±1	1.0
				50	0	21.11	22.0±1	1.0
			16QAM	1	0	22.45	22.0±1	1.0
				1	49	22.41	22.0±1	1.0
				1	99	22.44	22.0±1	1.0
				25	0	20.27	20.0±1	1.0
				25	24	20.29	20.0±1	1.0
				25	49	20.28	20.0±1	1.0
				50	0	20.18	20.0±1	1.0
	20350	1750	QPSK	1	0	22.27	21.5±1	/
				1	49	22.3	21.5±1	/
				1	99	22.29	21.5±1	/
				25	0	20.97	21.5±1	1.0
				25	24	21.03	21.5±1	1.0
				25	49	21.03	21.5±1	1.0
				50	0	21.09	21.5±1	1.0
			16QAM	1	0	22.52	22.0±1	1.0
				1	49	22.63	22.0±1	1.0
				1	99	22.71	22.0±1	1.0
				25	0	20.23	20.0±1	1.0
				25	24	20.24	20.0±1	1.0
				25	49	20.28	20.0±1	1.0
				50	0	20.12	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	20025	1717.5	QPSK	1	0	22.47	22.0±1	/
				1	49	22.37	22.0±1	/
				1	99	22.29	22.0±1	/
				36	0	21.38	22.0±1	1.0
				36	24	21.32	22.0±1	1.0
				36	49	21.31	22.0±1	1.0
				75	0	21.32	22.0±1	1.0
			16QAM	1	0	22.66	22.0±1	1.0
				1	49	22.5	22.0±1	1.0
				1	99	22.48	22.0±1	1.0
				36	0	20.39	20.0±1	1.0
				36	24	20.37	20.0±1	1.0
				36	49	20.35	20.0±1	1.0
				75	0	20.45	20.0±1	1.0
	20175	1732.5	QPSK	1	0	22.23	22.0±1	/
				1	49	22.14	22.0±1	/
				1	99	22.13	22.0±1	/
				36	0	21.11	22.0±1	1.0
				36	24	21.09	22.0±1	1.0
				36	49	21.05	22.0±1	1.0
				75	0	21.07	22.0±1	1.0
			16QAM	1	0	21.88	21.0±1	1.0
				1	49	21.82	21.0±1	1.0
				1	99	21.8	21.0±1	1.0
				36	0	20.3	21.0±1	1.0
				36	24	20.34	21.0±1	1.0
				36	49	20.26	21.0±1	1.0
				75	0	20.26	21.0±1	1.0
	20325	1747.5	QPSK	1	0	22.07	21.5±1	/
				1	49	22.05	21.5±1	/
				1	99	22.09	21.5±1	/
				36	0	20.99	21.5±1	1.0
				36	24	21.08	21.5±1	1.0
				36	49	21.1	21.5±1	1.0
				75	0	21	21.5±1	1.0
			16QAM	1	0	22.47	22.0±1	1.0
				1	49	22.48	22.0±1	1.0
				1	99	22.58	22.0±1	1.0
				36	0	20.17	20.0±1	1.0
				36	24	20.11	20.0±1	1.0
				36	49	20.21	20.0±1	1.0
				75	0	20.16	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	20050	1720	QPSK	1	0	22.51	21.6±1	/
				1	49	22.28	21.6±1	/
				1	99	22.41	21.6±1	/
				50	0	21.29	21.6±1	1.0
				50	24	21.22	21.6±1	1.0
				50	49	21.23	21.6±1	1.0
				100	0	21.24	21.6±1	1.0
			16QAM	1	0	21.77	21.0±1	1.0
				1	49	21.62	21.0±1	1.0
				1	99	21.66	21.0±1	1.0
				50	0	20.48	21.0±1	1.0
				50	24	20.4	21.0±1	1.0
				50	49	20.31	21.0±1	1.0
				100	0	20.38	21.0±1	1.0
	20175	1732.5	QPSK	1	0	21.96	21.0±1	/
				1	49	21.93	21.0±1	/
				1	99	21.96	21.0±1	/
				50	0	21.25	21.0±1	1.0
				50	24	21.12	21.0±1	1.0
				50	49	21.11	21.0±1	1.0
				100	0	21.16	21.0±1	1.0
			16QAM	1	0	22.07	21.5±1	1.0
				1	49	22.07	21.5±1	1.0
				1	99	22.03	21.5±1	1.0
				50	0	20.23	20.0±1	1.0
				50	24	20.27	20.0±1	1.0
				50	49	20.23	20.0±1	1.0
				100	0	20.25	20.0±1	1.0
	20300	1745	QPSK	1	0	21.96	21.0±1	/
				1	49	21.88	21.0±1	/
				1	99	21.99	21.0±1	/
				50	0	21.15	21.0±1	1.0
				50	24	21.07	21.0±1	1.0
				50	49	21.17	21.0±1	1.0
				100	0	21.06	21.0±1	1.0
			16QAM	1	0	22.08	21.5±1	1.0
				1	49	22.1	21.5±1	1.0
				1	99	22.17	21.5±1	1.0
				50	0	20.22	20.0±1	1.0
				50	24	20.21	20.0±1	1.0
				50	49	20.16	20.0±1	1.0
				100	0	20.2	20.0±1	1.0

LTE Band 5:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	20407	824.7	QPSK	1	0	23.17	22.5±1	/
				1	2	23.05	22.5±1	/
				1	5	23.12	22.5±1	/
				3	0	22.97	22.5±1	/
				3	1	23.02	22.5±1	/
				3	2	22.97	22.5±1	/
				6	0	21.95	22.5±1	1.0
			16QAM	1	0	23.48	22.5±1	1.0
				1	2	23.48	22.5±1	1.0
				1	5	23.49	22.5±1	1.0
				3	0	22.09	22.0±1	1.0
				3	1	22.15	22.0±1	1.0
				3	2	22.12	22.0±1	1.0
				6	0	21.09	22.0±1	1.0
	20525	836.5	QPSK	1	0	22.8	22.0±1	/
				1	2	22.81	22.0±1	/
				1	5	22.83	22.0±1	/
				3	0	22.79	22.0±1	/
				3	1	22.73	22.0±1	/
				3	2	22.74	22.0±1	/
				6	0	21.69	22.0±1	1.0
			16QAM	1	0	22.37	21.7±1	1.0
				1	2	22.51	21.7±1	1.0
				1	5	22.45	21.7±1	1.0
				3	0	21.75	21.7±1	1.0
				3	1	21.72	21.7±1	1.0
				3	2	21.76	21.7±1	1.0
				6	0	20.98	21.7±1	1.0
	20634	848.3	QPSK	1	0	23.15	22.5±1	/
				1	2	23.1	22.5±1	/
				1	5	23.1	22.5±1	/
				3	0	22.98	22.5±1	/
				3	1	22.9	22.5±1	/
				3	2	22.94	22.5±1	/
				6	0	21.88	22.5±1	1.0
			16QAM	1	0	22.64	22.0±1	1.0
				1	2	22.68	22.0±1	1.0
				1	5	22.63	22.0±1	1.0
				3	0	21.83	22.0±1	1.0
				3	1	21.89	22.0±1	1.0
				3	2	21.89	22.0±1	1.0
				6	0	21.3	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	20415	825.5	QPSK	1	0	22.9	22.0±1	/
				1	8	22.87	22.0±1	/
				1	14	22.84	22.0±1	/
				6	0	21.89	22.0±1	1.0
				6	4	21.86	22.0±1	1.0
				6	9	21.88	22.0±1	1.0
				15	0	21.86	22.0±1	1.0
			16QAM	1	0	23.02	23.0±1	1.0
				1	8	23.01	23.0±1	1.0
				1	14	23.06	23.0±1	1.0
				8	0	20.89	21.0±1	1.0
				8	4	20.97	21.0±1	1.0
				8	9	20.96	21.0±1	1.0
				15	0	21.04	21.0±1	1.0
	20525	836.5	QPSK	1	0	22.78	22.0±1	/
				1	8	22.82	22.0±1	/
				1	14	22.75	22.0±1	/
				6	0	21.74	22.0±1	1.0
				6	4	21.75	22.0±1	1.0
				6	9	21.63	22.0±1	1.0
				15	0	21.8	22.0±1	1.0
			16QAM	1	0	22.5	22.0±1	1.0
				1	8	22.42	22.0±1	1.0
				1	14	22.47	22.0±1	1.0
				6	0	21.2	22.0±1	1.0
				6	4	21.13	22.0±1	1.0
				6	9	21.18	22.0±1	1.0
				15	0	21.07	22.0±1	1.0
	20635	847.5	QPSK	1	0	23.14	22.5±1	/
				1	8	23.22	22.5±1	/
				1	14	23.19	22.5±1	/
				6	0	21.62	22.5±1	1.0
				6	4	21.87	22.5±1	1.0
				6	9	21.9	22.5±1	1.0
				15	0	21.82	22.5±1	1.0
			16QAM	1	0	22.7	21.8±1	1.0
				1	8	22.66	21.8±1	1.0
				1	14	22.73	21.8±1	1.0
				8	0	21.01	21.8±1	1.0
				8	4	21	21.8±1	1.0
				8	9	21.33	21.8±1	1.0
				15	0	20.88	21.8±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	20425	826.5	QPSK	1	0	22.97	22.0±1	/
				1	49	22.97	22.0±1	/
				1	99	22.89	22.0±1	/
				12	0	22	22.0±1	1.0
				12	24	21.99	22.0±1	1.0
				12	49	21.99	22.0±1	1.0
				25	0	21.96	22.0±1	1.0
			16QAM	1	0	22.15	21.5±1	1.0
				1	49	22.17	21.5±1	1.0
				1	99	22.07	21.5±1	1.0
				12	0	21.02	21.5±1	1.0
				12	24	21.02	21.5±1	1.0
				12	49	21	21.5±1	1.0
				25	0	21.25	21.5±1	1.0
	20525	836.5	QPSK	1	0	22.8	22.0±1	/
				1	49	22.76	22.0±1	/
				1	99	22.7	22.0±1	/
				12	0	21.62	22.0±1	1.0
				12	24	21.62	22.0±1	1.0
				12	49	21.77	22.0±1	1.0
				25	0	21.67	22.0±1	1.0
			16QAM	1	0	22.52	22.0±1	1.0
				1	49	22.54	22.0±1	1.0
				1	99	22.47	22.0±1	1.0
				12	0	21.03	22.0±1	1.0
				12	24	21.02	22.0±1	1.0
				12	49	21.07	22.0±1	1.0
				25	0	21.2	22.0±1	1.0
	20625	846.5	QPSK	1	0	22.7	22.0±1	/
				1	49	22.75	22.0±1	/
				1	99	22.77	22.0±1	/
				12	0	21.86	22.0±1	1.0
				12	24	21.78	22.0±1	1.0
				12	49	21.77	22.0±1	1.0
				25	0	21.78	22.0±1	1.0
			16QAM	1	0	22.22	21.5±1	1.0
				1	49	22.24	21.5±1	1.0
				1	99	22.36	21.5±1	1.0
				12	0	20.85	21.5±1	1.0
				12	24	20.85	21.5±1	1.0
				12	49	20.92	21.5±1	1.0
				25	0	20.81	21.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20450	829	QPSK	1	0	23.04	22.5±1	/
				1	49	22.95	22.5±1	/
				1	99	22.75	22.5±1	/
				25	0	21.92	22.5±1	1.0
				25	24	21.86	22.5±1	1.0
				25	49	21.85	22.5±1	1.0
				50	0	21.87	22.5±1	1.0
			16QAM	1	0	23.14	23.0±1	1.0
				1	49	23.06	23.0±1	1.0
				1	99	22.89	23.0±1	1.0
				25	0	21.07	21.0±1	1.0
				25	24	21.23	21.0±1	1.0
				25	49	20.94	21.0±1	1.0
				50	0	21.24	21.0±1	1.0
	20525	836.5	QPSK	1	0	22.81	22.0±1	/
				1	49	22.78	22.0±1	/
				1	99	22.83	22.0±1	/
				25	0	21.79	22.0±1	1.0
				25	24	21.72	22.0±1	1.0
				25	49	21.8	22.0±1	1.0
				50	0	21.8	22.0±1	1.0
			16QAM	1	0	23.2	22.5±1	1.0
				1	49	23.11	22.5±1	1.0
				1	99	23.1	22.5±1	1.0
				25	0	21.21	21.0±1	1.0
				25	24	21.19	21.0±1	1.0
				25	49	20.87	21.0±1	1.0
				50	0	21.12	21.0±1	1.0
	20600	844	QPSK	1	0	22.81	22.5±1	/
				1	49	22.99	22.5±1	/
				1	99	23.09	22.5±1	/
				25	0	21.75	22.5±1	1.0
				25	24	21.85	22.5±1	1.0
				25	49	21.85	22.5±1	1.0
				50	0	21.84	22.5±1	1.0
			16QAM	1	0	22.54	22.0±1	1.0
				1	49	22.72	22.0±1	1.0
				1	99	22.78	22.0±1	1.0
				25	0	20.99	21.0±1	1.0
				25	24	20.99	21.0±1	1.0
				25	49	21.04	21.0±1	1.0
				50	0	20.81	21.0±1	1.0

LTE Band 7:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	20775	2502.5	QPSK	1	0	21.04	20.5±1	/
				1	49	20.97	20.5±1	/
				1	99	21	20.5±1	/
				12	0	20.1	20.5±1	1.0
				12	24	20.08	20.5±1	1.0
				12	49	20.03	20.5±1	1.0
				25	0	19.93	20.5±1	1.0
			16QAM	1	0	20.55	20.0±1	1.0
				1	49	20.52	20.0±1	1.0
				1	99	20.51	20.0±1	1.0
				12	0	19.13	20.0±1	1.0
				12	24	19.15	20.0±1	1.0
				12	49	19.18	20.0±1	1.0
				25	0	19.29	20.0±1	1.0
	21100	2535	QPSK	1	0	21	20.5±1	/
				1	49	20.97	20.5±1	/
				1	99	21.04	20.5±1	/
				12	0	20.16	20.5±1	1.0
				12	24	20.07	20.5±1	1.0
				12	49	20.25	20.5±1	1.0
				25	0	20.07	20.5±1	1.0
			16QAM	1	0	20.59	20.0±1	1.0
				1	49	20.55	20.0±1	1.0
				1	99	20.6	20.0±1	1.0
				12	0	19.32	20.0±1	1.0
				12	24	19.27	20.0±1	1.0
				12	49	19.29	20.0±1	1.0
				25	0	19.26	20.0±1	1.0
	21425	2567.5	QPSK	1	0	21.54	21.0±1	/
				1	49	21.57	21.0±1	/
				1	99	21.66	21.0±1	/
				12	0	20.64	21.0±1	1.0
				12	24	20.59	21.0±1	1.0
				12	49	20.59	21.0±1	1.0
				25	0	20.62	21.0±1	1.0
			16QAM	1	0	21.2	20.5±1	1.0
				1	49	21.07	20.5±1	1.0
				1	99	21.09	20.5±1	1.0
				12	0	19.69	20.5±1	1.0
				12	24	19.63	20.5±1	1.0
				12	49	19.69	20.5±1	1.0
				25	0	19.8	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20800	2505	QPSK	1	0	21.01	20.5±1	/
				1	49	20.98	20.5±1	/
				1	99	21.05	20.5±1	/
				25	0	20.06	20.5±1	1.0
				25	24	20.03	20.5±1	1.0
				25	49	19.98	20.5±1	1.0
				50	0	20	20.5±1	1.0
			16QAM	1	0	21.3	21.0±1	1.0
				1	49	21.26	21.0±1	1.0
				1	99	21.29	21.0±1	1.0
				25	0	19.14	19.0±1	1.0
				25	24	19.1	19.0±1	1.0
				25	49	19.15	19.0±1	1.0
				50	0	19.12	19.0±1	1.0
	21100	2535	QPSK	1	0	21.16	21.0±1	/
				1	49	21.2	21.0±1	/
				1	99	21.24	21.0±1	/
				25	0	20.12	21.0±1	1.0
				25	24	20.1	21.0±1	1.0
				25	49	20.23	21.0±1	1.0
				50	0	20.21	21.0±1	1.0
			16QAM	1	0	21.58	21.0±1	1.0
				1	49	21.54	21.0±1	1.0
				1	99	21.56	21.0±1	1.0
				25	0	19.44	19.0±1	1.0
				25	24	19.41	19.0±1	1.0
				25	49	19.36	19.0±1	1.0
				50	0	19.43	19.0±1	1.0
	21400	2565	QPSK	1	0	21.64	21.0±1	/
				1	49	21.63	21.0±1	/
				1	99	21.71	21.0±1	/
				25	0	20.47	21.0±1	1.0
				25	24	20.58	21.0±1	1.0
				25	49	20.48	21.0±1	1.0
				50	0	20.46	21.0±1	1.0
			16QAM	1	0	21.48	20.6±1	1.0
				1	49	21.47	20.6±1	1.0
				1	99	21.53	20.6±1	1.0
				25	0	19.86	20.6±1	1.0
				25	24	19.87	20.6±1	1.0
				25	49	19.89	20.6±1	1.0
				50	0	19.67	20.6±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	20825	2507.5	QPSK	1	0	20.88	20.5±1	/
				1	49	20.93	20.5±1	/
				1	99	21	20.5±1	/
				36	0	20.06	20.5±1	1.0
				36	24	20.07	20.5±1	1.0
				36	49	19.93	20.5±1	1.0
				75	0	19.94	20.5±1	1.0
			16QAM	1	0	21.25	21.0±1	1.0
				1	49	21.15	21.0±1	1.0
				1	99	21.16	21.0±1	1.0
				36	0	19.13	19.0±1	1.0
				36	24	19.19	19.0±1	1.0
				36	49	19.12	19.0±1	1.0
				75	0	19.09	19.0±1	1.0
	21100	2535	QPSK	1	0	21.23	21.0±1	/
				1	49	21.35	21.0±1	/
				1	99	21.33	21.0±1	/
				36	0	20.18	21.0±1	1.0
				36	24	20.1	21.0±1	1.0
				36	49	20.12	21.0±1	1.0
				75	0	20.15	21.0±1	1.0
			16QAM	1	0	20.98	20.5±1	1.0
				1	49	21.02	20.5±1	1.0
				1	99	21.11	20.5±1	1.0
				36	0	19.45	19.0±1	1.0
				36	24	19.4	19.0±1	1.0
				36	49	19.44	19.0±1	1.0
				75	0	19.32	19.0±1	1.0
	21375	2562.5	QPSK	1	0	21.51	21.0±1	/
				1	49	21.56	21.0±1	/
				1	99	21.57	21.0±1	/
				36	0	20.45	21.0±1	1.0
				36	24	20.49	21.0±1	1.0
				36	49	20.54	21.0±1	1.0
				75	0	20.48	21.0±1	1.0
			16QAM	1	0	22.05	21.5±1	1.0
				1	49	22.12	21.5±1	1.0
				1	99	22.16	21.5±1	1.0
				36	0	19.65	19.0±1	1.0
				36	24	19.6	19.0±1	1.0
				36	49	19.64	19.0±1	1.0
				75	0	19.69	19.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	20850	2510	QPSK	1	0	20.97	20.5±1	/
				1	49	20.96	20.5±1	/
				1	99	21.03	20.5±1	/
				50	0	19.9	20.5±1	1.0
				50	24	20.09	20.5±1	1.0
				50	49	20.07	20.5±1	1.0
				100	0	19.93	20.5±1	1.0
			16QAM	1	0	20.36	20.0±1	1.0
				1	49	20.45	20.0±1	1.0
				1	99	20.55	20.0±1	1.0
				50	0	19.16	20.0±1	1.0
				50	24	19.2	20.0±1	1.0
				50	49	19.21	20.0±1	1.0
				100	0	19.24	20.0±1	1.0
	21100	2535	QPSK	1	0	20.96	20.5±1	/
				1	49	21.01	20.5±1	/
				1	99	21.02	20.5±1	/
				50	0	20.24	20.5±1	1.0
				50	24	20.14	20.5±1	1.0
				50	49	20.19	20.5±1	1.0
				100	0	20.19	20.5±1	1.0
			16QAM	1	0	21.05	20.5±1	1.0
				1	49	21.18	20.5±1	1.0
				1	99	21.35	20.5±1	1.0
				50	0	19.27	19.0±1	1.0
				50	24	19.3	19.0±1	1.0
				50	49	19.34	19.0±1	1.0
				100	0	19.32	19.0±1	1.0
	21350	2560	QPSK	1	0	21.5	21.0±1	/
				1	49	21.56	21.0±1	/
				1	99	21.69	21.0±1	/
				50	0	20.3	21.0±1	1.0
				50	24	20.35	21.0±1	1.0
				50	49	20.41	21.0±1	1.0
				100	0	20.5	21.0±1	1.0
			16QAM	1	0	21.15	20.5±1	1.0
				1	49	21.01	20.5±1	1.0
				1	99	21.15	20.5±1	1.0
				50	0	19.52	20.5±1	1.0
				50	24	19.6	20.5±1	1.0
				50	49	19.69	20.5±1	1.0
				100	0	19.67	20.5±1	1.0

LTE Band 12:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	23017	699.7	QPSK	1	0	22.85	22.0±1	/
				1	2	22.74	22.0±1	/
				1	5	22.77	22.0±1	/
				3	0	22.7	22.0±1	/
				3	1	22.6	22.0±1	/
				3	2	22.69	22.0±1	/
				6	0	21.62	22.0±1	1.0
			16QAM	1	0	23.36	22.5±1	1.0
				1	2	23.26	22.5±1	1.0
				1	5	23.35	22.5±1	1.0
				3	0	21.94	21.0±1	1.0
				3	1	21.88	21.0±1	1.0
				3	2	21.94	21.0±1	1.0
				6	0	20.65	21.0±1	1.0
	23095	707.5	QPSK	1	0	22.96	22.5±1	/
				1	2	22.99	22.5±1	/
				1	5	23	22.5±1	/
				3	0	22.93	22.5±1	/
				3	1	22.92	22.5±1	/
				3	2	22.83	22.5±1	/
				6	0	21.9	22.5±1	1.0
			16QAM	1	0	22.62	22.0±1	1.0
				1	2	22.56	22.0±1	1.0
				1	5	22.62	22.0±1	1.0
				3	0	21.89	22.0±1	1.0
				3	1	21.85	22.0±1	1.0
				3	2	21.89	22.0±1	1.0
				6	0	21.18	22.0±1	1.0
	23173	715.3	QPSK	1	0	23.17	22.5±1	/
				1	2	23.14	22.5±1	/
				1	5	23.17	22.5±1	/
				3	0	22.95	22.5±1	/
				3	1	22.96	22.5±1	/
				3	2	22.99	22.5±1	/
				6	0	21.92	22.5±1	1.0
			16QAM	1	0	23.3	22.5±1	1.0
				1	2	23.4	22.5±1	1.0
				1	5	23.44	22.5±1	1.0
				3	0	22.4	22.5±1	1.0
				3	1	22.42	22.5±1	1.0
				3	2	22.3	22.5±1	1.0
				6	0	21.15	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	23025	700.5	QPSK	1	0	22.56	22.0±1	/
				1	8	22.53	22.0±1	/
				1	14	22.71	22.0±1	/
				8	0	21.72	22.0±1	1.0
				8	4	21.61	22.0±1	1.0
				8	9	21.76	22.0±1	1.0
				15	0	21.7	22.0±1	1.0
			16QAM	1	0	22.86	22.0±1	1.0
				1	8	22.79	22.0±1	1.0
				1	14	22.93	22.0±1	1.0
				8	0	20.5	20.0±1	1.0
				8	4	20.52	20.0±1	1.0
				8	9	20.69	20.0±1	1.0
				15	0	20.78	20.0±1	1.0
	23095	707.5	QPSK	1	0	22.98	22.0±1	/
				1	8	22.99	22.0±1	/
				1	14	22.93	22.0±1	/
				8	0	21.9	22.0±1	1.0
				8	4	21.85	22.0±1	1.0
				8	9	21.76	22.0±1	1.0
				15	0	21.86	22.0±1	1.0
			16QAM	1	0	22.73	22.0±1	1.0
				1	8	22.65	22.0±1	1.0
				1	14	22.54	22.0±1	1.0
				8	0	21.25	22.0±1	1.0
				8	4	21.34	22.0±1	1.0
				8	9	21.24	22.0±1	1.0
				15	0	21.3	22.0±1	1.0
	23165	714.5	QPSK	1	0	23.09	22.5±1	/
				1	8	23.09	22.5±1	/
				1	14	23.12	22.5±1	/
				8	0	21.87	22.5±1	1.0
				8	4	21.82	22.5±1	1.0
				8	9	21.9	22.5±1	1.0
				15	0	21.86	22.5±1	1.0
			16QAM	1	0	23.15	22.5±1	1.0
				1	8	23.47	22.5±1	1.0
				1	14	23.38	22.5±1	1.0
				8	0	20.95	20.0±1	1.0
				8	4	20.96	20.0±1	1.0
				8	9	20.99	20.0±1	1.0
				15	0	20.8	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	23035	701.5	QPSK	1	0	22.64	22.0±1	/
				1	49	22.86	22.0±1	/
				1	99	22.84	22.0±1	/
				12	0	21.63	22.0±1	1.0
				12	24	21.72	22.0±1	1.0
				12	49	21.77	22.0±1	1.0
				25	0	21.71	22.0±1	1.0
			16QAM	1	0	21.91	21.5±1	1.0
				1	49	22.09	21.5±1	1.0
				1	99	22.04	21.5±1	1.0
				12	0	20.61	21.5±1	1.0
				12	24	20.8	21.5±1	1.0
				12	49	20.76	21.5±1	1.0
				25	0	21.07	21.5±1	1.0
	23095	707.5	QPSK	1	0	22.86	22.0±1	/
				1	49	22.88	22.0±1	/
				1	99	22.79	22.0±1	/
				12	0	21.92	22.0±1	1.0
				12	24	21.85	22.0±1	1.0
				12	49	21.8	22.0±1	1.0
				25	0	21.9	22.0±1	1.0
			16QAM	1	0	22.72	22.0±1	1.0
				1	49	22.74	22.0±1	1.0
				1	99	22.67	22.0±1	1.0
				12	0	21.25	22.0±1	1.0
				12	24	21.17	22.0±1	1.0
				12	49	21.24	22.0±1	1.0
				25	0	21.32	22.0±1	1.0
	23155	713.5	QPSK	1	0	22.73	22.0±1	/
				1	49	22.7	22.0±1	/
				1	99	22.92	22.0±1	/
				12	0	21.91	22.0±1	1.0
				12	24	21.89	22.0±1	1.0
				12	49	21.92	22.0±1	1.0
				25	0	21.89	22.0±1	1.0
			16QAM	1	0	22.81	21.9±1	1.0
				1	49	22.81	21.9±1	1.0
				1	99	22.84	21.9±1	1.0
				12	0	21.19	21.9±1	1.0
				12	24	20.92	21.9±1	1.0
				12	49	20.99	21.9±1	1.0
				25	0	21.11	21.9±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	23060	704	QPSK	1	0	22.65	22.0±1	/
				1	49	22.8	22.0±1	/
				1	99	22.85	22.0±1	/
				25	0	21.86	22.0±1	1.0
				25	24	21.78	22.0±1	1.0
				25	49	21.86	22.0±1	1.0
				50	0	21.72	22.0±1	1.0
			16QAM	1	0	22.65	21.8±1	1.0
				1	49	22.79	21.8±1	1.0
				1	99	22.82	21.8±1	1.0
				25	0	20.84	21.8±1	1.0
				25	24	21.21	21.8±1	1.0
				25	49	21.26	21.8±1	1.0
				50	0	21.28	21.8±1	1.0
	23095	707.5	QPSK	1	0	22.75	22.0±1	/
				1	49	22.92	22.0±1	/
				1	99	22.94	22.0±1	/
				25	0	21.92	22.0±1	1.0
				25	24	21.94	22.0±1	1.0
				25	49	21.91	22.0±1	1.0
				50	0	21.86	22.0±1	1.0
			16QAM	1	0	23.13	22.5±1	1.0
				1	49	23.2	22.5±1	1.0
				1	99	23.24	22.5±1	1.0
				25	0	21.3	21.0±1	1.0
				25	24	21.28	21.0±1	1.0
				25	49	20.88	21.0±1	1.0
				50	0	21.3	21.0±1	1.0
	23130	711	QPSK	1	0	23	22.5±1	/
				1	49	22.99	22.5±1	/
				1	99	23.1	22.5±1	/
				25	0	21.81	22.5±1	1.0
				25	24	21.75	22.5±1	1.0
				25	49	21.88	22.5±1	1.0
				50	0	21.82	22.5±1	1.0
			16QAM	1	0	22.91	22.0±1	1.0
				1	49	22.91	22.0±1	1.0
				1	99	22.94	22.0±1	1.0
				25	0	21.4	21.0±1	1.0
				25	24	21.06	21.0±1	1.0
				25	49	21.07	21.0±1	1.0
				50	0	20.77	21.0±1	1.0

LTE Band 13:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	23205	779.5	QPSK	1	0	23.28	22.5±1	/
				1	49	23.07	22.5±1	/
				1	99	23.06	22.5±1	/
				12	0	22.26	22.5±1	1.0
				12	24	22.16	22.5±1	1.0
				12	49	21.97	22.5±1	1.0
				25	0	22.17	22.5±1	1.0
			16QAM	1	0	22.74	22.0±1	1.0
				1	49	22.53	22.0±1	1.0
				1	99	22.44	22.0±1	1.0
				12	0	21.31	22.0±1	1.0
				12	24	21.36	22.0±1	1.0
				12	49	21.37	22.0±1	1.0
				25	0	21.36	22.0±1	1.0
	23230	782.0	QPSK	1	0	23.05	22.5±1	/
				1	49	23.09	22.5±1	/
				1	99	23.17	22.5±1	/
				12	0	22.08	22.5±1	1.0
				12	24	22.09	22.5±1	1.0
				12	49	22.11	22.5±1	1.0
				25	0	22.12	22.5±1	1.0
			16QAM	1	0	22.31	22.0±1	1.0
				1	49	22.32	22.0±1	1.0
				1	99	22.32	22.0±1	1.0
				12	0	21.36	22.0±1	1.0
				12	24	21.04	22.0±1	1.0
				12	49	21.2	22.0±1	1.0
				25	0	21.2	22.0±1	1.0
	23255	784.5	QPSK	1	0	23.06	22.5±1	/
				1	49	23.09	22.5±1	/
				1	99	23.02	22.5±1	/
				12	0	22.03	22.5±1	1.0
				12	24	21.97	22.5±1	1.0
				12	49	22.08	22.5±1	1.0
				25	0	21.98	22.5±1	1.0
			16QAM	1	0	22.84	22.0±1	1.0
				1	49	22.74	22.0±1	1.0
				1	99	22.79	22.0±1	1.0
				12	0	21.23	22.0±1	1.0
				12	24	21.1	22.0±1	1.0
				12	49	21.15	22.0±1	1.0
				25	0	21.23	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	23230	782.0	QPSK	1	0	23.3	22.5±1	/
				1	49	23.03	22.5±1	/
				1	99	22.96	22.5±1	/
				25	0	22.06	22.5±1	1.0
				25	24	22.2	22.5±1	1.0
				25	49	22.08	22.5±1	1.0
				50	0	22.07	22.5±1	1.0
			16QAM	1	0	23.44	22.5±1	1.0
				1	49	23.19	22.5±1	1.0
				1	99	23.17	22.5±1	1.0
				25	0	21.48	21.0±1	1.0
				25	24	21.19	21.0±1	1.0
				25	49	21.31	21.0±1	1.0
				50	0	21.09	21.0±1	1.0

LTE Band 41:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	40265	2557.5	QPSK	1	0	21.24	21.0±1	/
				1	12	21.36	21.0±1	/
				1	24	21.33	21.0±1	/
				12	0	20.3	21.0±1	1.0
				12	6	20.3	21.0±1	1.0
				12	11	20.24	21.0±1	1.0
				25	0	20.32	20.0±1	1.0
			16QAM	1	0	21.24	20.5±1	1.0
				1	12	21.28	20.5±1	1.0
				1	24	21.24	20.5±1	1.0
				12	0	19.52	20.5±1	1.0
				12	6	19.5	20.5±1	1.0
				12	11	19.51	20.5±1	1.0
				25	0	19.59	20.5±1	1.0
	40740	2605.0	QPSK	1	0	21.79	21.0±1	/
				1	12	21.83	21.0±1	/
				1	24	21.78	21.0±1	/
				12	0	20.66	21.0±1	1.0
				12	6	20.67	21.0±1	1.0
				12	11	20.72	21.0±1	1.0
				25	0	20.72	21.0±1	1.0
			16QAM	1	0	20.36	20.0±1	1.0
				1	12	20.41	20.0±1	1.0
				1	24	20.34	20.0±1	1.0
				12	0	19.7	20.0±1	1.0
				12	6	19.83	20.0±1	1.0
				12	11	19.63	20.0±1	1.0
				25	0	20.08	20.0±1	1.0
	41215	2652.5	QPSK	1	0	21.46	21.0±1	/
				1	12	21.34	21.0±1	/
				1	24	21.39	21.0±1	/
				12	0	20.64	21.0±1	1.0
				12	6	20.55	21.0±1	1.0
				12	11	20.57	21.0±1	1.0
				25	0	20.6	21.0±1	1.0
			16QAM	1	0	20.77	20.0±1	1.0
				1	12	20.78	20.0±1	1.0
				1	24	20.83	20.0±1	1.0
				12	0	19.64	20.0±1	1.0
				12	6	19.58	20.0±1	1.0
				12	11	19.58	20.0±1	1.0
				25	0	19.78	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	40290	2560.0	QPSK	1	0	21.33	21.0±1	/
				1	24	21.4	21.0±1	/
				1	49	21.51	21.0±1	/
				25	0	20.38	21.0±1	1.0
				25	12	20.33	21.0±1	1.0
				25	24	20.43	21.0±1	1.0
				50	0	20.39	21.0±1	1.0
			16QAM	1	0	21.01	20.3±1	1.0
				1	24	21.04	20.3±1	1.0
				1	49	21.22	20.3±1	1.0
				25	0	19.41	20.3±1	1.0
				25	12	19.48	20.3±1	1.0
				25	24	19.38	20.3±1	1.0
				50	0	19.61	20.3±1	1.0
	40740	2605.0	QPSK	1	0	21.67	21.0±1	/
				1	24	21.68	21.0±1	/
				1	49	21.64	21.0±1	/
				25	0	20.6	21.0±1	1.0
				25	12	20.59	21.0±1	1.0
				25	24	20.6	21.0±1	1.0
				50	0	20.66	21.0±1	1.0
			16QAM	1	0	21.28	20.5±1	1.0
				1	24	21.25	20.5±1	1.0
				1	49	21.2	20.5±1	1.0
				25	0	19.96	20.5±1	1.0
				25	12	19.96	20.5±1	1.0
				25	24	19.93	20.5±1	1.0
				50	0	19.88	20.5±1	1.0
	41190	2650.0	QPSK	1	0	21.49	21.0±1	/
				1	24	21.51	21.0±1	/
				1	49	21.47	21.0±1	/
				25	0	20.58	21.0±1	1.0
				25	12	20.56	21.0±1	1.0
				25	24	20.55	21.0±1	1.0
				50	0	20.63	21.0±1	1.0
			16QAM	1	0	21.77	21.0±1	1.0
				1	24	21.84	21.0±1	1.0
				1	49	21.77	21.0±1	1.0
				25	0	19.81	19.0±1	1.0
				25	12	19.81	19.0±1	1.0
				25	24	19.71	19.0±1	1.0
				50	0	19.65	19.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	40315	2562.5	QPSK	1	0	21.46	21.0±1	/
				1	37	21.45	21.0±1	/
				1	74	21.45	21.0±1	/
				36	0	20.39	21.0±1	1.0
				36	16	20.48	21.0±1	1.0
				36	35	20.45	21.0±1	1.0
				75	0	20.34	21.0±1	1.0
			16QAM	1	0	21.27	20.3±1	1.0
				1	37	21.18	20.3±1	1.0
				1	74	21.29	20.3±1	1.0
				36	0	19.51	20.3±1	1.0
				36	16	19.52	20.3±1	1.0
				36	35	19.46	20.3±1	1.0
				75	0	19.56	20.3±1	1.0
	40740	2605.0	QPSK	1	0	21.71	21.0±1	/
				1	37	21.76	21.0±1	/
				1	74	21.55	21.0±1	/
				36	0	20.7	21.0±1	1.0
				36	16	20.61	21.0±1	1.0
				36	35	20.67	21.0±1	1.0
				75	0	20.76	21.0±1	1.0
			16QAM	1	0	21.31	20.5±1	1.0
				1	37	21.22	20.5±1	1.0
				1	74	21.13	20.5±1	1.0
				36	0	19.74	20.5±1	1.0
				36	16	19.69	20.5±1	1.0
				36	35	19.69	20.5±1	1.0
				75	0	19.8	20.5±1	1.0
	41165	2647.5	QPSK	1	0	21.74	21.0±1	/
				1	37	21.74	21.0±1	/
				1	74	21.73	21.0±1	/
				36	0	20.6	21.0±1	1.0
				36	16	20.56	21.0±1	1.0
				36	35	20.55	21.0±1	1.0
				75	0	20.64	21.0±1	1.0
			16QAM	1	0	21.47	20.5±1	1.0
				1	37	21.33	20.5±1	1.0
				1	74	21.39	20.5±1	1.0
				36	0	19.74	20.5±1	1.0
				36	16	19.82	20.5±1	1.0
				36	35	19.81	20.5±1	1.0
				75	0	19.62	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	40340	2565.0	QPSK	1	0	21.26	20.5±1	/
				1	49	21.35	20.5±1	/
				1	99	21.48	20.5±1	/
				50	0	20.36	20.5±1	1.0
				50	24	20.37	20.5±1	1.0
				50	49	20.38	20.5±1	1.0
				100	0	20.42	20.5±1	1.0
			16QAM	1	0	20.54	20.0±1	1.0
				1	49	20.7	20.0±1	1.0
				1	99	20.61	20.0±1	1.0
				50	0	19.56	20.0±1	1.0
				50	24	19.58	20.0±1	1.0
				50	49	19.61	20.0±1	1.0
				100	0	19.47	20.0±1	1.0
	40740	2605.0	QPSK	1	0	21.74	21.0±1	/
				1	49	21.76	21.0±1	/
				1	99	21.66	21.0±1	/
				50	0	20.75	21.0±1	1.0
				50	24	20.76	21.0±1	1.0
				50	49	20.71	21.0±1	1.0
				100	0	20.65	21.0±1	1.0
			16QAM	1	0	20.55	20.0±1	1.0
				1	49	20.57	20.0±1	1.0
				1	99	20.53	20.0±1	1.0
				50	0	19.87	20.0±1	1.0
				50	24	19.91	20.0±1	1.0
				50	49	19.79	20.0±1	1.0
				100	0	19.72	20.0±1	1.0
	41140	2645.0	QPSK	1	0	22.03	21.5±1	/
				1	49	22.01	21.5±1	/
				1	99	21.87	21.5±1	/
				50	0	20.65	21.5±1	1.0
				50	24	20.53	21.5±1	1.0
				50	49	20.69	21.5±1	1.0
				100	0	20.64	21.5±1	1.0
			16QAM	1	0	21.86	21.0±1	1.0
				1	49	21.75	21.0±1	1.0
				1	99	21.87	21.0±1	1.0
				50	0	19.82	19.0±1	1.0
				50	24	19.72	19.0±1	1.0
				50	49	19.78	19.0±1	1.0
				100	0	19.7	19.0±1	1.0

LTE Band 66:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	131979	1710.7	QPSK	1	0	22.82	22.0±1	/
				1	2	22.7	22.0±1	/
				1	5	22.74	22.0±1	/
				3	0	22.66	22.0±1	/
				3	1	22.69	22.0±1	/
				3	2	22.63	22.0±1	/
				6	0	21.66	22.0±1	1.0
			16QAM	1	0	23.22	22.5±1	1.0
				1	2	23.14	22.5±1	1.0
				1	5	23.06	22.5±1	1.0
				3	0	21.76	21.0±1	1.0
				3	1	21.79	21.0±1	1.0
				3	2	21.81	21.0±1	1.0
				6	0	20.79	21.0±1	1.0
	132321	1744.9	QPSK	1	0	22.4	22.0±1	/
				1	2	22.44	22.0±1	/
				1	5	22.44	22.0±1	/
				3	0	22.44	22.0±1	/
				3	1	22.46	22.0±1	/
				3	2	22.46	22.0±1	/
				6	0	21.49	22.0±1	1.0
			16QAM	1	0	22.68	22.0±1	1.0
				1	2	22.7	22.0±1	1.0
				1	5	22.62	22.0±1	1.0
				3	0	21.77	21.0±1	1.0
				3	1	21.82	21.0±1	1.0
				3	2	21.81	21.0±1	1.0
				6	0	20.06	21.0±1	1.0
	132664	1779.2	QPSK	1	0	22.54	22.0±1	/
				1	2	22.5	22.0±1	/
				1	5	22.52	22.0±1	/
				3	0	22.37	22.0±1	/
				3	1	22.39	22.0±1	/
				3	2	22.39	22.0±1	/
				6	0	21.36	22.0±1	1.0
			16QAM	1	0	22.11	21.5±1	1.0
				1	2	22.18	21.5±1	1.0
				1	5	22.16	21.5±1	1.0
				3	0	21.87	21.5±1	1.0
				3	1	21.85	21.5±1	1.0
				3	2	21.83	21.5±1	1.0
				6	0	20.67	21.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	131987	1711.5	QPSK	1	0	22.63	22.0±1	/
				1	8	22.6	22.0±1	/
				1	14	22.57	22.0±1	/
				6	0	21.67	22.0±1	1.0
				6	4	21.62	22.0±1	1.0
				6	9	21.65	22.0±1	1.0
				15	0	21.58	22.0±1	1.0
			16QAM	1	0	22.82	22.0±1	1.0
				1	8	22.73	22.0±1	1.0
				1	14	22.81	22.0±1	1.0
				8	0	20.66	20.0±1	1.0
				8	4	20.7	20.0±1	1.0
				8	9	20.74	20.0±1	1.0
				15	0	20.69	20.0±1	1.0
	132321	1744.9	QPSK	1	0	22.38	22.0±1	/
				1	8	22.33	22.0±1	/
				1	14	22.41	22.0±1	/
				6	0	21.47	22.0±1	1.0
				6	4	21.47	22.0±1	1.0
				6	9	21.38	22.0±1	1.0
				15	0	21.41	22.0±1	1.0
			16QAM	1	0	22.68	22.0±1	1.0
				1	8	22.63	22.0±1	1.0
				1	14	22.72	22.0±1	1.0
				6	0	20.71	20.0±1	1.0
				6	4	20.76	20.0±1	1.0
				6	9	20.76	20.0±1	1.0
				15	0	20.57	20.0±1	1.0
	132656	1778.4	QPSK	1	0	22.49	22.0±1	/
				1	8	22.57	22.0±1	/
				1	14	22.62	22.0±1	/
				6	0	21.3	22.0±1	1.0
				6	4	21.41	22.0±1	1.0
				6	9	21.34	22.0±1	1.0
				15	0	21.39	22.0±1	1.0
			16QAM	1	0	22.1	21.5±1	1.0
				1	8	21.99	21.5±1	1.0
				1	14	22.03	21.5±1	1.0
				8	0	20.52	21.5±1	1.0
				8	4	20.58	21.5±1	1.0
				8	9	20.55	21.5±1	1.0
				15	0	20.49	21.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	131997	1712.5	QPSK	1	0	22.48	22.0±1	/
				1	49	22.45	22.0±1	/
				1	99	22.5	22.0±1	/
				12	0	21.58	22.0±1	1.0
				12	24	21.57	22.0±1	1.0
				12	49	21.55	22.0±1	1.0
				25	0	21.56	22.0±1	1.0
			16QAM	1	0	21.95	21.0±1	1.0
				1	49	21.96	21.0±1	1.0
				1	99	21.98	21.0±1	1.0
				12	0	20.68	21.0±1	1.0
				12	24	20.66	21.0±1	1.0
				12	49	20.63	21.0±1	1.0
				25	0	20.75	21.0±1	1.0
	132321	1744.9	QPSK	1	0	22.49	22.0±1	/
				1	49	22.4	22.0±1	/
				1	99	22.45	22.0±1	/
				12	0	21.4	22.0±1	1.0
				12	24	21.36	22.0±1	1.0
				12	49	21.39	22.0±1	1.0
				25	0	21.44	22.0±1	1.0
			16QAM	1	0	22.22	21.5±1	1.0
				1	49	22.23	21.5±1	1.0
				1	99	22.2	21.5±1	1.0
				12	0	20.43	20.0±1	1.0
				12	24	20.42	20.0±1	1.0
				12	49	20.49	20.0±1	1.0
				25	0	20.49	20.0±1	1.0
	132646	1777.4	QPSK	1	0	22.39	22.0±1	/
				1	49	22.31	22.0±1	/
				1	99	22.36	22.0±1	/
				12	0	21.48	22.0±1	1.0
				12	24	21.43	22.0±1	1.0
				12	49	21.32	22.0±1	1.0
				25	0	21.41	22.0±1	1.0
			16QAM	1	0	22.27	22.0±1	1.0
				1	49	22.19	22.0±1	1.0
				1	99	22.16	22.0±1	1.0
				12	0	20.47	20.0±1	1.0
				12	24	20.45	20.0±1	1.0
				12	49	20.43	20.0±1	1.0
				25	0	20.56	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	132022	1715	QPSK	1	0	22.58	22.0±1	/
				1	49	22.56	22.0±1	/
				1	99	22.64	22.0±1	/
				25	0	21.49	22.0±1	1.0
				25	24	21.64	22.0±1	1.0
				25	49	21.65	22.0±1	1.0
				50	0	21.56	22.0±1	1.0
			16QAM	1	0	22.72	22.0±1	1.0
				1	49	22.73	22.0±1	1.0
				1	99	22.72	22.0±1	1.0
				25	0	20.76	20.0±1	1.0
				25	24	20.68	20.0±1	1.0
				25	49	20.69	20.0±1	1.0
				50	0	20.67	20.0±1	1.0
	132321	1744.9	QPSK	1	0	22.34	22.0±1	/
				1	49	22.32	22.0±1	/
				1	99	22.34	22.0±1	/
				25	0	21.35	22.0±1	1.0
				25	24	21.29	22.0±1	1.0
				25	49	21.37	22.0±1	1.0
				50	0	21.34	22.0±1	1.0
			16QAM	1	0	22.6	22.0±1	1.0
				1	49	22.58	22.0±1	1.0
				1	99	22.67	22.0±1	1.0
				25	0	20.52	20.0±1	1.0
				25	24	20.48	20.0±1	1.0
				25	49	20.58	20.0±1	1.0
				50	0	20.48	20.0±1	1.0
	132621	1774.9	QPSK	1	0	22.6	22.0±1	/
				1	49	22.53	22.0±1	/
				1	99	22.56	22.0±1	/
				25	0	21.35	22.0±1	1.0
				25	24	21.33	22.0±1	1.0
				25	49	21.37	22.0±1	1.0
				50	0	21.42	22.0±1	1.0
			16QAM	1	0	22.31	22.0±1	1.0
				1	49	22.18	22.0±1	1.0
				1	99	22.16	22.0±1	1.0
				25	0	20.65	20.0±1	1.0
				25	24	20.63	20.0±1	1.0
				25	49	20.62	20.0±1	1.0
				50	0	20.48	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	132097	1722.5	QPSK	1	0	22.7	22.0±1	/
				1	49	22.65	22.0±1	/
				1	99	22.63	22.0±1	/
				36	0	21.54	22.0±1	1.0
				36	24	21.54	22.0±1	1.0
				36	49	21.41	22.0±1	1.0
				75	0	21.47	22.0±1	1.0
			16QAM	1	0	22.82	22.0±1	1.0
				1	49	22.79	22.0±1	1.0
				1	99	22.7	22.0±1	1.0
				36	0	20.57	20.0±1	1.0
				36	24	20.6	20.0±1	1.0
				36	49	20.63	20.0±1	1.0
				75	0	20.66	20.0±1	1.0
	132321	1744.9	QPSK	1	0	22.41	22.0±1	/
				1	49	22.41	22.0±1	/
				1	99	22.49	22.0±1	/
				36	0	21.38	22.0±1	1.0
				36	24	21.25	22.0±1	1.0
				36	49	21.33	22.0±1	1.0
				75	0	21.25	22.0±1	1.0
			16QAM	1	0	22.06	22.0±1	1.0
				1	49	22.05	22.0±1	1.0
				1	99	22.04	22.0±1	1.0
				36	0	20.54	20.0±1	1.0
				36	24	20.52	20.0±1	1.0
				36	49	20.61	20.0±1	1.0
				75	0	20.36	20.0±1	1.0
	132546	1767.4	QPSK	1	0	22.48	22.0±1	/
				1	49	22.41	22.0±1	/
				1	99	22.37	22.0±1	/
				36	0	21.5	22.0±1	1.0
				36	24	21.44	22.0±1	1.0
				36	49	21.42	22.0±1	1.0
				75	0	21.3	22.0±1	1.0
			16QAM	1	0	22.94	22.0±1	1.0
				1	49	22.85	22.0±1	1.0
				1	99	22.78	22.0±1	1.0
				36	0	20.55	20.0±1	1.0
				36	24	20.5	20.0±1	1.0
				36	49	20.49	20.0±1	1.0
				75	0	20.54	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	132072	1720	QPSK	1	0	22.7	22.0±1	/
				1	49	22.66	22.0±1	/
				1	99	22.61	22.0±1	/
				50	0	21.54	22.0±1	1.0
				50	24	21.47	22.0±1	1.0
				50	49	21.48	22.0±1	1.0
				100	0	21.48	22.0±1	1.0
			16QAM	1	0	21.91	21.0±1	1.0
				1	49	21.89	21.0±1	1.0
				1	99	21.81	21.0±1	1.0
				50	0	20.63	21.0±1	1.0
				50	24	20.64	21.0±1	1.0
				50	49	20.58	21.0±1	1.0
				100	0	20.56	21.0±1	1.0
	132321	1744.9	QPSK	1	0	22.23	22.0±1	/
				1	49	22.25	22.0±1	/
				1	99	22.42	22.0±1	/
				50	0	21.37	22.0±1	1.0
				50	24	21.3	22.0±1	1.0
				50	49	21.41	22.0±1	1.0
				100	0	21.33	22.0±1	1.0
			16QAM	1	0	22.32	22.0±1	1.0
				1	49	22.36	22.0±1	1.0
				1	99	22.34	22.0±1	1.0
				50	0	20.52	20.0±1	1.0
				50	24	20.49	20.0±1	1.0
				50	49	20.55	20.0±1	1.0
				100	0	20.3	20.0±1	1.0
	132471	1759.9	QPSK	1	0	22.6	22.0±1	/
				1	49	22.58	22.0±1	/
				1	99	22.53	22.0±1	/
				50	0	21.47	22.0±1	1.0
				50	24	21.48	22.0±1	1.0
				50	49	21.38	22.0±1	1.0
				100	0	21.41	22.0±1	1.0
			16QAM	1	0	22.02	21.5±1	1.0
				1	49	22.02	21.5±1	1.0
				1	99	21.91	21.5±1	1.0
				50	0	20.5	20.0±1	1.0
				50	24	20.47	20.0±1	1.0
				50	49	20.42	20.0±1	1.0
				100	0	20.46	20.0±1	1.0

Power Level P2:**LTE Band 2:**

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	18607	1850.7	QPSK	1	0	17.36	17.8±1	/
				1	2	17.47	17.8±1	/
				1	5	17.37	17.8±1	/
				3	0	17.46	17.8±1	/
				3	1	17.49	17.8±1	/
				3	2	17.41	17.8±1	/
				6	0	17.36	17.8±1	1.0
			16QAM	1	0	17.52	17.8±1	1.0
				1	2	17.59	17.8±1	1.0
				1	5	17.5	17.8±1	1.0
				3	0	17.53	17.8±1	1.0
				3	1	17.57	17.8±1	1.0
				3	2	17.55	17.8±1	1.0
				6	0	17.54	17.8±1	1.0
	18900	1880	QPSK	1	0	17.21	17.8±1	/
				1	2	17.33	17.8±1	/
				1	5	17.22	17.8±1	/
				3	0	17.29	17.8±1	/
				3	1	17.35	17.8±1	/
				3	2	17.28	17.8±1	/
				6	0	17.17	17.8±1	1.0
			16QAM	1	0	17.59	17.8±1	1.0
				1	2	17.72	17.8±1	1.0
				1	5	17.62	17.8±1	1.0
				3	0	17.55	17.8±1	1.0
				3	1	17.61	17.8±1	1.0
				3	2	17.53	17.8±1	1.0
				6	0	17.16	17.8±1	1.0
	19193	1909.3	QPSK	1	0	17.24	17.8±1	/
				1	2	17.37	17.8±1	/
				1	5	17.23	17.8±1	/
				3	0	17.37	17.8±1	/
				3	1	17.46	17.8±1	/
				3	2	17.46	17.8±1	/
				6	0	17.39	17.8±1	1.0
			16QAM	1	0	17.37	17.8±1	1.0
				1	2	17.47	17.8±1	1.0
				1	5	17.41	17.8±1	1.0
				3	0	17.61	17.8±1	1.0
				3	1	17.7	17.8±1	1.0
				3	2	17.64	17.8±1	1.0
				6	0	17.59	17.8±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	18615	1851.5	QPSK	1	0	17.35	17.8±1	/
				1	8	17.48	17.8±1	/
				1	14	17.34	17.8±1	/
				6	0	17.35	17.8±1	1.0
				6	4	17.4	17.8±1	1.0
				6	9	17.34	17.8±1	1.0
				15	0	17.4	17.8±1	1.0
			16QAM	1	0	17.35	17.8±1	1.0
				1	8	17.42	17.8±1	1.0
				1	14	17.31	17.8±1	1.0
				6	0	17.52	17.8±1	1.0
				6	4	17.53	17.8±1	1.0
				6	9	17.5	17.8±1	1.0
				15	0	17.48	17.8±1	1.0
	18900	1880	QPSK	1	0	17.24	17.8±1	/
				1	8	17.39	17.8±1	/
				1	14	17.29	17.8±1	/
				6	0	17.22	17.8±1	1.0
				6	4	17.24	17.8±1	1.0
				6	9	17.2	17.8±1	1.0
				15	0	17.2	17.8±1	1.0
			16QAM	1	0	17.64	17.8±1	1.0
				1	8	17.79	17.8±1	1.0
				1	14	17.62	17.8±1	1.0
				6	0	17.37	17.8±1	1.0
				6	4	17.4	17.8±1	1.0
				6	9	17.32	17.8±1	1.0
				15	0	17.31	17.8±1	1.0
	19185	1908.5	QPSK	1	0	17.32	17.8±1	/
				1	8	17.41	17.8±1	/
				1	14	17.26	17.8±1	/
				6	0	17.33	17.8±1	1.0
				6	4	17.37	17.8±1	1.0
				6	9	17.3	17.8±1	1.0
				15	0	17.36	17.8±1	1.0
			16QAM	1	0	17.41	17.8±1	1.0
				1	8	17.5	17.8±1	1.0
				1	14	17.36	17.8±1	1.0
				6	0	17.38	17.8±1	1.0
				6	4	17.42	17.8±1	1.0
				6	9	17.4	17.8±1	1.0
				15	0	17.33	17.8±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	18625	1852.5	QPSK	1	0	17.26	17.8±1	/
				1	12	17.5	17.8±1	/
				1	24	17.23	17.8±1	/
				12	0	17.34	17.8±1	1.0
				12	6	17.41	17.8±1	1.0
				12	11	17.37	17.8±1	1.0
				25	0	17.36	17.8±1	1.0
			16QAM	1	0	17.52	17.8±1	1.0
				1	12	17.72	17.8±1	1.0
				1	24	17.46	17.8±1	1.0
				12	0	17.51	17.8±1	1.0
				12	6	17.55	17.8±1	1.0
				12	11	17.47	17.8±1	1.0
				25	0	17.46	17.8±1	1.0
	18900	1880	QPSK	1	0	17.19	17.8±1	/
				1	12	17.38	17.8±1	/
				1	24	17.16	17.8±1	/
				12	0	17.26	17.8±1	1.0
				12	6	17.29	17.8±1	1.0
				12	11	17.26	17.8±1	1.0
				25	0	17.27	17.8±1	1.0
			16QAM	1	0	17.71	17.8±1	1.0
				1	12	17.89	17.8±1	1.0
				1	24	17.67	17.8±1	1.0
				12	0	17.41	17.8±1	1.0
				12	6	17.48	17.8±1	1.0
				12	11	17.39	17.8±1	1.0
				25	0	17.37	17.8±1	1.0
	19175	1907.5	QPSK	1	0	17.23	17.8±1	/
				1	12	17.55	17.8±1	/
				1	24	17.27	17.8±1	/
				12	0	17.36	17.8±1	1.0
				12	6	17.38	17.8±1	1.0
				12	11	17.34	17.8±1	1.0
				25	0	17.36	17.8±1	1.0
			16QAM	1	0	17.43	17.8±1	1.0
				1	12	17.64	17.8±1	1.0
				1	24	17.39	17.8±1	1.0
				12	0	17.45	17.8±1	1.0
				12	6	17.45	17.8±1	1.0
				12	11	17.39	17.8±1	1.0
				25	0	17.33	17.8±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	18650	1855	QPSK	1	0	17.35	17.8±1	/
				1	24	17.4	17.8±1	/
				1	49	17.25	17.8±1	/
				25	0	17.38	17.8±1	1.0
				25	12	17.42	17.8±1	1.0
				25	24	17.35	17.8±1	1.0
				50	0	17.36	17.8±1	1.0
			16QAM	1	0	17.37	17.8±1	1.0
				1	24	17.46	17.8±1	1.0
				1	49	17.29	17.8±1	1.0
				25	0	17.43	17.8±1	1.0
				25	12	17.48	17.8±1	1.0
				25	24	17.44	17.8±1	1.0
				50	0	17.41	17.8±1	1.0
	18900	1880	QPSK	1	0	17.27	17.8±1	/
				1	24	17.36	17.8±1	/
				1	49	17.26	17.8±1	/
				25	0	17.24	17.8±1	1.0
				25	12	17.29	17.8±1	1.0
				25	24	17.24	17.8±1	1.0
				50	0	17.26	17.8±1	1.0
			16QAM	1	0	17.62	17.8±1	1.0
				1	24	17.73	17.8±1	1.0
				1	49	17.64	17.8±1	1.0
				25	0	17.35	17.8±1	1.0
				25	12	17.36	17.8±1	1.0
				25	24	17.35	17.8±1	1.0
				50	0	17.32	17.8±1	1.0
	19150	1905	QPSK	1	0	17.23	17.8±1	/
				1	24	17.31	17.8±1	/
				1	49	17.27	17.8±1	/
				25	0	17.3	17.8±1	1.0
				25	12	17.37	17.8±1	1.0
				25	24	17.24	17.8±1	1.0
				50	0	17.3	17.8±1	1.0
			16QAM	1	0	17.36	17.8±1	1.0
				1	24	17.48	17.8±1	1.0
				1	49	17.36	17.8±1	1.0
				25	0	17.46	17.8±1	1.0
				25	12	17.47	17.8±1	1.0
				25	24	17.34	17.8±1	1.0
				50	0	17.36	17.8±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	18675	1857.5	QPSK	1	0	17.27	17.5±1	/
				1	37	17.47	17.5±1	/
				1	74	17.08	17.5±1	/
				36	0	17.36	17.5±1	1.0
				36	16	17.37	17.5±1	1.0
				36	35	17.27	17.5±1	1.0
				75	0	17.29	17.5±1	1.0
			16QAM	1	0	17.28	17.5±1	1.0
				1	37	17.39	17.5±1	1.0
				1	74	17.11	17.5±1	1.0
				36	0	17.36	17.5±1	1.0
				36	16	17.37	17.5±1	1.0
				36	35	17.28	17.5±1	1.0
				75	0	17.32	17.5±1	1.0
	18900	1880	QPSK	1	0	17.2	17.5±1	/
				1	37	17.37	17.5±1	/
				1	74	17.19	17.5±1	/
				36	0	17.2	17.5±1	1.0
				36	16	17.24	17.5±1	1.0
				36	35	17.19	17.5±1	1.0
				75	0	17.2	17.5±1	1.0
			16QAM	1	0	17.54	17.5±1	1.0
				1	37	17.76	17.5±1	1.0
				1	74	17.55	17.5±1	1.0
				36	0	17.28	17.5±1	1.0
				36	16	17.32	17.5±1	1.0
				36	35	17.27	17.5±1	1.0
				75	0	17.28	17.5±1	1.0
	19125	1902.5	QPSK	1	0	17.24	17.5±1	/
				1	37	17.44	17.5±1	/
				1	74	17.25	17.5±1	/
				36	0	17.28	17.5±1	1.0
				36	16	17.31	17.5±1	1.0
				36	35	17.29	17.5±1	1.0
				75	0	17.29	17.5±1	1.0
			16QAM	1	0	18.04	17.5±1	1.0
				1	37	17.9	17.5±1	1.0
				1	74	17.74	17.5±1	1.0
				36	0	17.3	17.5±1	1.0
				36	16	17.29	17.5±1	1.0
				36	35	17.25	17.5±1	1.0
				75	0	17.29	17.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	18700	1860	QPSK	1	0	17.09	17.5±1	/
				1	49	17.34	17.5±1	/
				1	99	16.89	17.5±1	/
				50	0	17.35	17.5±1	1.0
				50	24	17.35	17.5±1	1.0
				50	49	17.28	17.5±1	1.0
				100	0	17.28	17.5±1	1.0
			16QAM	1	0	17.69	17.5±1	1.0
				1	49	17.76	17.5±1	1.0
				1	99	17.47	17.5±1	1.0
				50	0	17.45	17.5±1	1.0
				50	24	17.41	17.5±1	1.0
				50	49	17.31	17.5±1	1.0
				100	0	17.38	17.5±1	1.0
	18900	1880	QPSK	1	0	16.99	17.5±1	/
				1	49	17.3	17.5±1	/
				1	99	16.95	17.5±1	/
				50	0	17.34	17.5±1	1.0
				50	24	17.28	17.5±1	1.0
				50	49	17.24	17.5±1	1.0
				100	0	17.27	17.5±1	1.0
			16QAM	1	0	17.56	17.5±1	1.0
				1	49	17.34	17.5±1	1.0
				1	99	17.57	17.5±1	1.0
				50	0	17.39	17.5±1	1.0
				50	24	17.35	17.5±1	1.0
				50	49	17.3	17.5±1	1.0
				100	0	17.33	17.5±1	1.0
	19100	1900	QPSK	1	0	17.02	17.5±1	/
				1	49	17.39	17.5±1	/
				1	99	17.08	17.5±1	/
				50	0	17.9	17.5±1	1.0
				50	24	17.36	17.5±1	1.0
				50	49	17.28	17.5±1	1.0
				100	0	17.34	17.5±1	1.0
			16QAM	1	0	17.52	17.5±1	1.0
				1	49	17.88	17.5±1	1.0
				1	99	17.5	17.5±1	1.0
				50	0	17.38	17.5±1	1.0
				50	24	17.39	17.5±1	1.0
				50	49	17.3	17.5±1	1.0
				100	0	17.38	17.5±1	1.0

LTE Band 4:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	19957	1710.7	QPSK	1	0	18.74	18.5±1	/
				1	2	18.87	18.5±1	/
				1	5	18.7	18.5±1	/
				3	0	18.86	18.5±1	/
				3	1	18.92	18.5±1	/
				3	2	18.96	18.5±1	/
				6	0	18.74	18.5±1	1.0
			16QAM	1	0	18.94	18.5±1	1.0
				1	2	19.05	18.5±1	1.0
				1	5	18.9	18.5±1	1.0
				3	0	18.97	18.5±1	1.0
				3	1	19.36	18.5±1	1.0
				3	2	18.96	18.5±1	1.0
				6	0	18.99	18.5±1	1.0
	20175	1732.5	QPSK	1	0	18.46	18.5±1	/
				1	2	18.6	18.5±1	/
				1	5	18.47	18.5±1	/
				3	0	18.62	18.5±1	/
				3	1	18.66	18.5±1	/
				3	2	18.59	18.5±1	/
				6	0	18.55	18.5±1	1.0
			16QAM	1	0	18.88	18.5±1	1.0
				1	2	19.01	18.5±1	1.0
				1	5	18.92	18.5±1	1.0
				3	0	18.82	18.5±1	1.0
				3	1	18.88	18.5±1	1.0
				3	2	18.82	18.5±1	1.0
				6	0	18.47	18.5±1	1.0
	20393	1754.3	QPSK	1	0	18.65	18.5±1	/
				1	2	18.77	18.5±1	/
				1	5	18.61	18.5±1	/
				3	0	18.78	18.5±1	/
				3	1	18.85	18.5±1	/
				3	2	18.85	18.5±1	/
				6	0	18.69	18.5±1	1.0
			16QAM	1	0	18.81	18.5±1	1.0
				1	2	18.9	18.5±1	1.0
				1	5	18.82	18.5±1	1.0
				3	0	19.06	18.5±1	1.0
				3	1	19.11	18.5±1	1.0
				3	2	19.06	18.5±1	1.0
				6	0	18.98	18.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	19965	1711.5	QPSK	1	0	18.8	18.5±1	/
				1	8	18.89	18.5±1	/
				1	14	18.72	18.5±1	/
				6	0	18.8	18.5±1	1.0
				6	4	18.8	18.5±1	1.0
				6	9	18.77	18.5±1	1.0
				15	0	18.81	18.5±1	1.0
			16QAM	1	0	18.79	18.5±1	1.0
				1	8	18.92	18.5±1	1.0
				1	14	18.71	18.5±1	1.0
				8	0	18.98	18.5±1	1.0
				8	4	18.99	18.5±1	1.0
				8	9	18.94	18.5±1	1.0
				15	0	18.91	18.5±1	1.0
	20175	1732.5	QPSK	1	0	18.57	18.5±1	/
				1	8	18.66	18.5±1	/
				1	14	18.57	18.5±1	/
				6	0	18.58	18.5±1	1.0
				6	4	18.59	18.5±1	1.0
				6	9	18.59	18.5±1	1.0
				15	0	18.52	18.5±1	1.0
			16QAM	1	0	18.94	18.5±1	1.0
				1	8	19.14	18.5±1	1.0
				1	14	18.94	18.5±1	1.0
				6	0	18.67	18.5±1	1.0
				6	4	18.66	18.5±1	1.0
				6	9	18.64	18.5±1	1.0
				15	0	18.61	18.5±1	1.0
	20385	1753.5	QPSK	1	0	18.71	18.5±1	/
				1	8	18.87	18.5±1	/
				1	14	18.7	18.5±1	/
				6	0	18.77	18.5±1	1.0
				6	4	18.81	18.5±1	1.0
				6	9	18.78	18.5±1	1.0
				15	0	18.78	18.5±1	1.0
			16QAM	1	0	18.84	18.5±1	1.0
				1	8	19	18.5±1	1.0
				1	14	18.85	18.5±1	1.0
				8	0	18.87	18.5±1	1.0
				8	4	18.91	18.5±1	1.0
				8	9	18.89	18.5±1	1.0
				15	0	18.83	18.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	19975	1712.5	QPSK	1	0	18.71	18.5±1	/
				1	49	18.92	18.5±1	/
				1	99	18.63	18.5±1	/
				12	0	18.79	18.5±1	1.0
				12	24	18.86	18.5±1	1.0
				12	49	18.81	18.5±1	1.0
				25	0	18.79	18.5±1	1.0
			16QAM	1	0	18.96	18.5±1	1.0
				1	49	19.1	18.5±1	1.0
				1	99	18.89	18.5±1	1.0
				12	0	18.92	18.5±1	1.0
				12	24	19.02	18.5±1	1.0
				12	49	18.93	18.5±1	1.0
				25	0	18.94	18.5±1	1.0
	20175	1732.5	QPSK	1	0	18.45	18.5±1	/
				1	49	18.68	18.5±1	/
				1	99	18.4	18.5±1	/
				12	0	18.57	18.5±1	1.0
				12	24	18.6	18.5±1	1.0
				12	49	18.49	18.5±1	1.0
				25	0	18.52	18.5±1	1.0
			16QAM	1	0	19.01	18.5±1	1.0
				1	49	19.25	18.5±1	1.0
				1	99	18.97	18.5±1	1.0
				12	0	18.74	18.5±1	1.0
				12	24	18.77	18.5±1	1.0
				12	49	18.66	18.5±1	1.0
				25	0	18.65	18.5±1	1.0
	20375	1752.5	QPSK	1	0	18.66	18.5±1	/
				1	49	18.98	18.5±1	/
				1	99	18.72	18.5±1	/
				12	0	18.74	18.5±1	1.0
				12	24	18.82	18.5±1	1.0
				12	49	18.79	18.5±1	1.0
				25	0	18.77	18.5±1	1.0
			16QAM	1	0	18.77	18.5±1	1.0
				1	49	18.98	18.5±1	1.0
				1	99	18.86	18.5±1	1.0
				12	0	18.82	18.5±1	1.0
				12	24	18.94	18.5±1	1.0
				12	49	18.87	18.5±1	1.0
				25	0	18.8	18.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20000	1715	QPSK	1	0	18.82	18.5±1	/
				1	49	18.78	18.5±1	/
				1	99	18.67	18.5±1	/
				25	0	18.74	18.5±1	1.0
				25	24	18.75	18.5±1	1.0
				25	49	18.72	18.5±1	1.0
				50	0	18.74	18.5±1	1.0
			16QAM	1	0	18.75	18.5±1	1.0
				1	49	18.77	18.5±1	1.0
				1	99	18.75	18.5±1	1.0
				25	0	18.9	18.5±1	1.0
				25	24	18.88	18.5±1	1.0
				25	49	18.79	18.5±1	1.0
				50	0	18.81	18.5±1	1.0
	20175	1732.5	QPSK	1	0	18.54	18.5±1	/
				1	49	18.62	18.5±1	/
				1	99	18.51	18.5±1	/
				25	0	18.59	18.5±1	1.0
				25	24	18.57	18.5±1	1.0
				25	49	18.5	18.5±1	1.0
				50	0	18.55	18.5±1	1.0
			16QAM	1	0	18.92	18.5±1	1.0
				1	49	19	18.5±1	1.0
				1	99	18.96	18.5±1	1.0
				25	0	18.67	18.5±1	1.0
				25	24	18.71	18.5±1	1.0
				25	49	18.64	18.5±1	1.0
				50	0	18.63	18.5±1	1.0
	20350	1750	QPSK	1	0	18.64	18.5±1	/
				1	49	18.69	18.5±1	/
				1	99	18.75	18.5±1	/
				25	0	18.65	18.5±1	1.0
				25	24	18.68	18.5±1	1.0
				25	49	18.74	18.5±1	1.0
				50	0	18.73	18.5±1	1.0
			16QAM	1	0	18.7	18.5±1	1.0
				1	49	18.87	18.5±1	1.0
				1	99	18.82	18.5±1	1.0
				25	0	18.9	18.5±1	1.0
				25	24	18.88	18.5±1	1.0
				25	49	19	18.5±1	1.0
				50	0	18.94	18.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	20025	1717.5	QPSK	1	0	18.65	18.5±1	/
				1	49	18.78	18.5±1	/
				1	99	18.47	18.5±1	/
				36	0	18.69	18.5±1	1.0
				36	24	18.75	18.5±1	1.0
				36	49	18.69	18.5±1	1.0
				75	0	18.71	18.5±1	1.0
			16QAM	1	0	18.68	18.5±1	1.0
				1	49	18.78	18.5±1	1.0
				1	99	18.53	18.5±1	1.0
				36	0	18.7	18.5±1	1.0
				36	24	18.74	18.5±1	1.0
				36	49	18.7	18.5±1	1.0
				75	0	18.73	18.5±1	1.0
	20175	1732.5	QPSK	1	0	18.53	18.5±1	/
				1	49	18.74	18.5±1	/
				1	99	18.51	18.5±1	/
				36	0	18.68	18.5±1	1.0
				36	24	18.69	18.5±1	1.0
				36	49	18.62	18.5±1	1.0
				75	0	18.64	18.5±1	1.0
			16QAM	1	0	18.89	18.5±1	1.0
				1	49	19.09	18.5±1	1.0
				1	99	18.89	18.5±1	1.0
				36	0	18.65	18.5±1	1.0
				36	24	18.63	18.5±1	1.0
				36	49	18.67	18.5±1	1.0
				75	0	18.61	18.5±1	1.0
	20325	1747.5	QPSK	1	0	18.46	18.5±1	/
				1	49	18.78	18.5±1	/
				1	99	18.66	18.5±1	/
				36	0	18.7	18.5±1	1.0
				36	24	18.72	18.5±1	1.0
				36	49	18.77	18.5±1	1.0
				75	0	18.7	18.5±1	1.0
			16QAM	1	0	18.98	18.5±1	1.0
				1	49	19.32	18.5±1	1.0
				1	99	19.23	18.5±1	1.0
				36	0	18.63	18.5±1	1.0
				36	24	18.71	18.5±1	1.0
				36	49	18.78	18.5±1	1.0
				75	0	18.75	18.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	20050	1720	QPSK	1	0	18.46	18.5±1	/
				1	49	18.7	18.5±1	/
				1	99	18.38	18.5±1	/
				50	0	18.66	18.5±1	1.0
				50	24	19.22	18.5±1	1.0
				50	49	18.6	18.5±1	1.0
				100	0	18.64	18.5±1	1.0
			16QAM	1	0	19.09	18.5±1	1.0
				1	49	19.03	18.5±1	1.0
				1	99	18.92	18.5±1	1.0
				50	0	18.74	18.5±1	1.0
				50	24	18.81	18.5±1	1.0
				50	49	18.68	18.5±1	1.0
				100	0	18.73	18.5±1	1.0
	20175	1732.5	QPSK	1	0	18.28	18.5±1	/
				1	49	18.64	18.5±1	/
				1	99	18.3	18.5±1	/
				50	0	18.67	18.5±1	1.0
				50	24	18.59	18.5±1	1.0
				50	49	18.54	18.5±1	1.0
				100	0	18.59	18.5±1	1.0
			16QAM	1	0	18.87	18.5±1	1.0
				1	49	19.13	18.5±1	1.0
				1	99	18.84	18.5±1	1.0
				50	0	18.71	18.5±1	1.0
				50	24	18.67	18.5±1	1.0
				50	49	18.67	18.5±1	1.0
				100	0	18.66	18.5±1	1.0
	20300	1745	QPSK	1	0	18.24	18.5±1	/
				1	49	18.72	18.5±1	/
				1	99	18.49	18.5±1	/
				50	0	18.66	18.5±1	1.0
				50	24	18.65	18.5±1	1.0
				50	49	18.69	18.5±1	1.0
				100	0	18.67	18.5±1	1.0
			16QAM	1	0	18.75	18.5±1	1.0
				1	49	18.71	18.5±1	1.0
				1	99	19.04	18.5±1	1.0
				50	0	18.69	18.5±1	1.0
				50	24	18.71	18.5±1	1.0
				50	49	18.81	18.5±1	1.0
				100	0	18.78	18.5±1	1.0

LTE Band 7:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	20775	2502.5	QPSK	1	0	18.22	18.5±1	/
				1	49	18.47	18.5±1	/
				1	99	18.25	18.5±1	/
				12	0	18.25	18.5±1	1.0
				12	24	18.35	18.5±1	1.0
				12	49	18.33	18.5±1	1.0
				25	0	18.32	18.5±1	1.0
			16QAM	1	0	18.35	18.5±1	1.0
				1	49	18.56	18.5±1	1.0
				1	99	18.39	18.5±1	1.0
				12	0	18.32	18.5±1	1.0
				12	24	18.39	18.5±1	1.0
				12	49	18.36	18.5±1	1.0
				25	0	18.27	18.5±1	1.0
	21100	2535	QPSK	1	0	18.24	18.5±1	/
				1	49	18.47	18.5±1	/
				1	99	18.25	18.5±1	/
				12	0	18.26	18.5±1	1.0
				12	24	18.28	18.5±1	1.0
				12	49	18.24	18.5±1	1.0
				25	0	18.26	18.5±1	1.0
			16QAM	1	0	18.35	18.5±1	1.0
				1	49	18.6	18.5±1	1.0
				1	99	18.32	18.5±1	1.0
				12	0	18.28	18.5±1	1.0
				12	24	18.31	18.5±1	1.0
				12	49	18.31	18.5±1	1.0
				25	0	18.25	18.5±1	1.0
	21425	2567.5	QPSK	1	0	18.45	18.5±1	/
				1	49	18.64	18.5±1	/
				1	99	18.43	18.5±1	/
				12	0	18.47	18.5±1	1.0
				12	24	18.49	18.5±1	1.0
				12	49	18.44	18.5±1	1.0
				25	0	18.44	18.5±1	1.0
			16QAM	1	0	18.9	18.5±1	1.0
				1	49	19.04	18.5±1	1.0
				1	99	18.86	18.5±1	1.0
				12	0	18.58	18.5±1	1.0
				12	24	18.63	18.5±1	1.0
				12	49	18.55	18.5±1	1.0
				25	0	18.48	18.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20800	2505	QPSK	1	0	18.3	18.5±1	/
				1	49	18.47	18.5±1	/
				1	99	18.4	18.5±1	/
				25	0	18.36	18.5±1	1.0
				25	24	18.37	18.5±1	1.0
				25	49	18.39	18.5±1	1.0
				50	0	18.35	18.5±1	1.0
			16QAM	1	0	18.18	18.5±1	1.0
				1	49	18.35	18.5±1	1.0
				1	99	18.24	18.5±1	1.0
				25	0	18.36	18.5±1	1.0
				25	24	18.39	18.5±1	1.0
				25	49	18.42	18.5±1	1.0
				50	0	18.33	18.5±1	1.0
	21100	2535	QPSK	1	0	18.29	18.5±1	/
				1	49	18.41	18.5±1	/
				1	99	18.26	18.5±1	/
				25	0	18.29	18.5±1	1.0
				25	24	18.3	18.5±1	1.0
				25	49	18.3	18.5±1	1.0
				50	0	18.28	18.5±1	1.0
			16QAM	1	0	18.59	18.5±1	1.0
				1	49	18.69	18.5±1	1.0
				1	99	18.58	18.5±1	1.0
				25	0	18.33	18.5±1	1.0
				25	24	18.32	18.5±1	1.0
				25	49	18.32	18.5±1	1.0
				50	0	18.29	18.5±1	1.0
	21400	2565	QPSK	1	0	18.42	18.5±1	/
				1	49	18.54	18.5±1	/
				1	99	18.39	18.5±1	/
				25	0	18.49	18.5±1	1.0
				25	24	18.48	18.5±1	1.0
				25	49	18.49	18.5±1	1.0
				50	0	18.47	18.5±1	1.0
			16QAM	1	0	18.45	18.5±1	1.0
				1	49	18.55	18.5±1	1.0
				1	99	18.41	18.5±1	1.0
				25	0	18.53	18.5±1	1.0
				25	24	18.58	18.5±1	1.0
				25	49	18.55	18.5±1	1.0
				50	0	18.49	18.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	20825	2507.5	QPSK	1	0	18.2	18.5±1	/
				1	49	18.5	18.5±1	/
				1	99	18.23	18.5±1	/
				36	0	18.35	18.5±1	1.0
				36	24	18.4	18.5±1	1.0
				36	49	18.43	18.5±1	1.0
				75	0	18.39	18.5±1	1.0
			16QAM	1	0	18.08	18.5±1	1.0
				1	49	18.41	18.5±1	1.0
				1	99	18.16	18.5±1	1.0
				36	0	18.27	18.5±1	1.0
				36	24	18.36	18.5±1	1.0
				36	49	18.41	18.5±1	1.0
				75	0	18.35	18.5±1	1.0
	21100	2535	QPSK	1	0	18.25	18.5±1	/
				1	49	18.47	18.5±1	/
				1	99	18.18	18.5±1	/
				36	0	18.33	18.5±1	1.0
				36	24	18.34	18.5±1	1.0
				36	49	18.27	18.5±1	1.0
				75	0	18.32	18.5±1	1.0
			16QAM	1	0	18.53	18.5±1	1.0
				1	49	18.78	18.5±1	1.0
				1	99	18.47	18.5±1	1.0
				36	0	18.35	18.5±1	1.0
				36	24	18.36	18.5±1	1.0
				36	49	18.33	18.5±1	1.0
				75	0	18.3	18.5±1	1.0
	21375	2562.5	QPSK	1	0	18.41	18.5±1	/
				1	49	18.56	18.5±1	/
				1	99	18.32	18.5±1	/
				36	0	18.51	18.5±1	1.0
				36	24	18.55	18.5±1	1.0
				36	49	18.53	18.5±1	1.0
				75	0	18.47	18.5±1	1.0
			16QAM	1	0	18.8	18.5±1	1.0
				1	49	19.11	18.5±1	1.0
				1	99	18.66	18.5±1	1.0
				36	0	18.43	18.5±1	1.0
				36	24	18.5	18.5±1	1.0
				36	49	18.45	18.5±1	1.0
				75	0	18.48	18.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	20850	2510	QPSK	1	0	17.96	18.5±1	/
				1	49	18.38	18.5±1	/
				1	99	18.04	18.5±1	/
				50	0	18.29	18.5±1	1.0
				50	24	18.29	18.5±1	1.0
				50	49	18.36	18.5±1	1.0
				100	0	18.33	18.5±1	1.0
			16QAM	1	0	18.51	18.5±1	1.0
				1	49	18.45	18.5±1	1.0
				1	99	18.57	18.5±1	1.0
				50	0	18.3	18.5±1	1.0
				50	24	18.35	18.5±1	1.0
				50	49	18.33	18.5±1	1.0
				100	0	18.33	18.5±1	1.0
	21100	2535	QPSK	1	0	18	18.5±1	/
				1	49	18.4	18.5±1	/
				1	99	18	18.5±1	/
				50	0	18.25	18.5±1	1.0
				50	24	18.29	18.5±1	1.0
				50	49	18.19	18.5±1	1.0
				100	0	18.24	18.5±1	1.0
			16QAM	1	0	18.5	18.5±1	1.0
				1	49	18.81	18.5±1	1.0
				1	99	18.47	18.5±1	1.0
				50	0	18.26	18.5±1	1.0
				50	24	18.3	18.5±1	1.0
				50	49	18.18	18.5±1	1.0
				100	0	18.23	18.5±1	1.0
	21350	2560	QPSK	1	0	18.2	18.5±1	/
				1	49	18.57	18.5±1	/
				1	99	18.09	18.5±1	/
				50	0	18.36	18.5±1	1.0
				50	24	18.95	18.5±1	1.0
				50	49	18.42	18.5±1	1.0
				100	0	18.42	18.5±1	1.0
			16QAM	1	0	18.58	18.5±1	1.0
				1	49	18.94	18.5±1	1.0
				1	99	18.47	18.5±1	1.0
				50	0	18.37	18.5±1	1.0
				50	24	18.46	18.5±1	1.0
				50	49	18.41	18.5±1	1.0
				100	0	18.42	18.5±1	1.0

LTE Band 41:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	40265	2557.5	QPSK	1	0	19.49	19.5±1	/
				1	12	19.83	19.5±1	/
				1	24	19.48	19.5±1	/
				12	0	19.52	19.5±1	1.0
				12	6	19.59	19.5±1	1.0
				12	11	19.56	19.5±1	1.0
				25	0	19.54	19.5±1	1.0
			16QAM	1	0	19.84	19.5±1	1.0
				1	12	20.16	19.5±1	1.0
				1	24	19.83	19.5±1	1.0
				12	0	19.57	19.5±1	1.0
				12	6	19.62	19.5±1	1.0
				12	11	19.63	19.5±1	1.0
				25	0	19.53	19.5±1	1.0
	40740	2605.0	QPSK	1	0	19.53	19.5±1	/
				1	12	19.87	19.5±1	/
				1	24	19.53	19.5±1	/
				12	0	19.64	19.5±1	1.0
				12	6	19.67	19.5±1	1.0
				12	11	19.65	19.5±1	1.0
				25	0	19.62	19.5±1	1.0
			16QAM	1	0	19.76	19.5±1	1.0
				1	12	20.08	19.5±1	1.0
				1	24	19.78	19.5±1	1.0
				12	0	19.66	19.5±1	1.0
				12	6	19.67	19.5±1	1.0
				12	11	19.62	19.5±1	1.0
				25	0	19.63	19.5±1	1.0
	41215	2652.5	QPSK	1	0	19.48	19.5±1	/
				1	12	19.79	19.5±1	/
				1	24	19.48	19.5±1	/
				12	0	19.52	19.5±1	1.0
				12	6	19.57	19.5±1	1.0
				12	11	19.55	19.5±1	1.0
				25	0	19.56	19.5±1	1.0
			16QAM	1	0	19.72	19.5±1	1.0
				1	12	20.05	19.5±1	1.0
				1	24	19.73	19.5±1	1.0
				12	0	19.5	19.5±1	1.0
				12	6	19.53	19.5±1	1.0
				12	11	19.5	19.5±1	1.0
				25	0	19.51	19.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	40290	2560.0	QPSK	1	0	19.52	19.5±1	/
				1	24	19.58	19.5±1	/
				1	49	19.5	19.5±1	/
				25	0	19.54	19.5±1	1.0
				25	12	19.59	19.5±1	1.0
				25	24	19.59	19.5±1	1.0
				50	0	19.57	19.5±1	1.0
			16QAM	1	0	19.82	19.5±1	1.0
				1	24	19.88	19.5±1	1.0
				1	49	19.79	19.5±1	1.0
				25	0	19.51	19.5±1	1.0
				25	12	19.57	19.5±1	1.0
				25	24	19.58	19.5±1	1.0
				50	0	19.52	19.5±1	1.0
	40740	2605.0	QPSK	1	0	19.76	19.5±1	/
				1	24	19.83	19.5±1	/
				1	49	19.73	19.5±1	/
				25	0	19.7	19.5±1	1.0
				25	12	19.71	19.5±1	1.0
				25	24	19.71	19.5±1	1.0
				50	0	19.68	19.5±1	1.0
			16QAM	1	0	20.12	19.5±1	1.0
				1	24	20.14	19.5±1	1.0
				1	49	20.01	19.5±1	1.0
				25	0	19.66	19.5±1	1.0
				25	12	19.67	19.5±1	1.0
				25	24	19.68	19.5±1	1.0
				50	0	19.67	19.5±1	1.0
	41190	2650.0	QPSK	1	0	19.59	19.5±1	/
				1	24	19.6	19.5±1	/
				1	49	19.46	19.5±1	/
				25	0	19.57	19.5±1	1.0
				25	12	19.58	19.5±1	1.0
				25	24	19.55	19.5±1	1.0
				50	0	19.52	19.5±1	1.0
			16QAM	1	0	19.91	19.5±1	1.0
				1	24	19.96	19.5±1	1.0
				1	49	19.85	19.5±1	1.0
				25	0	19.53	19.5±1	1.0
				25	12	19.56	19.5±1	1.0
				25	24	19.55	19.5±1	1.0
				50	0	19.58	19.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	40315	2562.5	QPSK	1	0	19.48	19.5±1	/
				1	37	19.77	19.5±1	/
				1	74	19.44	19.5±1	/
				36	0	19.61	19.5±1	1.0
				36	16	19.64	19.5±1	1.0
				36	35	19.61	19.5±1	1.0
				75	0	19.58	19.5±1	1.0
			16QAM	1	0	19.74	19.5±1	1.0
				1	37	20.03	19.5±1	1.0
				1	74	19.7	19.5±1	1.0
				36	0	19.54	19.5±1	1.0
				36	16	19.63	19.5±1	1.0
				36	35	19.57	19.5±1	1.0
				75	0	19.6	19.5±1	1.0
	40740	2605.0	QPSK	1	0	19.68	19.5±1	/
				1	37	19.92	19.5±1	/
				1	74	19.62	19.5±1	/
				36	0	19.67	19.5±1	1.0
				36	16	19.71	19.5±1	1.0
				36	35	19.72	19.5±1	1.0
				75	0	19.67	19.5±1	1.0
			16QAM	1	0	19.99	19.5±1	1.0
				1	37	19.34	19.5±1	1.0
				1	74	19.94	19.5±1	1.0
				36	0	19.64	19.5±1	1.0
				36	16	19.67	19.5±1	1.0
				36	35	19.64	19.5±1	1.0
				75	0	19.68	19.5±1	1.0
	41165	2647.5	QPSK	1	0	19.52	19.5±1	/
				1	37	19.79	19.5±1	/
				1	74	19.44	19.5±1	/
				36	0	19.58	19.5±1	1.0
				36	16	19.62	19.5±1	1.0
				36	35	19.61	19.5±1	1.0
				75	0	19.62	19.5±1	1.0
			16QAM	1	0	19.77	19.5±1	1.0
				1	37	20.07	19.5±1	1.0
				1	74	19.74	19.5±1	1.0
				36	0	19.58	19.5±1	1.0
				36	16	19.6	19.5±1	1.0
				36	35	19.59	19.5±1	1.0
				75	0	19.58	19.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	40340	2565.0	QPSK	1	0	19.34	19.5±1	/
				1	49	19.66	19.5±1	/
				1	99	19.36	19.5±1	/
				50	0	19.47	19.5±1	1.0
				50	24	19.54	19.5±1	1.0
				50	49	19.5	19.5±1	1.0
				100	0	19.51	19.5±1	1.0
			16QAM	1	0	19.6	19.5±1	1.0
				1	49	19.93	19.5±1	1.0
				1	99	19.62	19.5±1	1.0
				50	0	19.44	19.5±1	1.0
				50	24	19.53	19.5±1	1.0
				50	49	19.45	19.5±1	1.0
				100	0	19.47	19.5±1	1.0
	40740	2605.0	QPSK	1	0	19.43	19.5±1	/
				1	49	19.77	19.5±1	/
				1	99	19.42	19.5±1	/
				50	0	19.57	19.5±1	1.0
				50	24	19.66	19.5±1	1.0
				50	49	19.65	19.5±1	1.0
				100	0	19.63	19.5±1	1.0
			16QAM	1	0	19.54	19.5±1	1.0
				1	49	19.91	19.5±1	1.0
				1	99	19.57	19.5±1	1.0
				50	0	19.57	19.5±1	1.0
				50	24	19.63	19.5±1	1.0
				50	49	19.6	19.5±1	1.0
				100	0	19.6	19.5±1	1.0
	41140	2645.0	QPSK	1	0	19.35	19.5±1	/
				1	49	19.65	19.5±1	/
				1	99	20.27	19.5±1	/
				50	0	19.38	19.5±1	1.0
				50	24	19.58	19.5±1	1.0
				50	49	19.53	19.5±1	1.0
				100	0	19.51	19.5±1	1.0
			16QAM	1	0	19.71	19.5±1	1.0
				1	49	20	19.5±1	1.0
				1	99	19.69	19.5±1	1.0
				50	0	19.46	19.5±1	1.0
				50	24	19.57	19.5±1	1.0
				50	49	19.58	19.5±1	1.0
				100	0	19.5	19.5±1	1.0

LTE Band 66:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	131979	1710.7	QPSK	1	0	18.61	18.5±1	/
				1	2	18.73	18.5±1	/
				1	5	18.64	18.5±1	/
				3	0	18.75	18.5±1	/
				3	1	18.78	18.5±1	/
				3	2	18.73	18.5±1	/
				6	0	18.62	18.5±1	1.0
			16QAM	1	0	18.82	18.5±1	1.0
				1	2	19.35	18.5±1	1.0
				1	5	18.82	18.5±1	1.0
				3	0	18.85	18.5±1	1.0
				3	1	18.9	18.5±1	1.0
				3	2	18.81	18.5±1	1.0
				6	0	18.87	18.5±1	1.0
	132321	1744.9	QPSK	1	0	18.4	18.5±1	/
				1	2	18.58	18.5±1	/
				1	5	18.47	18.5±1	/
				3	0	18.58	18.5±1	/
				3	1	18.56	18.5±1	/
				3	2	18.56	18.5±1	/
				6	0	18.43	18.5±1	1.0
			16QAM	1	0	18.87	18.5±1	1.0
				1	2	18.95	18.5±1	1.0
				1	5	18.86	18.5±1	1.0
				3	0	18.8	18.5±1	1.0
				3	1	18.8	18.5±1	1.0
				3	2	18.81	18.5±1	1.0
				6	0	18.38	18.5±1	1.0
	132664	1779.2	QPSK	1	0	18.58	18.5±1	/
				1	2	18.75	18.5±1	/
				1	5	18.65	18.5±1	/
				3	0	18.77	18.5±1	/
				3	1	18.85	18.5±1	/
				3	2	18.83	18.5±1	/
				6	0	18.71	18.5±1	1.0
			16QAM	1	0	18.76	18.5±1	1.0
				1	2	18.81	18.5±1	1.0
				1	5	18.74	18.5±1	1.0
				3	0	18.96	18.5±1	1.0
				3	1	19.06	18.5±1	1.0
				3	2	19.01	18.5±1	1.0
				6	0	18.94	18.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	131987	1711.5	QPSK	1	0	18.67	18.5±1	/
				1	8	18.74	18.5±1	/
				1	14	18.55	18.5±1	/
				6	0	18.65	18.5±1	1.0
				6	4	18.71	18.5±1	1.0
				6	9	18.61	18.5±1	1.0
				15	0	18.69	18.5±1	1.0
			16QAM	1	0	18.72	18.5±1	1.0
				1	8	18.79	18.5±1	1.0
				1	14	18.57	18.5±1	1.0
				8	0	18.85	18.5±1	1.0
				8	4	18.86	18.5±1	1.0
				8	9	18.81	18.5±1	1.0
				15	0	18.79	18.5±1	1.0
	132321	1744.9	QPSK	1	0	18.53	18.5±1	/
				1	8	18.66	18.5±1	/
				1	14	18.58	18.5±1	/
				6	0	18.5	18.5±1	1.0
				6	4	18.52	18.5±1	1.0
				6	9	18.44	18.5±1	1.0
				15	0	18.54	18.5±1	1.0
			16QAM	1	0	18.95	18.5±1	1.0
				1	8	19.05	18.5±1	1.0
				1	14	18.95	18.5±1	1.0
				6	0	18.66	18.5±1	1.0
				6	4	18.65	18.5±1	1.0
				6	9	18.61	18.5±1	1.0
				15	0	18.57	18.5±1	1.0
	132656	1778.4	QPSK	1	0	18.76	18.5±1	/
				1	8	18.89	18.5±1	/
				1	14	18.76	18.5±1	/
				6	0	18.8	18.5±1	1.0
				6	4	18.85	18.5±1	1.0
				6	9	18.77	18.5±1	1.0
				15	0	18.83	18.5±1	1.0
			16QAM	1	0	18.85	18.5±1	1.0
				1	8	19.01	18.5±1	1.0
				1	14	18.82	18.5±1	1.0
				8	0	18.83	18.5±1	1.0
				8	4	18.88	18.5±1	1.0
				8	9	18.81	18.5±1	1.0
				15	0	18.81	18.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	131997	1712.5	QPSK	1	0	18.64	18.5±1	/
				1	49	18.79	18.5±1	/
				1	99	18.54	18.5±1	/
				12	0	18.68	18.5±1	1.0
				12	24	18.68	18.5±1	1.0
				12	49	18.63	18.5±1	1.0
				25	0	18.66	18.5±1	1.0
			16QAM	1	0	18.86	18.5±1	1.0
				1	49	18.94	18.5±1	1.0
				1	99	18.79	18.5±1	1.0
				12	0	18.75	18.5±1	1.0
				12	24	18.82	18.5±1	1.0
				12	49	18.79	18.5±1	1.0
				25	0	18.77	18.5±1	1.0
	132321	1744.9	QPSK	1	0	18.37	18.5±1	/
				1	49	18.63	18.5±1	/
				1	99	18.47	18.5±1	/
				12	0	18.51	18.5±1	1.0
				12	24	18.56	18.5±1	1.0
				12	49	18.49	18.5±1	1.0
				25	0	18.53	18.5±1	1.0
			16QAM	1	0	18.96	18.5±1	1.0
				1	49	19.2	18.5±1	1.0
				1	99	18.96	18.5±1	1.0
				12	0	18.7	18.5±1	1.0
				12	24	18.74	18.5±1	1.0
				12	49	18.69	18.5±1	1.0
				25	0	18.65	18.5±1	1.0
	132646	1777.4	QPSK	1	0	18.71	18.5±1	/
				1	49	18.95	18.5±1	/
				1	99	18.7	18.5±1	/
				12	0	18.81	18.5±1	1.0
				12	24	18.82	18.5±1	1.0
				12	49	18.77	18.5±1	1.0
				25	0	18.78	18.5±1	1.0
			16QAM	1	0	18.75	18.5±1	1.0
				1	49	19.02	18.5±1	1.0
				1	99	18.83	18.5±1	1.0
				12	0	18.83	18.5±1	1.0
				12	24	18.87	18.5±1	1.0
				12	49	18.85	18.5±1	1.0
				25	0	18.75	18.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	132022	1715	QPSK	1	0	18.62	18.5±1	/
				1	49	18.7	18.5±1	/
				1	99	18.58	18.5±1	/
				25	0	18.6	18.5±1	1.0
				25	24	18.65	18.5±1	1.0
				25	49	18.62	18.5±1	1.0
				50	0	18.64	18.5±1	1.0
			16QAM	1	0	18.67	18.5±1	1.0
				1	49	18.67	18.5±1	1.0
				1	99	18.57	18.5±1	1.0
				25	0	18.75	18.5±1	1.0
				25	24	18.78	18.5±1	1.0
				25	49	18.69	18.5±1	1.0
				50	0	18.72	18.5±1	1.0
	132321	1744.9	QPSK	1	0	18.53	18.5±1	/
				1	49	18.64	18.5±1	/
				1	99	18.51	18.5±1	/
				25	0	18.56	18.5±1	1.0
				25	24	18.57	18.5±1	1.0
				25	49	18.58	18.5±1	1.0
				50	0	18.59	18.5±1	1.0
			16QAM	1	0	18.88	18.5±1	1.0
				1	49	19.04	18.5±1	1.0
				1	99	19.01	18.5±1	1.0
				25	0	18.69	18.5±1	1.0
				25	24	18.68	18.5±1	1.0
				25	49	18.73	18.5±1	1.0
				50	0	18.72	18.5±1	1.0
	132621	1774.9	QPSK	1	0	18.62	18.5±1	/
				1	49	18.8	18.5±1	/
				1	99	18.74	18.5±1	/
				25	0	18.78	18.5±1	1.0
				25	24	18.84	18.5±1	1.0
				25	49	18.69	18.5±1	1.0
				50	0	18.78	18.5±1	1.0
			16QAM	1	0	18.77	18.5±1	1.0
				1	49	18.92	18.5±1	1.0
				1	99	18.84	18.5±1	1.0
				25	0	18.92	18.5±1	1.0
				25	24	18.96	18.5±1	1.0
				25	49	18.89	18.5±1	1.0
				50	0	18.84	18.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	132097	1722.5	QPSK	1	0	18.55	18.5±1	/
				1	49	18.65	18.5±1	/
				1	99	18.38	18.5±1	/
				36	0	18.54	18.5±1	1.0
				36	24	18.59	18.5±1	1.0
				36	49	18.55	18.5±1	1.0
				75	0	18.53	18.5±1	1.0
			16QAM	1	0	18.59	18.5±1	1.0
				1	49	18.68	18.5±1	1.0
				1	99	18.34	18.5±1	1.0
				36	0	18.62	18.5±1	1.0
				36	24	18.63	18.5±1	1.0
				36	49	18.59	18.5±1	1.0
				75	0	18.58	18.5±1	1.0
	132321	1744.9	QPSK	1	0	18.48	18.5±1	/
				1	49	18.71	18.5±1	/
				1	99	18.52	18.5±1	/
				36	0	18.55	18.5±1	1.0
				36	24	18.58	18.5±1	1.0
				36	49	18.56	18.5±1	1.0
				75	0	18.55	18.5±1	1.0
			16QAM	1	0	18.8	18.5±1	1.0
				1	49	19.11	18.5±1	1.0
				1	99	18.95	18.5±1	1.0
				36	0	18.61	18.5±1	1.0
				36	24	18.68	18.5±1	1.0
				36	49	18.69	18.5±1	1.0
				75	0	18.69	18.5±1	1.0
	132546	1767.4	QPSK	1	0	18.65	18.5±1	/
				1	49	18.91	18.5±1	/
				1	99	18.7	18.5±1	/
				36	0	18.74	18.5±1	1.0
				36	24	18.81	18.5±1	1.0
				36	49	18.74	18.5±1	1.0
				75	0	18.76	18.5±1	1.0
			16QAM	1	0	19.14	18.5±1	1.0
				1	49	18.96	18.5±1	1.0
				1	99	19.23	18.5±1	1.0
				36	0	18.72	18.5±1	1.0
				36	24	18.76	18.5±1	1.0
				36	49	18.79	18.5±1	1.0
				75	0	18.75	18.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	132072	1720	QPSK	1	0	18.36	18.5±1	/
				1	49	18.66	18.5±1	/
				1	99	18.18	18.5±1	/
				50	0	18.56	18.5±1	1.0
				50	24	18.59	18.5±1	1.0
				50	49	18.49	18.5±1	1.0
				100	0	18.54	18.5±1	1.0
			16QAM	1	0	19	18.5±1	1.0
				1	49	19.26	18.5±1	1.0
				1	99	18.8	18.5±1	1.0
				50	0	18.63	18.5±1	1.0
				50	24	18.67	18.5±1	1.0
				50	49	18.57	18.5±1	1.0
				100	0	18.6	18.5±1	1.0
	132321	1744.9	QPSK	1	0	18.2	18.5±1	/
				1	49	18.62	18.5±1	/
				1	99	18.33	18.5±1	/
				50	0	18.64	18.5±1	1.0
				50	24	18.64	18.5±1	1.0
				50	49	18.62	18.5±1	1.0
				100	0	18.62	18.5±1	1.0
			16QAM	1	0	18.72	18.5±1	1.0
				1	49	19.21	18.5±1	1.0
				1	99	18.93	18.5±1	1.0
				50	0	18.7	18.5±1	1.0
				50	24	18.73	18.5±1	1.0
				50	49	18.77	18.5±1	1.0
				100	0	18.72	18.5±1	1.0
	132471	1759.9	QPSK	1	0	18.49	18.5±1	/
				1	49	18.82	18.5±1	/
				1	99	18.56	18.5±1	/
				50	0	18.77	18.5±1	1.0
				50	24	18.83	18.5±1	1.0
				50	49	18.74	18.5±1	1.0
				100	0	18.74	18.5±1	1.0
			16QAM	1	0	18.93	18.5±1	1.0
				1	49	19.24	18.5±1	1.0
				1	99	19.01	18.5±1	1.0
				50	0	18.83	18.5±1	1.0
				50	24	18.82	18.5±1	1.0
				50	49	18.75	18.5±1	1.0
				100	0	18.79	18.5±1	1.0

Power Level P3:**LTE Band 2:**

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	18607	1850.7	QPSK	1	0	20.25	20.5±1	/
				1	2	20.58	20.5±1	/
				1	5	20.48	20.5±1	/
				3	0	20.45	20.5±1	/
				3	1	20.42	20.5±1	/
				3	2	20.4	20.5±1	/
				6	0	20.44	20.5±1	1.0
			16QAM	1	0	20.39	20.5±1	1.0
				1	2	20.69	20.5±1	1.0
				1	5	20.5	20.5±1	1.0
				3	0	20.64	20.5±1	1.0
				3	1	20.66	20.5±1	1.0
				3	2	20.67	20.5±1	1.0
				6	0	20.54	20.5±1	1.0
	18900	1880	QPSK	1	0	20.28	20.5±1	/
				1	2	20.42	20.5±1	/
				1	5	20.29	20.5±1	/
				3	0	20.2	20.5±1	/
				3	1	20.38	20.5±1	/
				3	2	20.27	20.5±1	/
				6	0	20.16	20.5±1	1.0
			16QAM	1	0	20.57	20.5±1	1.0
				1	2	20.82	20.5±1	1.0
				1	5	20.51	20.5±1	1.0
				3	0	20.66	20.5±1	1.0
				3	1	20.74	20.5±1	1.0
				3	2	20.66	20.5±1	1.0
				6	0	20.05	20.5±1	1.0
	19193	1909.3	QPSK	1	0	20.35	20.5±1	/
				1	2	20.46	20.5±1	/
				1	5	20.15	20.5±1	/
				3	0	20.48	20.5±1	/
				3	1	20.34	20.5±1	/
				3	2	20.45	20.5±1	/
				6	0	20.41	20.5±1	1.0
			16QAM	1	0	20.34	20.5±1	1.0
				1	2	20.6	20.5±1	1.0
				1	5	20.3	20.5±1	1.0
				3	0	20.52	20.5±1	1.0
				3	1	20.79	20.5±1	1.0
				3	2	20.52	20.5±1	1.0
				6	0	20.51	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	18615	1851.5	QPSK	1	0	20.26	20.5±1	/
				1	8	20.46	20.5±1	/
				1	14	20.41	20.5±1	/
				6	0	20.34	20.5±1	1.0
				6	4	20.5	20.5±1	1.0
				6	9	20.43	20.5±1	1.0
				15	0	20.28	20.5±1	1.0
			16QAM	1	0	20.25	20.5±1	1.0
				1	8	20.41	20.5±1	1.0
				1	14	20.41	20.5±1	1.0
				6	0	20.6	20.5±1	1.0
				6	4	20.62	20.5±1	1.0
				6	9	20.59	20.5±1	1.0
				15	0	20.47	20.5±1	1.0
	18900	1880	QPSK	1	0	20.33	20.5±1	/
				1	8	20.52	20.5±1	/
				1	14	20.18	20.5±1	/
				6	0	20.21	20.5±1	1.0
				6	4	20.15	20.5±1	1.0
				6	9	20.27	20.5±1	1.0
				15	0	20.11	20.5±1	1.0
			16QAM	1	0	20.56	20.5±1	1.0
				1	8	20.86	20.5±1	1.0
				1	14	20.6	20.5±1	1.0
				6	0	20.49	20.5±1	1.0
				6	4	20.41	20.5±1	1.0
				6	9	20.33	20.5±1	1.0
				15	0	20.19	20.5±1	1.0
	19185	1908.5	QPSK	1	0	20.21	20.5±1	/
				1	8	20.39	20.5±1	/
				1	14	20.39	20.5±1	/
				6	0	20.43	20.5±1	1.0
				6	4	20.45	20.5±1	1.0
				6	9	20.39	20.5±1	1.0
				15	0	20.44	20.5±1	1.0
			16QAM	1	0	20.39	20.5±1	1.0
				1	8	20.51	20.5±1	1.0
				1	14	20.45	20.5±1	1.0
				6	0	20.36	20.5±1	1.0
				6	4	20.53	20.5±1	1.0
				6	9	20.37	20.5±1	1.0
				15	0	20.32	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	18625	1852.5	QPSK	1	0	20.39	20.5±1	/
				1	12	20.49	20.5±1	/
				1	24	20.12	20.5±1	/
				12	0	20.35	20.5±1	1.0
				12	6	20.53	20.5±1	1.0
				12	11	20.38	20.5±1	1.0
				25	0	20.48	20.5±1	1.0
			16QAM	1	0	20.41	20.5±1	1.0
				1	12	20.71	20.5±1	1.0
				1	24	20.57	20.5±1	1.0
				12	0	20.48	20.5±1	1.0
				12	6	20.57	20.5±1	1.0
				12	11	20.58	20.5±1	1.0
				25	0	20.47	20.5±1	1.0
	18900	1880	QPSK	1	0	20.16	20.5±1	/
				1	12	20.3	20.5±1	/
				1	24	20.03	20.5±1	/
				12	0	20.13	20.5±1	1.0
				12	6	20.42	20.5±1	1.0
				12	11	20.37	20.5±1	1.0
				25	0	20.4	20.5±1	1.0
			16QAM	1	0	20.71	20.5±1	1.0
				1	12	20.67	20.5±1	1.0
				1	24	20.66	20.5±1	1.0
				12	0	20.54	20.5±1	1.0
				12	6	20.55	20.5±1	1.0
				12	11	20.31	20.5±1	1.0
				25	0	20.34	20.5±1	1.0
	19175	1907.5	QPSK	1	0	20.14	20.5±1	/
				1	12	20.54	20.5±1	/
				1	24	20.26	20.5±1	/
				12	0	20.34	20.5±1	1.0
				12	6	20.39	20.5±1	1.0
				12	11	20.46	20.5±1	1.0
				25	0	20.26	20.5±1	1.0
			16QAM	1	0	20.32	20.5±1	1.0
				1	12	20.77	20.5±1	1.0
				1	24	20.37	20.5±1	1.0
				12	0	20.46	20.5±1	1.0
				12	6	20.47	20.5±1	1.0
				12	11	20.36	20.5±1	1.0
				25	0	20.24	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	18650	1855	QPSK	1	0	20.25	20.5±1	/
				1	24	20.31	20.5±1	/
				1	49	20.28	20.5±1	/
				25	0	20.47	20.5±1	1.0
				25	12	20.53	20.5±1	1.0
				25	24	20.35	20.5±1	1.0
				50	0	20.44	20.5±1	1.0
			16QAM	1	0	20.48	20.5±1	1.0
				1	24	20.35	20.5±1	1.0
				1	49	20.41	20.5±1	1.0
				25	0	20.55	20.5±1	1.0
				25	12	20.49	20.5±1	1.0
				25	24	20.53	20.5±1	1.0
				50	0	20.51	20.5±1	1.0
	18900	1880	QPSK	1	0	20.26	20.5±1	/
				1	24	20.34	20.5±1	/
				1	49	20.17	20.5±1	/
				25	0	20.16	20.5±1	1.0
				25	12	20.28	20.5±1	1.0
				25	24	20.15	20.5±1	1.0
				50	0	20.33	20.5±1	1.0
			16QAM	1	0	20.74	20.5±1	1.0
				1	24	20.75	20.5±1	1.0
				1	49	20.77	20.5±1	1.0
				25	0	20.26	20.5±1	1.0
				25	12	20.35	20.5±1	1.0
				25	24	20.44	20.5±1	1.0
				50	0	20.39	20.5±1	1.0
	19150	1905	QPSK	1	0	20.15	20.5±1	/
				1	24	20.34	20.5±1	/
				1	49	20.38	20.5±1	/
				25	0	20.3	20.5±1	1.0
				25	12	20.24	20.5±1	1.0
				25	24	20.36	20.5±1	1.0
				50	0	20.42	20.5±1	1.0
			16QAM	1	0	20.35	20.5±1	1.0
				1	24	20.46	20.5±1	1.0
				1	49	20.37	20.5±1	1.0
				25	0	20.59	20.5±1	1.0
				25	12	20.36	20.5±1	1.0
				25	24	20.35	20.5±1	1.0
				50	0	20.25	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	18675	1857.5	QPSK	1	0	20.38	20.5±1	/
				1	37	20.58	20.5±1	/
				1	74	19.99	20.5±1	/
				36	0	20.37	20.5±1	1.0
				36	16	20.45	20.5±1	1.0
				36	35	20.26	20.5±1	1.0
				75	0	20.32	20.5±1	1.0
			16QAM	1	0	20.16	20.5±1	1.0
				1	37	20.42	20.5±1	1.0
				1	74	20.1	20.5±1	1.0
				36	0	20.29	20.5±1	1.0
				36	16	20.24	20.5±1	1.0
				36	35	20.36	20.5±1	1.0
				75	0	20.23	20.5±1	1.0
	18900	1880	QPSK	1	0	20.29	20.5±1	/
				1	37	20.25	20.5±1	/
				1	74	20.32	20.5±1	/
				36	0	20.12	20.5±1	1.0
				36	16	20.15	20.5±1	1.0
				36	35	20.11	20.5±1	1.0
				75	0	20.18	20.5±1	1.0
			16QAM	1	0	20.61	20.5±1	1.0
				1	37	20.87	20.5±1	1.0
				1	74	20.42	20.5±1	1.0
				36	0	20.17	20.5±1	1.0
				36	16	20.41	20.5±1	1.0
				36	35	20.38	20.5±1	1.0
				75	0	20.19	20.5±1	1.0
	19125	1902.5	QPSK	1	0	20.22	20.5±1	/
				1	37	20.43	20.5±1	/
				1	74	20.24	20.5±1	/
				36	0	20.37	20.5±1	1.0
				36	16	20.29	20.5±1	1.0
				36	35	20.18	20.5±1	1.0
				75	0	20.28	20.5±1	1.0
			16QAM	1	0	20.77	20.5±1	1.0
				1	37	20.97	20.5±1	1.0
				1	74	21.02	20.5±1	1.0
				36	0	20.19	20.5±1	1.0
				36	16	20.4	20.5±1	1.0
				36	35	20.38	20.5±1	1.0
				75	0	20.41	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	18700	1860	QPSK	1	0	20.11	20.5±1	/
				1	49	20.22	20.5±1	/
				1	99	19.88	20.5±1	/
				50	0	20.32	20.5±1	1.0
				50	24	20.36	20.5±1	1.0
				50	49	20.16	20.5±1	1.0
				100	0	20.27	20.5±1	1.0
			16QAM	1	0	20.76	20.5±1	1.0
				1	49	20.39	20.5±1	1.0
				1	99	20.35	20.5±1	1.0
				50	0	20.38	20.5±1	1.0
				50	24	20.31	20.5±1	1.0
				50	49	20.32	20.5±1	1.0
				100	0	20.5	20.5±1	1.0
	18900	1880	QPSK	1	0	19.98	20.5±1	/
				1	49	20.31	20.5±1	/
				1	99	20.06	20.5±1	/
				50	0	20.42	20.5±1	1.0
				50	24	20.26	20.5±1	1.0
				50	49	20.25	20.5±1	1.0
				100	0	20.26	20.5±1	1.0
			16QAM	1	0	20.65	20.5±1	1.0
				1	49	20.87	20.5±1	1.0
				1	99	20.66	20.5±1	1.0
				50	0	20.28	20.5±1	1.0
				50	24	20.28	20.5±1	1.0
				50	49	20.29	20.5±1	1.0
				100	0	20.31	20.5±1	1.0
	19100	1900	QPSK	1	0	19.89	20.5±1	/
				1	49	20.46	20.5±1	/
				1	99	20.01	20.5±1	/
				50	0	20.34	20.5±1	1.0
				50	24	20.38	20.5±1	1.0
				50	49	20.95	20.5±1	1.0
				100	0	20.26	20.5±1	1.0
			16QAM	1	0	20.4	20.5±1	1.0
				1	49	20.89	20.5±1	1.0
				1	99	20.39	20.5±1	1.0
				50	0	20.47	20.5±1	1.0
				50	24	20.3	20.5±1	1.0
				50	49	20.19	20.5±1	1.0
				100	0	20.35	20.5±1	1.0

LTE Band 4:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	19957	1710.7	QPSK	1	0	20.61	20.5±1	/
				1	2	20.99	20.5±1	/
				1	5	20.68	20.5±1	/
				3	0	20.86	20.5±1	/
				3	1	20.93	20.5±1	/
				3	2	21.45	20.5±1	/
				6	0	20.63	20.5±1	1.0
			16QAM	1	0	20.87	20.5±1	1.0
				1	2	21.08	20.5±1	1.0
				1	5	20.91	20.5±1	1.0
				3	0	20.97	20.5±1	1.0
				3	1	20.93	20.5±1	1.0
				3	2	21.05	20.5±1	1.0
				6	0	20.98	20.5±1	1.0
	20175	1732.5	QPSK	1	0	20.37	20.5±1	/
				1	2	20.7	20.5±1	/
				1	5	20.44	20.5±1	/
				3	0	20.69	20.5±1	/
				3	1	20.63	20.5±1	/
				3	2	20.48	20.5±1	/
				6	0	20.52	20.5±1	1.0
			16QAM	1	0	20.81	20.5±1	1.0
				1	2	20.89	20.5±1	1.0
				1	5	21.03	20.5±1	1.0
				3	0	20.81	20.5±1	1.0
				3	1	20.75	20.5±1	1.0
				3	2	20.8	20.5±1	1.0
				6	0	20.38	20.5±1	1.0
	20393	1754.3	QPSK	1	0	20.65	20.5±1	/
				1	2	20.8	20.5±1	/
				1	5	20.59	20.5±1	/
				3	0	20.66	20.5±1	/
				3	1	20.78	20.5±1	/
				3	2	20.76	20.5±1	/
				6	0	20.62	20.5±1	1.0
			16QAM	1	0	20.92	20.5±1	1.0
				1	2	20.78	20.5±1	1.0
				1	5	20.73	20.5±1	1.0
				3	0	21.19	20.5±1	1.0
				3	1	21.02	20.5±1	1.0
				3	2	21.03	20.5±1	1.0
				6	0	20.95	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	19965	1711.5	QPSK	1	0	20.83	20.5±1	/
				1	8	20.8	20.5±1	/
				1	14	20.73	20.5±1	/
				6	0	20.79	20.5±1	1.0
				6	4	20.81	20.5±1	1.0
				6	9	20.66	20.5±1	1.0
				15	0	20.92	20.5±1	1.0
			16QAM	1	0	20.69	20.5±1	1.0
				1	8	20.91	20.5±1	1.0
				1	14	20.84	20.5±1	1.0
				8	0	20.97	20.5±1	1.0
				8	4	21.09	20.5±1	1.0
				8	9	20.87	20.5±1	1.0
				15	0	20.94	20.5±1	1.0
	20175	1732.5	QPSK	1	0	20.58	20.5±1	/
				1	8	20.73	20.5±1	/
				1	14	20.5	20.5±1	/
				6	0	20.57	20.5±1	1.0
				6	4	20.68	20.5±1	1.0
				6	9	20.56	20.5±1	1.0
				15	0	20.63	20.5±1	1.0
			16QAM	1	0	20.85	20.5±1	1.0
				1	8	21.14	20.5±1	1.0
				1	14	20.94	20.5±1	1.0
				6	0	20.55	20.5±1	1.0
				6	4	20.68	20.5±1	1.0
				6	9	20.76	20.5±1	1.0
				15	0	20.49	20.5±1	1.0
	20385	1753.5	QPSK	1	0	20.7	20.5±1	/
				1	8	20.95	20.5±1	/
				1	14	20.61	20.5±1	/
				6	0	20.8	20.5±1	1.0
				6	4	20.88	20.5±1	1.0
				6	9	20.7	20.5±1	1.0
				15	0	20.69	20.5±1	1.0
			16QAM	1	0	20.91	20.5±1	1.0
				1	8	21.01	20.5±1	1.0
				1	14	20.96	20.5±1	1.0
				8	0	20.8	20.5±1	1.0
				8	4	21.02	20.5±1	1.0
				8	9	20.86	20.5±1	1.0
				15	0	20.8	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	19975	1712.5	QPSK	1	0	20.7	20.5±1	/
				1	49	20.79	20.5±1	/
				1	99	20.5	20.5±1	/
				12	0	20.88	20.5±1	1.0
				12	24	20.89	20.5±1	1.0
				12	49	20.9	20.5±1	1.0
				25	0	20.88	20.5±1	1.0
			16QAM	1	0	20.95	20.5±1	1.0
				1	49	21.02	20.5±1	1.0
				1	99	21.02	20.5±1	1.0
				12	0	20.79	20.5±1	1.0
				12	24	21.13	20.5±1	1.0
				12	49	20.93	20.5±1	1.0
				25	0	20.93	20.5±1	1.0
	20175	1732.5	QPSK	1	0	20.36	20.5±1	/
				1	49	20.81	20.5±1	/
				1	99	20.49	20.5±1	/
				12	0	20.56	20.5±1	1.0
				12	24	20.58	20.5±1	1.0
				12	49	20.5	20.5±1	1.0
				25	0	20.39	20.5±1	1.0
			16QAM	1	0	21	20.5±1	1.0
				1	49	21.26	20.5±1	1.0
				1	99	21.08	20.5±1	1.0
				12	0	20.76	20.5±1	1.0
				12	24	20.77	20.5±1	1.0
				12	49	20.78	20.5±1	1.0
				25	0	20.54	20.5±1	1.0
	20375	1752.5	QPSK	1	0	20.54	20.5±1	/
				1	49	21	20.5±1	/
				1	99	20.6	20.5±1	/
				12	0	20.81	20.5±1	1.0
				12	24	20.89	20.5±1	1.0
				12	49	20.82	20.5±1	1.0
				25	0	20.69	20.5±1	1.0
			16QAM	1	0	20.76	20.5±1	1.0
				1	49	20.91	20.5±1	1.0
				1	99	20.96	20.5±1	1.0
				12	0	20.93	20.5±1	1.0
				12	24	20.83	20.5±1	1.0
				12	49	20.76	20.5±1	1.0
				25	0	20.87	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20000	1715	QPSK	1	0	20.85	20.5±1	/
				1	49	20.79	20.5±1	/
				1	99	20.66	20.5±1	/
				25	0	20.76	20.5±1	1.0
				25	24	20.67	20.5±1	1.0
				25	49	20.69	20.5±1	1.0
				50	0	20.83	20.5±1	1.0
			16QAM	1	0	20.64	20.5±1	1.0
				1	49	20.77	20.5±1	1.0
				1	99	20.85	20.5±1	1.0
				25	0	20.78	20.5±1	1.0
				25	24	20.75	20.5±1	1.0
				25	49	20.66	20.5±1	1.0
				50	0	20.82	20.5±1	1.0
	20175	1732.5	QPSK	1	0	20.55	20.5±1	/
				1	49	20.5	20.5±1	/
				1	99	20.51	20.5±1	/
				25	0	20.58	20.5±1	1.0
				25	24	20.66	20.5±1	1.0
				25	49	20.39	20.5±1	1.0
				50	0	20.57	20.5±1	1.0
			16QAM	1	0	20.85	20.5±1	1.0
				1	49	20.88	20.5±1	1.0
				1	99	20.89	20.5±1	1.0
				25	0	20.8	20.5±1	1.0
				25	24	20.58	20.5±1	1.0
				25	49	20.66	20.5±1	1.0
				50	0	20.52	20.5±1	1.0
	20350	1750	QPSK	1	0	20.75	20.5±1	/
				1	49	20.8	20.5±1	/
				1	99	20.74	20.5±1	/
				25	0	20.75	20.5±1	1.0
				25	24	20.61	20.5±1	1.0
				25	49	20.84	20.5±1	1.0
				50	0	20.82	20.5±1	1.0
			16QAM	1	0	20.8	20.5±1	1.0
				1	49	20.77	20.5±1	1.0
				1	99	20.81	20.5±1	1.0
				25	0	20.79	20.5±1	1.0
				25	24	20.85	20.5±1	1.0
				25	49	20.89	20.5±1	1.0
				50	0	20.83	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	20025	1717.5	QPSK	1	0	20.52	20.5±1	/
				1	49	20.79	20.5±1	/
				1	99	20.48	20.5±1	/
				36	0	20.7	20.5±1	1.0
				36	24	20.68	20.5±1	1.0
				36	49	20.58	20.5±1	1.0
				75	0	20.73	20.5±1	1.0
			16QAM	1	0	20.58	20.5±1	1.0
				1	49	20.7	20.5±1	1.0
				1	99	20.41	20.5±1	1.0
				36	0	20.67	20.5±1	1.0
				36	24	20.61	20.5±1	1.0
				36	49	20.81	20.5±1	1.0
				75	0	20.85	20.5±1	1.0
	20175	1732.5	QPSK	1	0	20.61	20.5±1	/
				1	49	20.65	20.5±1	/
				1	99	20.63	20.5±1	/
				36	0	20.69	20.5±1	1.0
				36	24	20.67	20.5±1	1.0
				36	49	20.55	20.5±1	1.0
				75	0	20.63	20.5±1	1.0
			16QAM	1	0	20.87	20.5±1	1.0
				1	49	21.12	20.5±1	1.0
				1	99	20.9	20.5±1	1.0
				36	0	20.74	20.5±1	1.0
				36	24	20.76	20.5±1	1.0
				36	49	20.57	20.5±1	1.0
				75	0	20.51	20.5±1	1.0
	20325	1747.5	QPSK	1	0	20.57	20.5±1	/
				1	49	20.79	20.5±1	/
				1	99	20.67	20.5±1	/
				36	0	20.81	20.5±1	1.0
				36	24	20.61	20.5±1	1.0
				36	49	20.86	20.5±1	1.0
				75	0	20.73	20.5±1	1.0
			16QAM	1	0	20.91	20.5±1	1.0
				1	49	21.3	20.5±1	1.0
				1	99	21.3	20.5±1	1.0
				36	0	20.74	20.5±1	1.0
				36	24	20.72	20.5±1	1.0
				36	49	20.8	20.5±1	1.0
				75	0	20.67	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	20050	1720	QPSK	1	0	20.35	20.5±1	/
				1	49	20.71	20.5±1	/
				1	99	20.39	20.5±1	/
				50	0	20.55	20.5±1	1.0
				50	24	20.58	20.5±1	1.0
				50	49	21.25	20.5±1	1.0
				100	0	20.52	20.5±1	1.0
			16QAM	1	0	21.06	20.5±1	1.0
				1	49	21.05	20.5±1	1.0
				1	99	20.47	20.5±1	1.0
				50	0	20.83	20.5±1	1.0
				50	24	20.9	20.5±1	1.0
				50	49	20.57	20.5±1	1.0
				100	0	20.83	20.5±1	1.0
	20175	1732.5	QPSK	1	0	20.21	20.5±1	/
				1	49	20.54	20.5±1	/
				1	99	20.31	20.5±1	/
				50	0	20.6	20.5±1	1.0
				50	24	20.57	20.5±1	1.0
				50	49	20.62	20.5±1	1.0
				100	0	20.67	20.5±1	1.0
			16QAM	1	0	20.9	20.5±1	1.0
				1	49	21.24	20.5±1	1.0
				1	99	20.82	20.5±1	1.0
				50	0	20.59	20.5±1	1.0
				50	24	20.74	20.5±1	1.0
				50	49	20.76	20.5±1	1.0
				100	0	20.75	20.5±1	1.0
	20300	1745	QPSK	1	0	20.31	20.5±1	/
				1	49	20.71	20.5±1	/
				1	99	20.41	20.5±1	/
				50	0	20.53	20.5±1	1.0
				50	24	20.78	20.5±1	1.0
				50	49	20.67	20.5±1	1.0
				100	0	20.77	20.5±1	1.0
			16QAM	1	0	20.87	20.5±1	1.0
				1	49		20.5±1	1.0
				1	99	20.93	20.5±1	1.0
				50	0	20.71	20.5±1	1.0
				50	24	20.68	20.5±1	1.0
				50	49	20.92	20.5±1	1.0
				100	0	20.8	20.5±1	1.0

LTE Band 7:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	20775	2502.5	QPSK	1	0	17.73	17.5±1	/
				1	49	17.88	17.5±1	/
				1	99	17.59	17.5±1	/
				12	0	17.88	17.5±1	1.0
				12	24	17.84	17.5±1	1.0
				12	49	17.88	17.5±1	1.0
				25	0	17.75	17.5±1	1.0
			16QAM	1	0	17.86	17.5±1	1.0
				1	49	17.96	17.5±1	1.0
				1	99	17.97	17.5±1	1.0
				12	0	17.88	17.5±1	1.0
				12	24	17.93	17.5±1	1.0
				12	49	18.07	17.5±1	1.0
				25	0	17.91	17.5±1	1.0
	21100	2535	QPSK	1	0	17.45	17.5±1	/
				1	49	17.62	17.5±1	/
				1	99	17.58	17.5±1	/
				12	0	17.7	17.5±1	1.0
				12	24	17.56	17.5±1	1.0
				12	49	17.68	17.5±1	1.0
				25	0	17.58	17.5±1	1.0
			16QAM	1	0	17.87	17.5±1	1.0
				1	49	17.89	17.5±1	1.0
				1	99	18.03	17.5±1	1.0
				12	0	17.82	17.5±1	1.0
				12	24	17.89	17.5±1	1.0
				12	49	17.91	17.5±1	1.0
				25	0	17.47	17.5±1	1.0
	21425	2567.5	QPSK	1	0	17.66	17.5±1	/
				1	49	17.66	17.5±1	/
				1	99	17.64	17.5±1	/
				12	0	17.8	17.5±1	1.0
				12	24	17.77	17.5±1	1.0
				12	49	17.98	17.5±1	1.0
				25	0	17.8	17.5±1	1.0
			16QAM	1	0	17.7	17.5±1	1.0
				1	49	17.81	17.5±1	1.0
				1	99	17.94	17.5±1	1.0
				12	0	18.07	17.5±1	1.0
				12	24	18.03	17.5±1	1.0
				12	49	17.95	17.5±1	1.0
				25	0	17.88	17.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20800	2505	QPSK	1	0	17.8	17.5±1	/
				1	49	17.98	17.5±1	/
				1	99	17.62	17.5±1	/
				25	0	17.91	17.5±1	1.0
				25	24	17.82	17.5±1	1.0
				25	49	17.85	17.5±1	1.0
				50	0	17.88	17.5±1	1.0
			16QAM	1	0	17.86	17.5±1	1.0
				1	49	17.92	17.5±1	1.0
				1	99	17.68	17.5±1	1.0
				25	0	17.99	17.5±1	1.0
				25	24	17.96	17.5±1	1.0
				25	49	17.95	17.5±1	1.0
				50	0	17.99	17.5±1	1.0
	21100	2535	QPSK	1	0	17.64	17.5±1	/
				1	49	17.59	17.5±1	/
				1	99	17.69	17.5±1	/
				25	0	17.6	17.5±1	1.0
				25	24	17.71	17.5±1	1.0
				25	49	17.62	17.5±1	1.0
				50	0	17.61	17.5±1	1.0
			16QAM	1	0	17.97	17.5±1	1.0
				1	49	18.05	17.5±1	1.0
				1	99	17.86	17.5±1	1.0
				25	0	17.68	17.5±1	1.0
				25	24	17.78	17.5±1	1.0
				25	49	17.77	17.5±1	1.0
				50	0	17.6	17.5±1	1.0
	21400	2565	QPSK	1	0	17.72	17.5±1	/
				1	49	17.77	17.5±1	/
				1	99	17.69	17.5±1	/
				25	0	17.88	17.5±1	1.0
				25	24	17.8	17.5±1	1.0
				25	49	17.66	17.5±1	1.0
				50	0	17.81	17.5±1	1.0
			16QAM	1	0	17.95	17.5±1	1.0
				1	49	17.97	17.5±1	1.0
				1	99	17.88	17.5±1	1.0
				25	0	18	17.5±1	1.0
				25	24	17.98	17.5±1	1.0
				25	49	17.78	17.5±1	1.0
				50	0	17.94	17.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	20825	2507.5	QPSK	1	0	17.72	17.5±1	/
				1	49	17.93	17.5±1	/
				1	99	17.72	17.5±1	/
				36	0	17.88	17.5±1	1.0
				36	24	17.99	17.5±1	1.0
				36	49	17.79	17.5±1	1.0
				75	0	17.91	17.5±1	1.0
			16QAM	1	0	17.97	17.5±1	1.0
				1	49	17.99	17.5±1	1.0
				1	99	18	17.5±1	1.0
				36	0	17.83	17.5±1	1.0
				36	24	18.13	17.5±1	1.0
				36	49	17.94	17.5±1	1.0
				75	0	17.93	17.5±1	1.0
	21100	2535	QPSK	1	0	17.33	17.5±1	/
				1	49	17.68	17.5±1	/
				1	99	17.33	17.5±1	/
				36	0	17.64	17.5±1	1.0
				36	24	17.68	17.5±1	1.0
				36	49	17.51	17.5±1	1.0
				75	0	17.63	17.5±1	1.0
			16QAM	1	0	17.91	17.5±1	1.0
				1	49	18.16	17.5±1	1.0
				1	99	17.95	17.5±1	1.0
				36	0	17.66	17.5±1	1.0
				36	24	17.76	17.5±1	1.0
				36	49	17.77	17.5±1	1.0
				75	0	17.55	17.5±1	1.0
	21375	2562.5	QPSK	1	0	17.65	17.5±1	/
				1	49	18.07	17.5±1	/
				1	99	17.75	17.5±1	/
				36	0	17.74	17.5±1	1.0
				36	24	17.8	17.5±1	1.0
				36	49	17.68	17.5±1	1.0
				75	0	17.78	17.5±1	1.0
			16QAM	1	0	17.68	17.5±1	1.0
				1	49	17.87	17.5±1	1.0
				1	99	17.78	17.5±1	1.0
				36	0	17.92	17.5±1	1.0
				36	24	18.21	17.5±1	1.0
				36	49	17.78	17.5±1	1.0
				75	0	17.78	17.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	20850	2510	QPSK	1	0	17.94	17.5±1	/
				1	49	17.68	17.5±1	/
				1	99	17.57	17.5±1	/
				50	0	17.75	17.5±1	1.0
				50	24	17.63	17.5±1	1.0
				50	49	17.6	17.5±1	1.0
				100	0	17.73	17.5±1	1.0
			16QAM	1	0	17.78	17.5±1	1.0
				1	49	17.86	17.5±1	1.0
				1	99	17.85	17.5±1	1.0
				50	0	17.79	17.5±1	1.0
				50	24	17.8	17.5±1	1.0
				50	49	17.68	17.5±1	1.0
				100	0	17.92	17.5±1	1.0
	21100	2535	QPSK	1	0	17.54	17.5±1	/
				1	49	17.52	17.5±1	/
				1	99	17.64	17.5±1	/
				50	0	17.68	17.5±1	1.0
				50	24	17.48	17.5±1	1.0
				50	49	17.49	17.5±1	1.0
				100	0	17.66	17.5±1	1.0
			16QAM	1	0	17.93	17.5±1	1.0
				1	49	17.98	17.5±1	1.0
				1	99	17.84	17.5±1	1.0
				50	0	17.65	17.5±1	1.0
				50	24	17.79	17.5±1	1.0
				50	49	17.53	17.5±1	1.0
				100	0	17.66	17.5±1	1.0
	21350	2560	QPSK	1	0	17.64	17.5±1	/
				1	49	17.67	17.5±1	/
				1	99	17.76	17.5±1	/
				50	0	17.67	17.5±1	1.0
				50	24	17.76	17.5±1	1.0
				50	49	17.75	17.5±1	1.0
				100	0	18.11	17.5±1	1.0
			16QAM	1	0	17.81	17.5±1	1.0
				1	49	17.88	17.5±1	1.0
				1	99	17.86	17.5±1	1.0
				50	0	17.81	17.5±1	1.0
				50	24	17.78	17.5±1	1.0
				50	49	17.79	17.5±1	1.0
				100	0	18.01	17.5±1	1.0

LTE Band 41:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	40265	2557.5	QPSK	1	0	19.62	19.5±1	/
				1	12	19.72	19.5±1	/
				1	24	19.47	19.5±1	/
				12	0	19.41	19.5±1	1.0
				12	6	19.5	19.5±1	1.0
				12	11	19.53	19.5±1	1.0
				25	0	19.52	19.5±1	1.0
			16QAM	1	0	19.83	19.5±1	1.0
				1	12	19.68	19.5±1	1.0
				1	24	19.96	19.5±1	1.0
				12	0	19.58	19.5±1	1.0
				12	6	19.64	19.5±1	1.0
				12	11	19.64	19.5±1	1.0
				25	0	19.44	19.5±1	1.0
	40740	2605.0	QPSK	1	0	19.62	19.5±1	/
				1	12	19.86	19.5±1	/
				1	24	19.5	19.5±1	/
				12	0	19.55	19.5±1	1.0
				12	6	19.59	19.5±1	1.0
				12	11	19.64	19.5±1	1.0
				25	0	19.51	19.5±1	1.0
			16QAM	1	0	19.64	19.5±1	1.0
				1	12	20.21	19.5±1	1.0
				1	24	19.87	19.5±1	1.0
				12	0	19.77	19.5±1	1.0
				12	6	19.74	19.5±1	1.0
				12	11	19.72	19.5±1	1.0
				25	0	19.53	19.5±1	1.0
	41215	2652.5	QPSK	1	0	19.57	19.5±1	/
				1	12	19.7	19.5±1	/
				1	24	19.57	19.5±1	/
				12	0	19.39	19.5±1	1.0
				12	6	19.54	19.5±1	1.0
				12	11	19.48	19.5±1	1.0
				25	0	19.68	19.5±1	1.0
			16QAM	1	0	19.61	19.5±1	1.0
				1	12	20.03	19.5±1	1.0
				1	24	19.63	19.5±1	1.0
				12	0	19.51	19.5±1	1.0
				12	6	19.65	19.5±1	1.0
				12	11	19.6	19.5±1	1.0
				25	0	19.62	19.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	40290	2560.0	QPSK	1	0	19.41	19.5±1	/
				1	24	19.57	19.5±1	/
				1	49	19.61	19.5±1	/
				25	0	19.63	19.5±1	1.0
				25	12	19.68	19.5±1	1.0
				25	24	19.56	19.5±1	1.0
				50	0	19.54	19.5±1	1.0
			16QAM	1	0	19.95	19.5±1	1.0
				1	24	19.99	19.5±1	1.0
				1	49	19.7	19.5±1	1.0
				25	0	19.63	19.5±1	1.0
				25	12	19.68	19.5±1	1.0
				25	24	19.47	19.5±1	1.0
				50	0	19.59	19.5±1	1.0
	40740	2605.0	QPSK	1	0	19.84	19.5±1	/
				1	24	19.85	19.5±1	/
				1	49	19.72	19.5±1	/
				25	0	19.69	19.5±1	1.0
				25	12	19.7	19.5±1	1.0
				25	24	19.6	19.5±1	1.0
				50	0	19.56	19.5±1	1.0
			16QAM	1	0	20.04	19.5±1	1.0
				1	24	20.15	19.5±1	1.0
				1	49	20.12	19.5±1	1.0
				25	0	19.55	19.5±1	1.0
				25	12	19.57	19.5±1	1.0
				25	24	19.59	19.5±1	1.0
				50	0	19.68	19.5±1	1.0
	41190	2650.0	QPSK	1	0	19.7	19.5±1	/
				1	24	19.53	19.5±1	/
				1	49	19.39	19.5±1	/
				25	0	19.49	19.5±1	1.0
				25	12	19.48	19.5±1	1.0
				25	24	19.55	19.5±1	1.0
				50	0	19.39	19.5±1	1.0
			16QAM	1	0	20.03	19.5±1	1.0
				1	24	19.94	19.5±1	1.0
				1	49	19.82	19.5±1	1.0
				25	0	19.65	19.5±1	1.0
				25	12	19.47	19.5±1	1.0
				25	24	19.44	19.5±1	1.0
				50	0	19.46	19.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	40315	2562.5	QPSK	1	0	19.37	19.5±1	/
				1	37	19.79	19.5±1	/
				1	74	19.36	19.5±1	/
				36	0	19.51	19.5±1	1.0
				36	16	19.73	19.5±1	1.0
				36	35	19.61	19.5±1	1.0
				75	0	19.49	19.5±1	1.0
			16QAM	1	0	19.71	19.5±1	1.0
				1	37	20.16	19.5±1	1.0
				1	74	19.77	19.5±1	1.0
				36	0	19.66	19.5±1	1.0
				36	16	19.53	19.5±1	1.0
				36	35	19.56	19.5±1	1.0
				75	0	19.48	19.5±1	1.0
	40740	2605.0	QPSK	1	0	19.76	19.5±1	/
				1	37	19.9	19.5±1	/
				1	74	19.65	19.5±1	/
				36	0	19.58	19.5±1	1.0
				36	16	19.79	19.5±1	1.0
				36	35	19.72	19.5±1	1.0
				75	0	19.75	19.5±1	1.0
			16QAM	1	0	20.1	19.5±1	1.0
				1	37	20.2	19.5±1	1.0
				1	74	20.02	19.5±1	1.0
				36	0	19.56	19.5±1	1.0
				36	16	19.65	19.5±1	1.0
				36	35	19.53	19.5±1	1.0
				75	0	19.66	19.5±1	1.0
	41165	2647.5	QPSK	1	0	19.43	19.5±1	/
				1	37	19.68	19.5±1	/
				1	74	19.37	19.5±1	/
				36	0	19.45	19.5±1	1.0
				36	16	19.74	19.5±1	1.0
				36	35	19.52	19.5±1	1.0
				75	0	19.71	19.5±1	1.0
			16QAM	1	0	19.9	19.5±1	1.0
				1	37	20.04	19.5±1	1.0
				1	74	19.63	19.5±1	1.0
				36	0	19.6	19.5±1	1.0
				36	16	19.49	19.5±1	1.0
				36	35	19.6	19.5±1	1.0
				75	0	19.55	19.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	40340	2565.0	QPSK	1	0	19.45	19.5±1	/
				1	49	19.75	19.5±1	/
				1	99	19.49	19.5±1	/
				50	0	19.38	19.5±1	1.0
				50	24	19.43	19.5±1	1.0
				50	49	19.53	19.5±1	1.0
				100	0	19.62	19.5±1	1.0
			16QAM	1	0	19.62	19.5±1	1.0
				1	49	19.95	19.5±1	1.0
				1	99	19.65	19.5±1	1.0
				50	0	19.31	19.5±1	1.0
				50	24	19.5	19.5±1	1.0
				50	49	19.35	19.5±1	1.0
				100	0	19.55	19.5±1	1.0
	40740	2605.0	QPSK	1	0	19.43	19.5±1	/
				1	49	19.88	19.5±1	/
				1	99	19.44	19.5±1	/
				50	0	19.65	19.5±1	1.0
				50	24	19.79	19.5±1	1.0
				50	49	19.65	19.5±1	1.0
				100	0	19.75	19.5±1	1.0
			16QAM	1	0	19.44	19.5±1	1.0
				1	49	20.02	19.5±1	1.0
				1	99	19.6	19.5±1	1.0
				50	0	19.44	19.5±1	1.0
				50	24	19.65	19.5±1	1.0
				50	49	19.51	19.5±1	1.0
				100	0	19.59	19.5±1	1.0
	41140	2645.0	QPSK	1	0	19.25	19.5±1	/
				1	49	19.78	19.5±1	/
				1	99	19.33	19.5±1	/
				50	0	19.29	19.5±1	1.0
				50	24	20.29	19.5±1	1.0
				50	49	19.44	19.5±1	1.0
				100	0	19.41	19.5±1	1.0
			16QAM	1	0	19.64	19.5±1	1.0
				1	49	20.1	19.5±1	1.0
				1	99	19.72	19.5±1	1.0
				50	0	19.56	19.5±1	1.0
				50	24	19.56	19.5±1	1.0
				50	49	19.46	19.5±1	1.0
				100	0	19.51	19.5±1	1.0

LTE Band 66:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	131979	1710.7	QPSK	1	0	20.7	20.5±1	/
				1	2	20.71	20.5±1	/
				1	5	20.65	20.5±1	/
				3	0	20.82	20.5±1	/
				3	1	20.91	20.5±1	/
				3	2	20.82	20.5±1	/
				6	0	20.71	20.5±1	1.0
			16QAM	1	0	20.75	20.5±1	1.0
				1	2	21.25	20.5±1	1.0
				1	5	20.83	20.5±1	1.0
				3	0	20.94	20.5±1	1.0
				3	1	20.89	20.5±1	1.0
				3	2	20.8	20.5±1	1.0
				6	0	20.78	20.5±1	1.0
	132321	1744.9	QPSK	1	0	20.41	20.5±1	/
				1	2	20.51	20.5±1	/
				1	5	20.58	20.5±1	/
				3	0	20.55	20.5±1	/
				3	1	20.45	20.5±1	/
				3	2	20.65	20.5±1	/
				6	0	20.56	20.5±1	1.0
			16QAM	1	0	20.76	20.5±1	1.0
				1	2	21.06	20.5±1	1.0
				1	5	20.75	20.5±1	1.0
				3	0	20.68	20.5±1	1.0
				3	1	20.91	20.5±1	1.0
				3	2	20.7	20.5±1	1.0
				6	0	20.37	20.5±1	1.0
	132664	1779.2	QPSK	1	0	20.68	20.5±1	/
				1	2	20.68	20.5±1	/
				1	5	20.74	20.5±1	/
				3	0	20.75	20.5±1	/
				3	1	20.88	20.5±1	/
				3	2	20.71	20.5±1	/
			16QAM	6	0	20.69	20.5±1	1.0
				1	0	20.86	20.5±1	1.0
				1	2	20.69	20.5±1	1.0
				1	5	20.63	20.5±1	1.0
				3	0	21.05	20.5±1	1.0
				3	1	21.16	20.5±1	1.0
				3	2	21.1	20.5±1	1.0
				6	0	21.05	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	131987	1711.5	QPSK	1	0	20.68	20.5±1	/
				1	8	20.71	20.5±1	/
				1	14	20.64	20.5±1	/
				6	0	20.54	20.5±1	1.0
				6	4	20.8	20.5±1	1.0
				6	9	20.73	20.5±1	1.0
				15	0	20.7	20.5±1	1.0
			16QAM	1	0	20.79	20.5±1	1.0
				1	8	20.7	20.5±1	1.0
				1	14	20.68	20.5±1	1.0
				8	0	20.85	20.5±1	1.0
				8	4	20.85	20.5±1	1.0
				8	9	20.73	20.5±1	1.0
				15	0	20.78	20.5±1	1.0
	132321	1744.9	QPSK	1	0	20.41	20.5±1	/
				1	8	20.55	20.5±1	/
				1	14	20.59	20.5±1	/
				6	0	20.59	20.5±1	1.0
				6	4	20.63	20.5±1	1.0
				6	9	20.45	20.5±1	1.0
				15	0	20.55	20.5±1	1.0
			16QAM	1	0	21.04	20.5±1	1.0
				1	8	21.12	20.5±1	1.0
				1	14	21.06	20.5±1	1.0
				6	0	20.57	20.5±1	1.0
				6	4	20.75	20.5±1	1.0
				6	9	20.68	20.5±1	1.0
				15	0	20.55	20.5±1	1.0
	132656	1778.4	QPSK	1	0	20.84	20.5±1	/
				1	8	20.8	20.5±1	/
				1	14	20.66	20.5±1	/
				6	0	20.91	20.5±1	1.0
				6	4	20.87	20.5±1	1.0
				6	9	20.76	20.5±1	1.0
				15	0	20.82	20.5±1	1.0
			16QAM	1	0	20.92	20.5±1	1.0
				1	8	20.9	20.5±1	1.0
				1	14	20.93	20.5±1	1.0
				8	0	20.85	20.5±1	1.0
				8	4	20.79	20.5±1	1.0
				8	9	20.68	20.5±1	1.0
				15	0	20.88	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	131997	1712.5	QPSK	1	0	20.61	20.5±1	/
				1	49	20.79	20.5±1	/
				1	99	20.54	20.5±1	/
				12	0	20.59	20.5±1	1.0
				12	24	20.7	20.5±1	1.0
				12	49	20.7	20.5±1	1.0
				25	0	20.66	20.5±1	1.0
			16QAM	1	0	20.75	20.5±1	1.0
				1	49	21.01	20.5±1	1.0
				1	99	20.89	20.5±1	1.0
				12	0	20.75	20.5±1	1.0
				12	24	20.91	20.5±1	1.0
				12	49	20.87	20.5±1	1.0
				25	0	20.69	20.5±1	1.0
	132321	1744.9	QPSK	1	0	20.48	20.5±1	/
				1	49	20.54	20.5±1	/
				1	99	20.58	20.5±1	/
				12	0	20.38	20.5±1	1.0
				12	24	20.47	20.5±1	1.0
				12	49	20.37	20.5±1	1.0
				25	0	20.64	20.5±1	1.0
			16QAM	1	0	21.07	20.5±1	1.0
				1	49	21.17	20.5±1	1.0
				1	99	20.96	20.5±1	1.0
				12	0	20.59	20.5±1	1.0
				12	24	20.81	20.5±1	1.0
				12	49	20.68	20.5±1	1.0
				25	0	20.78	20.5±1	1.0
	132646	1777.4	QPSK	1	0	20.6	20.5±1	/
				1	49	20.96	20.5±1	/
				1	99	20.81	20.5±1	/
				12	0	20.9	20.5±1	1.0
				12	24	20.91	20.5±1	1.0
				12	49	20.85	20.5±1	1.0
				25	0	20.79	20.5±1	1.0
			16QAM	1	0	20.67	20.5±1	1.0
				1	49	21.01	20.5±1	1.0
				1	99	20.94	20.5±1	1.0
				12	0	20.75	20.5±1	1.0
				12	24	20.88	20.5±1	1.0
				12	49	20.83	20.5±1	1.0
				25	0	20.84	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	132022	1715	QPSK	1	0	20.5	20.5±1	/
				1	49	20.68	20.5±1	/
				1	99	20.51	20.5±1	/
				25	0	20.67	20.5±1	1.0
				25	24	20.56	20.5±1	1.0
				25	49	20.61	20.5±1	1.0
				50	0	20.55	20.5±1	1.0
			16QAM	1	0	20.69	20.5±1	1.0
				1	49	20.64	20.5±1	1.0
				1	99	20.55	20.5±1	1.0
				25	0	20.86	20.5±1	1.0
				25	24	20.81	20.5±1	1.0
				25	49	20.76	20.5±1	1.0
				50	0	20.83	20.5±1	1.0
	132321	1744.9	QPSK	1	0	20.6	20.5±1	/
				1	49	20.76	20.5±1	/
				1	99	20.61	20.5±1	/
				25	0	20.48	20.5±1	1.0
				25	24	20.49	20.5±1	1.0
				25	49	20.59	20.5±1	1.0
				50	0	20.67	20.5±1	1.0
			16QAM	1	0	20.96	20.5±1	1.0
				1	49	21.02	20.5±1	1.0
				1	99	20.93	20.5±1	1.0
				25	0	20.57	20.5±1	1.0
				25	24	20.67	20.5±1	1.0
				25	49	20.72	20.5±1	1.0
				50	0	20.82	20.5±1	1.0
	132621	1774.9	QPSK	1	0	20.7	20.5±1	/
				1	49	20.68	20.5±1	/
				1	99	20.73	20.5±1	/
				25	0	20.79	20.5±1	1.0
				25	24	20.95	20.5±1	1.0
				25	49	20.78	20.5±1	1.0
				50	0	20.68	20.5±1	1.0
			16QAM	1	0	20.85	20.5±1	1.0
				1	49	21.03	20.5±1	1.0
				1	99	20.93	20.5±1	1.0
				25	0	21	20.5±1	1.0
				25	24	21.03	20.5±1	1.0
				25	49	20.9	20.5±1	1.0
				50	0	20.75	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	132097	1722.5	QPSK	1	0	20.43	20.5±1	/
				1	49	20.63	20.5±1	/
				1	99	20.29	20.5±1	/
				36	0	20.63	20.5±1	1.0
				36	24	20.6	20.5±1	1.0
				36	49	20.58	20.5±1	1.0
				75	0	20.61	20.5±1	1.0
			16QAM	1	0	20.5	20.5±1	1.0
				1	49	20.7	20.5±1	1.0
				1	99	20.46	20.5±1	1.0
				36	0	20.65	20.5±1	1.0
				36	24	20.6	20.5±1	1.0
				36	49	20.62	20.5±1	1.0
				75	0	20.69	20.5±1	1.0
	132321	1744.9	QPSK	1	0	20.49	20.5±1	/
				1	49	20.61	20.5±1	/
				1	99	20.42	20.5±1	/
				36	0	20.54	20.5±1	1.0
				36	24	20.47	20.5±1	1.0
				36	49	20.67	20.5±1	1.0
				75	0	20.54	20.5±1	1.0
			16QAM	1	0	20.71	20.5±1	1.0
				1	49	21.13	20.5±1	1.0
				1	99	20.96	20.5±1	1.0
				36	0	20.53	20.5±1	1.0
				36	24	20.61	20.5±1	1.0
				36	49	20.77	20.5±1	1.0
				75	0	20.77	20.5±1	1.0
	132546	1767.4	QPSK	1	0	20.56	20.5±1	/
				1	49	21.04	20.5±1	/
				1	99	20.73	20.5±1	/
				36	0	20.67	20.5±1	1.0
				36	24	20.81	20.5±1	1.0
				36	49	20.83	20.5±1	1.0
				75	0	20.73	20.5±1	1.0
			16QAM	1	0	21.24	20.5±1	1.0
				1	49	21.22	20.5±1	1.0
				1	99	21.14	20.5±1	1.0
				36	0	20.72	20.5±1	1.0
				36	24	20.85	20.5±1	1.0
				36	49	20.71	20.0±1	1.0
				75	0	20.66	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	132072	1720	QPSK	1	0	20.39	20.5±1	/
				1	49	20.53	20.5±1	/
				1	99	20.31	20.5±1	/
				50	0	20.63	20.5±1	1.0
				50	24	20.7	20.5±1	1.0
				50	49	20.58	20.5±1	1.0
				100	0	20.45	20.5±1	1.0
			16QAM	1	0	20.91	20.5±1	1.0
				1	49	21.16	20.5±1	1.0
				1	99	20.81	20.5±1	1.0
				50	0	20.66	20.5±1	1.0
				50	24	20.55	20.5±1	1.0
				50	49	20.66	20.5±1	1.0
				100	0	20.71	20.5±1	1.0
	132321	1744.9	QPSK	1	0	20.28	20.5±1	/
				1	49	20.5	20.5±1	/
				1	99	20.21	20.5±1	/
				50	0	20.75	20.5±1	1.0
				50	24	20.74	20.5±1	1.0
				50	49	20.72	20.5±1	1.0
				100	0	20.5	20.5±1	1.0
			16QAM	1	0	20.83	20.5±1	1.0
				1	49	21.22	20.5±1	1.0
				1	99	20.92	20.5±1	1.0
				50	0	20.61	20.5±1	1.0
				50	24	20.63	20.5±1	1.0
				50	49	20.87	20.5±1	1.0
				100	0	20.71	20.5±1	1.0
	132471	1759.9	QPSK	1	0	20.52	20.5±1	/
				1	49	20.82	20.5±1	/
				1	99	20.69	20.5±1	/
				50	0	20.76	20.5±1	1.0
				50	24	20.96	20.5±1	1.0
				50	49	20.62	20.5±1	1.0
				100	0	20.74	20.5±1	1.0
			16QAM	1	0	21.02	20.5±1	1.0
				1	49	20.99	20.5±1	1.0
				1	99	21.01	20.5±1	1.0
				50	0	20.75	20.5±1	1.0
				50	24	20.71	20.5±1	1.0
				50	49	20.82	20.5±1	1.0
				100	0	20.78	20.5±1	1.0

Power Level P4:**LTE Band 2:**

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	18607	1850.7	QPSK	1	0	20.69	21.0±1	/
				1	2	20.67	21.0±1	/
				1	5	20.56	21.0±1	/
				3	0	20.66	21.0±1	/
				3	1	20.78	21.0±1	/
				3	2	20.69	21.0±1	/
				6	0	20.55	21.0±1	1.0
			16QAM	1	0	20.8	21.0±1	1.0
				1	2	20.76	21.0±1	1.0
				1	5	20.69	21.0±1	1.0
				3	0	20.86	21.0±1	1.0
				3	1	20.69	21.0±1	1.0
				3	2	20.78	21.0±1	1.0
				6	0	20.82	21.0±1	1.0
	18900	1880	QPSK	1	0	20.3	21.0±1	/
				1	2	20.56	21.0±1	/
				1	5	20.31	21.0±1	/
				3	0	20.52	21.0±1	/
				3	1	20.45	21.0±1	/
				3	2	20.39	21.0±1	/
				6	0	20.26	21.0±1	1.0
			16QAM	1	0	20.76	21.0±1	1.0
				1	2	21.04	21.0±1	1.0
				1	5	20.73	21.0±1	1.0
				3	0	20.78	21.0±1	1.0
				3	1	20.93	21.0±1	1.0
				3	2	20.64	21.0±1	1.0
				6	0	20.47	21.0±1	1.0
	19193	1909.3	QPSK	1	0	20.36	21.0±1	/
				1	2	20.58	21.0±1	/
				1	5	20.43	21.0±1	/
				3	0	20.48	21.0±1	/
				3	1	20.63	21.0±1	/
				3	2	20.65	21.0±1	/
				6	0	20.62	21.0±1	1.0
			16QAM	1	0	20.58	21.0±1	1.0
				1	2	20.66	21.0±1	1.0
				1	5	20.52	21.0±1	1.0
				3	0	20.9	21.0±1	1.0
				3	1	21	21.0±1	1.0
				3	2	20.95	21.0±1	1.0
				6	0	20.78	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	18615	1851.5	QPSK	1	0	20.54	21.0±1	/
				1	8	20.61	21.0±1	/
				1	14	20.51	21.0±1	/
				6	0	20.42	21.0±1	1.0
				6	4	20.47	21.0±1	1.0
				6	9	20.64	21.0±1	1.0
				15	0	20.48	21.0±1	1.0
			16QAM	1	0	20.44	22.0±1	1.0
				1	8	20.63	22.0±1	1.0
				1	14	20.5	22.0±1	1.0
				6	0	20.6	20.0±1	1.0
				6	4	20.82	20.0±1	1.0
				6	9	20.7	20.0±1	1.0
				15	0	20.77	20.0±1	1.0
	18900	1880	QPSK	1	0	20.34	21.5±1	/
				1	8	20.58	21.5±1	/
				1	14	20.48	21.5±1	/
				6	0	20.43	21.5±1	1.0
				6	4	20.54	21.5±1	1.0
				6	9	20.31	21.5±1	1.0
				15	0	20.5	21.5±1	1.0
			16QAM	1	0	20.75	20.7±1	1.0
				1	8	21.07	20.7±1	1.0
				1	14	20.91	20.7±1	1.0
				6	0	20.56	20.7±1	1.0
				6	4	20.68	20.7±1	1.0
				6	9	20.49	20.7±1	1.0
				15	0	20.64	20.7±1	1.0
	19185	1908.5	QPSK	1	0	20.64	21.5±1	/
				1	8	20.7	21.5±1	/
				1	14	20.38	21.5±1	/
				6	0	20.53	21.5±1	1.0
				6	4	20.68	21.5±1	1.0
				6	9	20.58	21.5±1	1.0
				15	0	20.69	21.5±1	1.0
			16QAM	1	0	20.72	20.8±1	1.0
				1	8	20.69	20.8±1	1.0
				1	14	20.53	20.8±1	1.0
				6	0	20.71	20.8±1	1.0
				6	4	20.61	20.8±1	1.0
				6	9	20.6	20.8±1	1.0
				15	0	20.65	20.8±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	18625	1852.5	QPSK	1	0	20.59	21.0±1	/
				1	12	20.82	21.0±1	/
				1	24	20.52	21.0±1	/
				12	0	20.63	21.0±1	1.0
				12	6	20.52	21.0±1	1.0
				12	11	20.68	21.0±1	1.0
				25	0	20.43	21.0±1	1.0
			16QAM	1	0	20.85	20.5±1	1.0
				1	12	20.91	20.5±1	1.0
				1	24	20.68	20.5±1	1.0
				12	0	20.62	20.5±1	1.0
				12	6	20.67	20.5±1	1.0
				12	11	20.56	20.5±1	1.0
				25	0	20.75	20.5±1	1.0
	18900	1880	QPSK	1	0	20.28	21.0±1	/
				1	12	20.71	21.0±1	/
				1	24	20.49	21.0±1	/
				12	0	20.37	21.0±1	1.0
				12	6	20.49	21.0±1	1.0
				12	11	20.49	21.0±1	1.0
				25	0	20.39	21.0±1	1.0
			16QAM	1	0	20.88	20.8±1	1.0
				1	12	21.2	20.8±1	1.0
				1	24	20.99	20.8±1	1.0
				12	0	20.63	20.8±1	1.0
				12	6	20.67	20.8±1	1.0
				12	11	20.48	20.8±1	1.0
				25	0	20.6	20.8±1	1.0
	19175	1907.5	QPSK	1	0	20.42	21.0±1	/
				1	12	20.67	21.0±1	/
				1	24	20.37	21.0±1	/
				12	0	20.67	21.0±1	1.0
				12	6	20.49	21.0±1	1.0
				12	11	20.61	21.0±1	1.0
				25	0	20.55	21.0±1	1.0
			16QAM	1	0	20.64	20.5±1	1.0
				1	12	20.73	20.5±1	1.0
				1	24	20.66	20.5±1	1.0
				12	0	20.63	20.5±1	1.0
				12	6	20.54	20.5±1	1.0
				12	11	20.61	20.5±1	1.0
				25	0	20.45	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	18650	1855	QPSK	1	0	20.66	21.0±1	/
				1	24	20.6	21.0±1	/
				1	49	20.52	21.0±1	/
				25	0	20.45	21.0±1	1.0
				25	12	20.53	21.0±1	1.0
				25	24	20.64	21.0±1	1.0
				50	0	20.65	21.0±1	1.0
			16QAM	1	0	20.7	21.0±1	1.0
				1	24	20.74	21.0±1	1.0
				1	49	20.6	21.0±1	1.0
				25	0	20.73	21.0±1	1.0
				25	12	20.67	21.0±1	1.0
				25	24	20.56	21.0±1	1.0
				50	0	20.61	21.0±1	1.0
	18900	1880	QPSK	1	0	20.44	21.0±1	/
				1	24	20.45	21.0±1	/
				1	49	20.44	21.0±1	/
				25	0	20.37	21.0±1	1.0
				25	12	20.58	21.0±1	1.0
				25	24	20.35	21.0±1	1.0
				50	0	20.48	21.0±1	1.0
			16QAM	1	0	20.83	21.0±1	1.0
				1	24	20.82	21.0±1	1.0
				1	49	20.73	21.0±1	1.0
				25	0	20.52	21.0±1	1.0
				25	12	20.66	21.0±1	1.0
				25	24	20.64	21.0±1	1.0
				50	0	20.61	21.0±1	1.0
	19150	1905	QPSK	1	0	20.31	21.0±1	/
				1	24	20.52	21.0±1	/
				1	49	20.47	21.0±1	/
				25	0	20.39	21.0±1	1.0
				25	12	20.48	21.0±1	1.0
				25	24	20.56	21.0±1	1.0
				50	0	20.53	21.0±1	1.0
			16QAM	1	0	20.64	21.0±1	1.0
				1	24	20.57	21.0±1	1.0
				1	49	20.65	21.0±1	1.0
				25	0	20.75	21.0±1	1.0
				25	12	20.68	21.0±1	1.0
				25	24	20.55	21.0±1	1.0
				50	0	20.66	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	18675	1857.5	QPSK	1	0	20.56	21.0±1	/
				1	37	20.68	21.0±1	/
				1	74	20.28	21.0±1	/
				36	0	20.45	21.0±1	1.0
				36	16	20.48	21.0±1	1.0
				36	35	20.45	21.0±1	1.0
				75	0	20.6	21.0±1	1.0
			16QAM	1	0	20.4	21.0±1	1.0
				1	37	20.68	21.0±1	1.0
				1	74	20.4	21.0±1	1.0
				36	0	20.47	21.0±1	1.0
				36	16	20.46	21.0±1	1.0
				36	35	20.35	21.0±1	1.0
				75	0	20.41	21.0±1	1.0
	18900	1880	QPSK	1	0	20.31	21.0±1	/
				1	37	20.58	21.0±1	/
				1	74	20.4	21.0±1	/
				36	0	20.42	21.0±1	1.0
				36	16	20.54	21.0±1	1.0
				36	35	20.38	21.0±1	1.0
				75	0	20.51	21.0±1	1.0
			16QAM	1	0	20.83	21.0±1	1.0
				1	37	20.96	21.0±1	1.0
				1	74	20.84	21.0±1	1.0
				36	0	20.56	21.0±1	1.0
				36	16	20.61	21.0±1	1.0
				36	35	20.36	21.0±1	1.0
				75	0	20.35	21.0±1	1.0
	19125	1902.5	QPSK	1	0	20.43	21.0±1	/
				1	37	20.65	21.0±1	/
				1	74	20.53	21.0±1	/
				36	0	20.5	21.0±1	1.0
				36	16	20.44	21.0±1	1.0
				36	35	20.4	21.0±1	1.0
				75	0	20.57	21.0±1	1.0
			16QAM	1	0	20.98	21.0±1	1.0
				1	37	21.21	21.0±1	1.0
				1	74	20.82	21.0±1	1.0
				36	0	20.43	21.0±1	1.0
				36	16	20.61	21.0±1	1.0
				36	35	20.56	21.0±1	1.0
				75	0	20.58	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	18700	1860	QPSK	1	0	20.28	21.0±1	/
				1	49	20.54	21.0±1	/
				1	99	20.07	21.0±1	/
				50	0	20.42	21.0±1	1.0
				50	24	20.56	21.0±1	1.0
				50	49	20.59	21.0±1	1.0
				100	0	20.46	21.0±1	1.0
			16QAM	1	0	20.79	21.0±1	1.0
				1	49	21.33	21.0±1	1.0
				1	99	20.76	21.0±1	1.0
				50	0	20.72	21.0±1	1.0
				50	24	20.7	21.0±1	1.0
				50	49	20.62	21.0±1	1.0
				100	0	20.47	21.0±1	1.0
	18900	1880	QPSK	1	0	20.06	21.0±1	/
				1	49	20.41	21.0±1	/
				1	99	20.22	21.0±1	/
				50	0	20.45	21.0±1	1.0
				50	24	20.39	21.0±1	1.0
				50	49	20.43	21.0±1	1.0
				100	0	20.34	21.0±1	1.0
			16QAM	1	0	20.79	21.0±1	1.0
				1	49	21.01	21.0±1	1.0
				1	99	20.77	21.0±1	1.0
				50	0	20.46	21.0±1	1.0
				50	24	20.53	21.0±1	1.0
				50	49	20.39	21.0±1	1.0
				100	0	20.55	21.0±1	1.0
	19100	1900	QPSK	1	0	20.23	21.0±1	/
				1	49	20.5	21.0±1	/
				1	99	20.38	21.0±1	/
				50	0	20.42	21.0±1	1.0
				50	24	20.55	21.0±1	1.0
				50	49	20.36	21.0±1	1.0
				100	0	20.44	21.0±1	1.0
			16QAM	1	0	20.63	21.0±1	1.0
				1	49	20.98	21.0±1	1.0
				1	99	20.67	21.0±1	1.0
				50	0	20.49	21.0±1	1.0
				50	24	20.51	21.0±1	1.0
				50	49	20.41	21.0±1	1.0
				100	0	20.46	21.0±1	1.0

LTE Band 4:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	19957	1710.7	QPSK	1	0	21.44	21.5±1	/
				1	2	21.59	21.5±1	/
				1	5	21.41	21.5±1	/
				3	0	21.58	21.5±1	/
				3	1	21.63	21.5±1	/
				3	2	21.65	21.5±1	/
				6	0	21.47	21.5±1	1.0
			16QAM	1	0	21.61	21.5±1	1.0
				1	2	21.73	21.5±1	1.0
				1	5	21.57	21.5±1	1.0
				3	0	21.67	21.5±1	1.0
				3	1	21.75	21.5±1	1.0
				3	2	21.67	21.5±1	1.0
				6	0	21.68	21.5±1	1.0
	20175	1732.5	QPSK	1	0	21.19	21.5±1	/
				1	2	21.29	21.5±1	/
				1	5	21.13	21.5±1	/
				3	0	21.29	21.5±1	/
				3	1	21.34	21.5±1	/
				3	2	21.28	21.5±1	/
				6	0	21.25	21.5±1	1.0
			16QAM	1	0	21.55	21.5±1	1.0
				1	2	21.74	21.5±1	1.0
				1	5	21.58	21.5±1	1.0
				3	0	21.47	21.5±1	1.0
				3	1	21.56	21.5±1	1.0
				3	2	21.53	21.5±1	1.0
				6	0	21.12	21.5±1	1.0
	20393	1754.3	QPSK	1	0	21.31	21.5±1	/
				1	2	21.47	21.5±1	/
				1	5	21.32	21.5±1	/
				3	0	21.53	21.5±1	/
				3	1	21.55	21.5±1	/
				3	2	21.56	21.5±1	/
				6	0	21.36	21.5±1	1.0
			16QAM	1	0	21.54	21.5±1	1.0
				1	2	21.6	21.5±1	1.0
				1	5	21.52	21.5±1	1.0
				3	0	21.77	21.5±1	1.0
				3	1	21.81	21.5±1	1.0
				3	2	21.77	21.5±1	1.0
				6	0	21.64	21.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	19965	1711.5	QPSK	1	0	21.51	21.5±1	/
				1	8	21.6	21.5±1	/
				1	14	21.43	21.5±1	/
				6	0	21.47	21.5±1	1.0
				6	4	21.53	21.5±1	1.0
				6	9	21.49	21.5±1	1.0
				15	0	21.48	21.5±1	1.0
			16QAM	1	0	21.5	21.5±1	1.0
				1	8	21.59	21.5±1	1.0
				1	14	21.38	21.5±1	1.0
				8	0	21.65	21.5±1	1.0
				8	4	21.7	21.5±1	1.0
				8	9	21.63	21.5±1	1.0
				15	0	21.64	21.5±1	1.0
	20175	1732.5	QPSK	1	0	21.28	21.5±1	/
				1	8	21.31	21.5±1	/
				1	14	21.28	21.5±1	/
				6	0	21.3	21.5±1	1.0
				6	4	21.28	21.5±1	1.0
				6	9	21.26	21.5±1	1.0
				15	0	21.22	21.5±1	1.0
			16QAM	1	0	21.65	21.5±1	1.0
				1	8	21.87	21.5±1	1.0
				1	14	21.62	21.5±1	1.0
				6	0	21.32	21.5±1	1.0
				6	4	21.4	21.5±1	1.0
				6	9	21.34	21.5±1	1.0
				15	0	21.28	21.5±1	1.0
	20385	1753.5	QPSK	1	0	21.42	21.5±1	/
				1	8	21.58	21.5±1	/
				1	14	21.36	21.5±1	/
				6	0	21.44	21.5±1	1.0
				6	4	21.55	21.5±1	1.0
				6	9	21.48	21.5±1	1.0
				15	0	21.46	21.5±1	1.0
			16QAM	1	0	21.57	21.5±1	1.0
				1	8	21.73	21.5±1	1.0
				1	14	21.54	21.5±1	1.0
				8	0	21.54	21.5±1	1.0
				8	4	21.6	21.5±1	1.0
				8	9	21.55	21.5±1	1.0
				15	0	21.55	21.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	19975	1712.5	QPSK	1	0	21.44	21.5±1	/
				1	49	21.57	21.5±1	/
				1	99	21.34	21.5±1	/
				12	0	21.5	21.5±1	1.0
				12	24	21.59	21.5±1	1.0
				12	49	21.52	21.5±1	1.0
				25	0	21.48	21.5±1	1.0
			16QAM	1	0	21.67	21.5±1	1.0
				1	49	21.79	21.5±1	1.0
				1	99	21.62	21.5±1	1.0
				12	0	21.63	21.5±1	1.0
				12	24	21.73	21.5±1	1.0
				12	49	21.67	21.5±1	1.0
				25	0	21.65	21.5±1	1.0
	20175	1732.5	QPSK	1	0	21.1	21.5±1	/
				1	49	21.4	21.5±1	/
				1	99	21.11	21.5±1	/
				12	0	21.26	21.5±1	1.0
				12	24	21.29	21.5±1	1.0
				12	49	21.21	21.5±1	1.0
				25	0	21.2	21.5±1	1.0
			16QAM	1	0	21.73	21.5±1	1.0
				1	49	21.94	21.5±1	1.0
				1	99	21.65	21.5±1	1.0
				12	0	21.43	21.5±1	1.0
				12	24	21.44	21.5±1	1.0
				12	49	21.38	21.5±1	1.0
				25	0	21.33	21.5±1	1.0
	20375	1752.5	QPSK	1	0	21.34	21.5±1	/
				1	49	21.69	21.5±1	/
				1	99	21.46	21.5±1	/
				12	0	21.39	21.5±1	1.0
				12	24	21.52	21.5±1	1.0
				12	49	21.46	21.5±1	1.0
				25	0	21.44	21.5±1	1.0
			16QAM	1	0	21.48	21.5±1	1.0
				1	49	21.67	21.5±1	1.0
				1	99	21.59	21.5±1	1.0
				12	0	21.53	21.5±1	1.0
				12	24	21.61	21.5±1	1.0
				12	49	21.62	21.5±1	1.0
				25	0	21.51	21.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20000	1715	QPSK	1	0	21.55	21.5±1	/
				1	49	21.47	21.5±1	/
				1	99	21.4	21.5±1	/
				25	0	21.43	21.5±1	1.0
				25	24	21.46	21.5±1	1.0
				25	49	21.43	21.5±1	1.0
				50	0	21.45	21.5±1	1.0
			16QAM	1	0	21.47	21.5±1	1.0
				1	49	21.46	21.5±1	1.0
				1	99	21.47	21.5±1	1.0
				25	0	21.63	21.5±1	1.0
				25	24	21.58	21.5±1	1.0
				25	49	21.52	21.5±1	1.0
				50	0	21.51	21.5±1	1.0
	20175	1732.5	QPSK	1	0	21.23	21.5±1	/
				1	49	21.31	21.5±1	/
				1	99	21.22	21.5±1	/
				25	0	21.3	21.5±1	1.0
				25	24	21.23	21.5±1	1.0
				25	49	21.2	21.5±1	1.0
				50	0	21.21	21.5±1	1.0
			16QAM	1	0	21.66	21.5±1	1.0
				1	49	21.72	21.5±1	1.0
				1	99	21.67	21.5±1	1.0
				25	0	21.36	21.5±1	1.0
				25	24	21.38	21.5±1	1.0
				25	49	21.34	21.5±1	1.0
				50	0	21.37	21.5±1	1.0
	20350	1750	QPSK	1	0	21.35	21.5±1	/
				1	49	21.4	21.5±1	/
				1	99	21.42	21.5±1	/
				25	0	21.34	21.5±1	1.0
				25	24	21.37	21.5±1	1.0
				25	49	21.4	21.5±1	1.0
				50	0	21.42	21.5±1	1.0
			16QAM	1	0	21.41	21.5±1	1.0
				1	49	21.56	21.5±1	1.0
				1	99	21.51	21.5±1	1.0
				25	0	21.55	21.5±1	1.0
				25	24	21.56	21.5±1	1.0
				25	49	21.69	21.5±1	1.0
				50	0	21.64	21.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	20025	1717.5	QPSK	1	0	21.32	21.5±1	/
				1	49	21.47	21.5±1	/
				1	99	21.18	21.5±1	/
				36	0	21.42	21.5±1	1.0
				36	24	21.42	21.5±1	1.0
				36	49	21.36	21.5±1	1.0
				75	0	21.44	21.5±1	1.0
			16QAM	1	0	21.41	21.5±1	1.0
				1	49	21.5	21.5±1	1.0
				1	99	21.23	21.5±1	1.0
				36	0	21.39	21.5±1	1.0
				36	24	21.39	21.5±1	1.0
				36	49	21.44	21.5±1	1.0
				75	0	21.43	21.5±1	1.0
	20175	1732.5	QPSK	1	0	21.27	21.5±1	/
				1	49	21.41	21.5±1	/
				1	99	21.16	21.5±1	/
				36	0	21.34	21.5±1	1.0
				36	24	21.37	21.5±1	1.0
				36	49	21.29	21.5±1	1.0
				75	0	21.38	21.5±1	1.0
			16QAM	1	0	21.58	21.5±1	1.0
				1	49	21.82	21.5±1	1.0
				1	99	21.62	21.5±1	1.0
				36	0	21.3	21.5±1	1.0
				36	24	21.33	21.5±1	1.0
				36	49	21.34	21.5±1	1.0
				75	0	21.3	21.5±1	1.0
	20325	1747.5	QPSK	1	0	21.13	21.5±1	/
				1	49	21.45	21.5±1	/
				1	99	21.33	21.5±1	/
				36	0	21.41	21.5±1	1.0
				36	24	21.43	21.5±1	1.0
				36	49	21.45	21.5±1	1.0
				75	0	21.37	21.5±1	1.0
			16QAM	1	0	21.67	21.5±1	1.0
				1	49	22.01	21.5±1	1.0
				1	99	21.9	21.5±1	1.0
				36	0	21.34	21.5±1	1.0
				36	24	21.42	21.5±1	1.0
				36	49	21.53	21.5±1	1.0
				75	0	21.42	21.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	20050	1720	QPSK	1	0	21.19	21.5±1	/
				1	49	21.39	21.5±1	/
				1	99	21.08	21.5±1	/
				50	0	21.38	21.5±1	1.0
				50	24	21.4	21.5±1	1.0
				50	49	21.27	21.5±1	1.0
				100	0	21.35	21.5±1	1.0
			16QAM	1	0	21.76	21.5±1	1.0
				1	49	22.04	21.5±1	1.0
				1	99	21.62	21.5±1	1.0
				50	0	21.41	21.5±1	1.0
				50	24	21.5	21.5±1	1.0
				50	49	21.36	21.5±1	1.0
				100	0	21.47	21.5±1	1.0
	20175	1732.5	QPSK	1	0	20.95	21.5±1	/
				1	49	21.34	21.5±1	/
				1	99	20.97	21.5±1	/
				50	0	21.34	21.5±1	1.0
				50	24	21.32	21.5±1	1.0
				50	49	21.28	21.5±1	1.0
				100	0	21.34	21.5±1	1.0
			16QAM	1	0	21.58	21.5±1	1.0
				1	49	21.84	21.5±1	1.0
				1	99	21.55	21.5±1	1.0
				50	0	21.4	21.5±1	1.0
				50	24	21.38	21.5±1	1.0
				50	49	21.37	21.5±1	1.0
				100	0	21.35	21.5±1	1.0
	20300	1745	QPSK	1	0	20.93	21.5±1	/
				1	49	21.38	21.5±1	/
				1	99	21.16	21.5±1	/
				50	0	21.33	21.5±1	1.0
				50	24	21.38	21.5±1	1.0
				50	49	21.4	21.5±1	1.0
				100	0	21.36	21.5±1	1.0
			16QAM	1	0	21.46	21.5±1	1.0
				1	49	21.94	21.5±1	1.0
				1	99	21.78	21.5±1	1.0
				50	0	21.38	21.5±1	1.0
				50	24	21.4	21.5±1	1.0
				50	49	21.51	21.5±1	1.0
				100	0	21.46	21.5±1	1.0

LTE Band 7:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	20775	2502.5	QPSK	1	0	18.25	18.5±1	/
				1	49	18.48	18.5±1	/
				1	99	18.28	18.5±1	/
				12	0	18.27	18.5±1	1.0
				12	24	18.32	18.5±1	1.0
				12	49	18.36	18.5±1	1.0
				25	0	18.3	18.5±1	1.0
			16QAM	1	0	18.4	18.5±1	1.0
				1	49	18.55	18.5±1	1.0
				1	99	18.37	18.5±1	1.0
				12	0	18.31	18.5±1	1.0
				12	24	18.36	18.5±1	1.0
				12	49	18.35	18.5±1	1.0
				25	0	18.3	18.5±1	1.0
	21100	2535	QPSK	1	0	18.19	18.5±1	/
				1	49	18.45	18.5±1	/
				1	99	18.24	18.5±1	/
				12	0	18.29	18.5±1	1.0
				12	24	18.27	18.5±1	1.0
				12	49	18.25	18.5±1	1.0
				25	0	18.24	18.5±1	1.0
			16QAM	1	0	18.33	18.5±1	1.0
				1	49	18.58	18.5±1	1.0
				1	99	18.34	18.5±1	1.0
				12	0	18.27	18.5±1	1.0
				12	24	18.35	18.5±1	1.0
				12	49	18.36	18.5±1	1.0
				25	0	18.28	18.5±1	1.0
	21425	2567.5	QPSK	1	0	18.48	18.5±1	/
				1	49	18.59	18.5±1	/
				1	99	18.42	18.5±1	/
				12	0	18.47	18.5±1	1.0
				12	24	18.44	18.5±1	1.0
				12	49	18.43	18.5±1	1.0
				25	0	18.44	18.5±1	1.0
			16QAM	1	0	18.91	18.5±1	1.0
				1	49	19.1	18.5±1	1.0
				1	99	18.86	18.5±1	1.0
				12	0	18.63	18.5±1	1.0
				12	24	18.62	18.5±1	1.0
				12	49	18.54	18.5±1	1.0
				25	0	18.51	18.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20800	2505	QPSK	1	0	18.34	18.5±1	/
				1	49	18.48	18.5±1	/
				1	99	18.4	18.5±1	/
				25	0	18.39	18.5±1	1.0
				25	24	18.38	18.5±1	1.0
				25	49	18.38	18.5±1	1.0
				50	0	18.36	18.5±1	1.0
			16QAM	1	0	18.17	18.5±1	1.0
				1	49	18.39	18.5±1	1.0
				1	99	18.23	18.5±1	1.0
				25	0	18.39	18.5±1	1.0
				25	24	18.38	18.5±1	1.0
				25	49	18.41	18.5±1	1.0
				50	0	18.33	18.5±1	1.0
	21100	2535	QPSK	1	0	18.34	18.5±1	/
				1	49	18.4	18.5±1	/
				1	99	18.27	18.5±1	/
				25	0	18.27	18.5±1	1.0
				25	24	18.29	18.5±1	1.0
				25	49	18.35	18.5±1	1.0
				50	0	18.24	18.5±1	1.0
			16QAM	1	0	18.54	18.5±1	1.0
				1	49	18.66	18.5±1	1.0
				1	99	18.57	18.5±1	1.0
				25	0	18.34	18.5±1	1.0
				25	24	18.33	18.5±1	1.0
				25	49	18.31	18.5±1	1.0
				50	0	18.26	18.5±1	1.0
	21400	2565	QPSK	1	0	18.42	18.5±1	/
				1	49	18.56	18.5±1	/
				1	99	18.37	18.5±1	/
				25	0	18.46	18.5±1	1.0
				25	24	18.48	18.5±1	1.0
				25	49	18.5	18.5±1	1.0
				50	0	18.48	18.5±1	1.0
			16QAM	1	0	18.44	18.5±1	1.0
				1	49	18.52	18.5±1	1.0
				1	99	18.43	18.5±1	1.0
				25	0	18.52	18.5±1	1.0
				25	24	18.57	18.5±1	1.0
				25	49	18.56	18.5±1	1.0
				50	0	18.49	18.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	20825	2507.5	QPSK	1	0	18.19	18.5±1	/
				1	49	18.47	18.5±1	/
				1	99	18.22	18.5±1	/
				36	0	18.38	18.5±1	1.0
				36	24	18.35	18.5±1	1.0
				36	49	18.42	18.5±1	1.0
				75	0	18.38	18.5±1	1.0
			16QAM	1	0	18.08	18.5±1	1.0
				1	49	18.39	18.5±1	1.0
				1	99	18.19	18.5±1	1.0
				36	0	18.28	18.5±1	1.0
				36	24	18.35	18.5±1	1.0
				36	49	18.37	18.5±1	1.0
				75	0	18.32	18.5±1	1.0
	21100	2535	QPSK	1	0	18.24	18.5±1	/
				1	49	18.44	18.5±1	/
				1	99	18.21	18.5±1	/
				36	0	18.37	18.5±1	1.0
				36	24	18.29	18.5±1	1.0
				36	49	18.27	18.5±1	1.0
				75	0	18.33	18.5±1	1.0
			16QAM	1	0	18.52	18.5±1	1.0
				1	49	18.77	18.5±1	1.0
				1	99	18.46	18.5±1	1.0
				36	0	18.38	18.5±1	1.0
				36	24	18.38	18.5±1	1.0
				36	49	18.34	18.5±1	1.0
				75	0	18.3	18.5±1	1.0
	21375	2562.5	QPSK	1	0	18.43	18.5±1	/
				1	49	18.56	18.5±1	/
				1	99	18.34	18.5±1	/
				36	0	18.51	18.5±1	1.0
				36	24	18.58	18.5±1	1.0
				36	49	18.54	18.5±1	1.0
				75	0	18.44	18.5±1	1.0
			16QAM	1	0	18.79	18.5±1	1.0
				1	49	19.06	18.5±1	1.0
				1	99	18.67	18.5±1	1.0
				36	0	18.41	18.5±1	1.0
				36	24	18.49	18.5±1	1.0
				36	49	18.44	18.5±1	1.0
				75	0	18.45	18.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	20850	2510	QPSK	1	0	17.95	18.5±1	/
				1	49	18.39	18.5±1	/
				1	99	18.06	18.5±1	/
				50	0	18.32	18.5±1	1.0
				50	24	18.3	18.5±1	1.0
				50	49	18.35	18.5±1	1.0
				100	0	18.34	18.5±1	1.0
			16QAM	1	0	18.54	18.5±1	1.0
				1	49	18.97	18.5±1	1.0
				1	99	18.61	18.5±1	1.0
				50	0	18.32	18.5±1	1.0
				50	24	18.36	18.5±1	1.0
				50	49	18.34	18.5±1	1.0
				100	0	18.33	18.5±1	1.0
	21100	2535	QPSK	1	0	18.01	18.5±1	/
				1	49	18.42	18.5±1	/
				1	99	18.01	18.5±1	/
				50	0	18.3	18.5±1	1.0
				50	24	18.28	18.5±1	1.0
				50	49	18.18	18.5±1	1.0
				100	0	18.25	18.5±1	1.0
			16QAM	1	0	18.49	18.5±1	1.0
				1	49	18.82	18.5±1	1.0
				1	99	18.48	18.5±1	1.0
				50	0	18.28	18.5±1	1.0
				50	24	18.33	18.5±1	1.0
				50	49	18.15	18.5±1	1.0
				100	0	18.23	18.5±1	1.0
	21350	2560	QPSK	1	0	18.23	18.5±1	/
				1	49	18.56	18.5±1	/
				1	99	18.08	18.5±1	/
				50	0	18.37	18.5±1	1.0
				50	24	18.46	18.5±1	1.0
				50	49	18.41	18.5±1	1.0
				100	0	18.45	18.5±1	1.0
			16QAM	1	0	18.57	18.5±1	1.0
				1	49	18.94	18.5±1	1.0
				1	99	18.46	18.5±1	1.0
				50	0	18.4	18.5±1	1.0
				50	24	18.44	18.5±1	1.0
				50	49	18.41	18.5±1	1.0
				100	0	18.41	18.5±1	1.0

LTE Band 41:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	40265	2557.5	QPSK	1	0	20.09	20.5±1	/
				1	12	20.38	20.5±1	/
				1	24	20.11	20.5±1	/
				12	0	20.11	20.5±1	1.0
				12	6	20.18	20.5±1	1.0
				12	11	20.16	20.5±1	1.0
				25	0	20.14	20.5±1	1.0
			16QAM	1	0	20.47	20.5±1	1.0
				1	12	20.73	20.5±1	1.0
				1	24	20.45	20.5±1	1.0
				12	0	20.15	20.5±1	1.0
				12	6	20.21	20.5±1	1.0
				12	11	20.23	20.5±1	1.0
				25	0	20.14	20.5±1	1.0
	40740	2605.0	QPSK	1	0	20.11	20.5±1	/
				1	12	20.52	20.5±1	/
				1	24	20.13	20.5±1	/
				12	0	20.25	20.5±1	1.0
				12	6	20.29	20.5±1	1.0
				12	11	20.29	20.5±1	1.0
				25	0	20.18	20.5±1	1.0
			16QAM	1	0	20.35	20.5±1	1.0
				1	12	20.63	20.5±1	1.0
				1	24	20.37	20.5±1	1.0
				12	0	20.21	20.5±1	1.0
				12	6	20.26	20.5±1	1.0
				12	11	20.23	20.5±1	1.0
				25	0	20.24	20.5±1	1.0
	41215	2652.5	QPSK	1	0	20.07	20.5±1	/
				1	12	20.39	20.5±1	/
				1	24	20.05	20.5±1	/
				12	0	20.11	20.5±1	1.0
				12	6	20.18	20.5±1	1.0
				12	11	20.16	20.5±1	1.0
				25	0	20.16	20.5±1	1.0
			16QAM	1	0	20.33	20.5±1	1.0
				1	12	20.63	20.5±1	1.0
				1	24	20.35	20.5±1	1.0
				12	0	20.09	20.5±1	1.0
				12	6	20.12	20.5±1	1.0
				12	11	20.06	20.5±1	1.0
				25	0	20.14	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	40290	2560.0	QPSK	1	0	20.11	20.5±1	/
				1	24	20.18	20.5±1	/
				1	49	20.11	20.5±1	/
				25	0	20.13	20.5±1	1.0
				25	12	20.14	20.5±1	1.0
				25	24	20.2	20.5±1	1.0
				50	0	20.16	20.5±1	1.0
			16QAM	1	0	20.45	20.5±1	1.0
				1	24	20.47	20.5±1	1.0
				1	49	20.39	20.5±1	1.0
				25	0	20.12	20.5±1	1.0
				25	12	20.17	20.5±1	1.0
				25	24	20.18	20.5±1	1.0
				50	0	20.16	20.5±1	1.0
	40740	2605.0	QPSK	1	0	20.34	20.5±1	/
				1	24	20.45	20.5±1	/
				1	49	20.32	20.5±1	/
				25	0	20.29	20.5±1	1.0
				25	12	20.32	20.5±1	1.0
				25	24	20.3	20.5±1	1.0
				50	0	20.29	20.5±1	1.0
			16QAM	1	0	20.74	20.5±1	1.0
				1	24	20.76	20.5±1	1.0
				1	49	20.63	20.5±1	1.0
				25	0	20.31	20.5±1	1.0
				25	12	20.31	20.5±1	1.0
				25	24	20.25	20.5±1	1.0
				50	0	20.29	20.5±1	1.0
	41190	2650.0	QPSK	1	0	20.19	20.5±1	/
				1	24	20.19	20.5±1	/
				1	49	20.08	20.5±1	/
				25	0	20.16	20.5±1	1.0
				25	12	20.14	20.5±1	1.0
				25	24	20.13	20.5±1	1.0
				50	0	20.09	20.5±1	1.0
			16QAM	1	0	20.54	20.5±1	1.0
				1	24	20.59	20.5±1	1.0
				1	49	20.42	20.5±1	1.0
				25	0	20.08	20.5±1	1.0
				25	12	20.15	20.5±1	1.0
				25	24	20.16	20.5±1	1.0
				50	0	20.17	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	40315	2562.5	QPSK	1	0	20.09	20.5±1	/
				1	37	20.39	20.5±1	/
				1	74	20.04	20.5±1	/
				36	0	20.24	20.5±1	1.0
				36	16	20.24	20.5±1	1.0
				36	35	20.19	20.5±1	1.0
				75	0	20.15	20.5±1	1.0
			16QAM	1	0	20.31	20.5±1	1.0
				1	37	20.63	20.5±1	1.0
				1	74	20.31	20.5±1	1.0
				36	0	20.13	20.5±1	1.0
				36	16	20.27	20.5±1	1.0
				36	35	20.14	20.5±1	1.0
				75	0	20.23	20.5±1	1.0
	40740	2605.0	QPSK	1	0	20.31	20.5±1	/
				1	37	20.52	20.5±1	/
				1	74	20.21	20.5±1	/
				36	0	20.22	20.5±1	1.0
				36	16	20.27	20.5±1	1.0
				36	35	20.31	20.5±1	1.0
				75	0	20.26	20.5±1	1.0
			16QAM	1	0	20.61	20.5±1	1.0
				1	37	20.86	20.5±1	1.0
				1	74	20.53	20.5±1	1.0
				36	0	20.2	20.5±1	1.0
				36	16	20.3	20.5±1	1.0
				36	35	20.24	20.5±1	1.0
				75	0	20.25	20.5±1	1.0
	41165	2647.5	QPSK	1	0	20.16	20.5±1	/
				1	37	20.36	20.5±1	/
				1	74	20.07	20.5±1	/
				36	0	20.18	20.5±1	1.0
				36	16	20.21	20.5±1	1.0
				36	35	20.22	20.5±1	1.0
				75	0	20.17	20.5±1	1.0
			16QAM	1	0	20.4	20.5±1	1.0
				1	37	20.64	20.5±1	1.0
				1	74	20.32	20.5±1	1.0
				36	0	20.15	20.5±1	1.0
				36	16	20.2	20.5±1	1.0
				36	35	20.21	20.5±1	1.0
				75	0	20.16	20.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	40340	2565.0	QPSK	1	0	19.91	20.5±1	/
				1	49	20.25	20.5±1	/
				1	99	19.99	20.5±1	/
				50	0	20.06	20.5±1	1.0
				50	24	20.19	20.5±1	1.0
				50	49	20.1	20.5±1	1.0
				100	0	20.12	20.5±1	1.0
			16QAM	1	0	20.19	20.5±1	1.0
				1	49	20.52	20.5±1	1.0
				1	99	20.23	20.5±1	1.0
				50	0	20.02	20.5±1	1.0
				50	24	20.14	20.5±1	1.0
				50	49	20.06	20.5±1	1.0
				100	0	20.02	20.5±1	1.0
	40740	2605.0	QPSK	1	0	19.99	20.5±1	/
				1	49	20.33	20.5±1	/
				1	99	20.01	20.5±1	/
				50	0	20.19	20.5±1	1.0
				50	24	20.29	20.5±1	1.0
				50	49	20.24	20.5±1	1.0
				100	0	20.28	20.5±1	1.0
			16QAM	1	0	20.17	20.5±1	1.0
				1	49	20.53	20.5±1	1.0
				1	99	20.15	20.5±1	1.0
				50	0	20.17	20.5±1	1.0
				50	24	20.23	20.5±1	1.0
				50	49	20.15	20.5±1	1.0
				100	0	20.19	20.5±1	1.0
	41140	2645.0	QPSK	1	0	19.96	20.5±1	/
				1	49	20.22	20.5±1	/
				1	99	19.94	20.5±1	/
				50	0	19.99	20.5±1	1.0
				50	24	20.14	20.5±1	1.0
				50	49	20.13	20.5±1	1.0
				100	0	20.12	20.5±1	1.0
			16QAM	1	0	20.32	20.5±1	1.0
				1	49	20.57	20.5±1	1.0
				1	99	20.32	20.5±1	1.0
				50	0	20.1	20.5±1	1.0
				50	24	20.12	20.5±1	1.0
				50	49	20.17	20.5±1	1.0
				100	0	20.09	20.5±1	1.0

LTE Band 66:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	131979	1710.7	QPSK	1	0	21.44	21.5±1	/
				1	2	21.56	21.5±1	/
				1	5	21.43	21.5±1	/
				3	0	21.56	21.5±1	/
				3	1	21.58	21.5±1	/
				3	2	21.48	21.5±1	/
				6	0	21.39	21.5±1	1.0
			16QAM	1	0	21.61	21.5±1	1.0
				1	2	21.77	21.5±1	1.0
				1	5	21.62	21.5±1	1.0
				3	0	21.62	21.5±1	1.0
				3	1	21.69	21.5±1	1.0
				3	2	21.63	21.5±1	1.0
				6	0	21.69	21.5±1	1.0
	132321	1744.9	QPSK	1	0	21.21	21.5±1	/
				1	2	21.38	21.5±1	/
				1	5	21.23	21.5±1	/
				3	0	21.43	21.5±1	/
				3	1	21.37	21.5±1	/
				3	2	21.37	21.5±1	/
				6	0	21.18	21.5±1	1.0
			16QAM	1	0	21.69	21.5±1	1.0
				1	2	21.78	21.5±1	1.0
				1	5	21.67	21.5±1	1.0
				3	0	21.62	21.5±1	1.0
				3	1	21.61	21.5±1	1.0
				3	2	21.64	21.5±1	1.0
				6	0	21.23	21.5±1	1.0
	132664	1779.2	QPSK	1	0	21.39	21.5±1	/
				1	2	21.55	21.5±1	/
				1	5	21.45	21.5±1	/
				3	0	21.56	21.5±1	/
				3	1	21.66	21.5±1	/
				3	2	21.58	21.5±1	/
				6	0	21.51	21.5±1	1.0
			16QAM	1	0	21.53	21.5±1	1.0
				1	2	21.56	21.5±1	1.0
				1	5	21.55	21.5±1	1.0
				3	0	21.79	21.5±1	1.0
				3	1	21.91	21.5±1	1.0
				3	2	21.83	21.5±1	1.0
				6	0	21.73	21.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	131987	1711.5	QPSK	1	0	21.46	21.5±1	/
				1	8	21.55	21.5±1	/
				1	14	21.32	21.5±1	/
				6	0	21.5	21.5±1	1.0
				6	4	21.53	21.5±1	1.0
				6	9	21.39	21.5±1	1.0
				15	0	21.54	21.5±1	1.0
			16QAM	1	0	21.51	21.5±1	1.0
				1	8	21.58	21.5±1	1.0
				1	14	21.35	21.5±1	1.0
				8	0	21.66	21.5±1	1.0
				8	4	21.68	21.5±1	1.0
				8	9	21.57	21.5±1	1.0
				15	0	21.57	21.5±1	1.0
	132321	1744.9	QPSK	1	0	21.28	21.5±1	/
				1	8	21.48	21.5±1	/
				1	14	21.39	21.5±1	/
				6	0	21.27	21.5±1	1.0
				6	4	21.35	21.5±1	1.0
				6	9	21.25	21.5±1	1.0
				15	0	21.29	21.5±1	1.0
			16QAM	1	0	21.74	21.5±1	1.0
				1	8	21.84	21.5±1	1.0
				1	14	21.75	21.5±1	1.0
				6	0	21.43	21.5±1	1.0
				6	4	21.45	21.5±1	1.0
				6	9	21.38	21.5±1	1.0
				15	0	21.36	21.5±1	1.0
	132656	1778.4	QPSK	1	0	21.59	21.5±1	/
				1	8	21.7	21.5±1	/
				1	14	21.57	21.5±1	/
				6	0	21.59	21.5±1	1.0
				6	4	21.64	21.5±1	1.0
				6	9	21.6	21.5±1	1.0
				15	0	21.61	21.5±1	1.0
			16QAM	1	0	21.65	21.5±1	1.0
				1	8	21.8	21.5±1	1.0
				1	14	21.61	21.5±1	1.0
				8	0	21.64	21.5±1	1.0
				8	4	21.71	21.5±1	1.0
				8	9	21.64	21.5±1	1.0
				15	0	21.64	21.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	131997	1712.5	QPSK	1	0	21.45	21.5±1	/
				1	49	21.57	21.5±1	/
				1	99	21.34	21.5±1	/
				12	0	21.51	21.5±1	1.0
				12	24	21.46	21.5±1	1.0
				12	49	21.42	21.5±1	1.0
				25	0	21.41	21.5±1	1.0
			16QAM	1	0	21.68	21.5±1	1.0
				1	49	21.73	21.5±1	1.0
				1	99	21.64	21.5±1	1.0
				12	0	21.54	21.5±1	1.0
				12	24	21.63	21.5±1	1.0
				12	49	21.6	21.5±1	1.0
				25	0	21.56	21.5±1	1.0
	132321	1744.9	QPSK	1	0	21.18	21.5±1	/
				1	49	21.46	21.5±1	/
				1	99	21.32	21.5±1	/
				12	0	21.3	21.5±1	1.0
				12	24	21.36	21.5±1	1.0
				12	49	21.28	21.5±1	1.0
				25	0	21.35	21.5±1	1.0
			16QAM	1	0	21.76	21.5±1	1.0
				1	49	21.98	21.5±1	1.0
				1	99	21.81	21.5±1	1.0
				12	0	21.53	21.5±1	1.0
				12	24	21.54	21.5±1	1.0
				12	49	21.44	21.5±1	1.0
				25	0	21.48	21.5±1	1.0
	132646	1777.4	QPSK	1	0	21.56	21.5±1	/
				1	49	21.78	21.5±1	/
				1	99	21.53	21.5±1	/
				12	0	21.64	21.5±1	1.0
				12	24	21.59	21.5±1	1.0
				12	49	21.6	21.5±1	1.0
				25	0	21.62	21.5±1	1.0
			16QAM	1	0	21.58	21.5±1	1.0
				1	49	21.83	21.5±1	1.0
				1	99	21.65	21.5±1	1.0
				12	0	21.62	21.5±1	1.0
				12	24	21.68	21.5±1	1.0
				12	49	21.64	21.5±1	1.0
				25	0	21.52	21.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	132022	1715	QPSK	1	0	21.45	21.5±1	/
				1	49	21.53	21.5±1	/
				1	99	21.4	21.5±1	/
				25	0	21.42	21.5±1	1.0
				25	24	21.4	21.5±1	1.0
				25	49	21.43	21.5±1	1.0
				50	0	21.47	21.5±1	1.0
			16QAM	1	0	21.48	21.5±1	1.0
				1	49	21.48	21.5±1	1.0
				1	99	21.33	21.5±1	1.0
				25	0	21.56	21.5±1	1.0
				25	24	21.61	21.5±1	1.0
				25	49	21.47	21.5±1	1.0
				50	0	21.53	21.5±1	1.0
	132321	1744.9	QPSK	1	0	21.31	21.5±1	/
				1	49	21.47	21.5±1	/
				1	99	21.32	21.5±1	/
				25	0	21.39	21.5±1	1.0
				25	24	21.34	21.5±1	1.0
				25	49	21.39	21.5±1	1.0
				50	0	21.42	21.5±1	1.0
			16QAM	1	0	21.7	21.5±1	1.0
				1	49	21.83	21.5±1	1.0
				1	99	21.8	21.5±1	1.0
				25	0	21.5	21.5±1	1.0
				25	24	21.46	21.5±1	1.0
				25	49	21.55	21.5±1	1.0
				50	0	21.57	21.5±1	1.0
	132621	1774.9	QPSK	1	0	21.41	21.5±1	/
				1	49	21.6	21.5±1	/
				1	99	21.54	21.5±1	/
				25	0	21.55	21.5±1	1.0
				25	24	21.59	21.5±1	1.0
				25	49	21.46	21.5±1	1.0
				50	0	21.55	21.5±1	1.0
			16QAM	1	0	21.56	21.5±1	1.0
				1	49	21.72	21.5±1	1.0
				1	99	21.66	21.5±1	1.0
				25	0	21.7	21.5±1	1.0
				25	24	21.76	21.5±1	1.0
				25	49	21.69	21.5±1	1.0
				50	0	21.61	21.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	132097	1722.5	QPSK	1	0	21.34	21.5±1	/
				1	49	21.46	21.5±1	/
				1	99	21.18	21.5±1	/
				36	0	21.31	21.5±1	1.0
				36	24	21.36	21.5±1	1.0
				36	49	21.36	21.5±1	1.0
				75	0	21.29	21.5±1	1.0
			16QAM	1	0	21.4	21.5±1	1.0
				1	49	21.5	21.5±1	1.0
				1	99	21.1	21.5±1	1.0
				36	0	21.43	21.5±1	1.0
				36	24	21.44	21.5±1	1.0
				36	49	21.38	21.5±1	1.0
				75	0	21.42	21.5±1	1.0
	132321	1744.9	QPSK	1	0	21.3	21.5±1	/
				1	49	21.5	21.5±1	/
				1	99	21.35	21.5±1	/
				36	0	21.36	21.5±1	1.0
				36	24	21.41	21.5±1	1.0
				36	49	21.39	21.5±1	1.0
				75	0	21.35	21.5±1	1.0
			16QAM	1	0	21.59	21.5±1	1.0
				1	49	21.9	21.5±1	1.0
				1	99	21.73	21.5±1	1.0
				36	0	21.36	21.5±1	1.0
				36	24	21.52	21.5±1	1.0
				36	49	21.5	21.5±1	1.0
				75	0	21.48	21.5±1	1.0
	132546	1767.4	QPSK	1	0	21.46	21.5±1	/
				1	49	21.75	21.5±1	/
				1	99	21.47	21.5±1	/
				36	0	21.53	21.5±1	1.0
				36	24	21.66	21.5±1	1.0
				36	49	21.53	21.5±1	1.0
				75	0	21.53	21.5±1	1.0
			16QAM	1	0	21.95	21.5±1	1.0
				1	49	22.14	21.5±1	1.0
				1	99	21.98	21.5±1	1.0
				36	0	21.52	21.5±1	1.0
				36	24	21.59	21.5±1	1.0
				36	49	21.58	21.5±1	1.0
				75	0	21.57	21.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	132072	1720	QPSK	1	0	21.13	21.5±1	/
				1	49	21.49	21.5±1	/
				1	99	20.96	21.5±1	/
				50	0	21.34	21.5±1	1.0
				50	24	21.38	21.5±1	1.0
				50	49	21.28	21.5±1	1.0
				100	0	21.33	21.5±1	1.0
			16QAM	1	0	21.83	21.5±1	1.0
				1	49	22.05	21.5±1	1.0
				1	99	21.63	21.5±1	1.0
				50	0	21.46	21.5±1	1.0
				50	24	21.52	21.5±1	1.0
				50	49	21.34	21.5±1	1.0
				100	0	21.43	21.5±1	1.0
	132321	1744.9	QPSK	1	0	21.02	21.5±1	/
				1	49	21.45	21.5±1	/
				1	99	21.12	21.5±1	/
				50	0	21.43	21.5±1	1.0
				50	24	21.45	21.5±1	1.0
				50	49	21.41	21.5±1	1.0
				100	0	21.41	21.5±1	1.0
			16QAM	1	0	21.49	21.5±1	1.0
				1	49	22.02	21.5±1	1.0
				1	99	21.74	21.5±1	1.0
				50	0	21.49	21.5±1	1.0
				50	24	21.5	21.5±1	1.0
				50	49	21.6	21.5±1	1.0
				100	0	21.54	21.5±1	1.0
	132471	1759.9	QPSK	1	0	21.3	21.5±1	/
				1	49	21.63	21.5±1	/
				1	99	21.36	21.5±1	/
				50	0	21.59	21.5±1	1.0
				50	24	21.66	21.5±1	1.0
				50	49	21.53	21.5±1	1.0
				100	0	21.53	21.5±1	1.0
			16QAM	1	0	21.75	21.5±1	1.0
				1	49	22.03	21.5±1	1.0
				1	99	21.8	21.5±1	1.0
				50	0	21.62	21.5±1	1.0
				50	24	21.61	21.5±1	1.0
				50	49	21.56	21.5±1	1.0
				100	0	21.6	21.5±1	1.0

BLE Measurement Result

Mode	Channel number	Frequency (MHz)	Average Output Power(dBm)	Tune up limited(dBm)
BLE 1M	0	2402	-2.78	-2.0±1
	19	2440	-1.82	-1.0±1
	39	2480	-2.82	-2.0±1
BLE 2M	0	2402	-3.58	-3.0±1
	19	2440	-2.65	-2.0±1
	39	2480	-3.05	-3.0±1

Bluetooth Measurement Result

Mode	Frequency (MHz)	Average Output Power(dBm)	Tune up limited(dBm)
GFSK	2402	11.27	11.0±1
	2441	12.48	11.5±1
	2480	11.36	11.0±1
$\pi/4$ DQPSK	2402	9.95	9.0±1
	2441	10.89	10.0±1
	2480	10.05	10.0±1
8DPSK	2402	9.79	9.0±1
	2441	10.76	10.0±1
	2480	10.58	10.0±1

NFC Measurement Result

Frequency(MHz)	E-Field Strength (dBuV/m)	Measurement Distance (m)	EIRP (dBm)	Tune up limited(dBm)
13.56	57.53	3	-37.63	-37.0±1

2.4G Wi-Fi Measurement Result**Power Level P1:**

Channel number	Frequency (MHz)	Average Output Power(dBm)	Tune up limited(dBm)
TX 11b	2412	16.13	16.0±1
	2437	16.38	16.0±1
	2462	16.52	16.0±1
TX 11g	2412	15.53	15.0±1
	2437	15.87	15.0±1
	2462	15.89	15.0±1
TX 11n HT20	2412	15.24	15.0±1
	2437	15.83	15.0±1
	2462	16.18	16.0±1
TX 11n HT40	2422	15.18	15.0±1
	2437	15.31	15.0±1
	2452	15.36	15.0±1


Power Level P2:

Channel number	Frequency (MHz)	Average Output Power(dBm)	Tune up limited(dBm)
TX 11b	2412	13.95	13.5±1
	2437	14.12	13.5±1
	2462	14.42	13.5±1
TX 11g	2412	13.51	13.0±1
	2437	13.49	13.0±1
	2462	13.78	13.0±1
TX 11n HT20	2412	13.28	13.0±1
	2437	13.54	13.0±1
	2462	13.55	13.0±1
TX 11n HT40	2422	14.00	13.5±1
	2437	14.29	13.5±1
	2452	14.33	13.5±1

Note: 5G Wi-Fi Power tested results please refer to the test report WTX25X07180811W.

13 Exposure Conditions Consideration

13.1 EUT antenna location

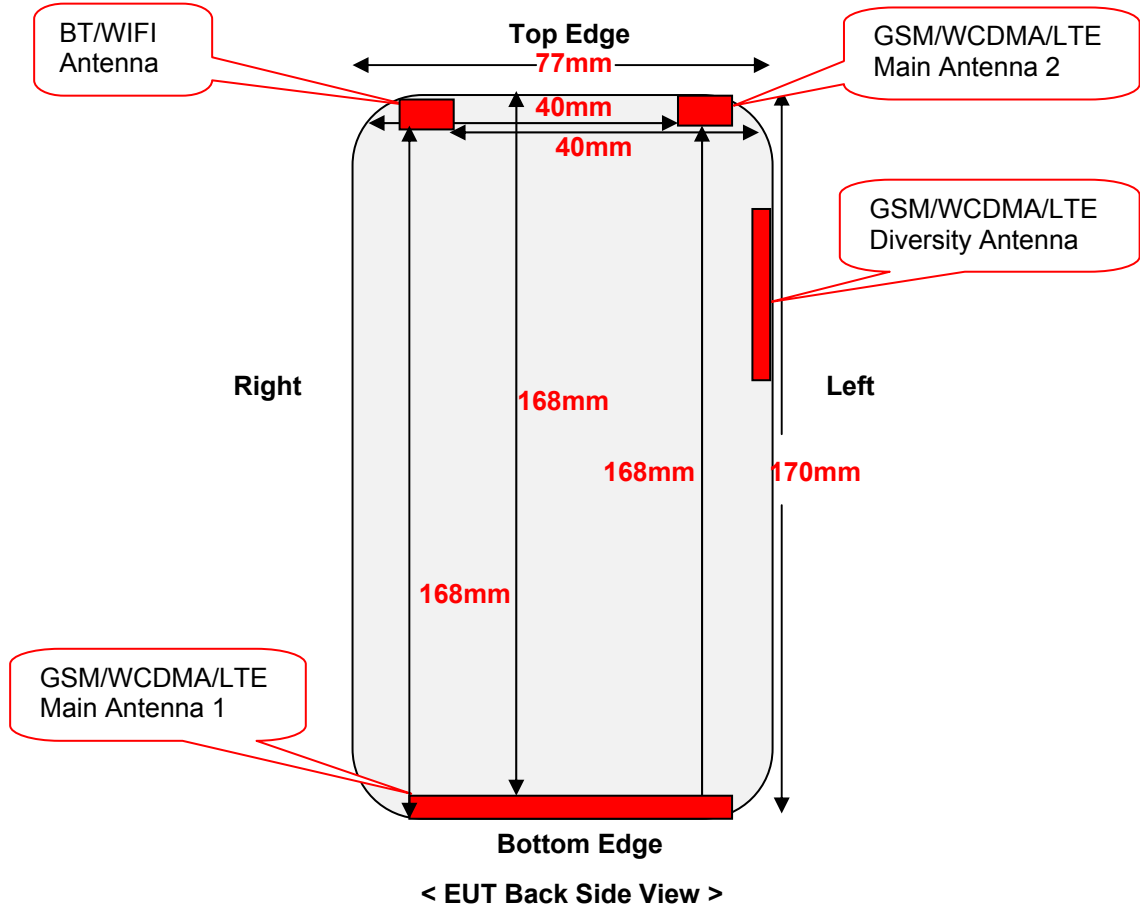

13.2 Test position consideration

Distance of EUT antenna-to-edge/surface(mm)						
Antennas	Back Side	Front Side	Left Edge	Right Edge	Top Edge	Bottom Edge
WWAN 1	<25	<25	<25	<25	168	<25
WWAN 2	<25	<25	<25	40	<25	168
BT/WIFI	<25	<25	40	<25	<25	168
Test distance:10mm						
Antennas	Back Side	Front Side	Left Edge	Right Edge	Top Edge	Bottom Edge
WWAN 1	YES	YES	YES	YES	NO	YES
WWAN 2	YES	YES	YES	NO	YES	NO
BT/WIFI	YES	YES	NO	YES	YES	NO

Note:

1. The WWAN 1 Antenna is GSM/WCDMA/LTE Main Antenna 1, which is GSM 850/ WCDMA Band V/ LTE Band 5/ LTE Band 12/ LTE Band 13/ LTE Band 28 Up Antenna. The WWAN 2 Antenna is GSM/WCDMA/LTE Main Antenna 2, which is GSM 1900/ WCDMA Band II/ WCDMA Band IV/ LTE Band 2/ LTE Band 4/ LTE Band 7/ LTE Band 41/ LTE Band 66 Up Antenna. The GSM/WCDMA/LTE Diversity Antenna is Down Antenna.

2. Head/Body SAR/Hotspot mode assessments are required.

3. Referring to KDB 941225 D06v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
4. Per KDB 447498 D01v06, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user, which is 0 mm for head SAR, 10 mm for body SAR.

13.3 RF Exposure

Standard Requirement:

1. According to §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{\text{GHz}}}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR,}^{16} \text{ where}$$

- f_{GHz} is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation¹⁷
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum *test separation distance* is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum *test separation distance* is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

Exclusion Thresholds = $P\sqrt{F} / D$

P= Maximum turn-up power in mW

F= Channel frequency in GHz

D= Minimum test separation distance in mm

Test Distance (5mm)

Mode	MAX Power (dBm)	Tune Up Power (dBm)	Max Tune Up Power (dBm)	Max Tune Up Power (mW)	Exclusion Thresholds	Limit
BLE	-1.82	-1.0±1	0	1.00	0.312	3
Bluetooth	12.48	11.5±1	12.5	17.78	5.557	3
2.4G Wi-Fi	16.52	16.0±1	17	50.12	15.728	3

Test Distance (10mm)

Mode	MAX Power (dBm)	Tune Up Power (dBm)	Max Tune Up Power (dBm)	Max Tune Up Power (mW)	Exclusion Thresholds	Limit
BLE	-1.82	-1.0±1	0	1.00	0.156	3
Bluetooth	12.48	11.5±1	12.5	17.78	2.778	3
2.4G Wi-Fi	16.52	16.0±1	17	50.12	7.864	3

2. According to the KDB 447498 D01 V06, 4.3.1 c), for frequencies below 100 MHz, the following may be considered for SAR test exclusion (also illustrated in Appendix C):

Appendix C

SAR Test Exclusion Thresholds for < 100 MHz and < 200 mm

Approximate SAR test exclusion power thresholds at selected frequencies and test separation distances are illustrated in the following table. The equation and threshold in 4.3.1 must be applied to determine SAR test exclusion.

MHz	< 50	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	mm
100	237	474	481	487	494	501	507	514	521	527	534	541	547	554	561	567	mW
50	308	617	625	634	643	651	660	669	677	686	695	703	712	721	729	738	
10	474	948	961	975	988	1001	1015	1028	1041	1055	1068	1081	1095	1108	1121	1135	
1	711	1422	1442	1462	1482	1502	1522	1542	1562	1582	1602	1622	1642	1662	1682	1702	
0.1	948	1896	1923	1949	1976	2003	2029	2056	2083	2109	2136	2163	2189	2216	2243	2269	
0.05	1019	2039	2067	2096	2125	2153	2182	2211	2239	2268	2297	2325	2354	2383	2411	2440	
0.01	1185	2370	2403	2437	2470	2503	2537	2570	2603	2637	2670	2703	2737	2770	2803	2837	

- 1) For test separation distances > 50 mm and < 200 mm, the power threshold at the corresponding test separation distance at 100 MHz in step b) is multiplied by $[1 + \log(100/f(\text{MHz}))]$
- 2) For test separation distances ≤ 50 mm, the power threshold determined by the equation in c) 1) for 50 mm and 100 MHz is multiplied by $\frac{1}{2}$
- 3) SAR measurement procedures are not established below 100 MHz.

Test Distance (5mm)

Mode	MAX Power (dBm)	Tune Up Power (dBm)	Max Tune Up Power (dBm)	Max Tune Up Power (mW)	Exclusion Thresholds (mW)	Limit (mW)
NFC	-37.63	-37.0±1	-36.0	0.00025	0.00008	308

The exclusion thresholds of NFC is $0.00008 < 308$, so the RF exposure evaluation is not required.

14 SAR Test Results

14.1 Test Condition

1. SAR Measurement
The distance between the EUT and the antenna of the emulator is more than 50 cm and the output power radiated from the emulator antenna is at least 30 dB less than the output power of EUT.
2. Environmental Conditions

Temperature	23.7°C
Relative Humidity	60.5%
Atmospheric Pressure	1003mbar

14.2 Generally Test Procedures

1. Establish communication link between EUT and base station emulation by air link.
2. Place the EUT in the selected test position. (Cheek, tilt or flat)
3. Perform SAR testing at middle or highest output power channel under the selected test mode. If the measured 1-g SAR is ≤ 0.8 W/kg, then testing for the other channel will not be performed.
4. When SAR is < 0.8 W/kg, no repeated SAR measurement is required

For WCDMA test:

1. KDB941225 D01-Body SAR is not required for HSDPA when the average output of each RF channel with HSDPA active is less than 0.25dB higher than measured without HSDPA using 12.2kbps RMC or the maximum SAR for 12.2kbps RMC $< 75\%$ of the SAR limit.
2. KDB941225 D01-Body SAR is not required for handset with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than 0.25dB higher than that measure without HSUPA/HSDPA using 12.2kbps RMC AND THE maximum SAR for 12.2kbps RMC is $< 75\%$ of the SAR limit

For LTE test:

1. According to FCC KDB 941225 D05v02r05:
 - a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
 - b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
 - c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
 - d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.
 - e. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

14.3 SAR Summary Test Result

Table 4: SAR Values of GSM 850MHz Band

Test Positions		Channel		Test Mode	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
		CH.	MHz		Maximum Turn-up Power(dBm)	Measured output power(dBm)	Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
Right Head	Cheek	190	836.6	Voice call	33	32.70	1.072	0.403	0.432	--
	Tilt	190	836.6	Voice call	33	32.70	1.072	0.372	0.399	--
Left Head	Cheek	190	836.6	Voice call	33	32.70	1.072	0.515	0.552	1
	Tilt	190	836.6	Voice call	33	32.70	1.072	0.486	0.521	--
Right Head	Cheek	128	824.2	GPRS 4 slots	32	31.59	1.099	0.337	0.370	--
	Tilt	128	824.2	GPRS 4 slots	32	31.59	1.099	0.298	0.328	--
Left Head	Cheek	128	824.2	GPRS 4 slots	32	31.59	1.099	0.452	0.497	--
	Tilt	128	824.2	GPRS 4 slots	32	31.59	1.099	0.409	0.449	--
Body-worn (10mm Separation)	Front Side	128	824.2	GPRS 4 slots	32	31.59	1.099	0.245	0.269	--
	Back Side	128	824.2	GPRS 4 slots	32	31.59	1.099	0.389	0.428	--
Hotspot (10mm Separation)	Front Side	128	824.2	GPRS 4 slots	32	31.59	1.099	0.264	0.290	--
	Back Side	128	824.2	GPRS 4 slots	32	31.59	1.099	0.421	0.463	2
	Left Edge	128	824.2	GPRS 4 slots	32	31.59	1.099	0.364	0.400	--
	Right Edge	128	824.2	GPRS 4 slots	32	31.59	1.099	0.349	0.384	--
	Bottom Edge	128	824.2	GPRS 4 slots	32	31.59	1.099	0.392	0.431	--

Table 5: SAR Values of GSM 1900MHz Band

Test Positions		Channel		Test Mode	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
		CH.	MHz		Maximum Turn-up Power(dBm)	Measured output power (dBm)	Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
Right Head	Cheek	810	1909.8	Voice call	26	25.73	1.064	0.253	0.269	--
	Tilt	810	1909.8	Voice call	26	25.73	1.064	0.136	0.145	--
Left Head	Cheek	810	1909.8	Voice call	26	25.73	1.064	0.292	0.311	3
	Tilt	810	1909.8	Voice call	26	25.73	1.064	0.142	0.151	--
Right Head	Cheek	810	1909.8	GPRS 4 slots	25.5	25.09	1.099	0.203	0.223	--
	Tilt	810	1909.8	GPRS 4 slots	25.5	25.09	1.099	0.108	0.119	--
Left Head	Cheek	810	1909.8	GPRS 4 slots	25.5	25.09	1.099	0.262	0.288	--
	Tilt	810	1909.8	GPRS 4 slots	25.5	25.09	1.099	0.115	0.126	--
Body-worn (10mm Separation)	Front Side	512	1850.2	GPRS 4 slots	30	29.13	1.222	0.219	0.268	--
	Back Side	512	1850.2	GPRS 4 slots	30	29.13	1.222	0.441	0.539	4
Hotspot (10mm Separation)	Front Side	810	1909.8	GPRS 4 slots	26.5	26.42	1.019	0.124	0.126	--
	Back Side	810	1909.8	GPRS 4 slots	26.5	26.42	1.019	0.232	0.236	--
	Left Edge	810	1909.8	GPRS 4 slots	26.5	26.42	1.019	0.172	0.175	--
	Top Edge	810	1909.8	GPRS 4 slots	26.5	26.42	1.019	0.184	0.187	--

Table 6: SAR Values of WCDMA BAND II

Test Positions		Channel		Test Mode	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
		CH.	MHz		Maximum Turn-up Power(dBm)	Measured output power (dBm)	Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
Right Head	Cheek	9262	1852.4	RMC 12.2kbps	17	16.48	1.127	0.464	0.523	5
	Tilt	9262	1852.4	RMC 12.2kbps	17	16.48	1.127	0.306	0.345	--
Left Head	Cheek	9262	1852.4	RMC 12.2kbps	17	16.48	1.127	0.438	0.494	--
	Tilt	9262	1852.4	RMC 12.2kbps	17	16.48	1.127	0.279	0.314	--
Body-worn (10mm Separation)	Front Side	9400	1880	RMC 12.2kbps	23	22.75	1.059	0.543	0.575	--
	Back Side	9400	1880	RMC 12.2kbps	23	22.75	1.059	0.770	0.815	6
	Back Side	9262	1852.4	RMC 12.2kbps	23	22.52	1.117	0.715	0.799	--
	Back Side	9538	1907.6	RMC 12.2kbps	23	22.69	1.074	0.722	0.775	--
Hotspot (10mm Separation)	Front Side	9262	1880	RMC 12.2kbps	19	18.58	1.102	0.372	0.410	--
	Back Side	9262	1880	RMC 12.2kbps	19	18.58	1.102	0.401	0.442	--
	Left Edge	9262	1880	RMC 12.2kbps	19	18.58	1.102	0.413	0.455	--
	Top Edge	9262	1880	RMC 12.2kbps	19	18.58	1.102	0.381	0.420	--

Table 7: SAR Values of WCDMA BAND IV

Test Positions		Channel		Test Mode	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
		CH.	MHz		Maximum Turn-up Power(dBm)	Measured output power (dBm)	Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
Right Head	Cheek	1513	1752.6	RMC 12.2kbps	17	16.43	1.140	0.134	0.153	--
	Tilt	1513	1752.6	RMC 12.2kbps	17	16.43	1.140	0.218	0.249	--
Left Head	Cheek	1513	1752.6	RMC 12.2kbps	17	16.43	1.140	0.273	0.311	7
	Tilt	1513	1752.6	RMC 12.2kbps	17	16.43	1.140	0.149	0.170	--
Body-worn (10mm Separation)	Front Side	1513	1752.6	RMC 12.2kbps	23	22.13	1.222	0.423	0.517	--
	Back Side	1513	1752.6	RMC 12.2kbps	23	22.13	1.222	0.562	0.687	8
	Front Side	1413	1732.6	RMC 12.2kbps	23	22.13	1.222	0.395	0.483	--
	Back Side	1413	1732.6	RMC 12.2kbps	23	22.13	1.222	0.549	0.671	--
Hotspot (10mm Separation)	Front Side	1312	1712.4	RMC 12.2kbps	20	19.63	1.089	0.235	0.256	--
	Back Side	1312	1712.4	RMC 12.2kbps	20	19.63	1.089	0.361	0.393	--
	Left Edge	1312	1712.4	RMC 12.2kbps	20	19.63	1.089	0.325	0.354	--
	Top Edge	1312	1712.4	RMC 12.2kbps	20	19.63	1.089	0.263	0.286	--

Table 8: SAR Values of WCDMA BAND V

Test Positions		Channel		Test Mode	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
		CH.	MHz		Maximum Turn-up Power(dBm)	Measured output power (dBm)	Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
Right Head	Cheek	4183	836.6	RMC 12.2kbps	23	22.78	1.052	0.299	0.315	9
	Tilt	4183	836.6	RMC 12.2kbps	23	22.78	1.052	0.106	0.112	--
Left Head	Cheek	4183	836.6	RMC 12.2kbps	23	22.78	1.052	0.207	0.218	--
	Tilt	4183	836.6	RMC 12.2kbps	23	22.78	1.052	0.093	0.098	--
Body-worn (10mm Separation)	Front Side	4183	836.6	RMC 12.2kbps	23	22.78	1.052	0.107	0.113	--
	Back Side	4183	836.6	RMC 12.2kbps	23	22.78	1.052	0.203	0.214	--
Hotspot (10mm Separation)	Front Side	4183	836.6	RMC 12.2kbps	23	22.78	1.052	0.218	0.229	10
	Back Side	4183	836.6	RMC 12.2kbps	23	22.78	1.052	0.125	0.132	--
	Left Edge	4183	836.6	RMC 12.2kbps	23	22.78	1.052	0.112	0.118	--
	Right Edge	4183	836.6	RMC 12.2kbps	23	22.78	1.052	0.094	0.099	--
	Bottom Edge	4183	836.6	RMC 12.2kbps	23	22.78	1.052	0.196	0.206	--

Table 9: SAR Values of LTE BAND 2, 15MHz, 16QAM

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
			CH.	MHz	Maximum Turn-up Power (dBm)	Measured output power (dBm)		Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	19125	1902.5	18.5	18.04	0	1.112	0.510	0.567	--
		Tilt	19125	1902.5	18.5	18.04	0	1.112	0.387	0.430	--
	Left Head	Cheek	19125	1902.5	18.5	18.04	0	1.112	0.546	0.607	11
		Tilt	19125	1902.5	18.5	18.04	0	1.112	0.414	0.460	--
	Body-worn (10mm Separation)	Front Side	19125	1902.5	22.6	22.51	0	1.021	0.736	0.751	--
		Back Side	19125	1902.5	22.6	22.51	0	1.021	1.060	1.082	12
		Back Side	18675	1857.5	22.5	22.26	0	1.057	0.996	1.053	--
		Back Side	18900	1880	22.5	21.91	0	1.146	0.941	1.078	--
	Hotspot (10mm Separation)	Front Side	19125	1902.5	21.5	21.02	0	1.117	0.605	0.676	--
		Back Side	19125	1902.5	21.5	21.02	0	1.117	0.926	1.045	--
		Back Side	18675	1857.5	21.5	20.58	0	1.236	0.852	1.053	--
		Back Side	18900	1880	21.5	20.87	0	1.156	0.881	1.019	--
		Left Edge	19125	1902.5	21.5	21.02	0	1.117	0.721	0.805	--
		Left Edge	18675	1857.5	21.5	20.58	0	1.236	0.654	0.808	--
		Left Edge	18900	1880	21.5	20.87	0	1.156	0.680	0.786	--
		Top Edge	19125	1902.5	21.5	21.02	0	1.117	0.698	0.780	--

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
			CH.	MHz	Maximum Turn-up Power (dBm)	Measured output power (dBm)		Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
50%RB #0	Right Head	Cheek	19125	1902.5	18.5	18.04	1	1.112	0.486	0.540	--
		Tilt	19125	1902.5	18.5	18.04	1	1.112	0.308	0.342	--
	Left Head	Cheek	19125	1902.5	18.5	18.04	1	1.112	0.535	0.595	--
		Tilt	19125	1902.5	18.5	18.04	1	1.112	0.405	0.450	--
	Body-worn (10mm Separation)	Front Side	19125	1902.5	22.6	22.51	1	1.021	0.712	0.727	--
		Back Side	19125	1902.5	22.6	22.51	1	1.021	0.967	0.987	--
		Back Side	18675	1857.5	22.5	22.26	1	1.057	0.895	0.946	--
		Back Side	18900	1880	22.5	21.91	1	1.146	0.859	0.984	--
	Hotspot (10mm Separation)	Front Side	19125	1902.5	21.5	21.02	1	1.117	0.624	0.697	--
		Back Side	19125	1902.5	21.5	21.02	1	1.117	0.947	1.058	--
		Back Side	18675	1857.5	21.5	20.58	1	1.236	0.865	1.069	--
		Back Side	18900	1880	21.5	20.87	1	1.156	0.903	1.044	--
		Left Edge	19125	1902.5	21.5	21.02	1	1.117	0.738	0.824	--
		Left Edge	18675	1857.5	21.5	20.58	1	1.236	0.663	0.819	--
		Left Edge	18900	1880	21.5	20.87	1	1.156	0.695	0.803	--
		Top Edge	19125	1902.5	21.5	21.02	1	1.117	0.654	0.731	--

Table 10: SAR Values of LTE BAND 2, 20MHz,QPSK

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
			CH.	MHz	Maximum Turn-up Power (dBm)	Measured output power (dBm)		Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	19100	1900	18.5	17.9	0	1.148	0.483	0.554	--
		Tilt	19100	1900	18.5	17.9	0	1.148	0.353	0.405	--
	Left Head	Cheek	19100	1900	18.5	17.9	0	1.148	0.526	0.604	--
		Tilt	19100	1900	18.5	17.9	0	1.148	0.407	0.467	--
	Body-worn (10mm Separation)	Front Side	19100	1900	22.2	22.17	0	1.007	0.726	0.731	--
		Back Side	19100	1900	22.2	22.17	0	1.007	0.935	0.942	--
		Back Side	18700	1860	22.5	22.04	0	1.112	0.901	1.002	--
		Back Side	18900	1880	22.0	21.90	0	1.023	0.882	0.903	--
	Hotspot (10mm Separation)	Front Side	19100	1900	21.5	20.95	0	1.135	0.613	0.696	--
		Back Side	19100	1900	21.5	20.95	0	1.135	0.864	0.981	--
		Back Side	18700	1860	21.5	20.76	0	1.186	0.831	0.985	--
		Back Side	18900	1880	21.5	20.87	0	1.156	0.846	0.978	--
		Left Edge	19100	1900	21.5	20.95	0	1.135	0.652	0.740	--
		Top Edge	19100	1900	21.5	20.95	0	1.135	0.586	0.665	--
50%RB #0	Right Head	Cheek	19100	1900	18.5	17.9	1	1.148	0.493	0.566	--
		Tilt	19100	1900	18.5	17.9	1	1.148	0.332	0.381	--
	Left Head	Cheek	19100	1900	18.5	17.9	1	1.148	0.512	0.588	--
		Tilt	19100	1900	18.5	17.9	1	1.148	0.399	0.458	--
	Body-worn (10mm Separation)	Front Side	19100	1900	22.2	22.17	1	1.007	0.642	0.646	--
		Back Side	19100	1900	22.2	22.17	1	1.007	0.843	0.849	--
		Back Side	18700	1860	22.5	22.04	1	1.112	0.817	0.908	--
		Back Side	18900	1880	22.0	21.90	1	1.023	0.795	0.814	--
	Hotspot (10mm Separation)	Front Side	19100	1900	21.5	20.95	1	1.135	0.512	0.581	--
		Back Side	19100	1900	21.5	20.95	1	1.135	0.825	0.936	--
		Back Side	18700	1860	21.5	20.76	1	1.186	0.794	0.942	--
		Back Side	18900	1880	21.5	20.87	1	1.156	0.802	0.927	--
		Left Edge	19100	1900	21.5	20.95	1	1.135	0.593	0.673	--
		Top Edge	19100	1900	21.5	20.95	1	1.135	0.662	0.751	--

Table 11: SAR Values of LTE BAND 4, 1.4MHz, 16QAM

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
			CH.	MHz	Maximum Turn-up Power (dBm)	Measured output power (dBm)		Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	19957	1710.7	19.5	19.36	0	1.033	0.381	0.394	--
		Tilt	19957	1710.7	19.5	19.36	0	1.033	0.148	0.153	--
	Left Head	Cheek	19957	1710.7	19.5	19.36	0	1.033	0.490	0.506	13
		Tilt	19957	1710.7	19.5	19.36	0	1.033	0.274	0.283	--
	Body-worn (10mm Separation)	Front Side	19957	1710.7	23	22.98	0	1.005	0.522	0.525	--
		Back Side	19957	1710.7	23	22.98	0	1.005	0.885	0.889	14
		Back Side	20175	1732.5	22.5	22.43	0	1.016	0.857	0.871	--
		Back Side	20393	1754.3	22.5	22.23	0	1.064	0.834	0.887	--
	Hotspot (10mm Separation)	Front Side	19957	1710.7	21.5	21.45	0	1.012	0.307	0.311	--
		Back Side	19957	1710.7	21.5	21.45	0	1.012	0.641	0.649	--
		Left Edge	19957	1710.7	21.5	21.45	0	1.012	0.244	0.247	--
		Top Edge	19957	1710.7	21.5	21.45	0	1.012	0.412	0.417	--
50%RB #0	Right Head	Cheek	19957	1710.7	19.5	19.36	1	1.033	0.362	0.374	--
		Tilt	19957	1710.7	19.5	19.36	1	1.033	0.134	0.138	--
	Left Head	Cheek	19957	1710.7	19.5	19.36	1	1.033	0.438	0.452	--
		Tilt	19957	1710.7	19.5	19.36	1	1.033	0.245	0.253	--
	Body-worn (10mm Separation)	Front Side	19957	1710.7	23	22.98	1	1.005	0.517	0.520	--
		Back Side	19957	1710.7	23	22.98	1	1.005	0.852	0.856	--
		Back Side	20175	1732.5	22.5	22.43	1	1.016	0.816	0.829	--
		Back Side	20393	1754.3	22.5	22.23	1	1.064	0.799	0.850	--
	Hotspot (10mm Separation)	Front Side	19957	1710.7	21.5	21.45	1	1.012	0.296	0.300	--
		Back Side	19957	1710.7	21.5	21.45	1	1.012	0.613	0.620	--
		Left Edge	19957	1710.7	21.5	21.45	1	1.012	0.249	0.252	--
		Top Edge	19957	1710.7	21.5	21.45	1	1.012	0.406	0.411	--

Table 12: SAR Values of LTE BAND 4, 20MHz, QPSK

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
			CH.	MHz	Maximum Turn-up Power (dBm)	Measured output power (dBm)		Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	20050	1720	19.5	19.22	0	1.067	0.342	0.365	--
		Tilt	20050	1720	19.5	19.22	0	1.067	0.123	0.131	--
	Left Head	Cheek	20050	1720	19.5	19.22	0	1.067	0.452	0.482	--
		Tilt	20050	1720	19.5	19.22	0	1.067	0.241	0.257	--
	Body-worn (10mm Separation)	Front Side	20050	1720	22.6	22.51	0	1.021	0.501	0.512	--
		Back Side	20050	1720	22.6	22.51	0	1.021	0.842	0.860	--
	Hotspot (10mm Separation)	Front Side	20050	1720	21.5	21.25	0	1.059	0.285	0.302	--
		Back Side	20050	1720	21.5	21.25	0	1.059	0.534	0.566	--
		Left Edge	20050	1720	21.5	21.25	0	1.059	0.226	0.239	--
		Top Edge	20050	1720	21.5	21.25	0	1.059	0.375	0.397	--
50%RB #0	Right Head	Cheek	20050	1720	19.5	19.22	1	1.067	0.342	0.365	--
		Tilt	20050	1720	19.5	19.22	1	1.067	0.105	0.112	--
	Left Head	Cheek	20050	1720	19.5	19.22	1	1.067	0.419	0.447	--
		Tilt	20050	1720	19.5	19.22	1	1.067	0.249	0.266	--
	Body-worn (10mm Separation)	Front Side	20050	1720	22.6	22.51	1	1.021	0.504	0.515	--
		Back Side	20050	1720	22.6	22.51	1	1.021	0.849	0.867	--
	Hotspot (10mm Separation)	Front Side	20050	1720	21.5	21.25	1	1.059	0.294	0.311	--
		Back Side	20050	1720	21.5	21.25	1	1.059	0.576	0.610	--
		Left Edge	20050	1720	21.5	21.25	1	1.059	0.209	0.221	--
		Top Edge	20050	1720	21.5	21.25	1	1.059	0.367	0.389	--

Table 13: SAR Values of LTE BAND 5, 1.4MHz, 16QAM

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
			CH.	MHz	Maximum Turn-up Power (dBm)	Measured output power (dBm)		Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	20407	824.7	23.5	23.49	0	1.002	0.247	0.247	--
		Tilt	20407	824.7	23.5	23.49	0	1.002	0.106	0.106	--
	Left Head	Cheek	20407	824.7	23.5	23.49	0	1.002	0.303	0.304	15
		Tilt	20407	824.7	23.5	23.49	0	1.002	0.124	0.124	--
	Body-worn (10mm Separation)	Front Side	20407	824.7	23.5	23.49	0	1.002	0.219	0.219	--
		Back Side	20407	824.7	23.5	23.49	0	1.002	0.304	0.305	--
	Hotspot (10mm Separation)	Front Side	20407	824.7	23.5	23.49	0	1.002	0.233	0.233	--
		Back Side	20407	824.7	23.5	23.49	0	1.002	0.335	0.336	16
		Left Edge	20407	824.7	23.5	23.49	0	1.002	0.183	0.183	--
		Right Edge	20407	824.7	23.5	23.49	0	1.002	0.124	0.124	--
		Bottom Edge	20407	824.7	23.5	23.49	0	1.002	0.219	0.219	--
50%RB #0	Right Head	Cheek	20407	824.7	23.5	23.49	1	1.002	0.232	0.232	--
		Tilt	20407	824.7	23.5	23.49	1	1.002	0.098	0.098	--
	Left Head	Cheek	20407	824.7	23.5	23.49	1	1.002	0.296	0.297	--
		Tilt	20407	824.7	23.5	23.49	1	1.002	0.137	0.137	--
	Body-worn (10mm Separation)	Front Side	20407	824.7	23.5	23.49	1	1.002	0.206	0.206	--
		Back Side	20407	824.7	23.5	23.49	1	1.002	0.297	0.298	--
	Hotspot (10mm Separation)	Front Side	20407	824.7	23.5	23.49	1	1.002	0.134	0.134	--
		Back Side	20407	824.7	23.5	23.49	1	1.002	0.276	0.277	--
		Left Edge	20407	824.7	23.5	23.49	1	1.002	0.164	0.164	--
		Right Edge	20407	824.7	23.5	23.49	1	1.002	0.087	0.087	--
		Bottom Edge	20407	824.7	23.5	23.49	1	1.002	0.132	0.132	--

Table 14: SAR Values of LTE BAND 5, 10MHz, 16QAM

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
			CH.	MHz	Maximum Turn-up Power (dBm)	Measured output power (dBm)		Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	20525	836.5	23.5	23.20	0	1.072	0.196	0.210	--
		Tilt	20525	836.5	23.5	23.20	0	1.072	0.087	0.093	--
	Left Head	Cheek	20525	836.5	23.5	23.20	0	1.072	0.254	0.272	--
		Tilt	20525	836.5	23.5	23.20	0	1.072	0.097	0.104	--
	Body-worn (10mm Separation)	Front Side	20525	836.5	23.5	23.20	0	1.072	0.178	0.191	--
		Back Side	20525	836.5	23.5	23.20	0	1.072	0.234	0.251	--
	Hotspot (10mm Separation)	Front Side	20525	836.5	23.5	23.20	0	1.072	0.195	0.209	--
		Back Side	20525	836.5	23.5	23.20	0	1.072	0.287	0.308	--
		Left Edge	20525	836.5	23.5	23.20	0	1.072	0.131	0.140	--
		Right Edge	20525	836.5	23.5	23.20	0	1.072	0.087	0.093	--
		Bottom Edge	20525	836.5	23.5	23.20	0	1.072	0.121	0.130	--
50%RB #0	Right Head	Cheek	20525	836.5	23.5	23.20	1	1.072	0.206	0.221	--
		Tilt	20525	836.5	23.5	23.20	1	1.072	0.075	0.080	--
	Left Head	Cheek	20525	836.5	23.5	23.20	1	1.072	0.263	0.282	--
		Tilt	20525	836.5	23.5	23.20	1	1.072	0.108	0.116	--
	Body-worn (10mm Separation)	Front Side	20525	836.5	23.5	23.20	1	1.072	0.105	0.113	--
		Back Side	20525	836.5	23.5	23.20	1	1.072	0.156	0.167	--
	Hotspot (10mm Separation)	Front Side	20525	836.5	23.5	23.20	1	1.072	0.138	0.148	--
		Back Side	20525	836.5	23.5	23.20	1	1.072	0.243	0.260	--
		Left Edge	20525	836.5	23.5	23.20	1	1.072	0.102	0.109	--
		Right Edge	20525	836.5	23.5	23.20	1	1.072	0.086	0.092	--
		Bottom Edge	20525	836.5	23.5	23.20	1	1.072	0.109	0.117	--

Table 15: SAR Values of LTE BAND 7, 15MHz, 16QAM

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
			CH.	MHz	Maximum Turn-up Power (dBm)	Measured output power (dBm)		Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	21375	2562.5	19.5	19.11	0	1.094	0.520	0.569	17
		Tilt	21375	2562.5	19.5	19.11	0	1.094	0.196	0.214	--
	Left Head	Cheek	21375	2562.5	19.5	19.11	0	1.094	0.387	0.423	--
		Tilt	21375	2562.5	19.5	19.11	0	1.094	0.103	0.113	--
	Body-worn (10mm Separation)	Front Side	21375	2562.5	22.5	22.16	0	1.081	0.462	0.499	--
		Back Side	21375	2562.5	22.5	22.16	0	1.081	0.615	0.665	18
	Hotspot (10mm Separation)	Front Side	21375	2562.5	19.5	18.21	0	1.346	0.275	0.370	--
		Back Side	21375	2562.5	19.5	18.21	0	1.346	0.349	0.470	--
		Left Edge	21375	2562.5	19.5	18.21	0	1.346	0.253	0.341	--
		Top Edge	21375	2562.5	19.5	18.21	0	1.346	0.287	0.386	--
50%RB #0	Right Head	Cheek	21375	2562.5	19.5	19.11	1	1.094	0.518	0.567	--
		Tilt	21375	2562.5	19.5	19.11	1	1.094	0.173	0.189	--
	Left Head	Cheek	21375	2562.5	19.5	19.11	1	1.094	0.394	0.431	--
		Tilt	21375	2562.5	19.5	19.11	1	1.094	0.112	0.123	--
	Body-worn (10mm Separation)	Front Side	21375	2562.5	22.5	22.16	1	1.081	0.405	0.438	--
		Back Side	21375	2562.5	22.5	22.16	1	1.081	0.592	0.640	--
	Hotspot (10mm Separation)	Front Side	21375	2562.5	19.5	18.21	1	1.346	0.213	0.287	--
		Back Side	21375	2562.5	19.5	18.21	1	1.346	0.324	0.436	--
		Left Edge	21375	2562.5	19.5	18.21	1	1.346	0.142	0.191	--
		Top Edge	21375	2562.5	19.5	18.21	1	1.346	0.193	0.260	--

Table 16: SAR Values of LTE BAND 7, 20MHz, QPSK

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
			CH.	MHz	Maximum Turn-up Power (dBm)	Measured output power (dBm)		Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	21350	2560	19.5	18.95	0	1.135	0.458	0.520	--
		Tilt	21350	2560	19.5	18.95	0	1.135	0.105	0.119	--
	Left Head	Cheek	21350	2560	19.5	18.95	0	1.135	0.324	0.368	--
		Tilt	21350	2560	19.5	18.95	0	1.135	0.083	0.094	--
	Body-worn (10mm Separation)	Front Side	21350	2560	22	21.69	0	1.074	0.326	0.350	--
		Back Side	21350	2560	22	21.69	0	1.074	0.571	0.613	--
	Hotspot (10mm Separation)	Front Side	21350	2560	18.5	18.11	0	1.094	0.233	0.255	--
		Back Side	21350	2560	18.5	18.11	0	1.094	0.304	0.333	--
		Left Edge	21350	2560	18.5	18.11	0	1.094	0.197	0.216	--
		Top Edge	21350	2560	18.5	18.11	0	1.094	0.234	0.256	--
50%RB #0	Right Head	Cheek	21350	2560	19.5	18.95	1	1.135	0.463	0.526	--
		Tilt	21350	2560	19.5	18.95	1	1.135	0.114	0.129	--
	Left Head	Cheek	21350	2560	19.5	18.95	1	1.135	0.309	0.351	--
		Tilt	21350	2560	19.5	18.95	1	1.135	0.090	0.102	--
	Body-worn (10mm Separation)	Front Side	21350	2560	22	21.69	1	1.074	0.327	0.351	--
		Back Side	21350	2560	22	21.69	1	1.074	0.524	0.563	--
	Hotspot (10mm Separation)	Front Side	21350	2560	18.5	18.11	1	1.094	0.243	0.266	--
		Back Side	21350	2560	18.5	18.11	1	1.094	0.315	0.345	--
		Left Edge	21350	2560	18.5	18.11	1	1.094	0.189	0.207	--
		Top Edge	21350	2560	18.5	18.11	1	1.094	0.244	0.267	--

Table 17: SAR Values of LTE BAND 12, 3MHz, 16QAM

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
			CH.	MHz	Maximum Turn-up Power (dBm)	Measured output power (dBm)		Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	23165	714.5	23.5	23.47	0	1.007	0.400	0.403	19
		Tilt	23165	714.5	23.5	23.47	0	1.007	0.216	0.218	--
	Left Head	Cheek	23165	714.5	23.5	23.47	0	1.007	0.329	0.331	--
		Tilt	23165	714.5	23.5	23.47	0	1.007	0.117	0.118	--
	Body-worn (10mm Separation)	Front Side	23165	714.5	23.5	23.47	0	1.007	0.142	0.143	--
		Back Side	23165	714.5	23.5	23.47	0	1.007	0.205	0.206	--
	Hotspot (10mm Separation)	Front Side	23165	714.5	23.5	23.47	0	1.007	0.183	0.184	--
		Back Side	23165	714.5	23.5	23.47	0	1.007	0.214	0.215	20
		Left Edge	23165	714.5	23.5	23.47	0	1.007	0.108	0.109	--
		Right Edge	23165	714.5	23.5	23.47	0	1.007	0.116	0.117	--
		Bottom Edge	23165	714.5	23.5	23.47	0	1.007	0.193	0.194	--
50%RB #0	Right Head	Cheek	23165	714.5	23.5	23.47	1	1.007	0.345	0.347	--
		Tilt	23165	714.5	23.5	23.47	1	1.007	0.176	0.177	--
	Left Head	Cheek	23165	714.5	23.5	23.47	1	1.007	0.339	0.341	--
		Tilt	23165	714.5	23.5	23.47	1	1.007	0.124	0.125	--
	Body-worn (10mm Separation)	Front Side	23165	714.5	23.5	23.47	1	1.007	0.131	0.132	--
		Back Side	23165	714.5	23.5	23.47	1	1.007	0.209	0.210	--
	Hotspot (10mm Separation)	Front Side	23165	714.5	23.5	23.47	1	1.007	0.194	0.195	--
		Back Side	23165	714.5	23.5	23.47	1	1.007	0.207	0.208	--
		Left Edge	23165	714.5	23.5	23.47	1	1.007	0.124	0.125	--
		Right Edge	23165	714.5	23.5	23.47	1	1.007	0.107	0.108	--
		Bottom Edge	23165	714.5	23.5	23.47	1	1.007	0.199	0.200	--

Table 18: SAR Values of LTE BAND 12, 10MHz, 16QAM

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
			CH.	MHz	Maximum Turn-up Power (dBm)	Measured output power (dBm)		Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	23095	707.5	23.5	23.24	0	1.062	0.341	0.362	--
		Tilt	23095	707.5	23.5	23.24	0	1.062	0.124	0.132	--
	Left Head	Cheek	23095	707.5	23.5	23.24	0	1.062	0.286	0.304	--
		Tilt	23095	707.5	23.5	23.24	0	1.062	0.098	0.104	--
	Body-worn (10mm Separation)	Front Side	23095	707.5	23.5	23.24	0	1.062	0.103	0.109	--
		Back Side	23095	707.5	23.5	23.24	0	1.062	0.185	0.196	--
	Hotspot (10mm Separation)	Front Side	23095	707.5	23.5	23.24	0	1.062	0.164	0.174	--
		Back Side	23095	707.5	23.5	23.24	0	1.062	0.192	0.204	--
		Left Edge	23095	707.5	23.5	23.24	0	1.062	0.097	0.103	--
		Right Edge	23095	707.5	23.5	23.24	0	1.062	0.083	0.088	--
		Bottom Edge	23095	707.5	23.5	23.24	0	1.062	0.159	0.169	--
50%RB #0	Right Head	Cheek	23095	707.5	23.5	23.24	1	1.062	0.367	0.390	--
		Tilt	23095	707.5	23.5	23.24	1	1.062	0.143	0.152	--
	Left Head	Cheek	23095	707.5	23.5	23.24	1	1.062	0.317	0.337	--
		Tilt	23095	707.5	23.5	23.24	1	1.062	0.103	0.109	--
	Body-worn (10mm Separation)	Front Side	23095	707.5	23.5	23.24	1	1.062	0.129	0.137	--
		Back Side	23095	707.5	23.5	23.24	1	1.062	0.182	0.193	--
	Hotspot (10mm Separation)	Front Side	23095	707.5	23.5	23.24	1	1.062	0.163	0.173	--
		Back Side	23095	707.5	23.5	23.24	1	1.062	0.182	0.193	--
		Left Edge	23095	707.5	23.5	23.24	1	1.062	0.103	0.109	--
		Right Edge	23095	707.5	23.5	23.24	1	1.062	0.124	0.132	--
		Bottom Edge	23095	707.5	23.5	23.24	1	1.062	0.176	0.187	--

Table 19: SAR Values of LTE BAND 13, 10MHz, 16QAM

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
			CH.	MHz	Maximum Turn-up Power (dBm)	Measured output power (dBm)		Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	23230	782.0	23.5	23.44	0	1.014	0.495	0.502	21
		Tilt	23230	782.0	23.5	23.44	0	1.014	0.175	0.177	--
	Left Head	Cheek	23230	782.0	23.5	23.44	0	1.014	0.298	0.302	--
		Tilt	23230	782.0	23.5	23.44	0	1.014	0.124	0.126	--
	Body-worn (10mm Separation)	Front Side	23230	782.0	23.5	23.44	0	1.014	0.125	0.127	--
		Back Side	23230	782.0	23.5	23.44	0	1.014	0.196	0.199	--
	Hotspot (10mm Separation)	Front Side	23230	782.0	23.5	23.44	0	1.014	0.148	0.150	--
		Back Side	23230	782.0	23.5	23.44	0	1.014	0.274	0.278	22
		Left Edge	23230	782.0	23.5	23.44	0	1.014	0.075	0.076	--
		Right Edge	23230	782.0	23.5	23.44	0	1.014	0.068	0.069	--
		Bottom Edge	23230	782.0	23.5	23.44	0	1.014	0.136	0.138	--
50%RB #0	Right Head	Cheek	23230	782.0	23.5	23.44	1	1.014	0.454	0.460	--
		Tilt	23230	782.0	23.5	23.44	1	1.014	0.186	0.189	--
	Left Head	Cheek	23230	782.0	23.5	23.44	1	1.014	0.307	0.311	--
		Tilt	23230	782.0	23.5	23.44	1	1.014	0.108	0.110	--
	Body-worn (10mm Separation)	Front Side	23230	782.0	23.5	23.44	1	1.014	0.136	0.138	--
		Back Side	23230	782.0	23.5	23.44	1	1.014	0.172	0.174	--
	Hotspot (10mm Separation)	Front Side	23230	782.0	23.5	23.44	1	1.014	0.124	0.126	--
		Back Side	23230	782.0	23.5	23.44	1	1.014	0.223	0.226	--
		Left Edge	23230	782.0	23.5	23.44	1	1.014	0.089	0.090	--
		Right Edge	23230	782.0	23.5	23.44	1	1.014	0.074	0.075	--
		Bottom Edge	23230	782.0	23.5	23.44	1	1.014	0.145	0.147	--

Table 20: SAR Values of LTE BAND 41, 20MHz, QPSK

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
			CH.	MHz	Maximum Turn-up Power (dBm)	Measured output power (dBm)		Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	41140	2645.0	20.5	20.07	0	1.104	0.193	0.213	--
		Tilt	41140	2645.0	20.5	20.07	0	1.104	0.075	0.083	--
	Left Head	Cheek	41140	2645.0	20.5	20.07	0	1.104	0.286	0.316	23
		Tilt	41140	2645.0	20.5	20.07	0	1.104	0.086	0.095	--
	Body-worn (10mm Separation)	Front Side	41140	2645.0	22.5	22.03	0	1.114	0.207	0.231	--
		Back Side	41140	2645.0	22.5	22.03	0	1.114	0.314	0.350	--
	Hotspot (10mm Separation)	Front Side	41140	2645.0	20.5	20.29	0	1.050	0.225	0.236	--
		Back Side	41140	2645.0	20.5	20.29	0	1.050	0.306	0.321	--
		Left Edge	41140	2645.0	20.5	20.29	0	1.050	0.243	0.255	--
		Top Edge	41140	2645.0	20.5	20.29	0	1.050	0.410	0.431	24
50%RB #0	Right Head	Cheek	41140	2645.0	20.5	20.07	1	1.104	0.173	0.191	--
		Tilt	41140	2645.0	20.5	20.07	1	1.104	0.084	0.093	--
	Left Head	Cheek	41140	2645.0	20.5	20.07	1	1.104	0.251	0.277	--
		Tilt	41140	2645.0	20.5	20.07	1	1.104	0.054	0.060	--
	Body-worn (10mm Separation)	Front Side	41140	2645.0	22.5	22.03	1	1.114	0.228	0.254	--
		Back Side	41140	2645.0	22.5	22.03	1	1.114	0.326	0.363	--
	Hotspot (10mm Separation)	Front Side	41140	2645.0	20.5	20.29	1	1.050	0.218	0.229	--
		Back Side	41140	2645.0	20.5	20.29	1	1.050	0.299	0.314	--
		Left Edge	41140	2645.0	20.5	20.29	1	1.050	0.259	0.272	--
		Top Edge	41140	2645.0	20.5	20.29	1	1.050	0.372	0.391	--

Table 21: SAR Values of LTE BAND 66, 1.4MHz, 16QAM

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
			CH.	MHz	Maximum Turn-up Power (dBm)	Measured output power (dBm)		Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	131979	1710.7	19.5	19.35	0	1.035	0.452	0.468	--
		Tilt	131979	1710.7	19.5	19.35	0	1.035	0.302	0.313	--
	Left Head	Cheek	131979	1710.7	19.5	19.35	0	1.035	0.489	0.506	25
		Tilt	131979	1710.7	19.5	19.35	0	1.035	0.247	0.256	--
	Body-worn (10mm Separation)	Front Side	131979	1710.7	23.5	23.22	0	1.067	0.768	0.819	--
		Back Side	131979	1710.7	23.5	23.22	0	1.067	0.922	0.984	26
		Back Side	132321	1744.9	23	22.70	0	1.072	0.885	0.948	--
		Back Side	132664	1779.2	23	22.54	0	1.112	0.869	0.966	--
	Hotspot (10mm Separation)	Front Side	131979	1710.7	21.5	21.25	0	1.059	0.692	0.733	--
		Back Side	131979	1710.7	21.5	21.25	0	1.059	0.876	0.928	--
		Left Edge	131979	1710.7	21.5	21.25	0	1.059	0.429	0.454	--
		Top Edge	131979	1710.7	21.5	21.25	0	1.059	0.648	0.686	--
50%RB #0	Right Head	Cheek	131979	1710.7	19.5	19.35	1	1.035	0.397	0.411	--
		Tilt	131979	1710.7	19.5	19.35	1	1.035	0.294	0.304	--
	Left Head	Cheek	131979	1710.7	19.5	19.35	1	1.035	0.446	0.462	--
		Tilt	131979	1710.7	19.5	19.35	1	1.035	0.216	0.224	--
	Body-worn (10mm Separation)	Front Side	131979	1710.7	23.5	23.22	1	1.067	0.664	0.708	--
		Back Side	131979	1710.7	23.5	23.22	1	1.067	0.827	0.882	--
		Back Side	132321	1744.9	23	22.70	1	1.072	0.782	0.838	--
		Back Side	132664	1779.2	23	22.54	1	1.112	0.774	0.860	--
	Hotspot (10mm Separation)	Front Side	131979	1710.7	21.5	21.25	1	1.059	0.609	0.645	--
		Back Side	131979	1710.7	21.5	21.25	1	1.059	0.823	0.872	--
		Left Edge	131979	1710.7	21.5	21.25	1	1.059	0.364	0.385	--
		Top Edge	131979	1710.7	21.5	21.25	1	1.059	0.527	0.558	--

Table 22: SAR Values of LTE BAND 66, 20MHz, QPSK

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
			CH.	MHz	Maximum Turn-up Power (dBm)	Measured output power (dBm)		Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	132072	1720	19.5	19.26	0	1.057	0.383	0.405	--
		Tilt	132072	1720	19.5	19.26	0	1.057	0.276	0.292	--
	Left Head	Cheek	132072	1720	19.5	19.26	0	1.057	0.428	0.452	--
		Tilt	132072	1720	19.5	19.26	0	1.057	0.105	0.111	--
	Body-worn (10mm Separation)	Front Side	132072	1720	23	22.7	0	1.072	0.627	0.672	--
		Back Side	132072	1720	23	22.7	0	1.072	0.814	0.873	--
		Back Side	132321	1744.9	23	22.42	0	1.143	0.786	0.898	--
		Back Side	132471	1759.9	23	22.60	0	1.096	0.798	0.875	--
	Hotspot (10mm Separation)	Front Side	132072	1720	21.5	21.22	0	1.067	0.549	0.586	--
		Back Side	132072	1720	21.5	21.22	0	1.067	0.722	0.770	--
		Left Edge	132072	1720	21.5	21.22	0	1.067	0.327	0.349	--
		Top Edge	132072	1720	21.5	21.22	0	1.067	0.536	0.572	--
50%RB #0	Right Head	Cheek	132072	1720	19.5	19.26	1	1.057	0.392	0.414	--
		Tilt	132072	1720	19.5	19.26	1	1.057	0.247	0.261	--
	Left Head	Cheek	132072	1720	19.5	19.26	1	1.057	0.436	0.461	--
		Tilt	132072	1720	19.5	19.26	1	1.057	0.118	0.125	--
	Body-worn (10mm Separation)	Front Side	132072	1720	23	22.7	1	1.072	0.643	0.689	--
		Back Side	132072	1720	23	22.7	1	1.072	0.856	0.918	--
		Back Side	132321	1744.9	23	22.42	1	1.143	0.825	0.943	--
		Back Side	132471	1759.9	23	22.60	1	1.096	0.839	0.920	--
	Hotspot (10mm Separation)	Front Side	132072	1720	21.5	21.22	1	1.067	0.539	0.575	--
		Back Side	132072	1720	21.5	21.22	1	1.067	0.740	0.790	--
		Left Edge	132072	1720	21.5	21.22	1	1.067	0.338	0.361	--
		Top Edge	132072	1720	21.5	21.22	1	1.067	0.577	0.616	--

Table 23: SAR Values of 2.4G Wi-Fi

Test Positions		Channel		Test Mode	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
		CH.	MHz		Maximum Turn-up Power (dBm)	Measured output power (dBm)	Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
Right Head	Cheek	11	2462	802.11b	14.5	14.42	1.019	0.330	0.336	27
	Tilt	11	2462	802.11b	14.5	14.42	1.019	0.318	0.324	--
Left Head	Cheek	11	2462	802.11b	14.5	14.42	1.019	0.279	0.284	--
	Tilt	11	2462	802.11b	14.5	14.42	1.019	0.262	0.267	--
Body-worn (10mm Separation)	Front Side	11	2462	802.11b	17	16.52	1.117	0.173	0.193	--
	Back Side	11	2462	802.11b	17	16.52	1.117	0.125	0.140	--
Hotspot (10mm Separation)	Front Side	11	2462	802.11b	17	16.52	1.117	0.176	0.197	28
	Back Side	11	2462	802.11b	17	16.52	1.117	0.126	0.141	--
	Right Edge	11	2462	802.11b	17	16.52	1.117	0.06	0.067	--
	Top Edge	11	2462	802.11b	17	16.52	1.117	0.169	0.189	--

Table 24: SAR Values of Bluetooth

Test Positions		Channel		Test Mode	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg)			Plot No.
		CH.	MHz		Maximum Turn-up Power (dBm)	Measured output power (dBm)	Scaling Factor	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
Right Head	Cheek	39	2441	GFSK	12.5	12.48	1.005	0.280	0.281	29
	Tilt	39	2441	GFSK	12.5	12.48	1.005	0.263	0.264	--
Left Head	Cheek	39	2441	GFSK	12.5	12.48	1.005	0.231	0.232	--
	Tilt	39	2441	GFSK	12.5	12.48	1.005	0.217	0.218	--
Body-worn (10mm Separation)	Front Side	39	2441	GFSK	12.5	12.48	1.005	0.166	0.167	--
	Back Side	39	2441	GFSK	12.5	12.48	1.005	0.109	0.110	--
Hotspot (10mm Separation)	Front Side	39	2441	GFSK	12.5	12.48	1.005	0.168	0.169	30
	Back Side	39	2441	GFSK	12.5	12.48	1.005	0.112	0.113	--
	Right Edge	39	2441	GFSK	12.5	12.48	1.005	0.045	0.045	--
	Top Edge	39	2441	GFSK	12.5	12.48	1.005	0.159	0.160	--

Note:

1. According to KDB 648474-D04 Handset SAR v01r03 section 1.5, the diagonal dimension of this device is > 16.0 cm, but the hotspot mode 1-g reported SAR is 1.069 W/kg < 1.2 W/kg, so the 10-g extremity SAR is not required.

2. 5G Wi-Fi SAR tested results please refer to the test report WTX25X07180811W.

Measurement variability consideration

According to KDB 865664 D01v01r04 section 2.8.1, repeated measurements are required following the procedures as below:

Repeated measurement is not required when the original highest measured SAR is $< 0.80\text{W/kg}$; steps 2) through 4) do not apply.

When the original highest measured SAR is $\geq 0.80\text{ W/kg}$, repeat that measurement once.

Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45\text{ W/kg}$ (~ 10% from the 1-g SAR limit).

Perform a third repeated measurement only if the original, first or second repeated measurement is $\geq 1.5\text{ W/kg}$ and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

No Repeated SAR.

Simultaneous Transmission SAR Analysis.**List of Mode for Simultaneous Multi-band Transmission:**

No.	Configurations	Head SAR	Body-worn SAR	Hotspot SAR
1	GSM(Voice) + WLAN 2.4GHz(Data)	Yes	Yes	Yes
2	GPRS (Data) + WLAN 2.4GHz(Data)	Yes	Yes	Yes
3	GSM(Voice) + Bluetooth(Data)	Yes	Yes	Yes
4	GPRS (Data) + Bluetooth(Data)	Yes	Yes	Yes
5	GSM(Voice) + WLAN 5GHz(Data)	Yes	Yes	Yes
6	GPRS (Data) + WLAN 5GHz(Data)	Yes	Yes	Yes
7	WCDMA (Voice) + WLAN 2.4GHz(Data)	Yes	Yes	Yes
8	WCDMA (Data) + WLAN 2.4GHz(Data)	Yes	Yes	Yes
9	WCDMA (Voice) + Bluetooth(Data)	Yes	Yes	Yes
10	WCDMA (Data) + Bluetooth(Data)	Yes	Yes	Yes
11	WCDMA (Voice) + WLAN 5GHz(Data)	Yes	Yes	Yes
12	WCDMA (Data) + WLAN 5GHz(Data)	Yes	Yes	Yes
13	LTE (Data) + WLAN 2.4GHz(Data)	Yes	Yes	Yes
14	LTE (Data) + Bluetooth(Data)	Yes	Yes	Yes
15	LTE (Data) + WLAN 5GHz(Data)	Yes	Yes	Yes

Remark:

1. GSM/ WCDMA/LTE share the same antenna, and cannot transmit simultaneously.
2. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
3. WWAN 1 and WWAN 2 antenna cannot transmit simultaneously.
4. According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})}/x]$$
W/kg for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
5. The maximum SAR summation is calculated based on the same configuration and test position

Head SAR Simultaneous**WWAN and 2.4G Wi-Fi**

Position	WWAN (maximum)		2.4G Wi-Fi	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GSM	0.432	0.336	0.768
Right Tilt	GSM	0.399	0.324	0.723
Left Cheek	GSM	0.552	0.284	0.836
Left Tilt	GSM	0.521	0.267	0.788
Right Cheek	WCDMA	0.523	0.336	0.859
Right Tilt	WCDMA	0.345	0.324	0.669
Left Cheek	WCDMA	0.494	0.284	0.778
Left Tilt	WCDMA	0.314	0.267	0.581
Right Cheek	LTE	0.569	0.336	0.905
Right Tilt	LTE	0.430	0.324	0.754
Left Cheek	LTE	0.607	0.284	0.891
Left Tilt	LTE	0.467	0.267	0.734

WWAN and BT

Position	WWAN (maximum)		BT	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GSM	0.432	0.281	0.713
Right Tilt	GSM	0.399	0.264	0.663
Left Cheek	GSM	0.552	0.232	0.784
Left Tilt	GSM	0.521	0.218	0.739
Right Cheek	WCDMA	0.523	0.281	0.804
Right Tilt	WCDMA	0.345	0.264	0.609
Left Cheek	WCDMA	0.494	0.232	0.726
Left Tilt	WCDMA	0.314	0.218	0.532
Right Cheek	LTE	0.569	0.281	0.850
Right Tilt	LTE	0.430	0.264	0.694
Left Cheek	LTE	0.607	0.232	0.839
Left Tilt	LTE	0.467	0.218	0.685

WWAN and 5G Wi-Fi

Position	WWAN (maximum)		5G Wi-Fi	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GSM	0.432	0.506	0.938
Right Tilt	GSM	0.399	0.483	0.882
Left Cheek	GSM	0.552	0.765	1.317
Left Tilt	GSM	0.521	0.750	1.271
Right Cheek	WCDMA	0.523	0.506	1.029
Right Tilt	WCDMA	0.345	0.483	0.828
Left Cheek	WCDMA	0.494	0.765	1.259
Left Tilt	WCDMA	0.314	0.750	1.064
Right Cheek	LTE	0.569	0.506	1.075
Right Tilt	LTE	0.430	0.483	0.913
Left Cheek	LTE	0.607	0.765	1.372
Left Tilt	LTE	0.467	0.750	1.217

Body-worn SAR Simultaneous**WWAN and 2.4G Wi-Fi**

Position	WWAN (maximum)		2.4G Wi-Fi (10mm)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Front	GSM	0.269	0.193	0.462
Back	GSM	0.539	0.140	0.679
Front	WCDMA	0.575	0.193	0.768
Back	WCDMA	0.815	0.140	0.955
Front	LTE	0.819	0.193	1.012
Back	LTE	1.082	0.140	1.222

WWAN and BT

Position	WWAN (maximum)		BT(10mm)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Front	GSM	0.269	0.167	0.436
Back	GSM	0.539	0.110	0.649
Front	WCDMA	0.575	0.167	0.742
Back	WCDMA	0.815	0.110	0.925
Front	LTE	0.819	0.167	0.986
Back	LTE	1.082	0.110	1.192

WWAN and 5G Wi-Fi

Position	WWAN (maximum)		5G Wi-Fi (10mm)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Front	GSM	0.269	0.314	0.583
Back	GSM	0.539	0.323	0.862
Front	WCDMA	0.575	0.314	0.889
Back	WCDMA	0.815	0.323	1.138
Front	LTE	0.819	0.314	1.133
Back	LTE	1.082	0.323	1.405

Hotspot SAR Simultaneous**WWAN and 2.4G Wi-Fi**

Position	WWAN (maximum)		2.4G Wi-Fi (10mm)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Front	GSM	0.290	0.197	0.487
Back		0.463	0.141	0.604
Left		0.400	-	0.400
Right		0.384	0.067	0.451
Top		0.187	0.189	0.376
Bottom		0.431	-	0.431
Front	WCDMA	0.410	0.197	0.607
Back		0.442	0.141	0.583
Left		0.455	-	0.455
Right		0.099	0.067	0.166
Top		0.420	0.189	0.609
Bottom		0.206	-	0.206
Front	LTE	0.733	0.197	0.930
Back		1.069	0.141	1.210
Left		0.824	-	0.824
Right		0.124	0.067	0.191
Top		0.780	0.189	0.969
Bottom		0.219	-	0.219

WWAN and BT

Position	WWAN (maximum)		BT (10mm)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Front	GSM	0.290	0.169	0.459
Back		0.463	0.113	0.576
Left		0.400	-	0.400
Right		0.384	0.045	0.429
Top		0.187	0.160	0.347
Bottom		0.431	-	0.431
Front	WCDMA	0.410	0.169	0.579
Back		0.442	0.113	0.555
Left		0.455	-	0.455
Right		0.099	0.045	0.144
Top		0.420	0.160	0.580
Bottom		0.206	-	0.206
Front	LTE	0.733	0.169	0.902
Back		1.069	0.113	1.182
Left		0.824	-	0.824
Right		0.124	0.045	0.169
Top		0.780	0.160	0.940
Bottom		0.219	-	0.219

WWAN and 5G Wi-Fi

Position	WWAN (maximum)		5G Wi-Fi (10mm)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Front	GSM	0.290	0.314	0.604
Back		0.463	0.323	0.786
Left		0.400	-	0.400
Right		0.384	0.243	0.627
Top		0.187	0.384	0.571
Bottom		0.431	-	0.431
Front	WCDMA	0.410	0.314	0.724
Back		0.442	0.323	0.765
Left		0.455	-	0.455
Right		0.099	0.243	0.342
Top		0.420	0.384	0.804
Bottom		0.206	-	0.206
Front	LTE	0.733	0.314	1.047
Back		1.069	0.323	1.392
Left		0.824	-	0.824
Right		0.124	0.243	0.367
Top		0.780	0.384	1.164
Bottom		0.219	-	0.219


15 SAR Measurement Reference

15.1 References


1. FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
2. IEEE Std. C95.1-2005, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300GHz”, 2005
3. IEC/IEEE 62209-1528:2020, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices –Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)
4. FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 23th, 2015
5. FCC KDB 941225 D01 v03r01, “3G SAR Measurement Procedures”, Oct 23th, 2015
6. FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 16th, 2015
7. FCC KDB 941225 D06 v02r01, “SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities”, Oct 23th, 2015
8. FCC KDB865664 D01 v01r04, “SAR Measurement Requirements 100MHz to 6GHz”, Aug 7th, 2015
9. FCC KDB865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations ”, Oct 23th, 2015
10. FCC KDB648474 D04 v01r03, “SAR Evaluation Considerations for Wireless Handsets”, Oct 23th, 2015
11. FCC KDB 248227 D01 v02r02, SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters, Oct 23th, 2015.

15.2Maximum SAR measurement Plots


Plot 1: GPRS 850, Middle channel (Left Head Cheek)
Product Description:Smart Phone
Test Date: 2025-07-16

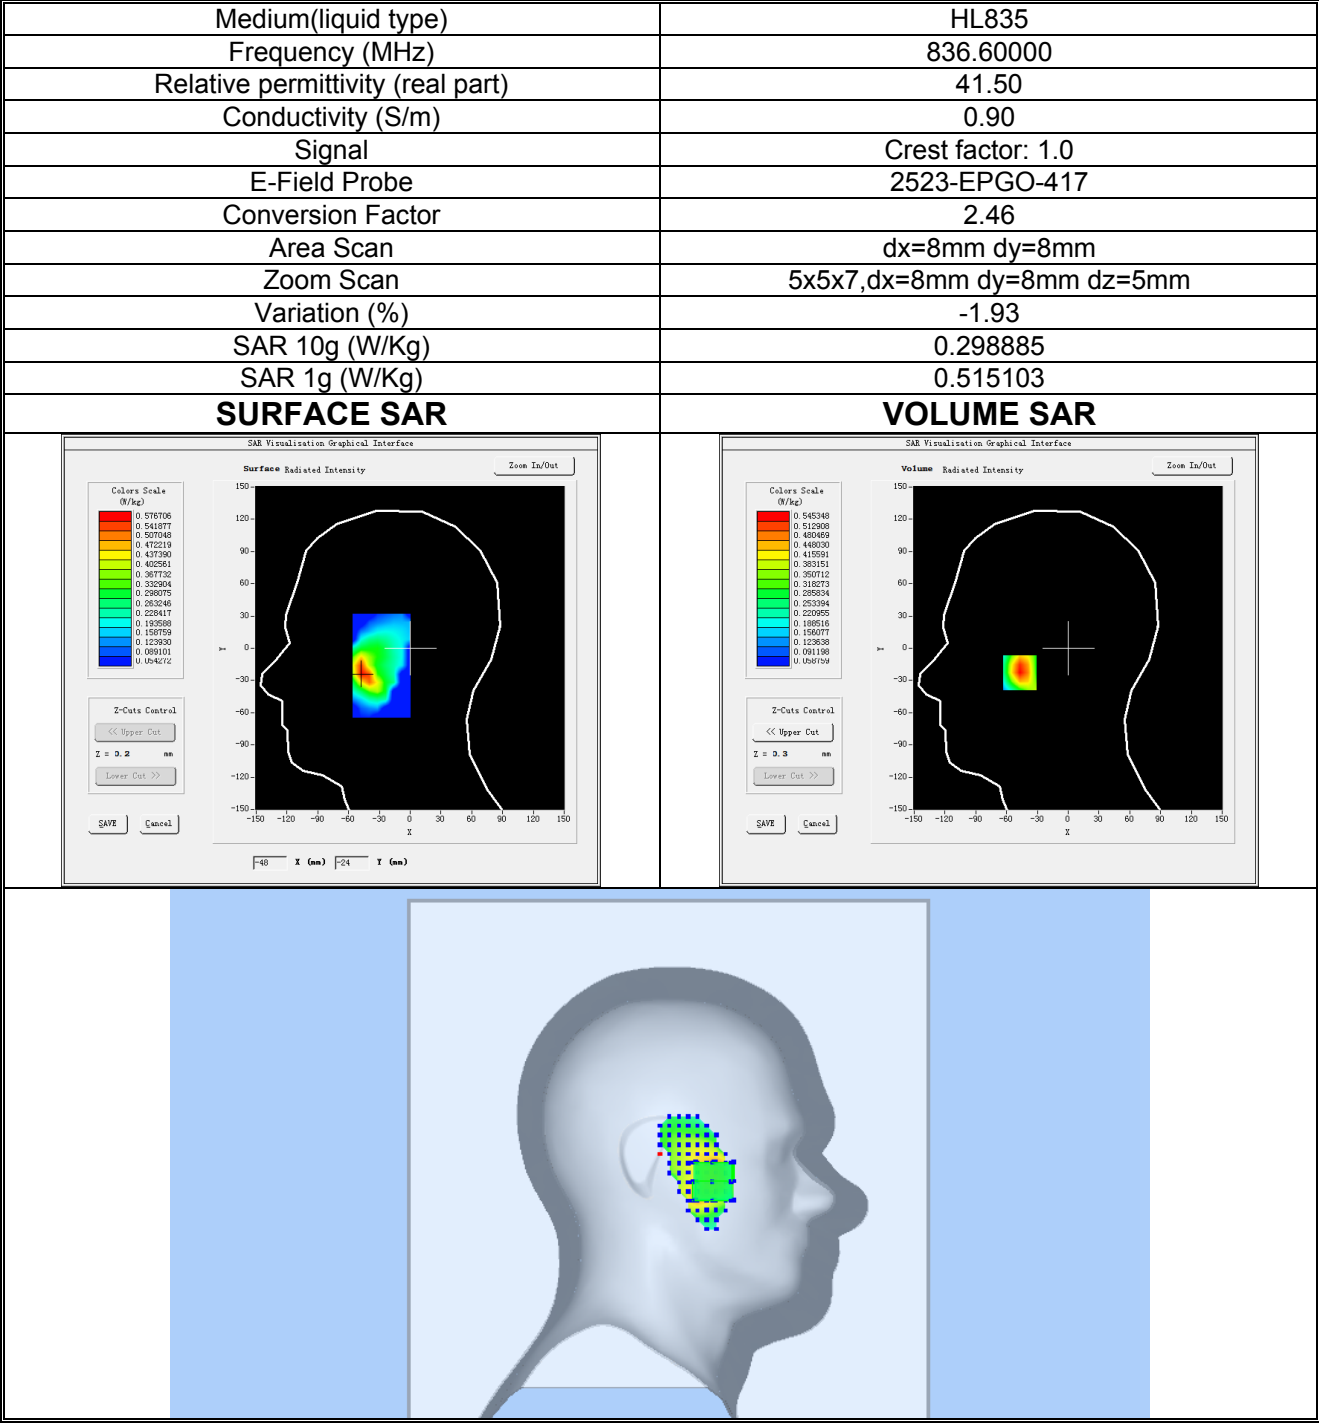


Plot 2: GPRS850, Low channel (Body-worn /Hotspot, Back Side)
Product Description:Smart Phone
Test Date: 2025-07-16

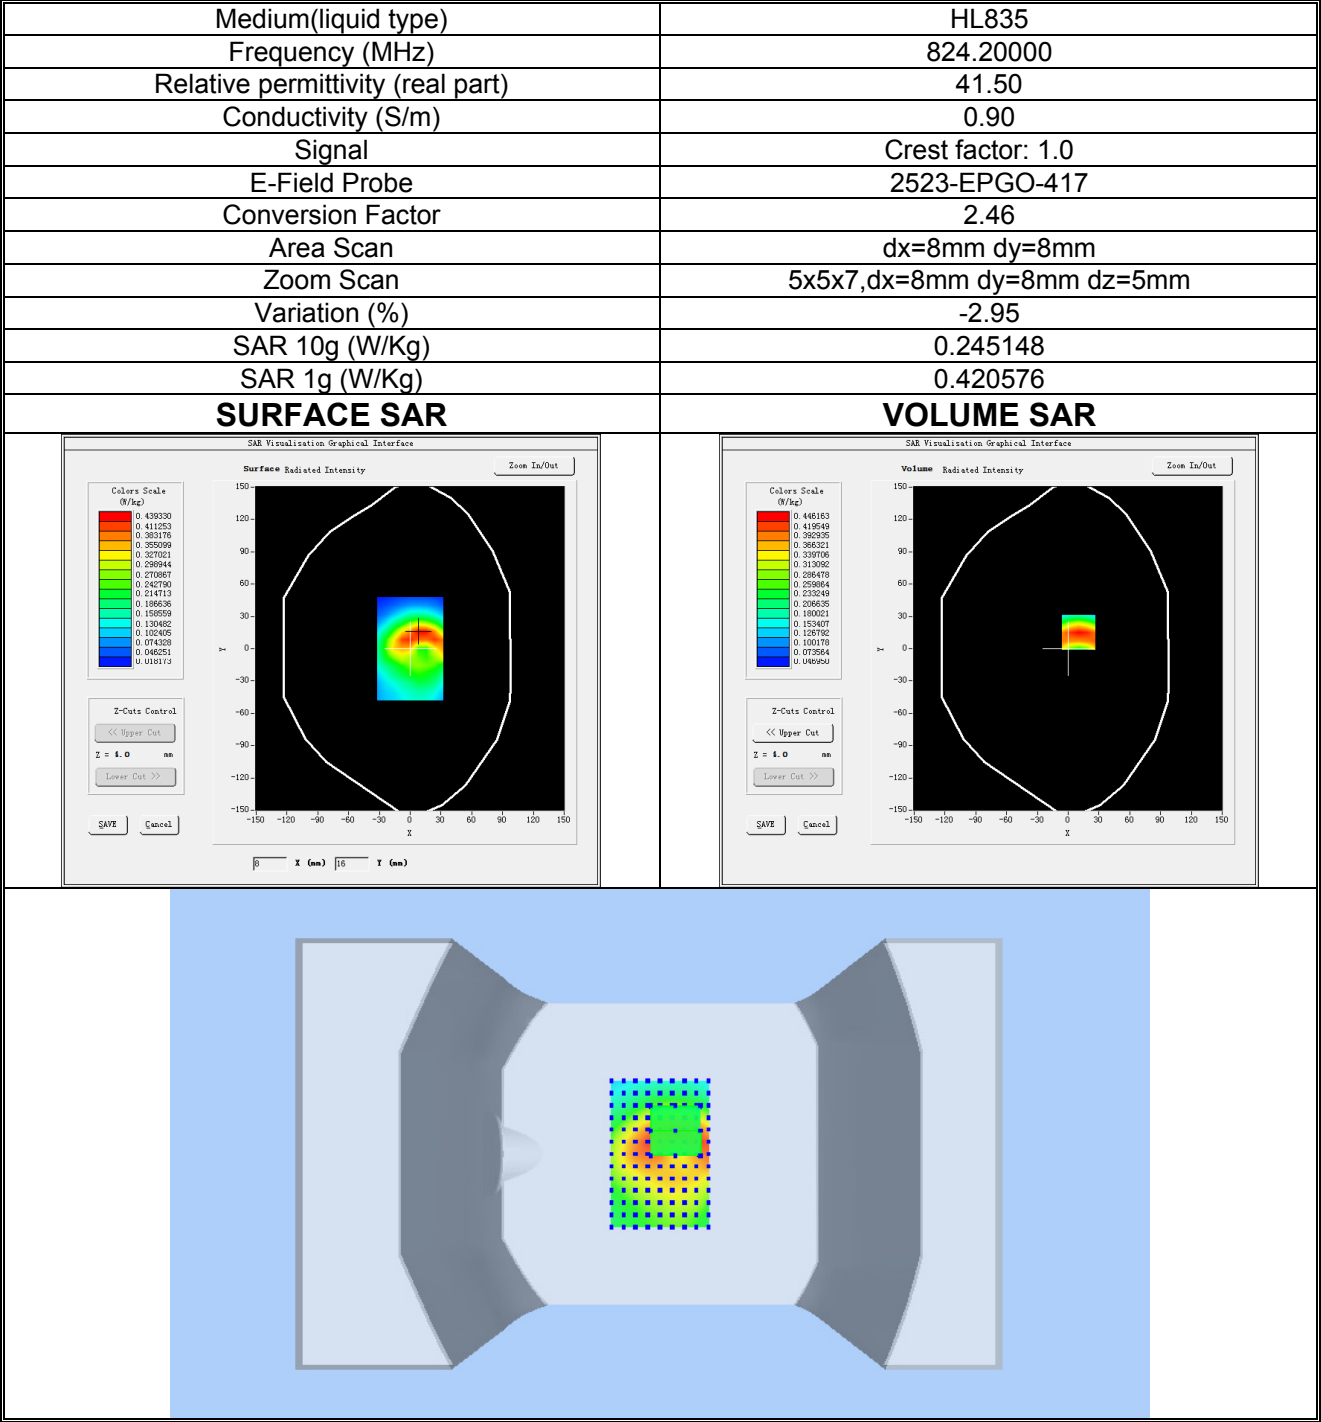


Plot 3: GSM 1900, High channel (Left Head Cheek)
Product Description: Smart Phone
Test Date: 2025-07-14

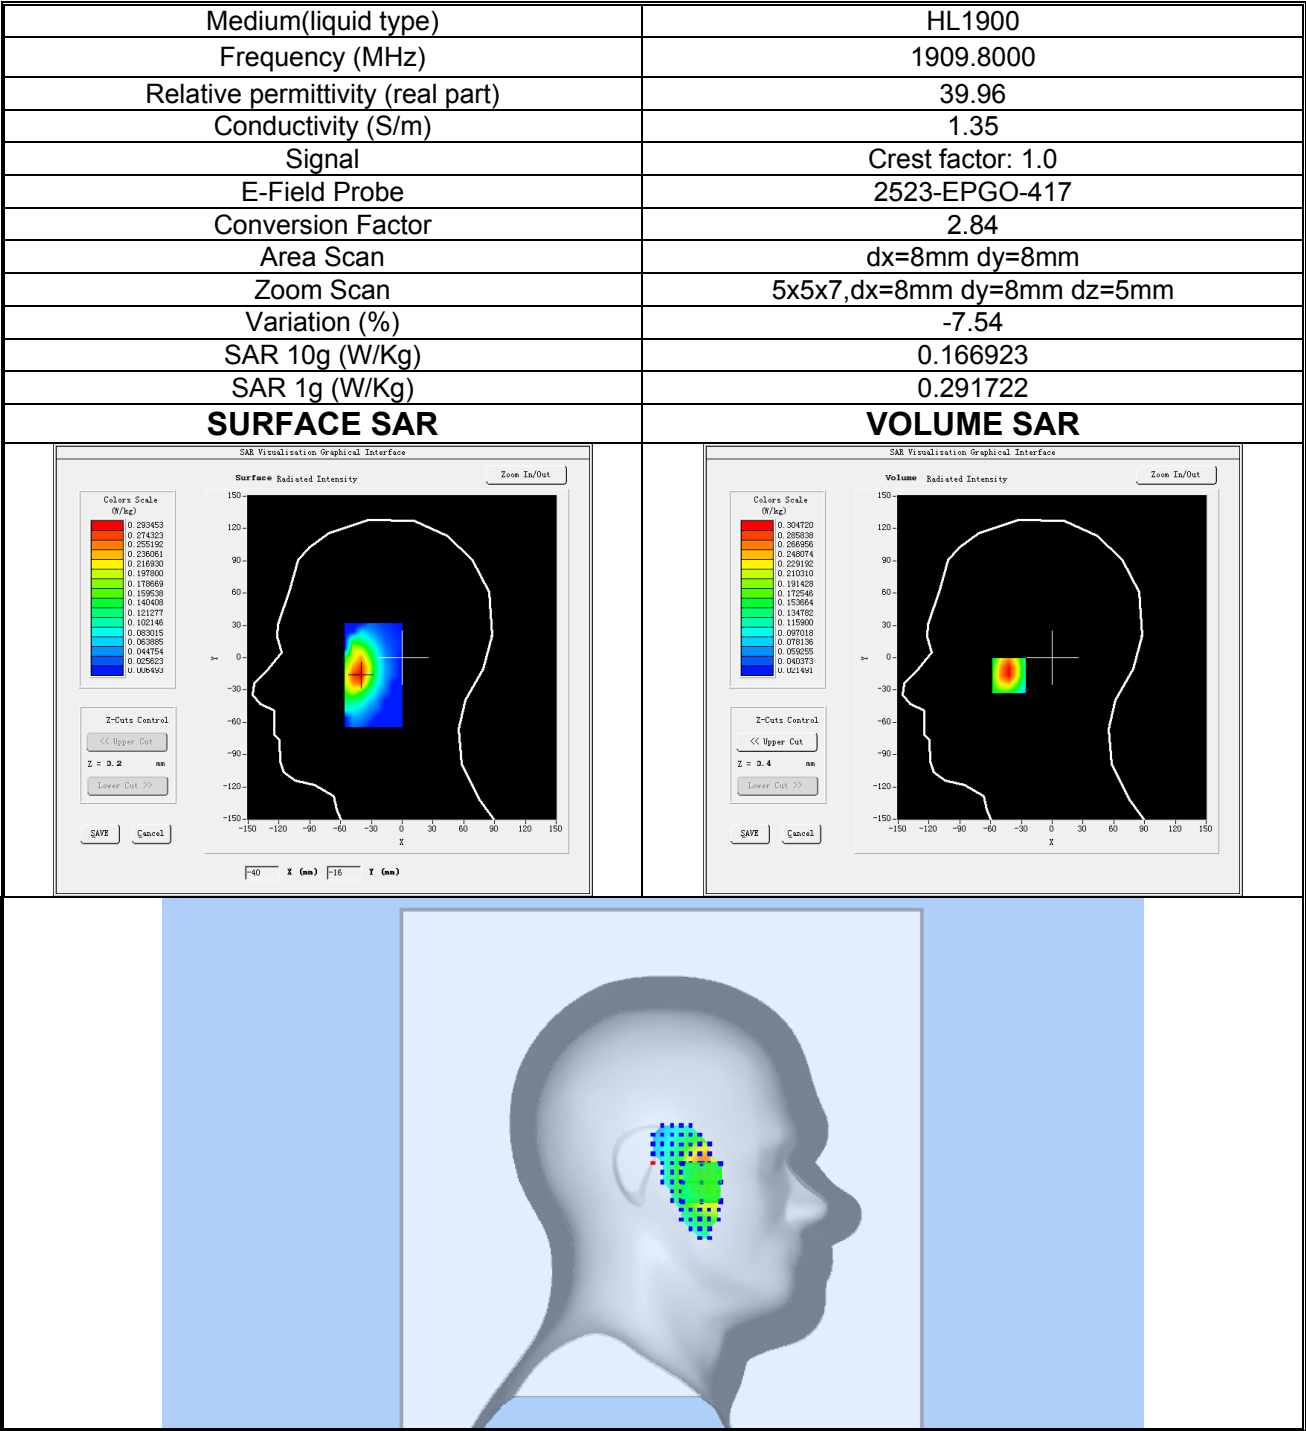


Plot 4: GSM 1900, Low channel (Body-worn /Hotspot, Back Side)
Product Description: Smart Phone
Test Date: 2025-07-14

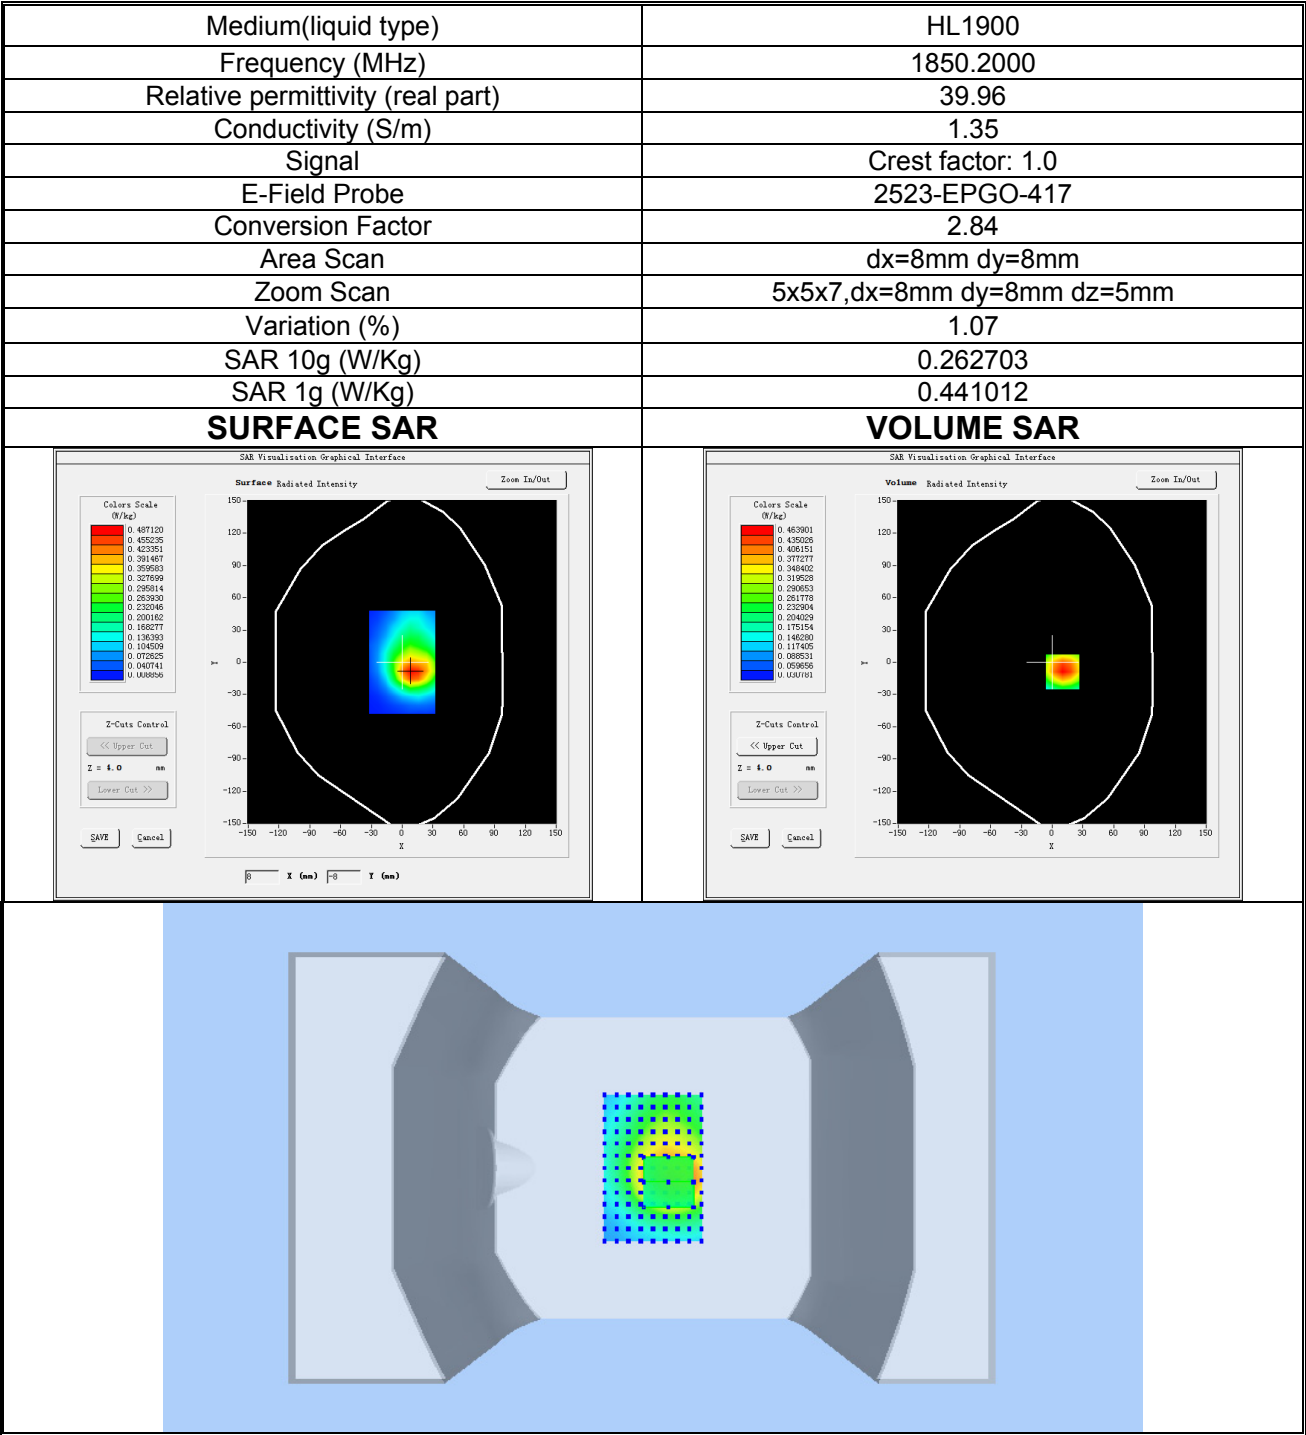


Plot 5: WCDMA BAND II, Low channel (Right Head Cheek)
Product Description: Smart Phone
Test Date: 2025-07-14

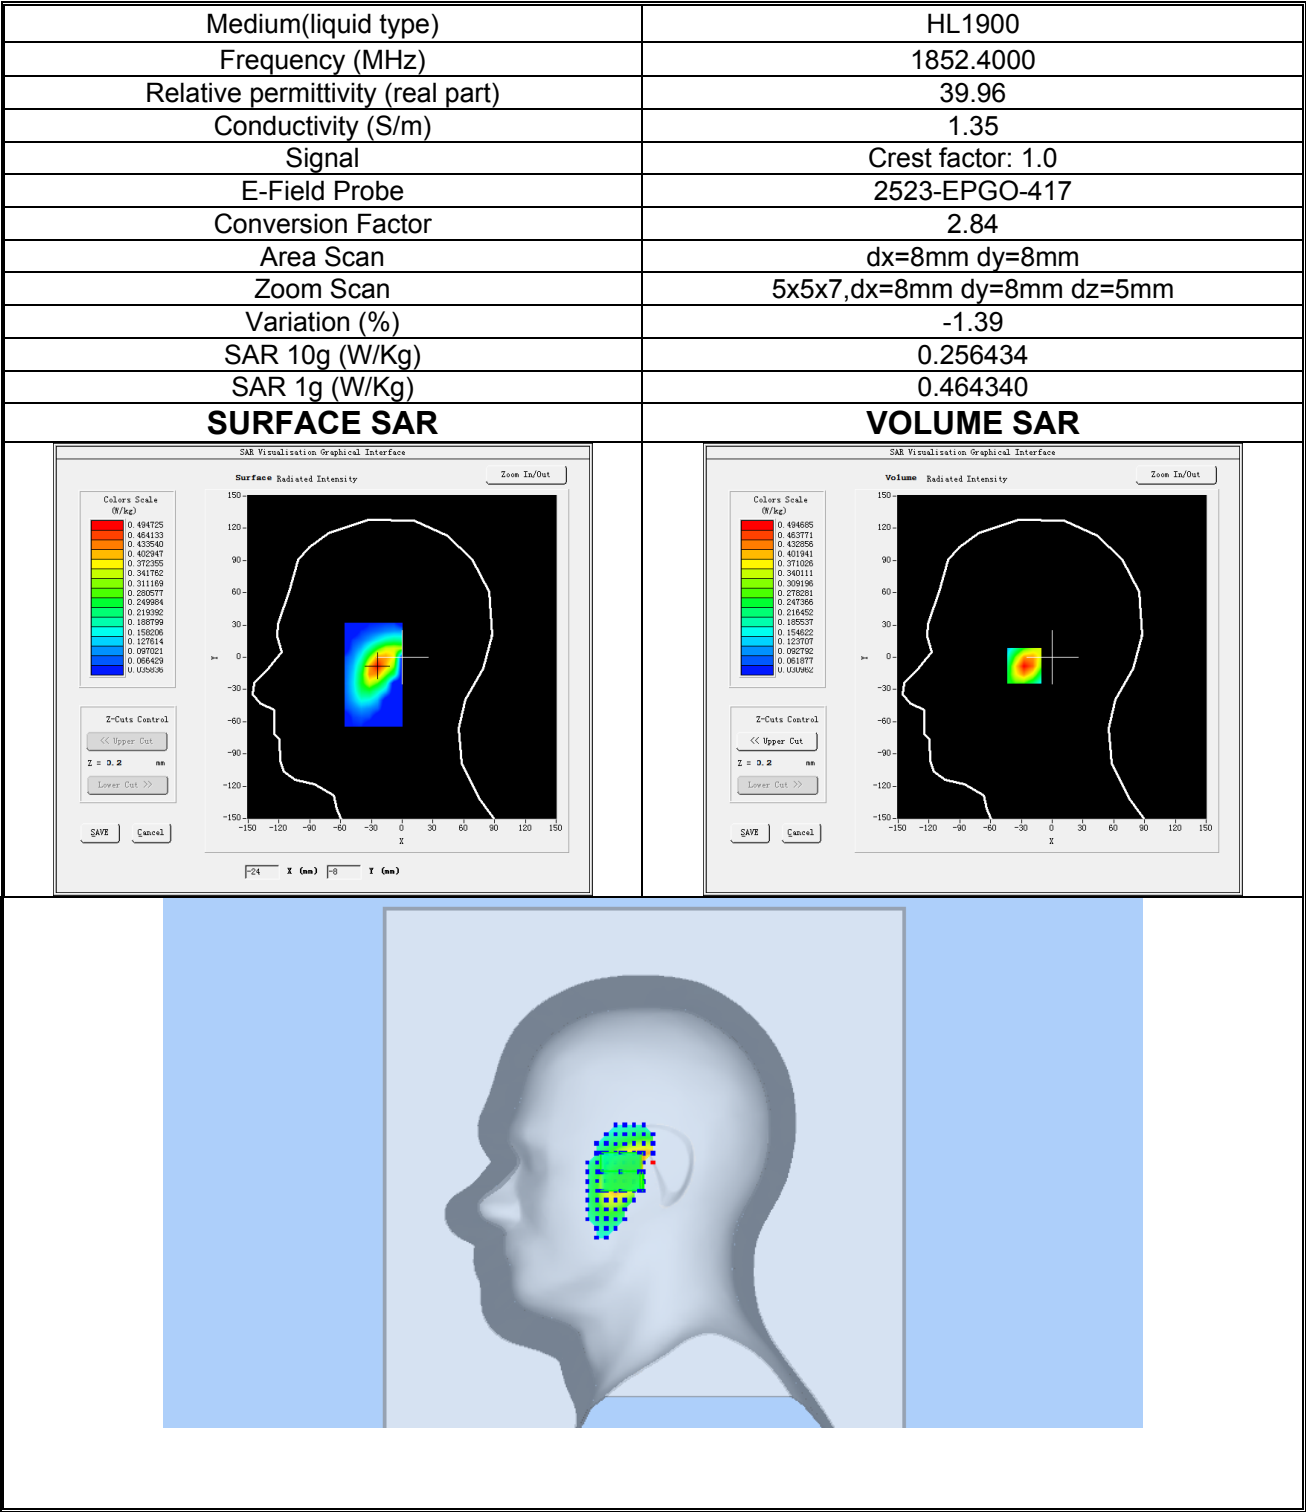


Plot 6: WCDMA BAND II, Middle channel (Body-worn /Hotspot, Back Side)
Product Description: Smart Phone
Test Date: 2025-07-14

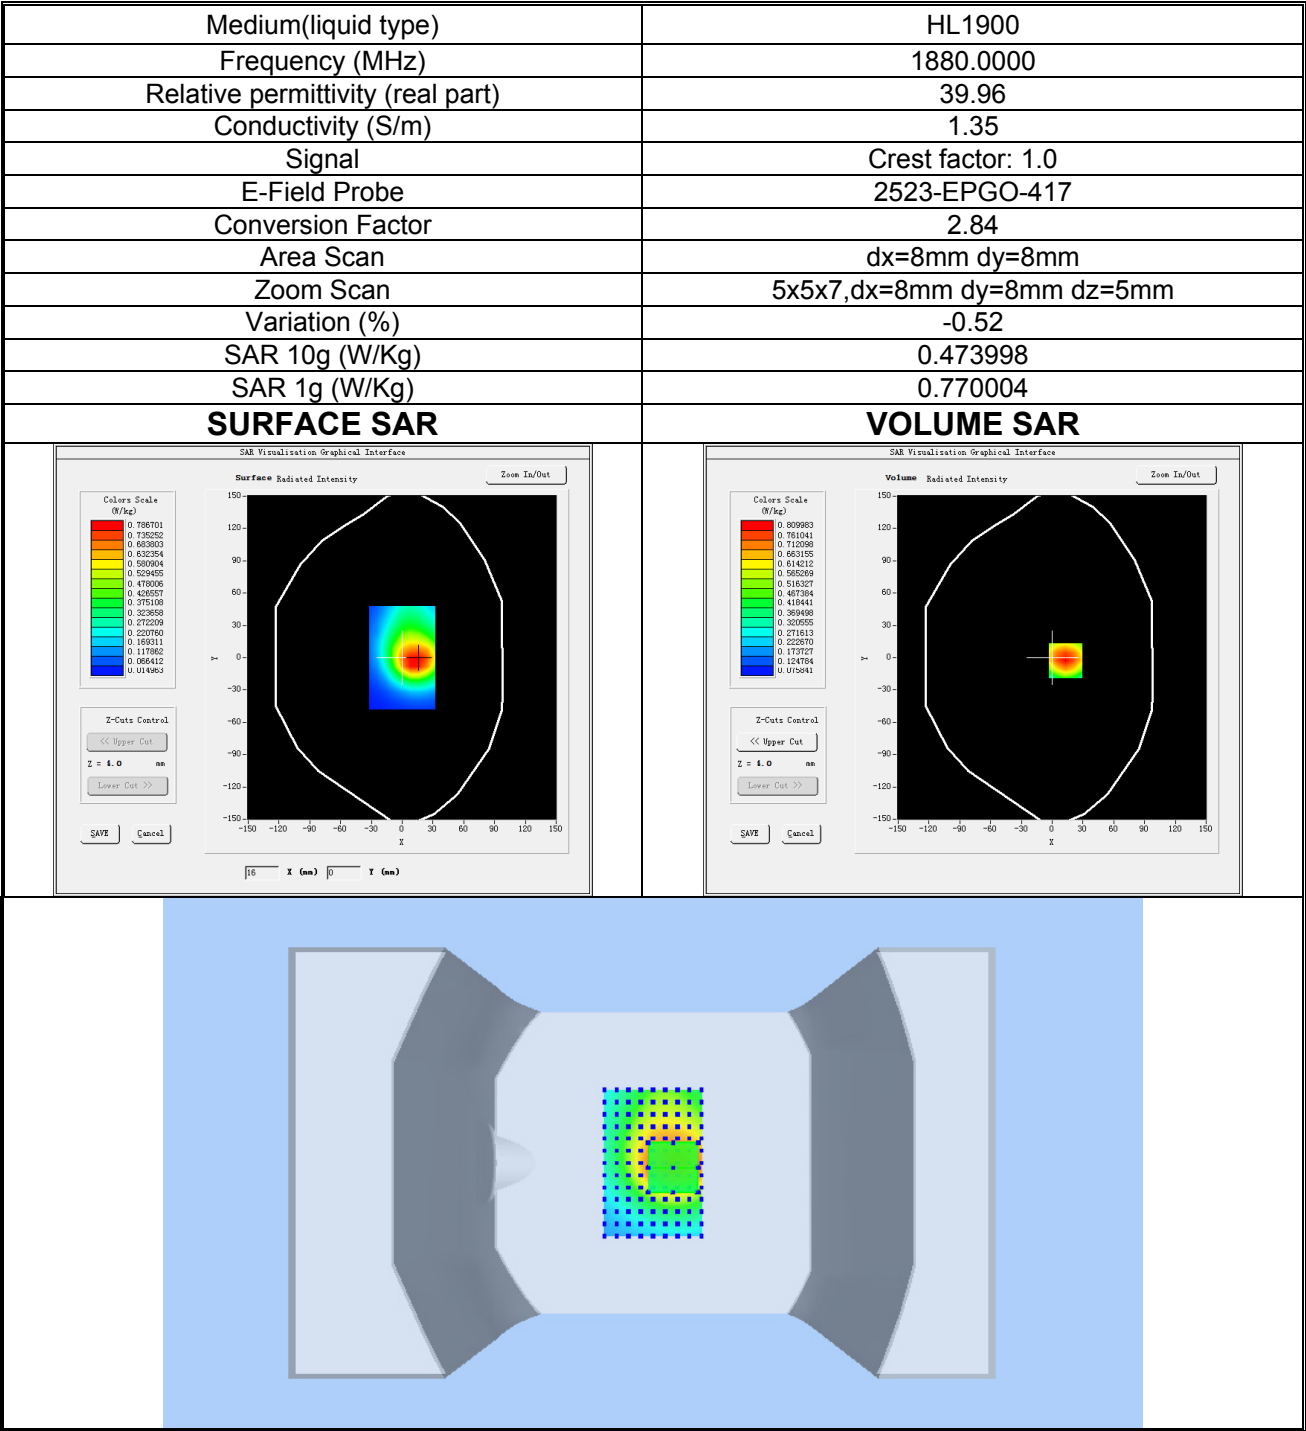


Plot 7: WCDMA BAND IV, High channel (Left Head Cheek)
Product Description: Smart Phone
Test Date: 2025-07-12

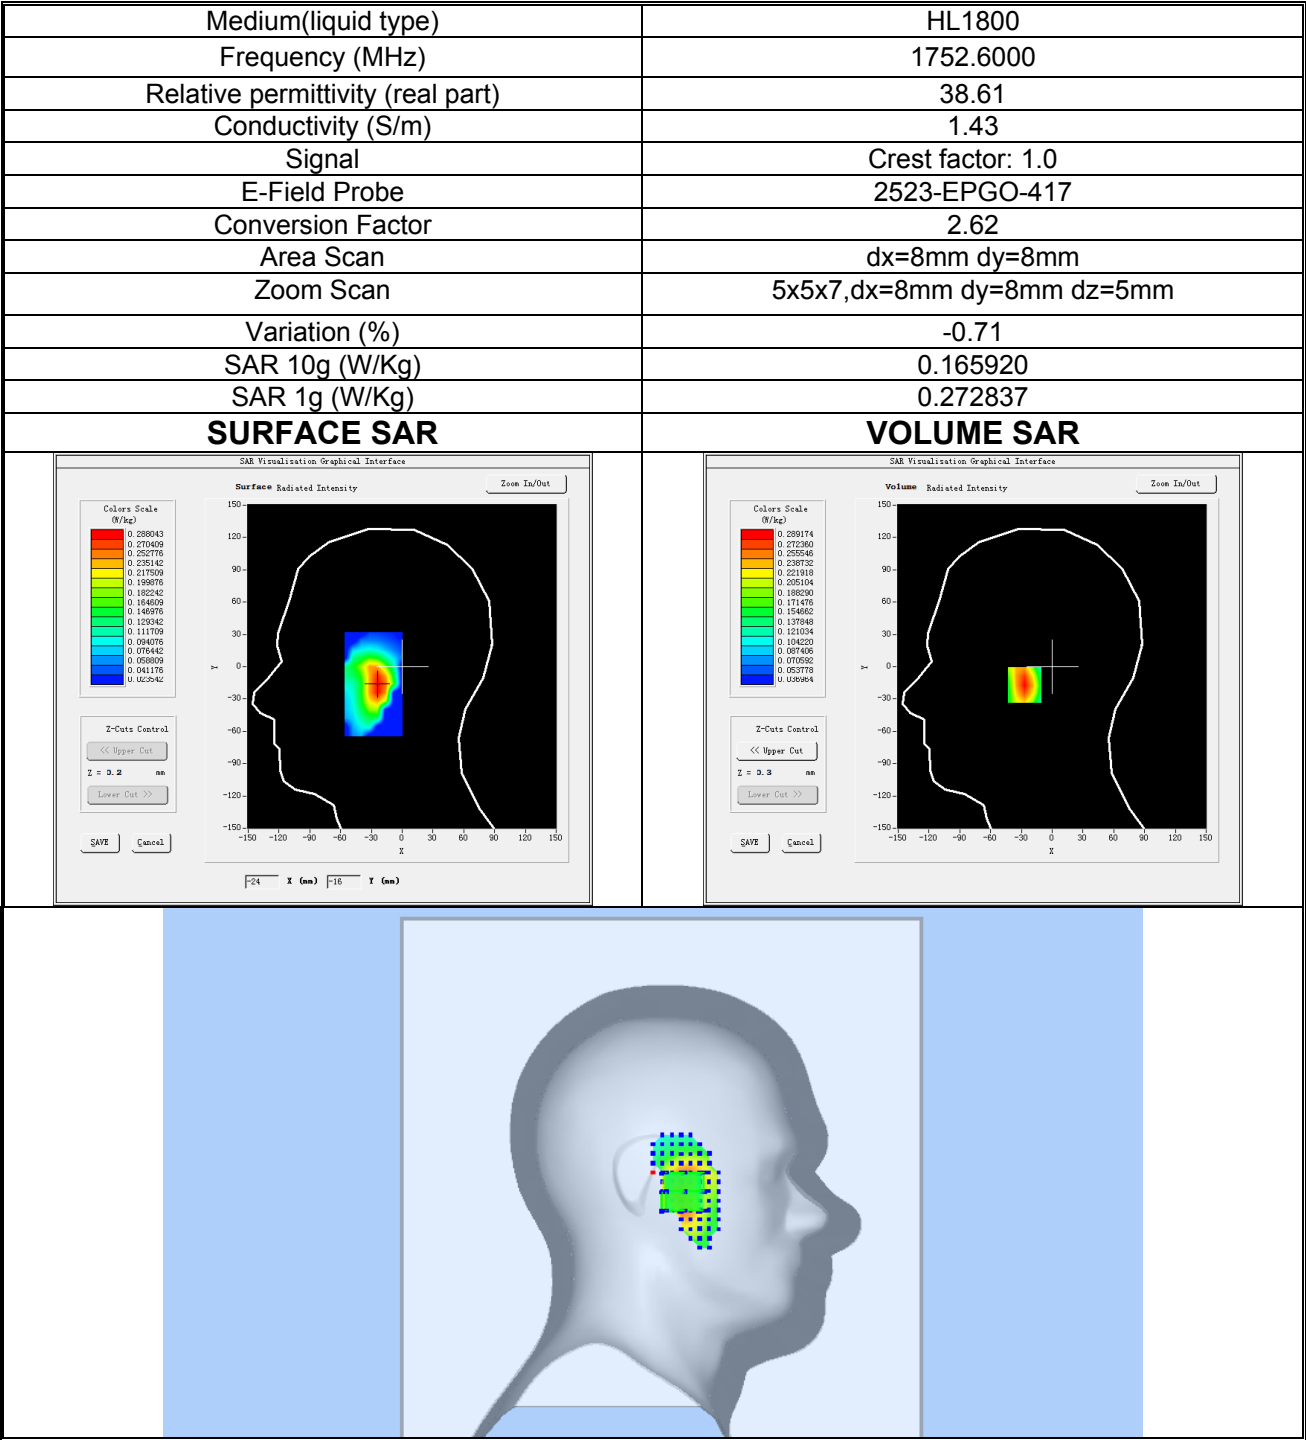


Plot 8: WCDMA BAND IV, High channel (Body-worn/Hotspot, Back Side)
Product Description: Smart Phone
Test Date: 2025-07-12

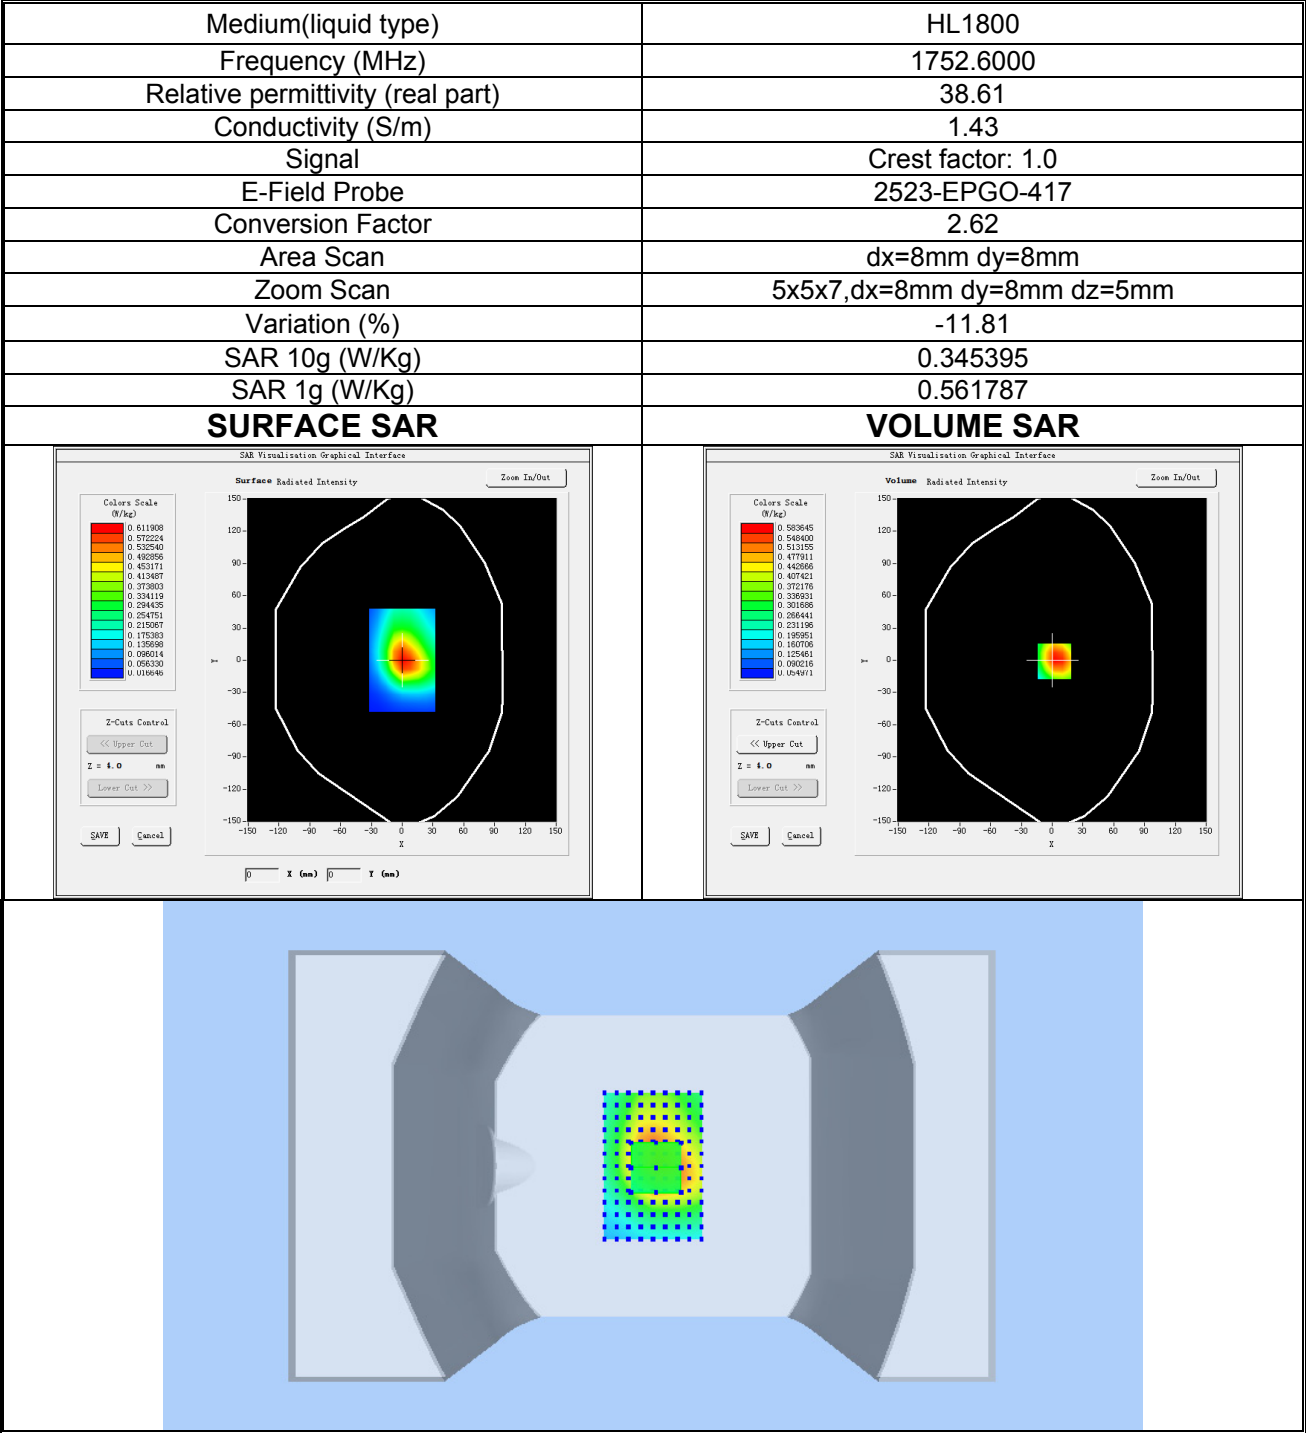


Plot 9: WCDMA BAND V, Middle channel (Right Head Cheek)
Product Description: Smart Phone
Test Date: 2025-07-16

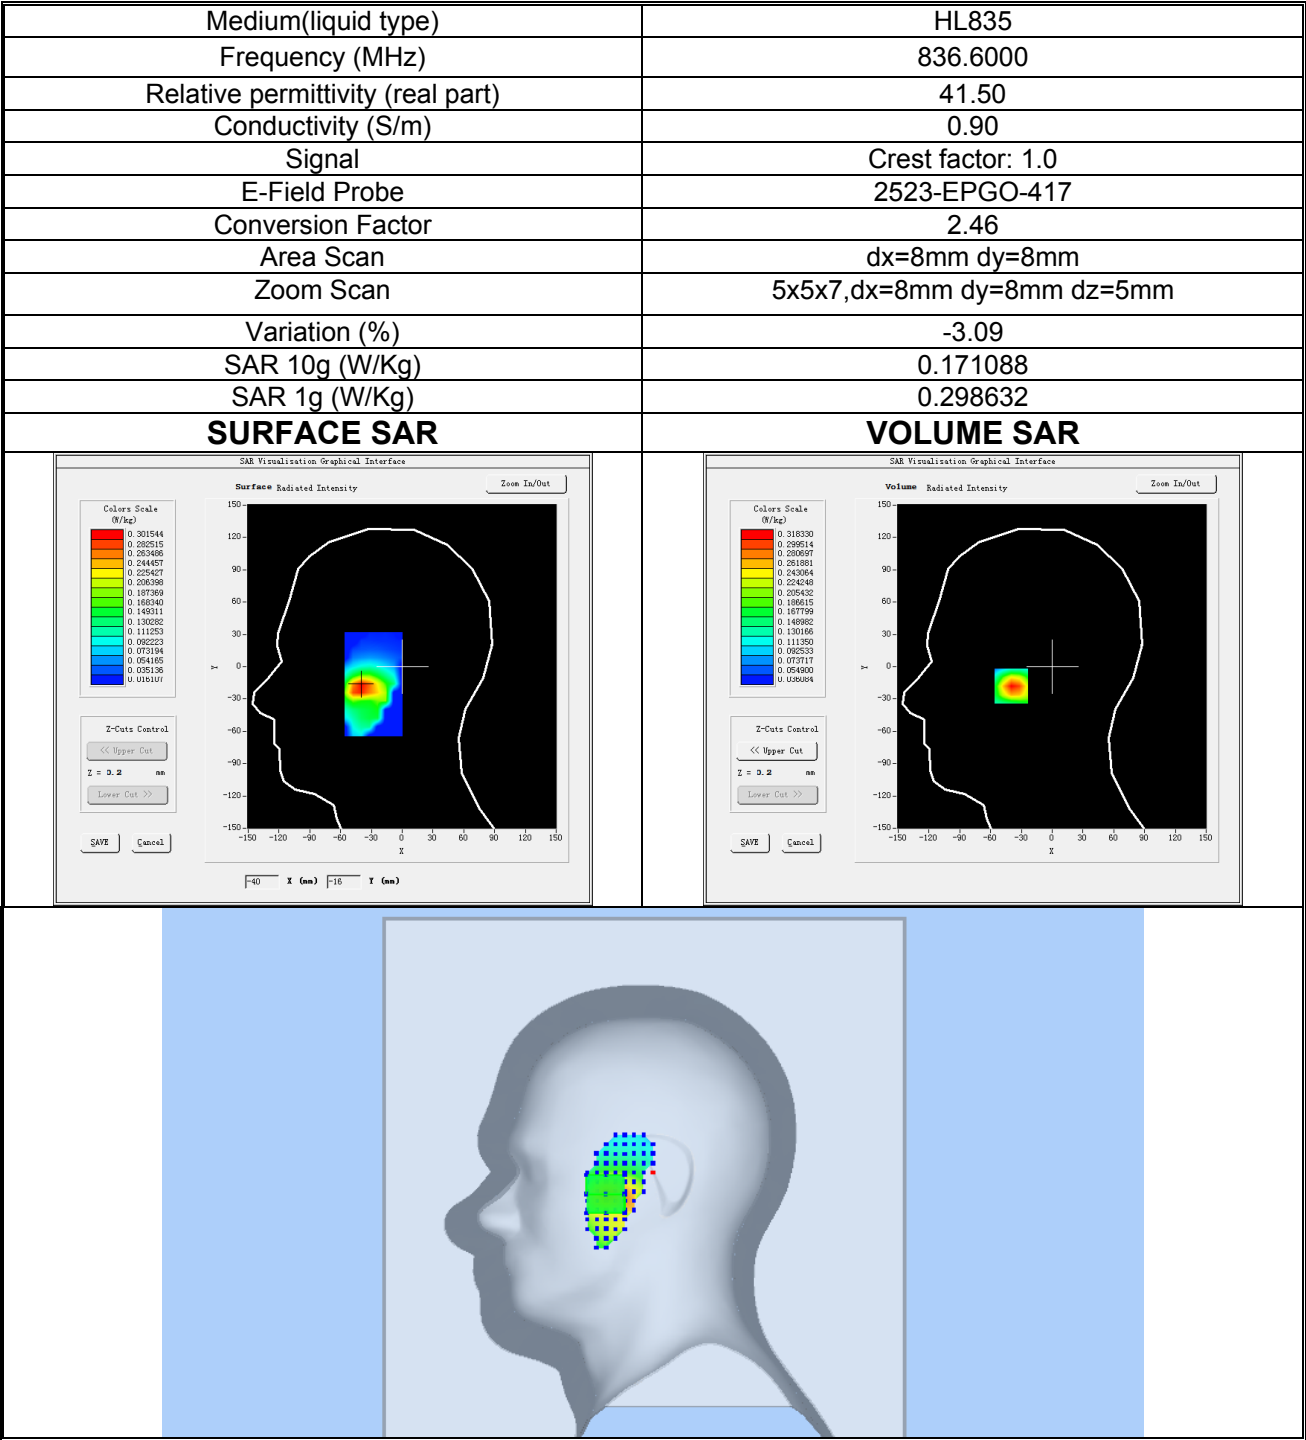

Plot 10: WCDMA BAND V, Middle channel (Body-worn/Hotspot, Back Side)
Product Description: Smart Phone
Test Date: 2025-07-16

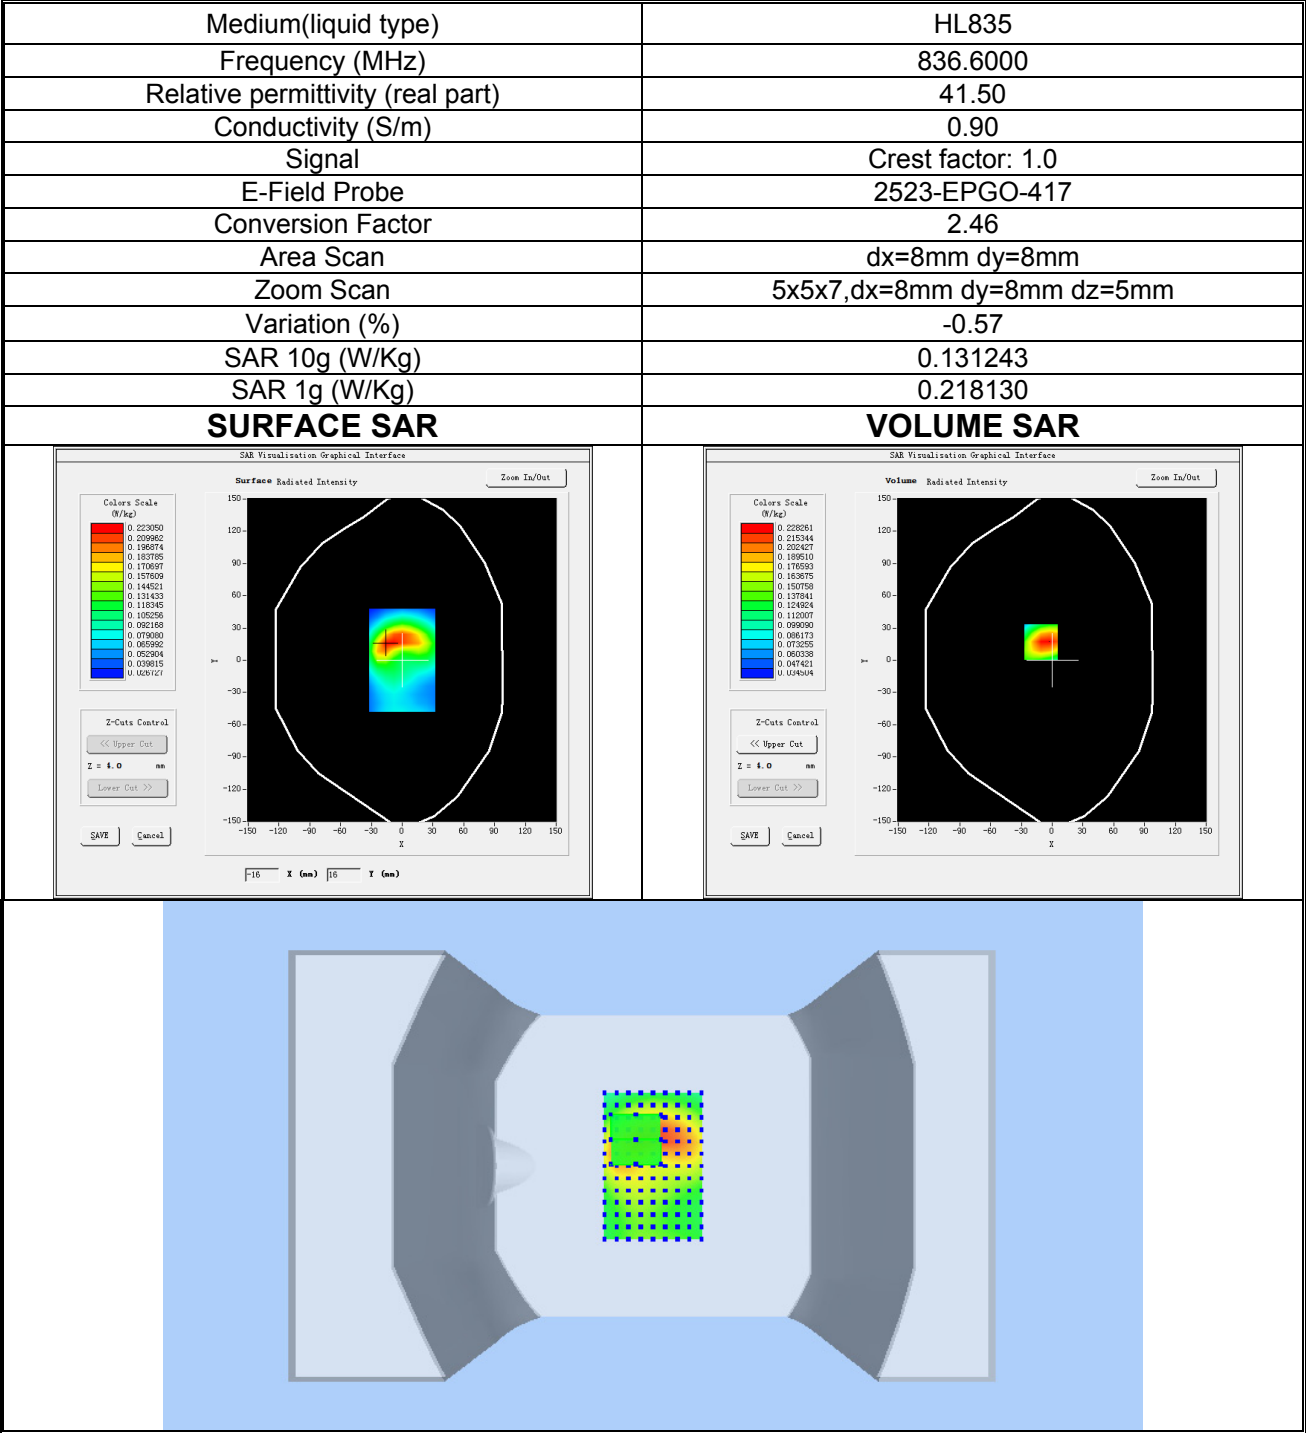


Plot 11:LTE BAND 2, High channel (Left Head Cheek)
Product Description:Smart Phone
Test Date: 2025-07-14

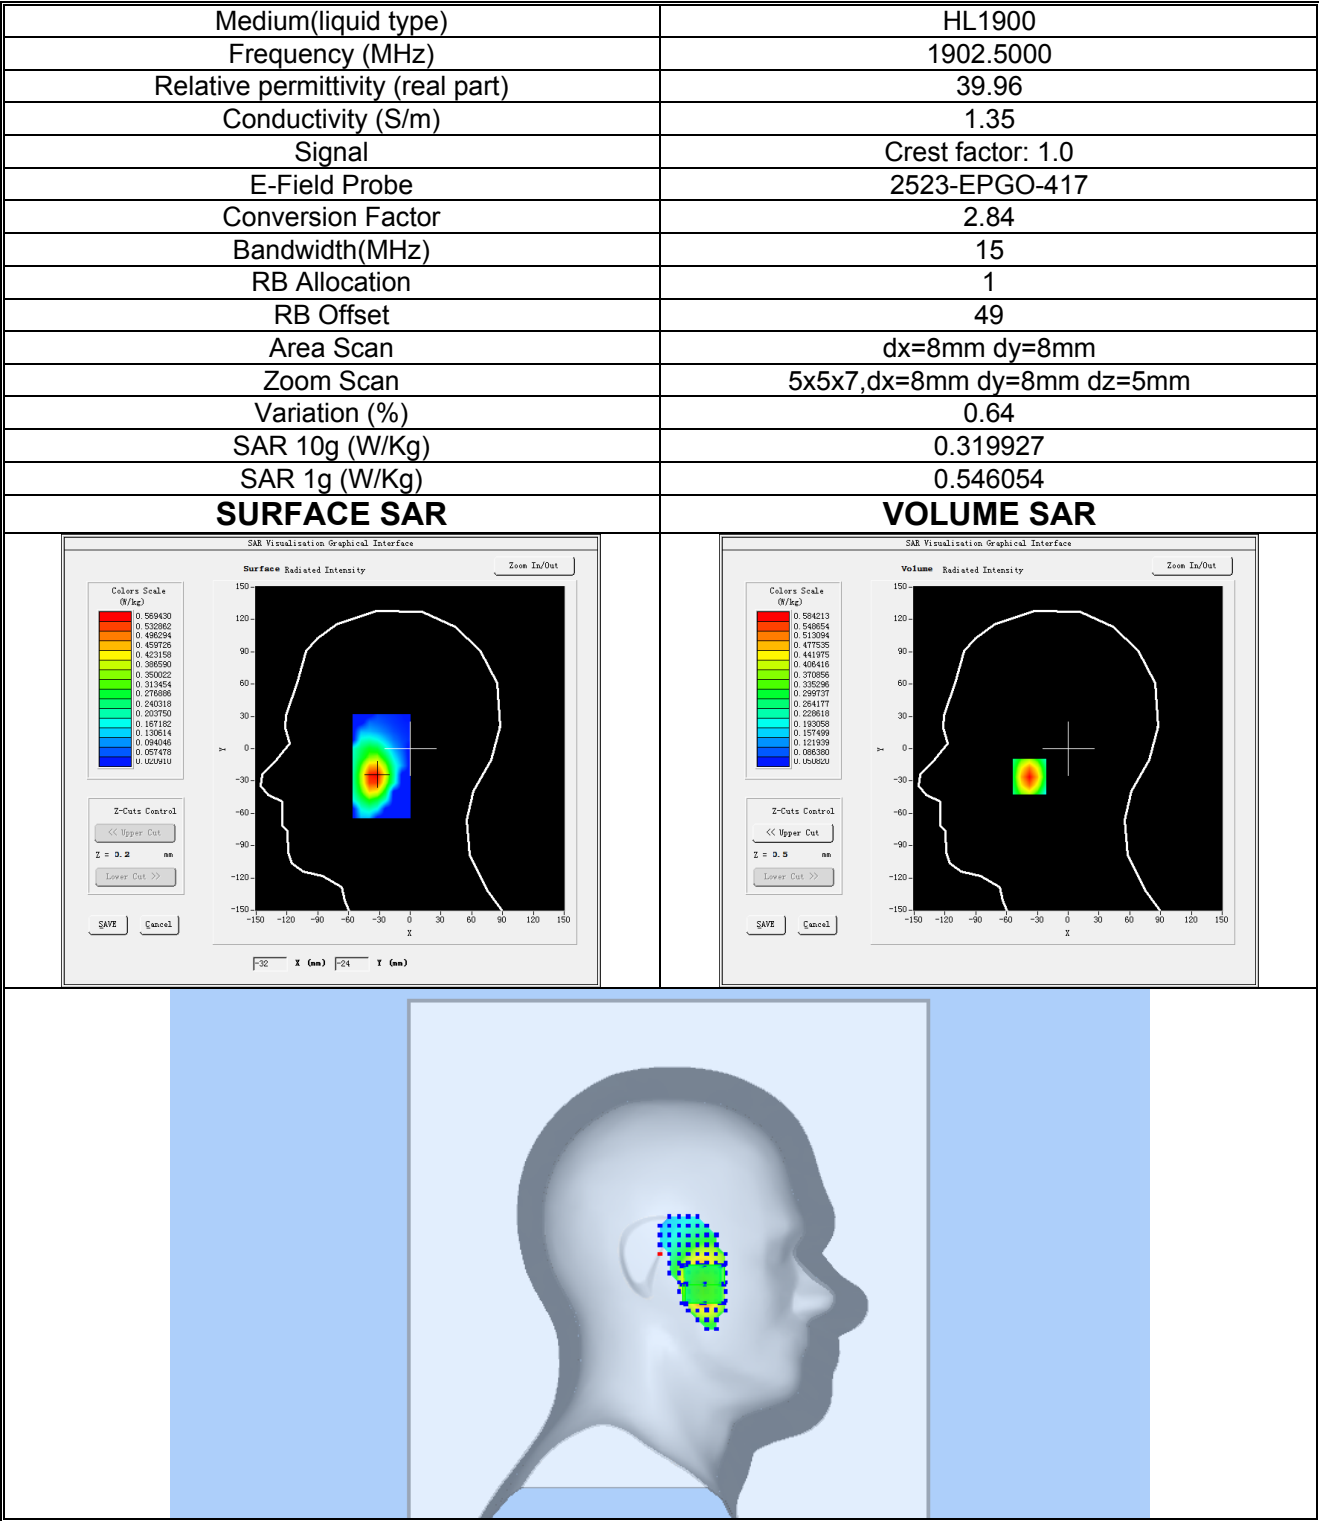


Plot 12:LTE BAND 2, High channel (Body-worn /Hotspot, Back Side)

Product Description:Smart Phone
Test Date: 2025-07-14

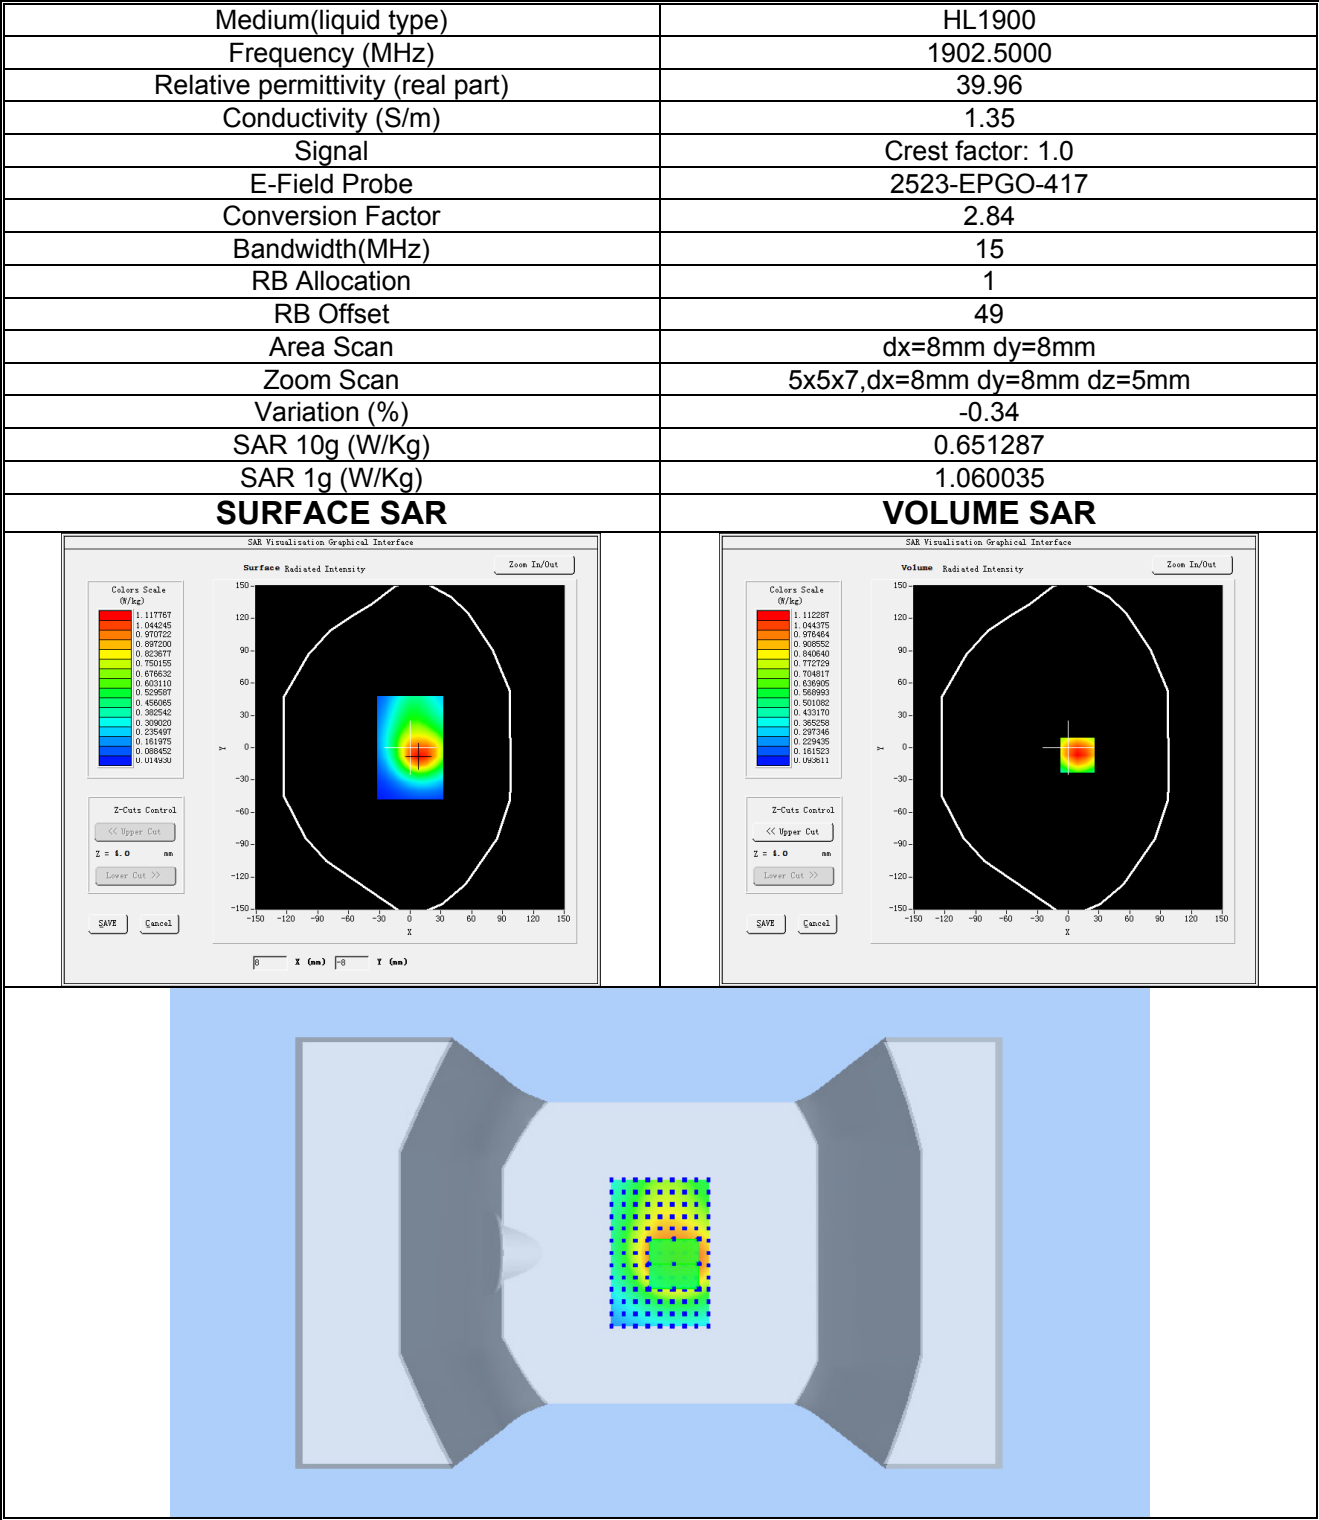


Plot 13:LTE BAND 4, Low channel (Left Head Cheek)


Product Description: Smart Phone
Test Date: 2025-07-12

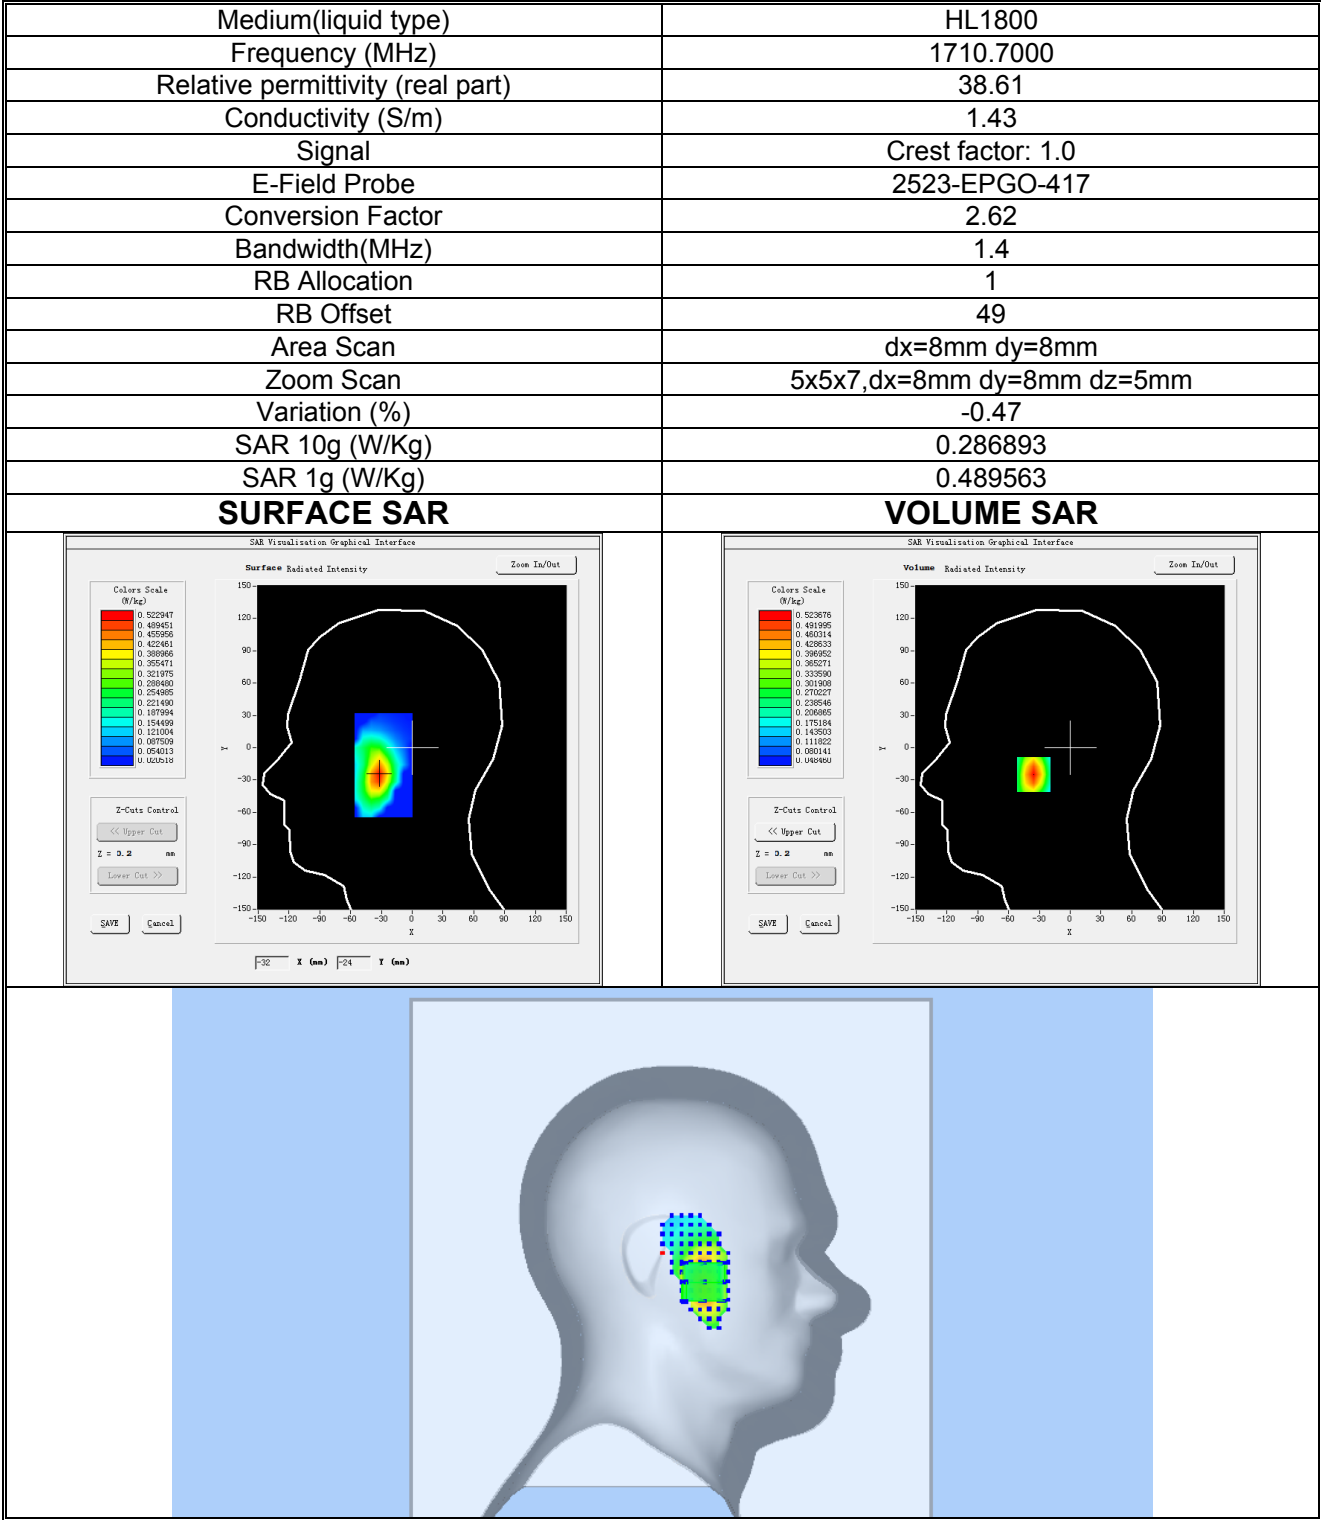


Plot 14: LTE BAND 4, Low channel (Body-worn/ Hotspot, Back Side)
Product Description: Smart Phone
Test Date: 2025-07-12

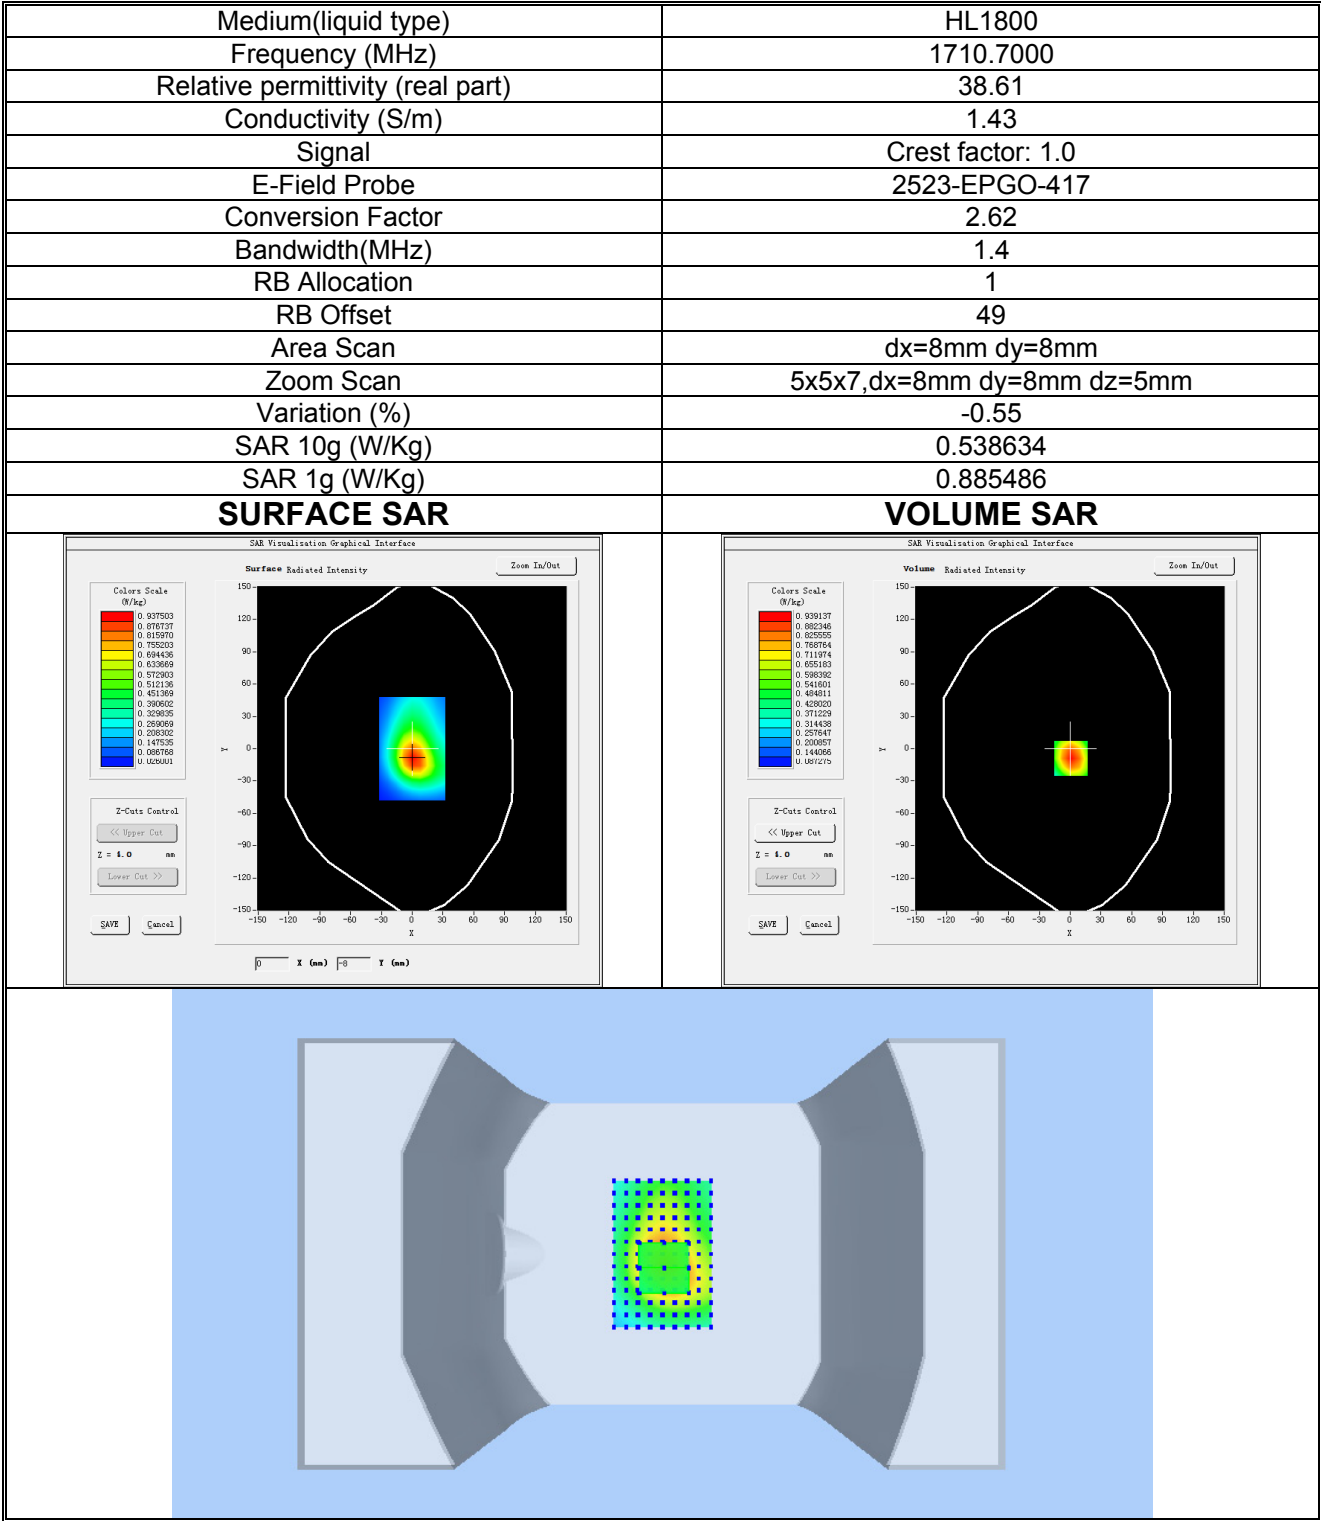


Plot 15:LTE BAND 5, Low channel (Left Head Cheek)
Product Description: Smart Phone
Test Date: 2025-07-16

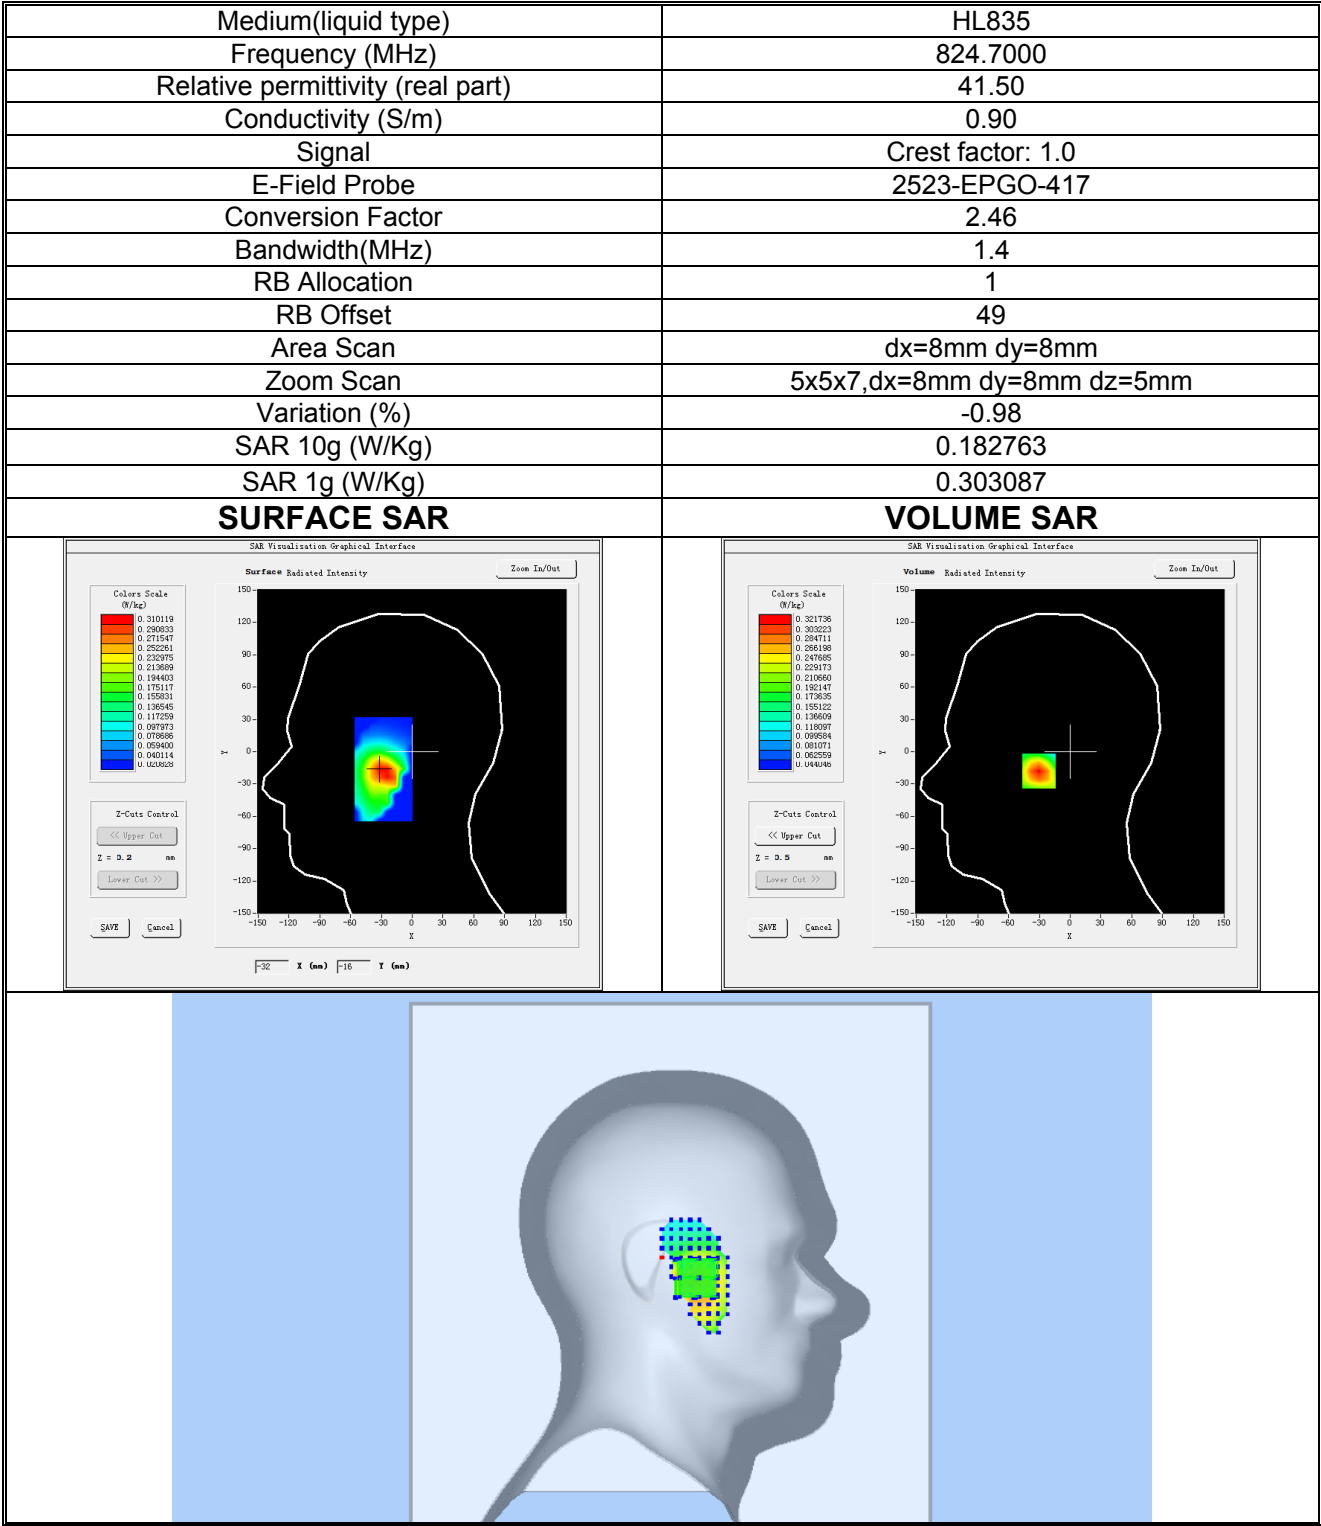


Plot 16: LTE BAND 5, Low channel (Body-worn/ Hotspot, Back Side)
Product Description: Smart Phone
Test Date: 2025-07-16

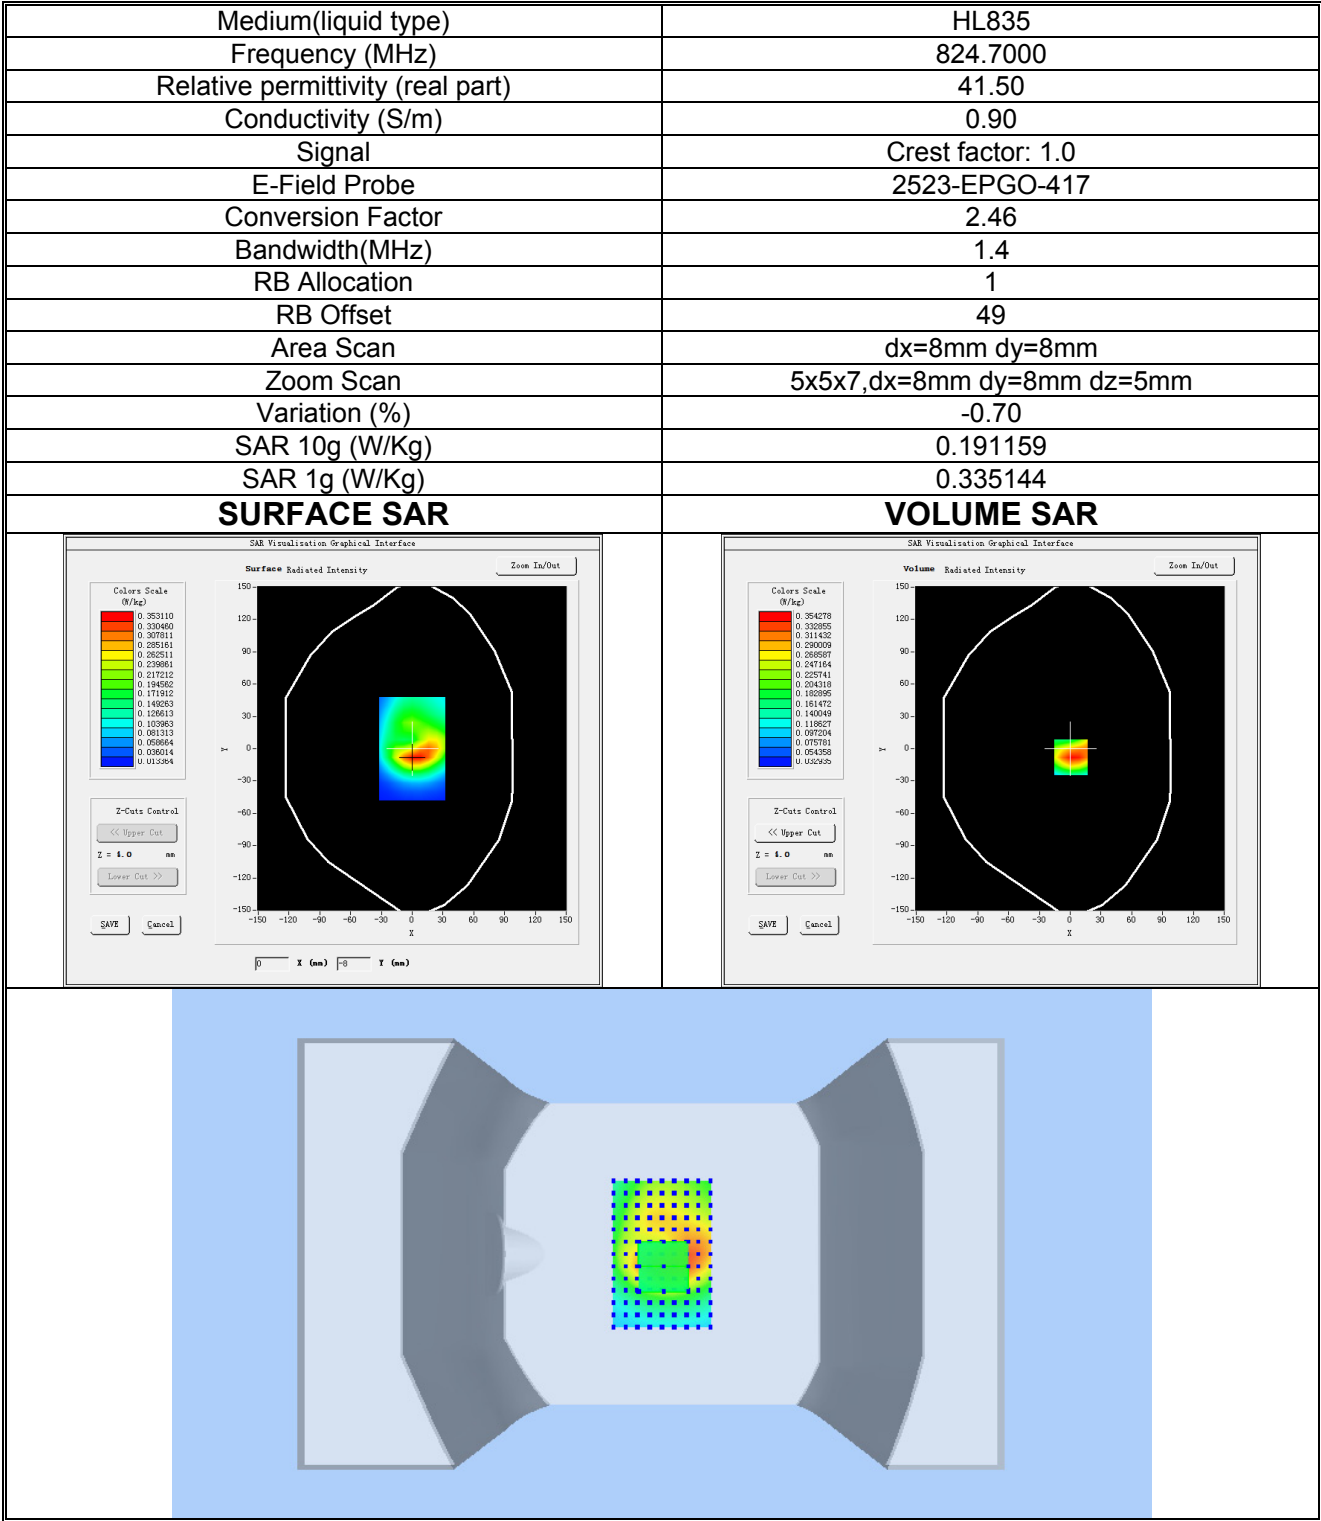


Plot 17:LTE BAND 7, High channel (Right Head Cheek)
Product Description: Smart Phone
Test Date: 2025-07-15

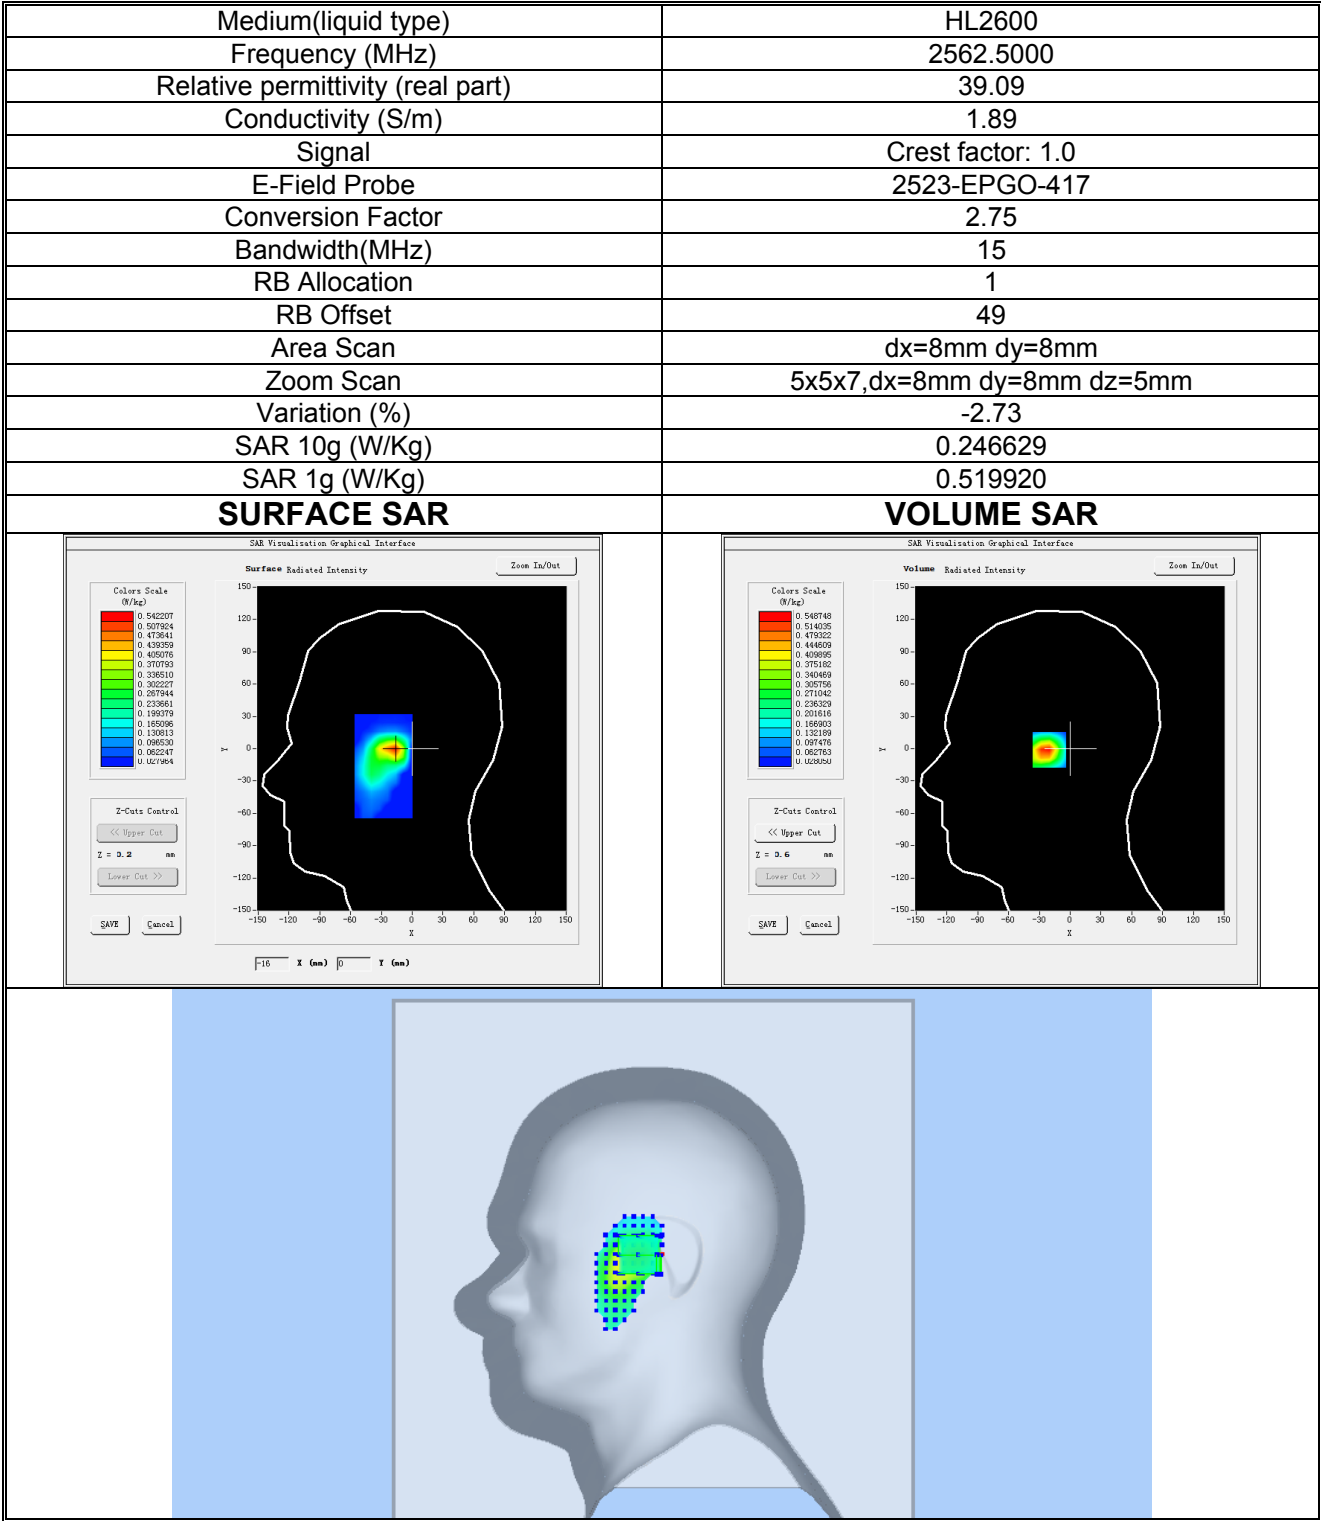


Plot 18: LTE BAND 7, High channel (Body-worn/ Hotspot, Back Side)
Product Description: Smart Phone
Test Date: 2025-07-15

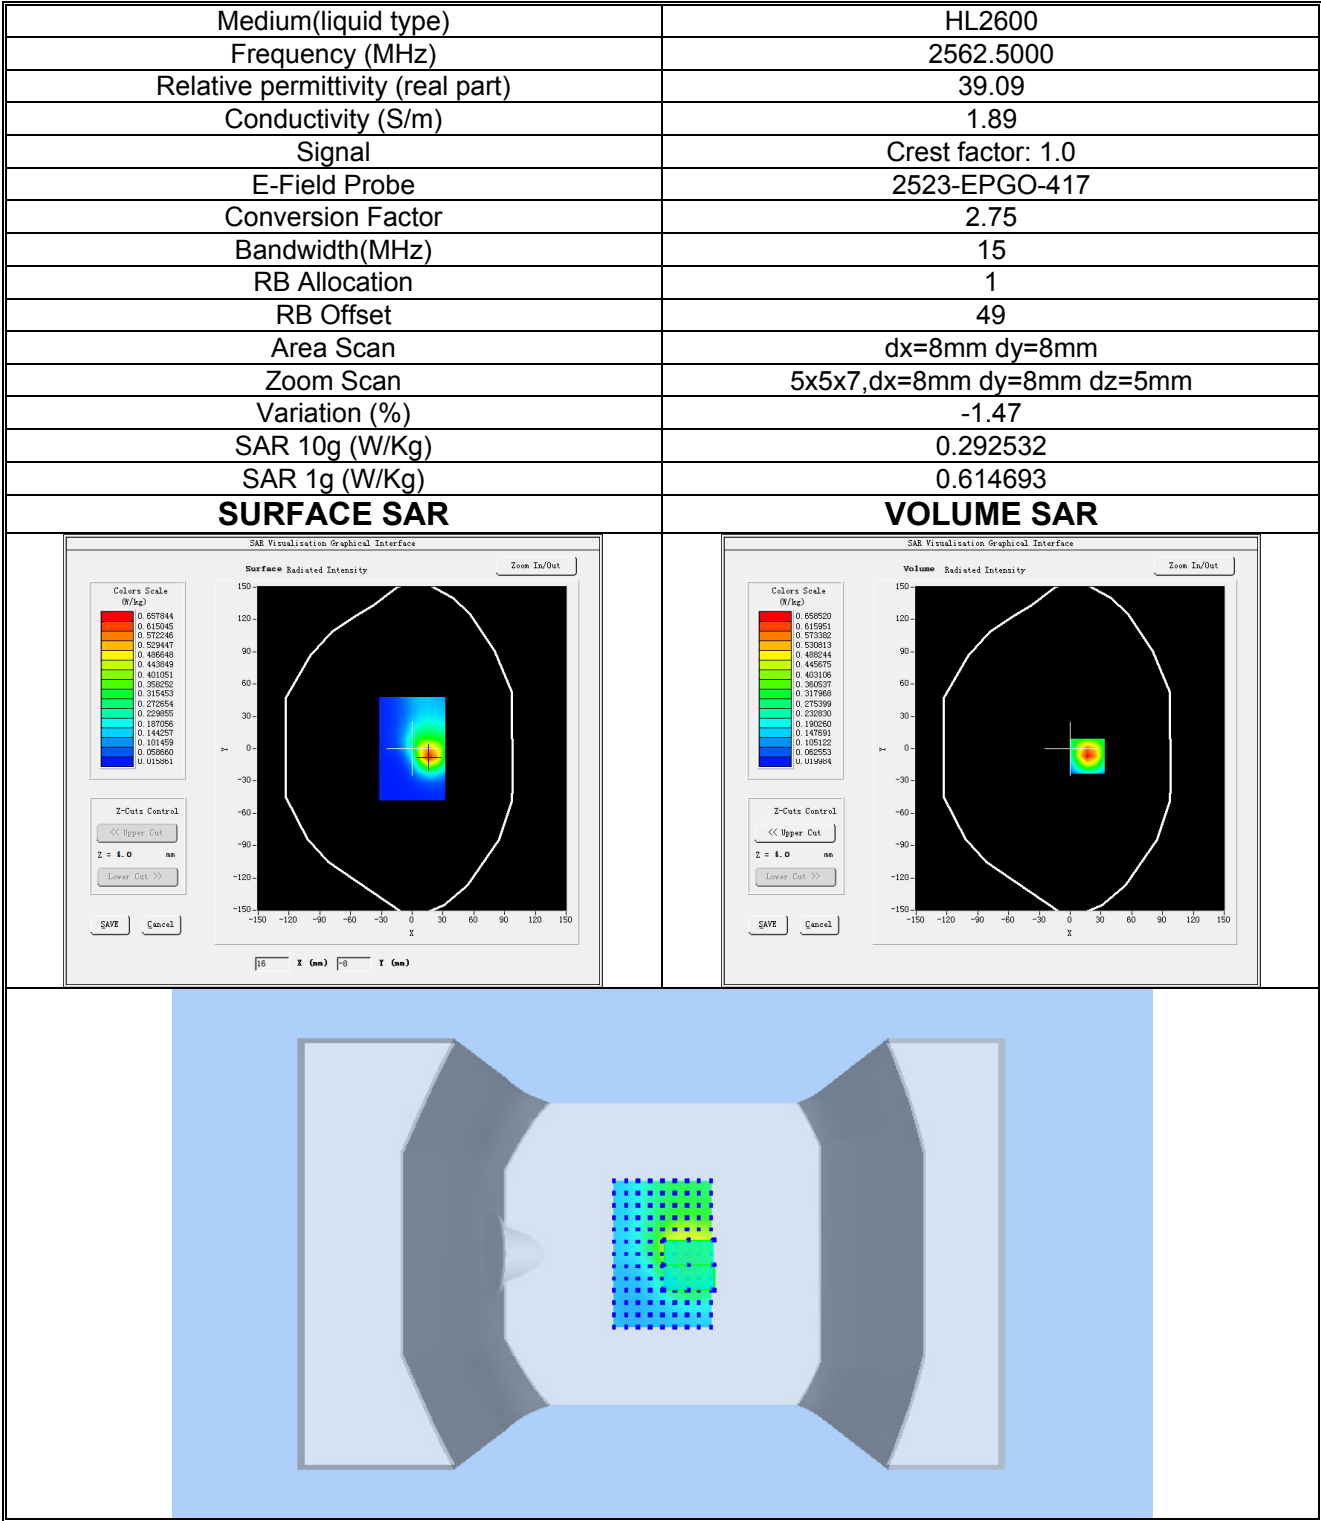

Plot 19:LTE BAND 12, High channel (Right Head Cheek)
Product Description: Smart Phone
Test Date: 2025-07-16

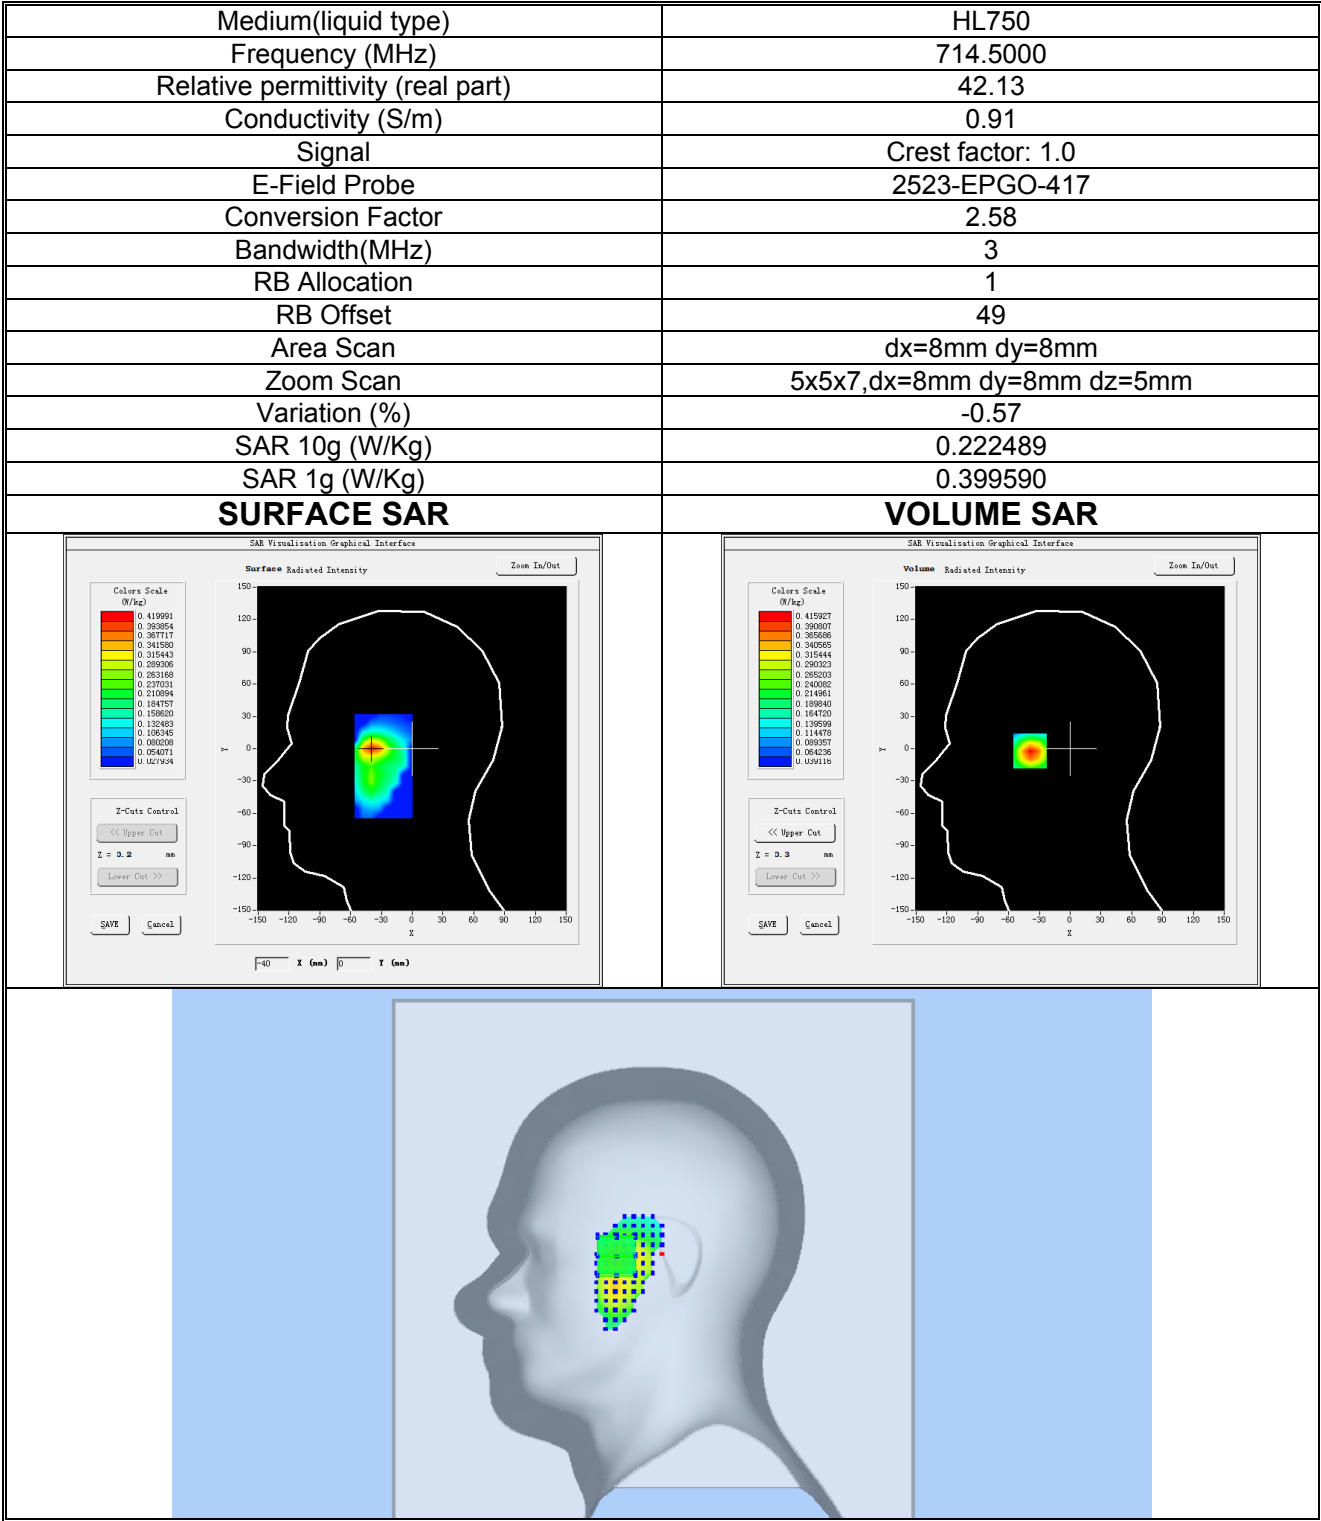

Plot 20: LTE BAND 12, High channel (Body-worn/ Hotspot, Back Side)
Product Description: Smart Phone
Test Date: 2025-07-16

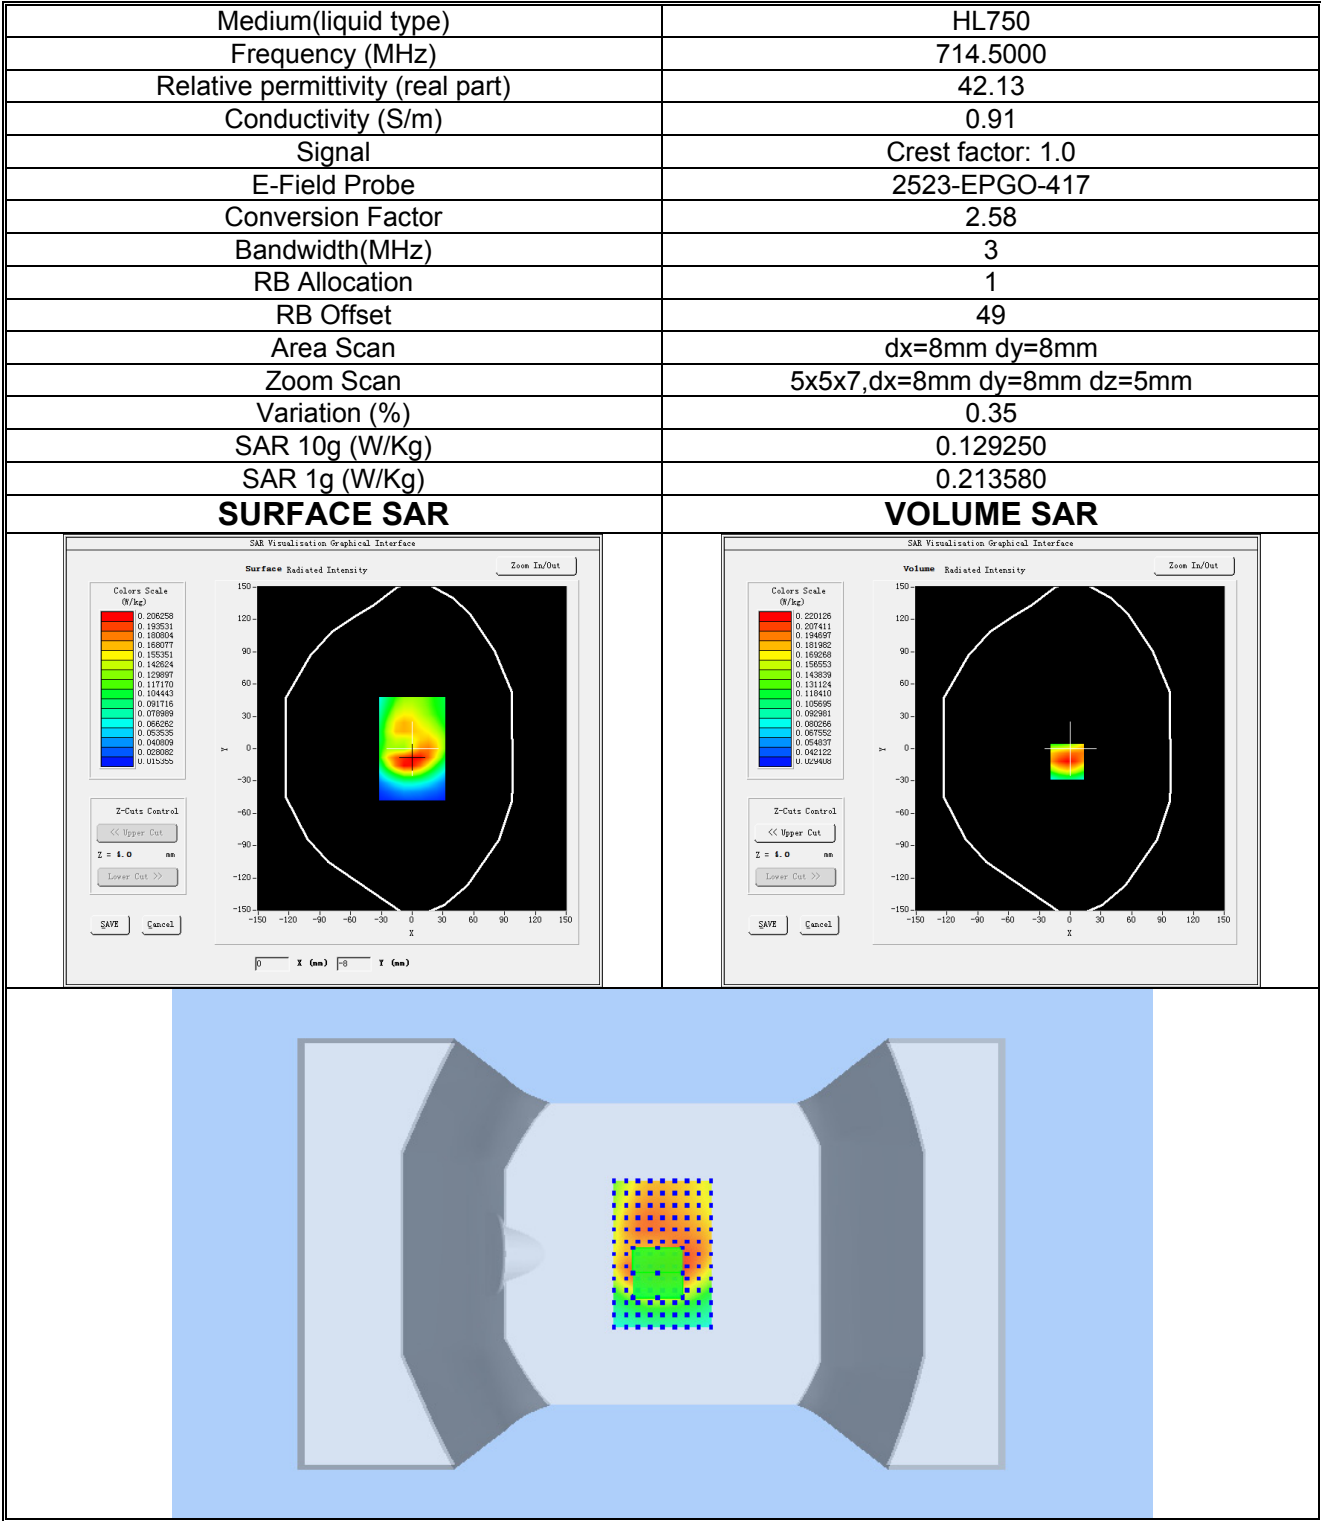

Plot 21:LTE BAND 13, Low channel (Right Head Cheek)
Product Description: Smart Phone
Test Date: 2025-07-16

