



FCC RF Test Report

APPLICANT : Butte L.L.C.
EQUIPMENT : Wireless Device
MODEL NAME : JK29LP
FCC ID : 2AETK-1013
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Oct. 07, 2015 and testing was completed on Dec. 16, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.
No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant	5
1.2 Product Feature of Equipment Under Test.....	5
1.3 Product Specification subjective to this standard.....	5
1.4 Modification of EUT	5
1.5 Testing Location	6
1.6 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Descriptions of Test Mode	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	8
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Peak Output Power Measurement	15
3.3 Power Spectral Density Measurement	16
3.4 Conducted Band Edges and Spurious Emission Measurement	20
3.5 Radiated Band Edges and Spurious Emission Measurement	25
3.6 Antenna Requirements.....	30
4 LIST OF MEASURING EQUIPMENT.....	31
5 UNCERTAINTY OF EVALUATION.....	32

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED SPURIOUS EMISSION

APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS



REVISION HISTORY



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(1)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm/3kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.73 dB at 4804.000 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Required	EUT doesn't have related port
3.6	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Butte L.L.C.

100 M Street, S.E., Suite 600
Washington, District Of Columbia, 20003

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Device
Model Name	JK29LP
FCC ID	2AETK-1013
EUT supports Radios application	WLAN 11b/g/n HT20 Bluetooth v4.1 LE

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	0.19 dBm (0.0010 W)
99% Occupied Bandwidth	1.05MHz
Antenna Type	Fixed Internal Antenna with gain -2.38 dB
Type of Modulation	Bluetooth LE : GFSK

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Location

Sportun Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sportun Site No.	
	TH02-HY	03CH07-HY

Note: The test site complies with ANSI C63.4 2009 requirement.

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
- ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.



2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.1 – LE RF Output Power
		Data Rate / Modulation
		GFSK
		1Mbps
Ch00	2402MHz	0.19 dBm
Ch19	2440MHz	0.15 dBm
Ch39	2480MHz	-0.18 dBm

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Y plane as worst plane) from all possible combinations.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.1 – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps Mode 4: Bluetooth Tx CH00_2402 MHz_1Mbps with Plastic Loop

2.3 Connection Diagram of Test System

<Bluetooth 4.1 – LE Tx Mode>

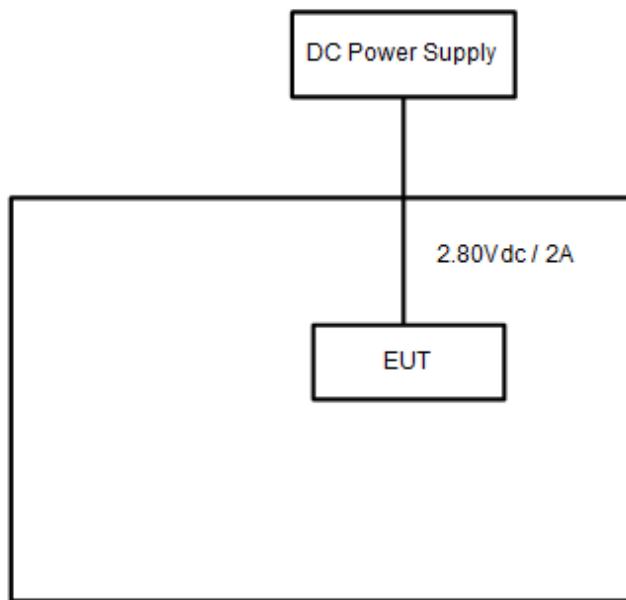

<Bluetooth 4.1 – LE Tx with Plastic Loop Mode>

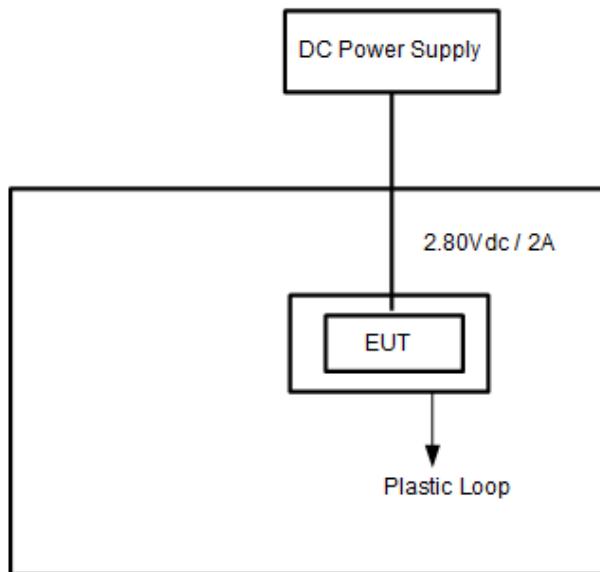

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	Topward	3303DR	N/A	N/A	Unshielded, 1.8 m



2.5 EUT Operation Test Setup

For Bluetooth function, programmed RF utility, "Putty" installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 4.2 + 10 = 14.2 \text{ (dB)}$$



3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup

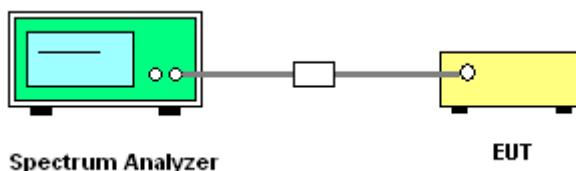

3.1.5 Test Result of 6dB Bandwidth


Test data refer to Appendix A.

6 dB Bandwidth Plot on Channel 00

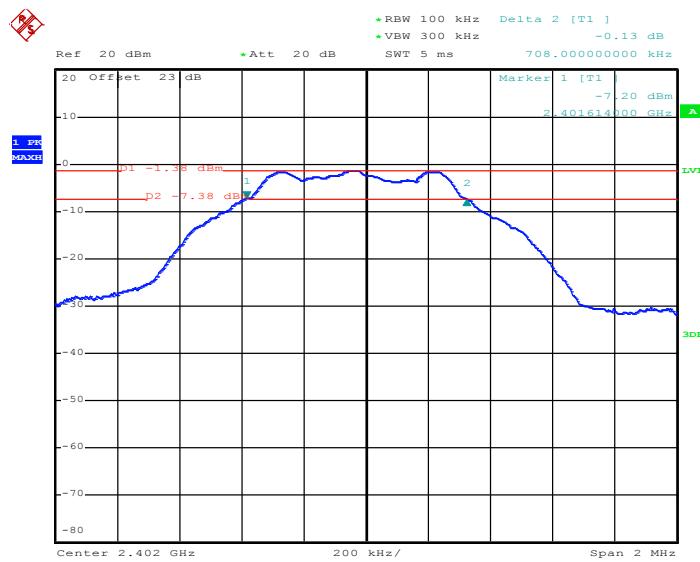

Date: 15.DEC.2015 19:34:47


6 dB Bandwidth Plot on Channel 19

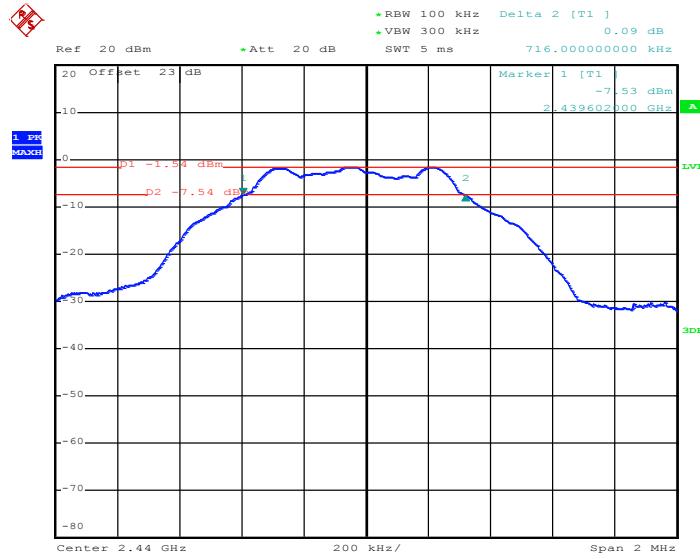

Date: 15.DEC.2015 19:44:44



6 dB Bandwidth Plot on Channel 39

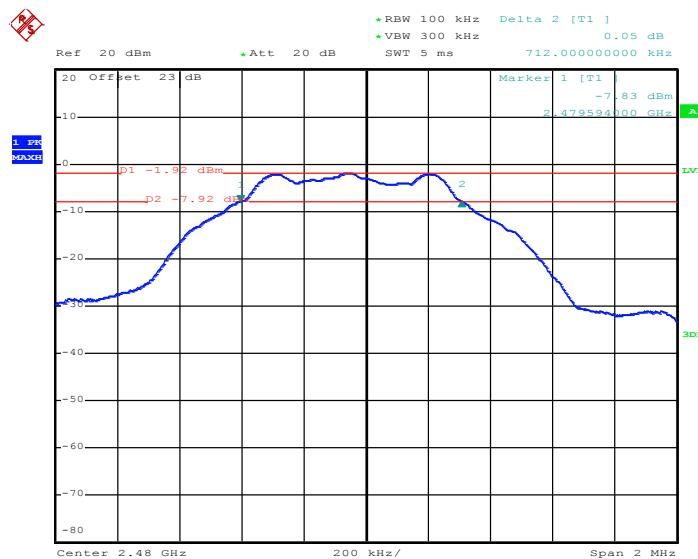


Date: 15.DEC.2015 19:47:44

3.1.6 Test Result of 99% Occupied Bandwidth


Test data refer to Appendix A.

99% Bandwidth Plot on Channel 00

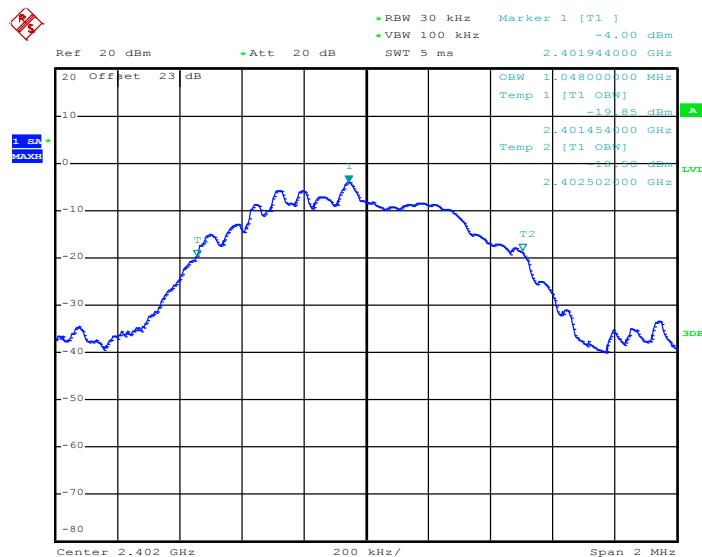


Date: 15.DEC.2015 19:43:03

99% Occupied Bandwidth Plot on Channel 19

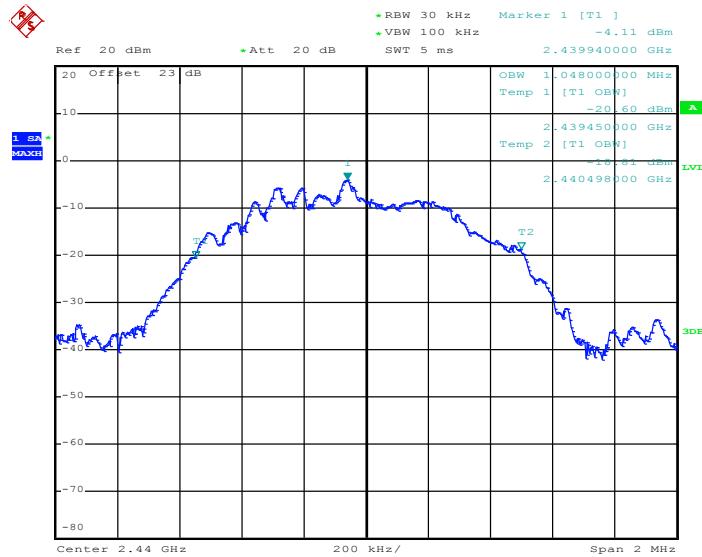

Date: 15.DEC.2015 19:46:26

99% Occupied Bandwidth Plot on Channel 39

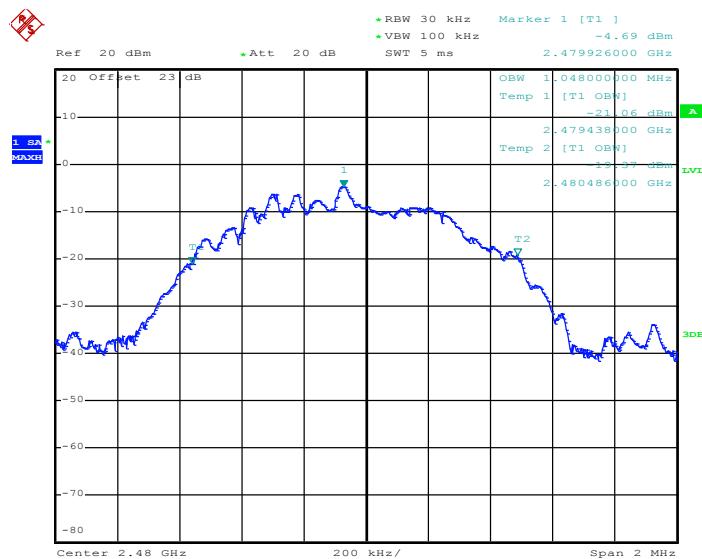

Date: 15.DEC.2015 19:52:40

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r03 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

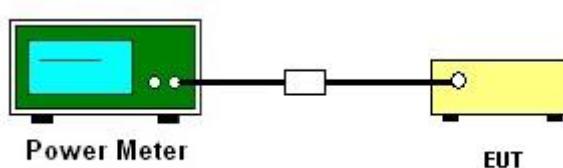

3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

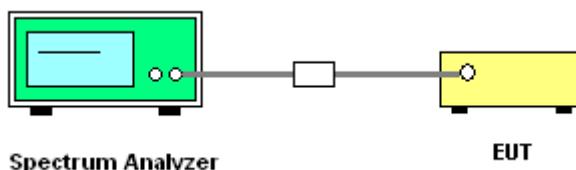


3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.


3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 00

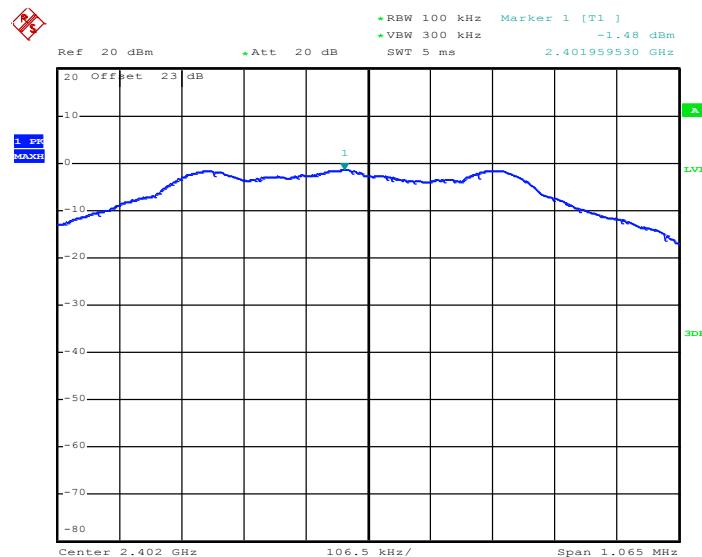


Date: 15.DEC.2015 19:35:57

PSD 100kHz Plot on Channel 19

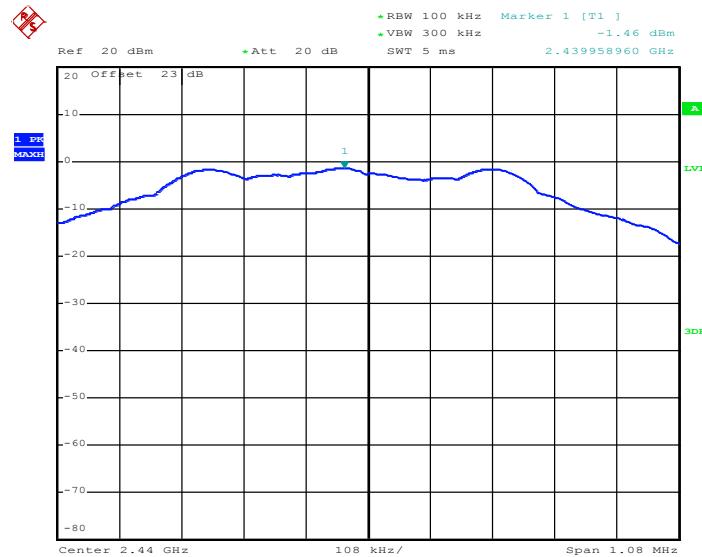

Date: 15.DEC.2015 19:45:55


PSD 100kHz Plot on Channel 39

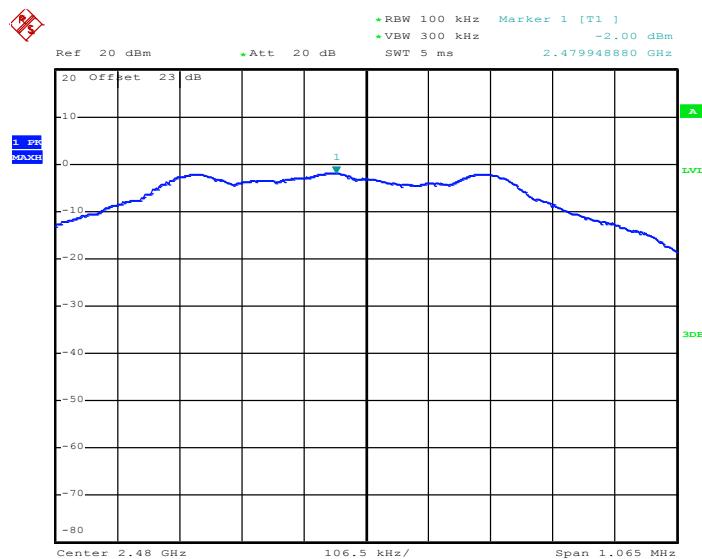

Date: 15.DEC.2015 19:48:08

3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 00

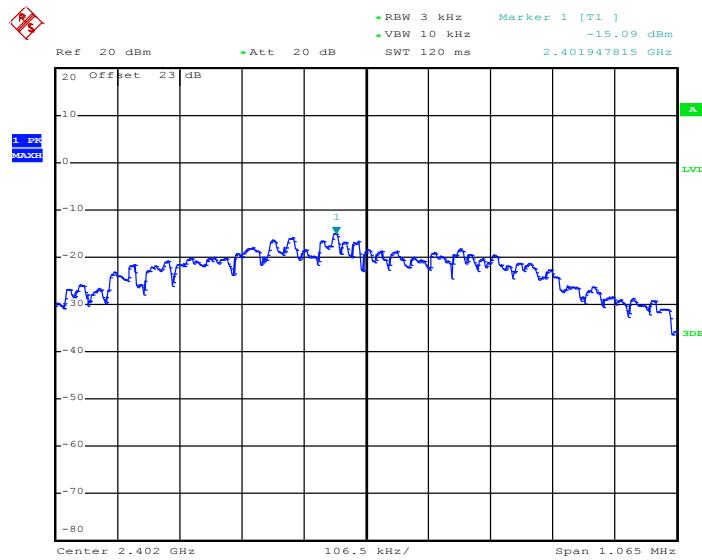

Date: 15.DEC.2015 19:35:44




PSD 3kHz Plot on Channel 19

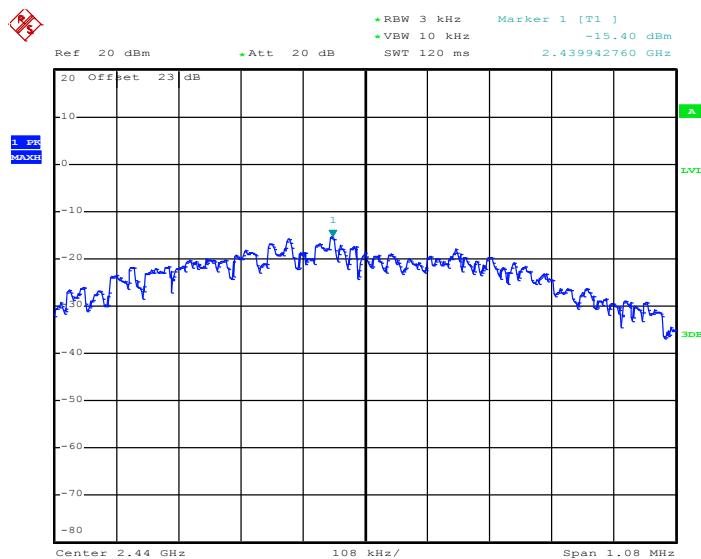

Date: 15.DEC.2015 19:45:03

PSD 3kHz Plot on Channel 39

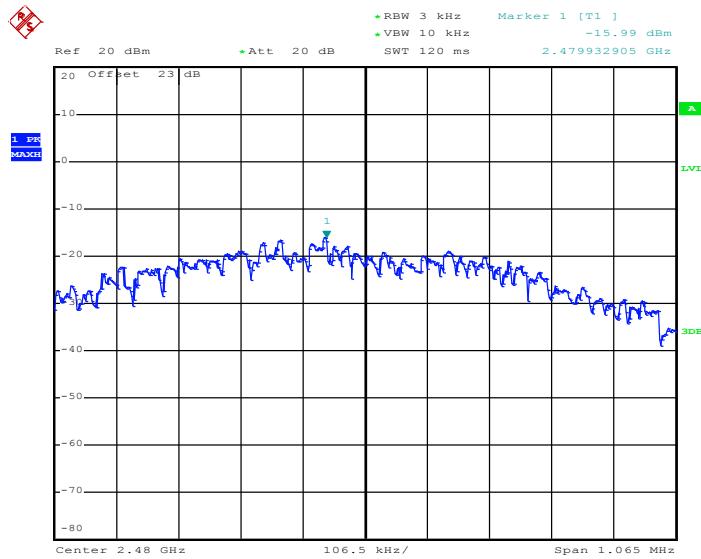

Date: 15.DEC.2015 19:47:56

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedure


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

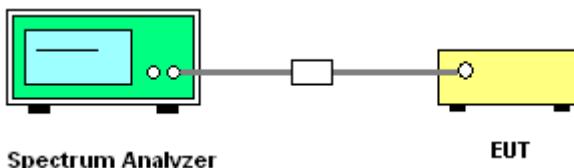


3.4.5 Test Result of Conducted Band Edges Plots

Low Band Edge Plot on Channel 00

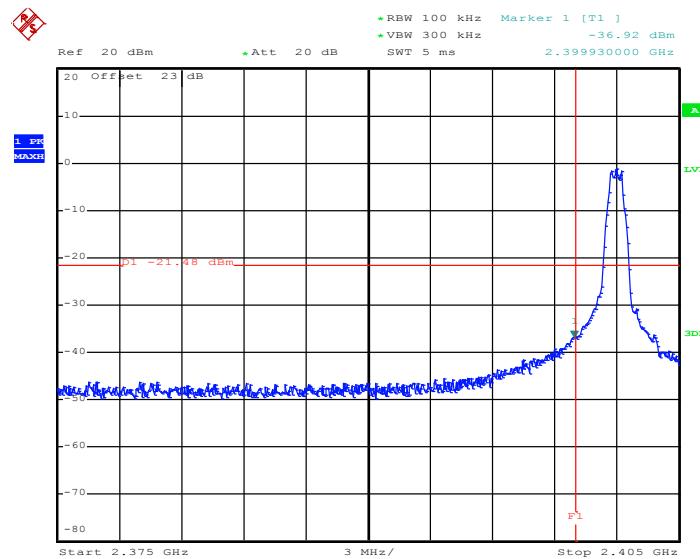

Date: 15.DEC.2015 19:39:29


High Band Edge Plot on Channel 39

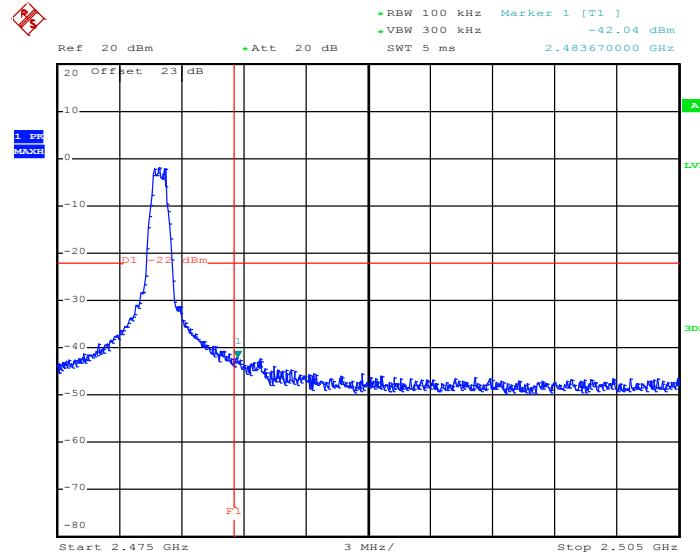

Date: 15.DEC.2015 19:49:06


3.4.6 Test Result of Conducted Spurious Emission Plots

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

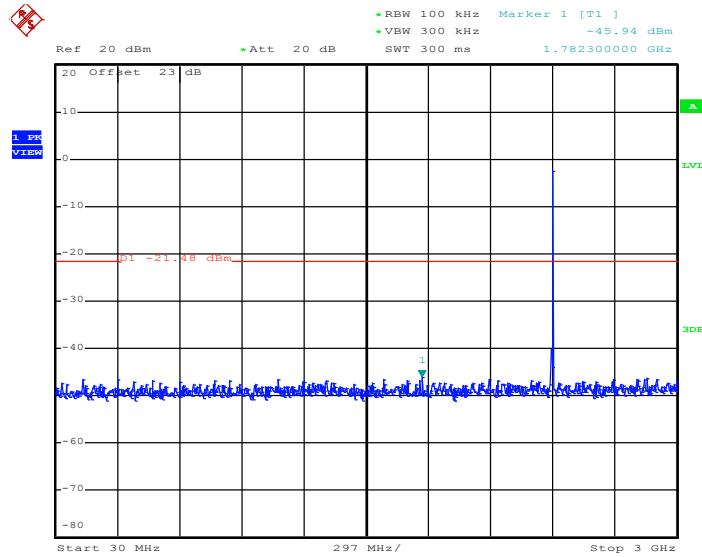

Date: 15.DEC.2015 19:41:52

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

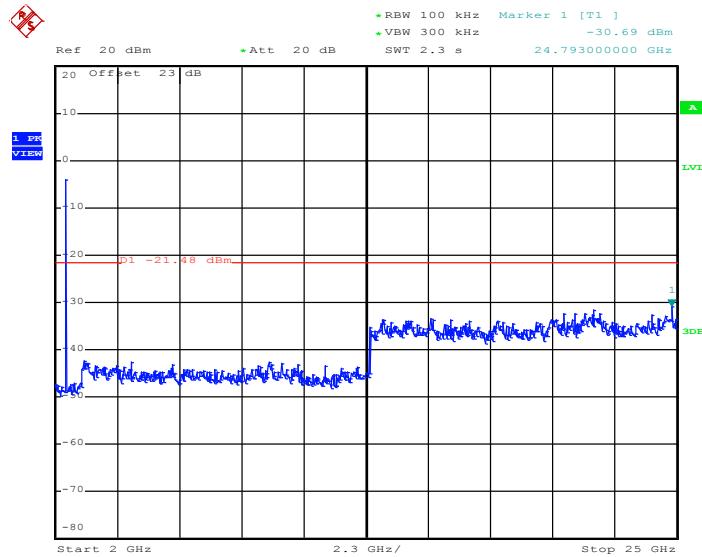


Date: 15.DEC.2015 19:42:01



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 19

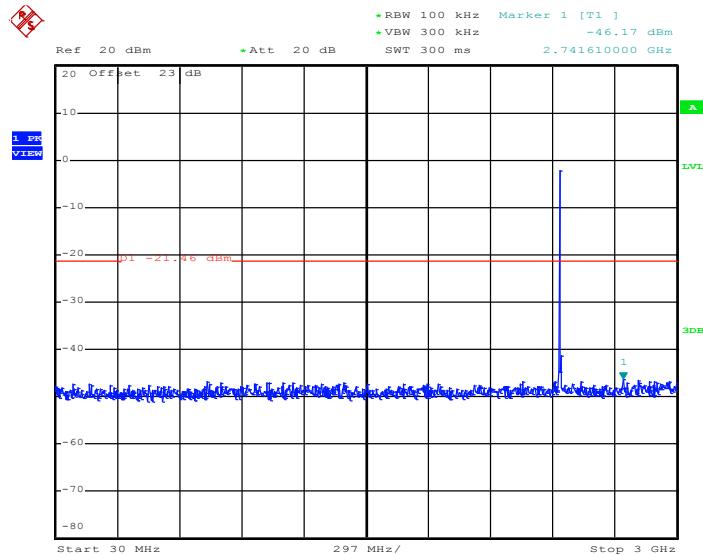

Date: 15.DEC.2015 19:46:06

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 19

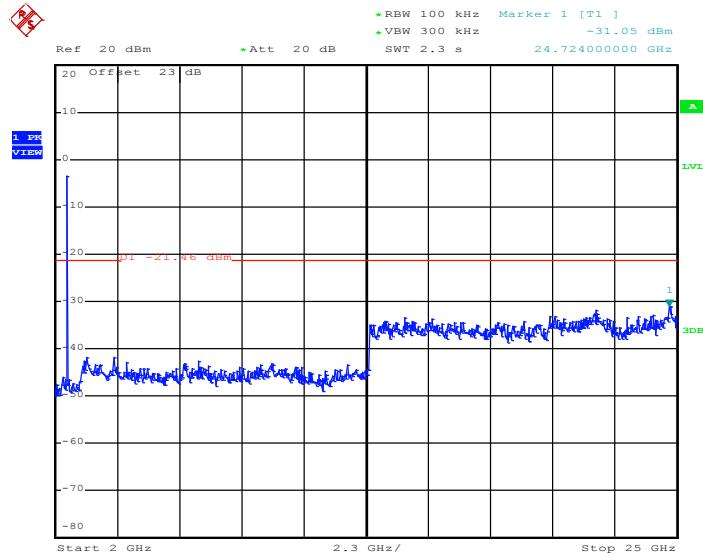


Date: 15.DEC.2015 19:46:14



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 39

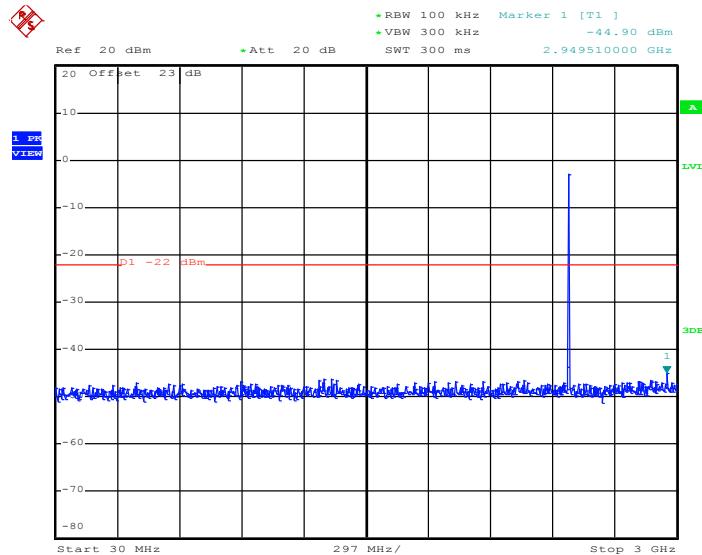

Date: 15.DEC.2015 19:49:44

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

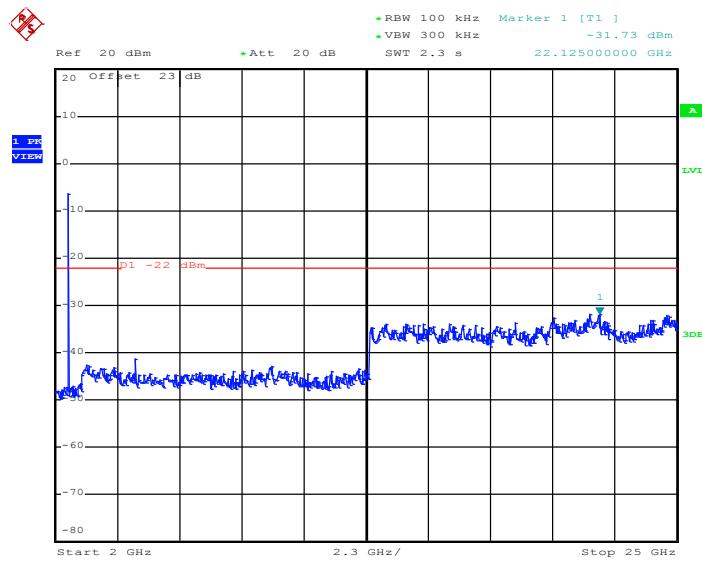

Date: 15.DEC.2015 19:49:52



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(μs)	1/T(kHz)	VBW Setting
Bluetooth 4.1 - LE	60.51	380.00	2.63	3kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

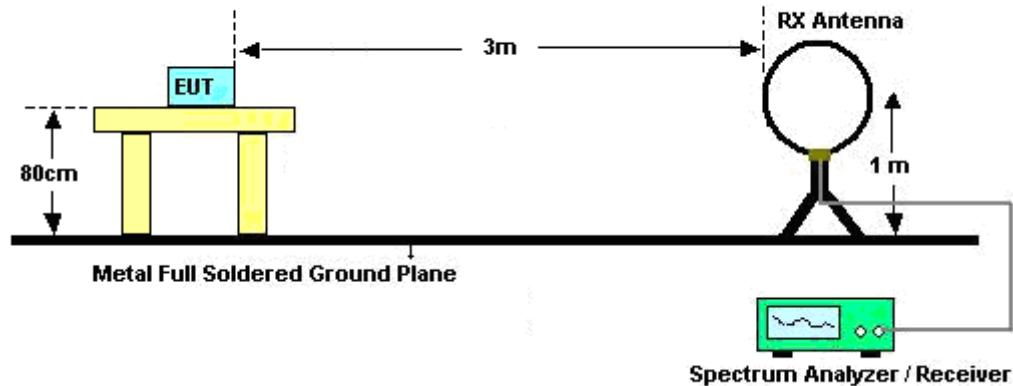

For radiated emissions from 30MHz to 1GHz

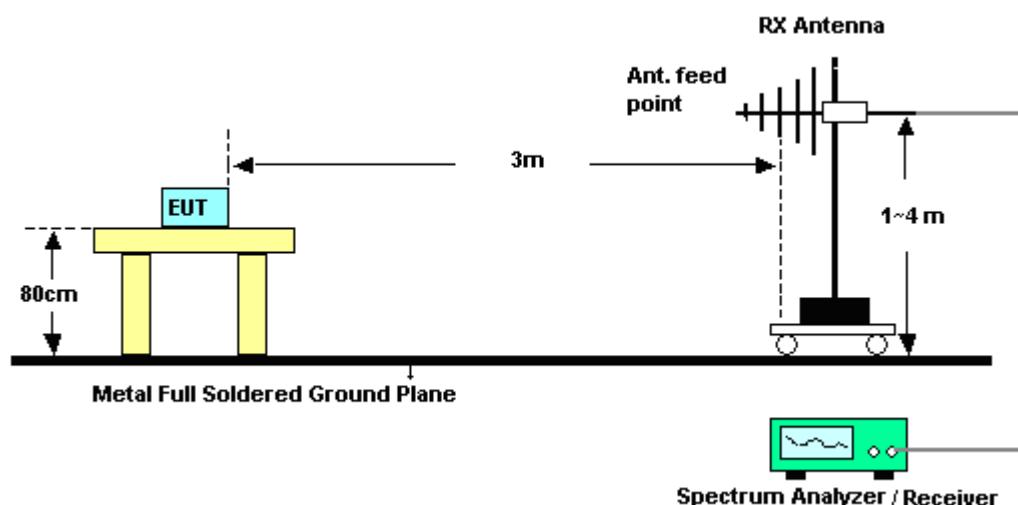

For radiated emissions above 1GHz

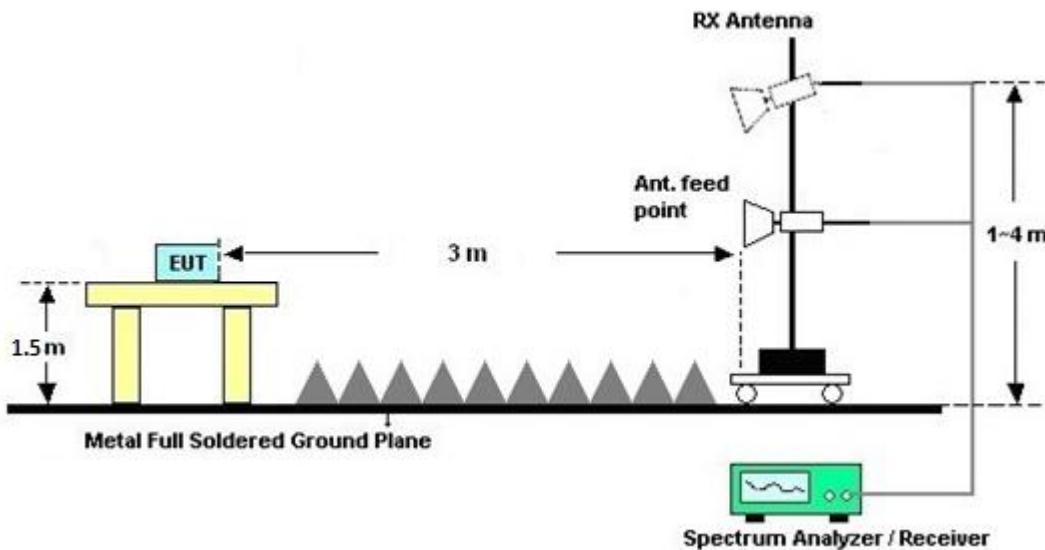


3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.5.7 Duty Cycle

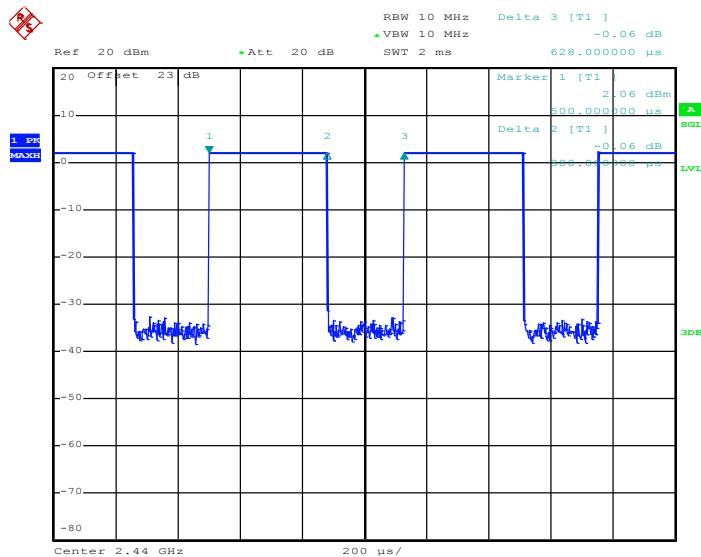

Date: 11.DEC.2015 11:35:24

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB412923 44	300MHz~40GHz	Jan. 14, 2015	Dec. 11, 2015 ~ Dec. 15, 2015	Jan. 13, 2016	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US404415 48	300MHz~40GHz	Jan. 14, 2015	Dec. 11, 2015 ~ Dec. 15, 2015	Jan. 13, 2016	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 18, 2015	Dec. 11, 2015 ~ Dec. 15, 2015	Jun. 17, 2016	Conducted (TH02-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890094	1V~20V 0.5A~5A	Oct. 12, 2015	Dec. 11, 2015 ~ Dec. 15, 2015	Oct. 11, 2016	Conducted (TH02-HY)
Bilog Antenna	Teseq GmbH	CBL6112D	35379	30MHz~2GHz	Oct. 15, 2015	Dec. 14, 2015 ~ Dec. 16, 2015	Oct. 14, 2016	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 21, 2015	Dec. 14, 2015 ~ Dec. 16, 2015	Aug. 20, 2016	Radiation (03CH07-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	584	18GHz- 40GHz	Nov. 02, 2015	Dec. 14, 2015 ~ Dec. 16, 2015	Nov. 01, 2016	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Dec. 14, 2015 ~ Dec. 16, 2015	Sep. 01, 2016	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz ~ 18GHz	Apr. 20, 2015	Dec. 14, 2015 ~ Dec. 16, 2015	Apr. 19, 2016	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1000MHz	Mar. 12, 2015	Dec. 14, 2015 ~ Dec. 16, 2015	Mar. 11, 2016	Radiation (03CH07-HY)
Preamplifier	MITEQ	JS44-180040 00-33-8P	1840917	18GHz ~ 40GHz	Jun. 02, 2015	Dec. 14, 2015 ~ Dec. 16, 2015	Jun. 01, 2016	Radiation (03CH07-HY)
Signal Analyzer	Rohde & Schwarz	FSV 30	101749	10Hz~30GHz	Mar. 10, 2015	Dec. 14, 2015 ~ Dec. 16, 2015	Mar. 09, 2016	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Dec. 14, 2015 ~ Dec. 16, 2015	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 degree	N/A	Dec. 14, 2015 ~ Dec. 16, 2015	N/A	Radiation (03CH07-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	4.80
---	------

Appendix A. Conducted Test Results

Test Engineer:	Derek Hsu / Tommy Lee			Temperature:	21~25		°C
Test Date:	2015/12/11~2015/12/15			Relative Humidity:	51~54		%

<u>TEST RESULTS DATA</u> <u>6dB and 99% Occupied Bandwidth</u>								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.05	0.71	0.50	Pass
BLE	1Mbps	1	19	2440	1.05	0.72	0.50	Pass
BLE	1Mbps	1	39	2480	1.05	0.71	0.50	Pass

<u>TEST RESULTS DATA</u> <u>Peak Power Table</u>										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	0.19	30.00	-2.38	-2.19	36.00	Pass
BLE	1Mbps	1	19	2440	0.15	30.00	-2.38	-2.23	36.00	Pass
BLE	1Mbps	1	39	2480	-0.18	30.00	-2.38	-2.56	36.00	Pass

<u>TEST RESULTS DATA</u> <u>Average Power Table</u> <u>(Reporting Only)</u>							
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	
BLE	1Mbps	1	0	2402	2.18	-0.72	
BLE	1Mbps	1	19	2440	2.18	-0.76	
BLE	1Mbps	1	39	2480	2.18	-1.12	

<u>TEST RESULTS DATA</u> <u>Peak Power Density</u>									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	-1.48	-15.09	-2.38	8.00	Pass
BLE	1Mbps	1	19	2440	-1.46	-15.40	-2.38	8.00	Pass
BLE	1Mbps	1	39	2480	-2.00	-15.99	-2.38	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. Radiated Spurious Emission

Test Engineer :	Jesse Wang and James Chiu		Temperature :	21~23°C					
			Relative Humidity :	60~63%					

15C 2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2385.69	59.27	-14.73	74	53.7	5.57	7.75	34.36	114	18	P	H
		2352.48	46.45	-7.55	54	41.04	5.41	7.68	34.4	114	18	A	H
	*	2402	94.64	-	-	89.03	5.61	7.75	34.32	114	18	P	H
	*	2402	93.93	-	-	88.32	5.61	7.75	34.32	114	18	A	H
													H
													H
		2367.6	58.62	-15.38	74	53.17	5.45	7.68	34.36	112	32	P	V
		2345.28	46.44	-7.56	54	41.05	5.39	7.68	34.4	112	32	A	V
	*	2402	91.39	-	-	85.78	5.61	7.75	34.32	112	32	P	V
	*	2402	90.67	-	-	85.06	5.61	7.75	34.32	112	32	A	V
BLE CH 19 2440MHz													V
		2310.18	59.63	-14.37	74	54.44	5.19	7.6	34.48	112	19	P	H
		2377.95	46.6	-7.4	54	41.12	5.48	7.68	34.36	112	19	A	H
	*	2440	94.3	-	-	88.5	5.8	7.83	34.27	112	19	P	H
	*	2440	93.58	-	-	87.78	5.8	7.83	34.27	112	19	A	H
		2497.16	59.9	-14.1	74	53.84	6.06	7.91	34.15	112	19	P	H
		2491.68	47.16	-6.84	54	41.14	6.02	7.91	34.19	112	19	A	H
		2347.62	58.98	-15.02	74	53.59	5.39	7.68	34.4	100	36	P	V
		2357.07	46.55	-7.45	54	41.14	5.41	7.68	34.4	100	36	A	V
	*	2440	92.81	-	-	87.01	5.8	7.83	34.27	100	36	P	V
	*	2440	92.09	-	-	86.29	5.8	7.83	34.27	100	36	A	V
		2499.16	59.58	-14.42	74	53.52	6.06	7.91	34.15	100	36	P	V
		2490.2	47.07	-6.93	54	41.05	6.02	7.91	34.19	100	36	A	V



BLE CH 39 2480MHz	*	2480	94.75	-	-	88.75	6	7.91	34.19	105	13	P	H	
	*	2480	93.88	-	-	87.88	6	7.91	34.19	105	13	A	H	
		2483.52	68.61	-5.39	74	62.61	6	7.91	34.19	105	13	P	H	
		2494.24	47.29	-6.71	54	41.23	6.06	7.91	34.15	105	13	A	H	
													H	
													H	
	*	2480	91.96	-	-	85.96	6	7.91	34.19	103	95	P	V	
	*	2480	91.19	-	-	85.19	6	7.91	34.19	103	95	A	V	
		2484.28	66.61	-7.39	74	60.61	6	7.91	34.19	103	95	P	V	
		2488.2	47.18	-6.82	54	41.16	6.02	7.91	34.19	103	95	A	V	
													V	
													V	
BLE CH 00 2402MHz + Plastic Loop		2388.3	59.41	-14.59	74	53.84	5.57	7.75	34.36	104	158	P	H	
		2357.61	46.44	-7.56	54	41.03	5.41	7.68	34.4	104	158	A	H	
	*	2402	90.92	-	-	85.31	5.61	7.75	34.32	104	158	P	H	
	*	2402	90.2	-	-	84.59	5.61	7.75	34.32	104	158	A	H	
													H	
													H	
		2375.52	58.5	-15.5	74	53.02	5.48	7.68	34.36	147	57	P	V	
		2372.01	46.42	-7.58	54	40.94	5.48	7.68	34.36	147	57	A	V	
	*	2402	88.82	-	-	83.21	5.61	7.75	34.32	147	57	P	V	
	*	2402	88.05	-	-	82.44	5.61	7.75	34.32	147	57	A	V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



15C 2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		4804	53.6	-20.4	74	67.91	-14.31	11.11	59.67	228	308	P	H
		4804	48.8	-5.2	54	63.11	-14.31	11.11	59.67	228	308	A	H
													H
		4804	53.93	-20.07	74	68.24	-14.31	11.11	59.67	343	78	P	V
		4804	49.93	-4.07	54	64.24	-14.31	11.11	59.67	343	78	A	V
													V
													V
BLE CH 19 2440MHz		4880	54.08	-19.92	74	68.14	-14.06	11.21	59.57	100	130	P	H
		4880	48.55	-5.45	54	62.61	-14.06	11.21	59.57	100	130	A	H
		7320	42.8	-31.2	74	50.61	-7.81	15.08	58.49	100	0	P	H
													H
		4880	53.33	-20.67	74	67.39	-14.06	11.21	59.57	356	55	P	V
		4880	47.92	-6.08	54	61.98	-14.06	11.21	59.57	356	55	A	V
		7320	43.54	-30.46	74	51.35	-7.81	15.08	58.49	100	0	P	V
													V
BLE CH 39 2480MHz		4960	54.36	-19.64	74	68.12	-13.76	11.32	59.45	100	128	P	H
		4960	48.98	-5.02	54	62.74	-13.76	11.32	59.45	100	128	A	H
		7440	42.4	-31.6	74	50.31	-7.91	15.13	58.64	100	0	P	H
													H
		4960	54.18	-19.82	74	67.94	-13.76	11.32	59.45	364	54	P	V
		4960	48.65	-5.35	54	62.41	-13.76	11.32	59.45	364	54	A	V
		7440	42.27	-31.73	74	50.18	-7.91	15.13	58.64	100	0	P	V
													V



BLE CH 00 2402MHz + Plastic Loop		4804	54.88	-19.12	74	69.19	-14.31	11.11	59.67	100	127	P	H
		4804	51.27	-2.73	54	65.58	-14.31	11.11	59.67	100	127	A	H
													H
													H
		4804	54.74	-19.26	74	69.05	-14.31	11.11	59.67	342	61	P	V
		4804	51.23	-2.77	54	65.54	-14.31	11.11	59.67	342	61	A	V
													V
	Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											



15C Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30	24.6	-15.4	40	34.43	-9.83	1.77	31.5	-	-	P	H
		120.45	33.19	-10.31	43.5	49.21	-16.02	2.38	31.1	-	-	P	H
		231.42	36.27	-9.73	46	52.81	-16.54	2.96	31	100	0	P	H
		325.2	35.2	-10.8	46	48.32	-13.12	3.28	31	-	-	P	H
		438.6	29.85	-16.15	46	39.87	-10.02	3.63	30.71	-	-	P	H
		929.3	29.42	-16.58	46	32.8	-3.38	4.8	30.36	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dB μ V/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)

For Peak Limit @ 2390MHz:

1. Level(dB μ V/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dB μ V) – 35.86 (dB)

= 55.45 (dB μ V/m)

2. Over Limit(dB)

= Level(dB μ V/m) – Limit Line(dB μ V/m)

= 55.45(dB μ V/m) – 74(dB μ V/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dB μ V/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dB μ V) – 35.86 (dB)

= 43.54 (dB μ V/m)

2. Over Limit(dB)

= Level(dB μ V/m) – Limit Line(dB μ V/m)

= 43.54(dB μ V/m) – 54(dB μ V/m)

= -10.46(dB)





Both peak and average measured complies with the limit line, so test result is “PASS”.




Appendix C. Radiated Spurious Emission





2.4GHz 2400~2483.5MHz


BLE (Band Edge @ 3m)

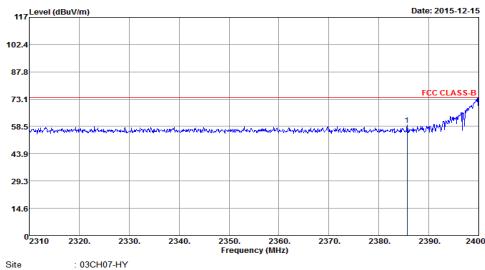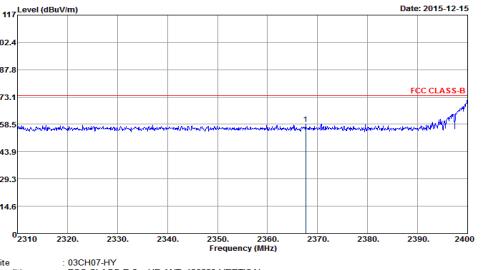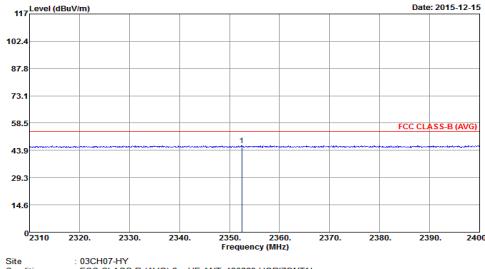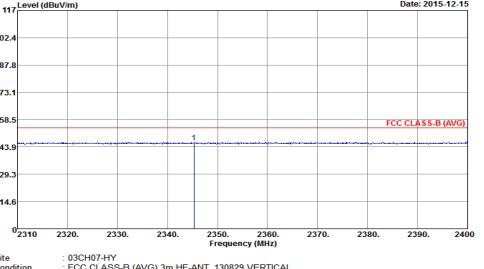
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
2	Horizontal	Vertical
Peak	 <p>Site Condition : 03CH07-HY : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Site Condition : 03CH07-HY : FCC CLASS-B 3m HF-ANT_130829 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>
Avg.	 <p>Site Condition : 03CH07-HY : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Site Condition : 03CH07-HY : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

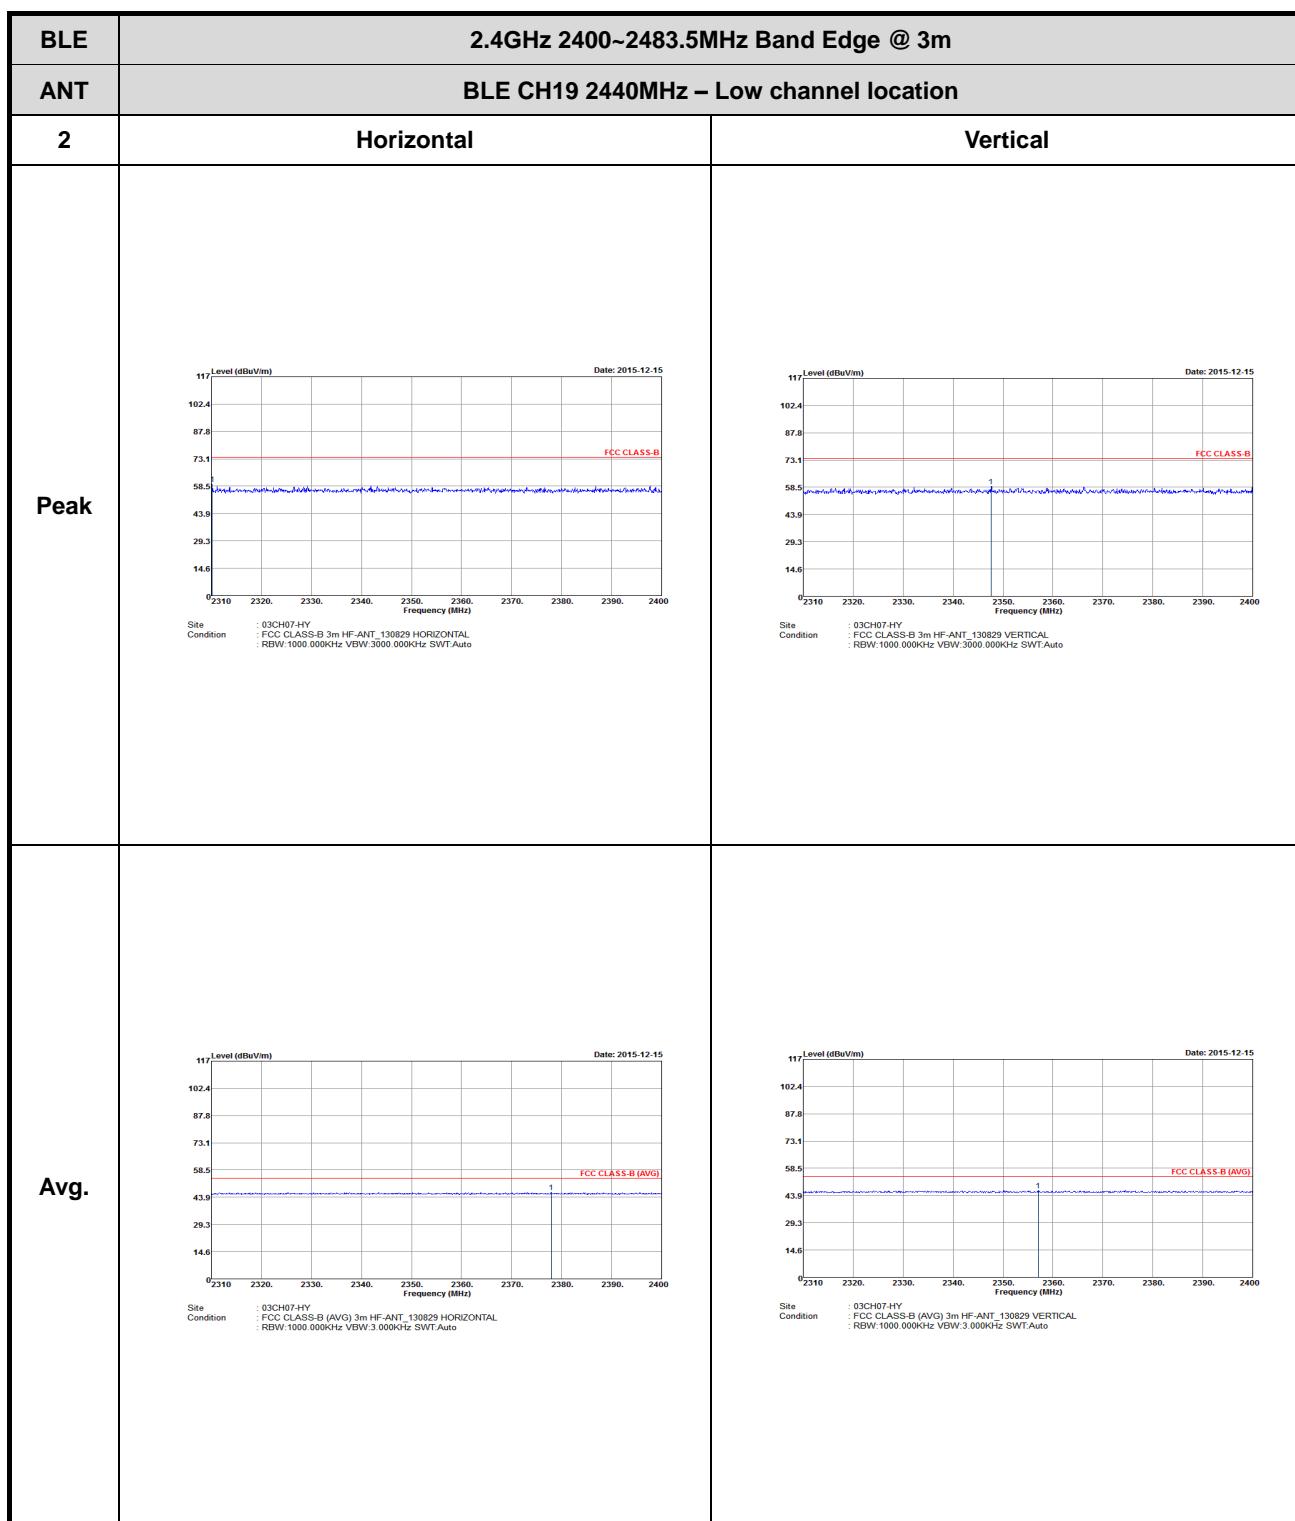

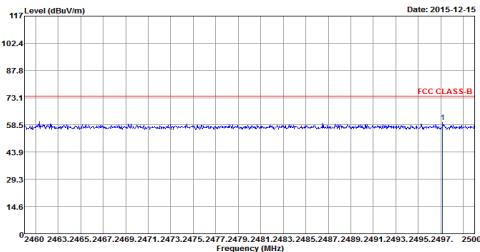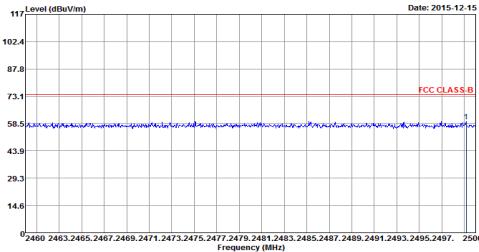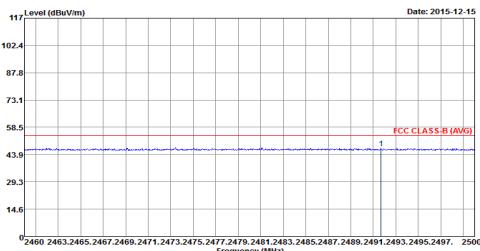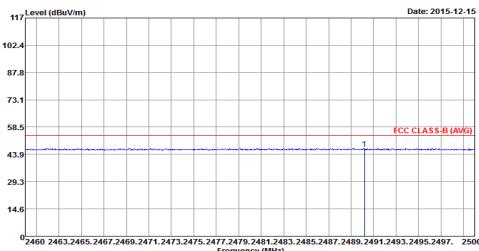

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - High channel location	
2	Horizontal	Vertical
Peak	 <p>117 Level (dBuV/m) Date: 2015-12-15 2460 2463.2465.2467.2469.2471.2473.2475.2477.2479.2481.2483.2485.2487.2489.2491.2493.2495.2497. 2500 Frequency (MHz) Site Condition : 03CH07-HY : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>117 Level (dBuV/m) Date: 2015-12-15 2460 2463.2465.2467.2469.2471.2473.2475.2477.2479.2481.2483.2485.2487.2489.2491.2493.2495.2497. 2500 Frequency (MHz) Site Condition : 03CH07-HY : FCC CLASS-B 3m HF-ANT_130829 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>117 Level (dBuV/m) Date: 2015-12-15 2460 2463.2465.2467.2469.2471.2473.2475.2477.2479.2481.2483.2485.2487.2489.2491.2493.2495.2497. 2500 Frequency (MHz) Site Condition : 03CH07-HY : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>	 <p>117 Level (dBuV/m) Date: 2015-12-15 2460 2463.2465.2467.2469.2471.2473.2475.2477.2479.2481.2483.2485.2487.2489.2491.2493.2495.2497. 2500 Frequency (MHz) Site Condition : 03CH07-HY : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>


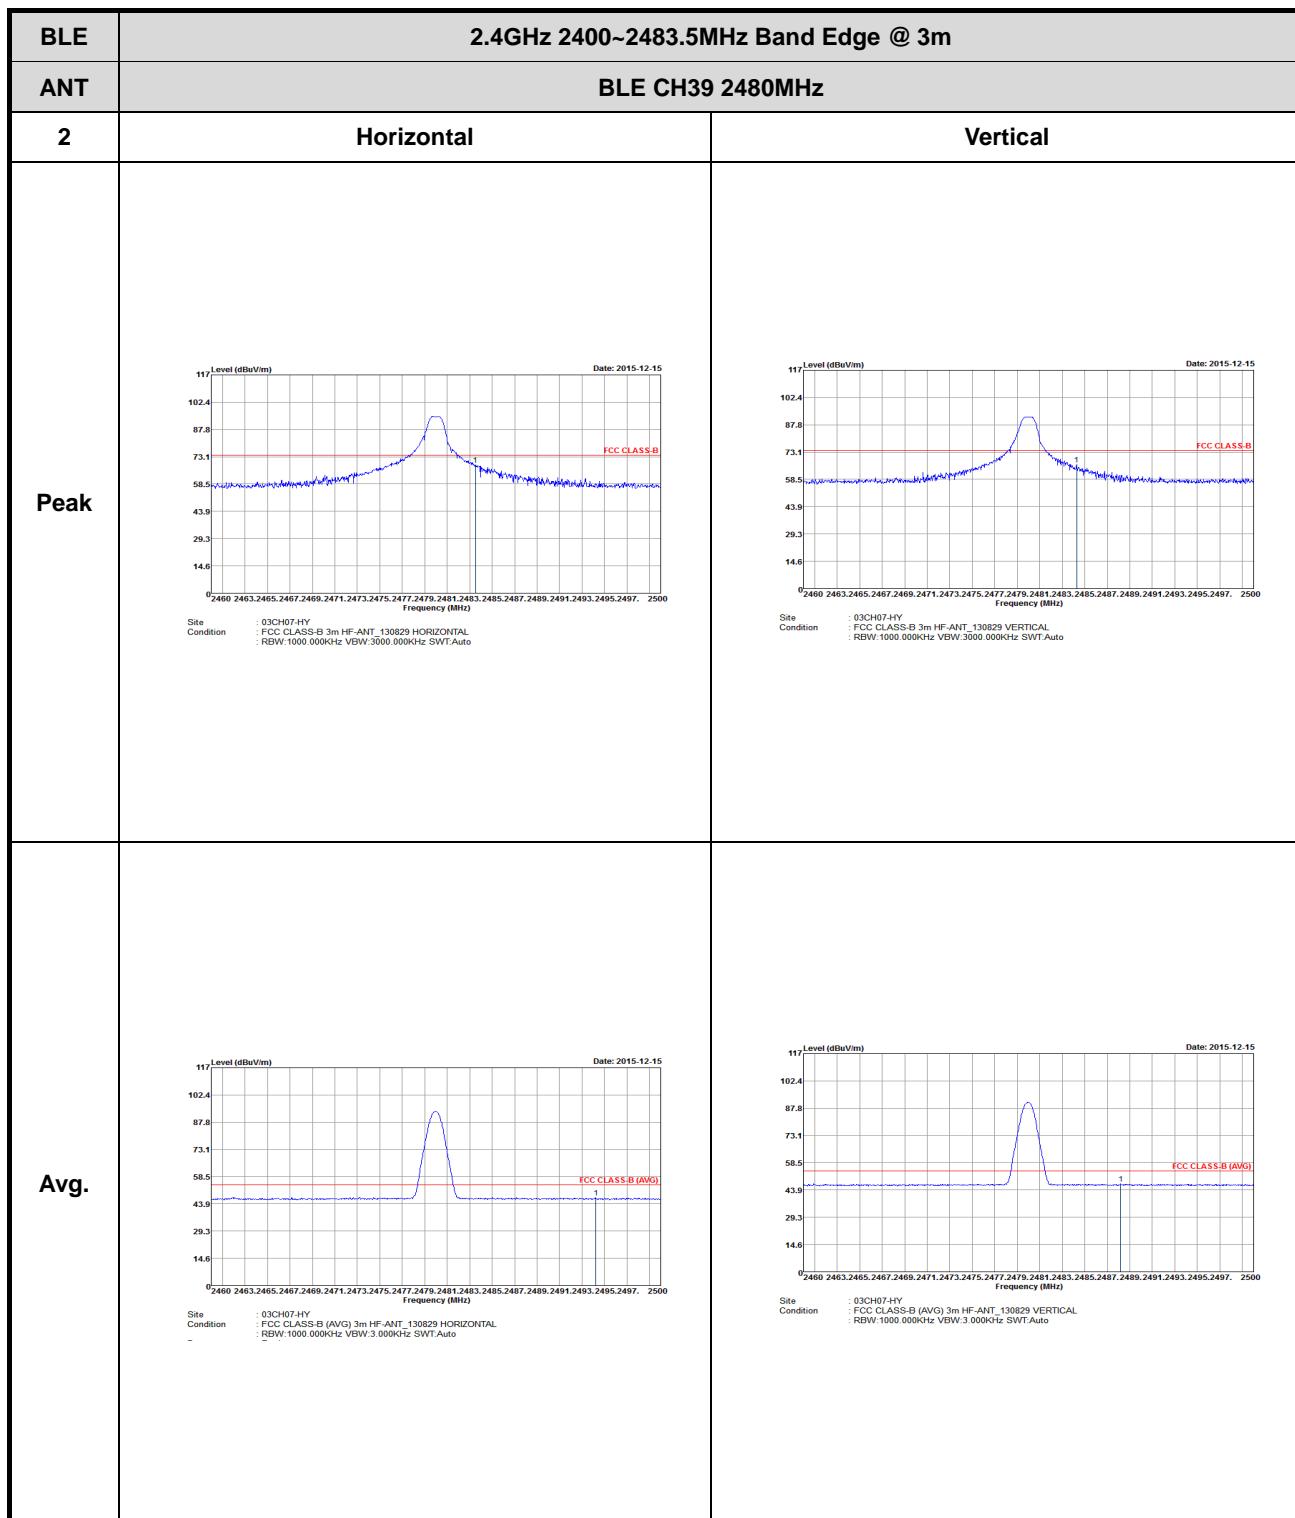



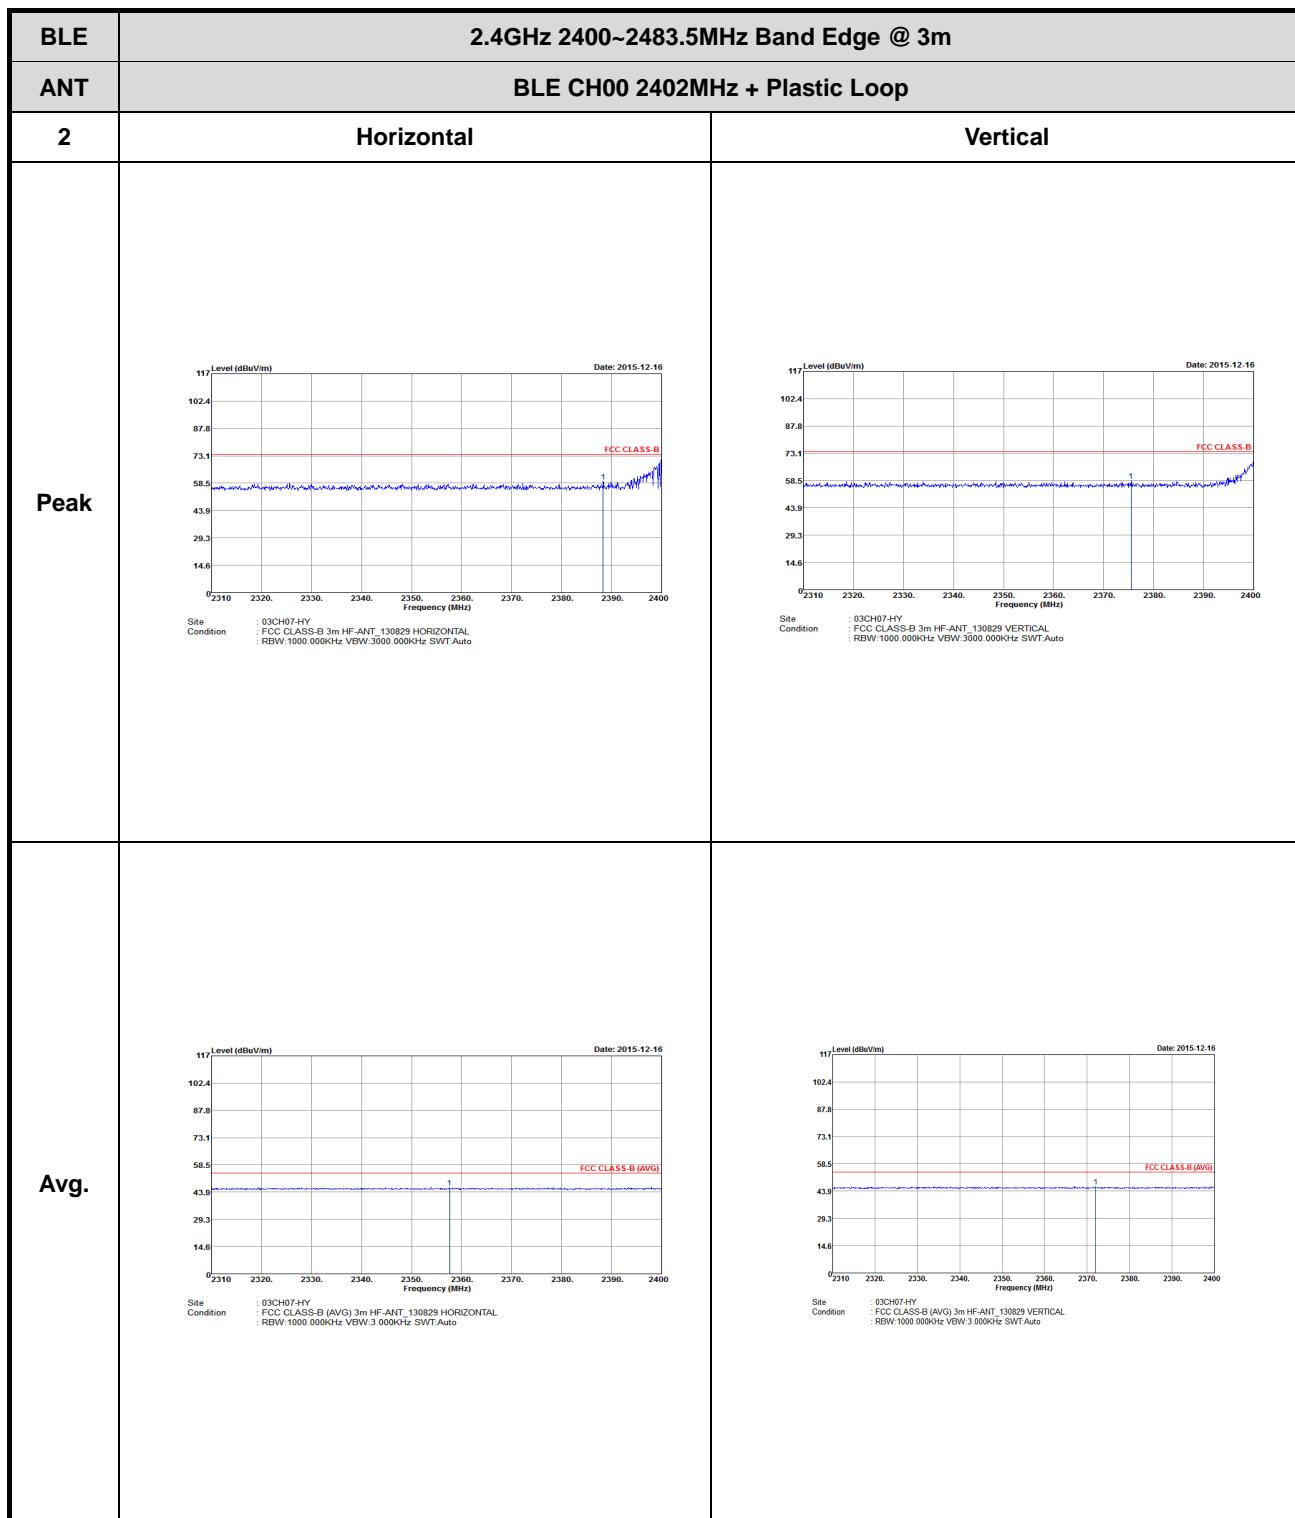




2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

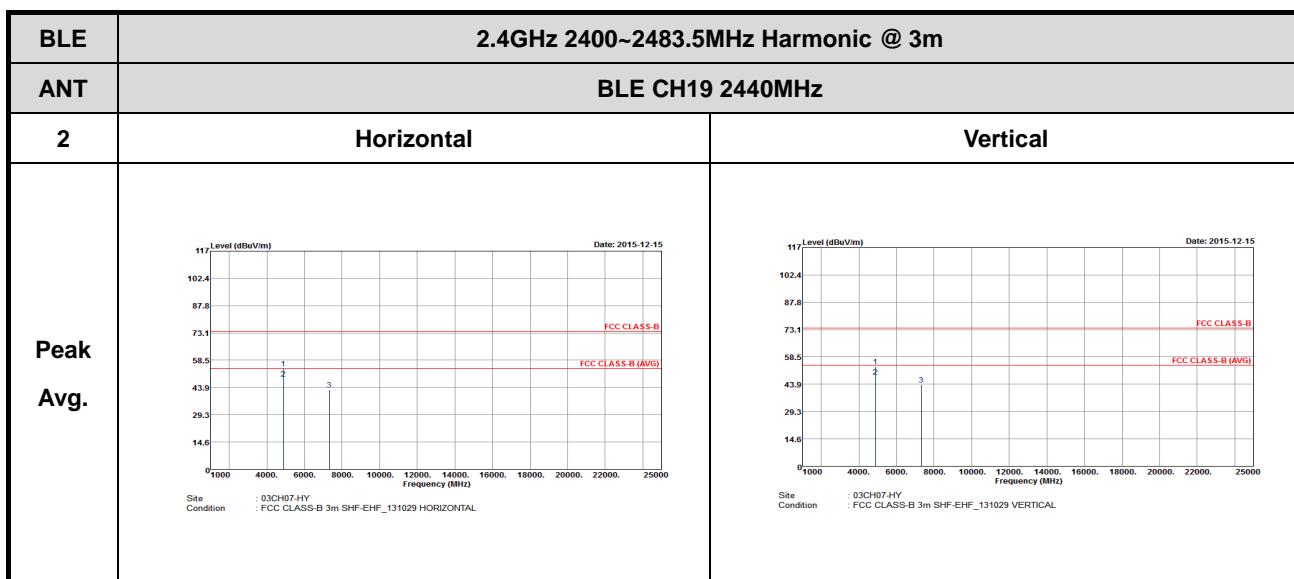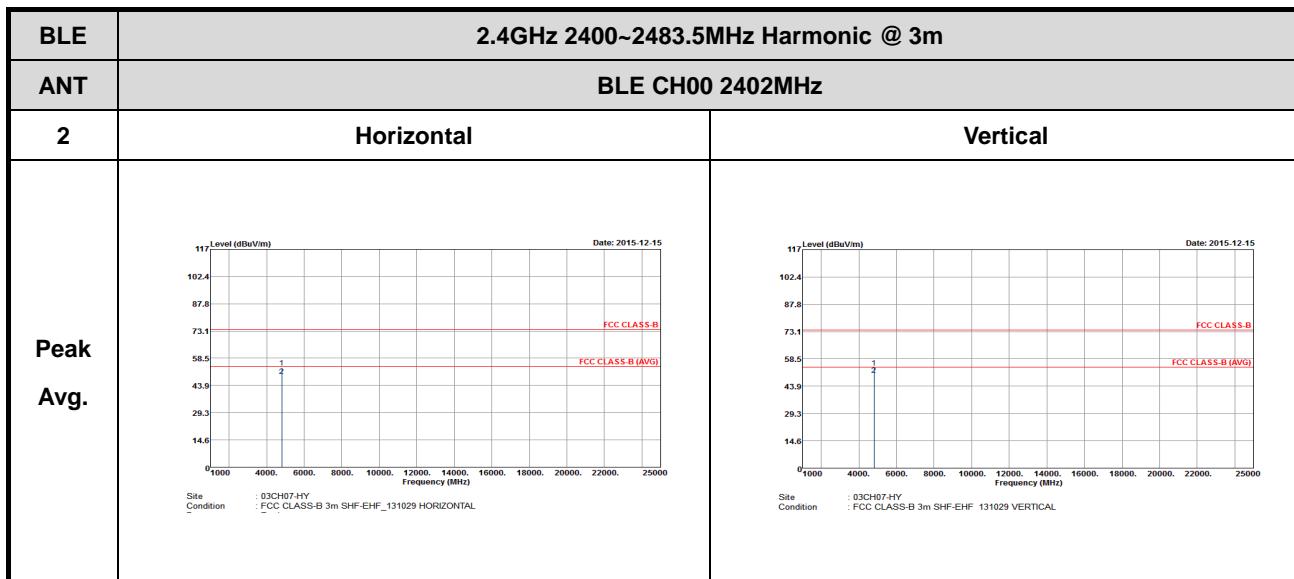

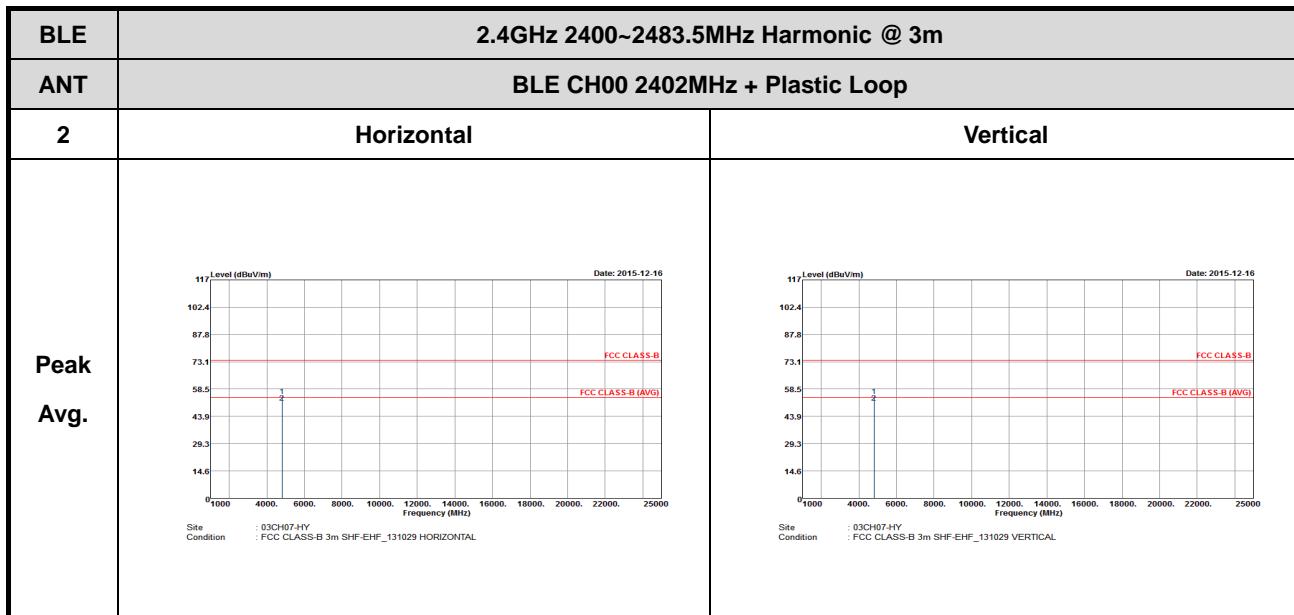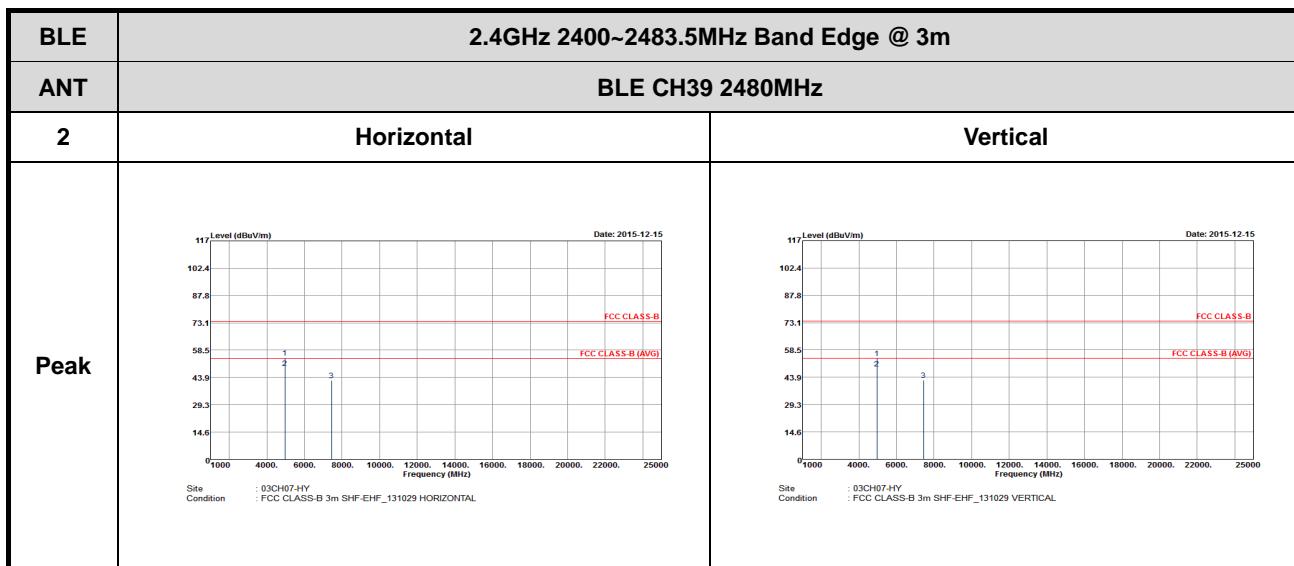



Emission below 1GHz

2.4GHz BLE (LF)

