

FCC Radio Test Report

FCC ID:2AEU7-LONDON

This report concerns (check one): ⊠Original Grant □Class II Change

Project No. : 1504C209 Equipment : Marshall London

Model Name
Applicant
Address

KB-1501

Zound Industries Smartphones AB

Torsgatan 2, 111 23 Stockholm, Sweden

Date of Receipt : Apr. 22, 2015

Date of Test : Apr. 22, 2015 ~ May 25, 2015

Issued Date : May 26, 2015 **Tested by** : BTL Inc.

Testing Engineer

Technical Manager

(Leo Hung)

Authorized Signatory

(Steven Lu)

BTLINC

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Report No.: BTL-FCCP-2-1504C209 Page 1 of 63



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C**, or National Institute of Standards and Technology (**NIST**) of **U.S.A**.

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Report No.: BTL-FCCP-2-1504C209 Page 2 of 63



Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2. SUMMARY OF TEST RESULTS 2.1 TEST FACILITY	<i>7</i> 8
2.1 TEST FACILITY 2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION 3.1 GENERAL DESCRIPTION OF EUT	9
3.1 GENERAL DESCRIPTION OF EUT 3.2 DESCRIPTION OF TEST MODES	9 11
3.2 DESCRIPTION OF TEST MODES 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TES	
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	
4. EMC EMISSION 1EST 4.1 CONDUCTED EMISSION MEASUREMENT	14 14
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD	14
4.1.4 TEST SETUP 4.1.5 EUT OPERATING CONDITIONS	15 15
4.1.6 EUT TEST CONDITIONS	15
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS 4.2.2 TEST PROCEDURE	16 17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 EUT TEST CONDITIONS 4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	19 19
4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)	20
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	20
5 . BANDWIDTH TEST	21
5.1 APPLIED PROCEDURES / LIMIT	21
5.1.1 TEST PROCEDURE	21
5.1.2 DEVIATION FROM STANDARD 5.1.3 TEST SETUP	21 21
5.1.4 EUT OPERATION CONDITIONS	21
5.1.5 EUT TEST CONDITIONS	21
5.1.6 TEST RESULTS	21

Report No.: BTL-FCCP-2-1504C209 Page 3 of 63



Table of Contents	Page
6 . MAXIMUM OUTPUT POWER TEST	22
6.1 APPLIED PROCEDURES / LIMIT	22
6.1.1 TEST PROCEDURE	22
6.1.2 DEVIATION FROM STANDARD	22
6.1.3 TEST SETUP 6.1.4 EUT OPERATION CONDITIONS	22 22
6.1.5 EUT TEST CONDITIONS	22
6.1.6 TEST RESULTS	22
7. ANTENNA CONDUCTED SPURIOUS EMISSION	23
7.1 APPLIED PROCEDURES / LIMIT	23
7.1.1 TEST PROCEDURE	23
7.1.2 DEVIATION FROM STANDARD 7.1.3 TEST SETUP	23 23
7.1.4 EUT OPERATION CONDITIONS	23
7.1.5 EUT OPERATION CONDITIONS	23
7.1.6 TEST RESULTS	23
8 . POWER SPECTRAL DENSITY TEST	24
8.1 APPLIED PROCEDURES / LIMIT	24
8.1.1 TEST PROCEDURE 8.1.2 DEVIATION FROM STANDARD	24
8.1.2 DEVIATION FROM STANDARD 8.1.3 TEST SETUP	24 24
8.1.4 EUT OPERATION CONDITIONS	24
8.1.5 EUT TEST CONDITIONS	24
8.1.6 TEST RESULTS	24
9. MEASUREMENT INSTRUMENTS LIST	25
ATTACHMENT A - CONDUCTED EMISSION	27
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	30
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	32
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	39
ATTACHMENT E - BANDWIDTH	52
ATTACHMENT F - MAXIMUM OUTPUT POWER TEST	55
ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION	57
ATTACHMENT H - POWER SPECTRAL DENSITY TEST	61

Report No.: BTL-FCCP-2-1504C209 Page 4 of 63



REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-2-1504C209	Original Issue.	May 26, 2015

Report No.: BTL-FCCP-2-1504C209 Page 5 of 63



1. CERTIFICATION

Equipment : Marshall London

Brand Name: Marshall Model Name: KB-1501

Applicant : Zound Industries Smartphones AB
Manufacturer : Zound Industries Smartphones AB
Address : Torsgatan 2, 111 23 Stockholm, Sweden

Factory : Huizhou BYD Electronics Co., Ltd.

Address : Xiangshui River, Economic Development Zone, Daya Bay, Huizhou,

Guangdong, 516083, P.R.China

Date of Test : Apr. 22, 2015 ~ May 25, 2015 Test Sample : ENGINEERING SAMPLE

Standard(s): FCC Part15, Subpart C:2014 (15.247) / ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1504C209) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Report No.: BTL-FCCP-2-1504C209 Page 6 of 63



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C					
Standard(s) Section	Test Item	Judgment	Remark		
15.207	Conducted Emission	PASS			
15.247(d)	Antenna conducted Spurious Emission	PASS			
15.247(a)(2)	6dB Bandwidth	PASS			
15.247(b)(3)	Peak Output Power	PASS			
15.247(e)	Power Spectral Density	PASS			
15.203	Antenna Requirement	PASS			
15.209/15.205	Transmitter Radiated Emissions	PASS			

NOTE:

- (1)" N/A" denotes test is not applicable to this device.
- (2) The test follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r02 (Measurement Guidelines of DTS)

Report No.: BTL-FCCP-2-1504C209 Page 7 of 63



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expanded uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)	Note
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V U, (dB) Note		Note
		9KHz~30MHz	V	3.79	
		9KHz~30MHz	Ι	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	Ι	3.60	
DG-CB03	CISPR	200MHz ~ 1,000MHz	V	3.86	
DG-CB03	CISER	200MHz ~ 1,000MHz	Η	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	Η	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	Ι	4.14	

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

Report No.: BTL-FCCP-2-1504C209 Page 8 of 63



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Marshall London		
Brand Name	Marshall		
Model Name	KB-1501		
Model Difference	N/A		
	Operation Frequency	2402~2480 MHz	
Product Description	Modulation Technology	GFSK(1Mbps)	
	Bit Rate of Transmitter		
	Output Power (Max.) 0.39 dBm (1Mbps)		
Power Source	#1 DC voltage supplied from AC adapter. Manufacturer/Model: BYD/BUUS050100-B01 #2 Supplied from Li-ion battery. Manufacturer/Model: BYD/M62		
Power Rating	#1 I/P: AC 100-240V 50/60Hz 200mA O/P: DC 5V 1A #2 DC 3.8V 2500mAh		

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

Report No.: BTL-FCCP-2-1504C209 Page 9 of 63



2. Channel List:

	Frequency		Frequency
Channel	(MHz)	Channel	(MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	SPEED	LF4701Q-EU	Internal	N/A	0.0

Report No.: BTL-FCCP-2-1504C209 Page 10 of 63



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode NOTE (1)

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test		
Final Test Mode	Description	
Mode 1	TX Mode	

For Radiated Test		
Final Test Mode	Description	
Mode 1	TX Mode NOTE (1)	

Note:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) Both adapter and battery are evaluated, operated the battery is the worst and recorded as below test data.
- (3) The EUT is considered a portable unit, it was pre-tested on the positioned of each 3 axis. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

Report No.: BTL-FCCP-2-1504C209 Page 11 of 63



3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test Software Version		QRCT	
Frequency (MHz)	2402	2440	2480
BT LE	7	7	7

Report No.: BTL-FCCP-2-1504C209 Page 12 of 63



3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED **EUT** 3.5 DESCRIPTION OF SUPPORT UNITS The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests. Equipment Mfr/Brand Model/Type No. FCC ID Series No. Item Note E-1 Item Shielded Type Ferrite Core Length Note C-1 Note: (1) For detachable type I/O cable should be specified the length in m in <code>[Length]</code> column.

Report No.: BTL-FCCP-2-1504C209 Page 13 of 63



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Fraguency of Emission (MUT)	Conducted Limit (dBµV)		
Frequency of Emission (MHz)	Quasi-peak	Average	
0.15 -0.5	66 to 56*	56 to 46*	
0.50 -5.0	56	46	
5.0 -30.0	60	50	

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following: Measurement Value = Reading Level + Correct Factor Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use) Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e For the actual test configuration, please refer to the related Item -EUT Test Photos.


4.1.3 DEVIATION FROM TEST STANDARD

No deviation

Report No.: BTL-FCCP-2-1504C209 Page 14 of 63



4.1.4 TEST SETUP

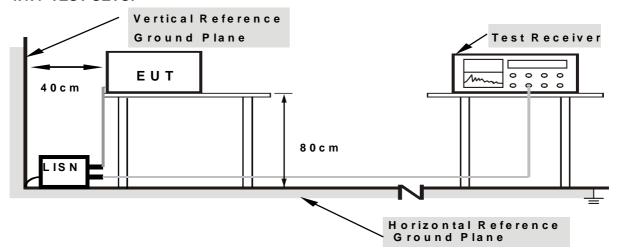

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of \[\text{Note} \]. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) " N/A" denotes test is not applicable to this device.

Report No.: BTL-FCCP-2-1504C209 Page 15 of 63



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

20dB in any 100 KHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
r requericy (Wir 12)	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following: Measurement Value = Reading Level + Correct Factor Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use) Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW	RBW 1MHz VBW 3MHz peak detector for Pk value
(Emission in restricted band)	RMS detector for AV value

Report No.: BTL-FCCP-2-1504C209 Page 16 of 63



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

Report No.: BTL-FCCP-2-1504C209 Page 17 of 63




4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

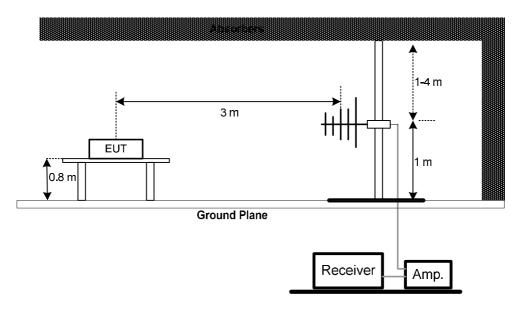


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

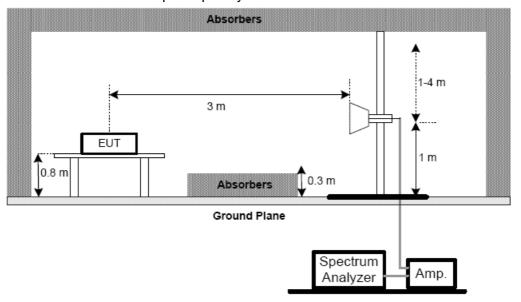

Report No.: BTL-FCCP-2-1504C209 Page 18 of 63



(C) For radiated emissions below 30MHz

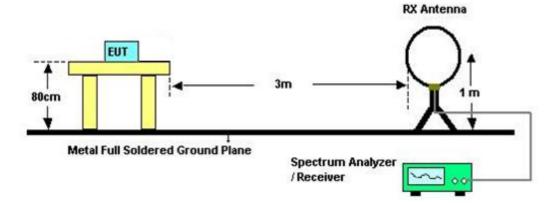

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.5** Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% **Test Voltage**: DC 3.8V

4.2.7TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

Report No.: BTL-FCCP-2-1504C209 Page 19 of 63



4.2.8TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ) Please refer to the Attachment C.

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of <code>『Note』</code>. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.2.9TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (4) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (5) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (6) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

Report No.: BTL-FCCP-2-1504C209 Page 20 of 63



5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3.8V

5.1.6 TEST RESULTS

Please refer to the Attachment E.

Report No.: BTL-FCCP-2-1504C209 Page 21 of 63



6. MAXIMUM OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance v03r02.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

EUT	Power Meter
	1 Ower meter

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3.8V

6.1.6 TEST RESULTS

Please refer to the Attachment F.

Report No.: BTL-FCCP-2-1504C209 Page 22 of 63



7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT OPERATION CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3.8V

7.1.6 TEST RESULTS

Please refer to the Attachment G.

Report No.: BTL-FCCP-2-1504C209 Page 23 of 63



8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

	FCC Part15 (15.247), Subpart C									
Section	Test Item	Limit	Frequency Range (MHz)	Result						
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS						

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3.8V

8.1.6 TEST RESULTS

Please refer to the Attachment H.

Report No.: BTL-FCCP-2-1504C209 Page 24 of 63



9. MEASUREMENT INSTRUMENTS LIST

	Conducted Emission Measurement											
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until							
1	LISN	EMCO	3816/2	00052765	Mar. 28, 2016							
2	LISN	R&S	ENV216	101447	Mar. 28, 2016							
3	Test Cable	N/A	C_17	N/A	Mar. 13, 2016							
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Mar. 28, 2016							
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 28, 2016							
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-0 1	N/A	N/A							

	Radiated Emission Measurement										
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until						
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 28, 2016						
2	Amplifier	HP	8447D	2944A09673	Nov. 17, 2015						
3	Receiver	AGILENT	N9038A	MY52130039	Sep. 30, 2015						
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 01, 2015						
5	Controller	CT	SC100	N/A	N/A						
6	Antenna	ETS	3115	00075789	Mar. 28, 2016						
7	Amplifier	Agilent	8449B	3008A02274	Nov. 02, 2015						
8	Receiver	AGILENT	N9038A	MY52130039	Sep. 30, 2015						
9	Test Cable	N/A	C-68	N/A	Jul. 01, 2015						
10	Controller	CT	SC100	N/A	N/A						
11	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Mar. 28, 2016						
12	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 28, 2016						
13	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Aug. 16, 2015						
14	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-0 1	N/A	N/A						

Report No.: BTL-FCCP-2-1504C209 Page 25 of 63



	Spectrum Bandwidth Measurement								
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until				
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015				

	Maximum Conducted Output Power Measurement									
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until					
1	power Meter	ANRITSU	ML2495A	1128009	Mar. 28, 2016					
2	Pulse Power Sensor	ANRITSU	MA 2411B	1027500	Mar. 28, 2016					

	Antenna Conducted Spurious Emission Measurement								
Item	Nanufacturer Manufacturer		Type No.	Serial No.	Calibrated until				
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015				

	Power Spectral Density Measurement									
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until					
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015					

Frequency Stability Measurement								
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until			
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015			

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

Report No.: BTL-FCCP-2-1504C209 Page 26 of 63




ATTACHMENT A - CONDUCTED EMISSION	

Report No.: BTL-FCCP-2-1504C209 Page 27 of 63





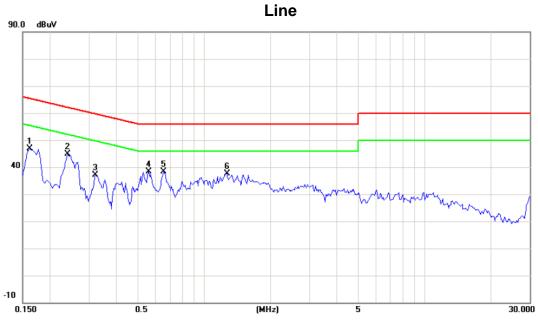


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	ı	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1617	37.12	9.66	46.78	65.38	-18.60	peak	
2	*	0.2398	35.24	9.71	44.95	62.10	-17.15	peak	
3		0.3215	27.40	9.75	37.15	59.67	-22.52	peak	
4		0.5601	28.62	9.82	38.44	56.00	-17.56	peak	
5		0.6540	28.52	9.85	38.37	56.00	-17.63	peak	
6		1.2670	27.72	9.92	37.64	56.00	-18.36	peak	

Report No.: BTL-FCCP-2-1504C209 Page 28 of 63





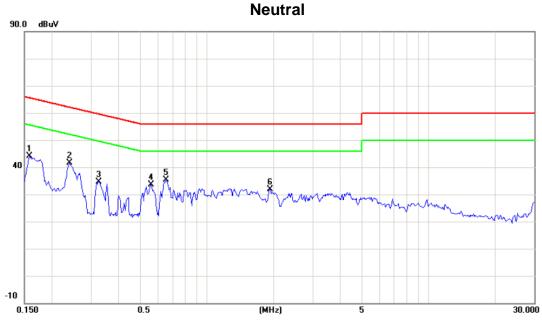

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1577	34.46	9.57	44.03	65.58	-21.55	peak	
2 *	0.2398	32.10	9.60	41.70	62.10	-20.40	peak	
3	0.3256	25.14	9.61	34.75	59.56	-24.81	peak	
4	0.5601	24.02	9.65	33.67	56.00	-22.33	peak	
5	0.6542	25.85	9.65	35.50	56.00	-20.50	peak	
6	1.9273	21.96	9.85	31.81	56.00	-24.19	peak	

Report No.: BTL-FCCP-2-1504C209 Page 29 of 63



ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Report No.: BTL-FCCP-2-1504C209 Page 30 of 63



Test Mode: TX Mode

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0085	0°	12.86	25.03	37.89	129.02	-91.13	AVG
0.0085	0°	14.39	25.03	39.42	149.02	-109.60	PEAK
0.0236	0°	8.03	24.07	32.10	120.15	-88.04	AVG
0.0236	0°	10.85	24.07	34.92	140.15	-105.22	PEAK
0.0338	0°	5.58	23.43	29.01	117.03	-88.02	AVG
0.0338	0°	7.16	23.43	30.59	137.03	-106.44	PEAK
0.0485	0°	2.38	22.50	24.88	113.89	-89.01	AVG
0.0485	0°	4.17	22.50	26.67	133.89	-107.22	PEAK
0.4963	0°	20.38	19.81	40.19	73.69	-33.50	QP
1.7239	0°	23.55	19.53	43.08	69.54	-26.46	QP

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0077	90°	11.08	24.30	35.38	129.87	-94.49	AVG
0.0077	90°	13.52	24.30	37.82	149.87	-112.05	PEAK
0.0139	90°	9.87	24.30	34.17	124.74	-90.57	AVG
0.0139	90°	11.06	24.30	35.36	144.74	-109.38	PEAK
0.0336	90°	7.36	23.44	30.80	117.08	-86.28	AVG
0.0336	90°	8.97	23.44	32.41	137.08	-104.67	PEAK
0.0452	90°	5.28	22.70	27.98	114.50	-86.52	AVG
0.0452	90°	7.19	22.70	29.89	134.50	-104.61	PEAK
0.4988	90°	19.36	19.80	39.16	73.65	-34.48	QP
1.7739	90°	22.83	19.52	42.35	69.54	-27.19	QP

Report No.: BTL-FCCP-2-1504C209 Page 31 of 63




ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Report No.: BTL-FCCP-2-1504C209 Page 32 of 63





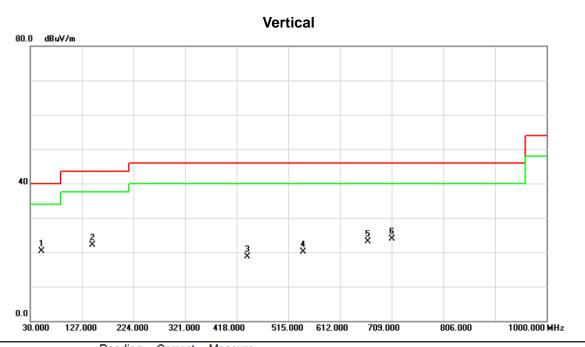


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	51.3400	34.10	-13.77	20.33	40.00	-19.67	peak	
2		147.3700	35.10	-12.90	22.20	43.50	-21.30	peak	
3		438.3700	26.78	-8.15	18.63	46.00	-27.37	peak	
4		542.1600	27.58	-7.46	20.12	46.00	-25.88	peak	
5		664.3800	27.54	-4.42	23.12	46.00	-22.88	peak	
6		709.9700	27.98	-4.16	23.82	46.00	-22.18	peak	

Report No.: BTL-FCCP-2-1504C209 Page 33 of 63



Test Mode: TX 2402MHz -CH00 -1Mbps


Horizontal

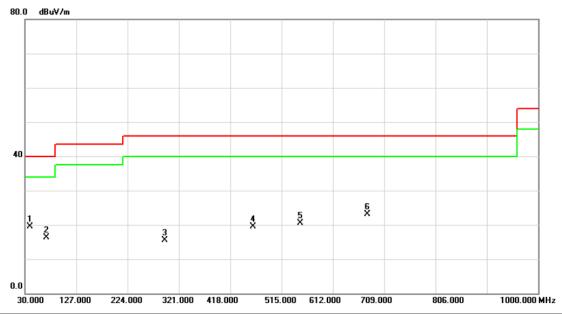


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39.7000	33.52	-13.99	19.53	40.00	-20.47	peak	
2		70.7400	32.53	-16.17	16.36	40.00	-23.64	peak	
3		294.8100	26.08	-10.66	15.42	46.00	-30.58	peak	
4		460.6800	27.79	-8.32	19.47	46.00	-26.53	peak	
5		550.8900	27.45	-7.04	20.41	46.00	-25.59	peak	
6		676.9900	27.36	-4.34	23.02	46.00	-22.98	peak	

Report No.: BTL-FCCP-2-1504C209 Page 34 of 63





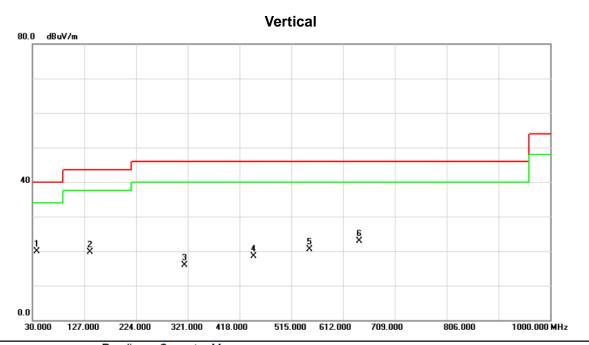


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	38.7300	33.99	-14.15	19.84	40.00	-20.16	peak	
2		138.6400	32.57	-12.86	19.71	43.50	-23.79	peak	
3		315.1800	26.70	-10.72	15.98	46.00	-30.02	peak	
4		444.1900	26.65	-8.05	18.60	46.00	-27.40	peak	
5		548.9500	27.52	-7.09	20.43	46.00	-25.57	peak	
6		642.0700	27.84	-4.96	22.88	46.00	-23.12	peak	

Report No.: BTL-FCCP-2-1504C209 Page 35 of 63



Test Mode: TX 2440MHz -CH19 -1Mbps

Horizontal

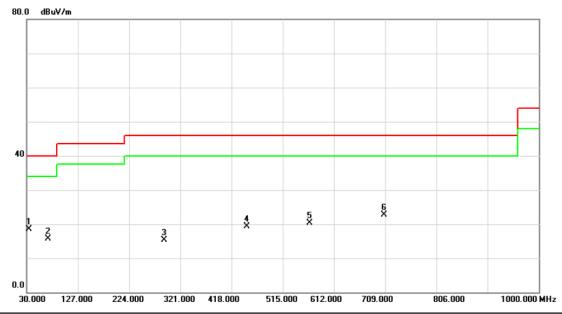

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	33.8800	33.18	-14.66	18.52	40.00	-21.48	peak	
2		70.7400	31.94	-16.17	15.77	40.00	-24.23	peak	
3		290.9300	26.12	-10.77	15.35	46.00	-30.65	peak	
4		447.1000	27.37	-8.00	19.37	46.00	-26.63	peak	
5		566.4100	27.47	-7.15	20.32	46.00	-25.68	peak	
6		707.0600	26.93	-4.18	22.75	46.00	-23.25	peak	

Report No.: BTL-FCCP-2-1504C209 Page 36 of 63



Test Mode: TX 2480MHz -CH39 -1Mbps


Vertical 80.0 dBuV/m 8 5 X 2 X 4 × X X 0.0 30.000 709.000 806.000 1000.000 MHz 127.000 224.000 321.000 418.000 515.000 612.000

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	51.3400	33.49	-13.77	19.72	40.00	-20.28	peak	
2		138.6400	32.09	-12.86	19.23	43.50	-24.27	peak	
3		357.8600	26.86	-10.86	16.00	46.00	-30.00	peak	
4		457.7700	26.89	-8.22	18.67	46.00	-27.33	peak	
5		554.7700	27.79	-7.07	20.72	46.00	-25.28	peak	
6		672.1400	27.77	-4.37	23.40	46.00	-22.60	peak	

Report No.: BTL-FCCP-2-1504C209 Page 37 of 63



Test Mode: TX 2480MHz -CH39 -1Mbps

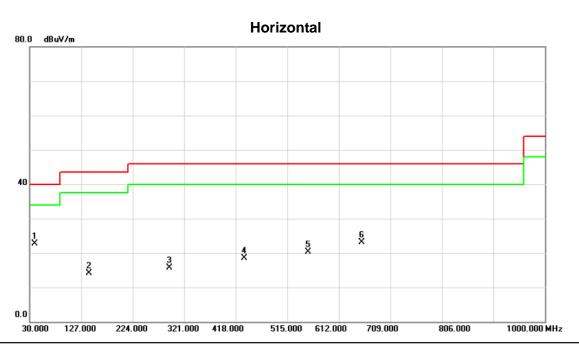

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39.7000	36.76	-13.99	22.77	40.00	-17.23	peak	
2		141.5500	27.07	-12.89	14.18	43.50	-29.32	peak	
3		292.8700	26.37	-10.71	15.66	46.00	-30.34	peak	
4		434.4900	26.75	-8.22	18.53	46.00	-27.47	peak	
5		554.7700	27.30	-7.07	20.23	46.00	-25.77	peak	
6		655.6500	27.56	-4.48	23.08	46.00	-22.92	peak	

Report No.: BTL-FCCP-2-1504C209 Page 38 of 63




ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Report No.: BTL-FCCP-2-1504C209 Page 39 of 63



Orthogonal Axis: X
Test Mode: TX 2402MHz _CH00_1Mbps

Vertical

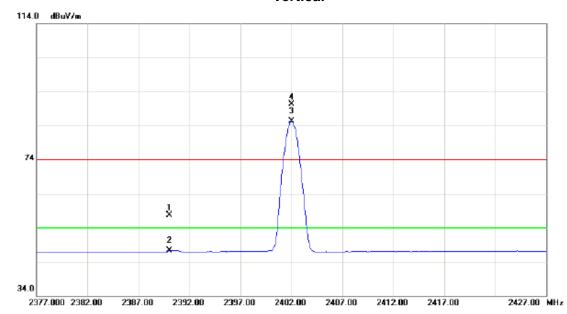

	No.	M	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
-			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
-	1		2390.000	24.95	32.68	57.63	74.00	-16.37	peak	
-	2		2390.000	14.55	32.68	47.23	54.00	-6.77	AVG	
-	3	*	2402.000	52.54	32.69	85.23	54.00	31.23	AVG	no limit
-	4	Х	2402.050	57.56	32.69	90.25	74.00	16.25	peak	no limit
-										

Report No.: BTL-FCCP-2-1504C209 Page 40 of 63



Test Mode: TX 2402MHz _CH00_1Mbps

Vertical




No.	Mk	. Freq.	Reading Level		Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4804.010	31.30	5.81	37.11	54.00	-16.89	AVG	
2		4804.080	39.55	5.81	45.36	74.00	-28.64	peak	

Report No.: BTL-FCCP-2-1504C209 Page 41 of 63



Test Mode: TX 2402MHz _CH00_1Mbps

Horizontal

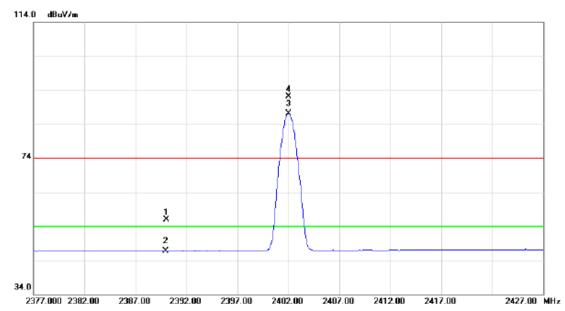

	No.	Mk	. Freq.	Reading Level	Factor	ment	Limit	Margin		
-			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
	1		2390.000	23.29	32.68	55.97	74.00	-18.03	peak	
-	2		2390.000	14.12	32.68	46.80	54.00	-7.20	AVG	
	3	*	2402.000	54.40	32.69	87.09	54.00	33.09	AVG	no limit
-	4	Χ	2402.050	59.37	32.69	92.06	74.00	18.06	peak	no limit
-										

Report No.: BTL-FCCP-2-1504C209 Page 42 of 63



Orthogonal Axis: X
Test Mode: TX 2402MHz _CH00_1Mbps

Horizontal




No.	Mk	. Freq.	Reading Level		Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4804.130	31.41	5.81	37.22	54.00	-16.78	AVG	
2		4804.230	38.32	5.81	44.13	74.00	-29.87	peak	

Report No.: BTL-FCCP-2-1504C209 Page 43 of 63



Test Mode: TX 2440MHz _CH19_1Mbps

Vertical

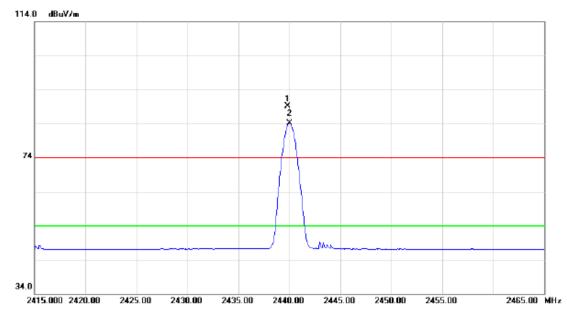

	No.	Mk	. Freq.		Correct Factor	Measure- ment	Limit	Margin			
_			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
	1	X	2439.850	56.33	32.75	89.08	74.00	15.08	peak	no limit	
	2	*	2440.000	51.35	32.75	84.10	54.00	30.10	AVG	no limit	

Report No.: BTL-FCCP-2-1504C209 Page 44 of 63



Test Mode: TX 2440MHz _CH19_1Mbps

Vertical




No.	М	k.	Freq.	Reading Level		Measure- ment	Limit	Margin		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		48	380.000	38.37	6.02	44.39	74.00	-29.61	peak	
2	*	48	380.000	31.12	6.02	37.14	54.00	-16.86	AVG	

Report No.: BTL-FCCP-2-1504C209 Page 45 of 63



Test Mode: TX 2440MHz _CH19_1Mbps

Horizontal

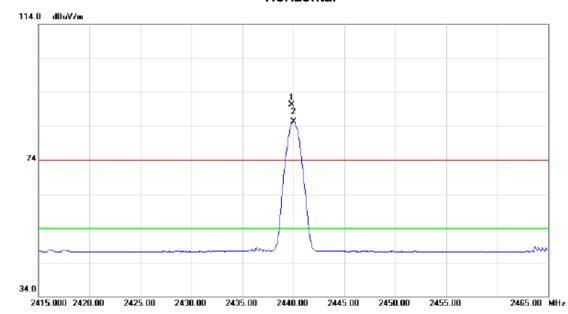

No.	М	k.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	Х	24	39.800	57.46	32.75	90.21	74.00	16.21	peak	no limit
2	*	24	40.000	52.59	32.75	85.34	54.00	31.34	AVG	no limit

Report No.: BTL-FCCP-2-1504C209 Page 46 of 63



Test Mode: TX 2440MHz _CH19_1Mbps

Horizontal




No.	M	c. Freq.	Reading Level		Measure- ment		Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4880.000	39.20	6.02	45.22	74.00	-28.78	peak	
2	*	4880.000	31.29	6.02	37.31	54.00	-16.69	AVG	

Report No.: BTL-FCCP-2-1504C209 Page 47 of 63



Orthogonal Axis: X Test Mode: TX 2480MHz _CH39_1Mbps

Vertical

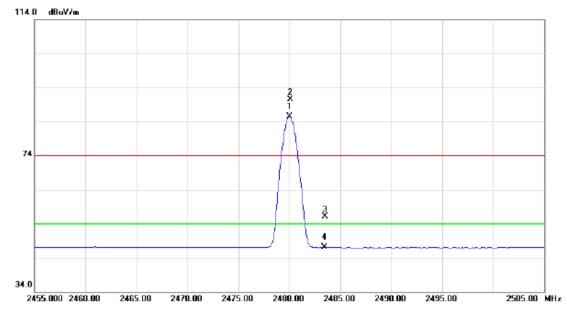


	No.	Mk	. Freq.	Reading Level	Factor Factor	Measure- ment	Limit	Margin				
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment		
	1	*	2480.000	52.68	32.80	85.48	54.00	31.48	AVG	no limit		
	2	Х	2480.100	57.63	32.80	90.43	74.00	16.43	peak	no limit		
	3		2483.500	23.39	32.81	56.20	74.00	-17.80	peak			
	4		2483.500	14.22	32.81	47.03	54.00	-6.97	AVG			
-											 	

Report No.: BTL-FCCP-2-1504C209 Page 48 of 63



Test Mode: TX 2480MHz _CH39_1Mbps

Vertical

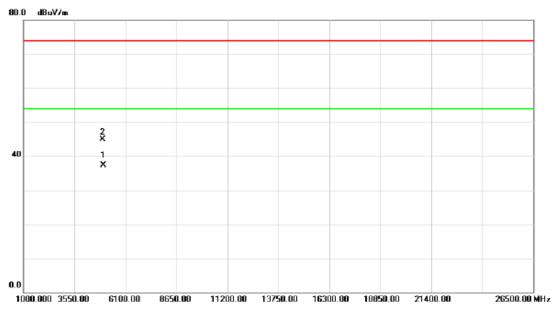


No.	М	k.	Freq.	Reading Level		Measure- ment	Limit	Margin		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	49	960.000	31.15	6.23	37.38	54.00	-16.62	AVG	
2		49	960.020	38.74	6.23	44.97	74.00	-29.03	peak	

Report No.: BTL-FCCP-2-1504C209 Page 49 of 63



Test Mode: TX 2480MHz _CH39_1Mbps

Horizontal

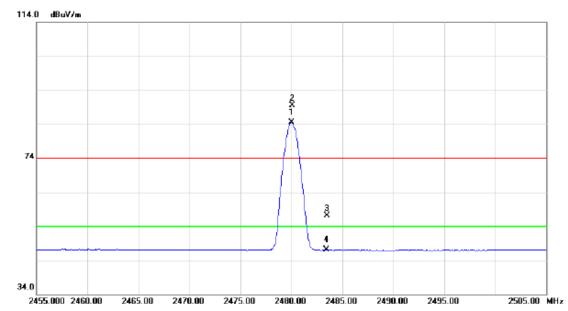


	No.	Mk	. Freq.	Reading Level	Factor Factor	Measure- ment	Limit	Margin			
Ī			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
Ī	1	*	2480.000	51.65	32.80	84.45	54.00	30.45	AVG	no limit	
	2	Х	2480.100	56.64	32.80	89.44	74.00	15.44	peak	no limit	
	3		2483.500	24.29	32.81	57.10	74.00	-16.90	peak		
-	4		2483.500	14.21	32.81	47.02	54.00	-6.98	AVG		
-											

Report No.: BTL-FCCP-2-1504C209 Page 50 of 63



Test Mode: TX 2480MHz _CH39_1Mbps

Horizontal

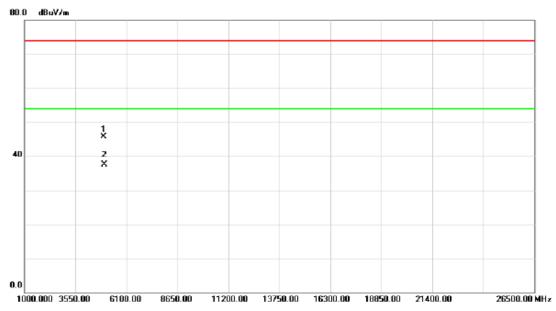

No.	MI	k. F	req.	Reading Level		Measure- ment	Limit	Margin		
		N	ИHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960	.000	39.43	6.23	45.66	74.00	-28.34	peak	
2	*	4960	.000	31.36	6.23	37.59	54.00	-16.41	AVG	

Report No.: BTL-FCCP-2-1504C209 Page 51 of 63



ATTACHMENT E - BANDWIDTH	


Report No.: BTL-FCCP-2-1504C209 Page 52 of 63



Test Mode: CH00, CH19, CH39 - 1Mbps

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2402	0.672	1.080	500	Complies
2440	0.668	1.080	500	Complies
2480	0.670	1.080	500	Complies


TX CH00

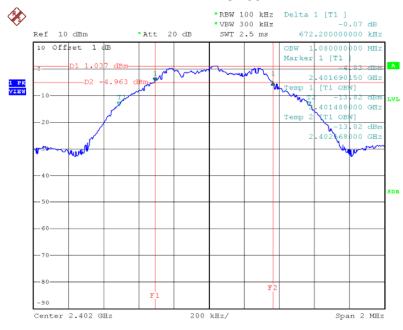


Date: 24.APR.2015 16:08:15

Report No.: BTL-FCCP-2-1504C209 Page 53 of 63



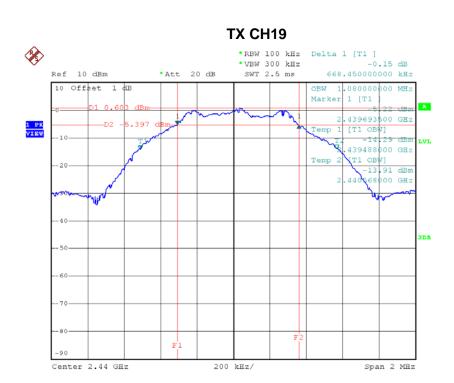

Date: 24.APR.2015 16:10:03

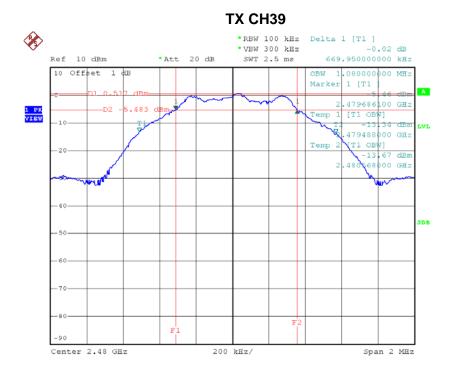

Date: 24.APR.2015 16:10:39



ATTACHMENT F - MAXIMUM OUTPUT POWER TEST

Report No.: BTL-FCCP-2-1504C209 Page 55 of 63



Test Mode: CH00, CH19, CH39 - 1Mbps

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watt)	Max. Limit (dBm)	Max Limit (Watt)	Test Result
2402	0.39	0.0011	30.00	1.00	Complies
2440	-0.62	0.0009	30.00	1.00	Complies
2480	-0.39	0.0009	30.00	1.00	Complies


Report No.: BTL-FCCP-2-1504C209 Page 56 of 63



ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS **EMISSION**

Report No.: BTL-FCCP-2-1504C209 Page 57 of 63




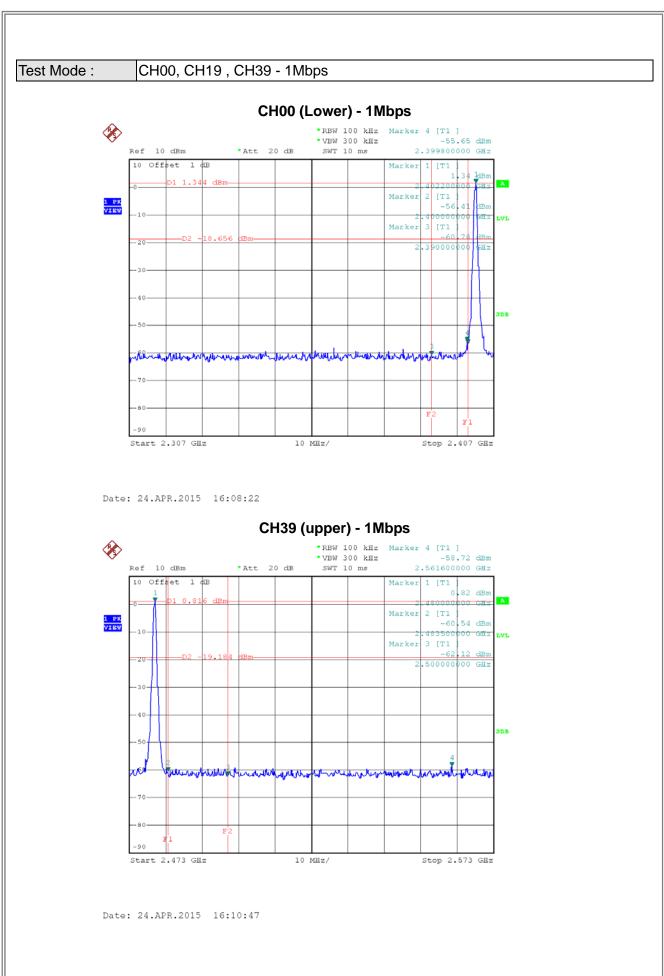

Report No.: BTL-FCCP-2-1504C209






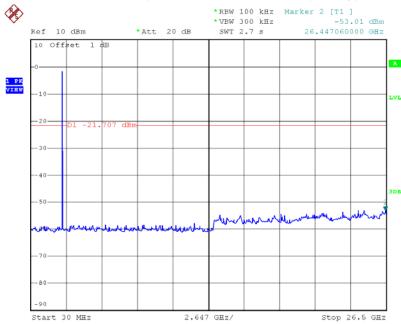

Date: 24.APR.2015 16:08:36


CH19 (10 Harmonic of the frequency)

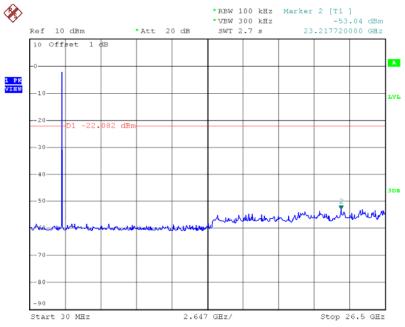

Date: 24.APR.2015 16:10:17





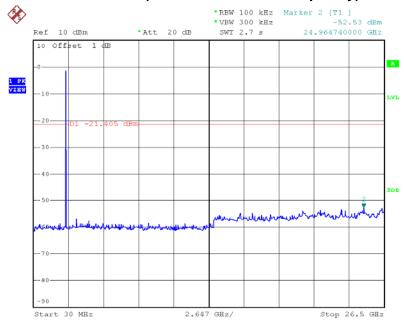

Date: 24.APR.2015 16:11:01



ATTACHMENT H - POWER SPECTRAL DENSITY TEST


Report No.: BTL-FCCP-2-1504C209 Page 61 of 63



Test Mode: CH00, CH19, CH39 - 1Mbps

Frequency (MHz)	Power Density (dBm)	Max. Limit (dBm)	Result
2402	-14.24	8	Complies
2440	-14.67	8	Complies
2480	-15.17	8	Complies


TX CH00

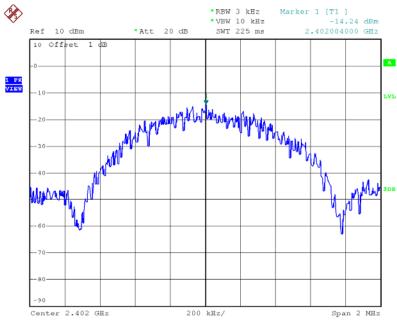


Date: 24.APR.2015 16:08:42

Report No.: BTL-FCCP-2-1504C209 Page 62 of 63



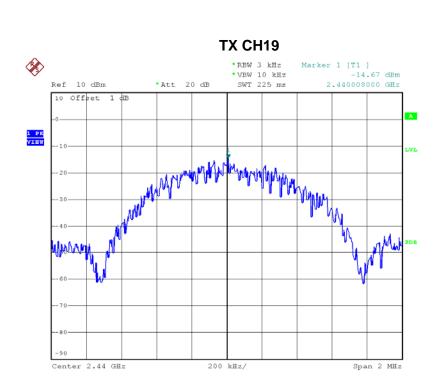

Date: 24.APR.2015 16:10:23

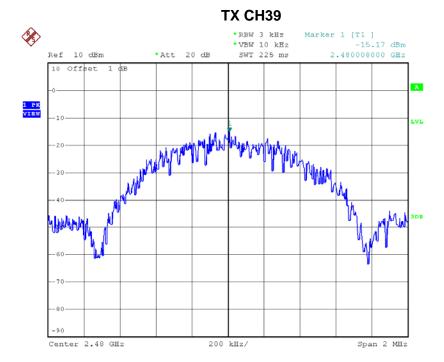

Date: 24.APR.2015 16:11:07