

# FCC Radio Test Report

## FCC ID: 2AEU7-LONDON

This report concerns (check one): Original Grant Class II Change

**Project No.** : 1504C209  
**Equipment** : Marshall London  
**Model Name** : KB-1501  
**Applicant** : Zound Industries Smartphones AB  
**Address** : Torsgatan 2, 111 23 Stockholm, Sweden

**Date of Receipt** : Apr. 22, 2015  
**Date of Test** : Apr. 22, 2015 ~ May 25, 2015  
**Issued Date** : May 26, 2015  
**Tested by** : BTL Inc.

**Testing Engineer** : David Mao  
(David Mao)

**Technical Manager** : Leo Hung  
(Leo Hung)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

**B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

## **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL**'s report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

## **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
<b>REPORT ISSUED HISTORY</b>	<b>6</b>
<b>1 . CERTIFICATION</b>	<b>7</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>8</b>
<b>2.1 TEST FACILITY</b>	<b>9</b>
<b>2.2 MEASUREMENT UNCERTAINTY</b>	<b>9</b>
<b>3 . GENERAL INFORMATION</b>	<b>10</b>
<b>3.1 GENERAL DESCRIPTION OF EUT</b>	<b>10</b>
<b>3.2 DESCRIPTION OF TEST MODES</b>	<b>11</b>
<b>3.3 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED</b>	<b>12</b>
<b>3.4DESCRIPTION OF SUPPORT UNITS</b>	<b>12</b>
<b>4 . TEST RESULT</b>	<b>13</b>
<b>4.1 RADIATEDRF OUTPUT POWER MEASUREMENT</b>	<b>13</b>
<b>4.1.1 LIMIT</b>	<b>13</b>
<b>4.1.2 MEASURING INSTRUMENTS AND SETTING</b>	<b>13</b>
<b>4.1.3 TEST PROCEDURE</b>	<b>13</b>
<b>4.1.4 TESTSETUP LAYOUT</b>	<b>14</b>
<b>4.1.5 TESTDEVIATION</b>	<b>14</b>
<b>4.1.6 EUT OPERATIONDURING TEST</b>	<b>14</b>
<b>4.1.7 EUT TEST CONDITIONS</b>	<b>14</b>
<b>4.1.8 TEST RESULTS</b>	<b>14</b>
<b>4.2 99% OCCUPIED BANDWIDTH MEASUREMENT</b>	<b>15</b>
<b>4.2.1 LIMIT</b>	<b>15</b>
<b>4.2.2 MEASURING INSTRUMENTS AND SETTING</b>	<b>15</b>
<b>4.2.3 TEST PROCEDURE</b>	<b>15</b>
<b>4.2.4 TESTSETUP LAYOUT</b>	<b>15</b>
<b>4.2.5 TESTDEVIATION</b>	<b>15</b>
<b>4.2.6 EUT OPERATIONDURING TEST</b>	<b>15</b>
<b>4.2.7 EUT TEST CONDITIONS</b>	<b>15</b>
<b>4.2.8 TEST RESULTS</b>	<b>16</b>
<b>4.3 SPURIOUS EMISSIONS AT ANTENNA TERMINALS MEASUREMENT</b>	<b>17</b>
<b>4.3.1 LIMIT</b>	<b>17</b>
<b>4.3.2 MEASURING INSTRUMENTS AND SETTING</b>	<b>17</b>
<b>4.3.3 TEST PROCEDURES</b>	<b>17</b>
<b>4.3.4 TESTSETUP LAYOUT</b>	<b>17</b>
<b>4.3.5 TESTDEVIATION</b>	<b>17</b>
<b>4.3.6 EUT OPERATIONDURING TEST</b>	<b>17</b>
<b>4.3.7 EUT TEST CONDITIONS</b>	<b>18</b>

Table of Contents	Page
4.3.8 TEST RESULTS	18
<b>4.4 SPURIOUS RADIATED EMISSIONS MEASUREMENT</b>	<b>19</b>
4.4.1 LIMIT	19
4.4.2 MEASURING INSTRUMENTS AND SETTING	19
4.4.3 TEST PROCEDURES	19
4.4.4 TESTSETUP LAYOUT	20
4.4.5 TESTDEVIATION	20
4.4.6 EUT OPERATIONDURING TEST	20
4.4.7 EUT TEST CONDITIONS	20
4.4.8 TEST RESULTS	20
<b>4.5 BAND EDGE MEASUREMENT</b>	<b>21</b>
4.5.1 LIMIT	21
4.5.2 MEASURING INSTRUMENTS AND SETTING	21
4.5.3 TEST PROCEDURES	21
4.5.4 TESTSETUP LAYOUT	21
4.5.5 TESTDEVIATION	21
4.5.6 EUT OPERATIONDURING TEST	21
4.5.7 EUT TEST CONDITIONS	21
4.5.8 TEST RESULTS	22
<b>4.6 FREQUENCY STABILITY MEASUREMENT</b>	<b>23</b>
4.6.1 LIMIT	23
4.6.2 MEASURING INSTRUMENTS AND SETTING	23
4.6.3 TEST PROCEDURES	23
4.6.4 TESTSETUP LAYOUT	23
4.6.5 TESTDEVIATION	23
4.6.6 EUT OPERATIONDURING TEST	23
4.6.7 EUT TEST CONDITIONS	24
4.6.8 TEST RESULTS	24
<b>4.7 PEAK TO AVERAGE RADIO</b>	<b>25</b>
4.7.1 LIMIT	25
4.7.2 TEST PROCEDURES	25
4.7.3 TESTSETUP LAYOUT	25
4.7.4 TESTDEVIATION	25
4.7.5 EUT OPERATIONDURING TEST	25
4.7.6 EUT TEST CONDITIONS	25
4.7.7 TEST RESULTS	25
<b>4.7 CONDUCTED EMISSION MEASUREMENT</b>	<b>26</b>
4.7.1 POWER LINE CONDUCTED EMISSION LIMITS	26
4.7.2 TEST PROCEDURE	27
4.7.3DEVIATIONFROMTESTSTANDARD	27
4.7.4 TESTSETUP	27
4.7.5EUT OPERATING CONDITIONS	27
4.7.6EUT TEST CONDITIONS	27

Table of Contents	Page
<b>4.7.8 TEST RESULTS</b>	<b>27</b>
<b>5. LIST OF MEASUREMENT EQUIPMENTS</b>	<b>28</b>
<b>ATTACHMENTA -RADIATED RF OUTPUT POWER</b>	<b>31</b>
<b>ATTACHMENT B - 99% OCCUPIED BANDWIDTH</b>	<b>35</b>
<b>ATTACHMENT C - SPURIOUS EMISSIONS AT ANTENNA TERMINALS</b>	<b>52</b>
<b>ATTACHMENTD - SPURIOUS RADIATED EMISSION</b>	<b>55</b>
<b>ATTACHMENTE - BAND EDGE</b>	<b>72</b>
<b>ATTACHMENTF - FREQUENCY STABILITY</b>	<b>81</b>
<b>ATTACHMENTG - PEAK TO AVERAGE RADIO</b>	<b>86</b>
<b>ATTACHMENTH -CONDUCTED EMISSION</b>	<b>103</b>

**REPORT ISSUED HISTORY**

Issued No.	Description	Issued Date
BTL-FCCP-9-1504C209	Original Issue.	May 26, 2015

## 1. CERTIFICATION

Equipment : Marshall London  
Brand Name : Marshall  
Model Name : KB-1501  
Applicant : Zound Industries Smartphones AB  
Manufacturer : Zound Industries Smartphones AB  
Address : Torsgatan 2, 111 23 Stockholm, Sweden  
Factory : Huizhou BYD Electronics Co., Ltd.  
Address : Xiangshui River, Economic Development Zone, Daya Bay, Huizhou, Guangdong, 516083, P.R.China  
Date of Test : Apr. 22, 2015 ~ May 25, 2015  
Test Sample : ENGINEERING SAMPLE  
Standard(s) : 47 CFR FCC Part 27&ANSI C63.4 : 2009  
47 CFR FCC Part 2 &ANSI/TIA-603-C-2004

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-9-1504C209) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

**Test result included in this report is only for the LTE BAND VII approval part of the product.**

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 27 & Part 2			
Standard(s) Section	Test Item	Judgment	Remark
FCC			
2.1047(d)	Modulation Characteristics	PASS	
2.1046(a) 27.50(d)(4)	Radiated RF Output	PASS	
2.1049(h) 27.53(h)	99% Occupied Bandwidth	PASS	
2.1051 27.53(h)	Spurious Emissions at Antenna Terminal	PASS	
2.1053 27.53(h)	Spurious Radiated Emissions	PASS	
27.53(h)	Band Edge Emissions	PASS	
2.1055 27.54	Frequency Stability	PASS	
2.1046(d) 27.50(d)(5)	Peak to Average Radio	PASS	
15.207	Conducted Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this test report.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{cisp}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	$U_{cisp}$ (dB)	Note
DG-C02	CISPR	150 KHz~30MHz	1.94	

B. Radiated Measurement :

Test Site	Parameter	Uncertainty
DG-CB12	All emissions, radiated	$\pm 6$ dB

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Marshall London				
Brand Name	Marshall				
Model Name	KB-1501				
Model Difference	N/A				
Product Description	Operation Frequency	<b>LTE Band VII:</b> TX:2502.5MHz~2567.5MHz RX:2622.5MHz~2687.5MHz			
	Modulation Type	QPSK;16QAM			
	Bandwidth	5M/10M/15M/20M			
	EIRP Output Power	19.47dBm			
PowerSource	#1 DC voltage supplied from AC adapter. Manufacturer/Model: BYD/BUUS050100-B01 #2 Supplied from Li-ion battery. Manufacturer/Model: BYD/M62				
Power Rating	#1 I/P: AC 100-240V 50/60Hz 200mA O/P: DC 5V 1A #2 DC 3.8V 2500mAh				

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Table for Filed Antenna @LTE Band VII

Ant.	Manufacture	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	-0.76

### 3.2 DESCRIPTION OF TEST MODES


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Items	Worst TX Mode	Channel
Radiated RF Output	QPSK/16QAM	Lowest/Middle/Highest
Spurious Radiated Emissions	QPSK	Lowest/Middle/Highest
Band Edge Emissions	QPSK/16QAM	Lowest/Highest
Frequency Stability	QPSK	Middle
99% Occupied Bandwidth	QPSK/16QAM	Lowest/Middle/Highest
Spurious Emissions at Antenna Terminal	QPSK	Lowest/Middle/Highest
Peak to Average Radio	QPSK/16QAM	Middle

For Conducted Emission	
Final Test Mode	Description
Mode 1	TX Mode

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.
- (3) Both adapter and battery are evaluated, operated the battery is the worst and recorded as below test data

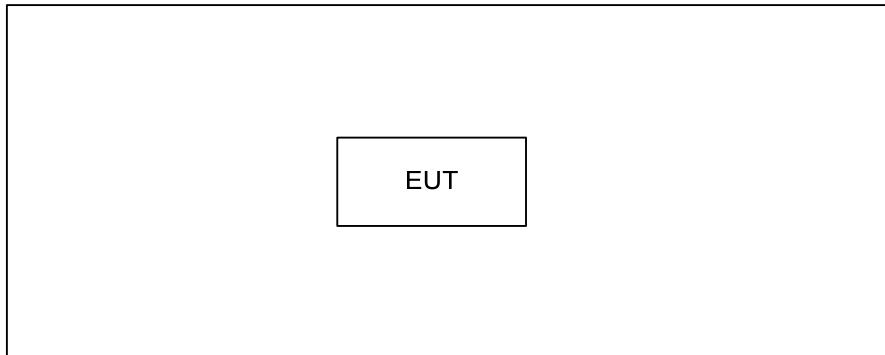**3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED****3.4 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID/IC	Series No.	Note
-	-	-	-	-	-	

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	

## 4. TEST RESULT

### 4.1 RADIATEDRF OUTPUT POWER MEASUREMENT

#### 4.1.1 LIMIT

The Radiated Peak Output Power shall be according to the specific rule Part27.50(d)(4) that “Mobile/Portable station are limited to 2 watts e.i.r.p.” and 27.50(d)(4)specified that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.

#### 4.1.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.


Spectrum Parameters	Setting
Attenuation	Auto
Center Frequency	Low / middle / high channels
Span Frequency	10MHz
RB / VB	3MHz / 3MHz for Peak

#### 4.1.3 TEST PROCEDURE

1. The EUT was set up for the maximum peak power withQPSK link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, Lowest, Middle and Highest (low, middle and high operational frequency range).
2. The conducted peak output power used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The path loss included the splitter loss, cable loss and 20dB pad loss. The spectrum set RB/VB 3MHz,then read peak power value and record to the test. (All transmitted path loss shall be considered in the test report data)
3. E.I.R.P peak power measurement. In the fully anechoic chamber, EUT placed on the1.5mheight of Turn Table, rotated the table around 360 degrees to search the maximum radiation powerand receiver antenna shall be rotated vertical and horizontal polarization to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
4. The substitution horn antennaissubstituted for EUT at the same position, and signal generator export the CW signal to the calibration antenna. Rotated the Turn Table to find the maximum radiation power. “Raw” is the spectrum reading value, “SG” is signal generator export power, “TX Gain” is calibration antenna isotropic gain value, “TX cable” is the transmitted cable loss between the calibration antenna and signal generator. The “Factor” means that the transmission path loss is equal to “SG” - “TX cable” + “TX Gain”-“Raw”.
5. Actually the real E.I.R.P peak power is equal to “Read Value” + “Factor”

#### 4.1.4 TEST SETUP LAYOUT

##### EIRP Power Measurement

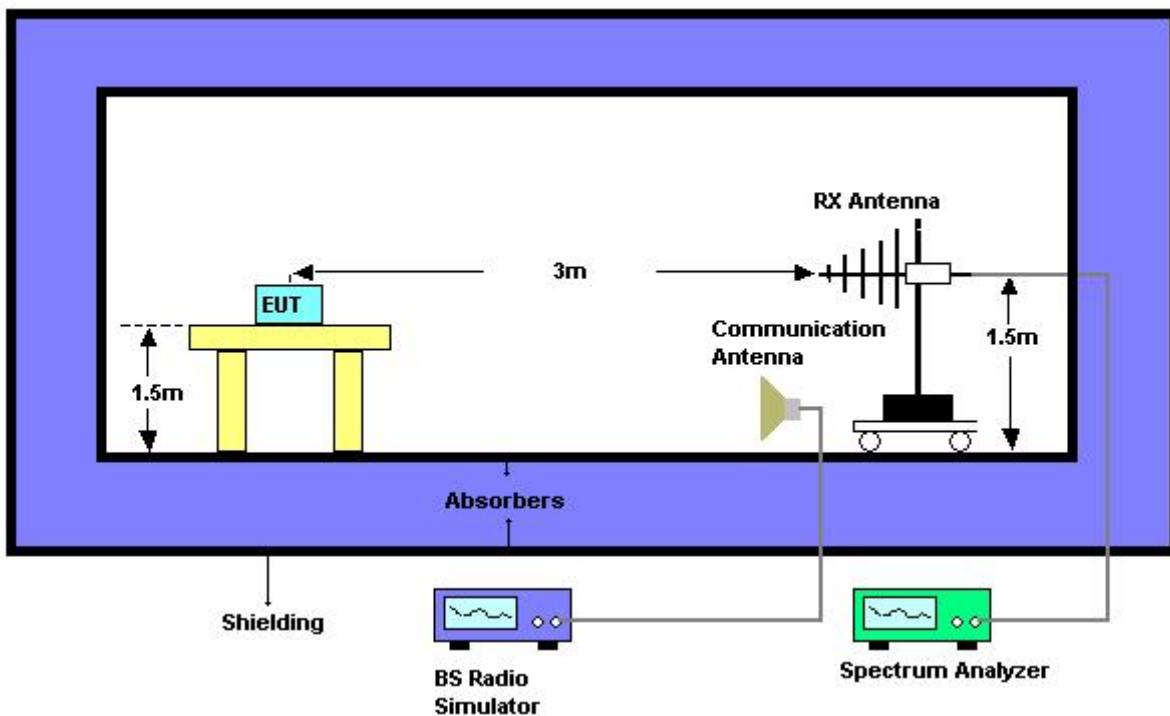

#### 4.1.5 TEST DEVIATION

There is no deviation with the original standard.

#### 4.1.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

#### 4.1.7 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 3.8V

#### 4.1.8 TEST RESULTS

Please refer to the Attachment A.

#### 4.299% OCCUPIED BANDWIDTH MEASUREMENT

##### 4.2.1 LIMIT

According to FCC 27.53(h) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

##### 4.2.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	30 kHz
VB	100 kHz
Trace	Max Hold

##### 4.2.3 TEST PROCEDURE

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Used measurement function of spectrum to measure the 99% occupied bandwidth..

##### 4.2.4 TEST SETUP LAYOUT

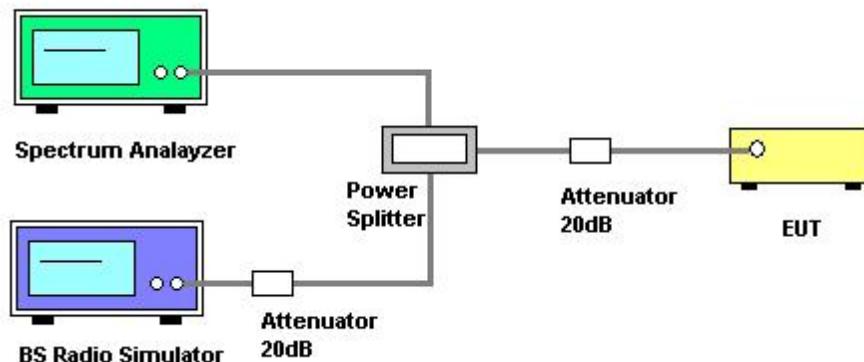

##### 4.2.5 TEST DEVIATION

There is no deviation with the original standard.

##### 4.2.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

##### 4.2.7 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 3.8V

#### **4.2.8 TEST RESULTS**

Please refer to the Attachment B.

## 4.3 SPURIOUS EMISSIONS AT ANTENNA TERMINALS MEASUREMENT

### 4.3.1 LIMIT

In the FCC 27.53(h), on any frequency outside a licensee's frequency block within GSM spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB. The limit translates in the relevant power range (1 to 0.001W). At 1W (Power Control Level 0) the specified minimum attenuation becomes 43dB and the limit of emission equal to  $-13\text{dBm}$ .

### 4.3.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Start Frequency	30MHz
Stop Frequency	10th carrier harmonic
RB / VB	1 MHz / 1MHz for Peak

### 4.3.3 TEST PROCEDURES

1. The EUT was set up for the maximum peak power with QPSK link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, Lowest, Middle, Highest (low, middle and high operational frequency range.)
2. The conducted spurious emission used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 4.5dB in the transmitted path track.
3. When the spectrum scanned from 9kHz to 3GHz, it shall be connected to the band reject filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.
4. When the spectrum scanned from 3GHz to 10GHz, it shall be connected to the high pass filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.

### 4.3.4 TEST SETUP LAYOUT

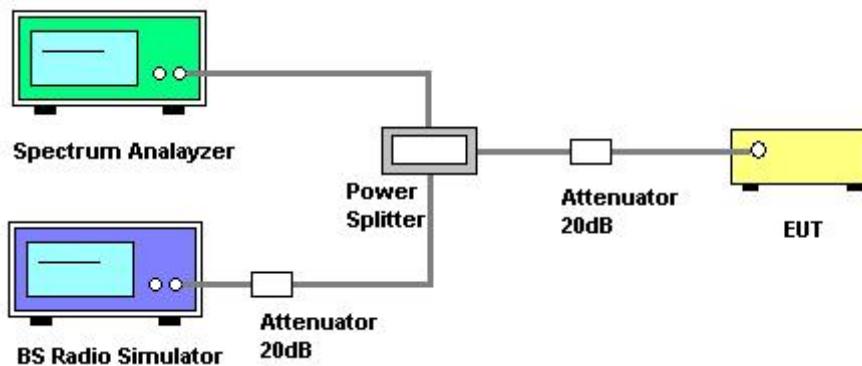

### 4.3.5 TEST DEVIATION

There is no deviation with the original standard.

### 4.3.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

#### **4.3.7 EUT TEST CONDITIONS**

Temperature: 25°C  
Relative Humidity: 55%  
Test Voltage: DC 3.8V

#### **4.3.8 TEST RESULTS**

Please refer to the Attachment C.

## 4.4 SPURIOUS RADIATED EMISSIONS MEASUREMENT

### 4.4.1 LIMIT

In the FCC 27.53(h), On any frequency outside a licensee's frequency block within GSM spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB. The limit translates in the relevant power range (1 to 0.001W). At 1W(Power Control Level 0) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm. At 0.001W(Power Control Level 15) the specified minimum attenuation becomes 13dB and the emission of limit equal to -13dBm. So the limit of emission is the same absolute specified line.

### 4.4.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Start Frequency	30 MHz
Stop Frequency	10th carrier harmonic
Detector	Positive Peak
Span	100 MHz
Sweep Time	1s
RB / VB	1 MHz / 1MHz
Attenuation	Positive Peak

### 4.4.3 TEST PROCEDURES

1. The EUT was placed on the top of the turntable in fully anechoic chamber.
2. The test shall be made in the transmitting mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. This measurement shall be repeated with the transmitter in standby mode where applicable.
4. For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable. For 1~10th carrier harmonic measurement, the receiving Horn antenna was placed 1.5 meters far away from the turntable.
5. The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
6. Replace the EUT by standard antenna and feed the RF port by signal generator.
7. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
8. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
9. The level of the spurious emission is the power level of (8) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.

#### **4.4.4 TEST SETUP LAYOUT**

This test setup layout is the same as that shown in section 4.2.4.

#### **4.4.5 TEST DEVIATION**

There is no deviation with the original standard.

#### **4.4.6 EUT OPERATION DURING TEST**

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

#### **4.4.7 EUT TEST CONDITIONS**

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 3.8V

#### **4.4.8 TEST RESULTS**

Please refer to the Attachment D.

## 4.5BAND EDGE MEASUREMENT

### 4.5.1LIMIT

According to FCC 27.53(h) specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of atleast one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. Then we measure that the bandwidth is about 300kHz and the resolution bandwidth is 3kHz.

### 4.5.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	5 MHz
RB / VB	10 kHz /30 kHz
Trace	Sample
Sweep Time	Auto

### 4.5.3 TEST PROCEDURES

1. The EUT was set up for the maximum peak power with QPSK link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels, Lowest and Highest (low and high operational frequency range.)
2. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
3. The center frequency of spectrum is the band edge frequency and span is 5MHz. RB of the spectrum is 10kHz and VB of the spectrum is 30KHz.
4. Record the Sample trace plot into the test report.

### 4.5.4 TEST SETUP LAYOUT

This test setup layout is the same as that shown in section 4.2.4.

### 4.5.5 TEST DEVIATION

There is no deviation with the original standard.

### 4.5.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

### 4.5.7 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 3.8V

#### **4.5.8 TEST RESULTS**

Please refer to the Attachment E.

## 4.6 FREQUENCY STABILITY MEASUREMENT

### 4.6.1 LIMIT

According to the FCC part 27.54 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 0.1 ppm of the received frequency from the base station. The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with the 2.1055(a)(1)  $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$ .

### 4.6.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the BS Simulator.

Spectrum Parameters	Setting
Frequency Error	The maximum of transmit frequency error

### 4.6.3 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the BS Simulator.
2. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.
3. BS simulator used the frequency error function and measured the peak frequency error. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. EUT is connected the external power supply to control the DC input power. The various Volts from the minimum 3.1 Volts to 4.3 Volts. Each step shall be record the frequency error rate.
5. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
6. Extreme temperature rule is  $0^{\circ}\text{C} \sim 40^{\circ}\text{C}$ .

### 4.6.4 TEST SETUP LAYOUT

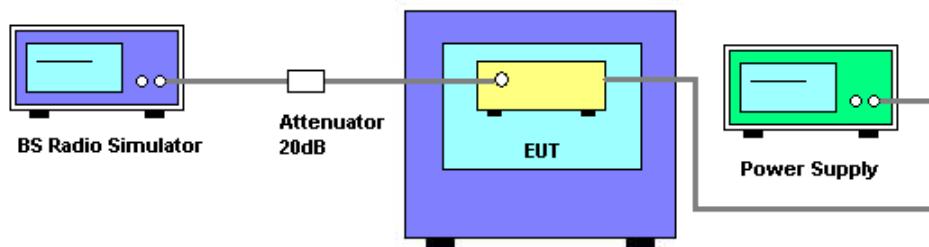

### 4.6.5 TEST DEVIATION

There is no deviation with the original standard.

### 4.6.6 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### **4.6.7EUT TEST CONDITIONS**

Temperature: 25°C  
Relative Humidity: 55%  
Test Voltage: DC 3.8V

#### **4.6.8TEST RESULTS**

Please refer to the Attachment F.

## **4.7 PEAK TO AVERAGE RADIO**

### **4.7.1 LIMIT**

In the FCC 27.50)Peak transmit power shall be measured over any interval of continuous transmission using instrumentation calibrated in terms of rms-equivalent voltage.

The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

To measure transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission shall not exceed 13 dB.

### **4.7.2 TEST PROCEDURES**

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;

### **4.7.3 TEST SETUP LAYOUT**

Please refer to section 3.4 in this report.

### **4.7.4 TEST DEVIATION**

There is no deviation with the original standard.

### **4.7.5 EUT OPERATION DURING TEST**

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

### **4.7.6 EUT TEST CONDITIONS**

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 3.8V

### **4.7.7 TEST RESULTS**

Please refer to the Attachment G.

## 4.7 CONDUCTED EMISSION MEASUREMENT

### 4.7.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


#### 4.7.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the groundplane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.7.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.7.4 TEST SETUP

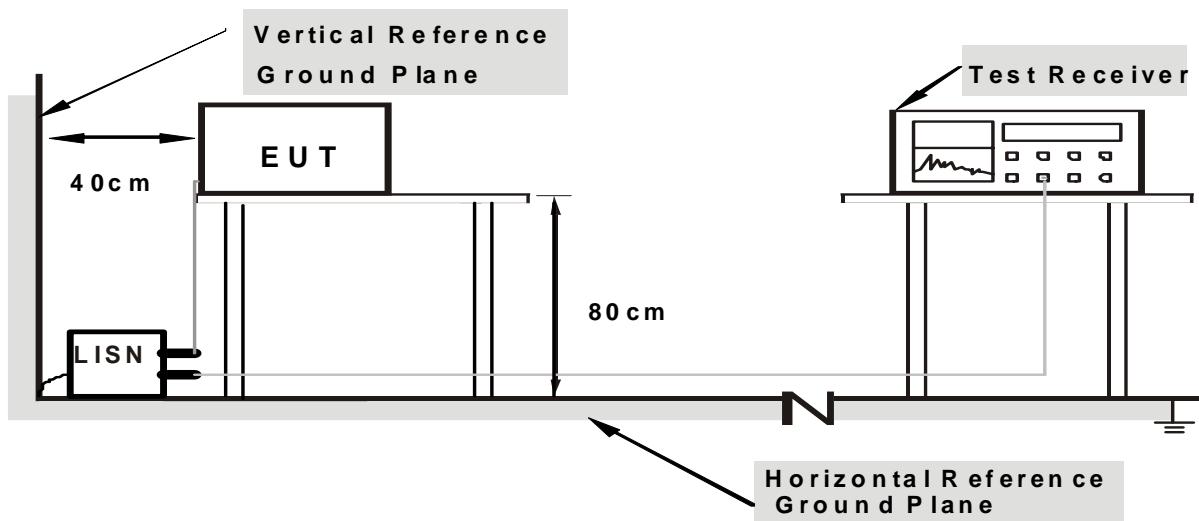

**Note:** 1. Support units were connected to second LISN .  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

#### 4.7.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

#### 4.7.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: 120V/60Hz

#### 4.7.8 TEST RESULTS

Please refer to the Attachment H.

## 5. LIST OF MEASUREMENT EQUIPMENTS

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Mar. 28, 2016
2	LISN	R&S	ENV216	101447	Mar. 28, 2016
3	Test Cable	N/A	C_17	N/A	Mar.13, 2016
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Mar. 28, 2016
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 28, 2016
6	wideband radio communication tester	R&S	CMW500	152372	Jan. 30, 2016
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1 -01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 28, 2016
2	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC012645B	980221	Oct. 22, 2015
3	Amplifier	Agilent	8449B	3008A02274	Nov. 02, 2015
4	Double Ridged Guide Antenna	ETS-LINDGREN	3115	00075846	Mar. 28, 2016
5	Antenna	SCHWARZBECK	VULB 9160	9160-3231	Mar. 28, 2016
6	Test Cable	N/A	CL-CB12-001	N/A	Oct. 22, 2015
7	Test Cable	N/A	CL-CB12-004	N/A	Oct. 22, 2015
8	Test Cable	N/A	CL-CB12-006	N/A	Oct. 22, 2015
9	Controller	CT	SC100	N/A	N/A
10	Wireless Communication Test SET	(8960 Series ) Agilent	E5515C	MY48364183	Mar. 15, 2016
11	Band Reject Filter	Wairwright Instruments GmbH	WRCG 1710/1785-169 0/1805-60/12SS	38	Mar. 04, 2016
12	Band Reject Filter	Wairwright Instruments GmbH	WRG 824/849-810/8 63-60/9SS	7	Mar. 04, 2016
13	Band Reject Filter	Wairwright Instruments GmbH	WRG 880/915-860/9 35-60/9SS	14	Mar.04, 2016
14	Band Reject Filter	Wairwright Instruments GmbH	WRG 1850/1910-183 0/1930-60/10SS	17	Mar. 04, 2016
15	wideband radio communication tester	R&S	CMW500	152372	Jan. 30, 2016

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015
2	wideband radio communication tester	R&S	CMW500	152372	Jan. 30, 2016

<b>Band Edge Measurement</b>					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015
2	wideband radio communication tester	R&S	CMW500	152372	Jan. 30, 2016

<b>99% Occupied Bandwidth Measurement</b>					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015
2	wideband radio communication tester	R&S	CMW500	152372	Jan. 30, 2016

<b>Frequency Stability Measurement</b>					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015
2	wideband radio communication tester	R&S	CMW500	152372	Jan. 30, 2016

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

## ATTACHMENT A - RADIATED RF OUTPUT POWER

Test Mode:	TX Mode
------------	---------

LTE Band VII				Radiated Power (dBm)			Max. Limit (dBm)	Result
BW	Modulation	RB Size	V/H	Lowest	Middle	Highest		
5M	QPSK	1RB	V	10.75	13.09	12.36	33	Complies
			H	19.37	19.35	19.47	33	Complies
			V	12.43	13.81	12.91	33	Complies
			H	19.21	19.22	19.32	33	Complies
			V	14.15	13.53	12.37	33	Complies
			H	19.21	19.22	19.25	33	Complies
			V	14.05	12.84	12.18	33	Complies
			H	19.20	19.17	19.22	33	Complies
10M	16-QAM	1RB	V	13.05	14.13	12.31	33	Complies
			H	19.05	19.07	19.21	33	Complies
			V	13.73	13.64	12.66	33	Complies
			H	19.11	19.20	19.27	33	Complies
			V	14.11	13.36	12.25	33	Complies
			H	19.16	19.22	19.16	33	Complies
			V	12.57	13.16	13.91	33	Complies
			H	19.24	19.20	19.18	33	Complies
15M	16-QAM	1RB	V	13.05	14.13	12.31	33	Complies
			H	19.05	19.07	19.21	33	Complies
			V	13.73	13.64	12.66	33	Complies
			H	19.11	19.20	19.27	33	Complies
			V	14.11	13.36	12.25	33	Complies
			H	19.16	19.22	19.16	33	Complies
			V	12.57	13.16	13.91	33	Complies
			H	19.24	19.20	19.18	33	Complies
20M	16-QAM	1RB	V	13.05	14.13	12.31	33	Complies
			H	19.05	19.07	19.21	33	Complies
			V	13.73	13.64	12.66	33	Complies
			H	19.11	19.20	19.27	33	Complies
			V	14.11	13.36	12.25	33	Complies
			H	19.16	19.22	19.16	33	Complies
			V	12.57	13.16	13.91	33	Complies
			H	19.24	19.20	19.18	33	Complies

**REMARKS:**

1. Radiated Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB) + Ant Gain(dBi)
2. Correction Factor(dB) = Power SplitterLoss(dB) + Cable Loss(dB)
3. The EUT does employ a power control function by which the output power is controlled from +28dBm to +19dBm (nominal) by 2dB steps. Consequently the EUT meets the requirement of Part24.232(c).
4. The antenna gain is -0.76dBi

Test Mode:	TX Mode
------------	---------

Bandwidth	Modulation	RB size	Conducted Power		
			Lowest	Middle	Highest
5MHz	QPSK	1	21.58	21.83	21.69
		1	21.49	21.74	21.67
		1	21.51	22.01	21.8
		12	20.78	20.82	20.74
		12	20.76	20.76	20.73
		12	20.72	20.77	20.68
		25	20.68	20.85	20.66
	16-QAM	1	21.04	20.7	20.86
		1	20.92	20.97	20.94
		1	21.08	21.14	21.02
		12	19.82	19.79	19.84
		12	19.58	19.8	19.65
		12	19.66	19.83	19.84
		25	19.80	19.79	19.68

Bandwidth	Modulation	RB size	Conducted Power		
			Lowest	Middle	Highest
10MHz	QPSK	1	21.73	21.71	21.68
		1	21.87	21.91	21.72
		1	21.41	21.73	21.89
		25	20.73	20.79	20.7
		25	20.69	20.91	20.78
		25	20.71	20.76	20.75
		50	20.84	20.74	20.77
	16-QAM	1	20.99	20.69	21
		1	20.84	21.15	20.6
		1	20.92	20.97	20.93
		25	19.96	20.04	19.71
		25	19.81	19.89	19.69
		25	19.84	19.87	19.71
		50	19.67	19.85	19.81

Bandwidth	Modulation	RB size	Conducted Power		
			Lowest	Middle	Highest
15MHz	QPSK	1	21.55	21.83	21.81
		1	21.67	22.01	21.8
		1	21.38	22.01	21.87
		36	21.06	20.87	20.66
		36	20.68	20.95	20.83
		36	20.81	20.84	20.77
		75	20.83	20.97	20.8
	16-QAM	1	21.2	21.33	21.32
		1	20.99	21.04	20.92
		1	20.64	20.81	21.19
		36	19.99	19.84	19.9
		36	19.77	19.87	19.9
		36	19.85	19.82	19.84
		75	19.70	19.85	19.92

Bandwidth	Modulation	RB size	Conducted Power		
			Lowest	Middle	Highest
20MHz	QPSK	1	21.67	21.74	22.01
		1	21.44	22.31	21.83
		1	20.83	21.50	21.88
		50	21.96	20.88	20.83
		50	20.79	20.64	20.71
		50	20.78	<b>20.78</b>	20.77
		100	20.72	20.83	20.79
	16-QAM	1	21.05	20.97	20.84
		1	20.75	21.09	20.72
		1	20.17	21.14	20.72
		50	20.72	19.87	19.84
		50	19.78	19.85	19.8
		50	19.82	19.96	19.83
		100	19.79	19.91	19.92


#### REMARKS:

1. Radiated Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB) + Ant Gain(dBi)
5. Correction Factor(dB) = Power SplitterLoss(dB) + Cable Loss(dB)
6. The EUT does employ a power control function by which the output power is controlled from +28dBm to +19dBm (nominal) by 2dB steps. Consequently the EUT meets the requirement of Part24.232(c).
7. The antenna gain is -0.76dBi


## ATTACHMENT B - 99% OCCUPIED BANDWIDTH

Test Mode : TX Mode Configuration QPSK-5M/25RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	4.514	4.996	Complies
Middle	4.514	4.999	Complies
Highest	4.549	5.064	Complies


### 99% Occupied Bandwidth channel Lowest

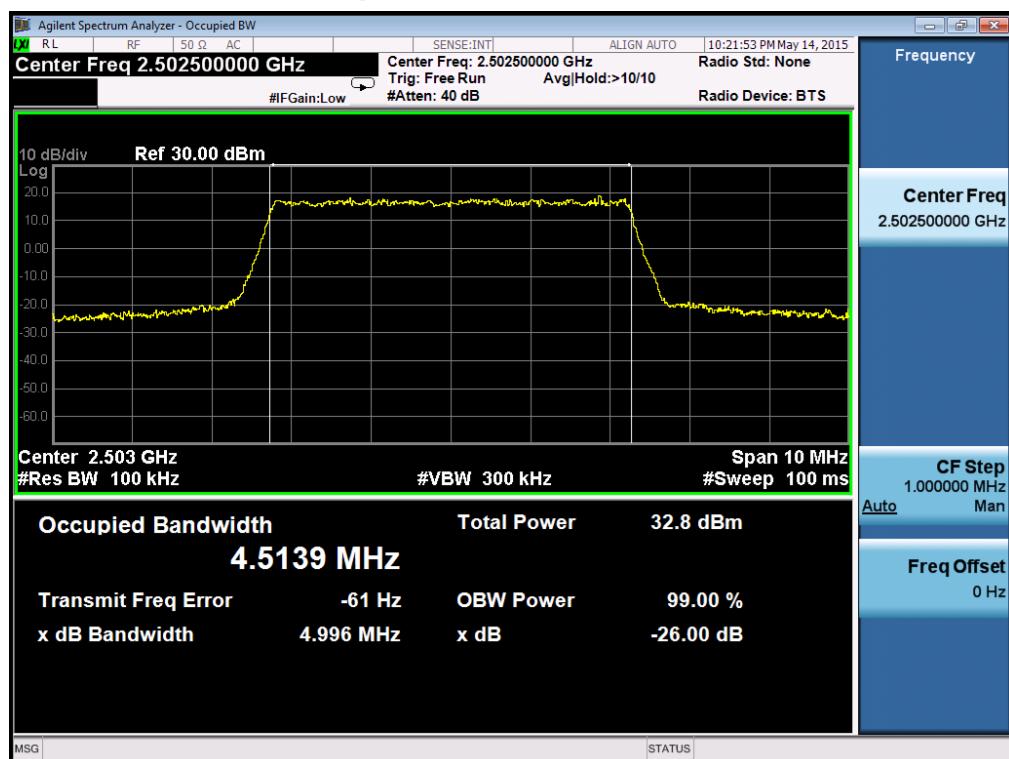

### 99% Occupied Bandwidth channel Middle

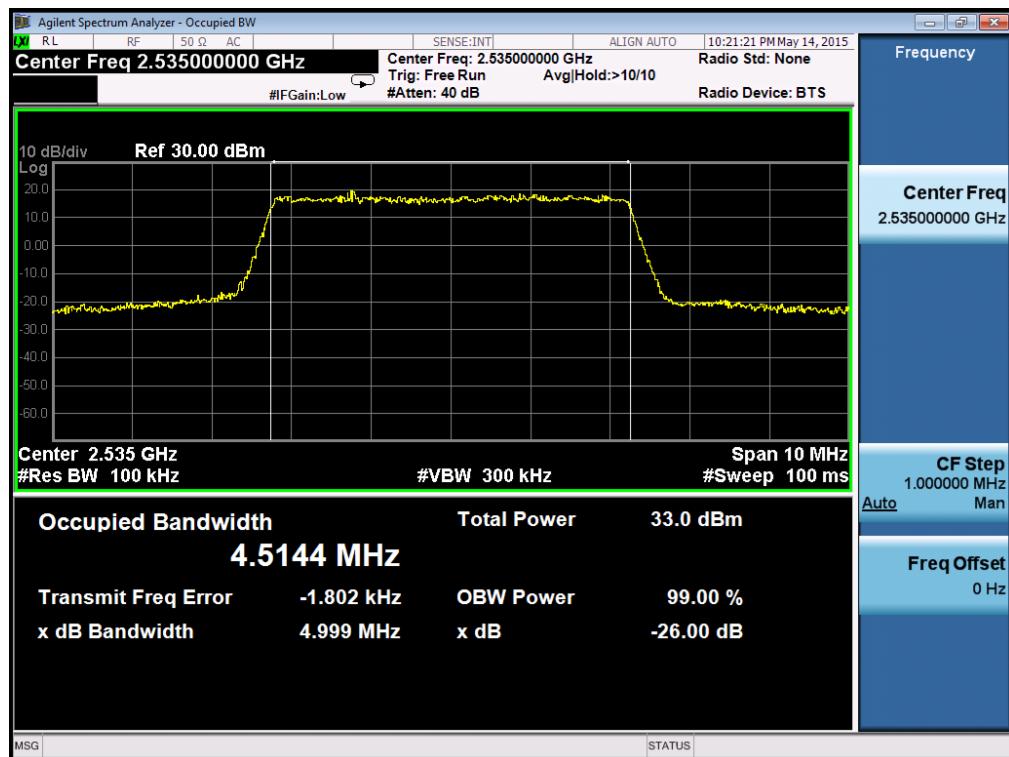


### 99% Occupied Bandwidth channel Highest

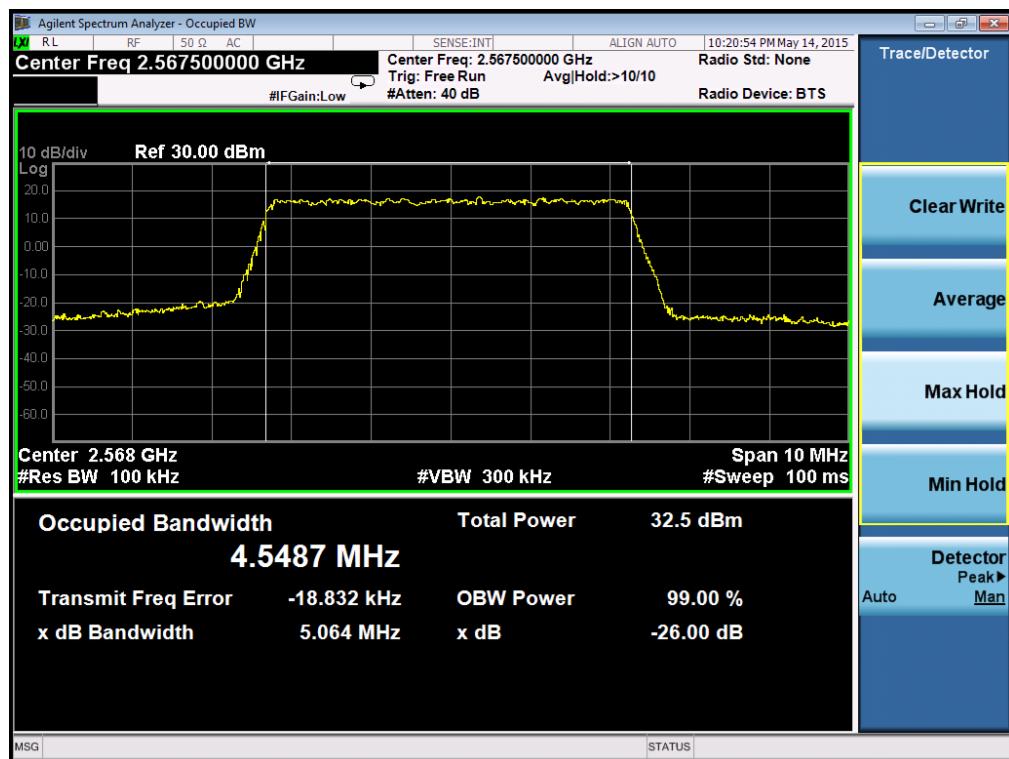


Test Mode : TX Mode ConfigurationQPSK-10M/50RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	9.013	10.100	Complies
Middle	8.975	9.927	Complies
Highest	8.997	9.960	Complies


### 99% Occupied Bandwidth channel Lowest

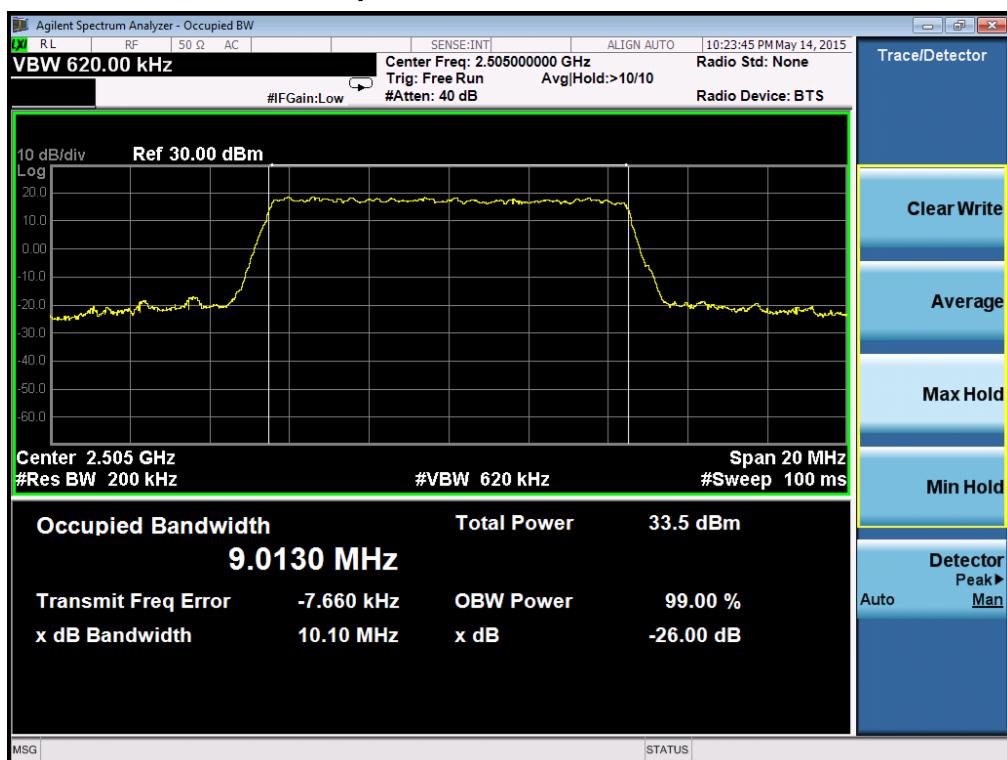

### 99% Occupied Bandwidth channel Middle

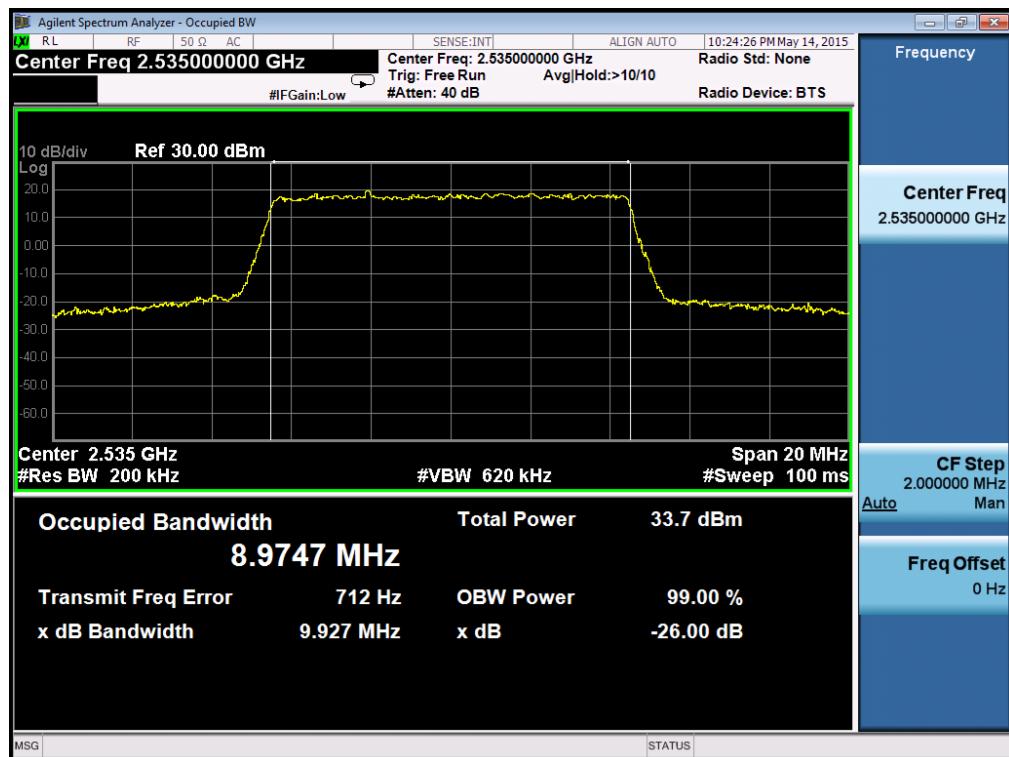


### 99% Occupied Bandwidth channel Highest

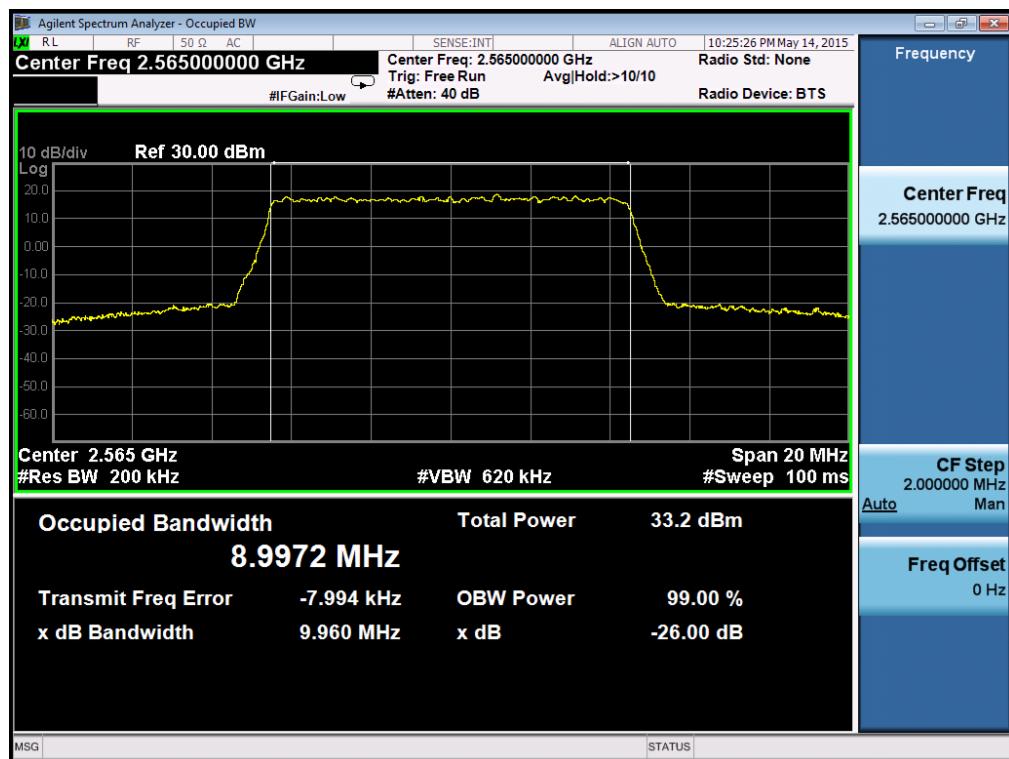


Test Mode : TX Mode ConfigurationQPSK-15M/75RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	13.508	14.890	Complies
Middle	13.411	14.740	Complies
Highest	13.481	14.910	Complies


### 99% Occupied Bandwidth channel Lowest

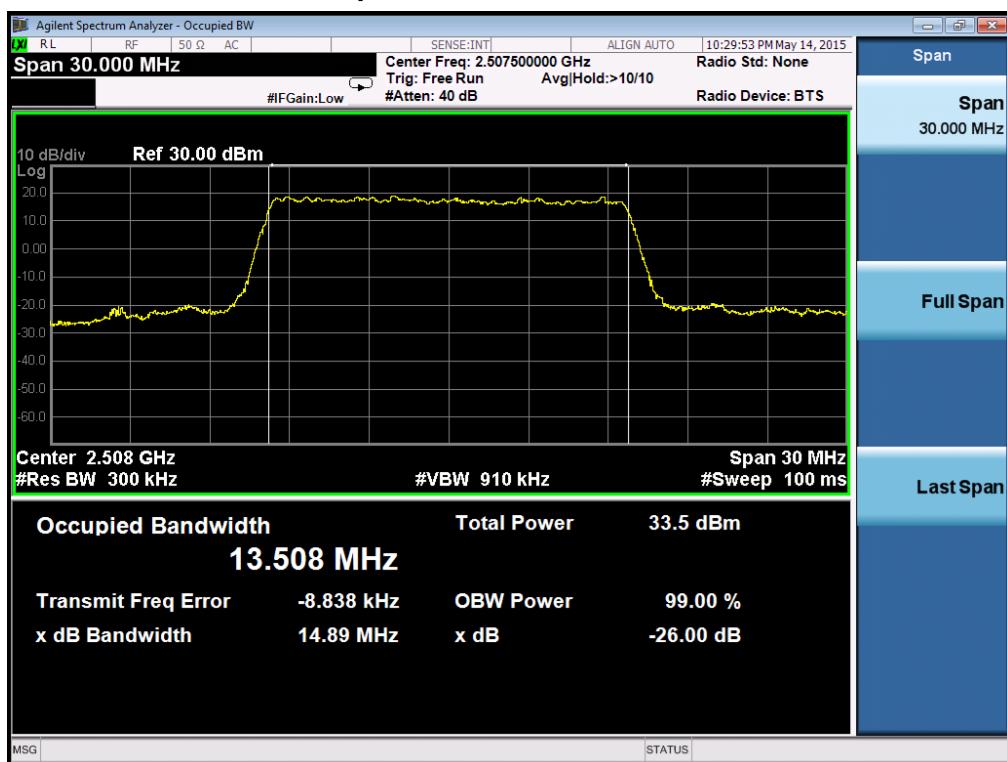

### 99% Occupied Bandwidth channel Middle

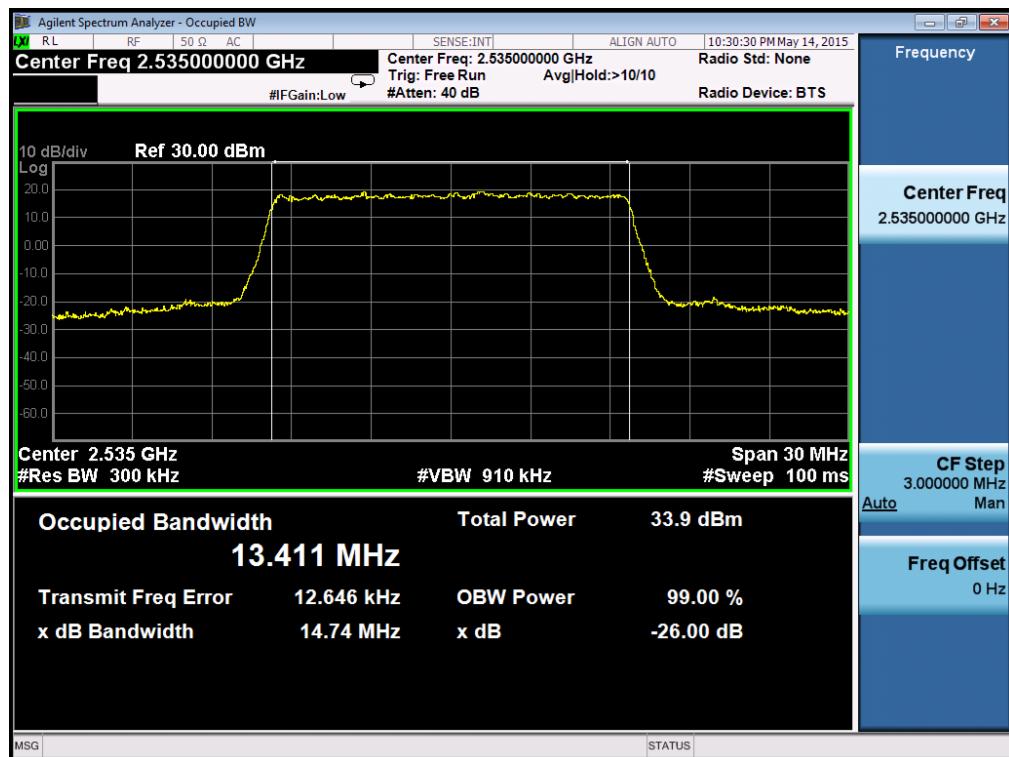


### 99% Occupied Bandwidth channel Highest

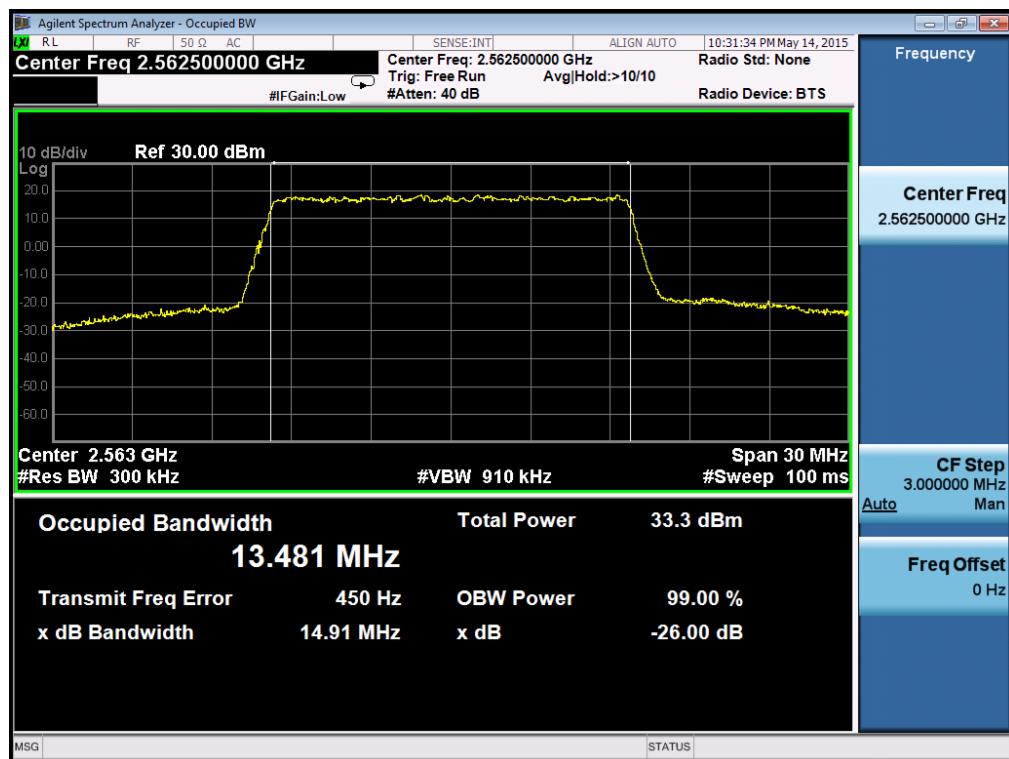


Test Mode : TX Mode Configuration QPSK-20M/100RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	17.972	19.540	Complies
Middle	17.863	19.470	Complies
Highest	17.997	19.790	Complies


### 99% Occupied Bandwidth channel Lowest

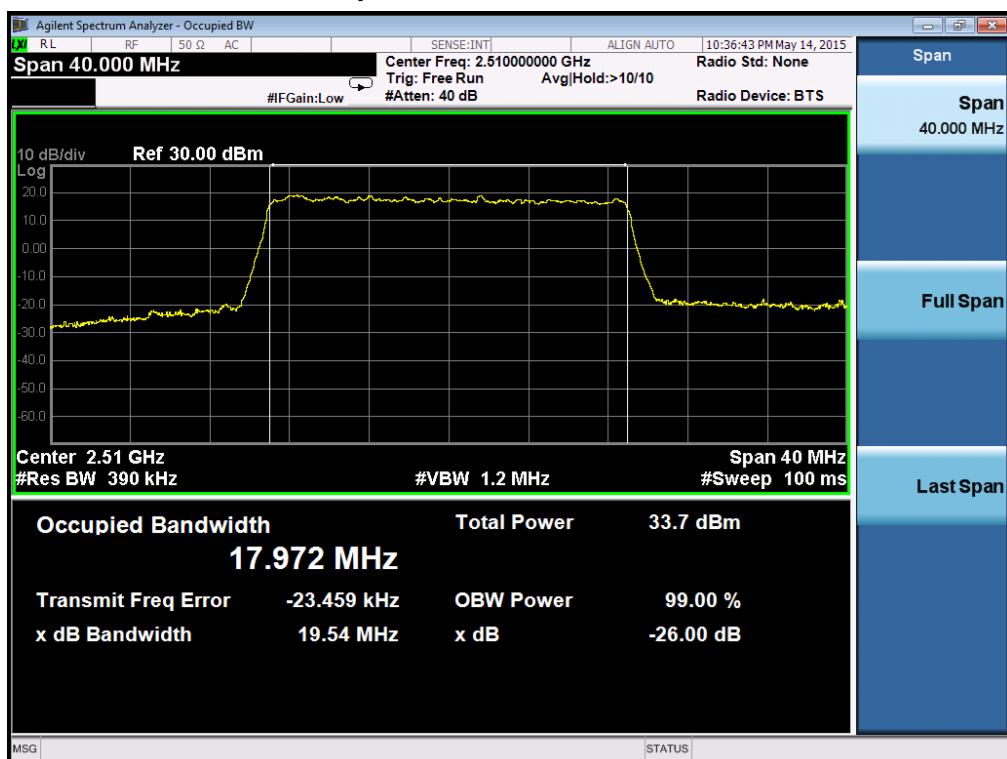

### 99% Occupied Bandwidth channel Middle

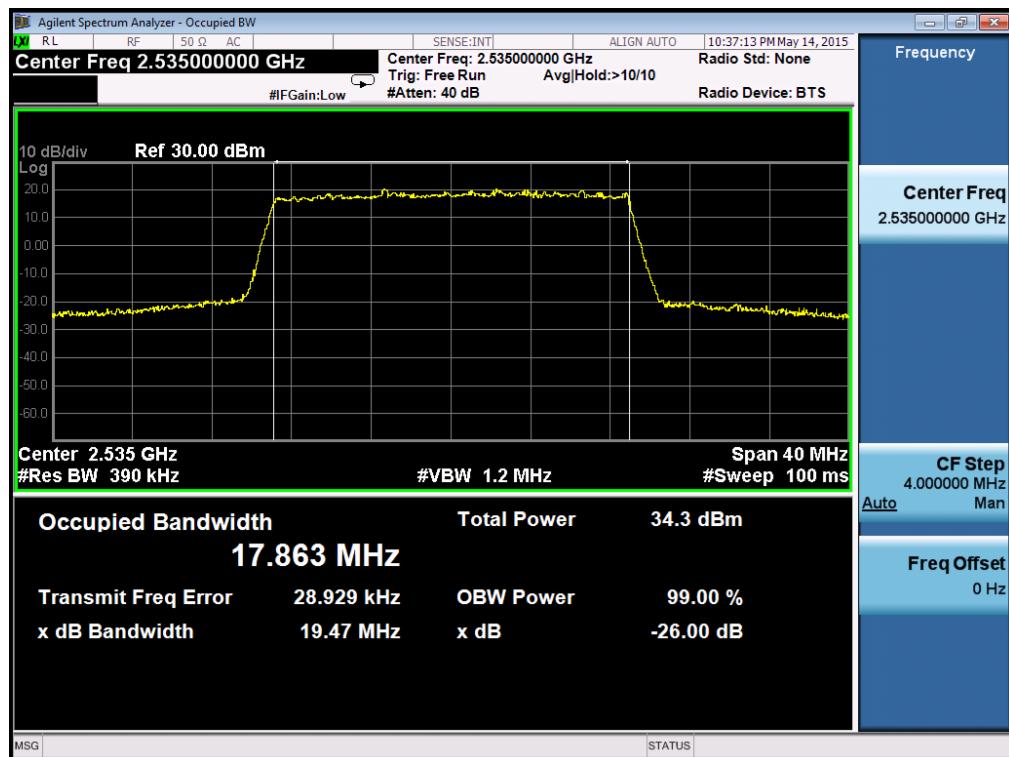


### 99% Occupied Bandwidth channel Highest

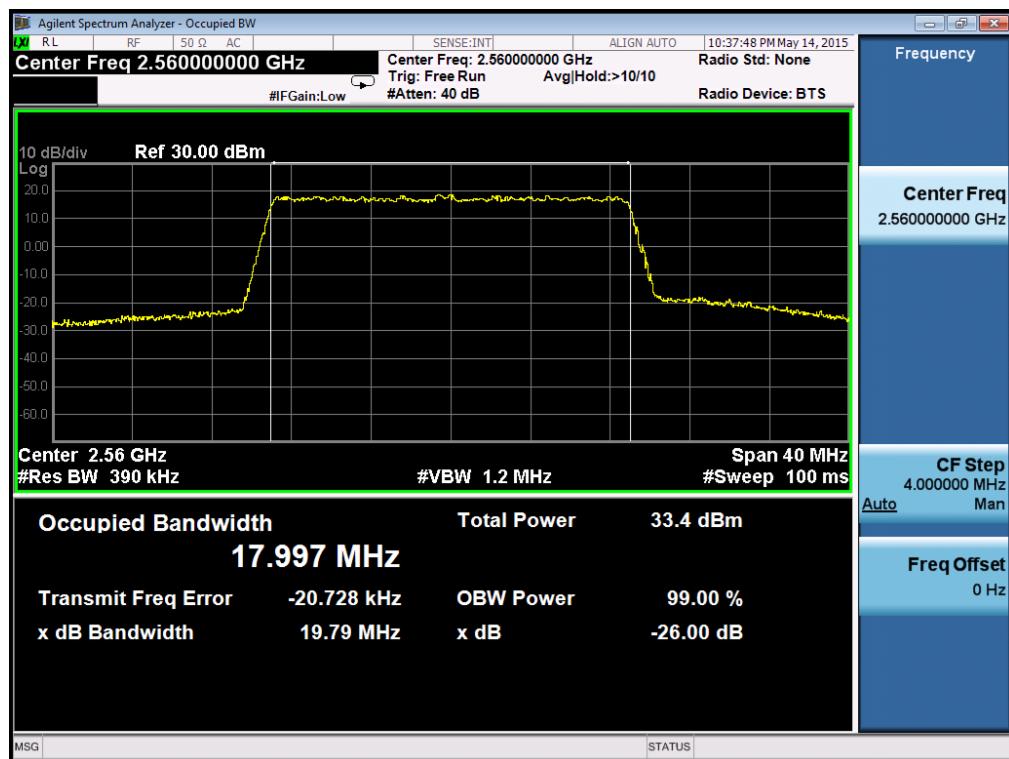


Test Mode : TX Mode Configuration16-QAM-5M//25RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	4.519	5.084	Complies
Middle	4.512	5.044	Complies
Highest	4.507	5.011	Complies


### 99% Occupied Bandwidth channel Lowest

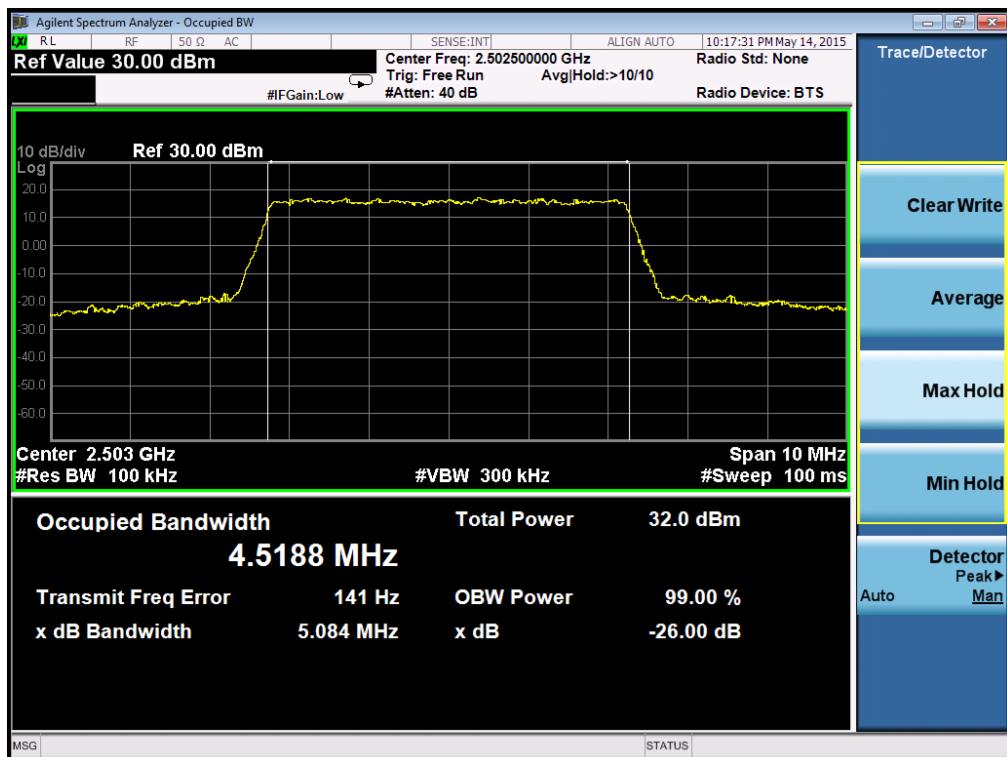

### 99% Occupied Bandwidth channel Middle

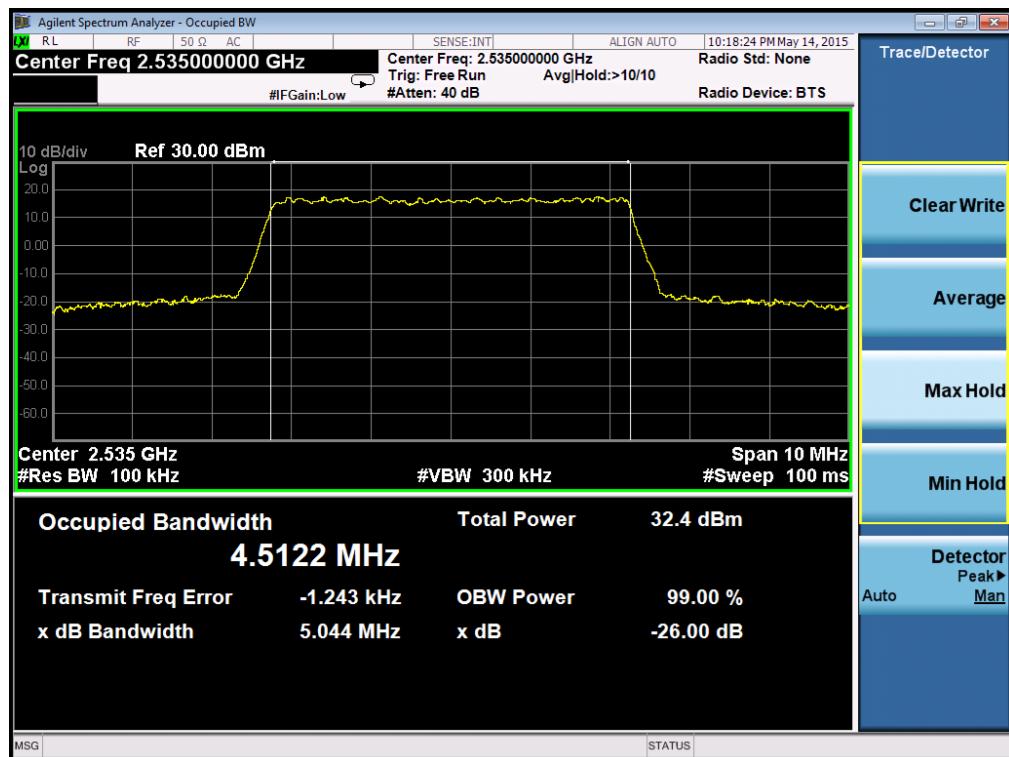


### 99% Occupied Bandwidth channel Highest

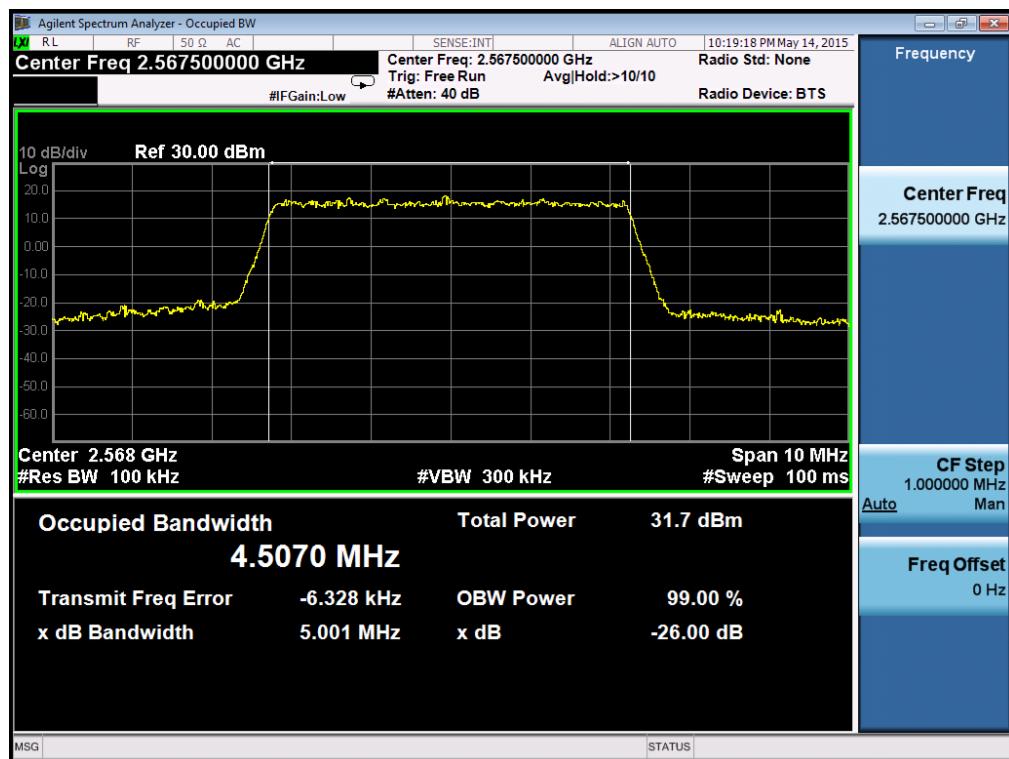


Test Mode : TX Mode Configuration16-QAM-10M/50RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	8.990	9.965	Complies
Middle	8.998	9.922	Complies
Highest	9.022	9.948	Complies


### 99% Occupied Bandwidth channel Lowest

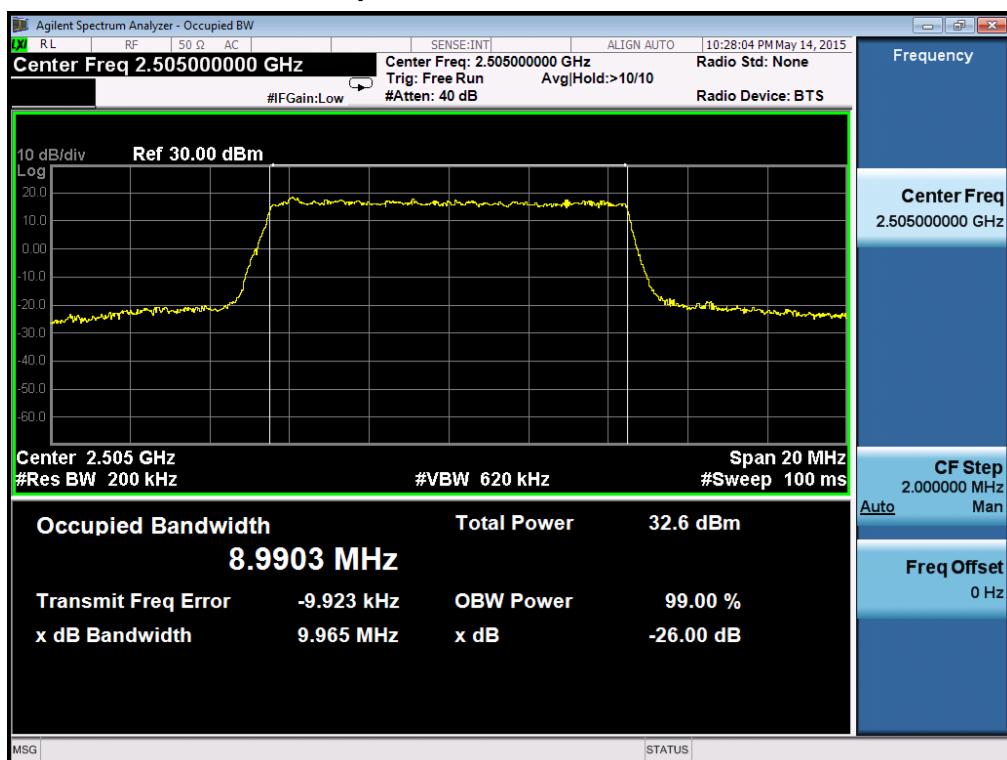

### 99% Occupied Bandwidth channel Middle

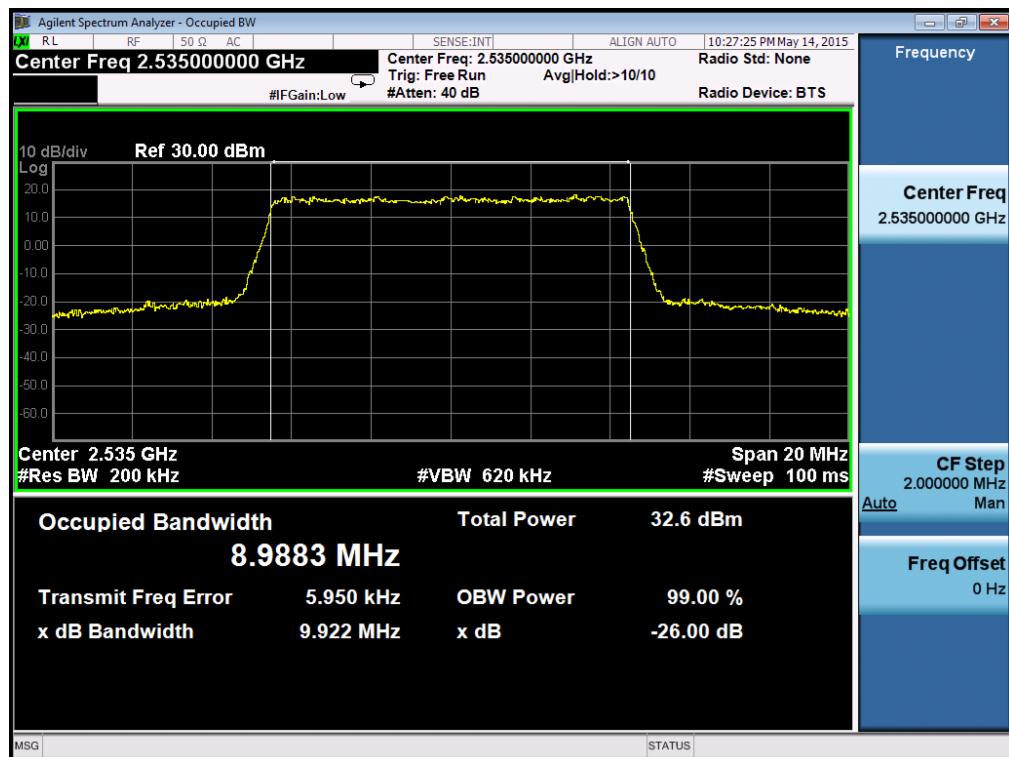


### 99% Occupied Bandwidth channel Highest

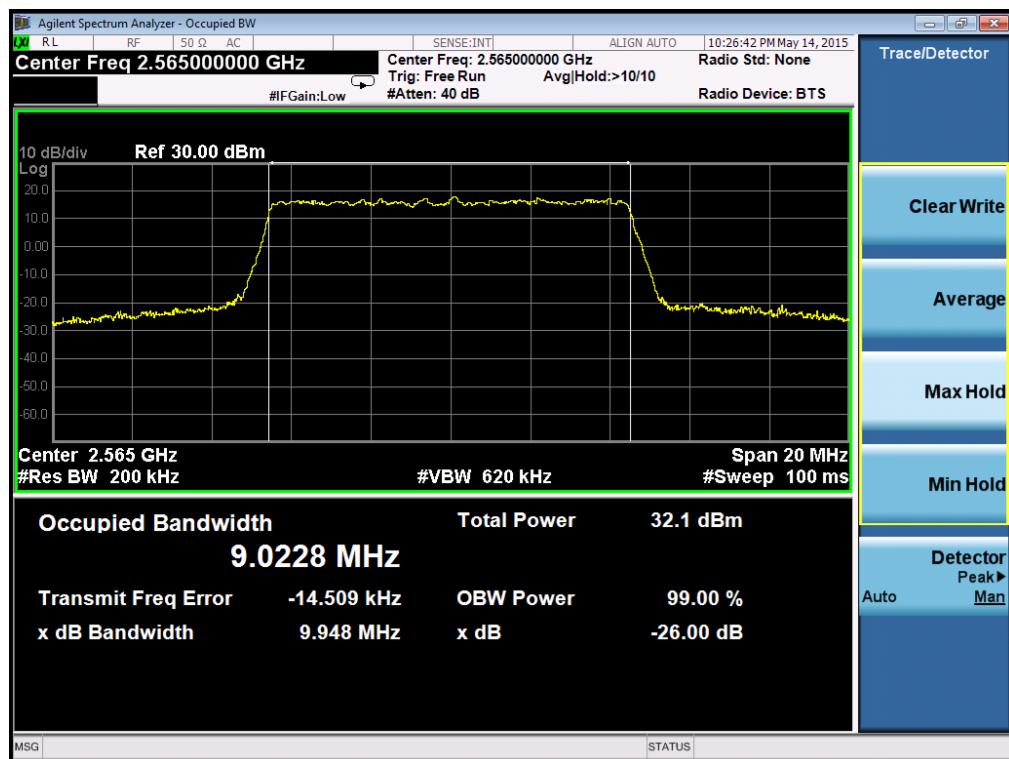


Test Mode : TX Mode Configuration16-QAM-15M/75RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	13.482	14.800	Complies
Middle	13.451	14.830	Complies
Highest	13.480	14.750	Complies


### 99% Occupied Bandwidth channel Lowest

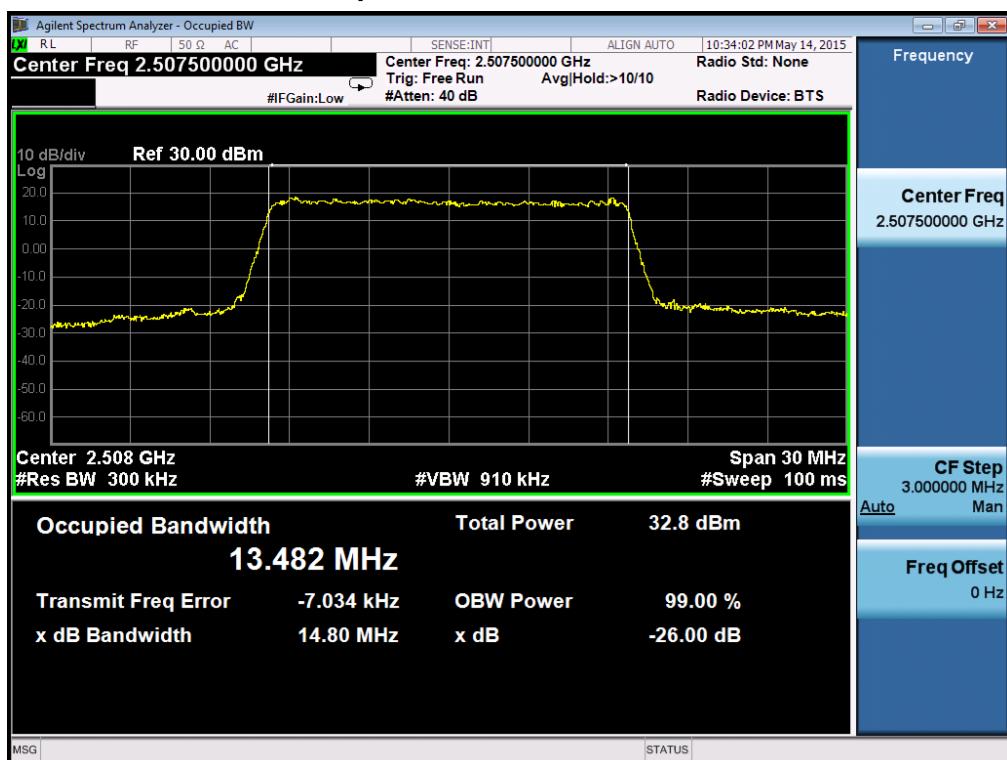

### 99% Occupied Bandwidth channel Middle

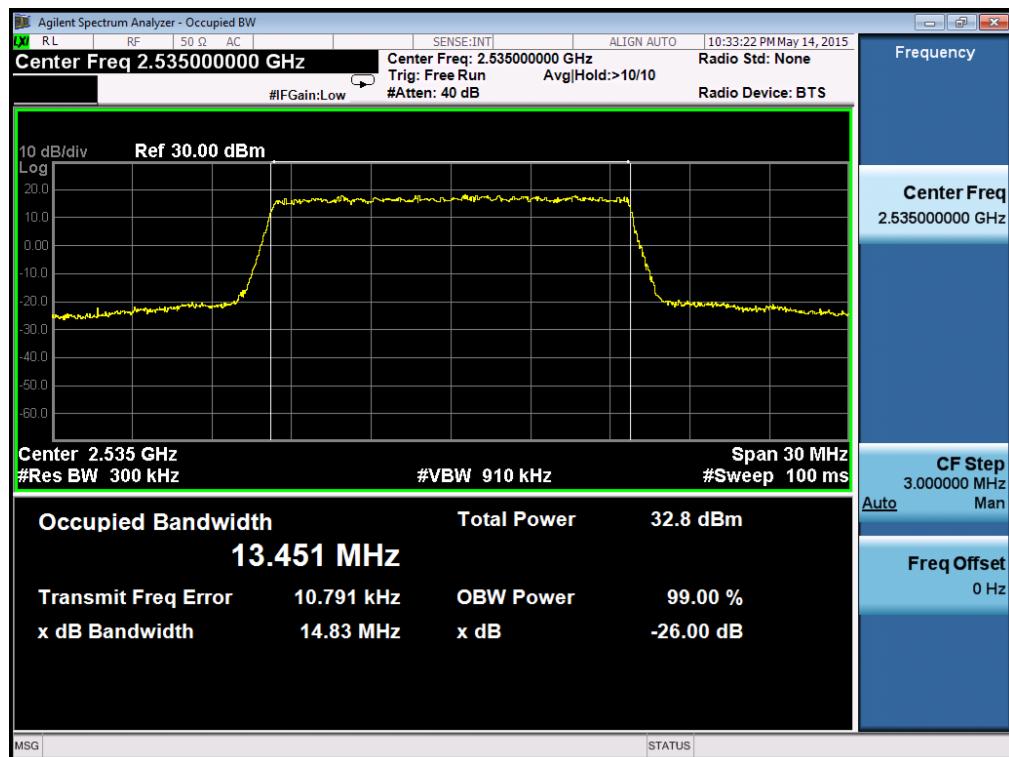


### 99% Occupied Bandwidth channel Highest

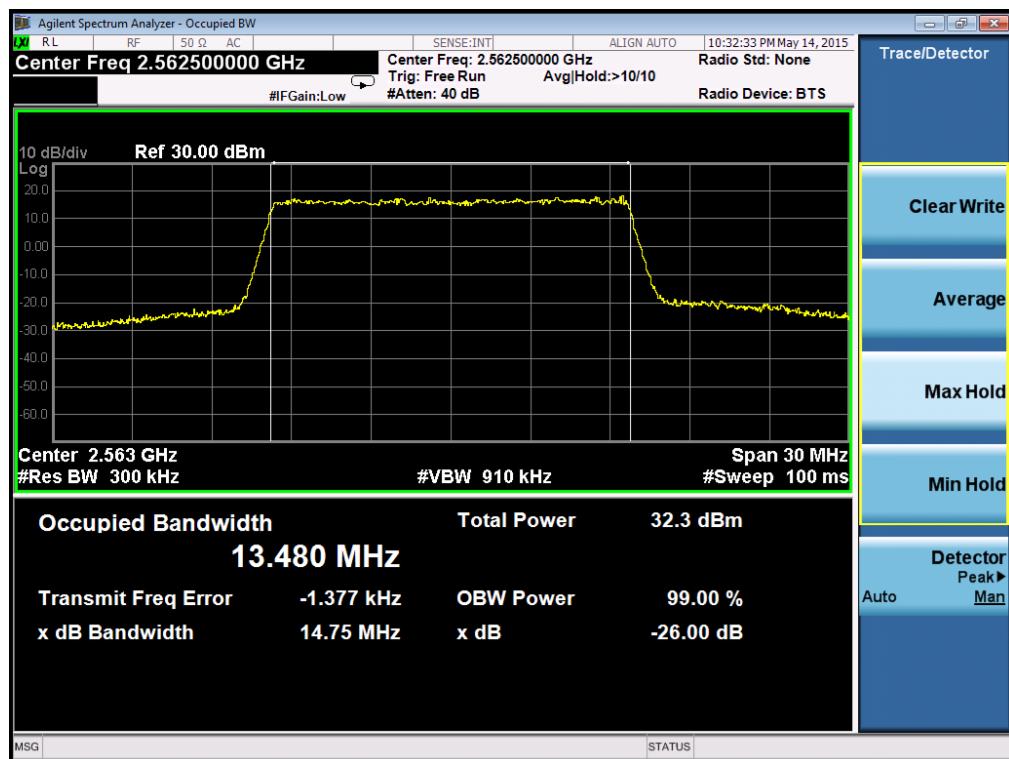


Test Mode : TX Mode Configuration16-QAM-20M/100RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	17.949	19.620	Complies
Middle	17.918	19.470	Complies
Highest	17.961	19.680	Complies


### 99% Occupied Bandwidth channel Lowest

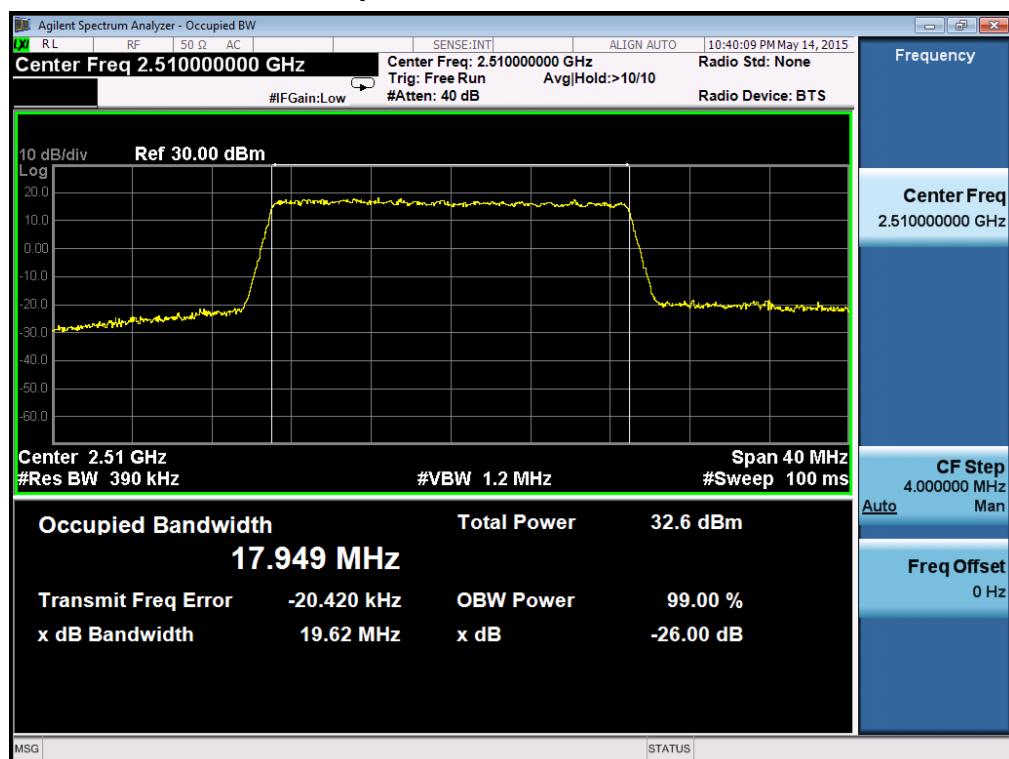

### 99% Occupied Bandwidth channel Middle

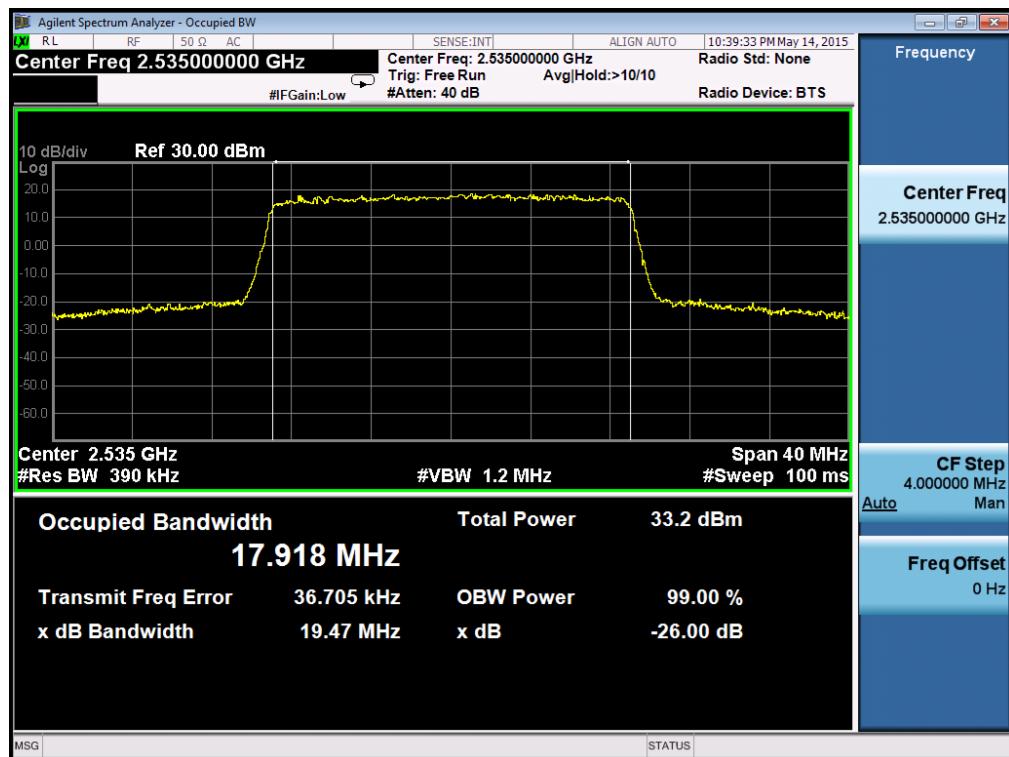

### 99% Occupied Bandwidth channel Highest

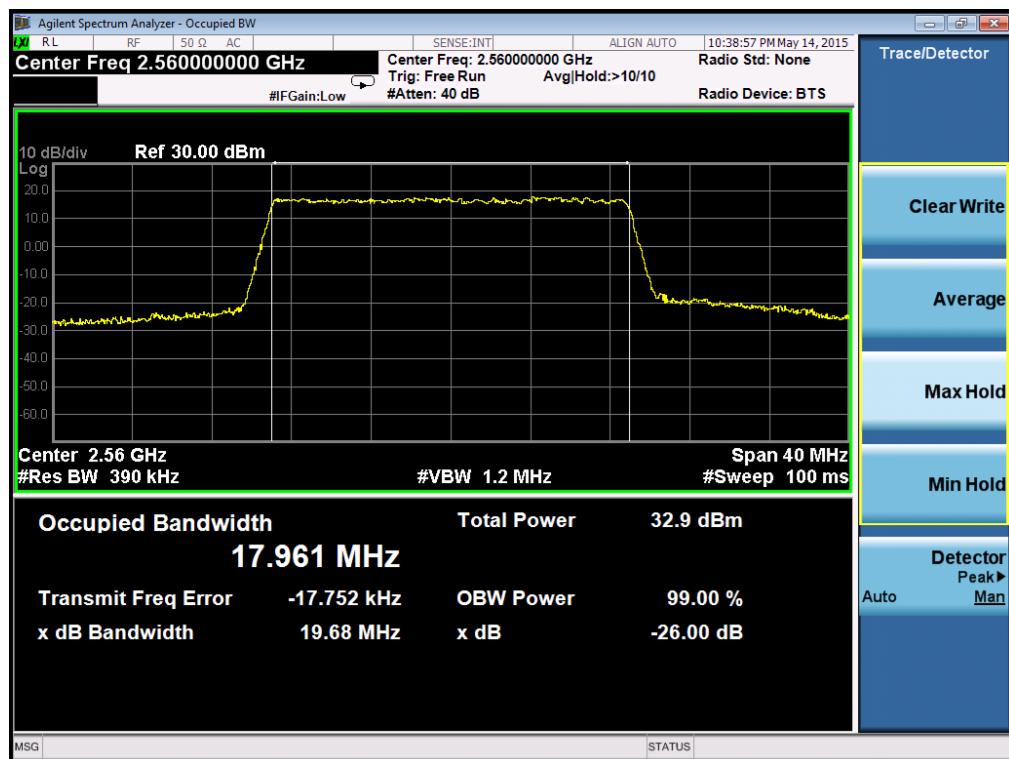

## **ATTACHMENT C - SPURIOUS EMISSIONS AT ANTENNA TERMINALS**

### Conducted Spurious of Configuration-QPSK-5M/1RB channel Middle



### Conducted Spurious of Configuration-QPSK-10M/1RB channel Middle



### Conducted Spurious of Configuration-QPSK-15M/1RB channel Middle




### Conducted Spurious of Configuration-QPSK-20M/1RB channel Middle



## ATTACHMENTD - SPURIOUS RADIATED EMISSION

Test Mode:

TX Channel Middle-QPSK 5M/1RB

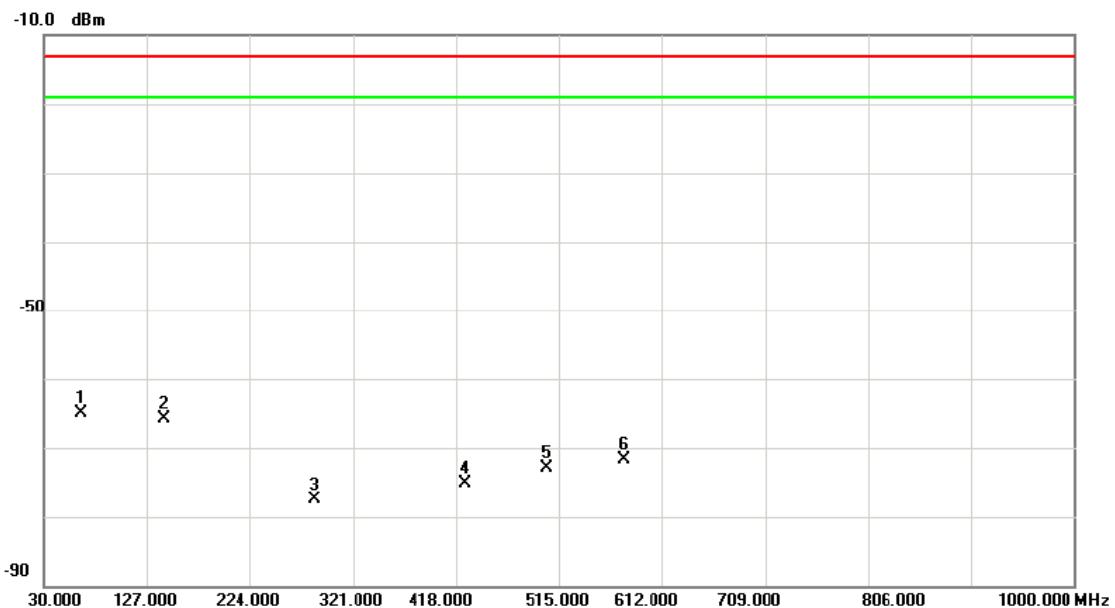**Vertical**

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Margin	
			Level dBm	Factor dB	ment dBm		dBm	Detector
1	*	64.9200	-66.09	1.10	-64.99	-13.00	-51.99	peak
2		143.4900	-68.18	2.50	-65.68	-13.00	-52.68	peak
3		285.1100	-80.00	2.43	-77.57	-13.00	-64.57	peak
4		426.7300	-79.57	4.55	-75.02	-13.00	-62.02	peak
5		503.3600	-80.52	7.54	-72.98	-13.00	-59.98	peak
6		576.1100	-79.86	8.10	-71.76	-13.00	-58.76	peak