

Prüfbericht - Nr.: 50321015 001
Test Report No.:

Seite 38 von 118
Page 38 of 118

4.1.5 Equivalent Isotropically Radiated Power

Result:

Pass

Test Specification

Test standard : RSS-247 Issue 2 February 2017 Clause 5.4(a)&(d)

Limits : For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz: 4 Watt (36dBm)

Kind of test site : Shielded Room

Test Setup

Date of testing : 27.11.2019~25.12.2019

Input voltage : AC 120V, 60Hz

Operational mode : Test mode of BLE, LoRa DTS, LoRa FHSS, FSK FHSS

Test channel : Lo, Mi, Hi

Temperature : 21.1°C

Relative humidity : 57%

Atmospheric pressure : 101 kPa

Table 5: Test result of E.I.R.P. for BLE, LoRa DTS, LoRa FHSS and FSK FHSS

Modulation Type and Operation band	Channel	Channel Frequency (MHz)	Peak Output Power (dBm)	Antenna Gain (dBi)	E.I.R.P. (dBm)	Limit (dBm)
1. BLE 2402MHz~2480MHz	Low Channel	2402	2.56	2.44	5.00	36
	Mid Channel	2440	2.43	2.44	4.87	36
	High Channel	2480	1.3	2.44	3.74	36
2. LoRa 500KHz DTS 902.5MHz~926.5	Low Channel	902.5	19.99	-1.69	18.30	36
	Mid Channel	914.5	20.03	-1.69	18.34	36
	High Channel	926.5	20.02	-1.69	18.33	36
3. LoRa 500KHz DTS 903MHz~914.2MHz	Low Channel	903	20.28	-1.69	18.59	36
	Mid Channel	907.8	20.64	-1.69	18.95	36
	High Channel	914.2	20.35	-1.69	18.66	36
4. LoRa 500KHz DTS 923.3MHz~926.9MHz	Low Channel	923.3	20.25	-1.69	18.56	36
	Mid Channel	925.1	20.27	-1.69	18.58	36
	High Channel	926.9	20.22	-1.69	18.53	36
5. LoRa 250KHz FHSS 902.3MHz~926.7MHz	Low Channel	902.3	20.60	-1.69	18.91	36
	Mid Channel	914.3	20.27	-1.69	18.58	36
	High Channel	926.7	20.33	-1.69	18.64	36
6. LoRa 125KHz FHSS 902.3MHz~914.9MHz	Low Channel	902.3	20.90	-1.69	19.21	36
	Mid Channel	908.5	20.82	-1.69	19.13	36
	High Channel	914.9	20.64	-1.69	18.95	36

Prüfbericht - Nr.: 50321015 001

Test Report No.:

Seite 39 von 118

Page 39 of 118

7. LoRa 125KHz FHSS 902.2MHz~927.8MHz	Low Channel	902.2	21.23	-1.69	19.54	36
	Mid Channel	915	20.91	-1.69	19.22	36
	High Channel	927.8	20.49	-1.69	18.80	36
8. FSK 150Kbps FHSS 902.4MHz~927.6MHz	Low Channel	902.4	20.08	-1.69	18.38	36
	Mid Channel	914.8	20.32	-1.69	18.63	36
	High Channel	927.6	19.07	-1.69	17.38	36
9. FSK 50Kbps FHSS 902.2MHz~927.8MHz	Low Channel	902.2	20.86	-1.69	19.17	36
	Mid Channel	915	20.39	-1.69	18.7	36
	High Channel	927.8	20.06	-1.69	18.91	36
10. FSK 5Kbps FHSS 902.2MHz~927.8MHz	Low Channel	902.2	20.53	-1.69	18.84	36
	Mid Channel	915	20.39	-1.69	18.70	36
	High Channel	927.8	20.23	-1.69	18.54	36
11. FSK 250Kbps FHSS 902.5MHz~927.5MHz	Low Channel	902.5	21.01	-1.69	19.32	36
	Mid Channel	915	20.63	-1.69	18.94	36
	High Channel	927.5	20.31	-1.69	18.62	36

Prüfbericht - Nr.: 50321015 001
Test Report No.:

Seite 40 von 118
Page 40 of 118

4.1.6 Power Spectral Density

Result:

Pass

Test Specification

Test standard : FCC Part 15.247(e)
RSS-247 Issue 2 February 2017 Clause 5.2(b)
Basic standard : ANSI C63.10: 2013
Limits : Not more than 8 dBm in any 3 kHz band
Kind of test site : Shielded Room

Test Setup



Date of testing : 27.11.2019~28.11.2019
Input voltage : AC 120V, 60Hz
Operational mode : On, BLE, LoRa DTS
Test channel : Lo, Mi, Hi
Temperature : 21°C
Relative humidity : 57%
Atmospheric pressure : 101 kPa

Table 6: Test result of Power Spectral Density for BLE, LoRa DTS


Modulation Type and Operation band	Channel	Channel Frequency (MHz)	Measured Power Density (dBm)	Limit (dBm)	Result
1. BLE 2402MHz~2480MHz	Low Channel	2402	-14.54	8.0	Pass
	Mid Channel	2440	-14.56	8.0	Pass
	High Channel	2480	-15.52	8.0	Pass
2. LoRa 500KHz DTS 902.5MHz~926.5	Low Channel	902.5	7.69	8.0	Pass
	Mid Channel	914.5	7.11	8.0	Pass
	High Channel	926.5	7.05	8.0	Pass
3. LoRa 500KHz DTS 903MHz~914.2MHz	Low Channel	903	7.64	8.0	Pass
	Mid Channel	907.8	7.58	8.0	Pass
	High Channel	914.2	7.60	8.0	Pass
4. LoRa 500KHz DTS 923.3MHz~926.9MHz	Low Channel	923.3	7.57	8.0	Pass
	Mid Channel	925.1	7.56	8.0	Pass
	High Channel	926.9	7.31	8.0	Pass

Figure 4: Power Spectral Density

1. BLE, Maximum Conducted Output Power, 2402MHz~2480MHz

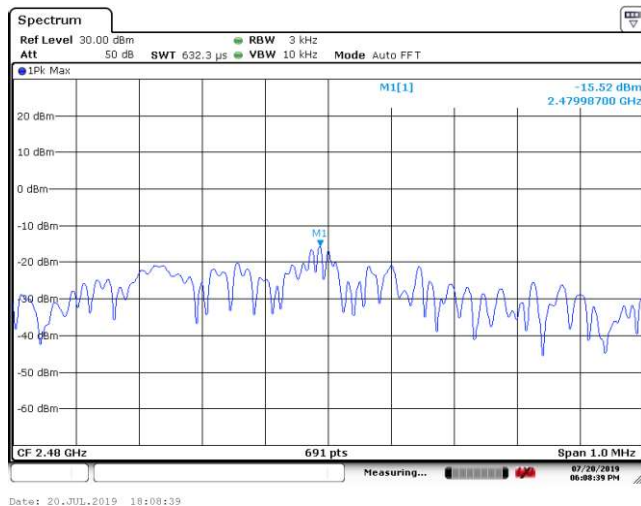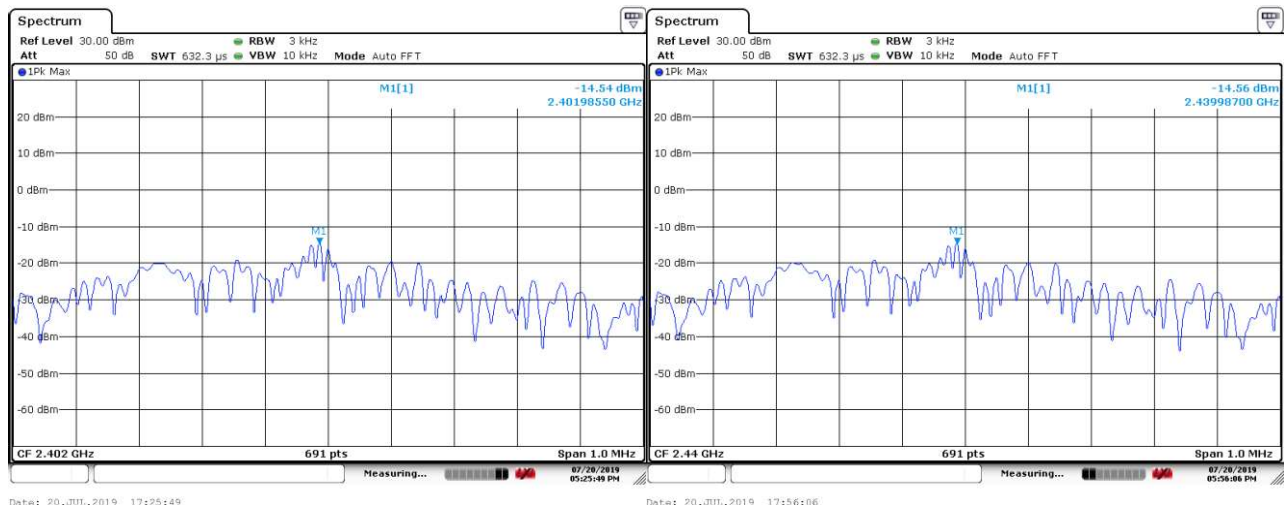


2. LoRa 500KHz DTS, Maximum Conducted Output Power, 902.5MHz~926.5

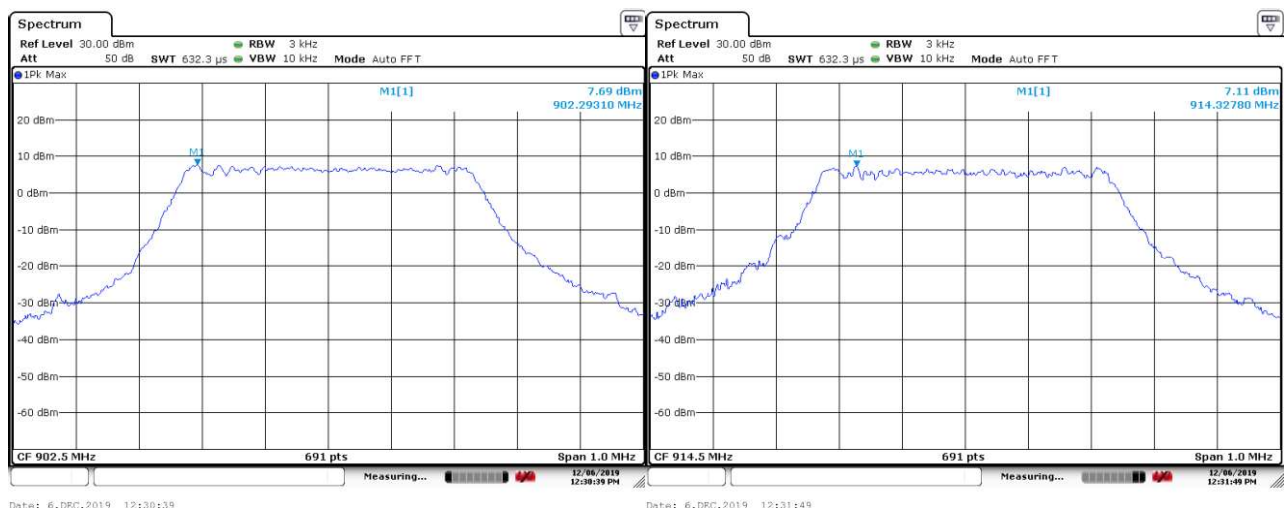


Prüfbericht - Nr.: 50321015 001
Test Report No.:

Seite 42 von 118
Page 42 of 118

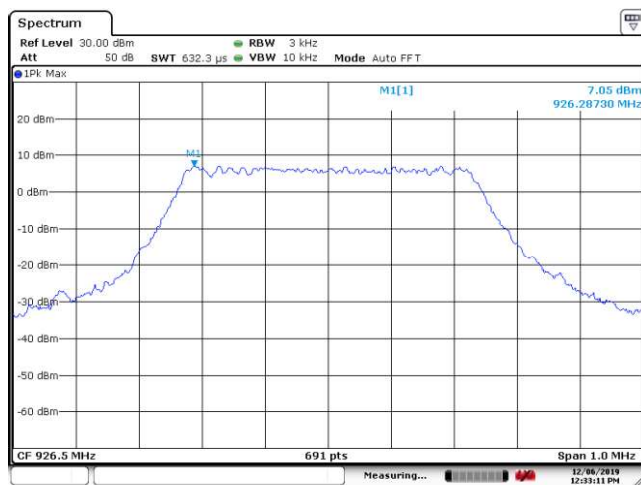


Date: 6. DEC. 2019 12:33:12


3. LoRa 500KHz DTS, Maximum Conducted Output Power, 903MHz~914.2MHz

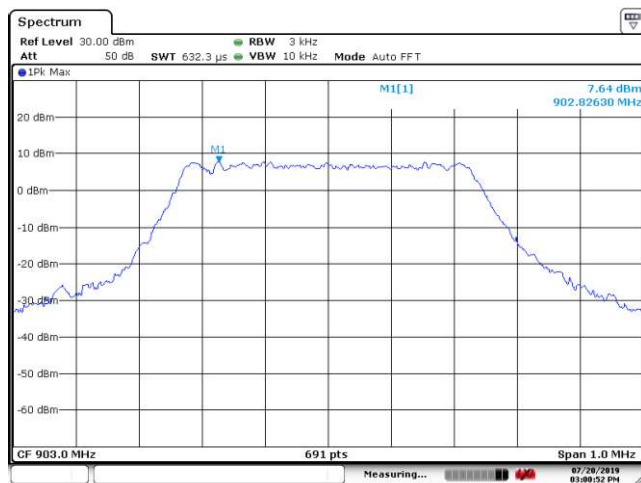

Date: 20. JUL. 2019 15:00:52

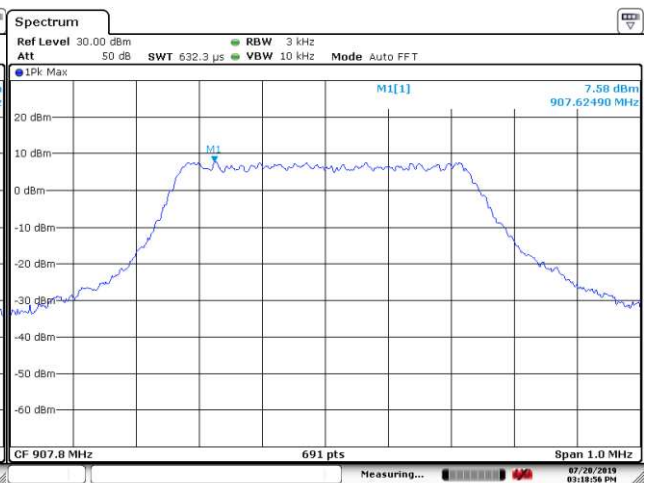

Date: 20. JUL. 2019 15:18:56


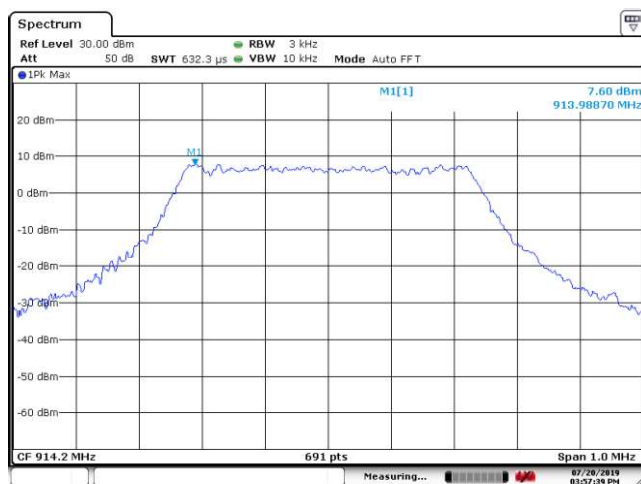


Date: 20. JUL. 2019 15:57:39

Prüfbericht - Nr.: 50321015 001
Test Report No.:

Seite 43 von 118
Page 43 of 118

4. LoRa 500KHz DTS, Maximum Conducted Output Power, 923.3MHz~926.9MHz

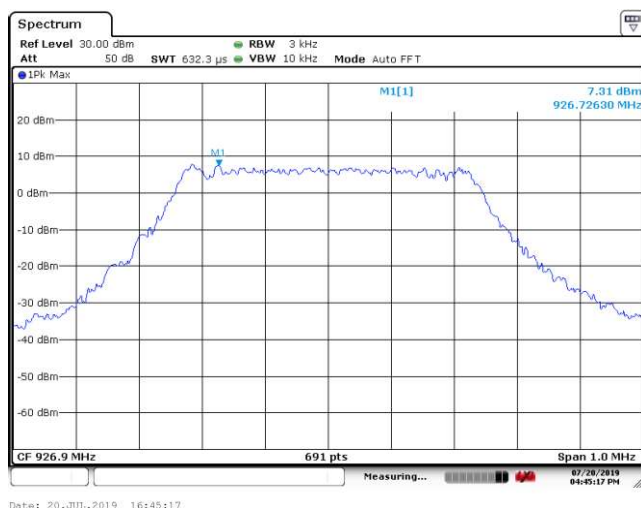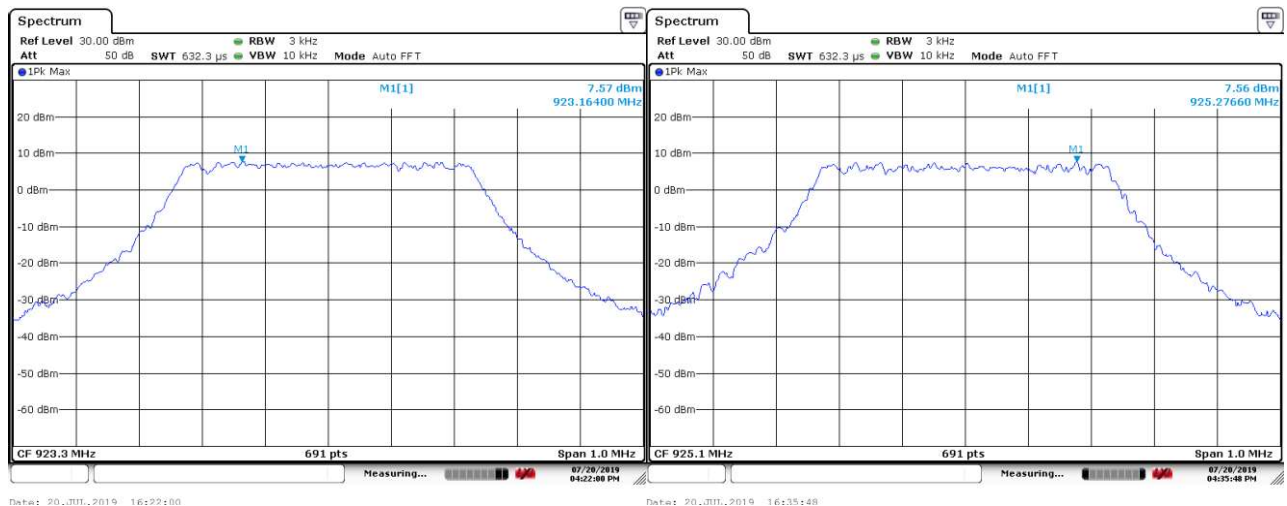

Prüfbericht - Nr.: 50321015 001
Test Report No.:

Seite 44 von 118
Page 44 of 118

4.1.7 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Result:

Pass

Test Specification
Test standard : FCC Part 15.247(d)
RSS-247 Issue 2 February 2017 Clause 5.5
Basic standard : ANSI C63.10: 2013
Limits : 20dB (below that in the 100kHz bandwidth within
the band that contains the highest level of the
desired power);
Kind of test site : Shielded Room

Test Setup



Date of testing : 27.11.2019~25.12.2019
Input voltage : AC 120V, 60Hz
Operational mode : Test mode of BLE, LoRa DTS, LoRa FHSS, FSK
FHSS
Test channel : Lo, Mi, Hi
Temperature : 21.1°C
Relative humidity : 57%
Atmospheric pressure : 101 kPa

All emissions are more than 20dB below fundamental, compliance is achieved as well.


Figure 5: Conducted Spurious Emission

1. BLE, Conducted Spurious Emission and Band edge, 2402MHz~2480MHz

Conducted Spurious Emission

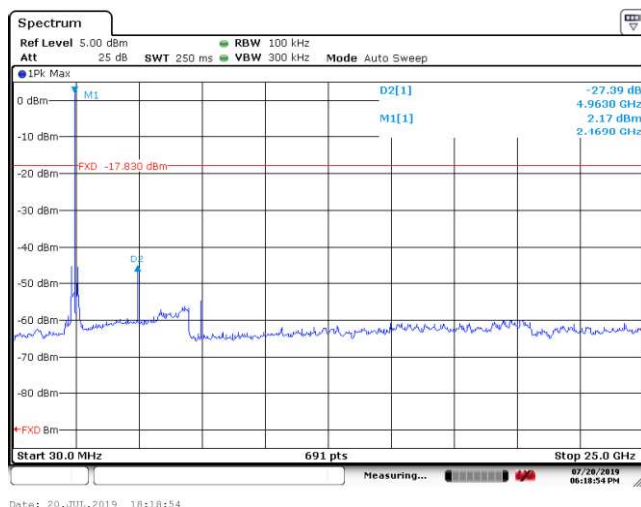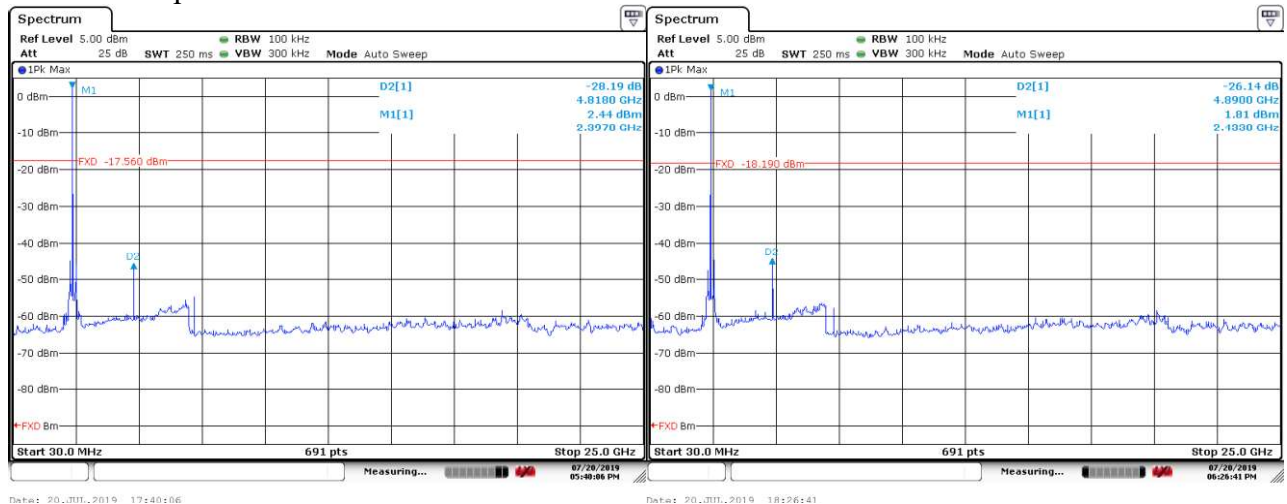

Band edge


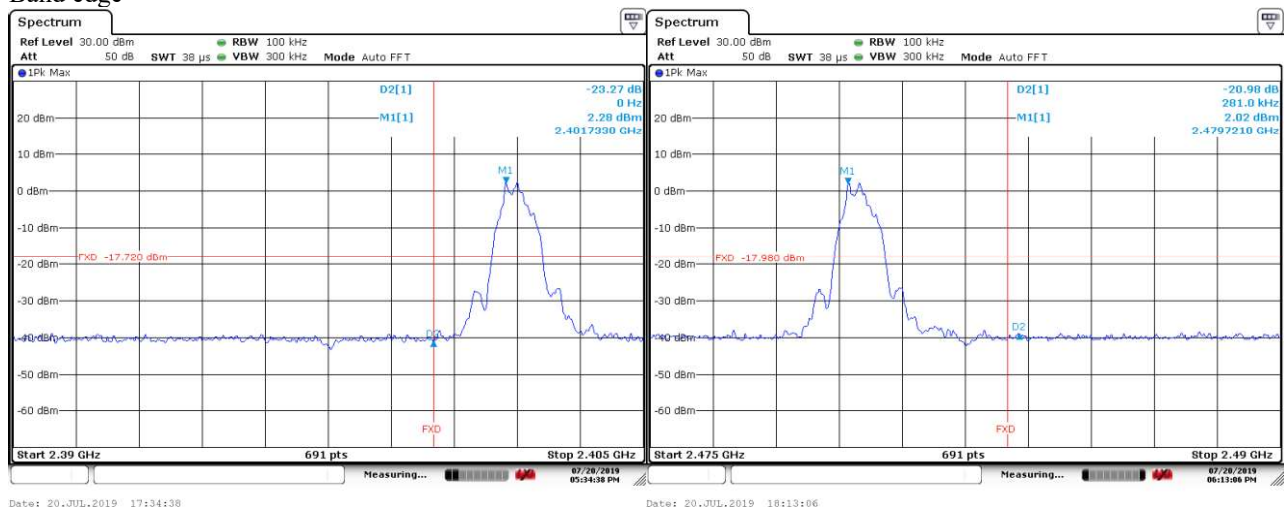


Prüfbericht - Nr.: 50321015 001
Test Report No.:


Seite 46 von 118
Page 46 of 118

2. LoRa 500KHz DTS, Conducted Spurious Emission and Band edge, 902.5MHz~926.5

Conducted Spurious Emission

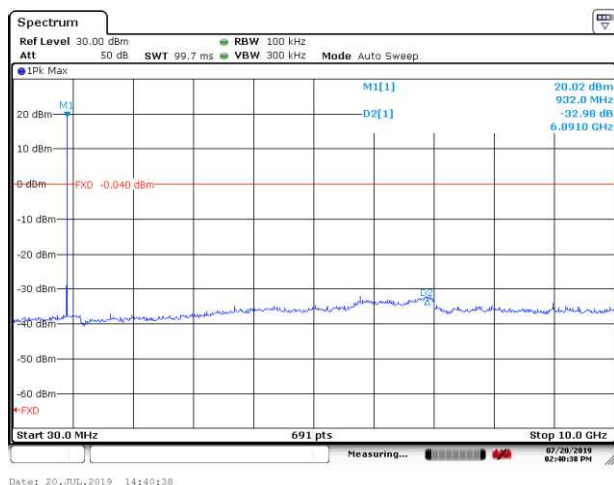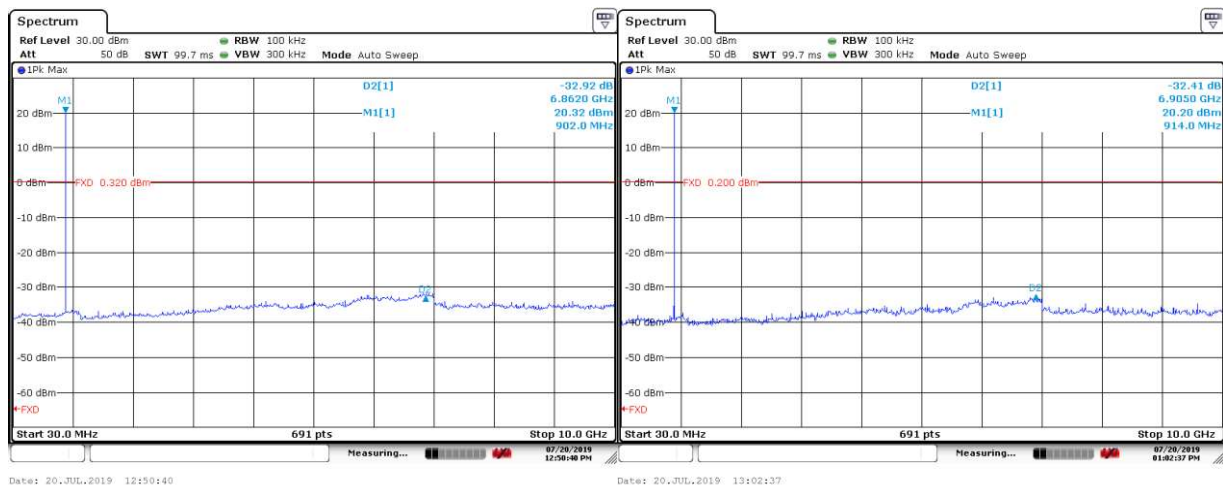

Band edge


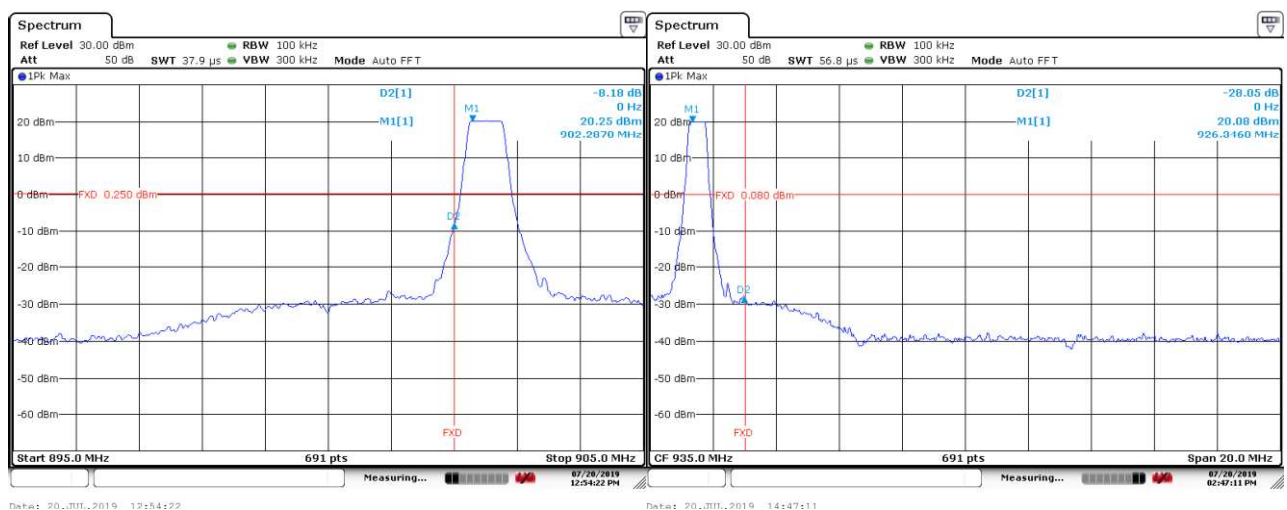


Prüfbericht - Nr.: 50321015 001
Test Report No.:


Seite 47 von 118
Page 47 of 118

3. LoRa 500KHz DTS, Conducted Spurious Emission and Band edge, 903MHz~914.2MHz

Conducted Spurious Emission

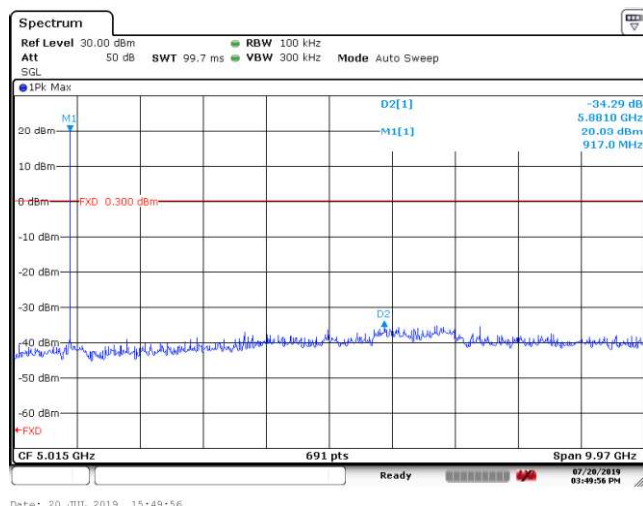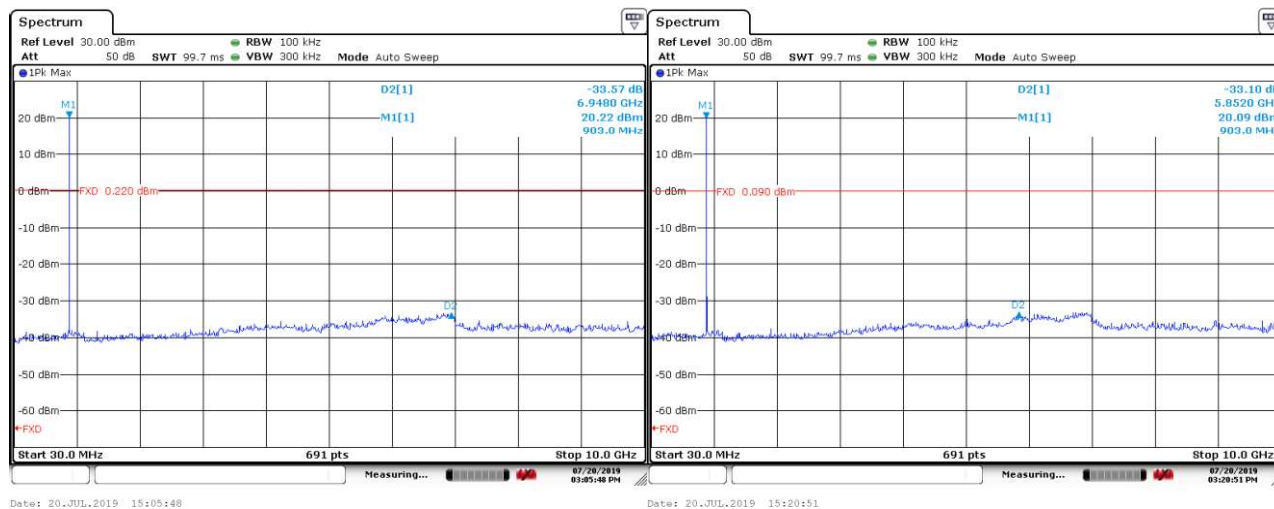

Band edge


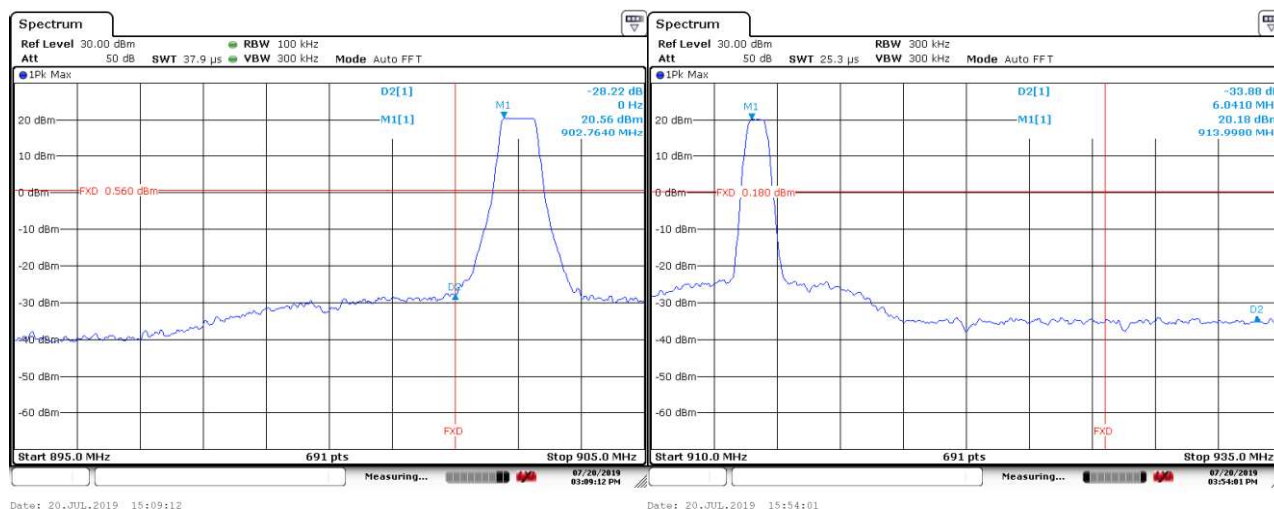


Prüfbericht - Nr.: 50321015 001
Test Report No.:


Seite 48 von 118
Page 48 of 118

4. LoRa 500KHz DTS, Conducted Spurious Emission and Band edge, 923.3MHz~926.9MHz

Conducted Spurious Emission

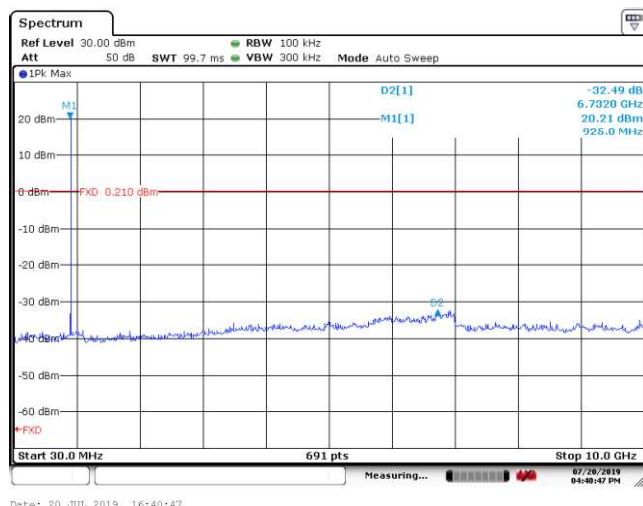
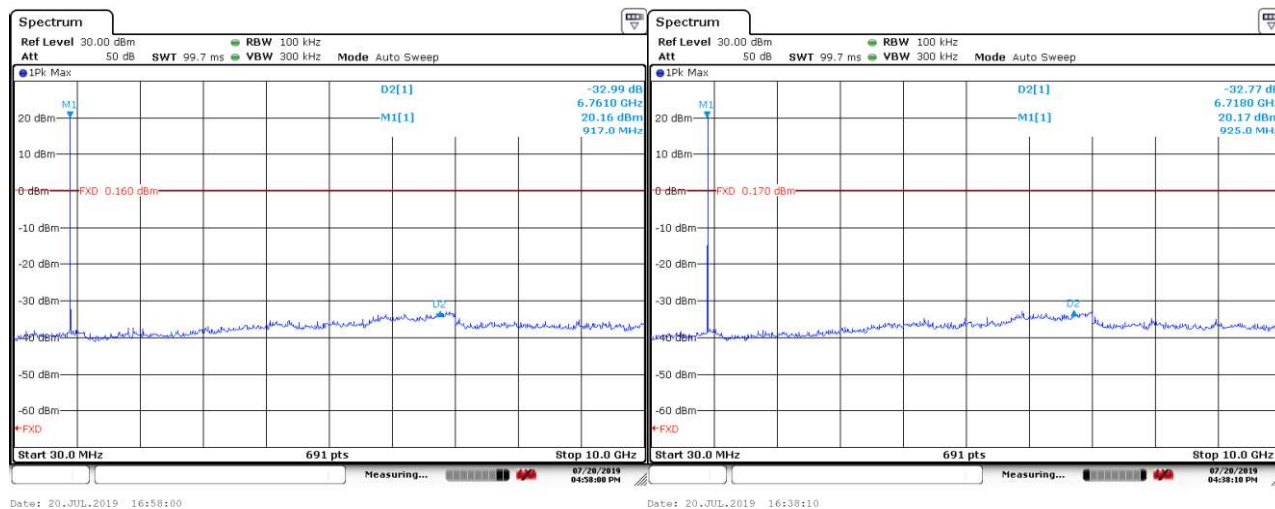


Band edge

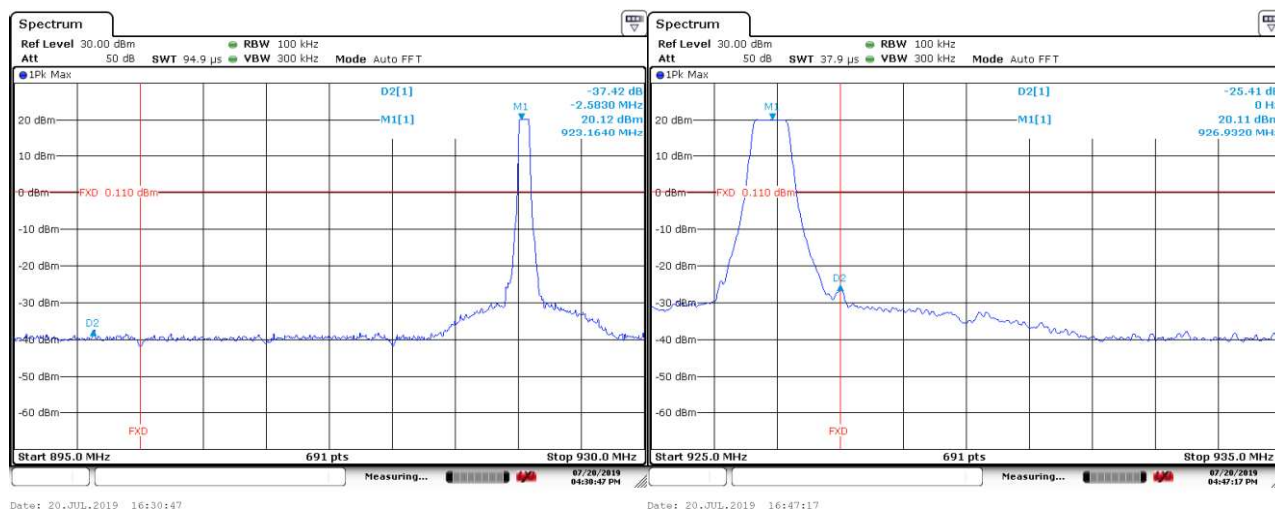



5. LoRa 250KHz FHSS, Conducted Spurious Emission and Band edge, 902.3MHz~926.7MHz

Conducted Spurious Emission

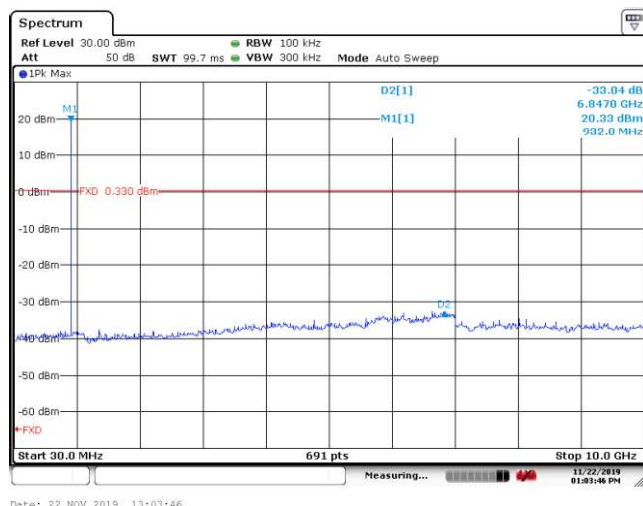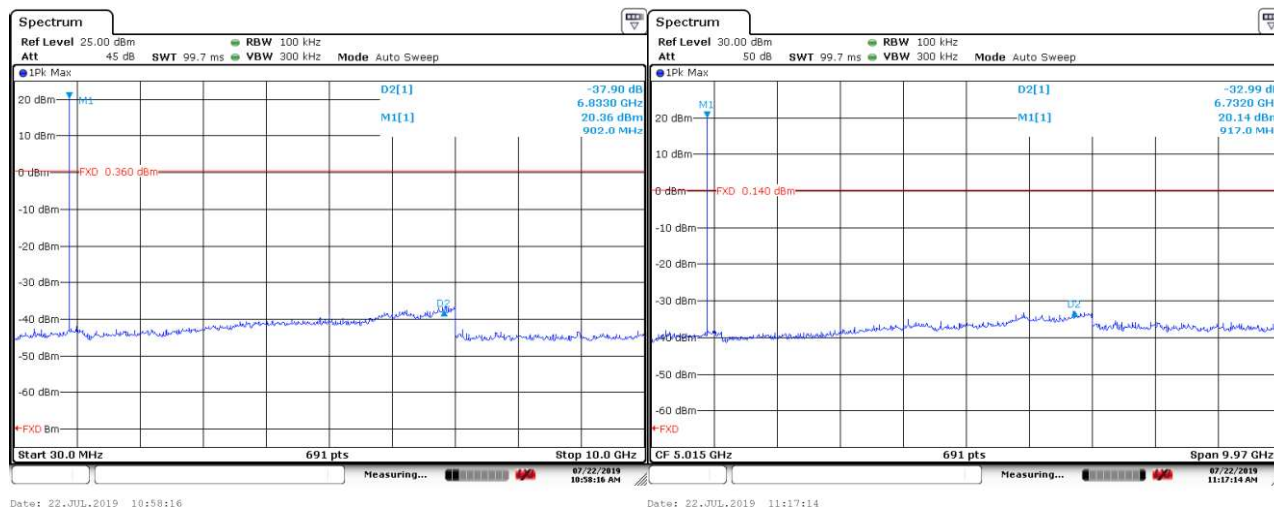


Band edge

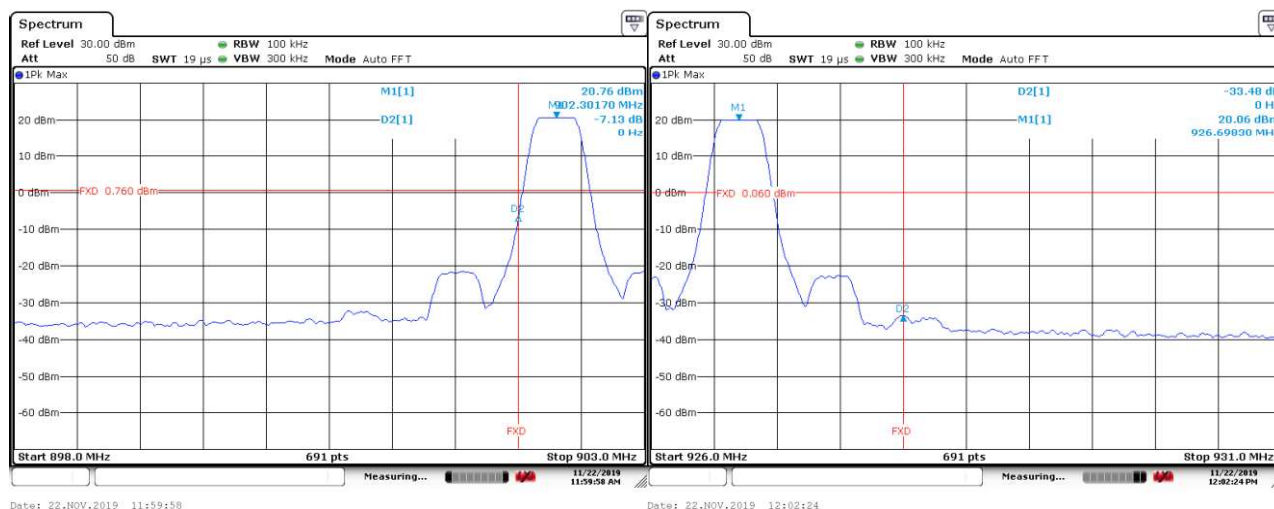

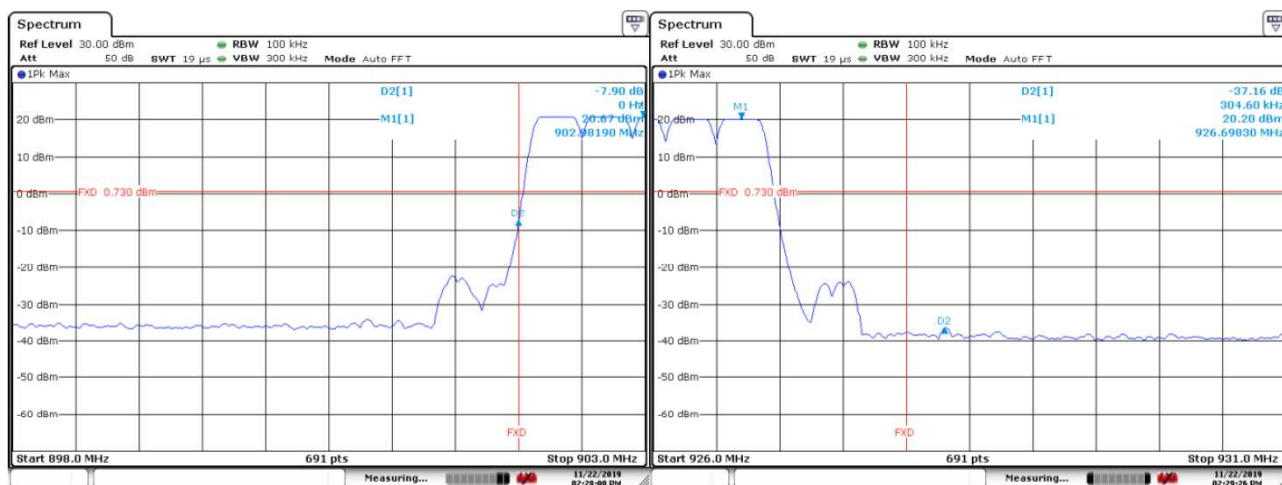


6. LoRa 125KHz FHSS, Conducted Spurious Emission, 902.3MHz~914.9MHz

Conducted Spurious Emission

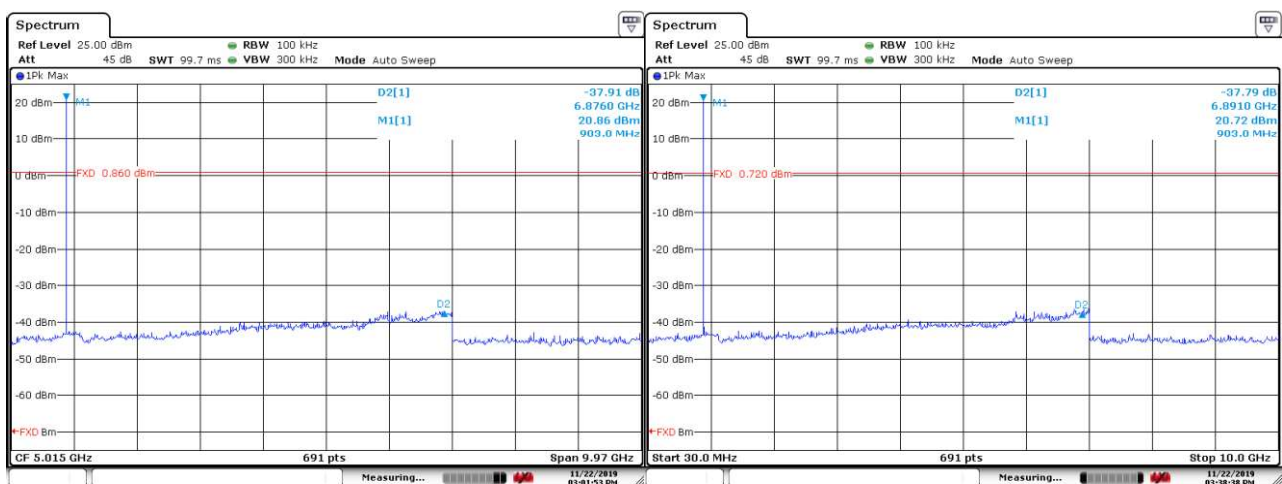



Date: 22.NOV.2019 15:01:54

Date: 22.NOV.2019 15:38:38

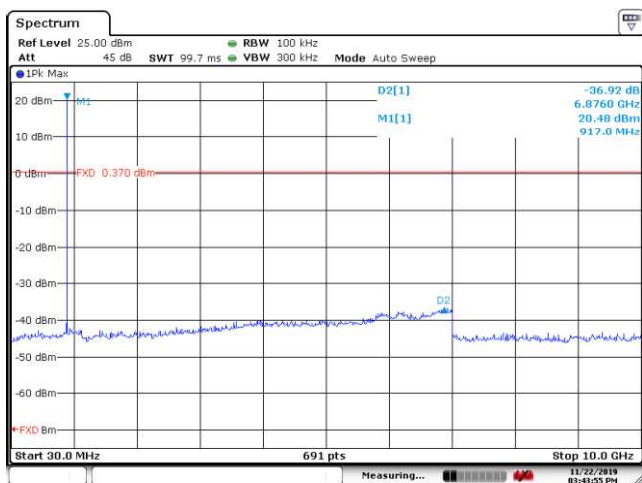


Date: 22.NOV.2019 15:43:55

Band edge

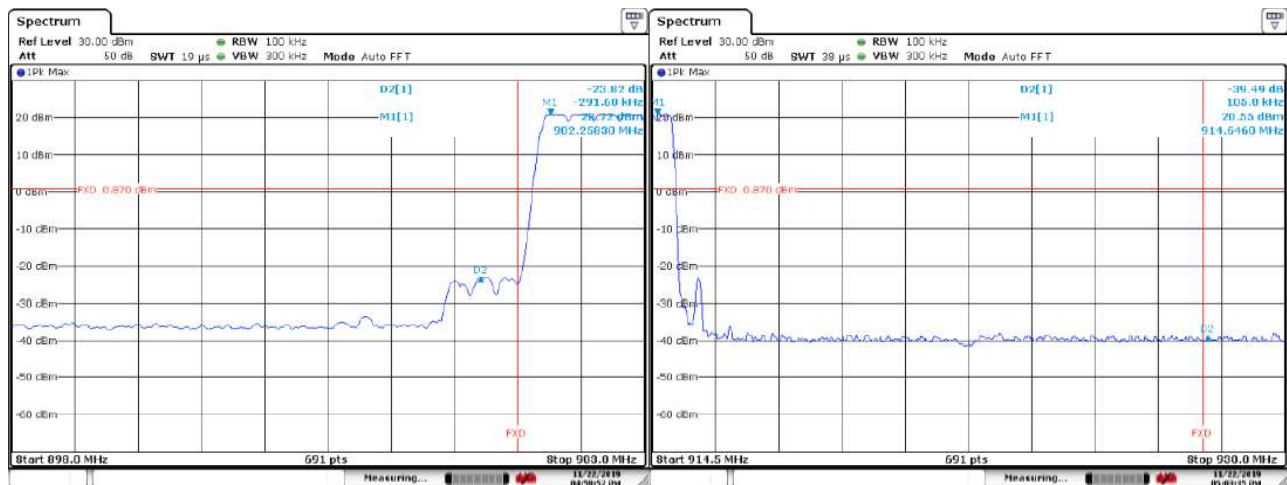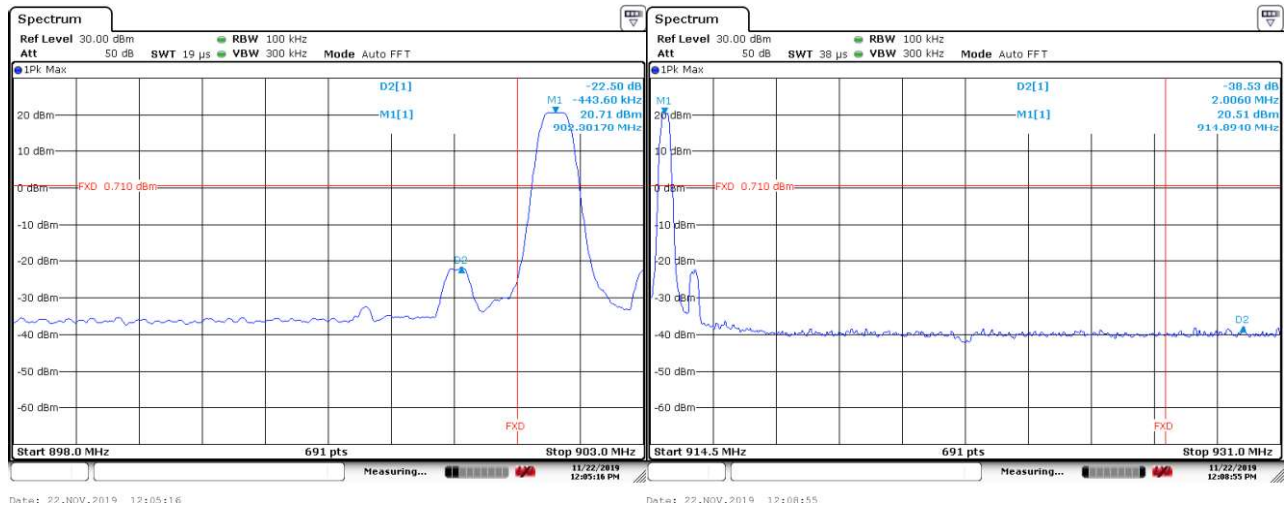


7. LoRa 125KHz FHSS, Conducted Spurious Emission, 902.2MHz~927.8MHz

Conducted Spurious Emission

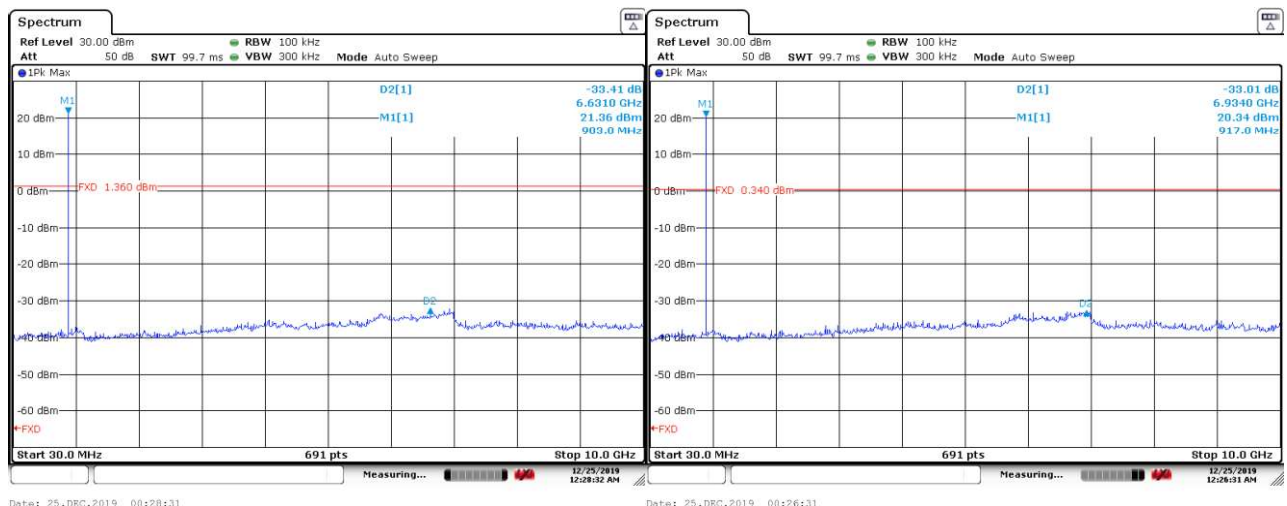


Prüfbericht - Nr.: 50321015 001
Test Report No.:

Seite 52 von 118
Page 52 of 118

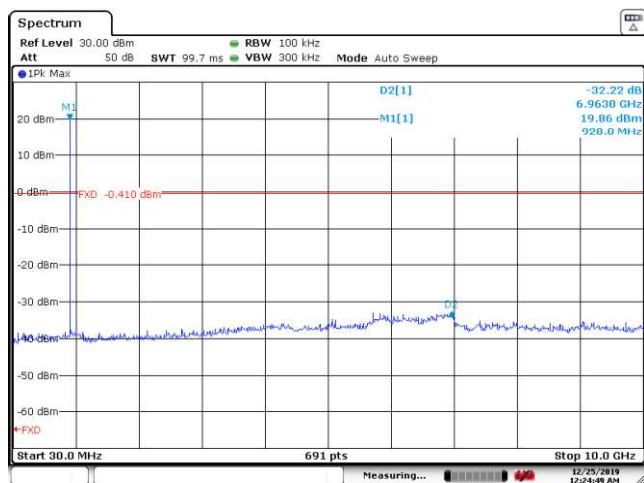


Date: 25.NOV.2019 08:54:49


Band edge

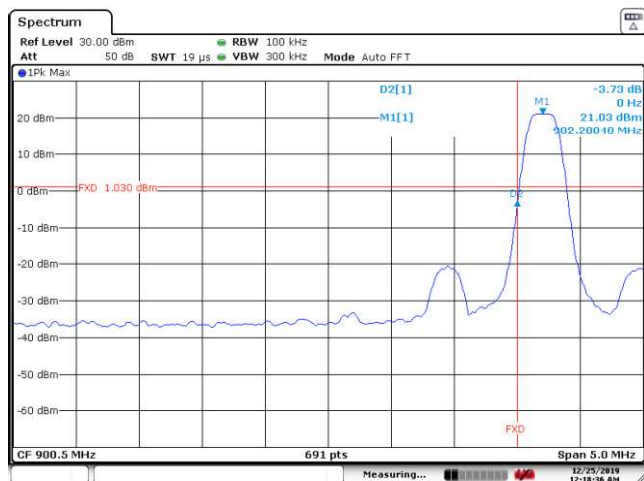


Date: 25.NOV.2019 08:18:35

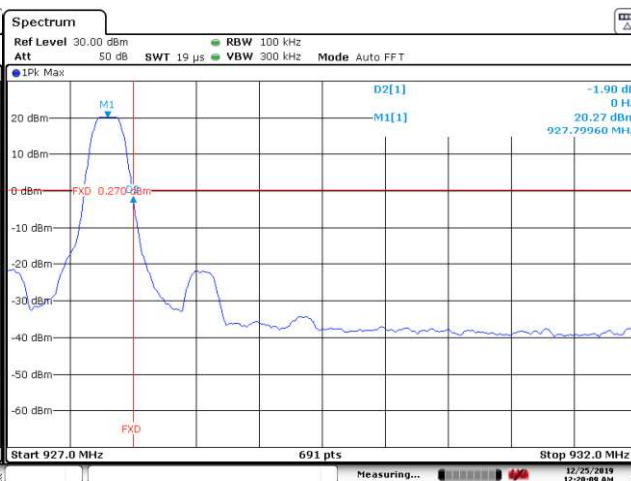

Date: 25.NOV.2019 08:28:09

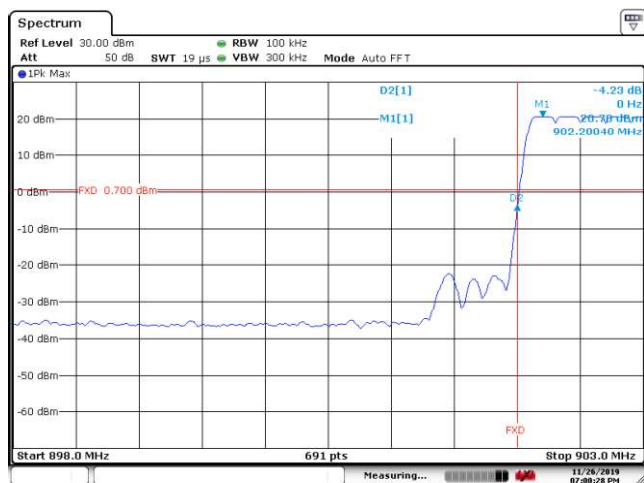

Date: 26.NOV.2019 19:00:28

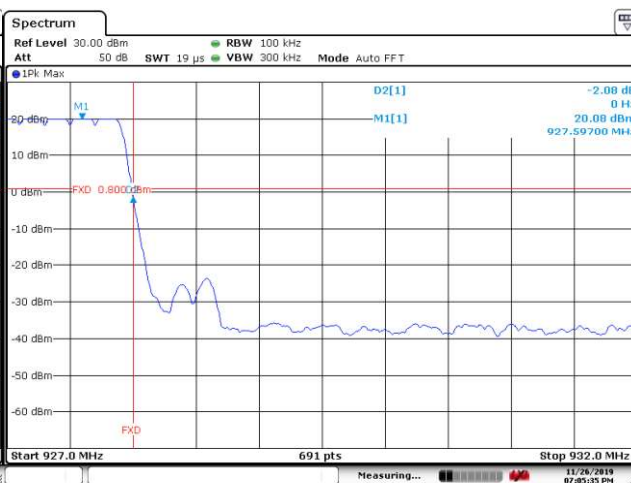



Date: 26.NOV.2019 19:05:35

Prüfbericht - Nr.: 50321015 001
Test Report No.:


Seite 53 von 118
Page 53 of 118


8. FSK 150Kbps FHSS, Conducted Spurious Emission and Band edge, 902.4MHz~927.6MHz

Conducted Spurious Emission

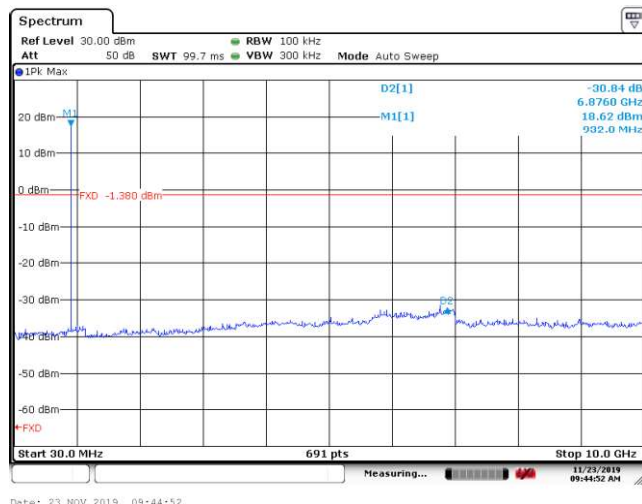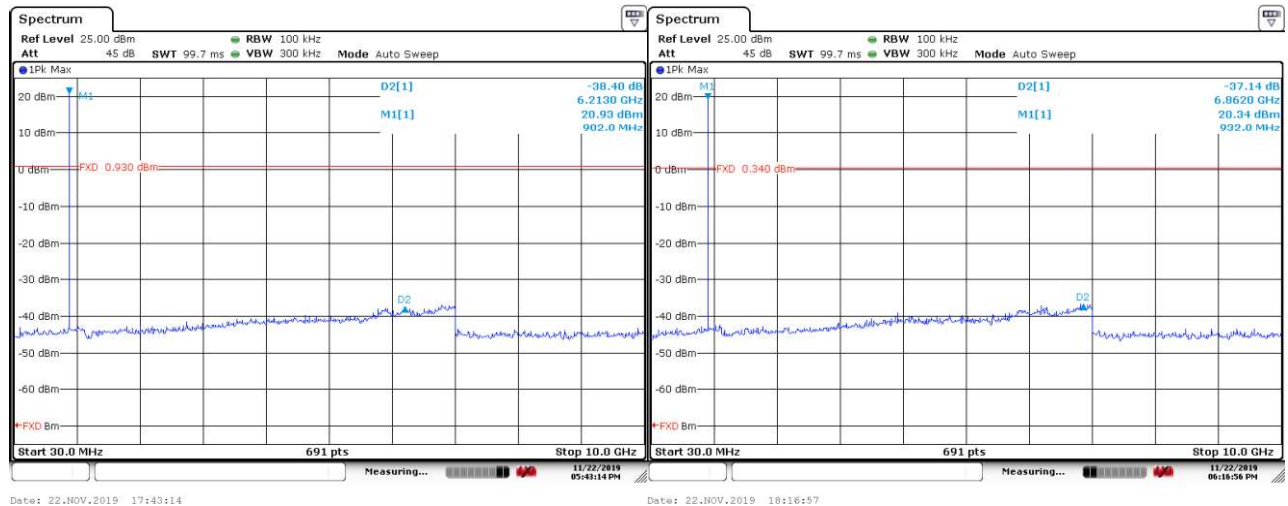



Band edge

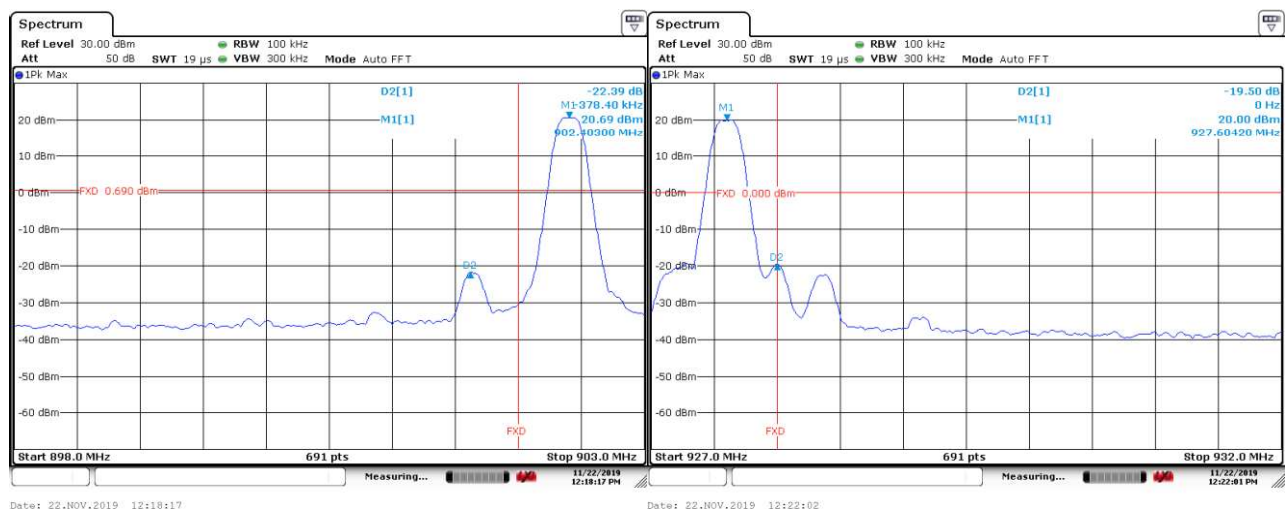


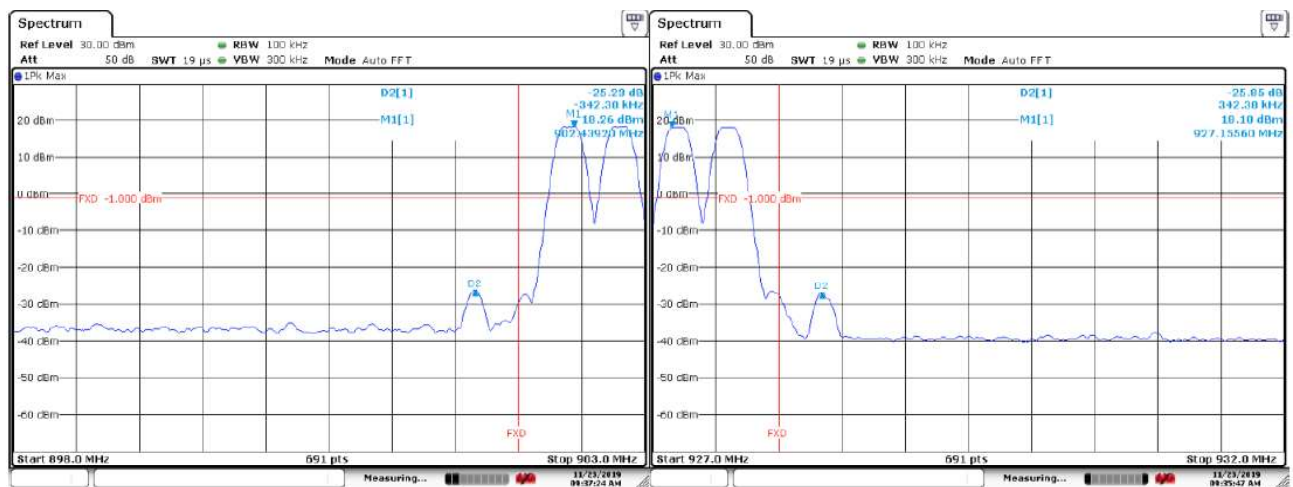


9. FSK 50Kbps FHSS, Conducted Spurious Emission and Band edge, 902.2MHz~927.8MHz

Conducted Spurious Emission

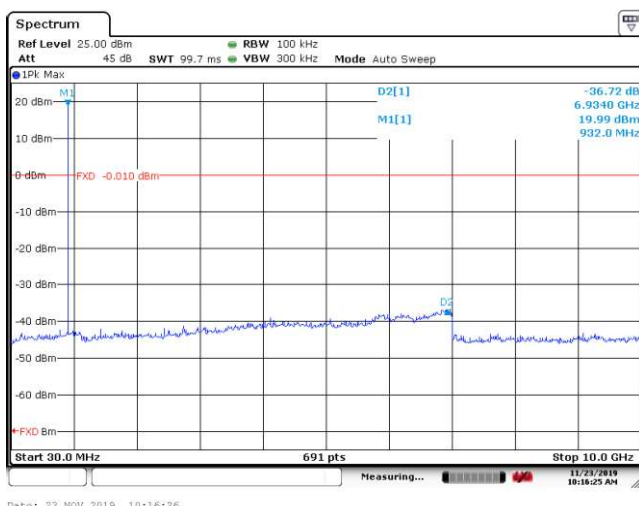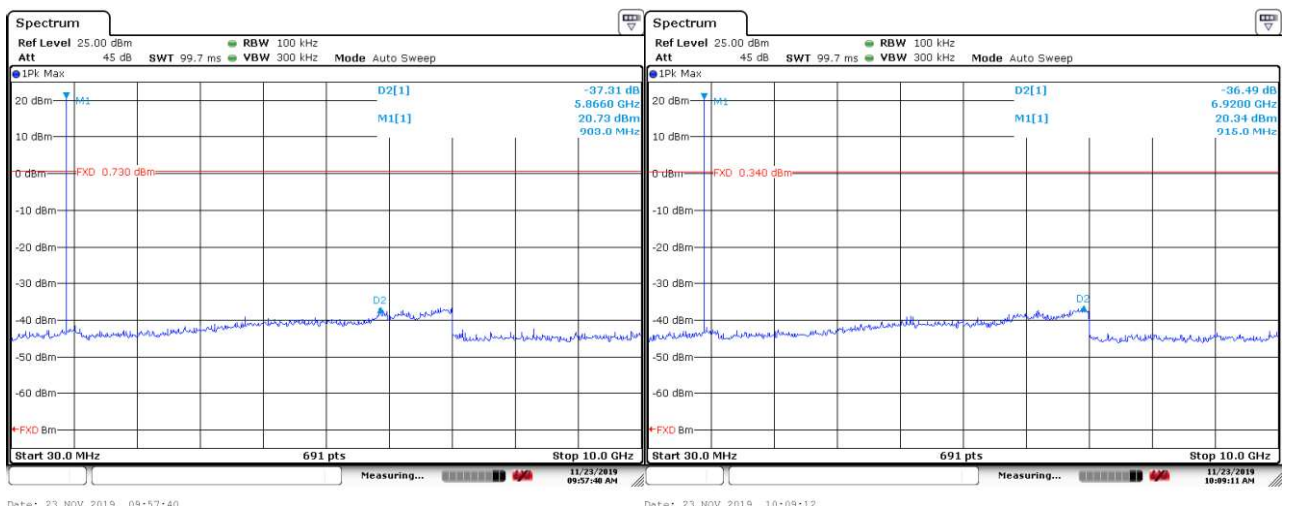


Band edge

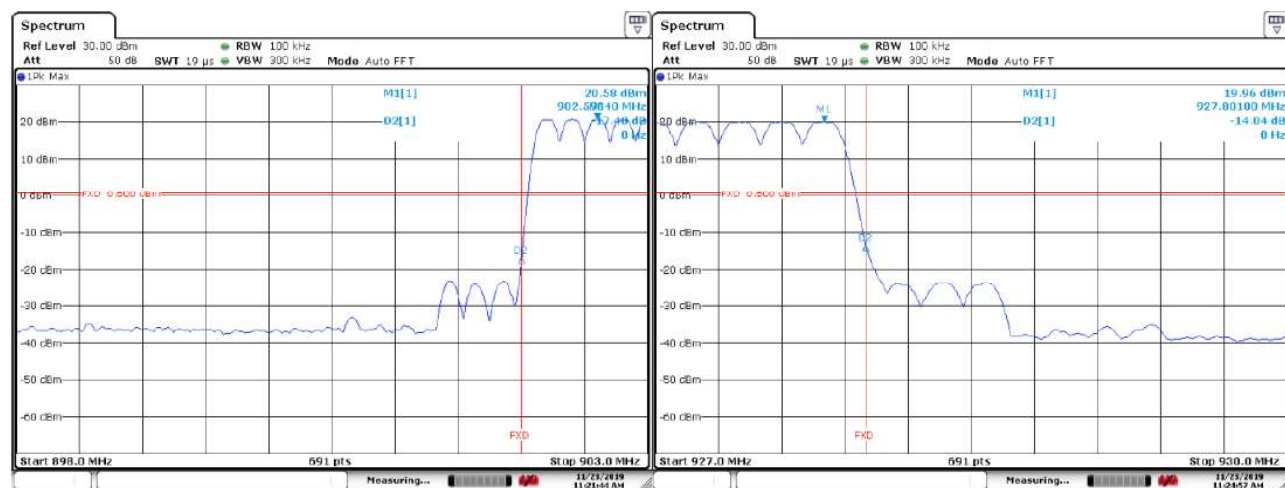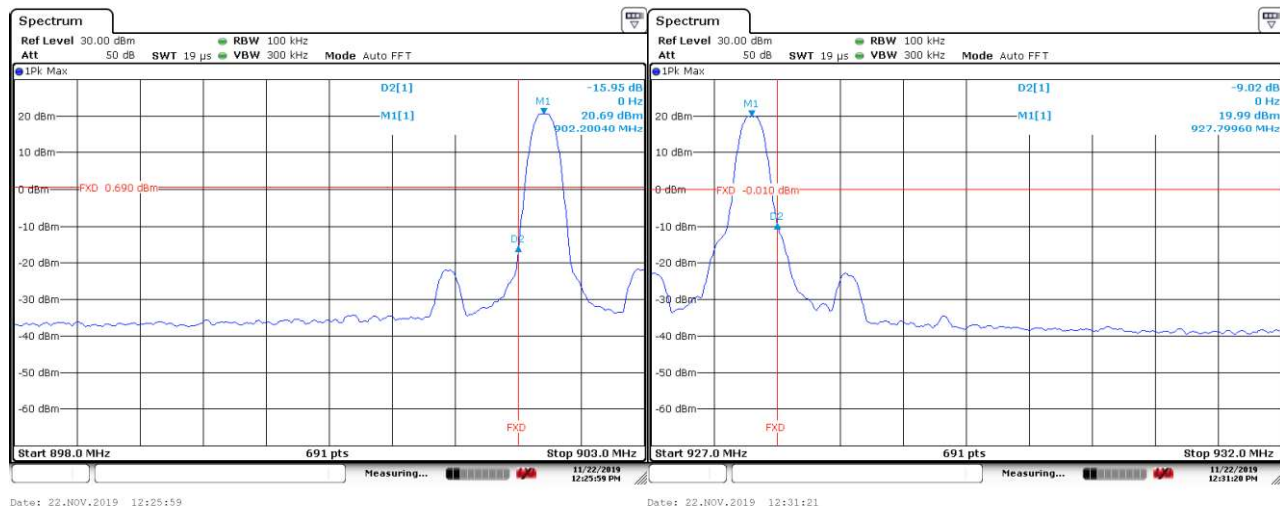


10. FSK 5Kbps FHSS, Conducted Spurious Emission and Band edge, 902.2MHz~927.8MHz

Conducted Spurious Emission

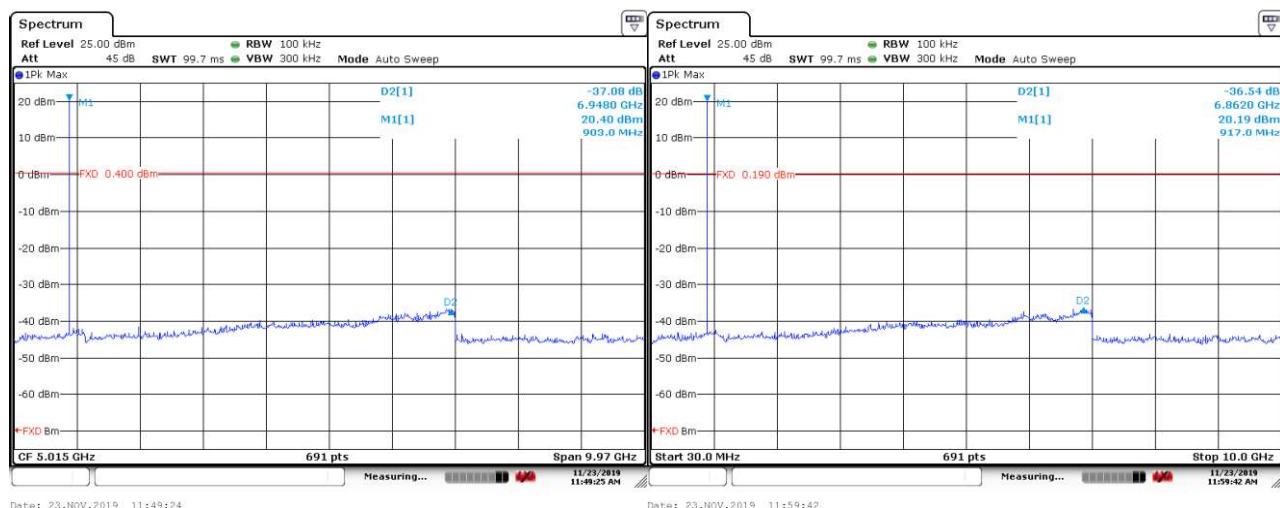


Prüfbericht - Nr.: 50321015 001
Test Report No.:

Seite 56 von 118
Page 56 of 118

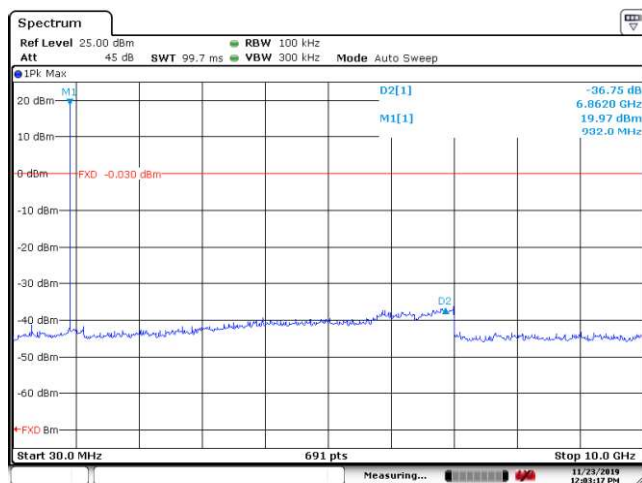


Date: 23.NOV.2019 12:03:17


Band edge

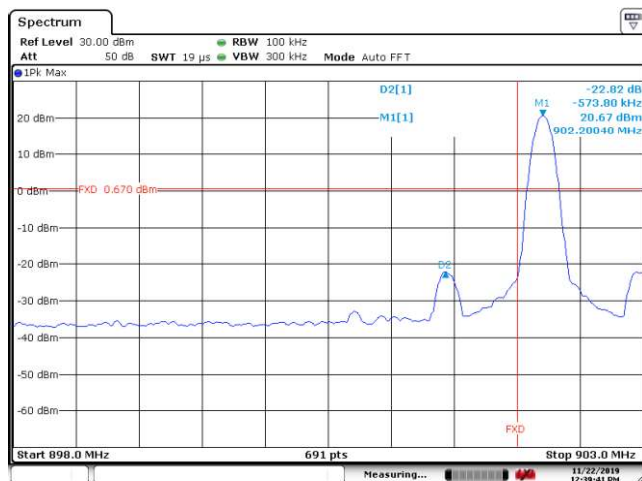


Date: 22.NOV.2019 12:39:42

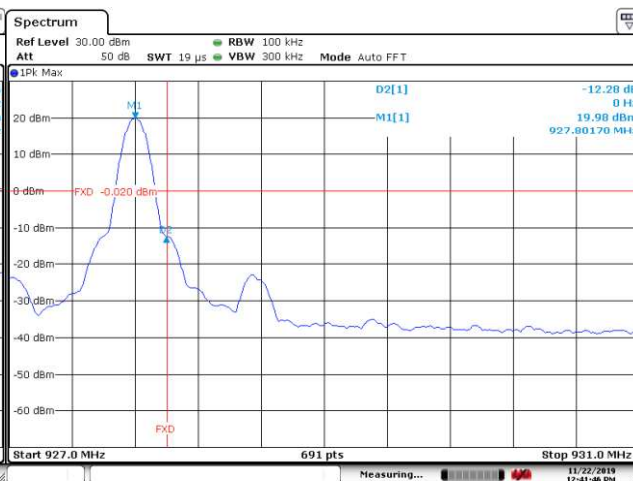

Date: 22.NOV.2019 12:41:46

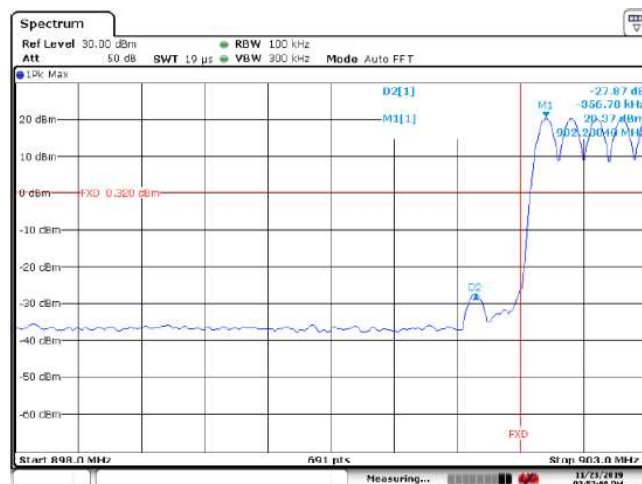

Date: 23.NOV.2019 02:52:48

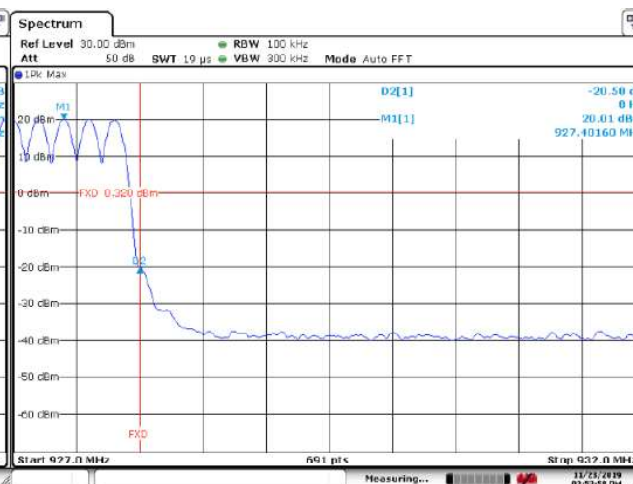



Date: 23.NOV.2019 02:53:54

Prüfbericht - Nr.: 50321015 001
Test Report No.:


Seite 57 von 118
Page 57 of 118

11. FSK 250Kbps FHSS, Conducted Spurious Emission and Band edge, 902.5MHz~927.5MHz

Conducted Spurious Emission

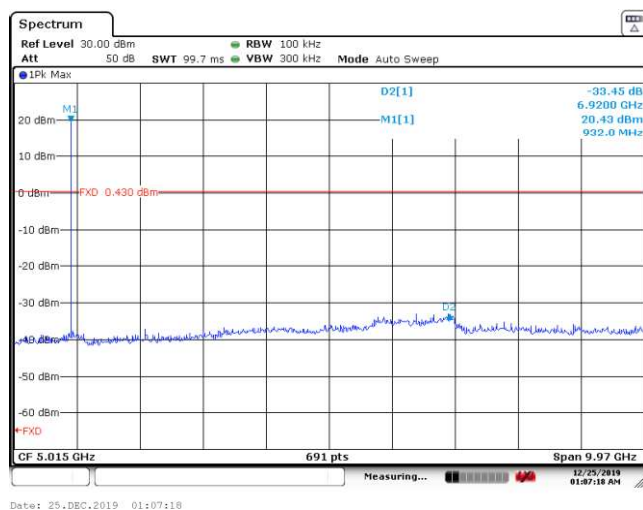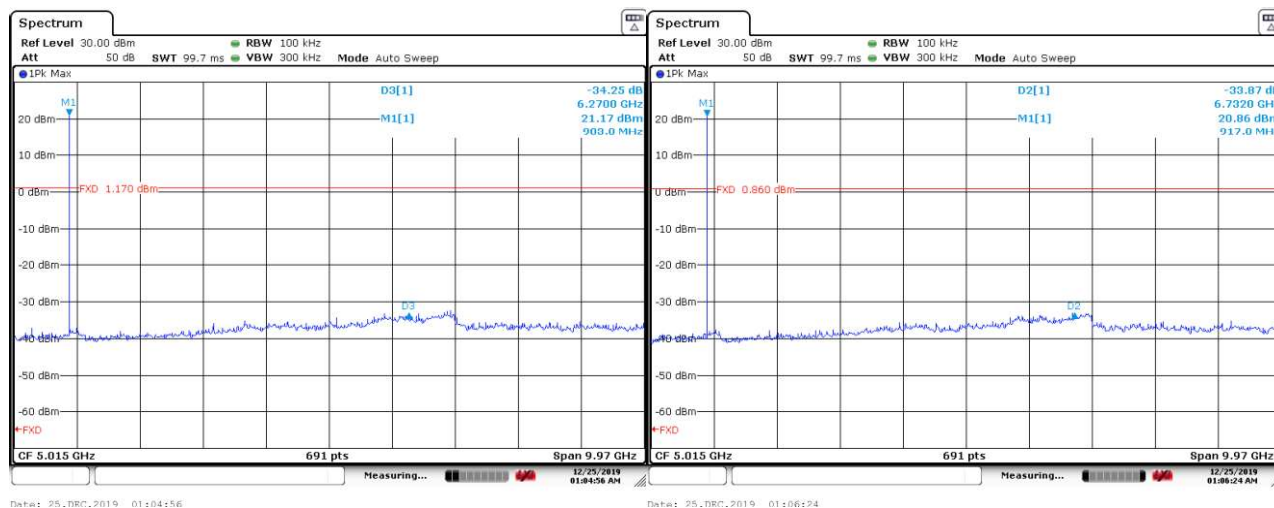


Band edge

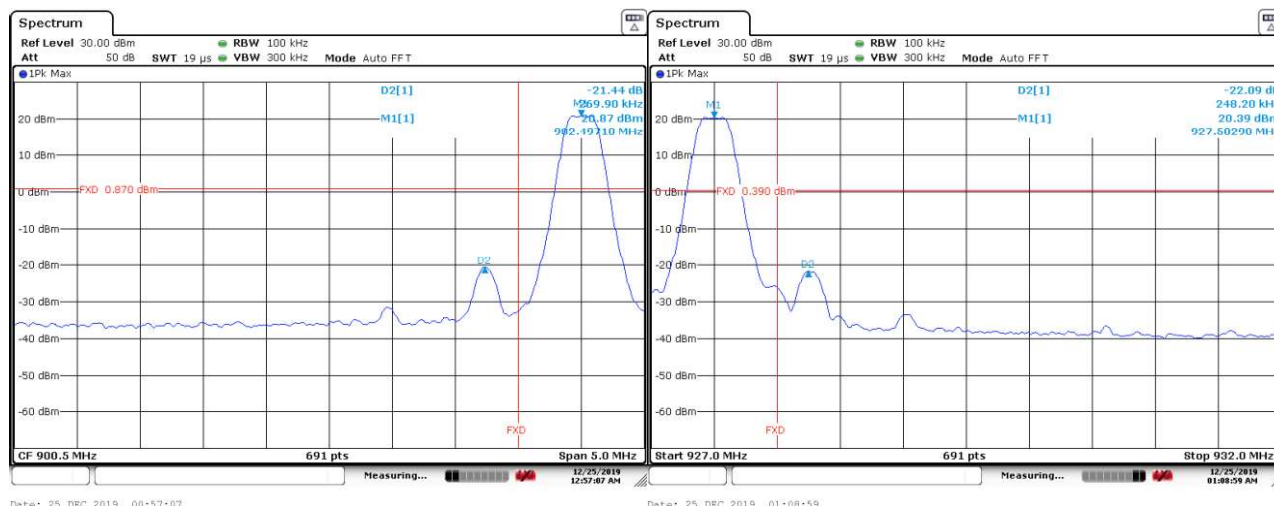

Prüfbericht - Nr.: 50321015 001
Test Report No.:

Seite 58 von 118
Page 58 of 118

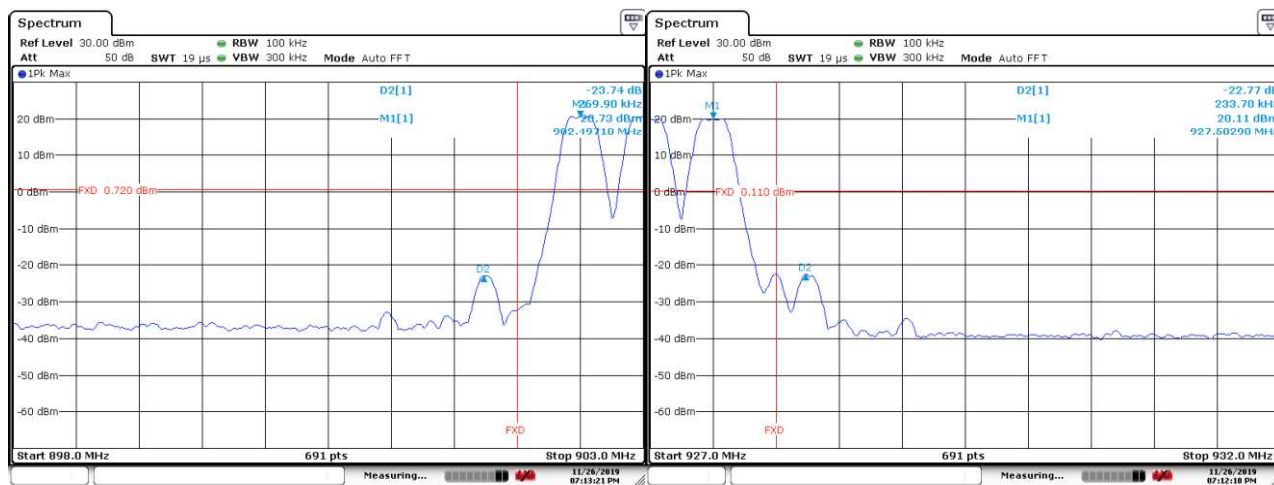

Data: 26.NOV.2019 19:13:21

Data: 26.NOV.2019 19:12:10

Prüfbericht - Nr.: 50321015 001
Test Report No.:

Seite 59 von 118
Page 59 of 118

4.1.8 Carrier Separation Measurement

Result:

Pass

Test Specification

Test standard : FCC Part 15.247(a)(1)
RSS-247 Issue 2 February 2017 Clause 5.1(b)
Basic standard : ANSI C63.10: 2013
Limits : At least 20 dB bandwidth or 25kHz, whichever is greater.
Kind of test site : Shielded Room


Test Setup

Date of testing : 27.11.2019~25.12.2019
Input voltage : AC 120V, 60Hz
Operational mode : Test mode of LoRa FHSS, FSK FHSS
Temperature : 20.1°C
Relative humidity : 57%
Atmospheric pressure : 101 kPa

Figure 6: Carrier Separation

- LoRa 250KHz FHSS, Carrier Separation, 902.3MHz~926.7MHz

Carrier Separation: 398.5KHz > 20 dB bandwidth

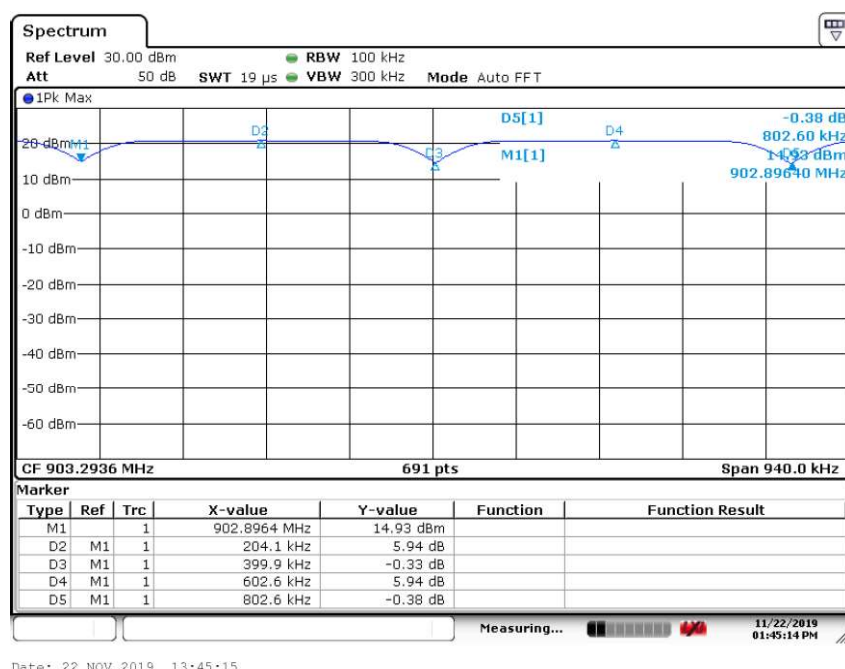

Prüfbericht - Nr.: 50321015 001


Test Report No.:

Seite 60 von 118

Page 60 of 118


2. LoRa 125KHz FHSS, Carrier Separation, 902.3MHz~914.9MHz

Carrier Separation: 199.71KHz > 20 dB bandwidth

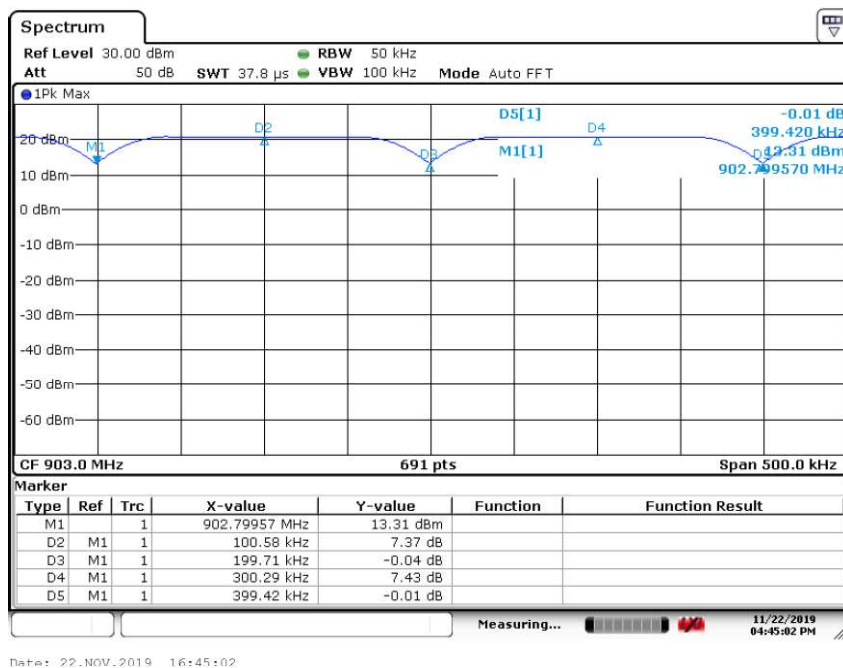


3. 125KHz FHSS, Carrier Separation, 902.2MHz~927.8MHz

Carrier Separation: 199.71KHz > 20 dB bandwidth

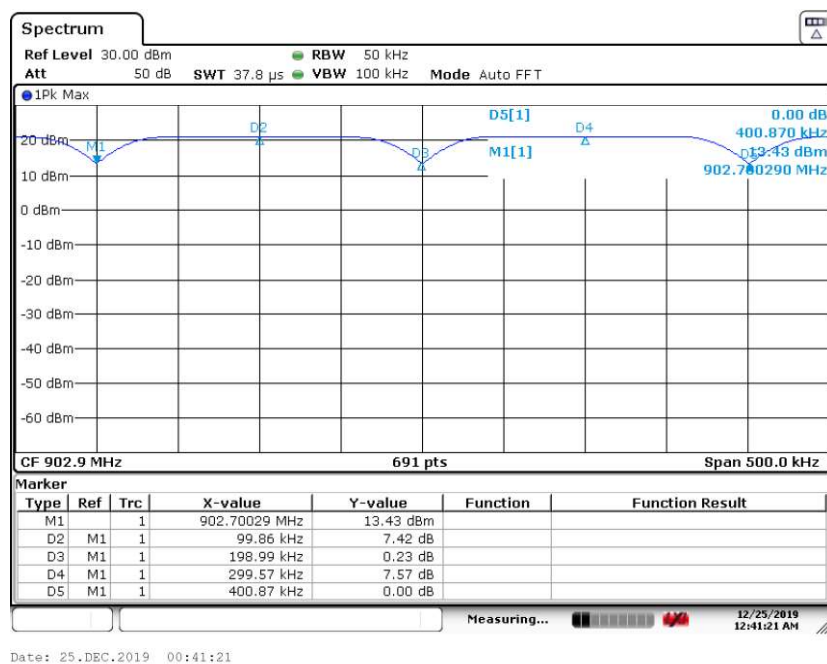

4. FSK 150Kbps FHSS, Carrier Separation, 902.4MHz~927.6MHz


Carrier Separation: 399.4KHz > 20 dB bandwidth

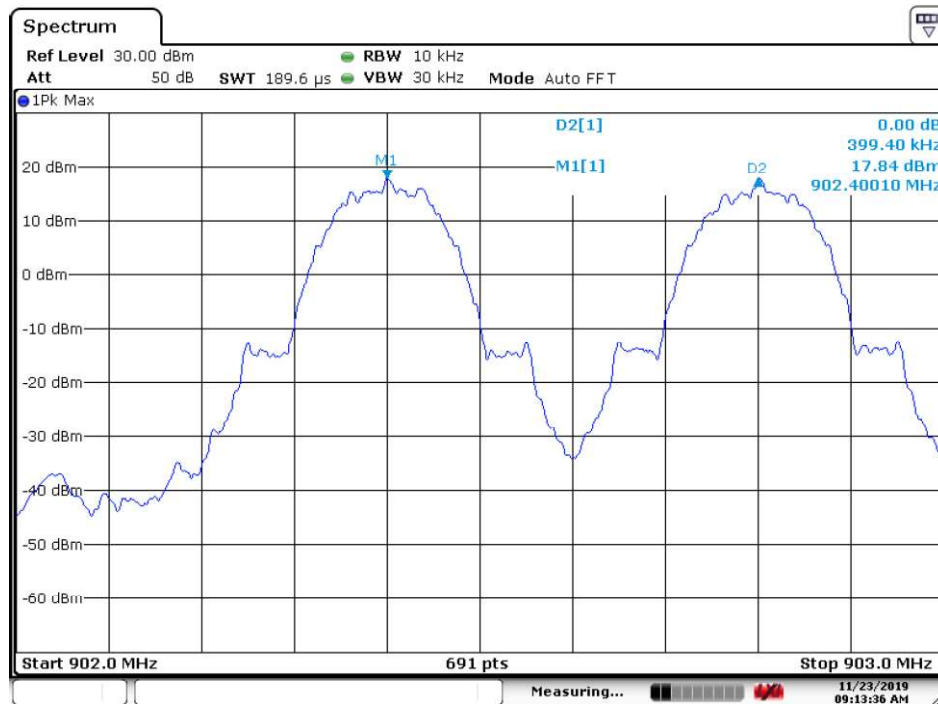

Date: 23.NOV.2019 09:13:37

5. FSK 50Kbps FHSS, Carrier Separation, 902.2MHz~927.8MHz


Carrier Separation: 200.290KHz > 20 dB bandwidth

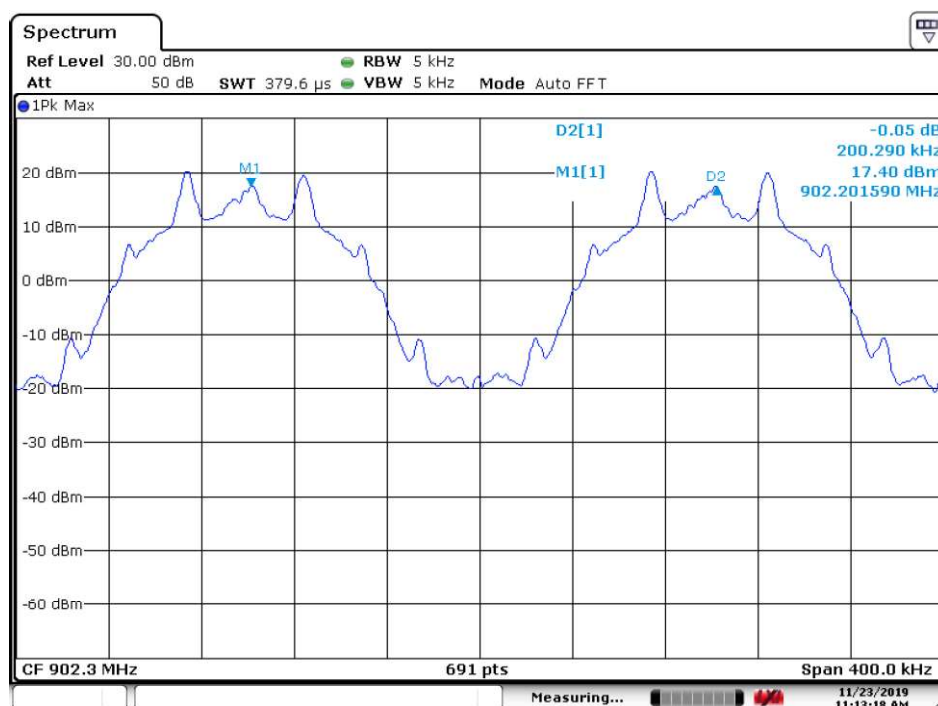

Date: 23.NOV.2019 11:13:18

6. FSK 5Kbps FHSS, Carrier Separation, 902.2MHz~927.8MHz


Carrier Separation: 199.130KHz > 20 dB bandwidth

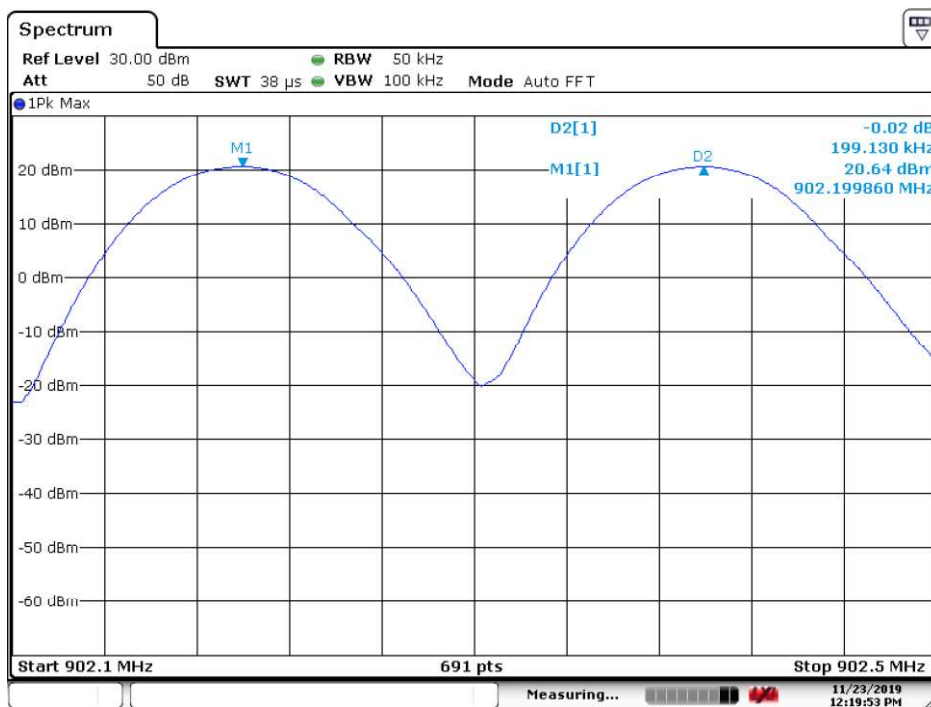

Date: 23.NOV.2019 12:19:53

7. FSK 250Kbps FHSS, Carrier Separation, 902.5MHz~927.5MHz

Carrier Separation: 500.7KHz > 20 dB bandwidth

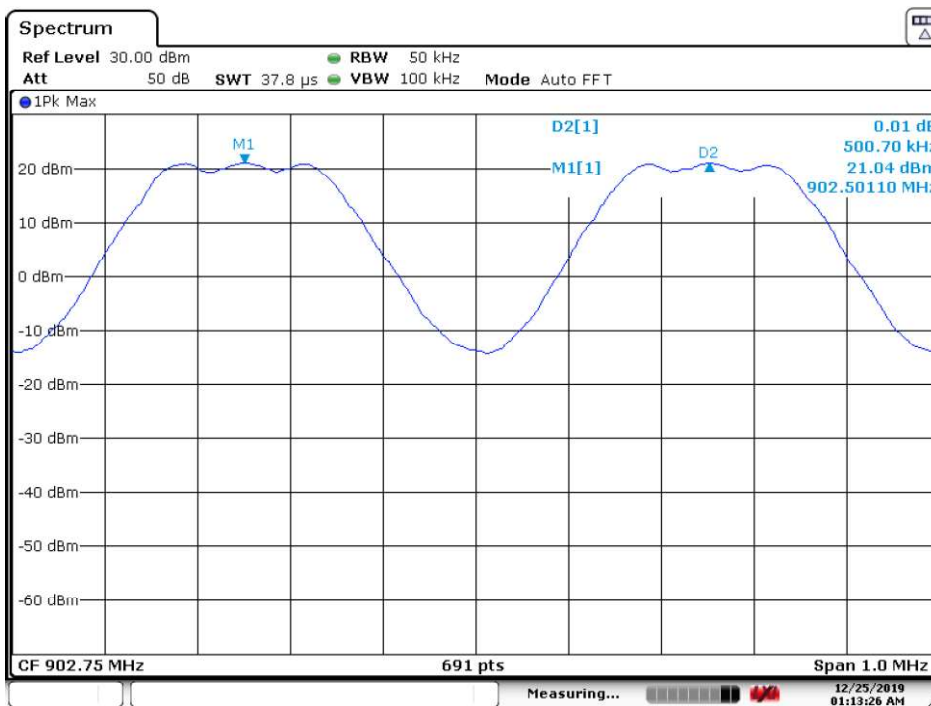

Date: 25.DEC.2019 01:13:26

Prüfbericht - Nr.: 50321015 001
Test Report No.:

Seite 63 von 118
Page 63 of 118

4.1.9 The number of hopping channels

Result:

Pass

Test Specification

Test standard : FCC Part 15.247(g)
RSS-247 Issue 2 February 2017 Clause 5.1(c)

Basic standard : ANSI C63.10: 2013

Limits : At least 25 (for LoRa 250KHz)
At least 50 (for LoRa 125KHz, FSK FHSS)

Kind of test site : Shielded Room

Test Setup

Date of testing : 27.11.2019~25.12.2019

Input voltage : AC 120V, 60Hz

Operational mode : Test mode of LoRa FHSS, FSK FHSS


Temperature : 20.1°C

Relative humidity : 57%

Atmospheric pressure : 101 kPa

Table 7: Test result of hopping channel number for LoRa FHSS and FSK FHSS

Modulation Type and Operation band	20dB Bandwidth(KHz)	Channel Number	Limit	Result
LoRa 250KHz FHSS 902.3MHz~926.7MHz	$250 \leq 20\text{dB Bandwidth} \leq 500$	62	25	Pass
LoRa 125KHz FHSS 902.3MHz~914.9MHz	$20\text{dB Bandwidth} \leq 250$	64	50	Pass
LoRa 125KHz FHSS 902.2MHz~927.8MHz	$20\text{dB Bandwidth} \leq 250$	129	50	Pass
FSK 150Kbps FHSS 902.4MHz~927.6MHz	$20\text{dB Bandwidth} \leq 250$	64	50	Pass
FSK 50Kbps FHSS 902.2MHz~927.8MHz	$20\text{dB Bandwidth} \leq 250$	129	50	Pass
FSK 5Kbps FHSS 902.2MHz~927.8MHz	$20\text{dB Bandwidth} \leq 250$	129	50	Pass
FSK 250Kbps FHSS 902.5MHz~927.5MHz	$250 \leq 20\text{dB Bandwidth} \leq 500$	51	25	Pass

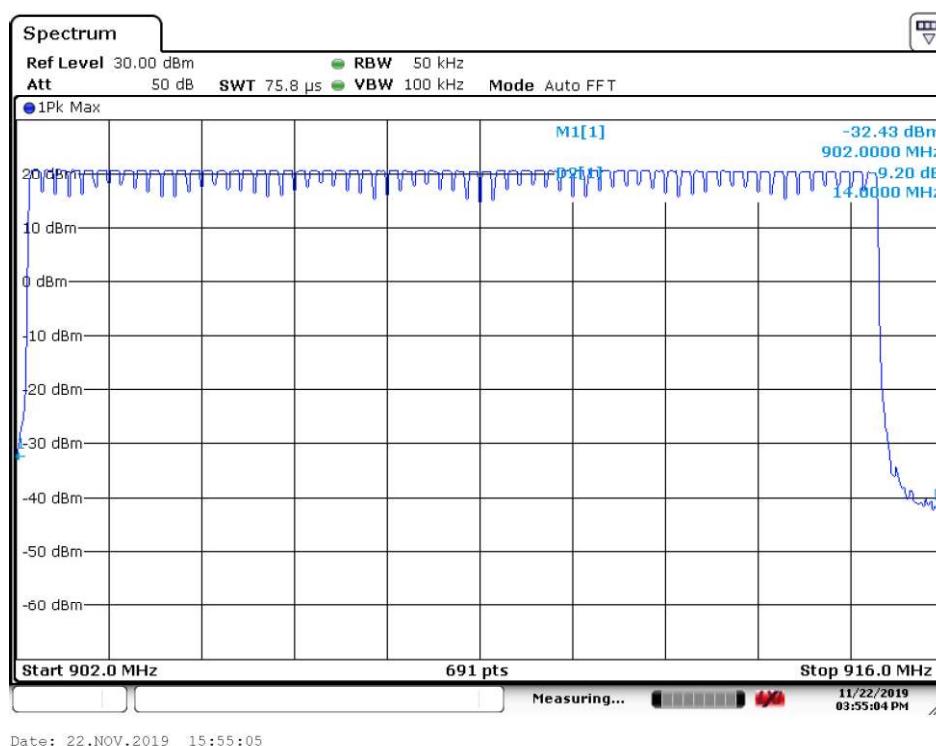


Prüfbericht - Nr.: 50321015 001
Test Report No.:

Seite 65 von 118
Page 65 of 118

3. LoRa 125KHz FHSS, 902.2MHz~927.8MHz


Channel Number: 129

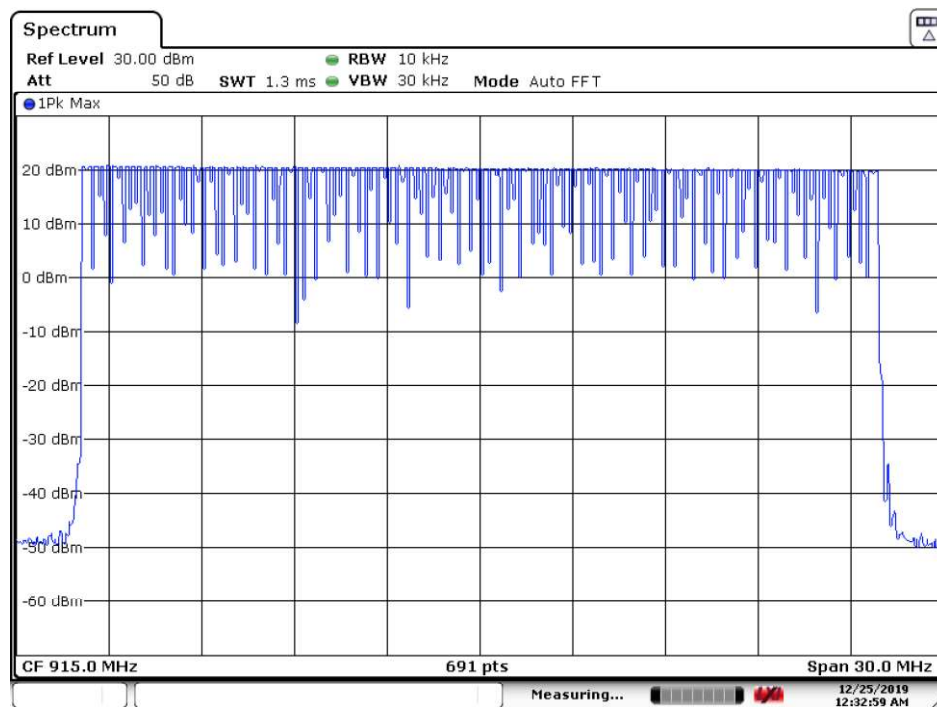

Date: 25.DEC.2019 00:32:59

4. FSK 150Kbps FHSS, 902.4MHz~927.6MHz

Channel Number: 64

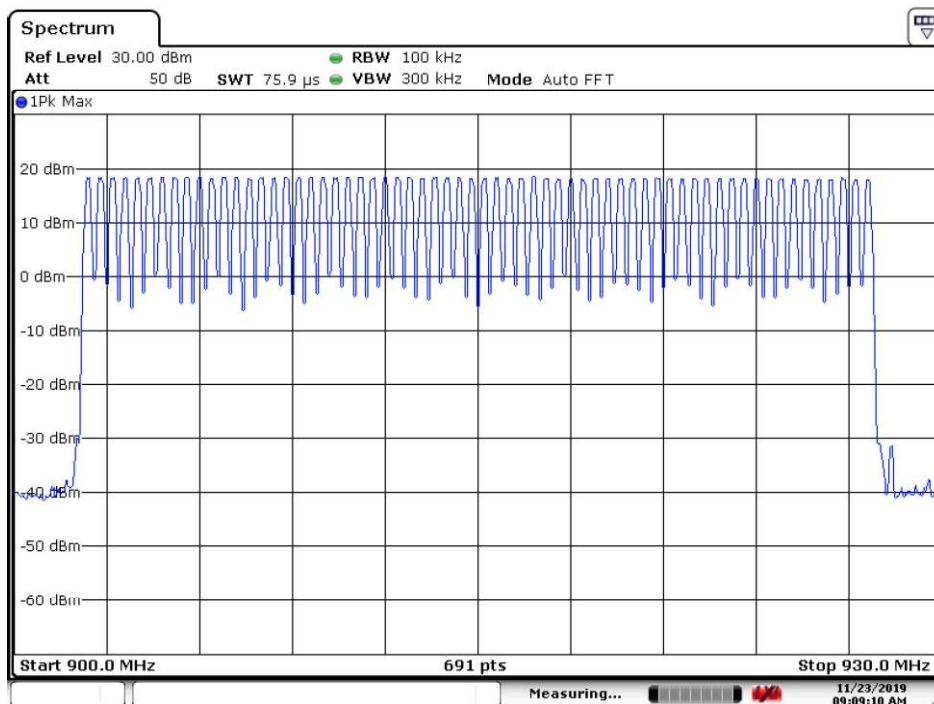

Date: 23.NOV.2019 09:09:11