FCC Test Report

Report No.: AGC00797150501FE03

FCC ID : 2AEUVKINIVOURBN

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Bluetooth headset

BRAND NAME : KINIVO

MODEL NAME : Kinivo Urbn

CLIENT : Kinivo Inc

DATE OF ISSUE : May 14,2015

STANDARD(S) : FCC Part 15 Rules

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 70

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 14,2015	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RECEIVER INPUT BANDWIDTH	7
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	7
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	7
2.6. RELATED SUBMITTAL(S) / GRANT (S)	8
2.7. TEST METHODOLOGY	8
2.8. SPECIAL ACCESSORIES	8
2.9. EQUIPMENT MODIFICATIONS	8
3. MEASUREMENT UNCERTAINTY	9
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF EUT SYSTEM	10
5.2. EQUIPMENT USED IN EUT SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	12
7.1. MEASUREMENT PROCEDURE	12
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
7.3. LIMITS AND MEASUREMENT RESULT	13
8. 20DB BANDWIDTH	19
8.1. MEASUREMENT PROCEDURE	19
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
8.3. LIMITS AND MEASUREMENT RESULTS	19
9. CONDUCTED SPURIOUS EMISSION	26
9.1. MEASUREMENT PROCEDURE	26
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	26
9.3. MEASUREMENT EQUIPMENT USED	26
9.4. LIMITS AND MEASUREMENT RESULT	26
10. RADIATED EMISSION	30
10.1. MEASUREMENT PROCEDURE	30
10.2. TEST SETUP	32
10.3. TEST RESULT	32

11. BAND EDGE EMISSION	40
11.1. MEASUREMENT PROCEDURE	46
11.2. TEST SET-UP	46
11.3. TEST RESULT	47
12. NUMBER OF HOPPING FREQUENCY	51
12.1. MEASUREMENT PROCEDURE	51
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	51
12.3. MEASUREMENT EQUIPMENT USED	51
12.4. LIMITS AND MEASUREMENT RESULT	51
13. TIME OF OCCUPANCY (DWELL TIME)	52
13.1. MEASUREMENT PROCEDURE	52
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	52
13.3. MEASUREMENT EQUIPMENT USED	52
13.4. LIMITS AND MEASUREMENT RESULT	52
14. FREQUENCY SEPARATION	55
14.1. MEASUREMENT PROCEDURE	55
14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	55
14.3. MEASUREMENT EQUIPMENT USED	55
14.4. LIMITS AND MEASUREMENT RESULT	55
15. FCC LINE CONDUCTED EMISSION TEST	57
15.1. LIMITS OF LINE CONDUCTED EMISSION TEST	57
15.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	57
15.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	58
15.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	58
15.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	59
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	61
APPENDIX B: PHOTOGRAPHS OF EUT	63

Page 5 of 70

1. VERIFICATION OF CONFORMITY

Applicant	Kinivo Inc
Address	8573 154th Ave NE Redmond WA 98052 US
Manufacturer	Zhongshan K-mate General Electronics Co., Ltd.
Address	NO.2, 5th Xinsheng Street, Gangkou Town, Zhongshan City, Guangdong, China
Product Designation	Bluetooth headset
Brand Name	KINIVO
Test Model	Kinivo Urbn
Date of test	May 12,2015 to May 13,2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF (2013-03-01)

We hereby certify that:

The above equipment was tested by Compliance Certification Service(Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By

Jerry Xiao May 14,2015

Checked By

Forrest Lei May 14,2015

Authorized By

Solger Zhang May 14,2015

Page 6 of 70

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is "Bluetooth headset" designed as a "Communication Device". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency 2.402 GHz to 2.480GHz			
RF Output Power	3.65dBm (Max)		
Bluetooth Version	V4.1		
Modulation	GFSK, π /4-DQPSK, 8DPSK		
Number of channels	79		
Hardware Version	V1.0		
Software Version V1.0			
Antenna Designation	fixed antenna		
Antenna Gain	0dBi		
Power Supply DC3.7V by Battery			
Note: The USB port only used for charging and can't be used to transfer data with PC.			

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	
	0	2402MHZ	
	1	2403MHZ	
	:	:	
	38	2440 MHZ	
2402~2480MHZ	39	2441 MHZ	
	40	2442 MHZ	
	:	:	
	77	2479 MHZ	
	78	2480 MHZ	

Page 7 of 70

2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHZ,In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single of multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 79 hopping sequence in data mode: 40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67 56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59 72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75 09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06 01, 51, 03, 55, 05, 04

2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For ehavior zation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire. LAP(24 bits), 4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With this input values different mathematical procedures(permutations, additions, XOR-operations) are performed to generate te Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following ehavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always Differ from the first one.

Page 8 of 70

2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AEUVKINIVOURBN** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

Test has been referenced to the DA 00-705

2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 9 of 70

3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 2.75dB Radiated measurement: +/- 3.2dB

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Normal Operating (BT)

Note:


- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

Page 10 of 70


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Bluetooth headset	KINIVO	Kinivo Urbn	EUT
2	PC	Dell	INSPIRON	A.E
3	Control box	N/A	N/A	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Spurious Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant
§15.247	Frequency Separation	Compliant

Page 11 of 70

6. TEST FACILITY

Site	Site Compliance Certification Service(Shenzhen) Inc.		
Location No.10-1 Mingkeda Logistics Park, No.18 Huanguan South RD. Guan lan Town,Baoan Distr			
FCC Registration No.	441872		
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.		

ALL TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Power Probe	R&S	NRP-Z23	100323	07/16/2014	07/15/2015
Power meter	R&S	NRP2		07/25/2014	07/24/2015
RF attenuator	N/A	RFA20db	68	N/A	N/A
Spectrum Analyzer	Agilent	E4440A	US41421290	07/16/2014	07/15/2015
EXA Signal Analyzer	Agilent	N9010A		02/28/2015	02/27/2016
Amplifier	EM	EM30180	0607030	02/28/2015	02/27/2016
Horn Antenna	EM	EM-AH-10180	67	04/19/2015	04/18/2016
Horn Antenna	A.H. Systems Inc.	SAS-574		07/16/2014	07/15/2015
EMI Test Receiver	Rohde & Schwarz	ESCI	100694	07/16/2014	07/15/2015
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	26	06/06/2014	06/05/2015
LISN	R&S	ESH3-Z5	8389791009	07/16/2014	07/15/2015
Loop Antenna	Daze	ZN30900N	SEL0097	07/16/2014	07/15/2015
Isolation Transformer	LETEAC	LTBK		07/16/2014	07/15/2015
Radiation Cable 1	Sat	RE1	R003	06/04/2014	06/03/2015
Radiation Cable 2	Sat	RE2	R002	06/04/2014	06/03/2015
Conduction Cable	Sat	CE1	C001	06/04/2014	06/03/2015

Page 12 of 70

7. PEAK OUTPUT POWER

7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
- 3. RBW > the 20 dB bandwidth of the emission being measured, VBW ≥ RBW.
- 4. Record the maximum power from the Spectrum Analyzer.


For average power test:

- 1. Connect EUT RF output port to power probe through an RF attenuator.
- 2. Connect the power probe to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.
- 5. The maximum peak power shall be less 125mW (21dBm).


Note: The EUT was tested according to DA000705 for compliance to FCC 47CFR 15.247 requirements.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

PEAK POWER TEST SETUP

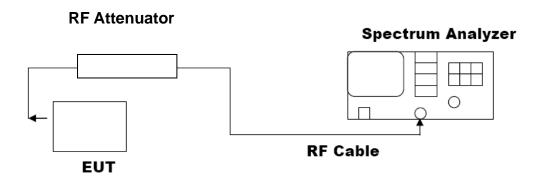


AVERAGE POWER SETUP



Page 13 of 70


7.3. LIMITS AND MEASUREMENT RESULT


	PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MOUDULATION						
Frequency (GHz)	Pass or Fail						
2.402	-2.89	-0.97	21	Pass			
2.441	1.15	3.10	21	Pass			
2.480	1.69	3.65	21	Pass			

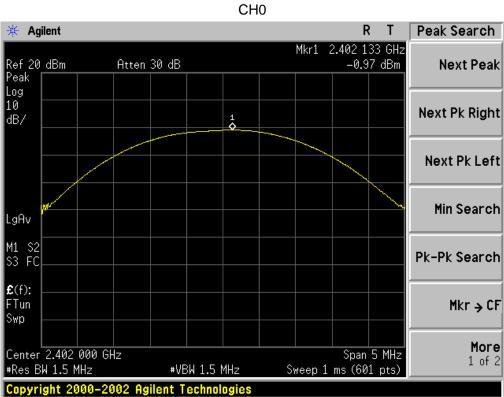

Page 14 of 70

CH39

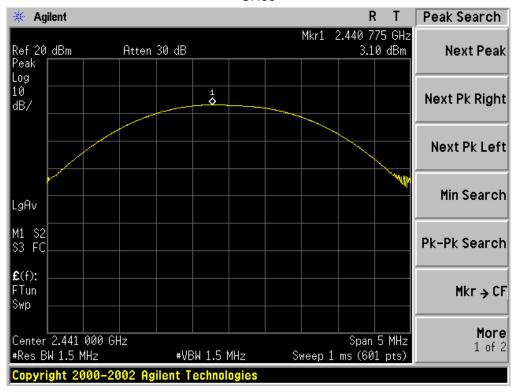


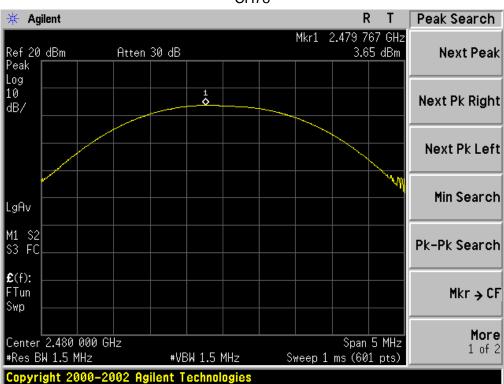

Report No.: AGC00797150501FE03 Page 15 of 70


PEAK OUTPUT POWER MEASUREMENT RESULT FOR II /4-DQPSK MODULATION									
Frequency (GHz) Average Power (dBm) Peak Power (dBm) Applicable Limits (dBm) Pass or Fail									
2.402	-6.24	-4.39	21	Pass					
2.441	-1.80	0.14	21	Pass					
2.480	-1.30	0.66	21	Pass					


CH₀

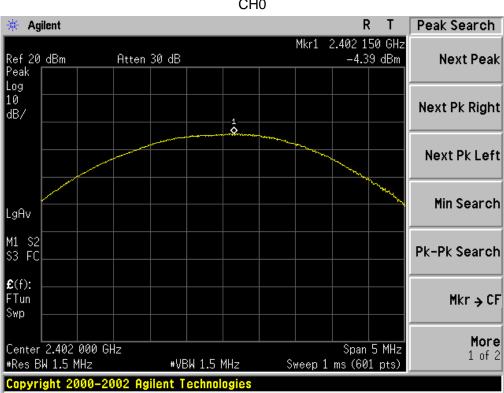

Page 16 of 70


CH39

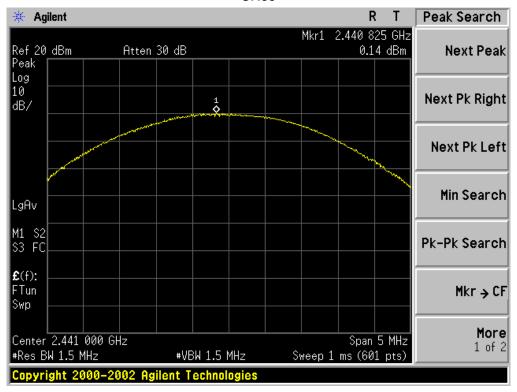

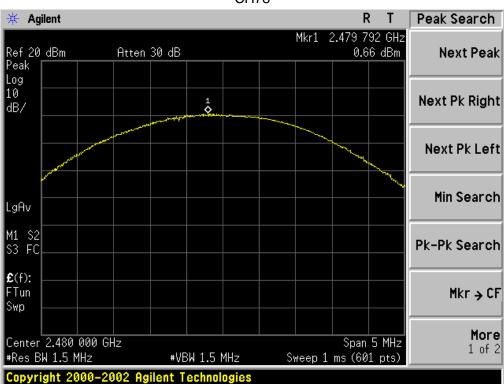


Page 17 of 70


PEAK OUTPUT POWER MEASUREMENT RESULT FOR 8-DPSK MODULATION									
Frequency (GHz) Average Power (dBm) Peak Power (dBm) Applicable Limits (dBm) Pass or Fail									
2.402	-6.01	-4.06	21	Pass					
2.441	-1.66	0.18	21	Pass					
2.480	-1.36	0.55	21	Pass					

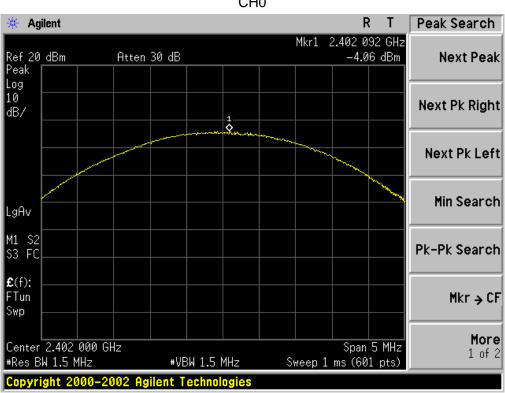

Page 18 of 70

CH39

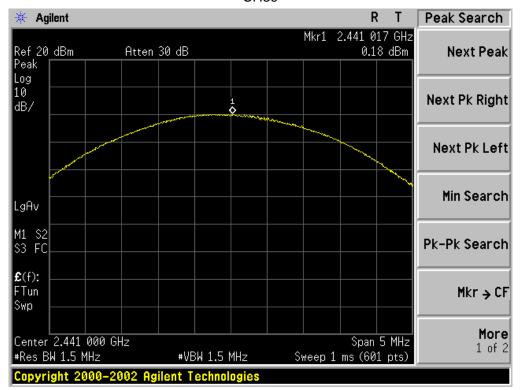

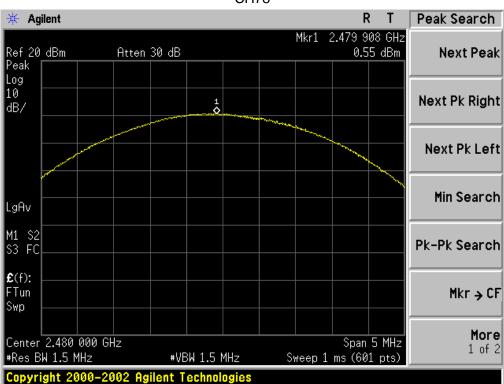


Page 19 of 70

8. 20DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

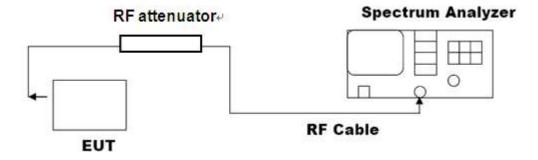

8.3. LIMITS AND MEASUREMENT RESULTS


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESUL						
Appliachla Limita	Measurement Result					
Applicable Limits	Test Da	Criteria				
	Low Channel	0.935	PASS			
N/A	Middle Channel	0.933	PASS			
	High Channel	0.920	PASS			

Page 20 of 70

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

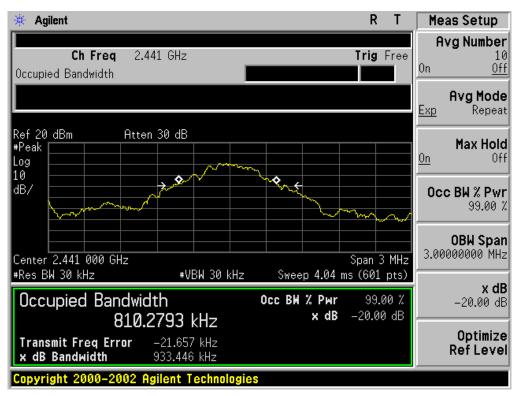

Page 21 of 70

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

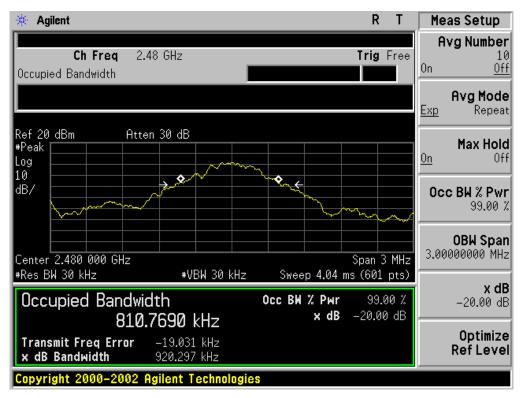

Report No.: AGC00797150501FE03 Page 22 of 70


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESUL						
A mulicable Limite	Measurement Result					
Applicable Limits	Test Da	Criteria				
	Low Channel	1.241	PASS			
N/A	Middle Channel	1.249	PASS			
	High Channel	1.231	PASS			

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




Page 23 of 70

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

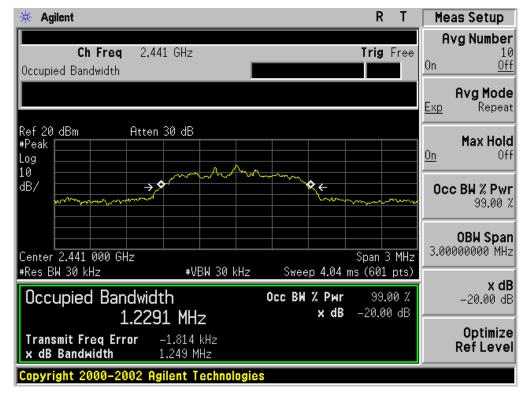


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

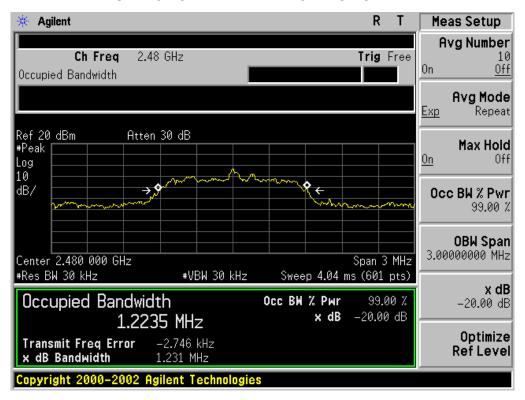

Report No.: AGC00797150501FE03 Page 24 of 70


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESUL						
Amaliachia Limita	Measurement Result					
Applicable Limits	Test Da	Criteria				
	Low Channel	1.236	PASS			
N/A	Middle Channel	1.221	PASS			
	High Channel	1.267	PASS			

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

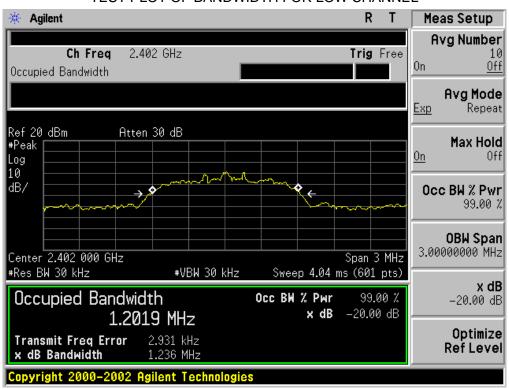


Page 25 of 70

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

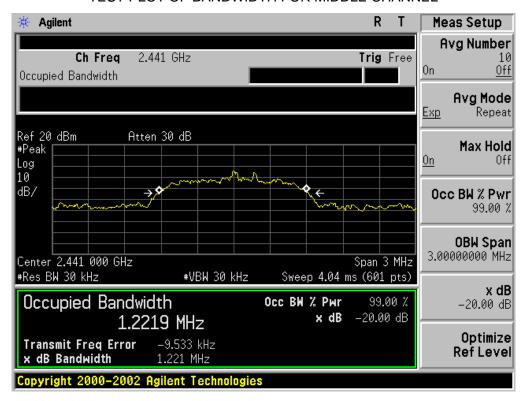

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

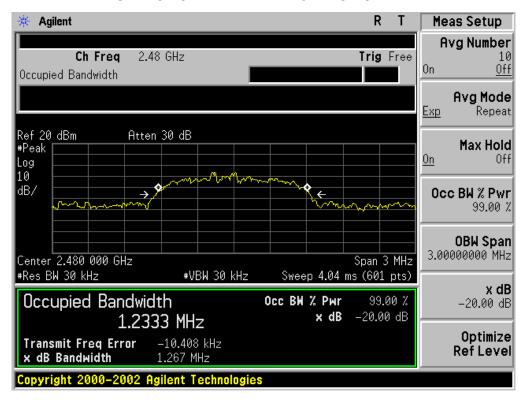

Page 26 of 70

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.

 RBW = 100 kHz; VBW ≥ RBW; Sweep = auto; Detector function = peak.
- NOW = 100 Kinz, VDW = NDW, Owcop = auto, Detector
- 4. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

9.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6


9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT							
Applicable Limite	Measurement Result						
Applicable Limits	Test Data	Criteria					
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit						
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS					
intentional radiator is operating, the radio frequency	Channel						
power that is produce by the intentional radiator							
shall be at least 20 dB below that in 100KHz							
bandwidth within the band that contains the highest							
level of the desired power.	At least -20dBc than the limit	PASS					
In addition, radiation emissions which fall in the	Specified on the TOP Channel	PASS					
restricted bands, as defined in §15.205(a), must also							
comply with the radiated emission limits specified							
in§15.209(a))							

Page 27 of 70


TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF GFSK MODULATION IN LOW CHANNEL

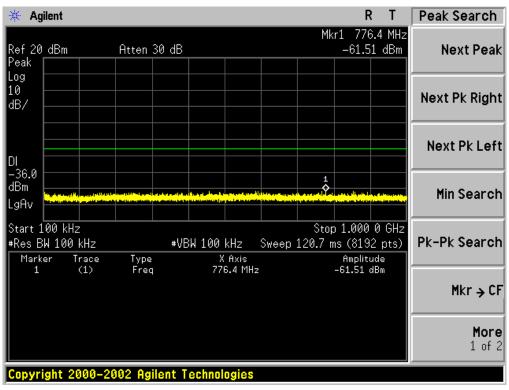


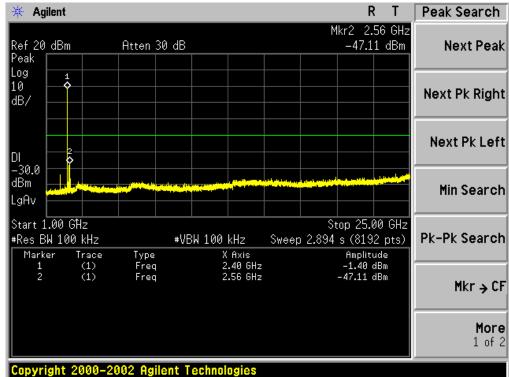

Page 28 of 70


TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL

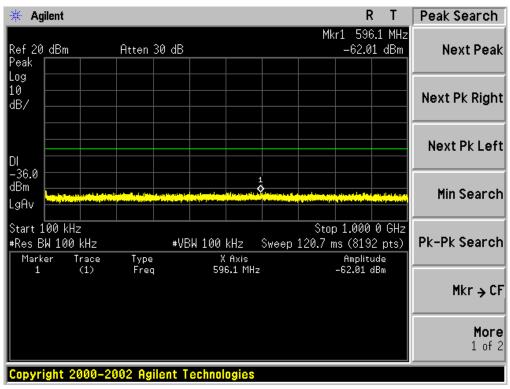


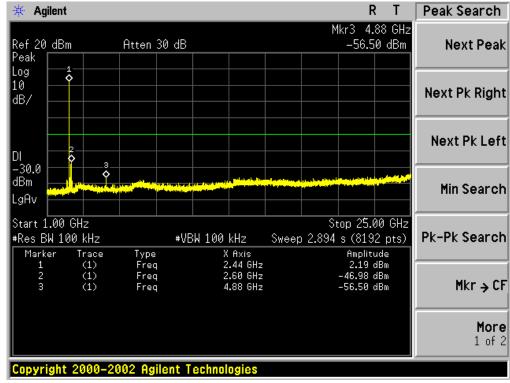

Page 29 of 70

TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN HIGH CHANNEL

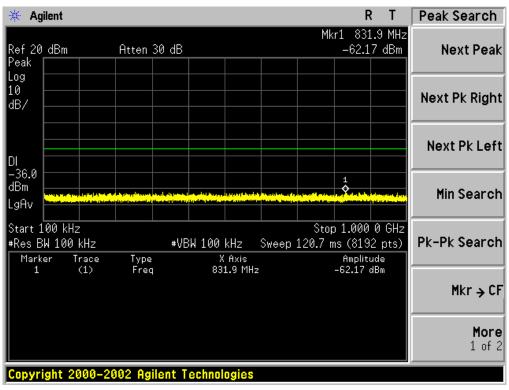

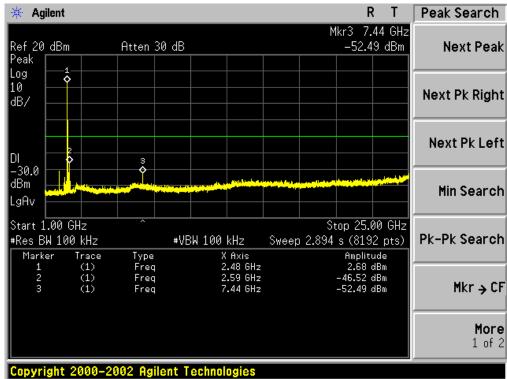

Page 30 of 70

10. RADIATED EMISSION

10.1. MEASUREMENT PROCEDURE

Measurement procedure below is according to ANSI C63.10:2009

- 1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 0.8 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
- 4. Set to the maximum power setting and enable the EUT transmit continuously.
- 5. Use the following spectrum analyzer settings:
- (1) Span shall wide enough to fully capture the emission being measured;
- (2) Set RBW=100 kHz for f < 1 GHz, RBW=1MHz for f>1GHz; VBW ≥ RBW; Sweep = auto;

Detector function = peak; Trace = max hold for peak

(3) For average measurement: use duty cycle correction factor method per 15.35(c).

Duty cycle = On time/100 milliseconds

On time = N1*L1+N2*L2+...+Nn-1*LNn-1+Nn*Ln

Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc.

Average Emission Level = Peak Emission Level + 20*log(Duty cycle)

6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from 20log (dwell time/100ms). This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

Report No.: AGC00797150501FE03 Page 31 of 70

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting				
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP				
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP				
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP				
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average				

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Page 32 of 70

10.2. TEST SETUP


RADIATED EMISSION TEST SETUP BELOW 30MHz

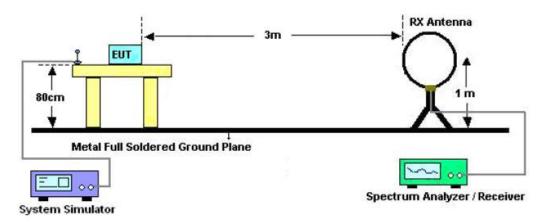

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

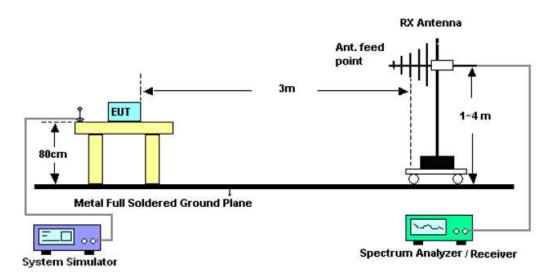

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

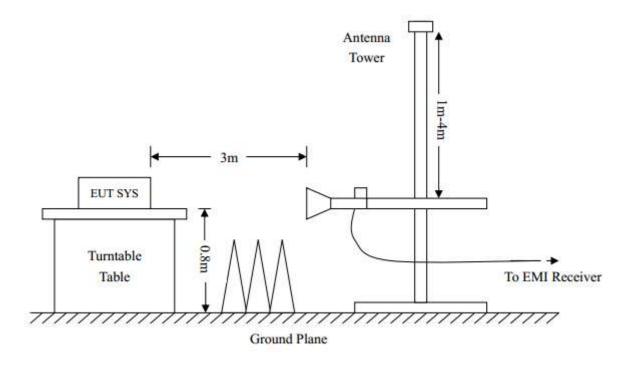

Humidity: 60 %

Page 34 of 70

10.3. TEST RESULT (Worst Modulation: GFSK)

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL



Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth headset

M/N: Kinivo Urbn Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		60.7167	12.50	11.09	23.59	40.00	-16.41	peak			
2		135.0833	11.52	14.38	25.90	43.50	-17.60	peak			
3	*	230.4667	18.68	13.16	31.84	46.00	-14.16	peak			
4		317.7667	11.20	16.59	27.79	46.00	-18.21	peak			
5		536.0167	5.94	22.10	28.04	46.00	-17.96	peak		·	-
6		896.5333	2.11	28.52	30.63	46.00	-15.37	peak			

Power:


Distance: 3m

RESULT: PASS

Humidity: 60 %

Page 35 of 70

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

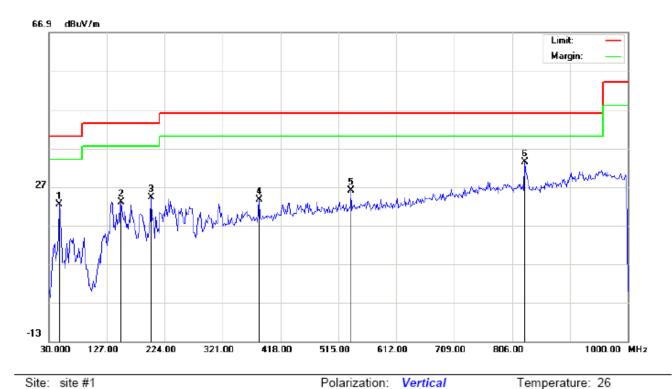

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth headset

M/N: Kinivo Urbn Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB	cm	degree		
1		47.7833	14.09	8.39	22.48	40.00	-17.52	peak			
2		151.2500	7.79	15.27	23.06	43.50	-20.44	peak			
3		201.3667	15.17	9.13	24.30	43.50	-19.20	peak			
4		382.4333	4.59	18.95	23.54	46.00	-22.46	peak			
5		536.0167	4.00	22.10	26.10	46.00	-19.90	peak			
6	*	827.0167	6.09	27.31	33.40	46.00	-12.60	peak		·	

Power:

Distance: 3m


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 36 of 70

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

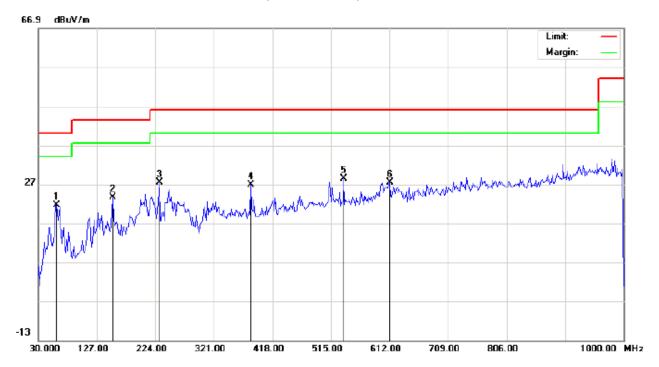

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth headset

M/N: Kinivo Urbn

Mode: Middle Channel TX

Note:

Polarization: Horizontal Temperature: 26
Power: Humidity: 60 %

Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		60.7167	10.47	11.09	21.56	40.00	-18.44	peak			
2		152.8667	8.33	15.28	23.61	43.50	-19.89	peak			
3		230.4667	14.25	13.16	27.41	46.00	-18.59	peak			
4		382.4333	7.82	18.95	26.77	46.00	-19.23	peak			
5	*	536.0167	6.37	22.10	28.47	46.00	-17.53	peak			
6		612.0000	3.71	23.76	27.47	46.00	-18.53	peak			


RESULT: PASS

Temperature: 26

Humidity: 60 %

Page 37 of 70

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

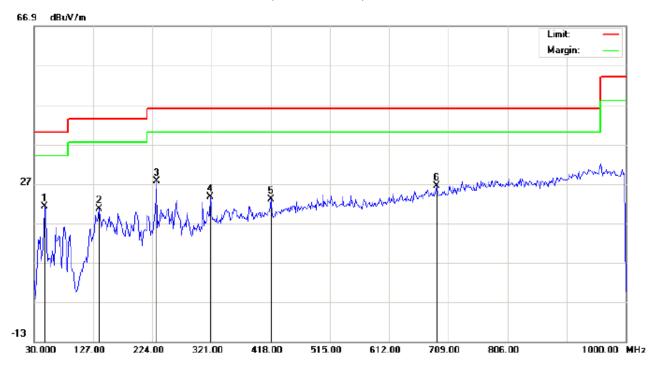

Polarization: Vertical

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth headset

M/N: Kinivo Urbn

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		47.7833	12.91	8.39	21.30	40.00	-18.70	peak			
2		136.7000	6.70	13.82	20.52	43.50	-22.98	peak			
3	*	230.4667	15.60	11.99	27.59	46.00	-18.41	peak			
4		319.3833	6.81	16.70	23.51	46.00	-22.49	peak			
5		418.0000	3.46	19.62	23.08	46.00	-22.92	peak			
6		689.6000	1.40	24.91	26.31	46.00	-19.69	peak			

Power:

Distance: 3m


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 38 of 70

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

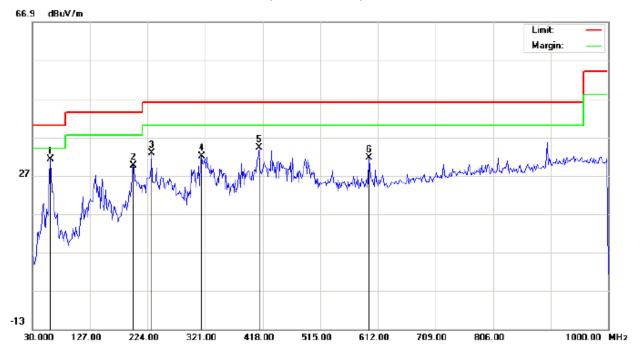

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth headset

M/N: Kinivo Urbn Mode: High Channel TX

Note:

Polarization: Horizontal Temperature: 26
Power: Humidity: 60 %


Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1	*	60.7167	20.16	11.09	31.25	40.00	-8.75	peak			
2		199.7500	17.60	11.99	29.59	43.50	-13.91	peak			
3		230.4667	19.59	13.16	32.75	46.00	-13.25	peak			
4		314.5333	15.64	16.38	32.02	46.00	-13.98	peak			
5		411.5333	14.76	19.42	34.18	46.00	-11.82	peak			
6		597.4500	7.99	23.67	31.66	46.00	-14.34	peak			

Humidity: 60 %

Page 39 of 70

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

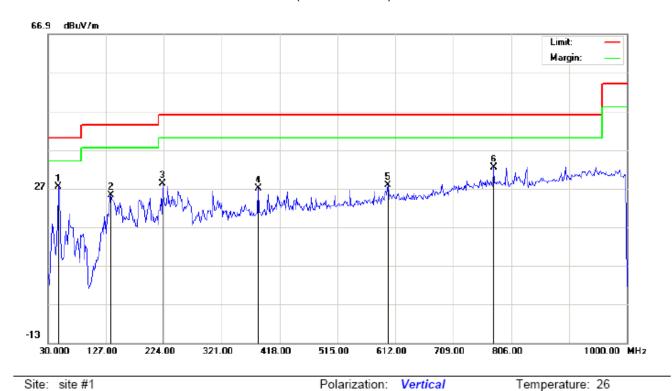

Limit: FCC Class B 3M Radiation

EUT: Bluetooth headset

LOT. Didetootii ileadse

M/N: Kinivo Urbn Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	47.7833	18.96	8.39	27.35	40.00	-12.65	peak			
2		135.0833	12.08	13.15	25.23	43.50	-18.27	peak			
3		222.3833	16.95	11.19	28.14	46.00	-17.86	peak			
4		382.4333	8.13	18.95	27.08	46.00	-18.92	peak			
5		599.0667	5.02	22.73	27.75	46.00	-18.25	peak			
6		776.9000	5.39	27.00	32.39	46.00	-13.61	peak			

Power:

Distance: 3m

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 40 of 70

RADIATED EMISSION ABOVE 1GHZ

RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)-LOW CHANNEL-HORIZONTAL

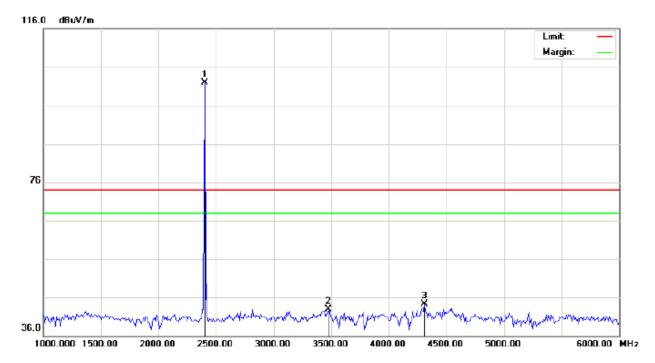

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:


M/N: Kinivo Urbn Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2402.000	91.57	10.32	101.89	74.00	27.89	peak			
2		3475.000	30.78	12.09	42.87	74.00	-31.13	peak			
3		4308.333	34.23	10.07	44.30	74.00	-29.70	peak			

Page 41 of 70

RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)-LOW CHANNEL -VERTICAL

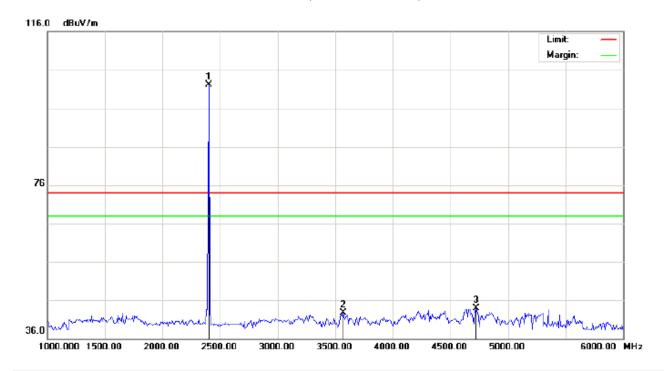

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:


M/N: Kinivo Urbn Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2402.000	91.70	10.32	102.02	74.00	28.02	peak			
2		3566.667	30.15	12.52	42.67	74.00	-31.33	peak			
3		4725.000	36.36	7.48	43.84	74.00	-30.16	peak			

Page 42 of 70

RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)-MIDDLE CHANNEL-HORIZONTAL

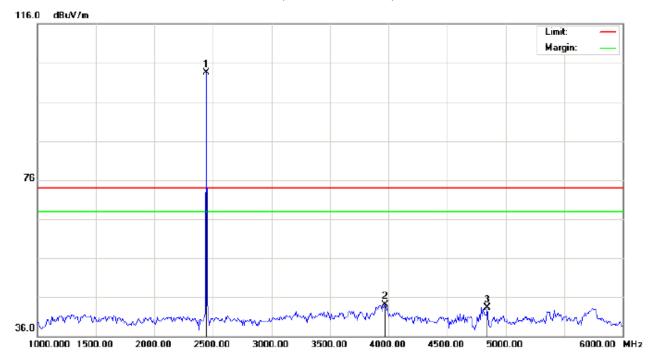

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:

M/N: Kinivo Urbn


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2441.000	93.11	10.36	103.47	74.00	29.47	peak			
2		3966.667	29.07	14.98	44.05	74.00	-29.95	peak			
3		4841.667	35.57	7.78	43.35	74.00	-30.65	peak			

Page 43 of 70

RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics) - MIDDLE CHANNEL - VERTICAL

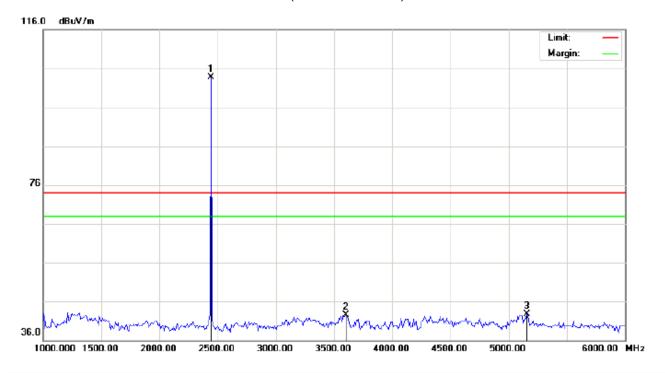

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:

M/N: Kinivo Urbn


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2441.000	93.41	10.36	103.77	74.00	29.77	peak			
2		3600.000	29.80	12.73	42.53	74.00	-31.47	peak			
3		5158.333	37.59	5.03	42.62	74.00	-31.38	peak			

Page 44 of 70

RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)-HIGH CHANNEL-HORIZONTAL

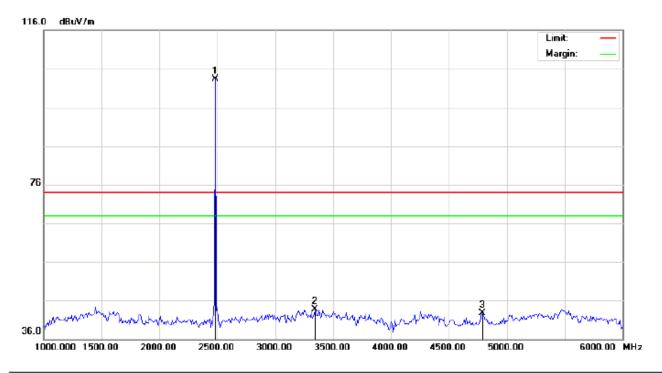

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:


M/N: Kinivo Urbn Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	92.89	10.41	103.30	74.00	29.30	peak			
2		3341.667	31.70	11.96	43.66	74.00	-30.34	peak			
3		4791.667	35.03	7.65	42.68	74.00	-31.32	peak			

Page 45 of 70

RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)-HIGH CHANNEL -VERTICAL

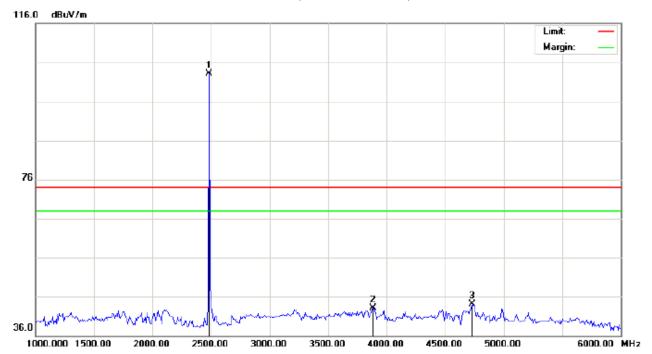

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:

M/N: Kinivo Urbn Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1	*	2480.000	92.76	10.41	103.17	74.00	29.17	peak			
2		3883.333	28.68	14.47	43.15	74.00	-30.85	peak			
3		4733.333	36.53	7.50	44.03	74.00	-29.97	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 46 of 70

11. BAND EDGE EMISSION

11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency=Operation Frequency, RBW>=100kHz, VBW>=3*RBW, Center frequency =Operation frequency
- 3. The band edges was measured and recorded.


11.2. TEST SET-UP

Radiated same as 10.2

Page 47 of 70

11.3. TEST RESULT (Worst Modulation: GFSK)

TEST PLOT OF BAND EDGE FOR LOW CHANNEL (1Mbps)-Horizontal

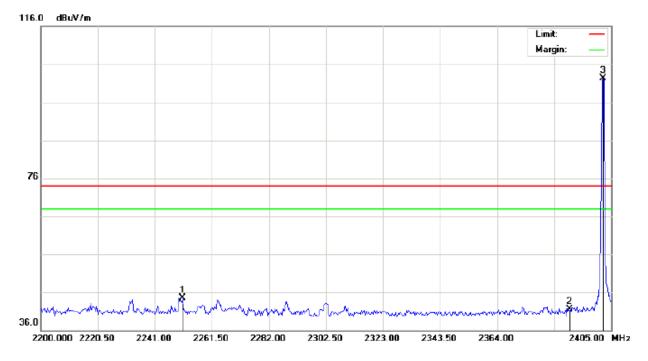

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset

Distance:


M/N: Kinivo Urbn

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	•	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2250.908	34.34	10.16	44.50	74.00	-29.50	peak			
2		2390.000	31.12	10.31	41.43	74.00	-32.57	peak			
3	*	2402.000	91.91	10.32	102.23	74.00	28.23	peak			

Page 48 of 70

TEST PLOT OF BAND EDGE FOR LOW CHANNEL (1Mbps)-Vertical

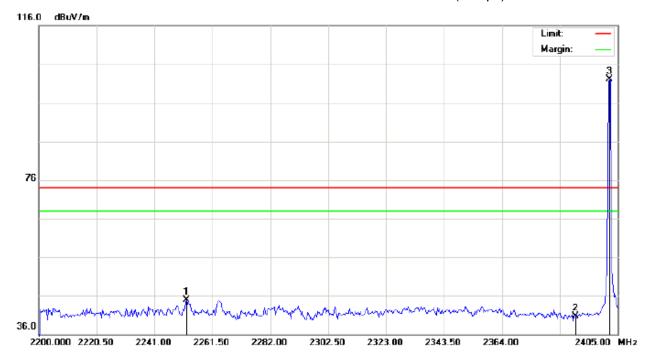

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %


EUT: Bluetooth headset Distance:

M/N: Kinivo Urbn Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2252.275	34.80	10.16	44.96	74.00	-29.04	peak			
2		2390.000	30.35	10.31	40.66	74.00	-33.34	peak			
3	*	2402.000	91.76	10.32	102.08	74.00	28.08	peak			

Page 49 of 70

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (1Mbps)-Horizontal

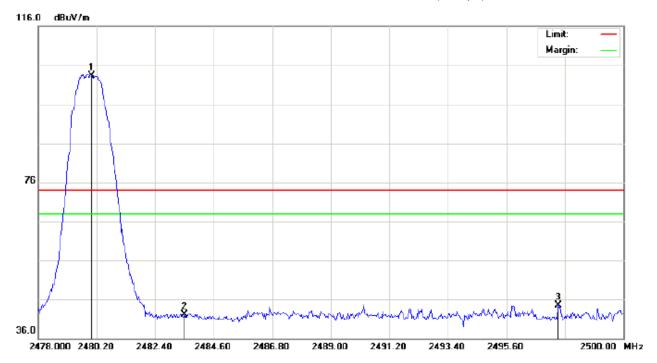

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:


M/N: Kinivo Urbn

Mode: High Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	92.96	10.41	103.37	74.00	29.37	peak			
2		2483.500	31.75	10.41	42.16	74.00	-31.84	peak			
3		2497.543	34.16	10.43	44.59	74.00	-29.41	peak			

Page 50 of 70

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (1Mbps)-Vertical

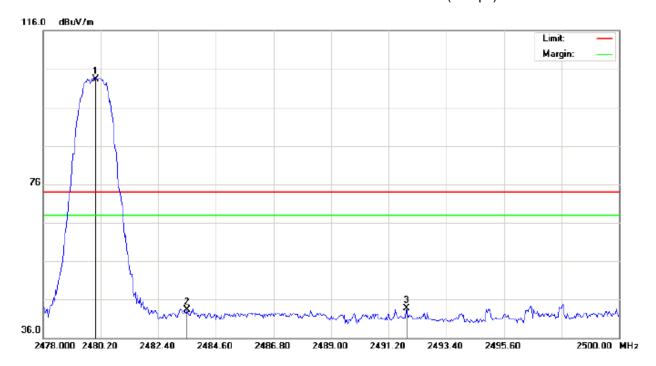

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:

M/N: Kinivo Urbn Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	92.85	10.41	103.26	74.00	29.26	peak			
2		2483.500	32.87	10.41	43.28	74.00	-30.72	peak			
3		2491.897	33.37	10.42	43.79	74.00	-30.21	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. Hopping off and Hopping on have been tested and only worst case recorded

Page 51 of 70

12. NUMBER OF HOPPING FREQUENCY

12.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
- 4. Set the Spectrum Analyzer as RBW>=1%span, VBW>=RBW.

12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2


12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

12.4. LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT		
HOPPING CHANNEL	>=15	79	PASS		

TEST PLOT FOR NO. OF TOTAL CHANNELS

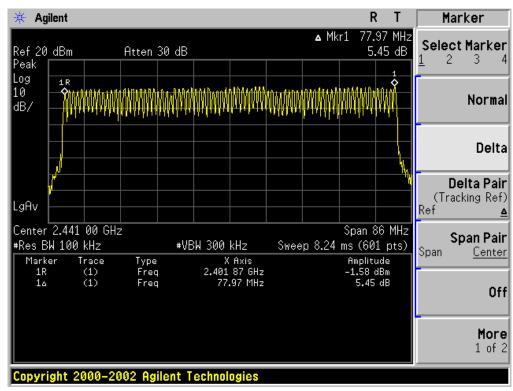

Page 52 of 70

13. TIME OF OCCUPANCY (DWELL TIME)

13.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set Span = zero span, centered on a hoping channel
- 4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz

13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

13.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

13.4. LIMITS AND MEASUREMENT RESULT

The Worst Case (3Mbps)

Channel	Time of Pulse for DH5 (ms)	Period Time (s)	Sweep Time (ms)	Limit (ms)	
Low	2.87	31.6	306.13	400	
Middle	2.908	31.6	310.19	400	
High	2.87	31.6	306.13	400	

Low Channel Time

2.87*(1600/6)/79*31.6=306.13ms

Middle Channel Time


2.908*(1600/6)/79*31.6=310.19ms

High Channel Time


2.87*(1600/6)/79*31.6=306.13ms

Page 53 of 70

TEST PLOT OF LOW CHANNEL

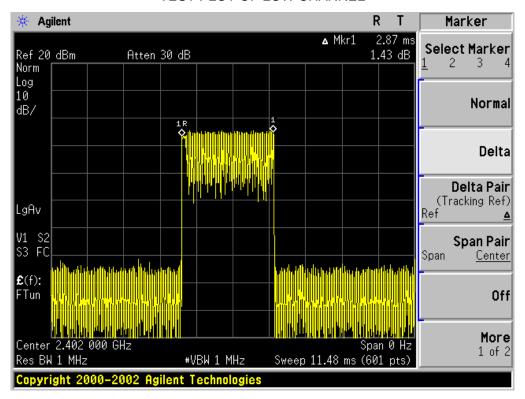


TEST PLOT OF MIDDLE CHANNEL

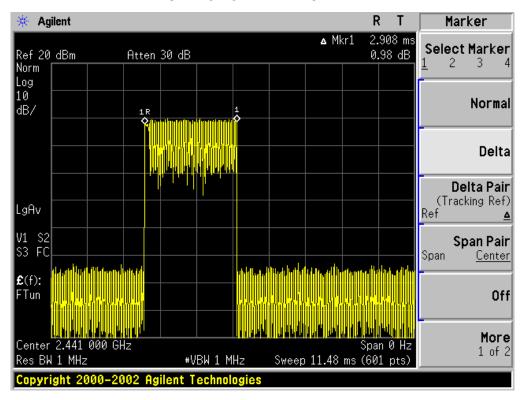

Page 54 of 70

TEST PLOT OF HIGH CHANNEL

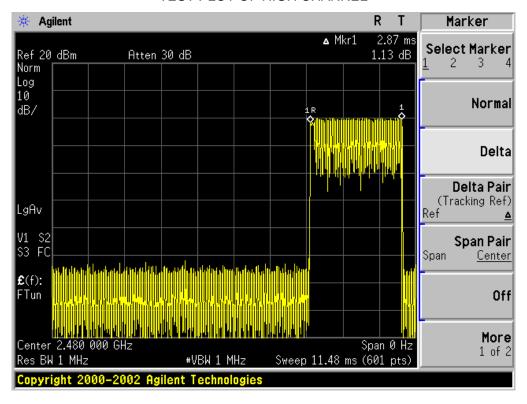

Page 55 of 70

14. FREQUENCY SEPARATION

14.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- 3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span Video (or Average) Bandwidth (VBW) ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold

14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2

14.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6.3

14.4. LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT		
	KHz	KHz	Door		
CH00-CH01	1000	>=25 KHz or 2/3 20 dB BW	Pass		

Page 56 of 70

TEST PLOT FOR FREQUENCY SEPARATION (3Mbps)

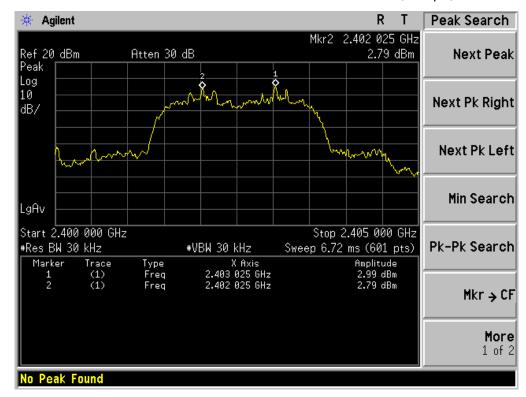

Page 57 of 70

15. FCC LINE CONDUCTED EMISSION TEST


15.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francisco	Maximum RF Line Voltage							
Frequency	Q.P.(dBuV)	Average(dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

15.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

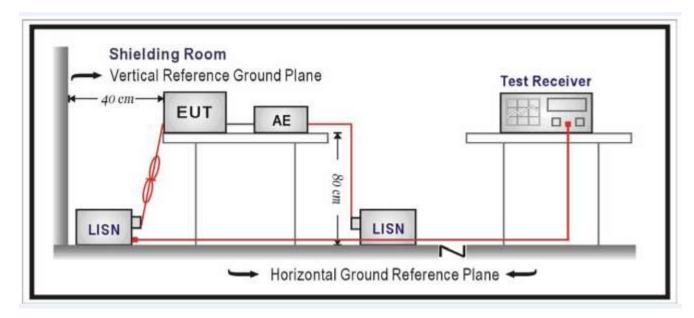

Page 58 of 70

15.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by PC which received 120V/60Hzpower by a LISN...
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


15.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Page 59 of 70

15.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

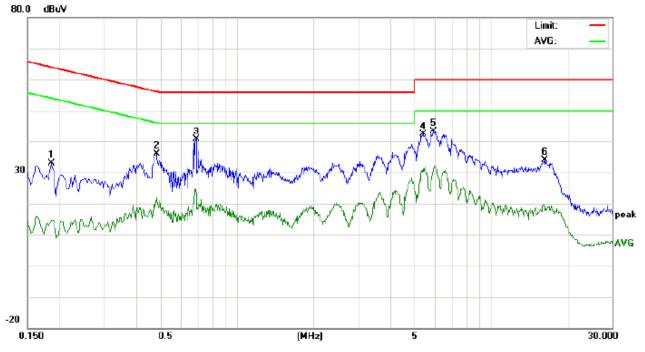

Site: Conduction

Phase: L1 Temperature: 26

Limit: FCC Class B Conduction(QP)

Power:

Humidity: 60 %

EUT: Bluetooth headset


M/N: Kinivo Urbn

Mode: Normal operation with charging

No.	Freq. (MHz)	Reading_Level (dBuV)		Correct N Factor		Measurement (dBuV)		Limit (dBuV)		Margin (dB)		P/F	Comment	
		Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1860	22.75		4.49	10.20	32.95		14.69	64.21	54.21	-31.26	-39.52	Р	
2	0.4820	25.41		11.58	10.39	35.80		21.97	56.30	46.30	-20.50	-24.33	Р	
3	0.6900	30.32		12.72	10.35	40.67		23.07	56.00	46.00	-15.33	-22.93	Р	
4	5.4140	32.03		20.98	10.25	42.28		31.23	60.00	50.00	-17.72	-18.77	Р	
5	5.9500	32.99		20.07	10.28	43.27		30.35	60.00	50.00	-16.73	-19.65	Р	
6	16.3380	23.73		7.51	10.12	33.85		17.63	60.00	50.00	-26.15	-32.37	Р	

Page 60 of 70

Line Conducted Emission Test Line 2-N

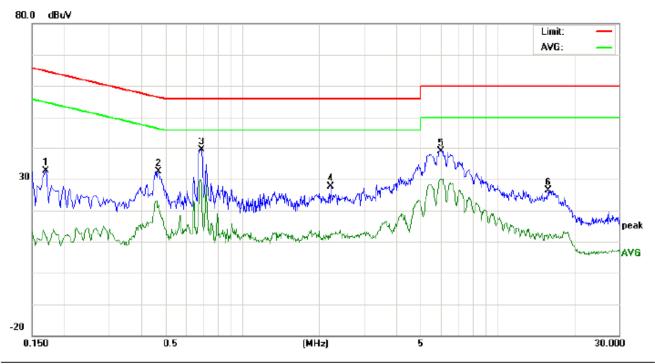

Site: Conduction Phase: N Temperature: 26
Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %

EUT: Bluetooth headset M/N: Kinivo Urbn

Mode: Normal operation with charging

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1700	22.56		1.27	10.18	32.74		11.45	64.96	54.96	-32.22	-43.51	Р	
2	0.4700	21.96		11.57	10.38	32.34		21.95	56.51	46.51	-24.17	-24.56	Р	
3	0.6900	29.05		18.07	10.35	39.40		28.42	56.00	46.00	-16.60	-17.58	Р	
4	2.2180	17.43		2.64	10.31	27.74		12.95	56.00	46.00	-28.26	-33.05	Р	
5	6.0020	28.63		19.58	10.28	38.91		29.86	60.00	50.00	-21.09	-20.14	Р	
6	15.8500	16.27		0.77	10.11	26.38		10.88	60.00	50.00	-33.62	-39.12	Р	

Page 61 of 70

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP



Report No.: AGC00797150501FE03 Page 62 of 70



Page 63 of 70

APPENDIX B: PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT




LEFT VIEW OF EUT



RIGHT VIEW OF EUT



VIEW OF EUT (Port)

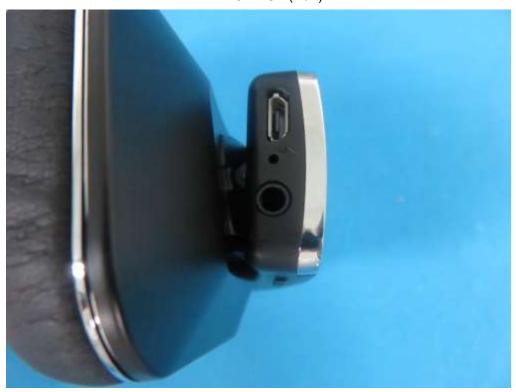


Page 67 of 70


OPEN VIEW OF EUT




INTERNAL VIEW OF EUT-1

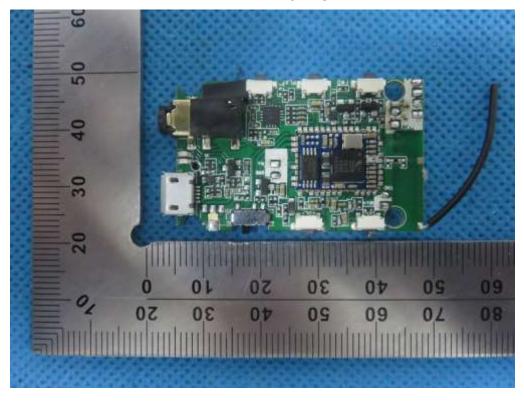


INTERNAL VIEW OF EUT-2

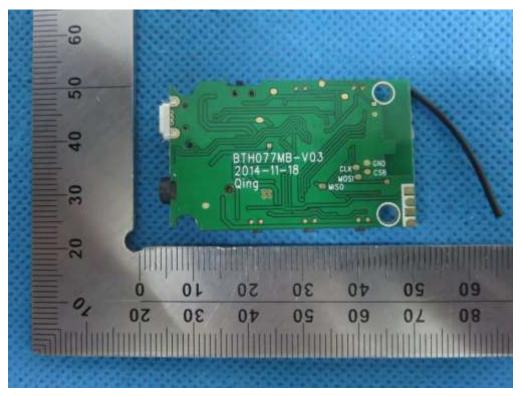


INTERNAL VIEW OF EUT-3

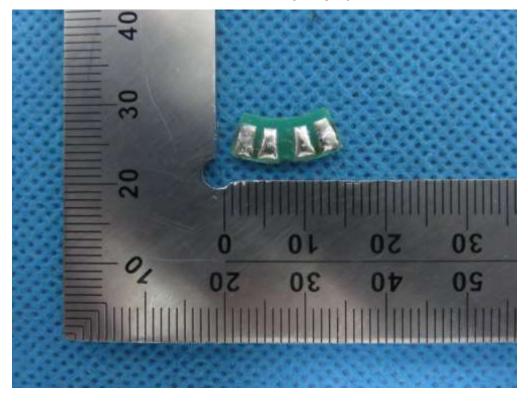


INTERNAL VIEW OF EUT-4

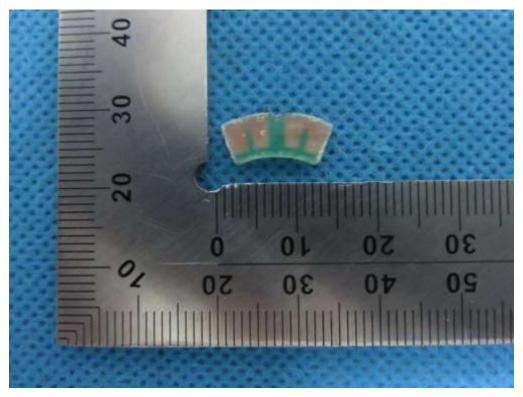


INTERNAL VIEW OF EUT-5

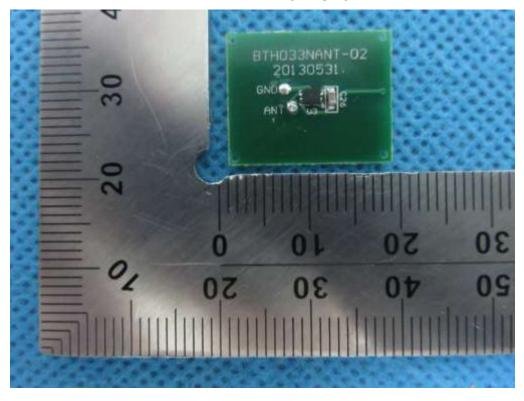

INTERNAL VIEW OF EUT-6

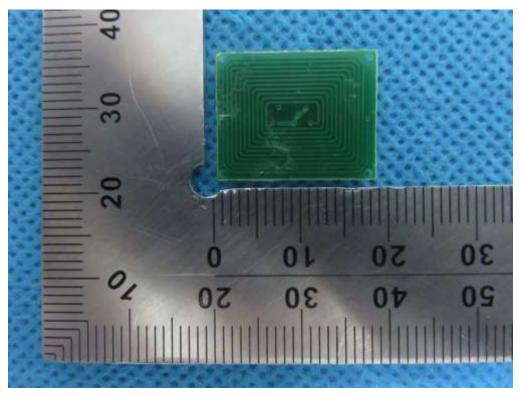

INTERNAL VIEW OF EUT-7

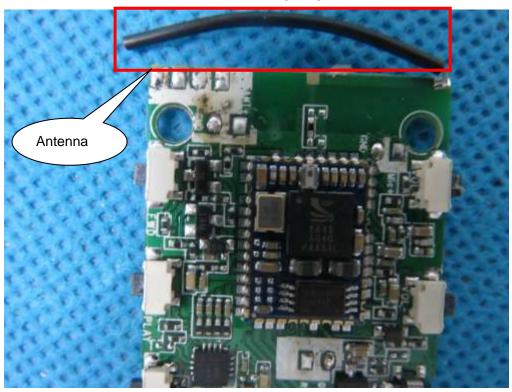

----END OF REPORT----