# **FCC Test Report**

Report No.: AGC00797150501FE08

FCC ID : 2AEUVKINIVOURBN

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: Bluetooth headset

**BRAND NAME** : KINIVO

**MODEL NAME** : Kinivo Urbn

**CLIENT** : Kinivo Inc

**DATE OF ISSUE** : May 14,2015

**STANDARD(S)** : FCC Part 15 Rules

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

# CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 52

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 14,2015	Valid	Original Report

Page 3 of 52

# **TABLE OF CONTENTS**

1. VERIFICATION OF COMPLIANCE	
2.GENERAL INFORMATION	
2.2 RELATED SUBMITTAL(S)/GRANT(S)	
2.3TEST METHODOLOGY	
2.4 SPECIAL ACCESSORIES	
2.5 EQUIPMENT MODIFICATIONS	
2.6 MEASUREMENT UNCERTAINTY	6
3. SYSTEM TEST CONFIGURATION	7
3.2 EQUIPMENT USED IN TESTED SYSTEM	7
3.3. SUMMARY OF TEST RESULTS	7
4. DESCRIPTION OF TEST MODES	8
5.2. TEST RESULT	8
6. TEST FACILITY	g
7. RADIATED EMISSION	
7.2 TEST SETUP	
7.3 LIMITS AND MEASUREMENT RESULT	
7.4 TEST RESULT (Worst Modulation: GFSK)	14
8. BAND EDGE EMISSION	26
8.2. TEST SET-UP	26
8.3. TEST RESULT	27
9. 20DB BANDWIDTH	
9.2. SUMMARY OF TEST RESULTS/PLOTS	31
<b>10. CONDUCTED OUTPUT POWER</b>	33
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	33
10.3. LIMITS AND MEASUREMENT RESULT	34
11. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	
11.1 MEASUREMENT PROCEDURE	
11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	

Page 4 of 52

APPI	ENDIX B: PHOTOGRAPHS OF EUT	. 45
APPI	ENDIX A: PHOTOGRAPHS OF TEST SETUP	.43
12	2.5 TEST RESULT OF POWER LINE	.41
12	2.4 FINAL TEST PROCEDURE	.40
12	2.3 PRELIMINARY PROCEDURE	.40
12	2.2 TEST SETUP	.39
12	2.1 LIMITS	.39
12. F	FCC LINE CONDUCTED EMISSION TEST	.39
11	1.3 LIMITS AND MEASUREMENT RESULT	.36

Page 5 of 52

#### 1. VERIFICATION OF COMPLIANCE

Applicant	Kinivo Inc
Address	8573 154th Ave NE Redmond WA 98052 US
Manufacturer	Zhongshan K-mate General Electronics Co., Ltd.
Address	NO.2, 5th Xinsheng Street, Gangkou Town, Zhongshan City, Guangdong, China
Product Designation	Bluetooth headset
Brand Name	KINIVO
Test Model	Kinivo Urbn
Date of test	May 12,2015 to May 13,2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BLE/RF (2013-03-01)

#### WE HEREBY CERTIFY THAT:

The above equipment was tested by Compliance Certification Service(Shenzhen) Inc.The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Prepared By

Jerry Xiao May 14,2015

Checked By

Forrest Lei May 14,2015

Authorized By

Solger Zhang May 14,2015

Page 6 of 52

# 2.GENERAL INFORMATION 2.1PRODUCT DESCRIPTION

The EUT is designed as a "Bluetooth headset". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
Bluetooth Version	V4.1
Modulation	GFSK
Number of channels 40 Channel(37 Hopping Channel,3 advertising Channel)	
Antenna Designation	fixed antenna
Antenna Gain	0dBi
Hardware Version	V1.0
Software Version	V1.0
Power Supply	DC3.7V by Battery

Note: 1. The USB Port can not be used for communication with PC. It's only for charging. 2.The EUT support BLE function

#### 2.2 RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2AEUVKINIVOURBN** filing to comply with Section 15.247of the FCC Part 15, Subpart C Rules.

#### 2.3TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The test has been referenced the KDB 558074 D01 DTS Meas Guidance v03r02

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions. The EUT was tested in all three orthogonal planes and the worse case was showed.

#### 2.4 SPECIAL ACCESSORIES

Refer to section 2.2.

#### 2.5 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

#### 2.6 MEASUREMENT UNCERTAINTY

Radiation Emission:+/-3.2


Conduction Emission:+/-2.5

Page 7 of 52


# 3. SYSTEM TEST CONFIGURATION

# 3.1 CONFIGURATION OF TESTED SYSTEM

Configuration: Normal Operating



Configuration: Continuous TX



# 3.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Bluetooth headset	KINIVO	Kinivo Urbn	EUT
2	PC	Dell	INSPIRON	A.E
3	Control box	N/A	N/A	A.E

# 3.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 15.203	Antenna Requirement	Compliant
§15.209 §15.247(d)	Radiated Emission	Compliant
§15.247(d)	Band Edges	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247(b)	Conducted Power	Compliant
§15.247(e)	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.207	Line Conduction Emission	Compliant

Page 8 of 52

#### 4. DESCRIPTION OF TEST MODES

The EUT has been operated in one modulation: GFSK.

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Normal Operating (BT)

#### Note:

- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report if no any records.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. Transmitting duty cycle >98%, The average correction factor is about -0.18

#### 5. ANTENNA REQUIREMENT

#### **5.1. STANDARD APPLICABLE**

According to FCC 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

#### **5.2. TEST RESULT**

This product has a permanent antenna, fulfill the requirement of this section.

Page 9 of 52

# **6. TEST FACILITY**

Site	Compliance Certification Service(Shenzhen) Inc.				
Location	No.10-1 Mingkeda Logistics Park, No.18 Huanguan South RD. Guan lan Town,Baoan Distr				
FCC Registration No.	441872				
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.				

#### **ALL TEST EQUIPMENT LIST**

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Power Probe	R&S	NRP-Z23	100323	07/16/2014	07/15/2015
Power meter	R&S	NRP2		07/25/2014	07/24/2015
RF attenuator	N/A	RFA20db	68	N/A	N/A
Spectrum Analyzer	Agilent	E4440A	US41421290	07/16/2014	07/15/2015
EXA Signal Analyzer	Agilent	N9010A		02/28/2015	02/27/2016
Amplifier	EM	EM30180	0607030	02/28/2014	02/27/2015
Horn Antenna	EM	EM-AH-10180	67	04/19/2015	04/18/2016
Horn Antenna	A.H. Systems Inc.	SAS-574		07/16/2014	07/15/2015
EMI Test Receiver	Rohde & Schwarz	ESCI	100694	07/16/2014	07/15/2015
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	26	06/06/2014	06/05/2015
LISN	R&S	ESH3-Z5	8389791009	07/16/2014	07/15/2015
Loop Antenna	Daze	ZN30900N	SEL0097	07/16/2014	07/15/2015
Isolation Transformer	LETEAC	LTBK		07/16/2014	07/15/2015
Radiation Cable 1	Sat	RE1	R003	06/04/2014	06/03/2015
Radiation Cable 2	Sat	RE2	R002	06/04/2014	06/03/2015
Conduction Cable	Sat	CE1	C001	06/04/2014	06/03/2015

Page 10 of 52

#### 7. RADIATED EMISSION

#### 7.1 MEASUREMENT PROCEDURE

Measurement procedure below is according to ANZI C63.4:2009

- 1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 0.8 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
- Set to the maximum power setting and enable the EUT transmit continuously.
- 5. Use the following spectrum analyzer settings:
- (1) Span shall wide enough to fully capture the emission being measured;
- (2) Set RBW=100 kHz for f < 1 GHz, RBW=1MHz for f>1GHz; VBW ≥ RBW; Sweep = auto;

Detector function = peak; Trace = max hold for peak

(3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds

On time = N1\*L1+N2\*L2+...+Nn-1\*LNn-1+Nn\*Ln

Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc.

Average Emission Level = Peak Emission Level + 20\*log(Duty cycle)

6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from 20log (dwell time/100ms). This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

.


Page 11 of 52

# 7.2 TEST SETUP

#### RADIATED EMISSION TEST SETUP BELOW30MHz

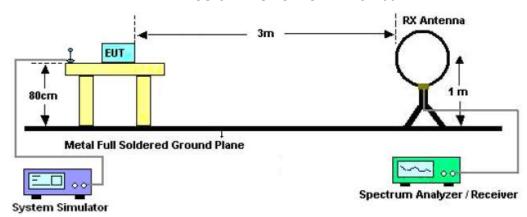


# RADIATED EMISSION TEST SETUP 30MHz-1000MHz

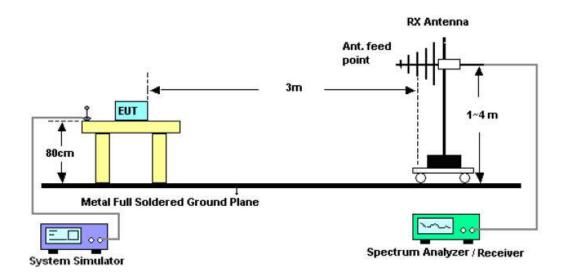

Page 12 of 52

# RADIATED EMISSION TEST SETUP ABOVE 1000MHz

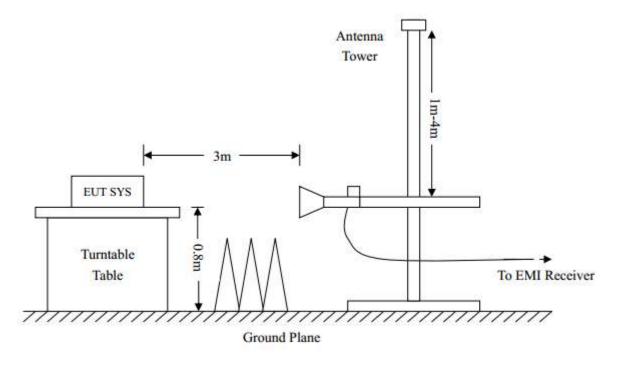

Page 13 of 52

# 7.3 LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)		
0.009~0.490	2400/F(KHz)	300		
0.490~1.705	24000/F(KHz)	30		
1.705~30.0	30	30		
30~88	100	3		
88~216	150	3		
216~960	200	3		
Above 960	500	3		

Note: All modes were tested For restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

Page 14 of 52


# 7.4 TEST RESULT (Worst Modulation: GFSK)

#### **RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.

#### **RADIATED EMISSION BELOW 1GHZ**

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

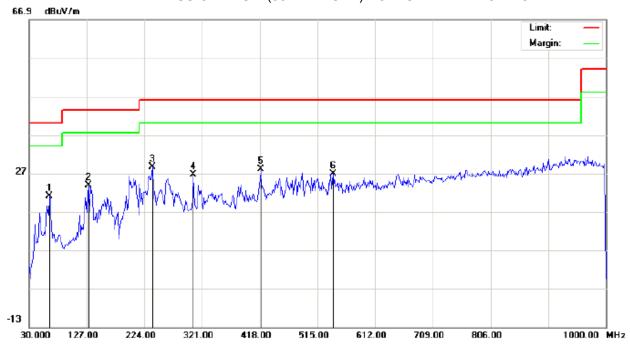

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth headset

M/N: Kinivo Urbn Mode: Low Channel TX

Note:


Polarization: Horizontal Temperature: 26
Power: Humidity: 60 %

Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		63.9500	10.19	10.80	20.99	40.00	-19.01	peak			
2		130.2333	10.24	13.57	23.81	43.50	-19.69	peak			
3	*	236.9333	15.23	13.40	28.63	46.00	-17.37	peak			
4		306.4500	10.70	15.84	26.54	46.00	-19.46	peak			
5		419.6167	8.37	19.67	28.04	46.00	-17.96	peak			
6		540.8667	4.60	22.23	26.83	46.00	-19.17	peak			

Page 15 of 52

# RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

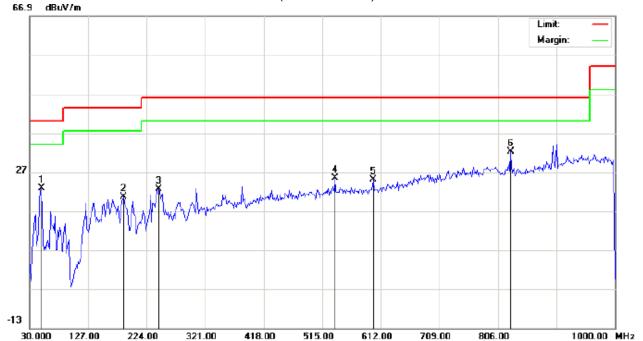

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation Power: Humidity: 60 %

EUT: Bluetooth headset Distance: 3m

M/N: Kinivo Urbn Mode: Low Channel TX

Note:

No.		Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		49.4000	14.54	8.28	22.82	40.00	-17.18	peak			
2		185.2000	7.76	12.75	20.51	43.50	-22.99	peak			
3		243.4000	9.27	13.25	22.52	46.00	-23.48	peak			
4		536.0167	3.37	22.10	25.47	46.00	-20.53	peak			
5		599.0667	2.18	22.73	24.91	46.00	-21.09	peak			
6	*	827.0167	4.92	27.31	32.23	46.00	-13.77	peak			


#### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 16 of 52

# RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

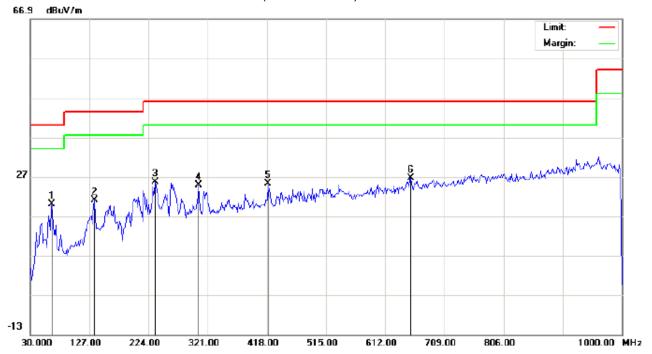

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation Power: Humidity: 60 %

EUT: Bluetooth headset Distance: 3m

M/N: Kinivo Urbn

Mode: Middle Channel TX

Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		65.5667	9.35	10.65	20.00	40.00	-20.00	peak			
2		135.0833	6.61	14.38	20.99	43.50	-22.51	peak			
3		235.3167	12.26	13.34	25.60	46.00	-20.40	peak			
4		306.4500	9.02	15.84	24.86	46.00	-21.14	peak			
5		419.6167	5.47	19.67	25.14	46.00	-20.86	peak			
6	*	654.0333	2.63	23.96	26.59	46.00	-19.41	peak			

Temperature: 26

Humidity: 60 %

Page 17 of 52

# RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

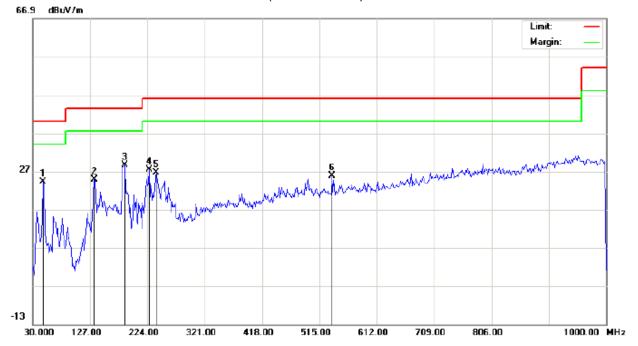

Polarization:

Distance: 3m

Power:

Vertical

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth headset

M/N: Kinivo Urbn

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		47.7833	15.88	8.39	24.27	40.00	-15.73	peak			
2		133.4667	12.26	12.48	24.74	43.50	-18.76	peak			
3	*	185.2000	15.79	12.75	28.54	43.50	-14.96	peak			
4		227.2333	15.81	11.67	27.48	46.00	-18.52	peak			
5		238.5500	13.74	12.78	26.52	46.00	-19.48	peak	·		
6		536.0167	3.73	22.10	25.83	46.00	-20.17	peak			


#### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 18 of 52

# RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

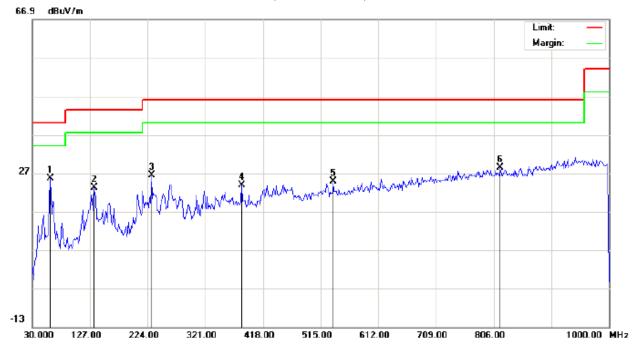

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth headset

M/N: Kinivo Urbn

Mode: High Channel TX

Note:

Polarization:	Horizontal	Temperature: 26
Power:		Humidity: 60 %

Distance: 3m


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	60.7167	14.53	11.09	25.62	40.00	-14.38	peak			
2		133.4667	9.06	14.11	23.17	43.50	-20.33	peak			
3		230.4667	13.20	13.16	26.36	46.00	-19.64	peak			
4		382.4333	4.79	18.95	23.74	46.00	-22.26	peak			
5		536.0167	2.78	22.10	24.88	46.00	-21.12	peak			
6		817.3167	1.16	27.32	28.48	46.00	-17.52	peak		·	

Temperature: 26

Humidity: 60 %

Page 19 of 52

# RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

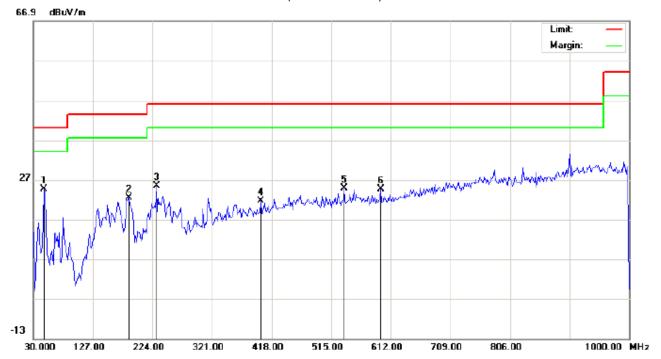

Polarization: Vertical

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth headset

M/N: Kinivo Urbn

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	47.7833	16.24	8.39	24.63	40.00	-15.37	peak			
2		185.2000	9.56	12.75	22.31	43.50	-21.19	peak			
3		230.4667	13.32	11.99	25.31	46.00	-20.69	peak			
4		400.2167	2.45	19.08	21.53	46.00	-24.47	peak			
5		536.0167	2.80	22.10	24.90	46.00	-21.10	peak		·	
6		595.8333	1.80	22.71	24.51	46.00	-21.49	peak			

Power:

Distance: 3m

#### **RESULT: PASS**


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 20 of 52

#### **RADIATED EMISSION ABOVE 1GHZ**

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

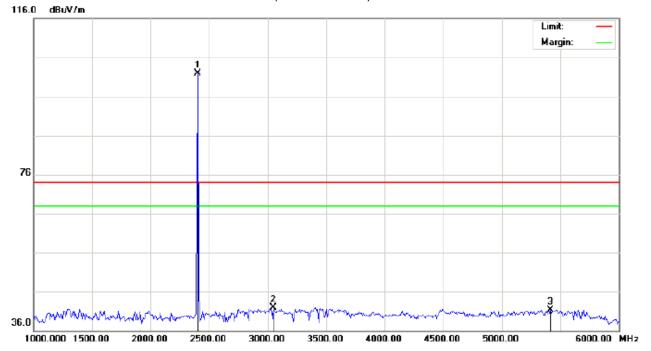

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:


M/N: Kinivo Urbn Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2402.000	91.61	10.32	101.93	74.00	27.93	peak			
2		3050.000	30.19	11.69	41.88	74.00	-32.12	peak			
3		5416.667	41.49	-0.14	41.35	74.00	-32.65	peak			

Page 21 of 52

# RADIATED EMISSION TEST-(ABOVE 1GHZ)-LOW CHANNEL-VERTICAL

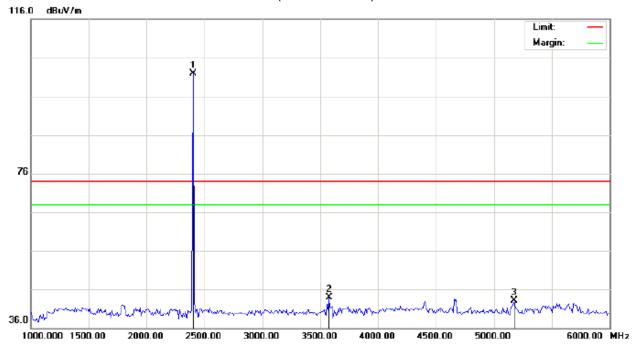

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:

M/N: Kinivo Urbn Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2402.000	91.67	10.32	101.99	74.00	27.99	peak			
2		3575.000	31.38	12.57	43.95	74.00	-30.05	peak			
3		5175.000	38.33	4.70	43.03	74.00	-30.97	peak			


#### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 22 of 52

# RADIATED EMISSION TEST-(ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

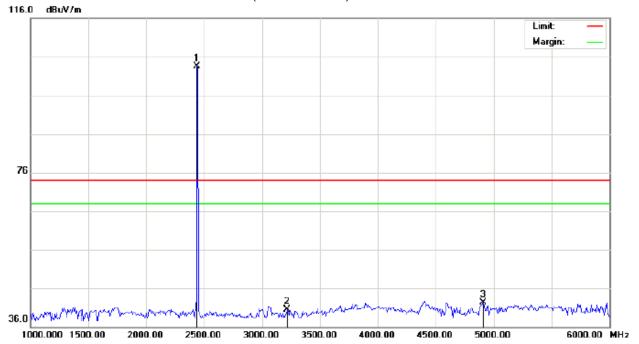

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:

M/N: Kinivo Urbn


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2440.000	93.23	10.36	103.59	74.00	29.59	peak			
2		3216.667	28.68	11.84	40.52	74.00	-33.48	peak			
3		4908.333	34.37	7.96	42.33	74.00	-31.67	peak			

Page 23 of 52

# RADIATED EMISSION TEST-(ABOVE 1GHZ)-MIDDLE CHANNEL-VERTICAL

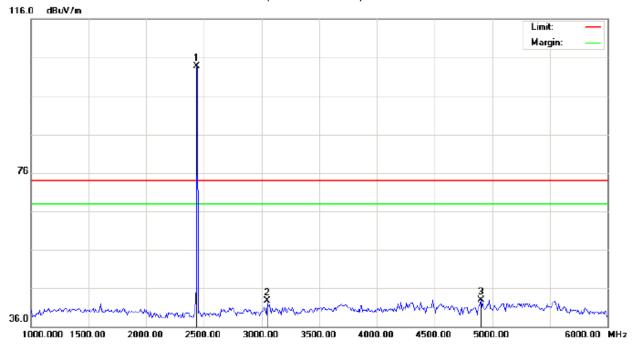

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:

M/N: Kinivo Urbn

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2440.000	93.39	10.36	103.75	74.00	29.75	peak			
2		3050.000	31.05	11.69	42.74	74.00	-31.26	peak			
3		4900.000	35.01	7.94	42.95	74.00	-31.05	peak			


#### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 24 of 52

# RADIATED EMISSION TEST-(ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

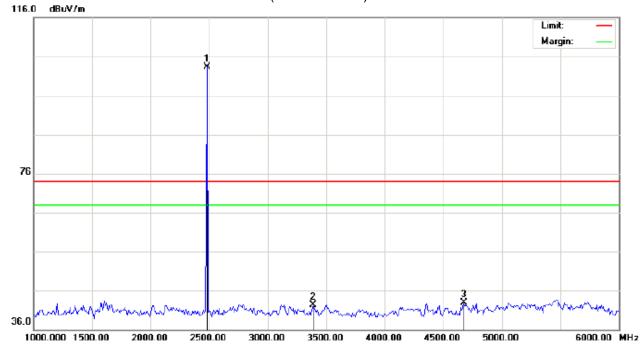

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:

M/N: Kinivo Urbn


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	92.93	10.41	103.34	74.00	29.34	peak			
2		3391.667	30.35	12.01	42.36	74.00	-31.64	peak			
3		4675.000	35.59	7.35	42.94	74.00	-31.06	peak			

Page 25 of 52

# RADIATED EMISSION TEST-(ABOVE 1GHZ)-HIGH CHANNEL-VERTICAL

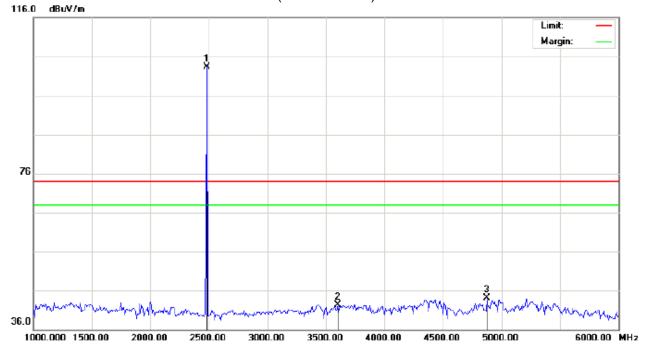

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:

M/N: Kinivo Urbn

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	92.97	10.41	103.38	74.00	29.38	peak			
2		3600.000	29.56	12.73	42.29	74.00	-31.71	peak			
3		4875.000	36.21	7.87	44.08	74.00	-29.92	peak			

#### **RESULT: PASS**

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain,

Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 26 of 52

# 8. BAND EDGE EMISSION

# **8.1. MEASUREMENT PROCEDURE**

- 1. Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency=Operation Frequency, RBW>=100kHz, VBW>=3\*RBW, Center frequency =Operation frequency
- 3. The band edges was measured and recorded.


# 8.2. TEST SET-UP

Radiated same as 7.2

Page 27 of 52

#### 8.3. TEST RESULT

#### TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Horizontal

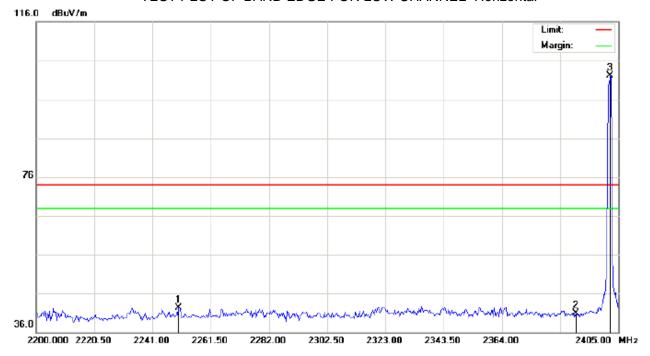

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:


M/N: Kinivo Urbn Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2250.225	32.16	10.16	42.32	74.00	-31.68	peak			
2		2390.000	30.50	10.31	40.81	74.00	-33.19	peak			
3	*	2402.000	91.72	10.32	102.04	74.00	28.04	peak			

Page 28 of 52

# TEST PLOT OF BAND EDGE FOR LOW CHANNEL - Vertical

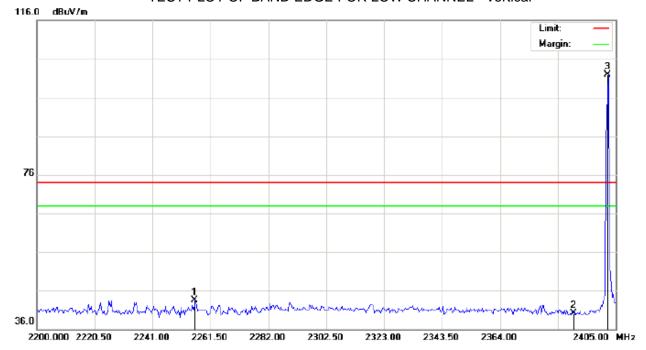

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:


M/N: Kinivo Urbn Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2256.033	33.44	10.16	43.60	74.00	-30.40	peak			
2		2390.000	29.71	10.31	40.02	74.00	-33.98	peak			
3	*	2402.000	91.59	10.32	101.91	74.00	27.91	peak			

Page 29 of 52

# TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

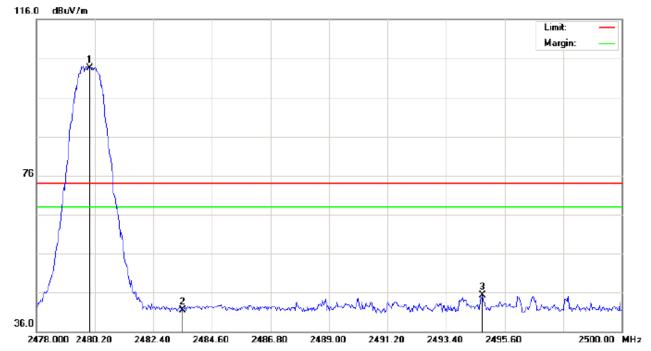

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:


M/N: Kinivo Urbn Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	er Detector	Antenna Height	5	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	93.05	10.41	103.46	74.00	29.46	peak			
2		2483.500	31.19	10.41	41.60	74.00	-32.40	peak			
3		2494.757	34.91	10.42	45.33	74.00	-28.67	peak			

Page 30 of 52

# TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Vertical

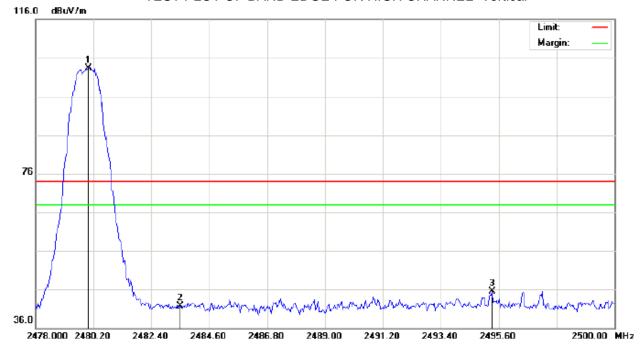

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:

M/N: Kinivo Urbn

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	92.82	10.41	103.23	74.00	29.23	peak			
2		2483.500	31.26	10.41	41.67	74.00	-32.33	peak			
3		2495.343	35.09	10.42	45.51	74.00	-28.49	peak			

Page 31 of 52

#### 9. 20DB BANDWIDTH

#### 9.1. TEST PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW≥3\*RBW.
- 4. Set SPA Trace 1 Max hold, then View.

#### 9.2. SUMMARY OF TEST RESULTS/PLOTS

Channel	20dB Bandwidth (MHz)	Minimum Limit (KHz)	Pass/Fail
Low	1.204		Pass
Middle	1.215	500KHz	Pass
High	1.204		Pass

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




Page 32 of 52

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

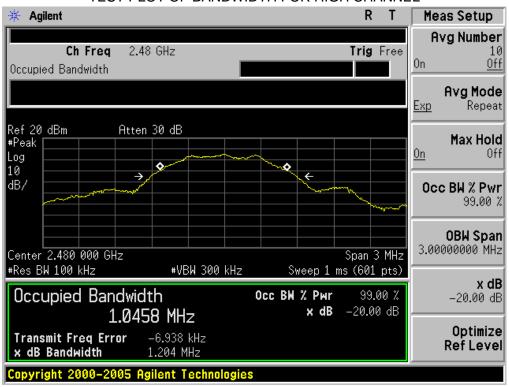

Page 33 of 52

#### 10. CONDUCTED OUTPUT POWER

#### 10.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
- 3. Use the following spectrum analyzer settings:
  - a) Set the RBW ≥ DTS bandwidth.
  - b) Set VBW ≥ 3 RBW.
- c) Set span ≥ 3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.
- 4. Allow the trace to stabilize.
- 5. Record the result form the Spectrum Analyzer.


#### For average power test:

- 1. Connect EUT RF output port to power probe through an RF attenuator.
- 2. Connect the power probe to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.
- 5. The maximum peak power shall be less 1W (30dBm).


Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements

#### 10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

**Setup Diagram for Peak Power** 

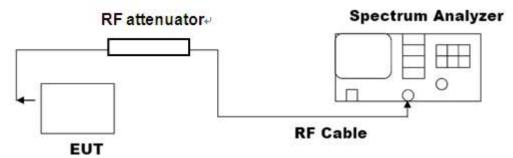


**Setup Diagram for Average Power** 



Page 34 of 52


#### 10.3. LIMITS AND MEASUREMENT RESULT


Channel	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass/Fail
Low Channel	-2.42	-0.57	30	Pass
Middle Channel	1.69	3.58	30	Pass
High Channel	1.91	3.82	30	Pass

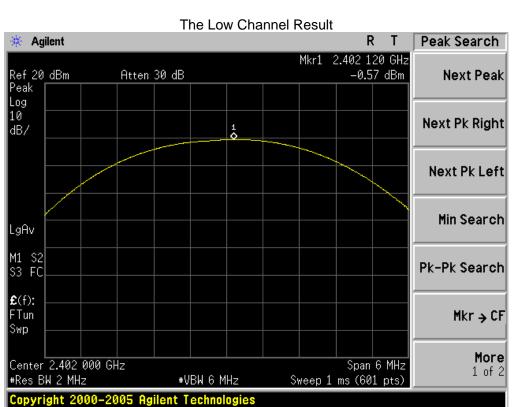

Page 35 of 52



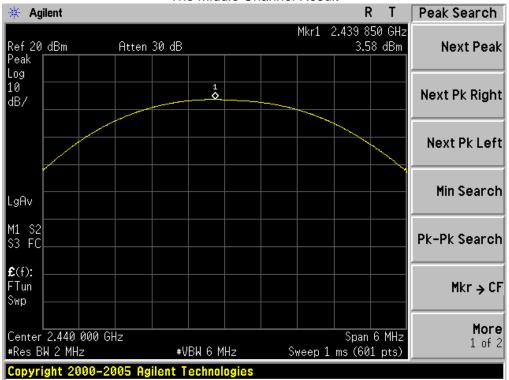

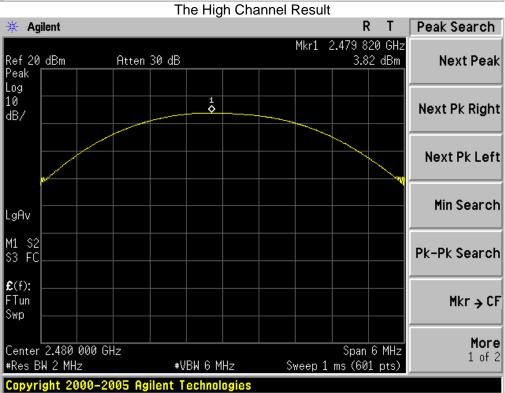


Page 36 of 52

# 11. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY 11.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the span to 1.5times the DTS bandwidth, RBW: 3kHz<=RBW<=100KHz, VBW>=3\*RBW
- 4). Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

# 11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

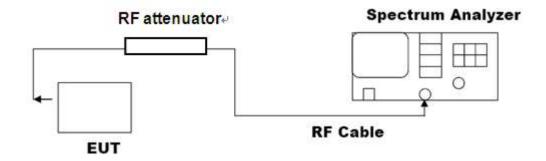



#### 11.3 LIMITS AND MEASUREMENT RESULT

Channel No.	PSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
Low Channel	-12.92	8	Pass
Middle Channel	-11.76	8	Pass
High Channel	-10.17	8	Pass

Page 37 of 52


TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

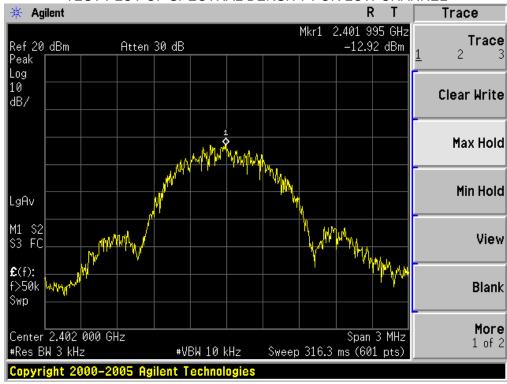

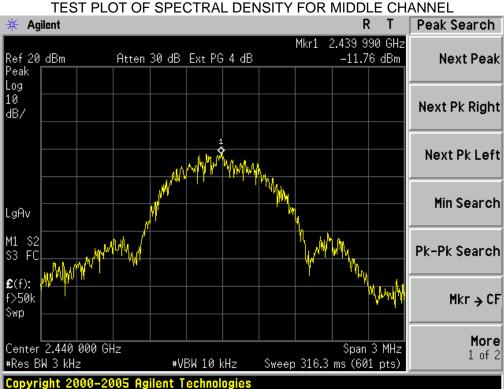

Page 38 of 52

### TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

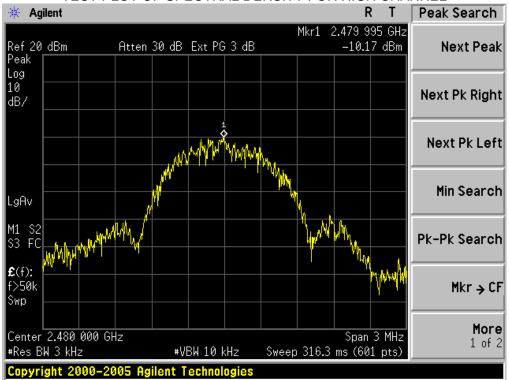

Page 39 of 52


### 12. FCC LINE CONDUCTED EMISSION TEST

## **12.1 LIMITS**

Fraguency	Maximum RF Line Voltage							
Frequency	Q.P.( dBuV)	Average( dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

<sup>\*\*</sup>Note: 1. The lower limit shall apply at the transition frequency.

## **12.2 TEST SETUP**

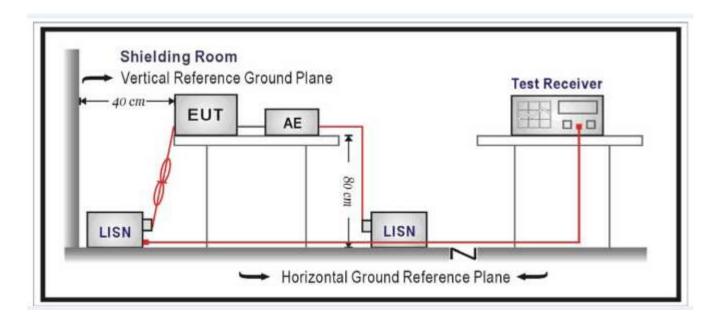

<sup>2.</sup> The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

Page 40 of 52

#### 12.3 PRELIMINARY PROCEDURE

The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT received power by PC which received power by a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test. Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

#### **12.4 FINAL TEST PROCEDURE**


- 10) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 11) 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 12) 3) The test data of the worst case condition(s) was reported on the Summary Data page.

Humidity: 60 %

Page 41 of 52

#### 12.5 TEST RESULT OF POWER LINE

#### Line Conducted Emission Test Line 1-L

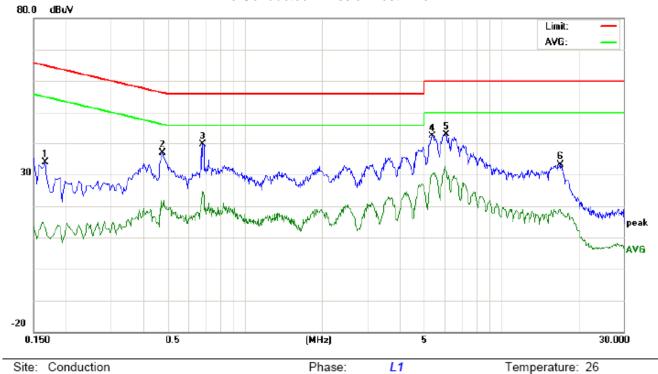

Site: Conduction Phase: Limit: FCC Class B Conduction(QP) Power:

EUT: Bluetooth headset M/N: Kinivo Urbn


Mode: Normal operation with charging

Note:

	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1660	23.66		3.21	10.18	33.84		13.39	65.15	55.15	-31.31	-41.76	Р	
2	0.4780	26.41		9.64	10.38	36.79		20.02	56.37	46.37	-19.58	-26.35	Р	
3	0.6860	29.33		14.21	10.34	39.67		24.55	56.00	46.00	-16.33	-21.45	Р	
4	5.3900	32.18		19.55	10.25	42.43		29.80	60.00	50.00	-17.57	-20.20	Р	
5	6.1140	32.48		20.74	10.28	42.76		31.02	60.00	50.00	-17.24	-18.98	Р	
6	17.0180	23.00		8.37	10.13	33.13		18.50	60.00	50.00	-26.87	-31.50	Р	

Page 42 of 52

## Line Conducted Emission Test Line 2-N

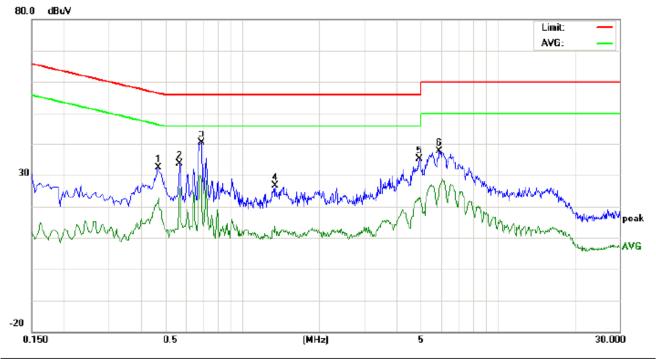

Site: Conduction Phase: N Temperature: 26
Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %

EUT: Bluetooth headset M/N: Kinivo Urbn

Mode: Normal operation with charging

Note:

No. Freq. (MHz)		Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.4700	22.00		12.41	10.38	32.38		22.79	56.51	46.51	-24.13	-23.72	Р	
2	0.5700	23.20		15.48	10.34	33.54		25.82	56.00	46.00	-22.46	-20.18	Р	
3	0.6900	30.01		18.04	10.35	40.36		28.39	56.00	46.00	-15.64	-17.61	Р	
4	1.3460	16.23		2.31	10.38	26.61		12.69	56.00	46.00	-29.39	-33.31	Р	
5	4.9260	24.95		12.53	10.24	35.19		22.77	56.00	46.00	-20.81	-23.23	Р	
6	5.9140	27.35		15.12	10.27	37.62		25.39	60.00	50.00	-22.38	-24.61	Р	

Page 43 of 52

# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**


FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP



Page 44 of 52

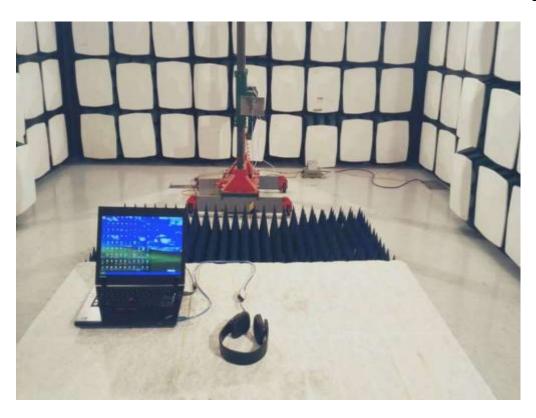

Page 45 of 52

# **APPENDIX B: PHOTOGRAPHS OF EUT**

TOTAL VIEW OF EUT



TOP VIEW OF EUT



Report No.: AGC00797150501FE08 Page 46 of 52





FRONT VIEW OF EUT



Report No.: AGC00797150501FE08 Page 47 of 52

BACK VIEW OF EUT







Report No.: AGC00797150501FE08 Page 48 of 52








Page 49 of 52






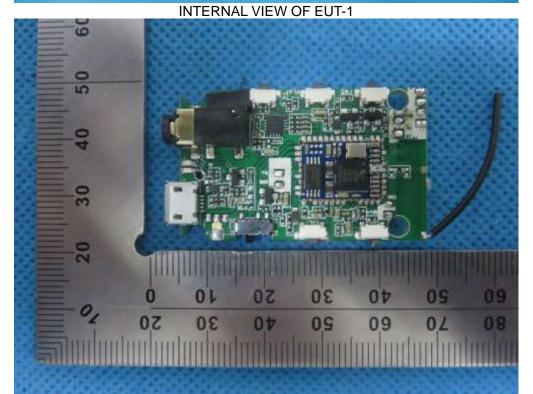


Report No.: AGC00797150501FE08 Page 50 of 52




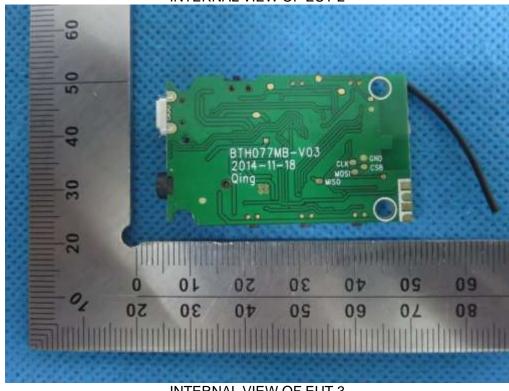





Report No.: AGC00797150501FE08 Page 51 of 52

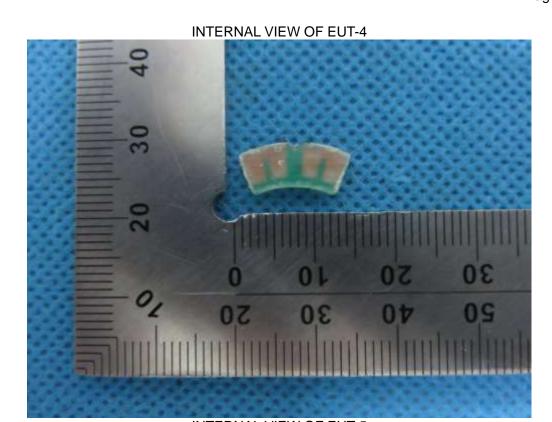

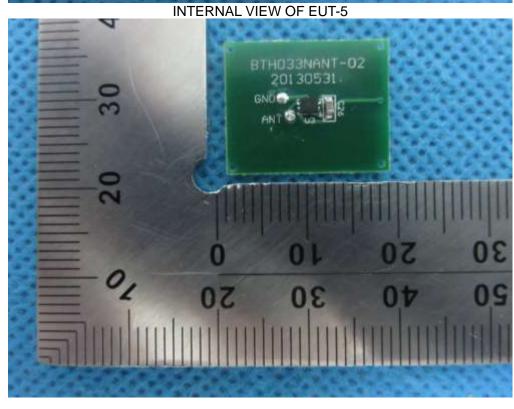

Report No.: AGC00797150501FE08 Page 52 of 52

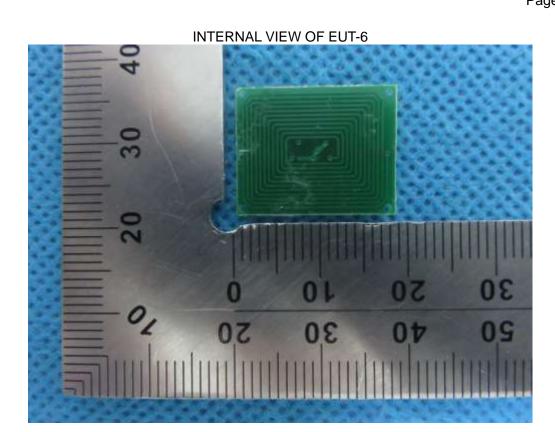

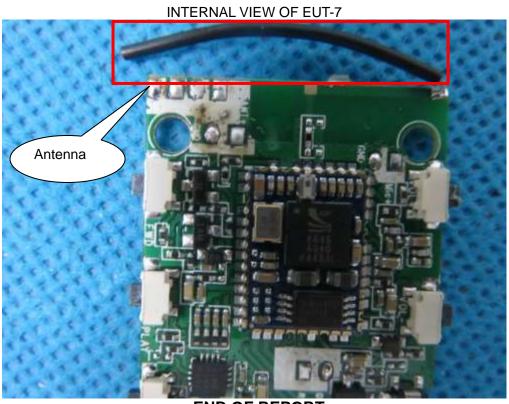

----END OF REPORT----