FCC Test Report

Report No.: AGC00797150501FE01

FCC ID : 2AEUVKINIVOURBN

PRODUCT DESIGNATION Bluetooth headset

BRAND NAME : KINIVO

MODEL NAME : Kinivo Urbn

CLIENT: Kinivo Inc

DATE OF ISSUE : May 14,2015

STANDARD(S) : FCC Part 15 Rules

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report No.: AGC00797150501FE01 Page 2 of 25

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes			
V1.0	/	May 14,2015	Valid	Original Report			

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. SYSTEM DESCRIPTION	5
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION	6
5. SUPPORT EQUIPMENT	7
7. FCCLINE CONDUCTED EMISSION TEST	
7.1. LIMITS OF LINE CONDUCTED EMISSION TEST	g
7.2. BLOCK DIAGRAM OF TEST SETUP	g
7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST	
7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST.	11
8. FCC RADIATED EMISSION TEST	13
8.1. LIMITS OF RADIATED EMISSION TEST	13
8.2. BLOCK DIAGRAM OF TEST SETUP	
8.3. PROCEDURE OF RADIATED EMISSION TEST	14
8.4. TEST RESULT OF RADIATED EMISSION TEST	15
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	17
APPENDIX B: PHOTOGRAPHS OF EUT	

Page 4 of 25

1. VERIFICATION OF CONFORMITY

Applicant	Kinivo Inc
Address	8573 154th Ave NE Redmond WA 98052 US
Manufacturer	Zhongshan K-mate General Electronics Co., Ltd.
Address	NO.2, 5th Xinsheng Street, Gangkou Town, Zhongshan City, Guangdong, China
Product Designation	Bluetooth headset
Brand Name	KINIVO
Test Model	Kinivo Urbn
Measurement Procedure	ANSI C63.4: 2009
Date of test	May 12,2015 to May 13,2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-IT/AC(2013-03-01)

The above equipment was tested by Compliance Certification Service(Shenzhen) Inc. for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, the measurement procedure according to ANSI C63.4:2009. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Prepared By

Jerry Xiao May 14,2015

Checked By

Forrest Lei May 14,2015

Authorized By

Solger Zhang May 14,2015

Report No.: AGC00797150501FE01 Page 5 of 25

2. SYSTEM DESCRIPTION

TEST MODE DESCRIPTION									
NO.	O. TEST MODE DESCRIPTION WORST								
1	Play music(USB)	V							
	Note: 1. V means EMI worst mode 2. Only worst mode data recorded in the test report								

3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 2.75dB

Radiated measurement: +/- 3.2dB

Page 6 of 25

4. PRODUCT INFORMATION

Housing Type	Plastic and metal
EUT Input Rating	DC 3.7V by battery

I/O Port Information (⊠Applicable ☐Not Applicable)

I/O Port of EUT								
I/O Port Type	Cable Description	Tested With						
USB port	1	0.9m, unshielded	1					
AUX IN port	1	0.9m, unshielded	1					

Report No.: AGC00797150501FE01 Page 7 of 25

5. SUPPORT EQUIPMENT

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
PC	APPLE	A1465	-		

Report No.: AGC00797150501FE01 Page 8 of 25

6. TEST FACILITY

Site Compliance Certification Service(Shenzhen) Inc.								
Location	No.10-1 Mingkeda Logistics Park, No.18 Huanguan South RD. Guan lan Town,Baoan Distr							
FCC Registration No.	441872							
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.							

ALL TEST EQUIPMENT LIST

Radiated Emission Test Site 966(2)									
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration				
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2015	03/01/2016				
EMI TEST RECEIVER	ROHDE&SCHWAR Z	ESCI	100783	03/09/2015	03/08/2016				
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/17/2016				
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2015	03/17/2016				
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2014	07/09/2015				
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2015	03/01/2016				
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2015	03/01/2016				
Loop Antenna	COM-POWER	AL-130	121044	09/27/2014	09/26/2015				
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R				
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R				
Controller	СТ	N/A	N/A	N.C.R	N.C.R				
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016				
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R				
Test S/W	FARAD		LZ-RF / CCS	S-SZ-3A2					

Conducted Emission Test Site									
Name of Equipment	Manufacturer	Manufacturer Model Number Serial N		Last Calibration	Due Calibration				
EMI TEST RECEIVER	ROHDE&SCHWA RZ	ESCI	100783	03/09/2015	03/08/2016				
LISN(EUT)	ROHDE&SCHWA RZ	ENV216	101543-WX	03/09/2015	03/08/2016				
LISN	EMCO	3825/2	8901-1459	03/09/2015	03/08/2016				
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2015	03/03/2016				
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE							

Page 9 of 25

7. FCCLINE CONDUCTED EMISSION TEST


7.1. LIMITS OF LINE CONDUCTED EMISSION TEST

- Cramuanau	Maximum RF Line Voltage						
Frequency	Q.P.(dBuV)	Average(dBuV)					
150kHz-500kHz	66-56	56-46					
500kHz-5MHz	56	46					
5MHz-30MHz	60	50					

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

7.2. BLOCK DIAGRAM OF TEST SETUP

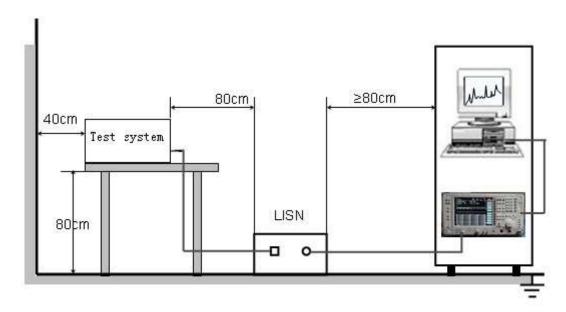

Page 10 of 25

7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST

(1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.


- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received DC5V power from PC which receive 120V/60Hz power from a LISN.
- (5) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (6) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- (7) During the above scans, the emissions were maximized by cable manipulation.
- (8) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- (9) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.

The test data of the worst case condition (mode 1) was reported on the Summary Data page.

Page 11 of 25

7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L

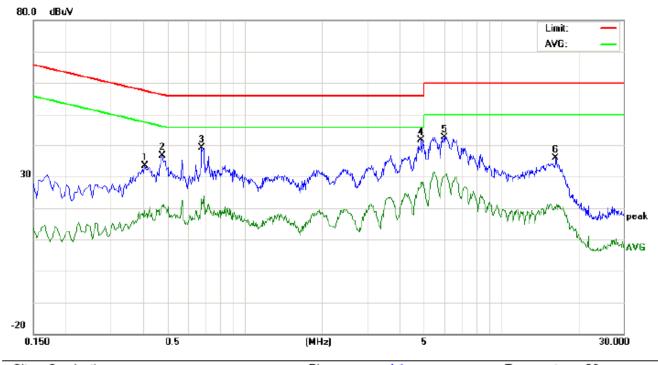

Site: Conduction Phase: L1 Temperature: 26
Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %

EUT: Bluetooth Headset M/N: Kinivo Urbn

Mode: Play music(USB)


Note:

No.	Freq.	Rea	ding_L (dBuV)		Correct Factor	Me	asuren (dBuV)		1	nit uV)		rgin IB)	P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.4100	23.06		6.89	10.34	33.40		17.23	57.65	47.65	-24.25	-30.42	Р	
2	0.4780	26.22		10.24	10.38	36.60		20.62	56.37	46.37	-19.77	-25.75	Р	
3	0.6820	28.85		12.63	10.34	39.19		22.97	56.00	46.00	-16.81	-23.03	Р	
4	4.8980	31.31		18.02	10.23	41.54		28.25	56.00	46.00	-14.46	-17.75	Р	
5	5.9940	32.28		20.02	10.28	42.56		30.30	60.00	50.00	-17.44	-19.70	Р	
6	16.3620	25.86		9.76	10.12	35.98		19.88	60.00	50.00	-24.02	-30.12	Р	

RESULT: PASS

Humidity: 60 %

LINE CONDUCTED EMISSION TEST-N

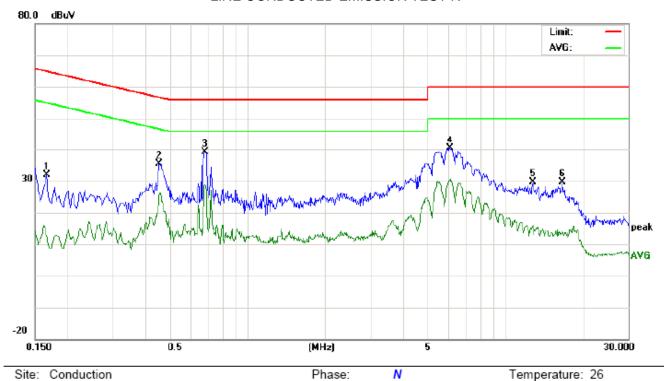

Site. Conduction

Limit: FCC Class B Conduction(QP)

EUT: Bluetooth Headset M/N: Kinivo Urbn

Mode: Play music(USB)

Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG	dB	Peak	Q.	AVG	QP	AVG	QP	AVG		
1	0.1660	21.75		2.45	10.18	31.93		12.63	65.15	55.15	-33.22	-42.52	Р	
2	0.4540	24.92		14.75	10.37	35.29		25.12	56.80	46.80	-21.51	-21.68	Р	
3	0.6860	28.86		18.51	10.34	39.20		28.85	56.00	46.00	-16.80	-17.15	Р	
4	6.0939	30.16		20.12	10.28	40.44		30.40	60.00	50.00	-19.56	-19.60	Р	
5	12.8020	19.58		6.08	10.14	29.72		16.22	60.00	50.00	-30.28	-33.78	Р	
6	16.6620	19.50		4.05	10.12	29.62		14.17	60.00	50.00	-30.38	-35.83	Р	

Power:

RESULT: PASS

Page 13 of 25

8. FCC RADIATED EMISSION TEST


8.1. LIMITS OF RADIATED EMISSION TEST

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m/ Q.P.)			
30~88	3	40.0			
88~216	3	43.5			
216~960	3	46.0			
Above 960	3	54.0			

Note: The lower limit shall apply at the transition frequency.

8.2. BLOCK DIAGRAM OF TEST SETUP

System Diagram of Connections between EUT and Simulators

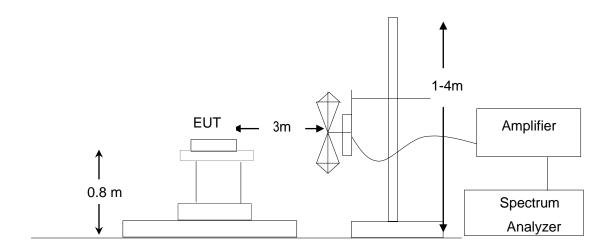

Page 14 of 25

8.3. PROCEDURE OF RADIATED EMISSION TEST

(1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.


- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received DC 5V power from PC which receive 120V/60Hz power from socket under the turntable through a LISN.
- (5) The antenna was placed at 3 meter away from the EUT as stated in FCC Part 15. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- (6) The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- (7) The test mode(s) were scanned during the test:
- (8) Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P./Peak reading is presented.

The test data of the worst case condition (mode 1) was reported on the Summary Data page.

Page 15 of 25

8.4. TEST RESULT OF RADIATED EMISSION TEST

Radiated Emission Test at 3m Distance-Horizontal

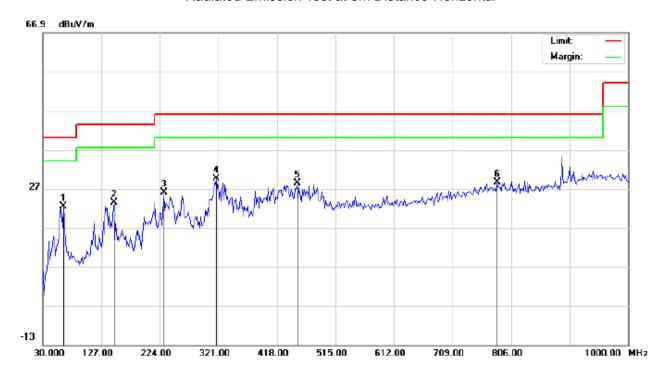

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Headset

M/N: Kinivo Urbn

Mode: Play music(USB)

Note:

Polarization:	Horizontal	Temperature: 2	6
Power:		Humidity: 60 %	b

Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		63.9500	11.56	10.80	22.36	40.00	-17.64	peak			
2		148.0167	8.17	15.25	23.42	43.50	-20.08	peak			
3		230.4667	12.90	13.16	26.06	46.00	-19.94	peak			
4	*	317.7667	13.05	16.59	29.64	46.00	-16.36	peak			
5		451.9500	7.86	20.61	28.47	46.00	-17.53	peak			
6		783.3667	1.47	27.09	28.56	46.00	-17.44	peak			


RESULT: PASS

Temperature: 26

Humidity: 60 %

Page 16 of 25

Radiated Emission Test at 3m Distance-Vertical

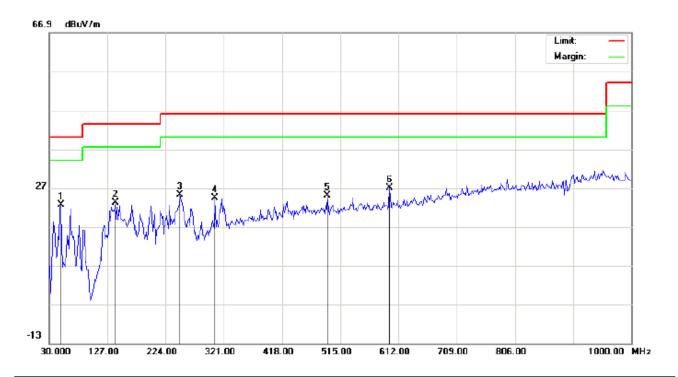

Site: site #1 Limit: FCC Class B 3M Radiation

LIIIII. I CO Class D SW Radiati

EUT: Bluetooth Headset

M/N: Kinivo Urbn

Mode: Play music(USB)

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	49.4000	14.28	8.28	22.56	40.00	-17.44	peak			
2		139.9333	8.01	15.17	23.18	43.50	-20.32	peak			
3		248.2500	11.50	13.73	25.23	46.00	-20.77	peak			
4		306.4500	8.50	15.84	24.34	46.00	-21.66	peak			
5		493.9833	4.01	21.07	25.08	46.00	-20.92	peak			
6		597 4500	4 27	22 72	26 99	46 00	-19 01	peak			

Power:

Distance: 3m

Polarization: Vertical

RESULT: PASS

Note: Above 1GHz have more than 20db margin, no recording in the report Measurement = Reading + Factor, Over = Measurement – Limit.

Page 17 of 25

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP



Page 18 of 25

APPENDIX B: PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT




LEFT VIEW OF EUT



RIGHT VIEW OF EUT




VIEW OF EUT (Port)

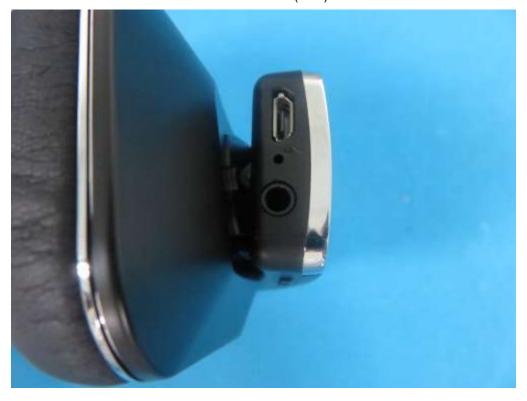


OPEN VIEW OF EUT




INTERNAL VIEW OF EUT-1

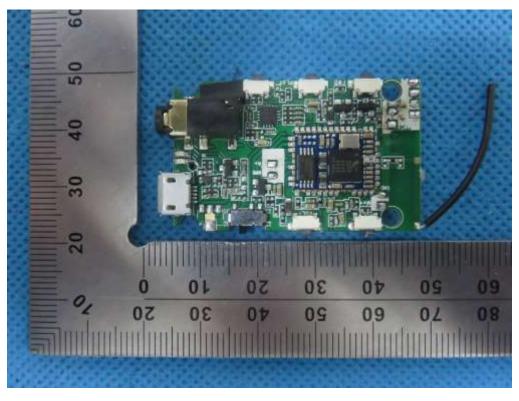


INTERNAL VIEW OF EUT-2

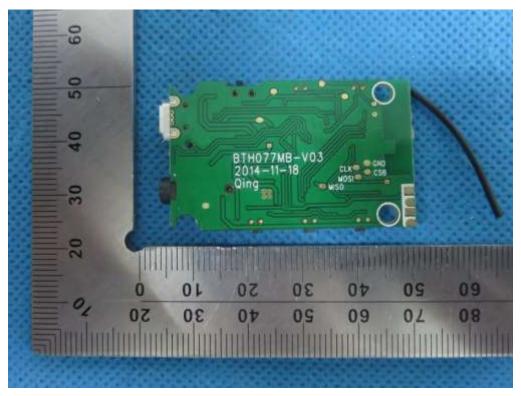


INTERNAL VIEW OF EUT-3

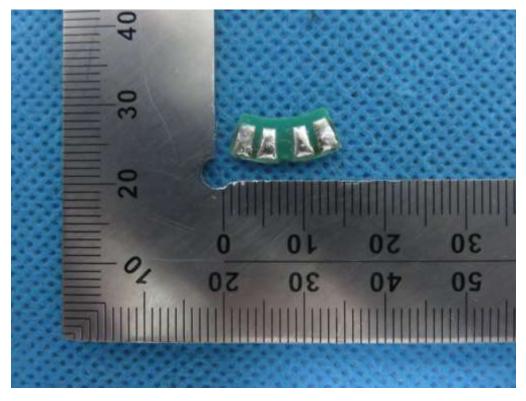


INTERNAL VIEW OF EUT-4

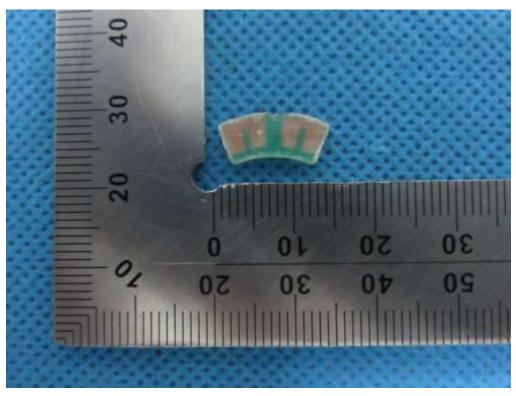


INTERNAL VIEW OF EUT-5

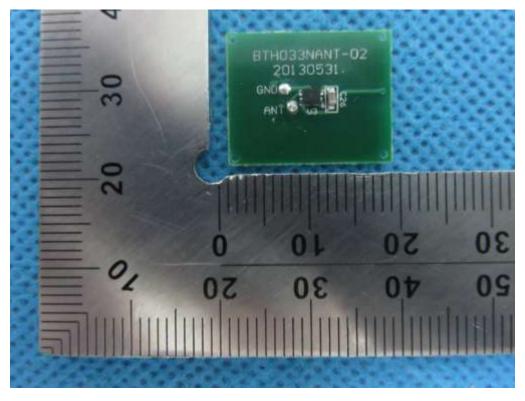

INTERNAL VIEW OF EUT-6

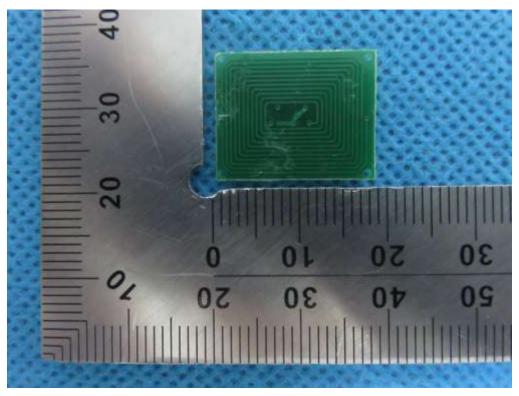

INTERNAL VIEW OF EUT-7

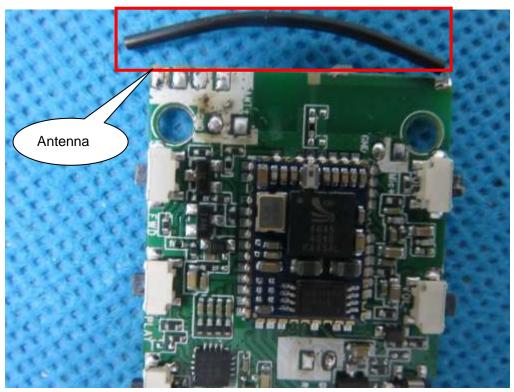

----END OF REPORT----