



# InterLab®

## FCC Measurement/Technical Report on

### NFC transmitter

### Car2Go-KCH

**Report Reference:** MDE\_S1NN\_1310\_FCCa

#### **Test Laboratory:**

7Layers AG  
Borsigstrasse 11  
40880 Ratingen  
Germany



#### Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7 layers AG  
Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
[www.7Layers.com](http://www.7Layers.com)

Aufsichtsratsvorsitzender •  
Chairman of the Supervisory Board:  
Peter Mertel  
Vorstand • Board:  
Dr. H. Ansorge

Registergericht • registered in:  
Düsseldorf, HRB 44096  
USt-IdNr • VAT No.:  
DE 203159652  
TAX No. 147/5869/0385  
*A Bureau Veritas Group Company*



## Table of Contents

<b>0 Summary</b>	<b>3</b>
0.1 Technical Report Summary	3
0.2 Measurement Summary	4
<b>1 Administrative Data</b>	<b>5</b>
1.1 Testing Laboratory	5
1.2 Project Data	5
1.3 Applicant Data	5
1.4 Manufacturer Data	5
<b>2 Test object Data</b>	<b>6</b>
2.1 General EUT Description	6
2.2 EUT Main components	7
2.3 Ancillary Equipment	7
2.4 Auxiliary Equipment	7
2.5 EUT Setups	8
2.6 Operating Modes	8
2.7 Special software used for testing	8
2.8 Product labelling	8
<b>3 Test Results</b>	<b>9</b>
3.1 Spurious radiated emissions	9
3.2 Occupied bandwidth	13
3.3 Spectrum mask	14
3.4 Frequency tolerance	15
<b>4 Test Equipment</b>	<b>18</b>
<b>5 Photo Report</b>	<b>27</b>
<b>6 Setup Drawings</b>	<b>27</b>
<b>7 FCC and IC Correlation of measurement requirements</b>	<b>28</b>
<b>8 Annex measurement plots</b>	<b>29</b>
8.1 Radiated emissions	29
8.2 Occupied bandwidth	32
8.3 Spectrum mask	33



## 0 Summary

### 0.1 Technical Report Summary

#### Type of Authorization

Certification for an intentional radiator operating at 13.56 MHz

#### Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (October-1-2014 Edition) and 15 (October -1-2014 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.205 Restricted bands of operation

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.215 Additional provisions to the general radiated emission limitations

§ 15.225 Operation within the band 13.110-14.010 MHz

Note:

ANSI C63.4-2014 is applied.

#### Summary Test Results:

**The EUT complied with all performed tests as listed in chapter 0.2 Measurement Summary.**



## 0.2 Measurement Summary

<b>FCC Part 15, Subpart C</b>		<b>§ 15.207</b>	
Conducted Emissions AC Power line			
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	2014
-	-	-	<b>Final Result</b>
		N/A	
<b>FCC Part 15, Subpart C</b>		<b>§ 15.209</b>	
Radiated Emissions			
The measurement was performed according to ANSI C63.4		2014	
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 1	Setup_01	Enclosure	passed
<b>FCC Part 15, Subpart C</b>		<b>§ 15.215</b>	
Occupied Bandwidth			
The measurement was performed according to FCC § 2.1049		10-1-14 Edition	
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 1	Setup_01	Enclosure	passed
<b>FCC Part 15, Subpart C</b>		<b>§ 15.225</b>	
Spectrum Mask			
The measurement was performed according to ANSI C63.4		2014	
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 1	Setup_01	Enclosure	passed
<b>FCC Part 15, Subpart C</b>		<b>§ 15.225</b>	
Frequency Tolerance			
The measurement was performed according to FCC § 2.1055		10-1-14 Edition	
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 2	Setup_02	Enclosure	passed

N/A not applicable (the EUT is powered by DC)

Responsible for  
Accreditation Scope: \_\_\_\_\_

Responsible  
for Test Report: \_\_\_\_\_



## 1 Administrative Data

### 1.1 Testing Laboratory

Company Name: 7Layers AG  
Address Borsigstr. 11  
40880 Ratingen  
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716.

The test facility is also accredited by the following accreditation organisation:  
Laboratory accreditation no.: DAkkS D-PL-12140-01-01

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka  
Dipl.-Ing. Robert Machulec  
Dipl.-Ing. Andreas Petz  
Dipl.-Ing. Marco Kullik

Report Template Version: 2012-03-14

### 1.2 Project Data

Responsible for testing and report: Dipl.-Ing. Dobrin Dobrinov  
Date of Test(s): 2015-01-27 to 2015-07-02  
Date of Report: 2015-08-11

### 1.3 Applicant Data

Company Name: S1nn GmbH & Co. KG  
Address: Gropiusplatz 10  
70563 Stuttgart  
Germany

Contact Person: Mr. Diego Carceles Poveda

### 1.4 Manufacturer Data

Company Name: Daimler AG c/o moovel GmbH  
Address: Fasaenenweg 15-17  
70771 Leinfelden-Echterdingen  
Germany

Contact Person: Mr. Michael Wolf



## 2 Test object Data

### 2.1 General EUT Description

<b>Equipment under Test</b>	NFC transmitter
<b>Type Designation:</b>	KCH
<b>Kind of Device: (optional)</b>	13.56 MHz card reader
<b>Voltage Type:</b>	DC from the vehicles lead-acid battery
<b>Voltage level:</b>	12 V

#### **General product description:**

KCH is a part of Car2go - compact Car-Sharing system, which operates in 13.56 MHz frequency band. The system cooperates 2 NFC card readers, GSM and GPS modules.

#### **Specific product description for the EUT:**

The object of this test report is the NFC card reader designated KCH. It has an integrated PCB antenna and transmits ASK modulated RF signal at 13.56 MHz.

#### **The EUT provides the following ports:**

##### **Ports**

- Enclosure
- Power supply and signalling connector

**The main components of the EUT are listed and described in Chapter 2.2.**



## 2.2 EUT Main components

### Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A (Code: DE1054003aa01)	NFC transmitter	Car2Go-KCH	3640017 926	6061	Boot Loader Ver. 10 Appl. Version 18	-
Remark: EUT A is equipped with an integral antenna (gain = 2.15 dBi).						
EUT B (Code: DE1054003aa04)	NFC transmitter	Car2Go-KCH	3640017 855	6061	Boot Loader Ver. 10 CMW-Mode	-
Remark: EUT B is equipped with an integral antenna (gain = 2.15 dBi).						

**NOTE: The short description is used to simplify the identification of the EUT in this test report.**

## 2.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	FCC ID
AE 1	RFID card black	-	04c68f1a2b2780	-	-	-
AE 2	RFID card black	-	041d901a2b2781	-	-	-
AE 3	Key RFID	-	04c9e33a562280	-	-	-
AE 4	RFID card blue	-	044b5582e72280	-	-	-
AE5 (Code: DE1054003aa 01)	NFC transmitter	Car2go-WSU	WSU ID: 141	WSU 2.5G A4539001401	tcu-plarform- EMV-0.1-bsp-level-4 Subversion Rev.: 11656	-

## 2.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial no.	HW Status	SW Status	FCC ID
AUX 1	Laptop	Fujitsu	DSCK013817	E Series E781	Microsoft Windows 7 Prof.	-
AUX 2	AC/DC Adapter	Fujitsu	07Y17323A	SED100P2-19.0	-	-



## 2.5 EUT Setups

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup No.	Combination of EUTs	Description and Rationale
Setup_01	EUT A + AE 1-5 + AUX 1-2	setup for EUT reading cards (incl. Key RFID)
Setup_02	EUT B + AE 5	setup for EUT transmitting CW signal at 13.56 MHz

## 2.6 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

Op. Mode	Description of Operating Modes	Remarks
op-mode 1	Command "script kch -nfc" activates the EUT A is transmitting a periodic ASK modulated signal and reading card information continuously.	EUT transmitter
op-mode 2	EUT B is transmitting continuous wave signal at 13.56 MHz.	CW mode

Note: After setting the EUT A in op-mode 1, the laptop with its AC adapter (AUX 1 and 2) are disconnected from the Setup\_01.

## 2.7 Special software used for testing

The applicant provided a special software which allows different operation modes to be switched for testing by using an external PC, connected via the EA 5 USB port.

## 2.8 Product labelling

### 2.8.1 FCC ID label

Please refer to the documentation of the applicant.

### 2.8.2 Location of the label on the EUT

Please refer to the documentation of the applicant.



## 3 Test Results

### 3.1 Spurious radiated emissions

**Standard** FCC Part 15, Subpart C

**The test was performed according to:** ANSI C63.4-2014

#### 3.1.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4-2009 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m<sup>2</sup> in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software ES-K1 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes.

#### 1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

##### **Step 1:** pre measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 – 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

##### **Step 2:** final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz – 10 kHz
- Measuring time / Frequency step: 100 ms

## 2. Measurement above 30 MHz and up to 1 GHz

### Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100  $\mu$ s
- Turntable angle range:  $-180^\circ$  to  $180^\circ$
- Turntable step size:  $90^\circ$
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

### Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $-180^\circ$  to  $180^\circ$
- Turntable step size:  $45^\circ$
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable):  $45^\circ$
- Antenna height: 0.5 m

### Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved.

This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by  $+/ - 22.5^\circ$  around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by  $+/ - 25$  cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $-22.5^\circ$  to  $+22.5^\circ$  around the determined value
- Height variation range:  $-0.25$  m to  $+0.25$  m around the determined value



#### **Step 4:** final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

#### **3.1.2 Test Requirements / Limits**

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit ( $\mu$ V/m)	Measurement distance (m)	Calculate Limit(dB $\mu$ V/m @10m)	Limit (dB $\mu$ V/m @10m)
0.009 – 0.49	2400/F (kHz)	300	(48.5 – 13.8) + 59.1 dB	107.6 – 72.9
0.49 – 1.705	24000/F (kHz)	30	(33.8 – 23.0) + 19.1 dB	52.9 – 42.1
1.705 – 30	30	30	29.5 + 19.1 dB	39.5

Frequency in MHz	Limit ( $\mu$ V/m)	Measurement distance (m)	Limit (dB $\mu$ V/m)
30 – 88	100	3	40.0
88 – 216	150	3	43.5
216 – 960	200	3	46.0
above 960	500	3	54.0

#### **§15.35(b)**

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dB $\mu$ V/m) = 20 log (Limit ( $\mu$ V/m)/1 $\mu$ V/m)



### 3.1.3 Test Protocol

Temperature: 23 – 24 °C  
 Air Pressure: 1009 – 1012 hPa  
 Humidity: 38 – 42 %

#### 3.1.3.1 Measurement up to 30 MHz

Op. Mode	Setup	Port								
op-mode 1	Setup_01	Enclosure								
Polarisation	Frequency MHz	Corrected value dB $\mu$ V/m			Limit dB $\mu$ V/m	Limit dB $\mu$ V/m	Limit dB $\mu$ V/m	Delta to limit dB	Delta to limit dB	
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV	
0°	-	-	-	-	-	-	-	-	-	-
90°	-	-	-	-	-	-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found therefore step 2 was not performed. Please refer to the plot in the annex.  
 The found peak at 99.5 kHz is an emission from loop antenna power supply, and the peak found at 13.56 MHz is the wanted signal of the EUT.

#### 3.1.3.2 Measurement above 30 MHz

Op. Mode	Setup	Port								
op-mode 1	Setup_01	Enclosure								
Polarisation	Frequency MHz	Corrected value dB $\mu$ V/m			Limit dB $\mu$ V/m	Limit dB $\mu$ V/m	Limit dB $\mu$ V/m	Delta to limit dB	Delta to limit dB	
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV	
Vertical	81.360	35.4	-	-	40.0	-	-	4.6	-	-
Vertical	162.720	35.6	-	-	43.5	-	-	7.9	-	-
Horizontal	271.200	37.7	-	-	46.0	-	-	8.3	-	-
Horizontal	298.320	37.5	-	-	46.0	-	-	8.5	-	-
Horizontal	325.440	38.9	-	-	46.0	-	-	7.1	-	-
Horizontal	352.500	42.6	-	-	46.0	-	-	3.4	-	-
Horizontal	379.620	37.5	-	-	46.0	-	-	8.5	-	-
Vertical	569.460	39.1	-	-	46.0	-	-	6.9	-	-
Vertical	677.940	36.9	-	-	46.0	-	-	9.1	-	-

Remark: No further spurious emissions in the range 20 dB below the limit found.  
 Please refer to the plot in the annex.

### 3.1.4 Test result: Spurious radiated emissions

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed



### 3.2 Occupied bandwidth

**Standard** FCC Part 15, 10-1-11 Edition Subpart C

**The test was performed according to:** FCC §15.31

#### 3.2.1 Test Description

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produces the worst-case (widest) occupied bandwidth.

#### 3.2.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.215 (c)

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. ...

#### 3.2.3 Test Protocol

Temperature: 23 °C

Air Pressure: 1009 hPa

Humidity: 38 %

Op. Mode	Setup	Port
op-mode 1	Setup_01	Enclosure
20 dB bandwidth kHz	99% bandwidth kHz	Remarks
434.200	629.522	The 20 dB bandwidth from 13.3415 MHz to 13.7756 MHz is contained within the designated frequency band 13.110 MHz to 14.010 MHz.

Remark: Please see annex for the measurement plots.

#### 3.2.4 Test result: Occupied bandwidth

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed



### 3.3 Spectrum mask

**Standard** FCC Part 15, Subpart C

**The test was performed according to:** FCC §15.225

#### 3.3.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4–2009. The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The Loop antenna HFH2-Z2 is used.

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 13.06 – 14.06 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 10 kHz
- Measuring time / Frequency step: 100 ms

#### 3.3.2 Test Limits

FCC Part 15, Subpart C, §15.225 (a-d), and §15.209, corrected by the means of the extrapolation of §15.31 due to the reduced measuring distance from 30 m to 10 m.

#### 3.3.3 Test Protocol

Temperature: 24 °C  
Air Pressure: 1010 hPa  
Humidity: 42 %

Op. Mode	Setup	Port
op-mode 1	Setup_01	Enclosure
Maximum value dB $\mu$ V/m	Limit dB $\mu$ V/m	Remarks
34.77	103.1	measuring distance 10 m

Remark: Please see annex for the measurement plots.

#### 3.3.4 Test result: Spectrum mask

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed



### 3.4 Frequency tolerance

**Standard** FCC Part 15, 10-1-11 Edition Subpart C

**The test was performed according to:** FCC §15.225

#### 3.4.1 Test Description

The Equipment Under Test (EUT) is placed in a temperature chamber. The frequency drift during temperature and voltage variation is measured by the means of a spectrum analyzer with frequency counter function. The temperature was varied from  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ . At  $+20^{\circ}\text{C}$  the extreme power supply voltages of 85% and 115% are applied. After reaching each target temperature and waiting sufficient time allowing the temperature to stabilize, one measurement is performed immediately after powering on the EUT, and two further measurements are performed after 5 and 10 minutes continuous operation of EUT.

#### 3.4.2 Test Limits

FCC Part 15, Subpart C, §15.225 (e): The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.



### 3.4.3 Test Protocol

Temperature: -40 °C to +85 °C

Air Pressure: 10012 hPa

Humidity: 39 %

Op. Mode	Setup	Port
op-mode 2	Setup_02	Enclosure

Temperature / °C	Voltage / V	Time / min.	Frequency / MHz	Delta / Hz
50	12	0	13.559697	-303
50	12	5	13.559555	-445
50	12	10	13.559528	-472
40	12	0	13.559809	-191
40	12	5	13.559668	-332
40	12	10	13.559628	-372
30	12	0	13.560010	10
30	12	5	13.559752	-248
30	12	10	13.559740	-260
20	9	0	13.559885	-115
20	9	5	13.559927	-73
20	9	10	13.559835	-165
20	12	0	13.560007	7
20	12	5	13.559889	-111
20	12	10	13.559835	-165
20	16	0	13.559897	-103
20	16	5	13.559920	-80
20	16	10	13.559837	-163
10	12	0	13.560125	125
10	12	5	13.560033	33
10	12	10	13.560009	9
0	12	0	13.560253	253
0	12	5	13.560161	161
0	12	10	13.560150	150
-10	12	0	13.560420	420
-10	12	5	13.560315	315
-10	12	10	13.560292	292
-20	12	0	13.560504	504
-20	12	5	13.560419	419
-20	12	10	13.560402	402

Continue on the next page



Additional measurements to prove the EUT working ability from -40° C to +85° C

Temperature / °C	Voltage / V	Time / min.	Frequency / MHz	Delta / Hz
85	12	0	13.559396	-604
85	12	5	13.559378	-622
85	12	10	13.559382	-618
70	12	0	13.559500	-500
70	12	5	13.559410	-590
70	12	10	13.559396	-604
60	12	0	13.559580	-420
60	12	5	13.559466	-534
60	12	10	13.559446	-554
-30	12	0	13.560534	534
-30	12	5	13.560485	485
-30	12	10	13.560481	481
-40	12	0	13.560535	535
-40	12	5	13.560533	533
-40	12	10	13.560528	528

Remark: The limit is a delta of max.  $\pm 1356$  Hz (0.01 %).

#### 3.4.4 Test result: Frequency tolerance

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 2	passed

## 4 Test Equipment

The calibration, hardware and software states are shown for the testing period.

### Test Equipment Anechoic Chamber

<b>Lab ID:</b>	<b>Lab 2</b>			
<i>Manufacturer:</i>	Frankonia			
<i>Description:</i>	Anechoic Chamber for radiated testing			
<i>Type:</i>	10.58x6.38x6.00 m <sup>3</sup>			
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	NSA (FCC)		2014/01/09	2017/01/09

### Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m <sup>3</sup>	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	FCC listing 96716 3m Part15/18		2014/01/09 2017/01/08
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

### Test Equipment Auxiliary Equipment for Conducted emissions

<b>Lab ID:</b>	<b>Lab 1</b>			
<i>Manufacturer:</i>	Rohde & Schwarz GmbH & Co.KG			
<i>Description:</i>	EMI Conducted Auxiliary Equipment			

### Single Devices for Auxiliary Equipment for Conducted emissions

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Impedance Stabilization Network	ISN T800	36159	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/02/06 2016/02/28
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/03/01 2015/03/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ST08	36292	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/01/10 2016/01/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN T8-Cat6	32187	Teseq GmbH



#### Single Devices for Auxiliary Equipment for Conducted emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer	
	<i>Calibration Details</i>		Last Execution	Next Exec.
	Standard Calibration		2014/01/08	2016/01/31
One-Line V-Network	ESH 3-Z6	100489	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		Last Execution	Next Exec.
	standard calibration		2014/06/18	2017/11/30
One-Line V-Network	ESH 3-Z6	100570	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		Last Execution	Next Exec.
	Standard Calibration		2013/11/25	2016/11/24
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		Last Execution	Next Exec.
	Standard Calibration		2013/03/01	2015/03/31
	DAkkS Calibration		2015/03/30	2017/03/31
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		Last Execution	Next Exec.
	Standard Calibration		2013/03/01	2015/02/28
	DAkks Calibration		2015/03/30	2017/03/31

### Test Equipment Auxiliary Equipment for Radiated emissions

**Lab ID:** Lab 2  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

### Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AM 4.0	AM4.0/180/119205 13	Maturo GmbH
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck Mess-Elektronik OHG
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck Mess-Elektronik OHG
Broadband Amplifier 1 GHz - 4 GHz	AFS4-01000400-1Q-10P-4	-	Miteq
Broadband Amplifier 18 GHz - 26 GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 30 MHz - 18 GHz	JS4-00101800-35-5P	896037	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02-2	Rosenberger Micro-Coax
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
Standard Calibration		2012/06/26	2015/06/25
Double-ridged horn-duplicated 2015-07-15 10:47:55	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/18000-1.2-KK	200035008	Trilithic
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
Horn Antenna Schwarzbeck 15-26.5 GHz BBHA 9170	BBHA 9170	BBHA9170262	Schwarzbeck Mess-Elektronik OHG
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
Standard Calibration		2012/12/18	2015/12/17
Log.-per. Antenna (upgraded)	HL 562 Ultralog new refelector	830547/003	Rohde & Schwarz GmbH & Co. KG
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
DKD Calibration		2014/11/27	2017/11/27
Standard Gain / Pyramidal Horn Antenna 26.5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Standard Gain / Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH

### Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5-10kg/024/3790709	Maturo GmbH

### Test Equipment Auxiliary Test Equipment

**Lab ID:** **Lab 2, Lab 3**  
**Manufacturer:** see single devices  
**Description:** Single Devices for various Test Equipment  
**Type:** various  
**Serial Number:** none

### Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider 1506A / 93459 N (Aux)		LM390	Weinschel Associates
Broadband Power Divider WA1515 SMA		A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2014/02/10 2016/02/09
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2012/06/13 2015/06/12
Spectrum Analyser	FSU26	200418	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/07/29 2015/07/28
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG

## Test Equipment Digital Signalling Devices

### Lab ID:

**Lab 1, Lab 2, Lab 3**

### Description:

Signalling equipment for various wireless technologies.

### Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/01/27 2016/01/26
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2014/12/02 2017/12/01
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04		2007/07/16
	Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22		
	Firmware: μP1 8v50 02.05.06		
	---		
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2014/12/03 2017/12/02
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02		2007/01/02
	SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10,		
	Firmware: μP1 8v40 01.12.05		
	---		
	SW: K62, K69		2008/11/03
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG

### Test Equipment Emission measurement devices

**Lab ID:** **Lab 1, Lab 2**  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

### Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
EMI Receiver / Spectrum ESR 7 Analyser		101424	Rohde & Schwarz
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Initial Factory Calibration		2014/11/13 2016/11/12
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/05/13 2015/05/10
	Standard calibration		2015/05/11 2016/05/10
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/05/13 2015/05/10
	Standard calibration		2015/05/11 2016/05/10
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/06/24 2017/06/23
Spectrum Analyser	FSW 43	103779	Rohde & Schwarz
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Initial Factory Calibration		2014/11/17 2016/11/16
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/01/07 2016/01/31
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03

### Test Equipment Multimeter 03

**Lab ID:** **Lab 2, Lab 3**  
**Description:** Fluke 177  
**Serial Number:** 86670383

### Single Devices for Multimeter 03

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03

## Test Equipment Radio Lab Test Equipment

**Lab ID:** Lab 3  
**Description:** Radio Lab Test Equipment

### Single Devices for Radio Lab Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider SMA	WA1515	A856	Weinschel Associates
Coax Attenuator 10dB SMA 2W	4T-10	F9401	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3702	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3711	Weinschel Associates
Coax Cable Huber&Suhner	Sucotest 2,0m		Huber&Suhner
Coax Cable Rosenberger Micro Coax FA210A0010003030	FA210A0010003030	54491-2	Rosenberger Micro-Coax
	SMA/SMA 1,0m		
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration	2014/05/13	2015/05/10
	Standard calibration	2015/05/11	2016/05/10
RF Step Attenuator RSP	RSP	833695/001	Rohde & Schwarz GmbH & Co.KG
Rubidium Frequency Standard	Datum, Model: MFS	5489/001	Datum-Beverly
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration	2014/07/03	2015/07/02
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration	2014/05/13	2015/05/10
	Standard calibration	2015/05/11	2016/05/10
Signal Generator SME	SME03	827460/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration	2014/12/02	2017/12/01
Signal Generator SMP	SMP02	836402/008	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration	2013/05/06	2016/05/05
Spectrum Analyser	FSIQ26	840061/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Calibration after reparation	2015/04/02	2017/04/01

## Test Equipment Shielded Room 02

**Lab ID:** **Lab 1**  
**Manufacturer:** Frankonia  
**Description:** Shielded Room for conducted testing  
**Type:** 12 qm  
**Serial Number:** none

## Test Equipment T/A Logger 13

**Lab ID:** **Lab 1, Lab 2, Lab 3**  
**Description:** Lufft Opus10 TPR  
**Type:** Opus10 TPR  
**Serial Number:** 13936

### Single Devices for T/A Logger 13

Single Device Name	Type	Serial Number	Manufacturer
ThermoAirpressure Datalogger 13 (Environ)	Opus10 TPR (8253.00)	13936	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			
	Customized calibration	2013/02/07	2015/02/26
	Customized calibration	2015/02/27	2017/02/26

## Test Equipment T/H Logger 02

**Lab ID:** **Lab 1**  
**Description:** Lufft Opus10  
**Serial Number:** 7489

### Single Devices for T/H Logger 02

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 02 (Environ)	7489	Lufft Mess- und Regeltechnik GmbH	
<i>Calibration Details</i>			
	Customized calibration	2013/02/07	2015/02/26
	Customized calibration	2015/02/27	2017/02/26

## Test Equipment T/H Logger 03

**Lab ID:** **Lab 3**  
**Description:** Lufft Opus10  
**Serial Number:** 7482

### Single Devices for T/H Logger 03

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 03 (Environ)	7482	Lufft Mess- und Regeltechnik GmbH	
<i>Calibration Details</i>			
	Customized calibration	2013/02/07	2015/02/26
	Customized calibration	2015/02/27	2017/02/26



### Test Equipment T/H Logger 12

**Lab ID:** Lab 2  
**Description:** Lufft Opus10  
**Serial Number:** 12482

### Single Devices for T/H Logger 12

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 12 (Environ)		12482	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			
Customized calibration		2013/01/07	2015/03/09
Customized calibration		2015/03/10	2017/03/09

### Test Equipment Temperature Chamber 05

**Lab ID:** Lab 3  
**Manufacturer:** see single devices  
**Description:** Temperature Chamber VT4002  
**Type:** Vötsch  
**Serial Number:** see single devices


### Single Devices for Temperature Chamber 05

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Vötsch 05	VT 4002	58566080550010	Vötsch
<i>Calibration Details</i>			
Customized calibration		2014/03/11	2016/03/10

## 5 Photo Report

Photos are included in an external report.

## 6 Setup Drawings

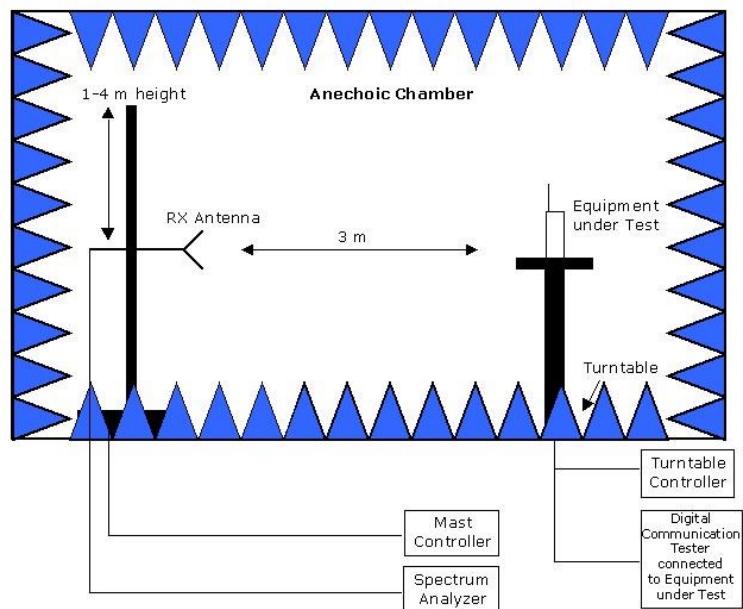

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

### **Drawing 1:** Setup in the Anechoic chamber:

Measurements below 1 GHz: Semi-anechoic, conducting ground plane.  
Measurements above 1 GHz: Fully-anechoic, absorbers on all surfaces.



## 7 FCC and IC Correlation of measurement requirements

The following tables show the correlation of measurement requirements Radio equipment operating in the Band 13.110-14.010 MHz from FCC and IC.

### Radio equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 4: 8.8
Out-of-band emissions	§ 15.225 (d)	RSS Gen Issue 4: 6.13/8.9/8.10; RSS-210 Issue 8: A2.6
In-band emissions	§ 15.225 (a) / (b) / (c)	RSS-210 Issue 8: A2.6
Frequency Stability	§ 15.225 (e)	RSS-210 Issue 8: A2.6
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 4: 8.3
Receiver spurious emissions	-	RSS-210 Issue 8: 2.3; RSS Gen Issue 4: 5/7 *)
Handling of active and passive tag devices of RFID application	§ 15.225 (f)	RSS Gen Issue 4: 8.7

\*) Receivers are exempted from certification besides if operating in stand-alone mode in the frequency range 30–960 MHz or if these are scanner receivers.


This correlation amends the test report referenced by:  
MDE\_S1NN\_1310\_FCCa

## 8 Annex measurement plots


### 8.1 Radiated emissions

#### 8.1.1 Radiated emissions ( $f < 30$ MHz)


Antenna position 90°  
EUT position 2 horizontal

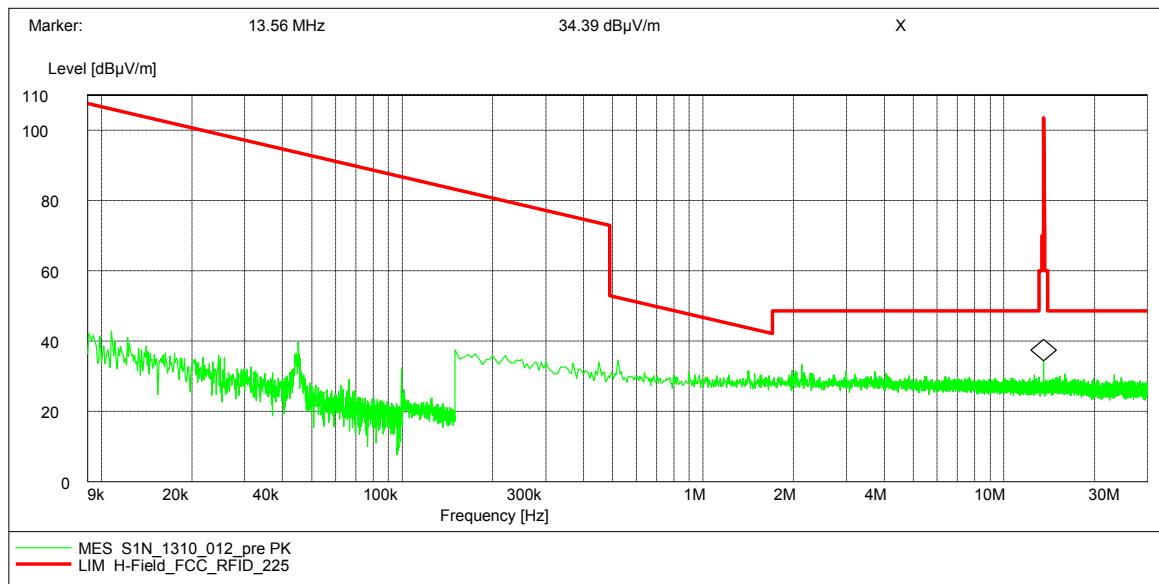


Antenna position 90°  
EUT position 1 horizontal

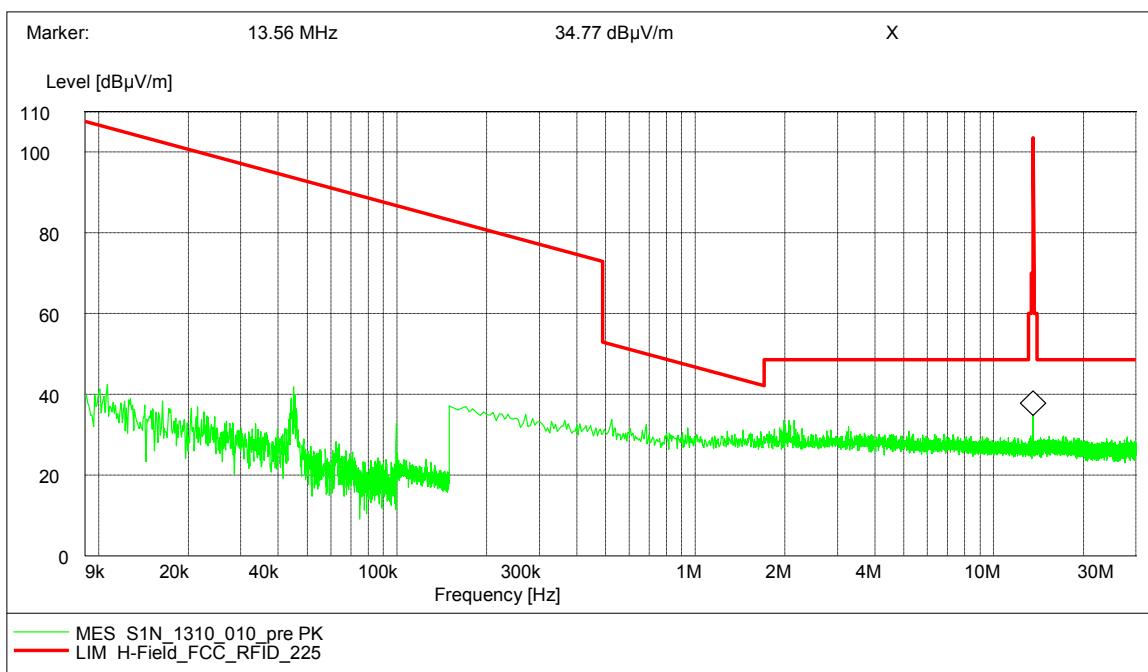

Antenna position 0°  
EUT position vertical

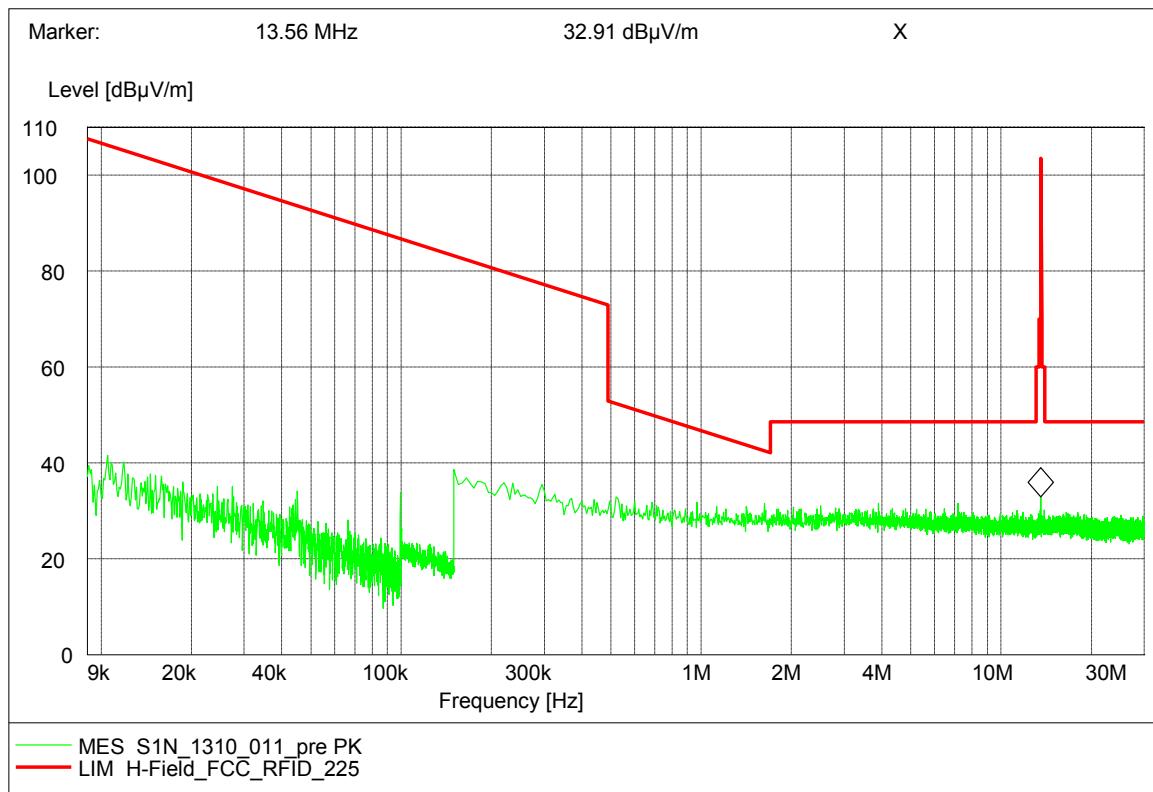

Antenna position 0°  
EUT position 1 horizontal

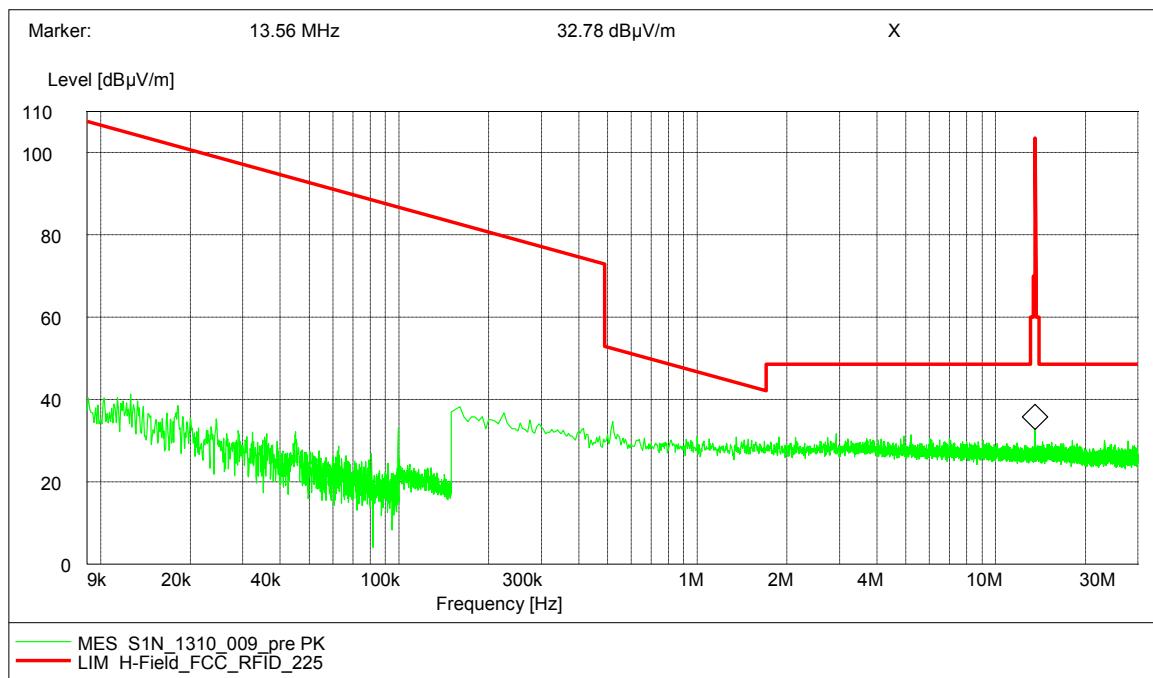


## 8.1.2 Radiated emissions (f > 30 MHz)

EUT: (DE1054003aa01)  
 Manufacturer: S1NN  
 Operating Condition: NFC transmission, KCH and WSU together  
 Test Site: 7 layers, Ratingen  
 Test Specification: FCC Part 15 C.225  
 Comment: Horizontal EUT position, Horiz.+Vert. antenna polarization  
 Start of Test: 05.03.2015 / 21:12:50


### SCAN TABLE: "FCC 15.225"

Short Description:		FCC 15.225					
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer	
30.0 MHz	1.0 GHz	60.0 kHz	MaxPeak	1.0 ms	120 kHz	HL562	

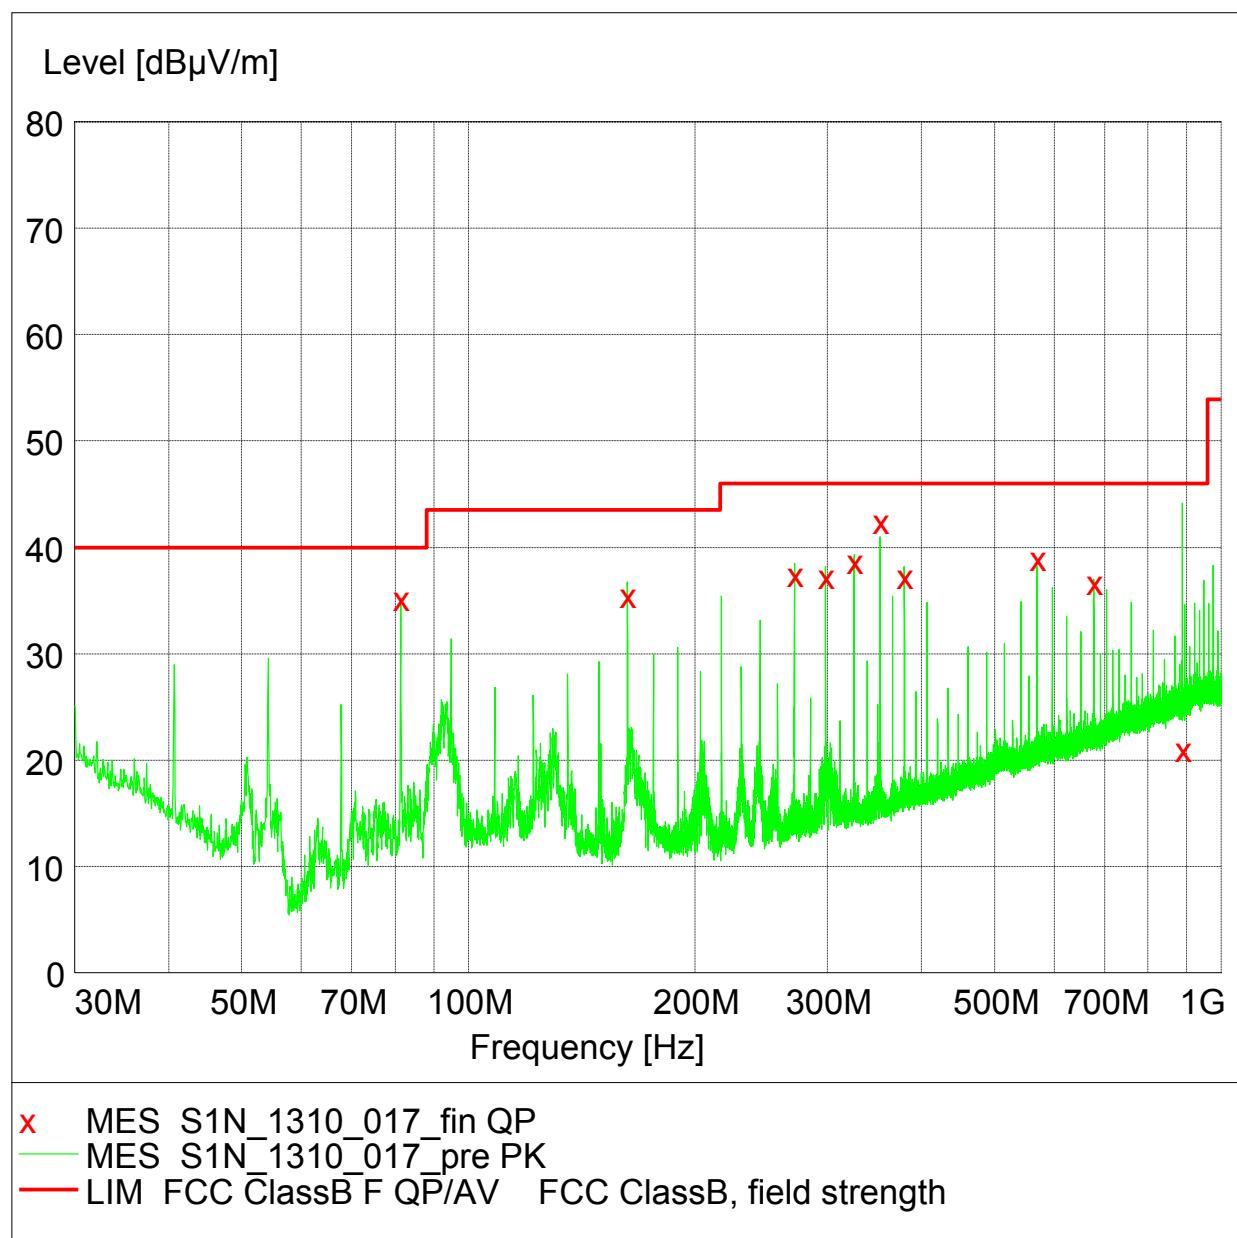


## 8.2 Occupied bandwidth

### 8.2.1 20 dB bandwidth

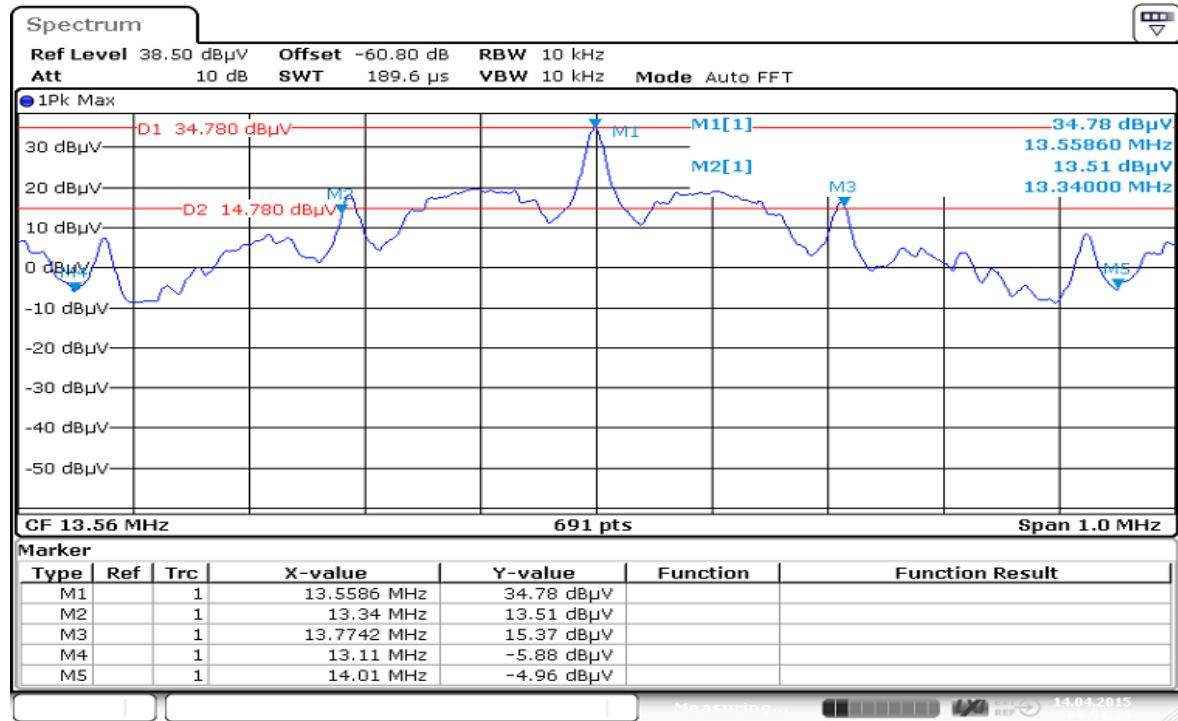

### 8.2.2 99% bandwidth

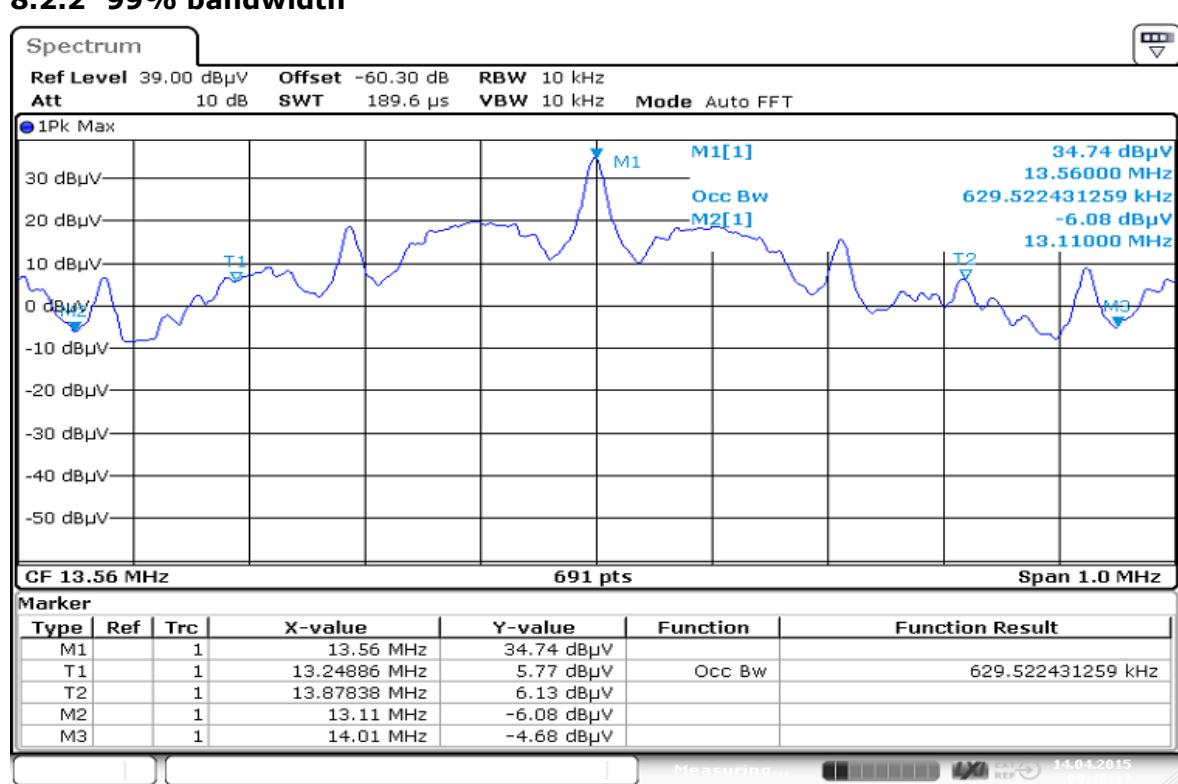

### 8.3 Spectrum mask

EUT: (DE1054003aa01)  
Manufacturer: S1NN  
Operating Condition: Tx on 13.565MHz, KFC-active  
Test Site: 7 layers, Ratingen  
Operator: Doe  
Test Specification: FCC 15.225  
Comment: Antenna position 90°, Side 1 horizontal EUT position

