



FCC Test Report

FCC ID : 2AEXESECURESCANX200
Equipment : SecureScan ID Scanner
Brand Name : Plustek
Model Name : X200, SI501-A66 ; X2****,S*****,S***** (The "*" can be 0-9, A-Z, "+", "-", "Plus", "Pro" or blank for marketing purpose)
Applicant/ Manufacturer : Plustek Inc.
13F-1, No.3 , Yuan Qu St., 115 Nankang, Taipei, Taiwan
Standard : 47 CFR FCC Part 15.225

The product was received on Jan. 02, 2020, and testing was started from May 22, 2020 and completed on Jun. 02, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of United States government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Testing Applied Standards	6
1.3 Testing Location Information	7
1.4 Measurement Uncertainty	7
2 TEST CONFIGURATION OF EUT.....	8
2.1 Test Condition	8
2.2 The Worst Case Configuration	8
2.3 The Worst Case Measurement Configuration.....	9
2.4 Accessories	10
2.5 Support Equipment.....	10
2.6 Test Setup Diagram	11
3 TRANSMITTER TEST RESULT	12
3.1 AC Power-line Conducted Emissions	12
3.2 Emission Bandwidth	16
3.3 Field Strength of Fundamental Emissions and Spectrum Mask	19
3.4 Transmitter Radiated Unwanted Emissions	21
3.5 Frequency Stability	30
4 TEST EQUIPMENT AND CALIBRATION DATA.....	33
APPENDIX A. TEST PHOTOS	
PHOTOGRAPHS OF EUT v01	



History of this test report



Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.215(c)	Emission Bandwidth	PASS	-
3.3	15.225(a)~(d)	Field Strength of Fundamental Emissions and Spectrum Mask	PASS	-
3.4	15.225(d)	Transmitter Radiated Unwanted Emissions	PASS	-
3.5	15.225(e)	Frequency Stability	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and explanations:

None

Reviewed by: Sam Tsai

Report Producer: Yunha Liou



1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information				
Frequency Range	Modulation Mode	Ch. Frequency (MHz)	Channel Number	Field Strength (dBuV/m)
13.553 – 13.567 MHz	NFC-B (ISO 14443-3B)	13.56	1	69.02

Note 1: Field strength performed peak level at 3m.

1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Equipment placed on the market without antennas
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	<input type="checkbox"/> Temporary RF connector provided
<input type="checkbox"/>	<input checked="" type="checkbox"/> No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)

Antenna General Information		
No.	Ant. Cat.	Ant. Type
1	Integral	NFC 13.56MHZ

1.1.3 EUT Information

Operational Condition	
EUT Power Type	From AC Adapter
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device)
<input type="checkbox"/>	Combined Equipment - Brand Name / Model No.:
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems)
<input type="checkbox"/>	Host System - Brand Name / Model No.:
<input type="checkbox"/>	Other:



1.1.4 Test Signal Duty Cycle

Duty Cycle Operation Restriction			
The transmitter is used for		The transmitter is operated	
<input checked="" type="checkbox"/>	Inductive applications	<input checked="" type="checkbox"/>	Automatically triggered
<input type="checkbox"/>	Duty cycle fixed mode	<input checked="" type="checkbox"/>	Duty cycle random mode
<input checked="" type="checkbox"/> Duty cycle mode - NFC-A (ISO 14443-3A)			
Declare transmitter duty cycle / 1 hour =		100%	
<input checked="" type="checkbox"/> Duty cycle mode - NFC-B (ISO 14443-3B)			
Declare transmitter duty cycle / 1 hour =		100%	
<input type="checkbox"/>	Duty cycle mode - NFC-F (ISO 18092)		
Declare transmitter duty cycle / 1 hour =		100%	
<input type="checkbox"/>	Duty cycle mode - NFC-V (ISO 15693)		
Declare transmitter duty cycle / 1 hour =		100%	

1.1.5 Table for Multiple Listing

The brand/model names in the following table are all refer to the identical product.

Brand Name	Model Name	Description
Plustek	X200 SI501-A66 X2****;S*****;s***** ** (The "*" can be 0-9, A-Z, "+", "-", "Plus", "Pro" or blank for marketing purpose)	All the models are identical, the difference model served as marketing strategy.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF:

- KDB 414788 D01 v01r01



1.3 Testing Location Information

Testing Location					
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)			
		TEL : 886-3-327-3456 FAX : 886-3-327-0973			
Test site Designation No. TW1190 with FCC.					

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Edward	21.4~23.5°C / 59~65%	02/Jun/2020
RF Conducted	TH01-HY	Barry	22.7~23.9°C/ 65~69%	01/Jun/2020
Radiated Emission	03CH03-HY	Jeff	23.6~25.4°C / 51~58%	22/May/2020~ 23/May/2020

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	0.9 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.7 dB	Confidence levels of 95%
Conducted Emission	1.0 dB	Confidence levels of 95%
Temperature	0.41 °C	Confidence levels of 95%
Humidity	3.4 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Condition

Condition Item	Abbreviation/Remark	Remark
Frequency Stability	T _{nom}	20°C
-	T _{min}	-20°C
-	T _{max}	50°C
-	V _{nom}	120V
-	V _{min}	102V
-	V _{max}	132V

2.2 The Worst Case Configuration

Modulation Used for Conformance Testing		
Mode	Test Channel Frequencies (MHz)	Field Strength (dBuV/m at 3 m)
NFC	13.56	69.02



2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	CTX
	<input checked="" type="checkbox"/> 1. Adapter Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth, Frequency Stability
Test Condition	Conducted measurement

The Worst Case Mode for Following Conformance Tests	
Tests Item	Field Strength of Fundamental Emissions Spectrum Mask, Transmitter Radiated Unwanted Emissions
Test Condition	Radiated measurement
Pretest Mode	<input checked="" type="checkbox"/> 1. NFC-A (ISO 14443-3A) <input checked="" type="checkbox"/> 2. NFC-B (ISO 14443-3B) <input type="checkbox"/> 3. NFC-F (ISO 18092) <input type="checkbox"/> 4. NFC-V (ISO 15693)

Mode 2 configuration was pretested and found to be the worst case and measured during the test.

Operating Mode	CTX
	<input checked="" type="checkbox"/> 1. Adapter Mode
Orthogonal Planes of EUT	Z Plane 



2.4 Accessories

Accessories Information				
AC Adapter	Brand Name	ENG	Model Name	6A-181WP24
	Power Rating	I/P:100 – 240 Vac,0.6 A,O/P:24 Vdc,0.75 A		
	DC Power Cord	1.8 meter, non-shielded cable, with ferrite core		
USB CABLE	Brand Name	-	Model Name	-
	Signal Line	1.5 meter, D-shielded cable, with ferrite core		

Reminder: Regarding to more detail and other information, please refer to user manual.


2.5 Support Equipment

Support Equipment – AC Conduction / Radiated					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	NFC Card	SPORTON	SPORTON	-	-
2	Notebook	DELL	P48F	-	-
3	Adapter for NB	DELL	AA90PM111	-	-
4	AC Power Cable for NB	Power sync	PW-GPC180-3	-	-

Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	AC Power Source	GW	APS-9102	-	-
2	Notebook	DELL	E5410	-	-
3	Adapter for NB	DELL	HA65NM130	-	-
4	NFC Card	-	-	-	-


2.6 Test Setup Diagram

Test Setup Diagram – AC Line Conducted Emission Test

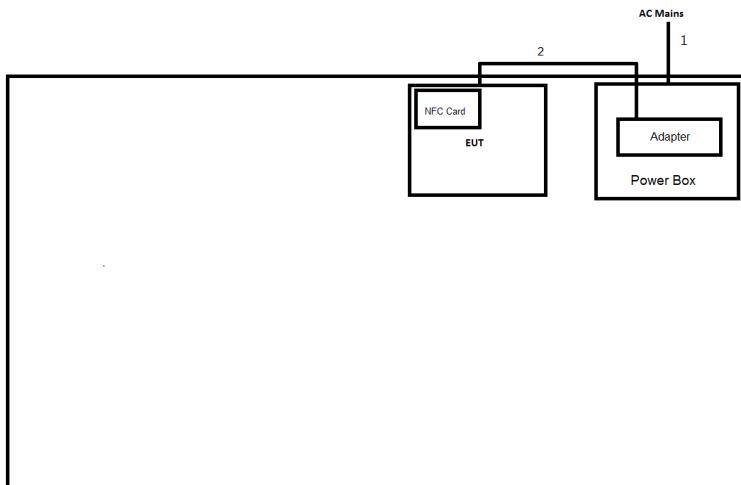

Item	Connection	Shielded	Length(m)	Remark
1	AC Power cable	No	1.8	-
2	DC Power cable	No	1.8	-

Test Setup Diagram - Radiated Test

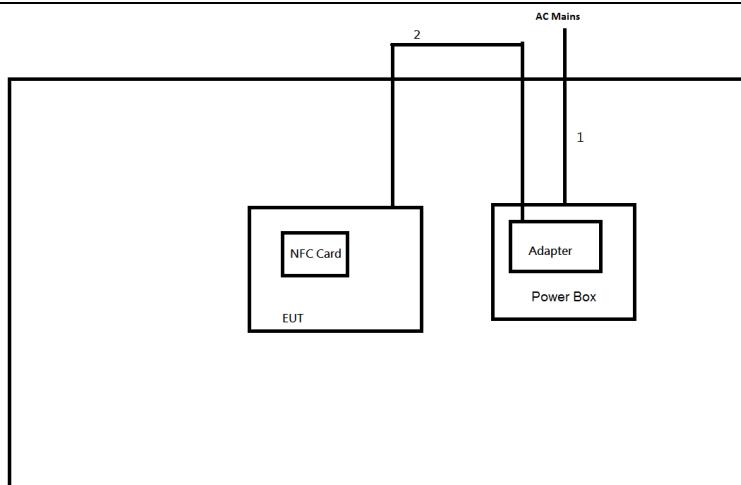

Item	Connection	Shielded	Length(m)	Remark
1	AC Power cable	No	1.8	-
2	DC Power cable	No	1.8	-



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.
<input checked="" type="checkbox"/>	If AC conducted emissions fall in operating band, then following below test method confirm final result. <ul style="list-style-type: none"><input type="checkbox"/> Accept measurements done with a suitable dummy load replacing the antenna under the following conditions:<ol style="list-style-type: none">(1) Perform the AC line conducted tests with the antenna connected to determine compliance with FCC 15.207 limits outside the transmitter's fundamental emission band;(2) Retest with a dummy load to determine compliance with FCC 15.207 limits within the transmitter's fundamental emission band.<input checked="" type="checkbox"/> For a device with a permanent antenna operating at or below 30 MHz, accept measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions:<ol style="list-style-type: none">(1) Perform the AC line conducted tests with the permanent antenna to determine compliance with the FCC 15.207 limits outside the transmitter's fundamental emission band;(2) Retest with a dummy load in lieu of the permanent antenna to determine compliance with the FCC 15.207 limits within the transmitter's fundamental emission band.

3.1.4 Test Setup

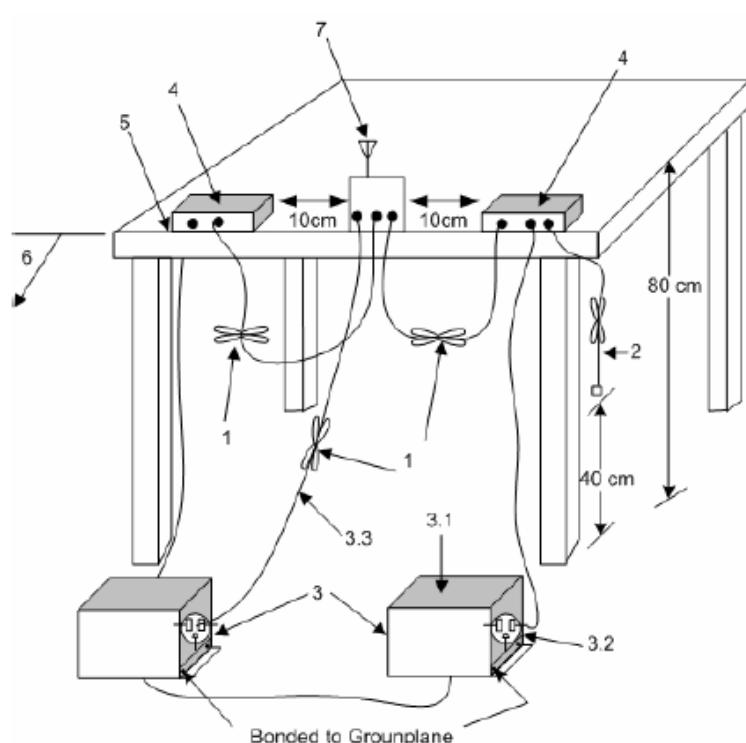

1—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long.

2—The I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

3—EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50Ω loads. LISN may be placed on top of, or immediately beneath, reference ground plane.

3.1—All other equipment powered from additional LISN(s).

3.2—A multiple-outlet strip may be used for multiple power cords of non-ELUT equipment.

3.2—A multiple-outlet strip may be used for multiple power
3.3—I ISN at least 80 cm from nearest part of EUT chassis

3.3—LISN at least 80 cm from nearest part of EUT chassis
4. Non-EUT components of EUT system being tested

4—Non-EU IT components of EU IT system being tested.
5. Rest of EU IT, including peripherals, shall all be aligned


5—Rear of EU 1, including peripherals, shall all be aligned and flush with edge of tabletop.
6. Edge of tabletop shall be 10 cm removed from a vertical conducting plane that is bonded


6—Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.
7—Antennas can be integral or detachable. If detachable, then the antenna shall be attached for this test.

7—Antenna can be integral or detachable. If detachable, then the antenna shall be attached for this test.



3.1.5 Test Result of AC Power-line Conducted Emissions

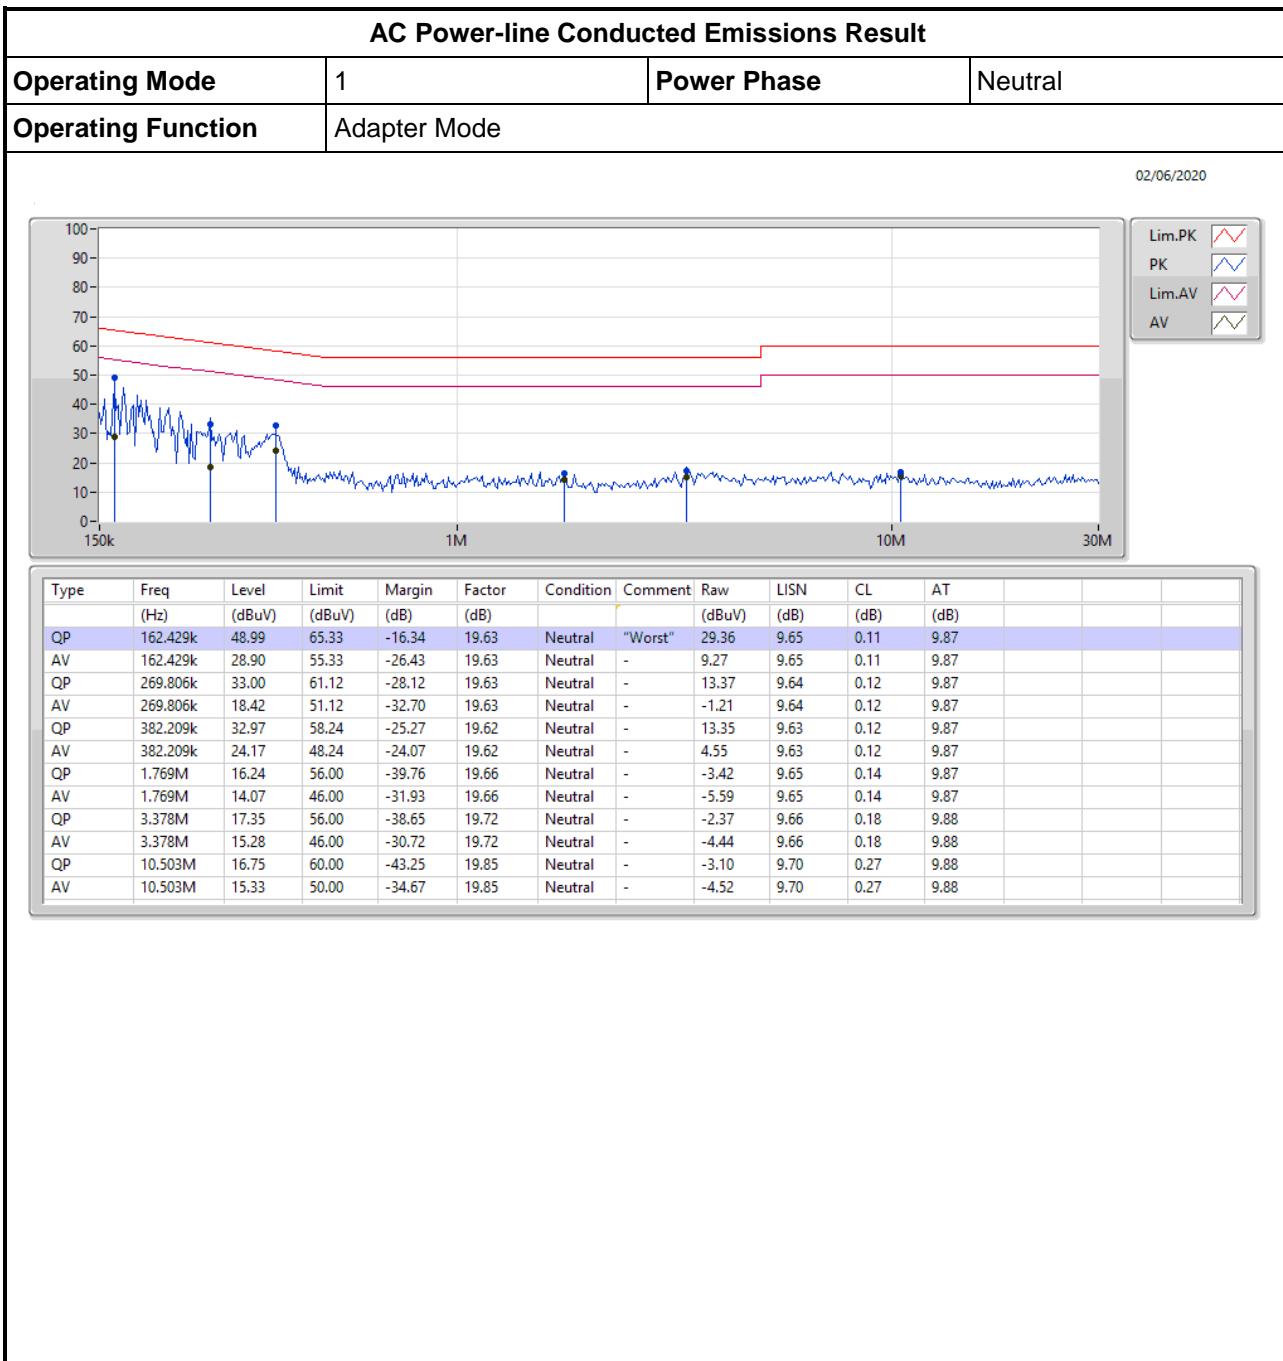

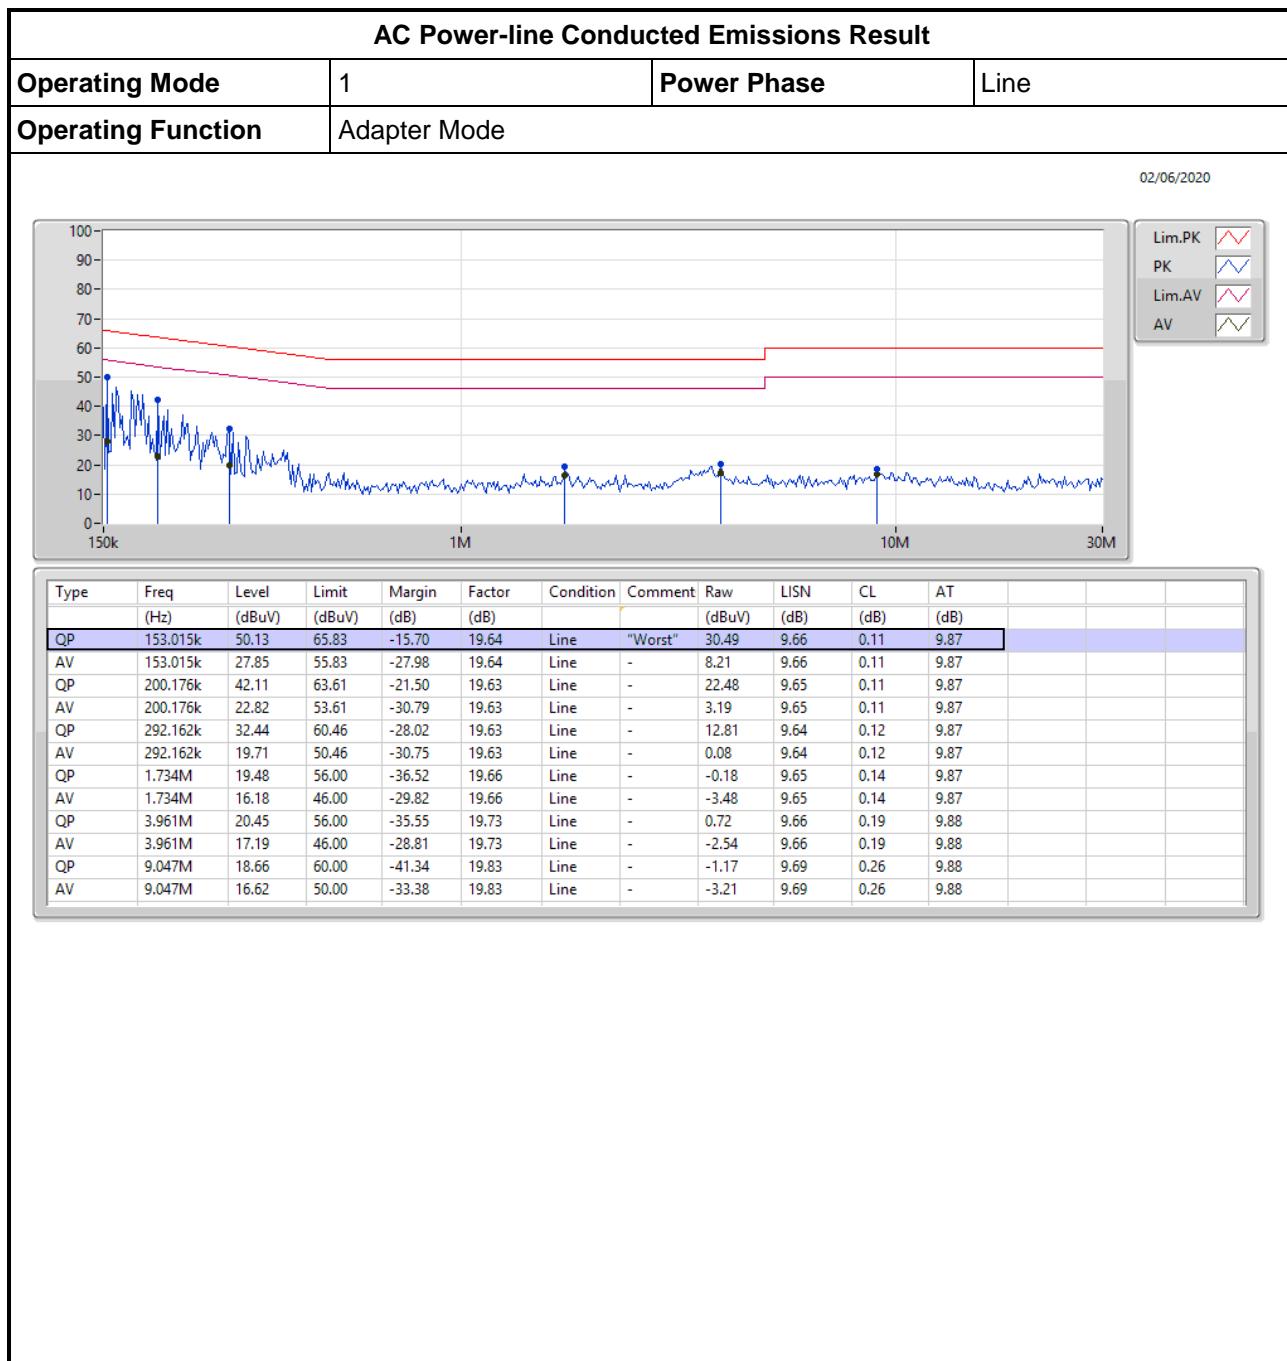

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

20dB Bandwidth Limit

- Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 – 13.567 MHz).

3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.2.3 Test Procedures

Test Method

- Because the measured signal is CW or CW-like adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.
- For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.

3.2.4 Test Setup

Emission Bandwidth

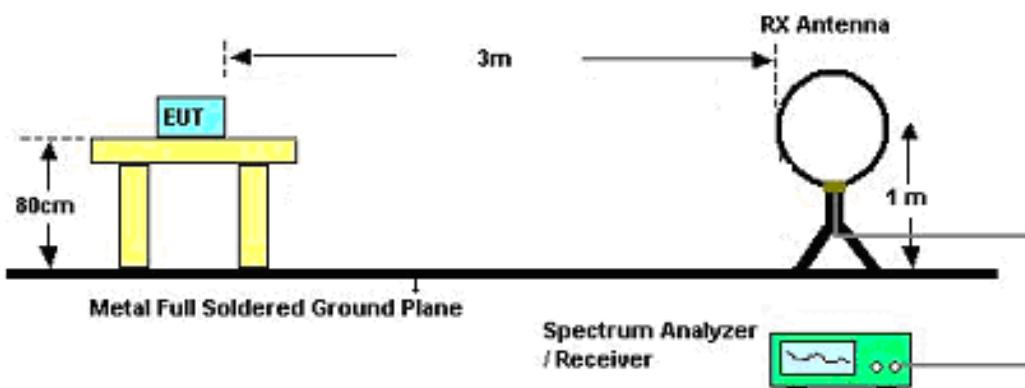



3.2.5 Test Result of Emission Bandwidth

Summary

Mode	20dB (Hz)	Fl-20dB (Hz)	Fh-20dB (Hz)	OBW (Hz)	Limit (Range)
13.553-13.567MHz	-	-	-	-	-
NFC	2.709k	13.55828M	13.56099M	2.247k	13.553-13.567

Result

Mode	Result	20dB (Hz)	Fl-20dB (Hz)	Fh-20dB (Hz)	OBW (Hz)	Fl-OBW (Hz)	Fh-OBW (Hz)	Limit (Range)
NFC	-	-	-	-	-	-	-	-
13.56MHz_TnomVnom	Pass	2.709k	13.55828M	13.56099M	2.247k	13.55856M	13.56080M	13.553-13.567




NFC

EBW

13.56MHz_TnomVnom

01/06/2020

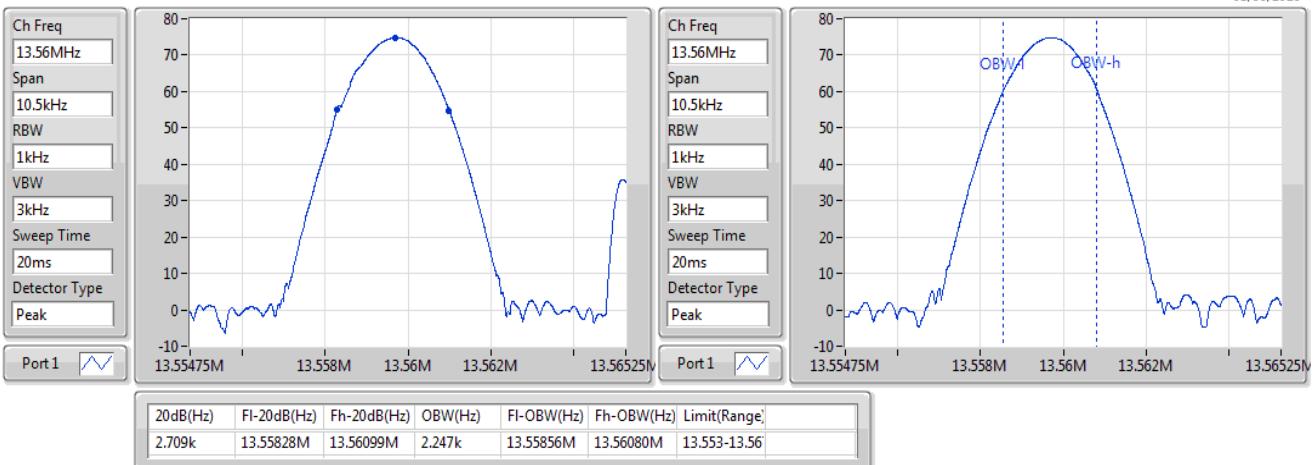



3.3 Field Strength of Fundamental Emissions and Spectrum Mask

3.3.1 Field Strength of Fundamental Emissions and Spectrum Mask Limit

Field Strength of Fundamental Emissions For FCC					
Emissions	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
fundamental	15848	84.0	103.1	124.0	143.1
Quasi peak measurement of the fundamental.					

Spectrum Mask For FCC					
Freq. of Emission (MHz)	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
1.705~13.110	30	29.5	48.6	69.5	88.6
13.110~13.410	106	40.5	59.6	80.5	99.6
13.410~13.553	334	50.5	69.6	90.5	109.6
13.553~13.567	15848	84.0	103.1	124.0	143.1
13.567~13.710	334	50.5	69.6	90.5	109.6
13.710~14.010	106	40.5	59.6	80.5	99.6
14.010~30.000	30	29.5	48.6	69.5	88.6


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
<input type="checkbox"/>	The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
<input checked="" type="checkbox"/>	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.


3.3.4 Test Setup

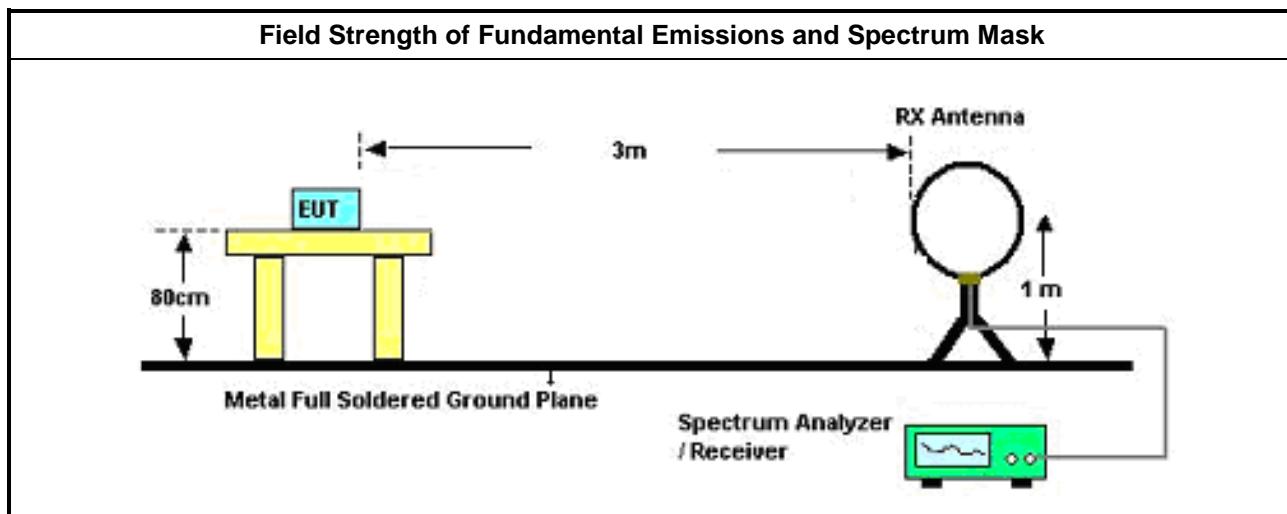

3.3.5 Test Result of Field Strength of Fundamental Emissions and Spectrum Mask

Field Strength of Fundamental Emissions Result					
Modulation Mode	Frequency (MHz)	Fundamental (dBuV/m)@3m	Polarization	Margin (dB)	Limit (dBuV/m)@3m
NFC-B (ISO 14443-3B)	13.56	69.02	H	-54.98	124.00
Result		Complied			

Note 1: Measurement worst emissions of receive antenna polarization: H(Horizontal).

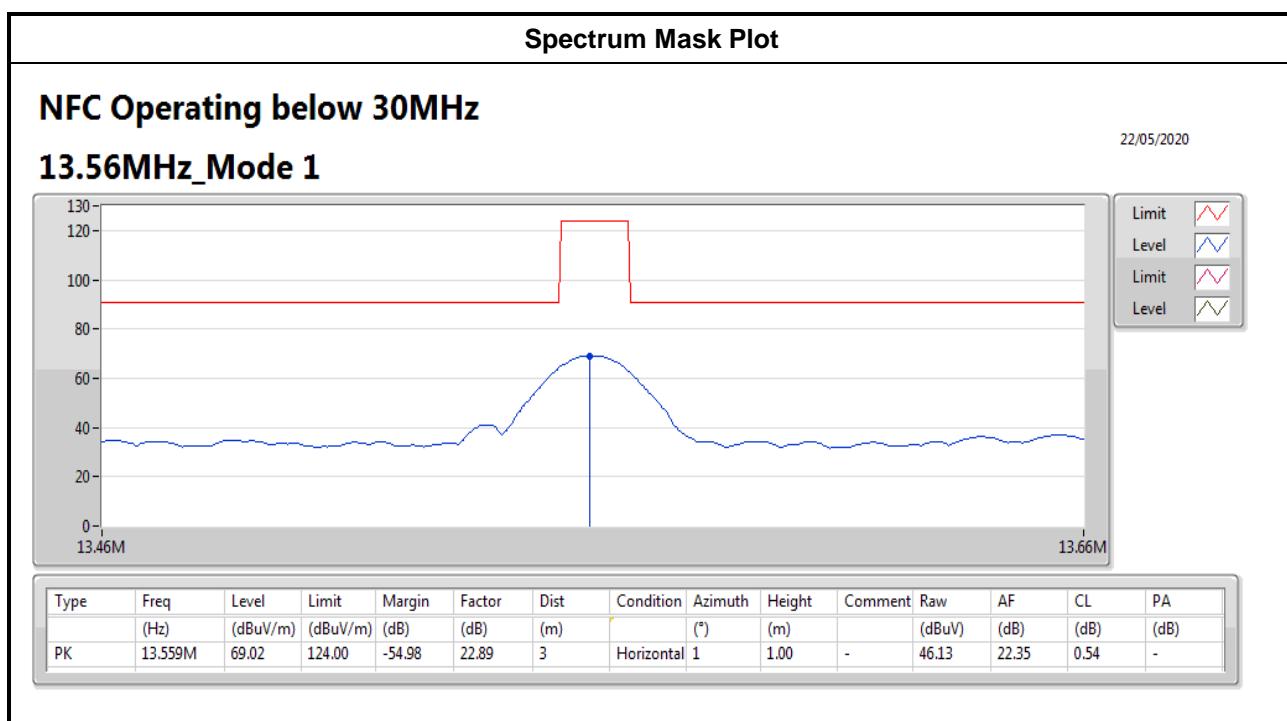



3.4 Transmitter Radiated Unwanted Emissions

3.4.1 Transmitter Radiated Unwanted Emissions Limit

Transmitter Radiated Unwanted Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.4.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
<input type="checkbox"/>	<input type="checkbox"/> The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
<input checked="" type="checkbox"/>	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.
<input checked="" type="checkbox"/>	KDB 414788 D01 v01r01 Open-Field Test Sites and Chamber Correlation Justification.
<input type="checkbox"/>	<input type="checkbox"/> Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
<input type="checkbox"/>	<input type="checkbox"/> Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


3.4.4 Test Setup

Transmitter Radiated Unwanted Emissions

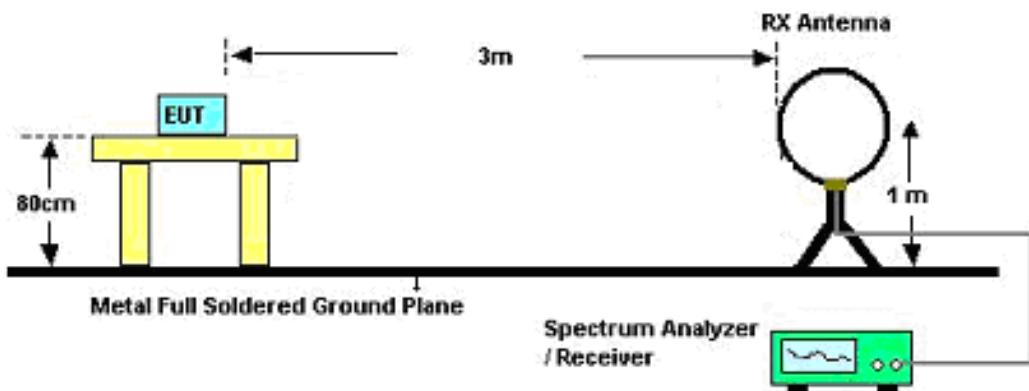

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. The center of the loop shall be 1 m above the ground.

Transmitter Radiated Bandedge Emissions

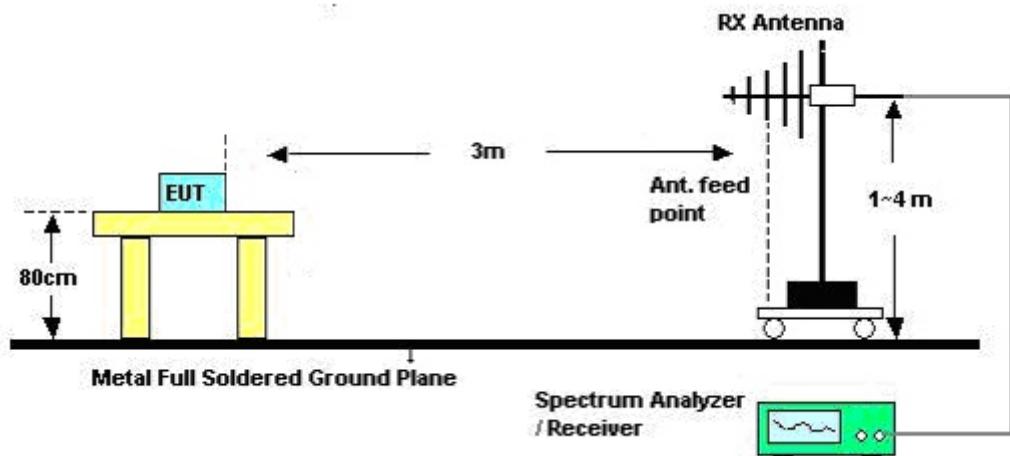

Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna. the antenna height shall be varied from 1 m to 4 m.



3.4.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Azimuth (°)	Height (m)	Comments
13.553-13.567MHz	-	-	-	-	-	-	-	-	-	-	-
NFC	Pass	PK	27.134M	55.81	69.50	-13.69	23.79	3	360	1.00	-

Result


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Azimuth (°)	Height (m)	Comments
NFC	-	-	-	-	-	-	-	-	-	-	-
13.56MHz_Mode 1	Pass	PK	13.559M	69.02	124.00	-54.98	22.89	3	1	1.00	-
13.56MHz_Mode 1	Pass	PK	24.228k	28.48	119.90	-91.42	20.95	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	41.712k	28.45	115.19	-86.74	21.27	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	96.984k	34.56	107.85	-73.29	20.06	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	27.134M	55.81	69.50	-13.69	23.79	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	2.001M	44.54	69.50	-24.96	20.21	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	627.6k	46.89	71.65	-24.76	20.61	3	360	1.00	-



NFC Operating below 30MHz

22/05/2020

13.56MHz_Mode 1

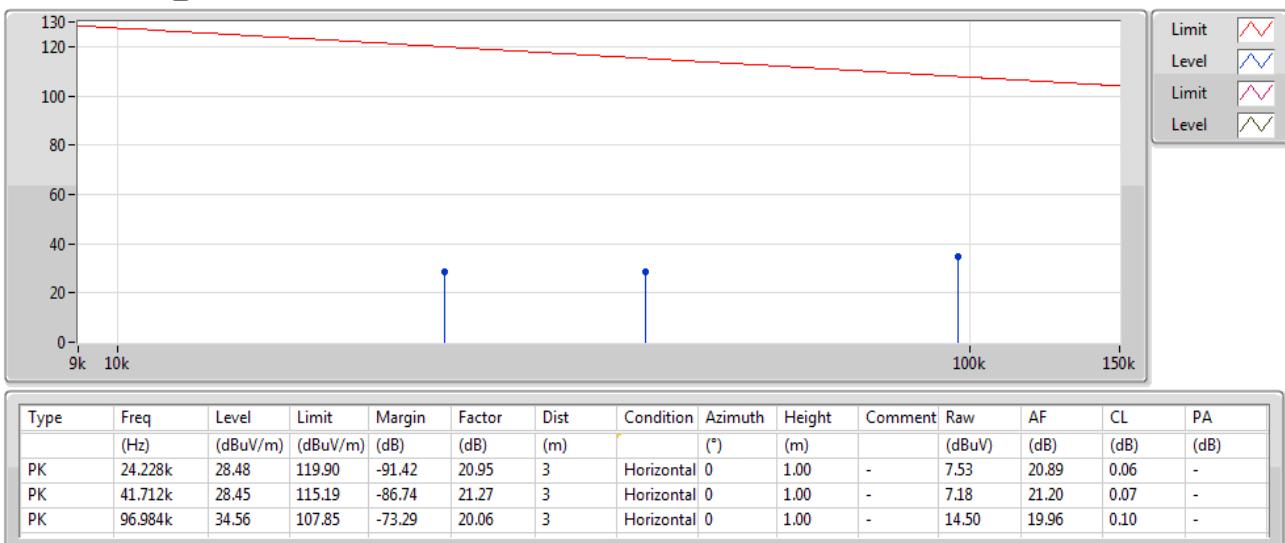




NFC Operating below 30MHz

22/05/2020

13.56MHz_Mode 1

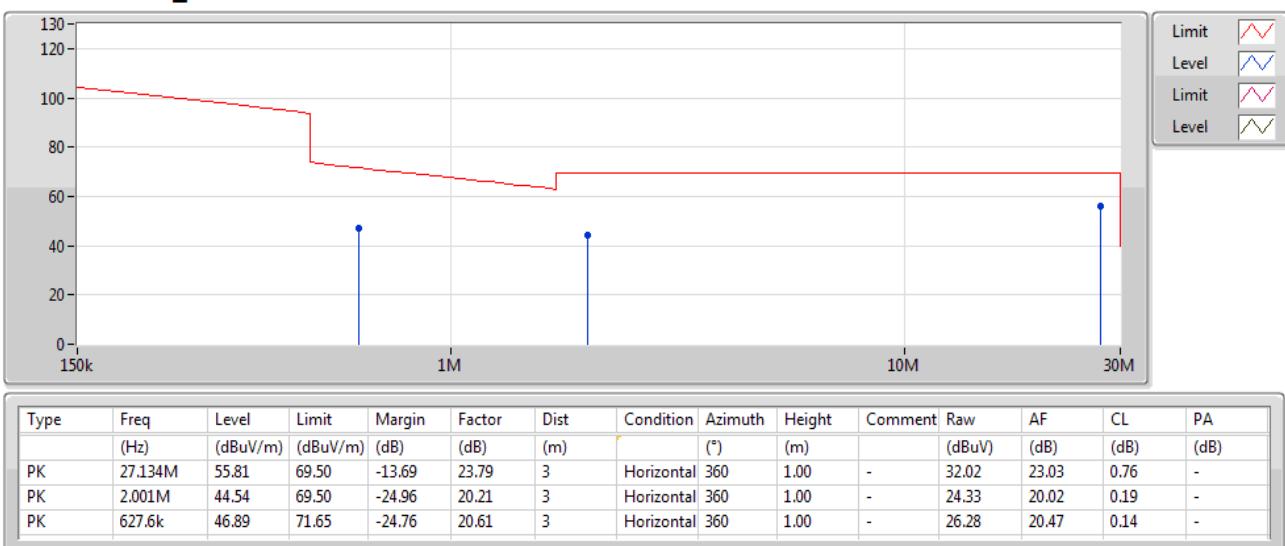



3.4.6 Transmitter Radiated Unwanted Emissions (Above 30MHz)

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Azimuth (°)	Height (m)	Comments
13.553-13.567MHz	-	-	-	-	-	-	-	-	-	-	-
NFC	Pass	QP	515M	41.98	46.00	-4.02	-1.59	3	216	1.84	-

Result


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Azimuth (°)	Height (m)	Comments
NFC	-	-	-	-	-	-	-	-	-	-	-
13.56MHz_Mode 1	Pass	PK	39.7M	35.25	40.00	-4.75	-8.75	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	239.52M	36.84	46.00	-9.16	-7.88	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	266.68M	35.13	46.00	-10.87	-5.81	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	515M	38.47	46.00	-7.53	-1.59	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	569.32M	38.42	46.00	-7.58	-0.35	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	747.8M	35.27	46.00	-10.73	1.41	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	39.7M	31.72	40.00	-8.28	-8.75	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	239.52M	40.45	46.00	-5.55	-7.88	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	293.84M	39.13	46.00	-6.87	-5.52	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	487.84M	40.15	46.00	-5.85	-1.66	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	747.8M	39.53	46.00	-6.47	1.41	3	360	1.00	-
13.56MHz_Mode 1	Pass	QP	515M	41.98	46.00	-4.02	-1.59	3	216	1.84	-



NFC Operating above 30MHz

23/05/2020

13.56MHz_Mode 1

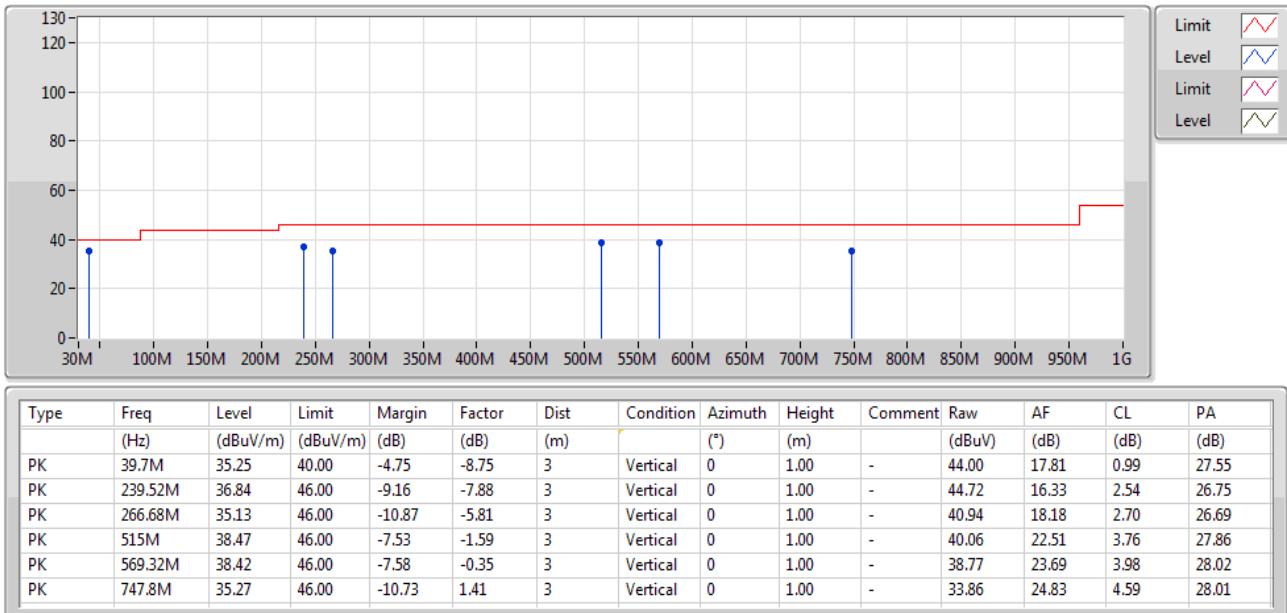




NFC Operating above 30MHz

23/05/2020

13.56MHz_Mode 1

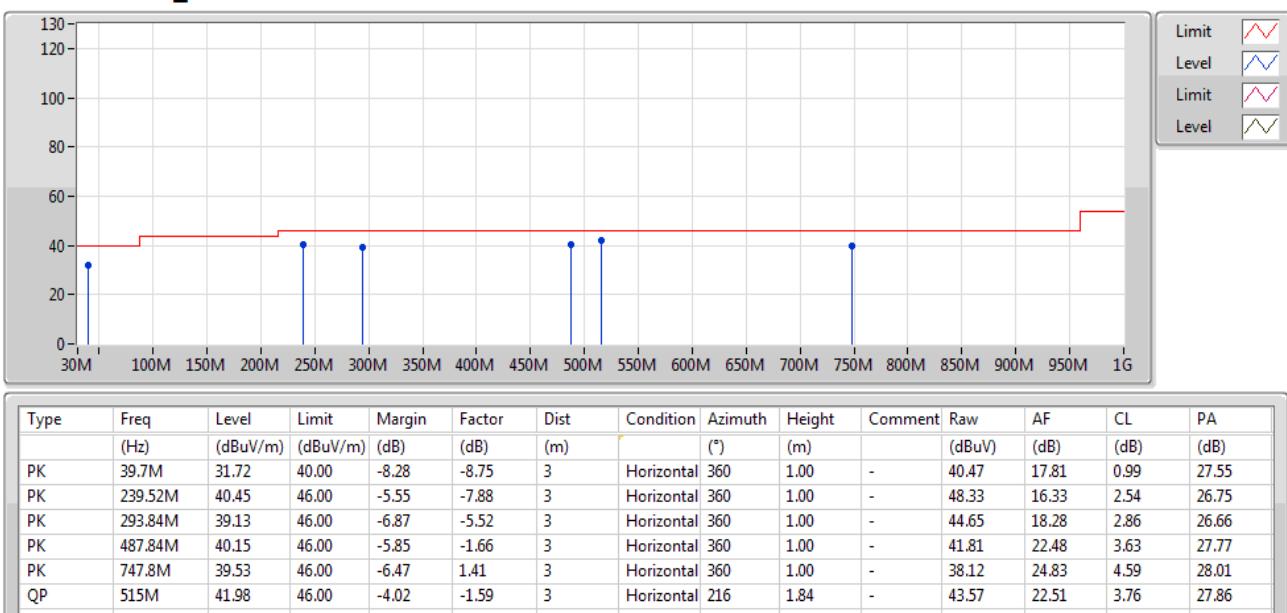

3.5 Frequency Stability

3.5.1 Frequency Stability Limit

Frequency Stability Limit
<input checked="" type="checkbox"/> Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm).


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.8 for frequency stability tests
<input type="checkbox"/> <input checked="" type="checkbox"/> Frequency stability with respect to ambient temperature
<input type="checkbox"/> <input checked="" type="checkbox"/> Frequency stability when varying supply voltage
<input type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

3.5.4 Test Setup

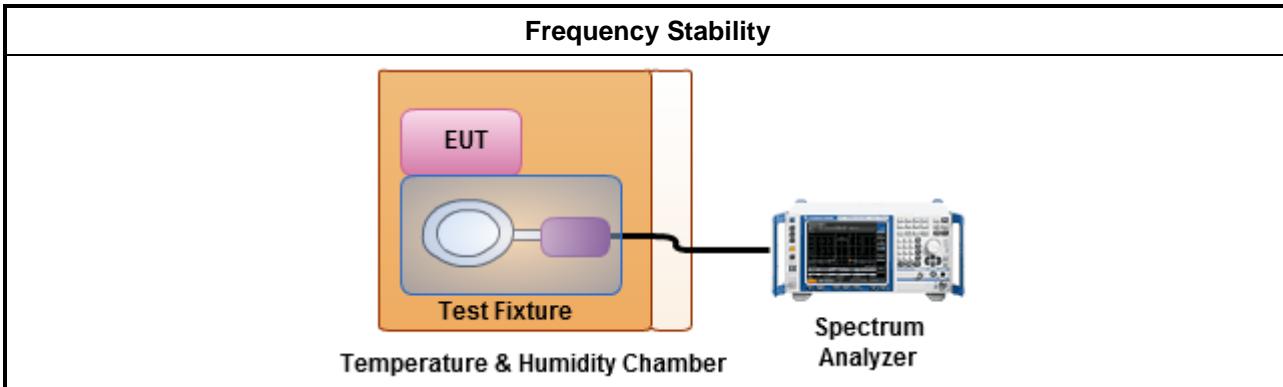



3.5.5 Test Result of Frequency Stability

Summary

Mode	Result	Ch (Hz)	Center (Hz)	ppm	Limit (ppm)	Port	Remark
13.553-13.567MHz	-	-	-	-	-	-	-
NFC	Pass	13.56M	13.559691M	22.7784	100	1	0 min

Result

Mode	Result	Ch (Hz)	Center (Hz)	ppm	Limit (ppm)	Port	Remark
NFC	-	-	-	-	-	-	-
13.56MHz_-20°C	Pass	13.56M	13.559727M	20.1327	100	1	0 min
13.56MHz_-20°C	Pass	13.56M	13.559749M	18.5195	100	1	2 min
13.56MHz_-20°C	Pass	13.56M	13.559734M	19.6165	100	1	5 min
13.56MHz_-20°C	Pass	13.56M	13.559714M	21.1007	100	1	10 min
13.56MHz_-10°C	Pass	13.56M	13.559738M	19.3584	100	1	0 min
13.56MHz_-10°C	Pass	13.56M	13.559738M	19.3584	100	1	2 min
13.56MHz_-10°C	Pass	13.56M	13.559726M	20.1973	100	1	5 min
13.56MHz_-10°C	Pass	13.56M	13.559736M	19.4875	100	1	10 min
13.56MHz_0°C	Pass	13.56M	13.559728M	20.0682	100	1	0 min
13.56MHz_0°C	Pass	13.56M	13.559717M	20.8426	100	1	2 min
13.56MHz_0°C	Pass	13.56M	13.559739M	19.2294	100	1	5 min
13.56MHz_0°C	Pass	13.56M	13.559736M	19.4875	100	1	10 min
13.56MHz_10°C	Pass	13.56M	13.559739M	19.2294	100	1	0 min
13.56MHz_10°C	Pass	13.56M	13.559738M	19.3584	100	1	2 min
13.56MHz_10°C	Pass	13.56M	13.559726M	20.1973	100	1	5 min
13.56MHz_10°C	Pass	13.56M	13.559735M	19.552	100	1	10 min
13.56MHz_30°C	Pass	13.56M	13.559736M	19.4875	100	1	0 min
13.56MHz_30°C	Pass	13.56M	13.559694M	22.5848	100	1	2 min
13.56MHz_30°C	Pass	13.56M	13.559714M	21.1007	100	1	5 min
13.56MHz_30°C	Pass	13.56M	13.559702M	22.0041	100	1	10 min
13.56MHz_40°C	Pass	13.56M	13.559734M	19.6165	100	1	0 min
13.56MHz_40°C	Pass	13.56M	13.559732M	19.7456	100	1	2 min
13.56MHz_40°C	Pass	13.56M	13.559734M	19.6165	100	1	5 min
13.56MHz_40°C	Pass	13.56M	13.559732M	19.7456	100	1	10 min
13.56MHz_50°C	Pass	13.56M	13.559724M	20.3263	100	1	0 min
13.56MHz_50°C	Pass	13.56M	13.559724M	20.3909	100	1	2 min
13.56MHz_50°C	Pass	13.56M	13.559713M	21.1652	100	1	5 min
13.56MHz_50°C	Pass	13.56M	13.55972M	20.649	100	1	10 min
13.56MHz_20°C-132V	Pass	13.56M	13.559744M	18.8422	100	1	0 min
13.56MHz_20°C-132V	Pass	13.56M	13.559735M	19.552	100	1	2 min
13.56MHz_20°C-132V	Pass	13.56M	13.559735M	19.552	100	1	5 min
13.56MHz_20°C-132V	Pass	13.56M	13.559737M	19.4229	100	1	10 min
13.56MHz_20°C-120V	Pass	13.56M	13.559691M	22.7784	100	1	0 min



Mode	Result	Ch (Hz)	Center (Hz)	ppm	Limit (ppm)	Port	Remark
13.56MHz_20°C-120V	Pass	13.56M	13.559696M	22.4558	100	1	2 min
13.56MHz_20°C-120V	Pass	13.56M	13.559694M	22.5848	100	1	5 min
13.56MHz_20°C-120V	Pass	13.56M	13.559701M	22.0686	100	1	10 min
13.56MHz_20°C-102V	Pass	13.56M	13.559746M	18.7131	100	1	0 min
13.56MHz_20°C-102V	Pass	13.56M	13.559736M	19.4875	100	1	2 min
13.56MHz_20°C-102V	Pass	13.56M	13.559735M	19.552	100	1	5 min
13.56MHz_20°C-102V	Pass	13.56M	13.559737M	19.4229	100	1	10 min



4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESR	102171	9kHz ~ 7GHz	26/Jun/2019	25/Jun/2020
LISN	R&S	ENV216	101295	9kHz ~ 30MHz	05/Nov/2019	04/Nov/2020
RF Cable-CON	MTJ	RG142	CB002-CO	9kHz ~ 200MHz	23/Sep/2019	22/Sep/2020
AC POWER	APC	AFC-11005G	F310050055	47Hz ~ 63Hz 5 ~ 300V	NCR	NCR
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9kHz ~ 30MHz	24/Sep/2019	23/Sep/2020

NCR:Non-Calibration required.

Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101029	10kHz ~ 40GHz	01/Oct/2019	30/Sep/2020
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	16/Mar/2020	15/Mar/2021
*TEMP & humidity Chamber	Giant Force	GTH-225-40-CP-AR	MAA1611-005	-40 ~ 100°C 10 ~ 98%RH	09/Dec/2019	08/Dec/2020

Instrument for Radiated Test

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	30/Aug/2019	29/Aug/2020
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	14/Apr/2020	13/Apr/2021
EMI Test Receiver	R&S	ESR3	102051	9kHz ~ 3.6GHz	28/May/2019	27/May/2020
Bilog Antenna & 6dB Attenuator	SCHAFFNER / EMCI	CBL6112B / N-6-05	22237 / AT-N-0603	30MHz ~ 1GHz	19/Apr/2020	18/Apr/2021
Signal Analyzer	R&S	FSV40	101500	10Hz ~ 40GHz	15/Aug/2019	14/Aug/2020
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	18/Mar/2020	17/Mar/2021
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	16/Mar/2020	15/Mar/2021