

Global United Technology Services Co., Ltd.

Report No.: GTSE15040064901

FCC Report (Bluetooth)

Applicant: Shenzhen Caitong Technology Co.,Ltd

Address of Applicant: Foor 4, Block B, Shuitianding feng Industrial Park Shiyan Street,

Shenzhen, China

Equipment Under Test (EUT)

Product Name: Bluetooth headset

Model No.: SZE BT261BK, SZE BT253SL, SZE BT251WT, SZE

BT252BK, BL-LE12, M28, M68, V8/HV-800, OK-100

FCC ID: 2AEXG-BT261BK

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2014

Date of sample receipt: April 30, 2015

Date of Test: May 01-13, 2015

Date of report issued: May 14, 2015

Test Result: PASS *

Authorized Signature:

Robinson Lo Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

^{*} In the configuration tested, the EUT complied with the standards specified above.



2 Version

Version No.	Date	Description
00	May 14, 2015	Original

Prepared By:	Sam. Gao	Date:	May 14, 2015	
	Project Engineer			
Check By:	hank. yan Reviewer	Date:	May 14, 2015	



3 Contents

			Page
1	cov	ER PAGE	1
2	VER	SION	2
•			
3	CON	TENTS	3
4	TES	T SUMMARY	4
	4.1	MEASUREMENT UNCERTAINTY	4
5	GEN	ERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST MODE	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST FACILITY	
	5.6	TEST LOCATION	7
6	TES	T INSTRUMENTS LIST	8
7	TES	T RESULTS AND MEASUREMENT DATA	9
	7.1	ANTENNA REQUIREMENT	9
	7.2	CONDUCTED EMISSIONS	
	7.3	CONDUCTED OUTPUT POWER	
	7.4	CHANNEL BANDWIDTH	
	7.5	Power Spectral Density	
	7.6	BAND EDGES	
	7.6.1		
	7.6.2		
	7.7	SPURIOUS EMISSION	
	7.7.1		
	7.7.2	Radiated Emission Method	24
8	TES	T SETUP PHOTO	30
q	FUT	CONSTRUCTIONAL DETAILS	32



4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)
Note (1): The measurement unce	ertainty is for coverage factor of k	=2 and a level of confidence of	95%.

Remark: Test according to ANSI C63.4:2009



5 General Information

5.1 Client Information

Applicant:	Shenzhen Caitong Technology Co.,Ltd
Address of Applicant:	Foor 4,Block B,Shuitiandingfeng Industrial Park Shiyan Street,Shenzhen ,China
Manufacturer:	Shenzhen Caitong Technology Co.,Ltd
Address of Manufacture:	Foor 4,Block B,Shuitiandingfeng Industrial Park Shiyan Street,Shenzhen ,China

5.2 General Description of EUT

Product Name:	Bluetooth headset
Model No.:	SZE BT261BK, SZE BT253SL, SZE BT251WT, SZE BT252BK, BL-LE12, M28, M68, V8/HV-800, OK-100
Operation Frequency:	2402MHz~2480MHz
Channel Numbers:	40
Channel Separation:	2MHz
Modulation Type:	GFSK
Antenna Type:	PCB antenna
Antenna Gain:	2.0dBi (declare by Applicant)
Power Supply:	DC 3.3V – 4.2V



Operation F	Operation Frequency each of channel						
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
• !		. !	. !	•	. !		. !
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz



5.3 Test mode

Transmitting mode Keep the EUT in continuously transmitting mode

Remark: Test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

5.4 Description of Support Units (FCC VOC approved)

Manufacturer	Description	Model	Serial Number
Emerson Network Power	USB Charger	A1299	N/A

5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fuly described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

• Industry Canada (IC) —Registration No.: 9079A-2

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: Room 301-309, 3th Floor, Block A, Huafeng Jinyuan Business Building, No. 300 Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen 518102

Tel: 0755-27798480 Fax: 0755-27798960

Page 7 of 35



6 Test Instruments list

Rad	Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 27 2015	Mar. 26 2016	
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A	
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Dec. 4 2014	Dec. 3 2015	
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	July 01 2014	June 30 2015	
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	July 01 2014	June 30 2015	
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 27 2014	June 26 2015	
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 27 2015	Mar. 26 2016	
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	
9	Coaxial Cable	GTS	N/A	GTS213	Mar. 27 2015	Mar. 26 2016	
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 28 2015	Mar. 27 2016	
11	Coaxial cable	GTS	N/A	GTS210	Mar. 28 2015	Mar. 27 2016	
12	Coaxial Cable	GTS	N/A	GTS212	Mar. 28 2015	Mar. 27 2016	
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	July 01 2014	June 30 2015	
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	July 01 2014	June 30 2015	
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 27 2014	June 26 2015	
16	Band filter	Amindeon	82346	GTS219	Mar. 28 2015	Mar. 27 2016	

Cond	Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 07 2013	Sep. 06 2015	
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	July 01 2014	June 30 2015	
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	July 01 2014	June 30 2015	
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	July 01 2014	June 30 2015	
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	July 01 2014	June 30 2015	
6	Coaxial Cable	GTS	N/A	GTS227	July 01 2014	June 30 2015	
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	

Gen	eral used equipment:					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	July 08 2014	July 07 2015



7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The antenna is PCB antenna, the best case gain of the antenna is 2.0dBi

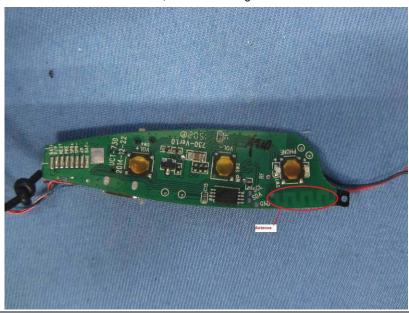




7.2 Conducted Emissions

T (D)	500 D. 145 O O. 15 . 45 007	,				
Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2009					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz) Limit (dBuV)					
	Quasi-peak Average					
	0.15-0.5	56 to 46*				
	0.5-5	56	46			
	5-30	60	50			
T	* Decreases with the logarithm of the frequency.					
Test setup:	Reference Plane					
	AUX Filter AC power Equipment E.U.T Test table/Insulation plane Remark E.U.T. Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0.8m					
Test procedure:	 The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed 					
	according to ANSI C63.10:2009 on conducted measurement.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.3 for details					
Test results:	Pass					



Measurement data

Line:

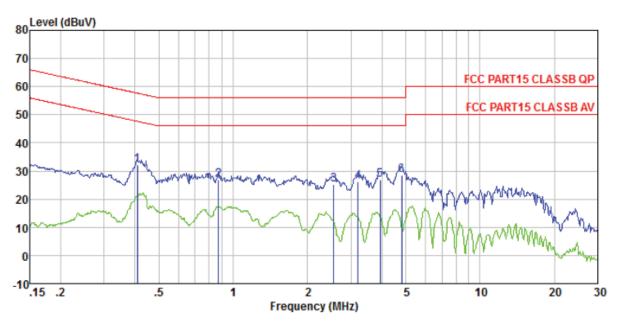

Site : Shielded room

Condition : FCC PART15 CLASSB QP LISN-2013 LINE

: 0649RF


Job No. Test mode : Bluetooth4.0 mode

Test Engineer: Qing

	Freq	Read		LISN Factor			Over Limit	Remark
	MHz	dBu₹	dBuV	dB	dB	dBuV	dB	
1 2 3 4	0. 871 2. 554		26. 92 25. 30	0.11 0.14 0.13 0.17	0.15	56.00 56.00	-29.08 -30.70	QP QP
5	3.943	26.62	26.97	0. 20 0. 21	0.15	56.00	-29.03	QP



Neutral:

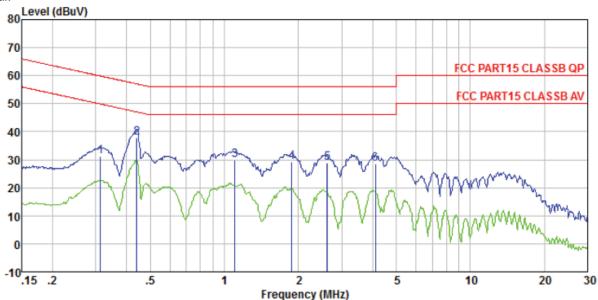

Site : Shielded room

Condition : FCC PART15 CLASSB QP LISN-2013 NEUTRAL

Job No. : 0649RF

Test mode : Bluetooth4.0 mode

Test Engineer: Qing


	Freq	Read		LISN Factor			Over Limit	Remark
	MHz	dBu₹	dBuV	dB	dB	dBuV	dB	
1 2 3 4 5	0. 440 1. 106 1. 878 2. 622	29. 78 28. 91 28. 60	37. 97 29. 99 29. 14 28. 85	0.06 0.08 0.09 0.10	0.13 0.14 0.15	57.07 56.00 56.00 56.00	-19.10 -26.01 -26.86 -27.15	QP QP QP QP
6	4.114	28.40	28.69	0.14	0.15	56.00	-27.31	QP

Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



7.3 Conducted Output Power

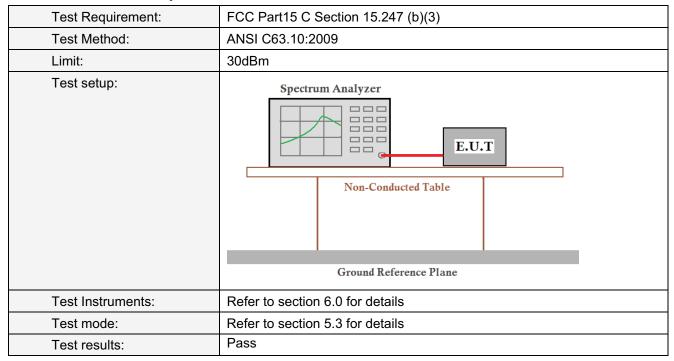


Measurement Data

Test channel	Peak Output Power (dBm)	Limit(dBm)	Result	
Lowest	-4.26			
Middle	-3.79	30.00	Pass	
Highest	-3.95			


Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960




Test plot as follows:



Lowest channel




Middle channel



Highest channel



7.4 Channel Bandwidth

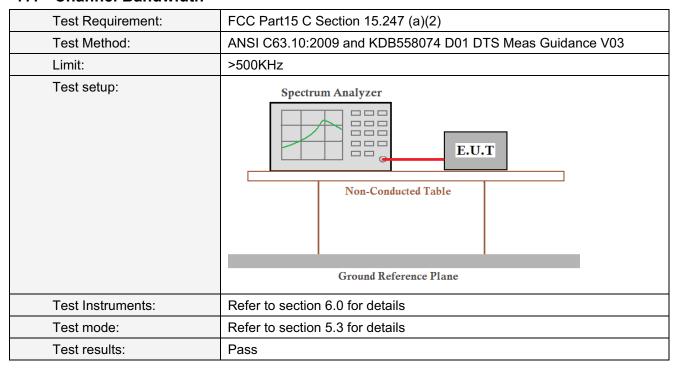


Measurement Data

Test channel	Channel Bandwidth (KHz)	Limit(KHz)	Result
Lowest	710.408		
Middle	691.783	>500	Pass
Highest	707.370		


Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960




Test plot as follows:



Lowest channel



Middle channel



Highest channel



7.5 Power Spectral Density

Test Requirement:	FCC Part15 C Section 15.247 (e)		
Test Method:	ANSI C63.10:2009 and KDB558074 D01 DTS Meas Guidance V03		
Limit:	8dBm/3kHz		
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		


Measurement Data

Test channel	Power Spectral Density (dBm)	Limit(dBm/3kHz)	Result		
Lowest	-5.22				
Middle	-4.72	8.00	Pass		
Highest	-4.91				


Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960




Test plot as follows:



Lowest channel



Middle channel



Highest channel




7.6 Band edges


7.6.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)			
Test Method:	ANSI C63.10:2009 and KDB558074 D01 DTS Meas Guidance V03			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.3 for details			
Test results:	Pass			

Test plot as follows:







Highest channel



7.6.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Se		9 and 15.205		
Test Method:	ANSI C63.10:200	09			
Test Frequency Range:	All of the restrict 2500MHz) data v		-	the worst ba	nd's (2310MHz to
Test site:	Measurement Dis	stance: 3m			
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1CU-	Peak	1MHz	3MHz	Peak
	Above 1GHz	RMS	1MHz	3MHz	Average
Limit:	Frequen	су	Limit (dBuV/	/m @3m)	Value
			54.0		Average
	Above 10	iHZ	74.0	0	Peak
Test setup:	Turn Table 1.5m	4m 4m 1m 1m	Ho: Spec Ana	rn Antenna etrum lyzer	
Test Procedure:	 The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degree determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antentower. The antenna height is varied from one meter to four meters above ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make measurement. For each suspected emission, the EUT was arranged to its worst of and then the antenna was tuned to heights from 1 meter to 4 meter and the rota table was turned from 0 degrees to 360 degrees to fin the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower that the limit specified, then testing could be stopped and the peak value of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quast peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis position And found the X axis positioning which it is worse case, only the testing could be stopped and the peak value of the X axis positioning which it is worse case, only the testing could be stopped and the peak value of the EUT would be reported. 				
Test Instruments:	worst case mo			/1 t.	
TOOL HOUGHDING		actail	-		
Test mode:	Refer to section s		S		

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	43.62	27.59	5.38	30.18	46.41	74.00	-27.59	Horizontal
2400.00	44.75	27.58	5.39	30.18	47.54	74.00	-26.46	Horizontal
2390.00	42.53	27.59	5.38	30.18	45.32	74.00	-28.68	Vertical
2400.00	47.12	27.58	5.39	30.18	49.91	74.00	-24.09	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	32.89	27.59	5.38	30.18	35.68	54.00	-18.32	Horizontal
2400.00	33.44	27.58	5.39	30.18	36.23	54.00	-17.77	Horizontal
2390.00	32.17	27.59	5.38	30.18	34.96	54.00	-19.04	Vertical
2400.00	34.27	27.58	5.39	30.18	37.06	54.00	-16.94	Vertical

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	40.52	27.53	5.47	29.93	43.59	74.00	-30.41	Horizontal
2500.00	41.51	27.55	5.49	29.93	44.62	74.00	-29.38	Horizontal
2483.50	43.93	27.53	5.47	29.93	47.00	74.00	-27.00	Vertical
2500.00	41.46	27.55	5.49	29.93	44.57	74.00	-29.43	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	31.65	27.53	5.47	29.93	34.72	54.00	-19.28	Horizontal
2500.00	30.50	27.55	5.49	29.93	33.61	54.00	-20.39	Horizontal
2483.50	31.54	27.53	5.47	29.93	34.61	54.00	-19.39	Vertical
2500.00	30.72	27.55	5.49	29.93	33.83	54.00	-20.17	Vertical

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Global United Technology Services Co., Ltd.

Room 301-309, 3th Floor, Block A, Huafeng Jinyuan Business Building, No. 300 Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen 518102

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



7.7 Spurious Emission


7.7.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)						
Test Method:	ANSI C63.10:2009 and KDB558074 D01 DTS Meas Guidance V03						
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.						
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.3 for details						
Test results:	Pass						




Test plot as follows:

Lowest channel




30MHz~10GHz






30MHz~10GHz







30MHz~10GHz



10GHz~25GHz



10GHz~25GHz



10GHz~25GHz



7.7.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Se	FCC Part15 C Section 15.209							
Test Method:	ANSI C63.10:200)9							
Test Frequency Range:	30MHz to 25GHz								
Test site:	Measurement Dis	stance: 3m							
Receiver setup:	Frequency	Detector	RBW	VBW	Value				
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak				
	Above 1GHz	Peak	1MHz	3MHz	Peak				
	Above 1G112	RMS	1MHz	3MHz	Average				
Limit:	Frequen	cy L	imit (dBuV	/m @3m)	Value				
	30MHz-88	MHz	40.0	0	Quasi-peak				
	88MHz-216	6MHz	43.5	0	Quasi-peak				
	216MHz-96	0MHz	46.0	0	Quasi-peak				
	960MHz-1	GHz	54.0	0	Quasi-peak				
	A la 4.0	211-	54.0	0	Average				
	Above 10	∍HZ	74.0	Peak					
	Tum 7.8m	Tum 0.8m lm RF Test Receiver							
	Above 1GHz		— =						
	EUT Turn Table 0.8	m lm		Antenna Tower Horn Antenna Spectrum Analyzer Amplifier					

Global United Technology Services Co., Ltd.

Room 301-309, 3th Floor, Block A, Huafeng Jinyuan Business Building, No. 300 Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen 518102 Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Test Procedure:	The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
	The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.
	7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.



Measurement Data

■ Below 1GHz

	Dood	Antonno	Cabla	Droomn			Over	
Frequency	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	polarization
(MHz)	(dBuV)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	polarization
40.07	, ,	, ,	` ′	` ′	47.00	40.00	` '	\
46.67	31.75	15.45	0.74	30.01	17.93	40.00	-22.07	Vertical
84.70	28.64	12.16	1.07	29.77	12.10	40.00	-27.90	Vertical
135.98	38.30	10.45	1.48	29.48	20.75	43.50	-22.75	Vertical
223.73	41.52	13.36	1.98	29.43	27.43	46.00	-18.57	Vertical
330.20	31.21	15.79	2.52	29.83	19.69	46.00	-26.31	Vertical
798.98	34.36	22.06	4.45	29.20	31.67	46.00	-14.33	Vertical
67.91	40.54	11.47	0.92	29.87	23.06	40.00	-16.94	Horizontal
131.76	43.40	10.82	1.45	29.50	26.17	43.50	-17.33	Horizontal
195.82	52.24	12.57	1.82	29.21	37.42	43.50	-6.08	Horizontal
227.69	49.02	13.51	2.01	29.46	35.08	46.00	-10.92	Horizontal
351.71	40.93	16.30	2.63	29.73	30.13	46.00	-15.87	Horizontal
824.60	33.87	22.33	4.55	29.17	31.58	46.00	-14.42	Horizontal



■ Above 1GHz

Test channel	Test channel: Lowest								
Peak value:									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization	
4804.00	35.43	31.78	8.60	32.09	43.72	74.00	-30.28	Vertical	
7206.00	38.30	36.15	11.65	32.00	54.10	74.00	-19.90	Vertical	
9608.00	35.79	37.95	14.14	31.62	56.26	74.00	-17.74	Vertical	
12010.00	*					74.00		Vertical	
14412.00	*					74.00		Vertical	
4804.00	35.06	31.78	8.60	32.09	43.35	74.00	-30.65	Horizontal	
7206.00	41.50	36.15	11.65	32.00	57.30	74.00	-16.70	Horizontal	
9608.00	29.61	37.95	14.14	31.62	50.08	74.00	-23.92	Horizontal	
12010.00	*					74.00		Horizontal	
14412.00	*					74.00		Horizontal	

Average value:

Average var	uc.							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	25.10	31.78	8.60	32.09	33.39	54.00	-20.61	Vertical
7206.00	26.59	36.15	11.65	32.00	42.39	54.00	-11.61	Vertical
9608.00	25.13	37.95	14.14	31.62	45.60	54.00	-8.40	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	24.71	31.78	8.60	32.09	33.00	54.00	-21.00	Horizontal
7206.00	30.28	36.15	11.65	32.00	46.08	54.00	-7.92	Horizontal
9608.00	19.55	37.95	14.14	31.62	40.02	54.00	-13.98	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

^{1.} Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

^{2. &}quot;*", means this data is the too weak instrument of signal is unable to test.



Test channel	 :			M	iddle			
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	38.53	31.85	8.66	32.12	46.92	74.00	-27.08	Vertical
7323.00	36.45	36.37	11.72	31.89	52.65	74.00	-21.35	Vertical
9764.00	32.48	38.35	14.25	31.59	53.49	74.00	-20.51	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	35.62	31.85	8.66	32.12	44.01	74.00	-29.99	Horizontal
7323.00	39.86	36.37	11.72	31.89	56.06	74.00	-17.94	Horizontal
9764.00	29.82	38.35	14.25	31.59	50.83	74.00	-23.17	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal
Average val	ue:							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	26.37	31.85	8.66	32.12	34.76	54.00	-19.24	Vertical
7323.00	30.60	36.37	11.72	31.89	46.80	54.00	-7.20	Vertical
9764.00	19.35	38.35	14.25	31.59	40.36	54.00	-13.64	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	26.27	31.85	8.66	32.12	34.66	54.00	-19.34	Horizontal
7323.00	25.20	36.37	11.72	31.89	41.40	54.00	-12.60	Horizontal
9764.00	20.32	38.35	14.25	31.59	41.33	54.00	-12.67	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

^{1.} Final Level =Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

^{2. &}quot;*", means this data is the too weak instrument of signal is unable to test.



Test channel: Highest								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	33.05	31.93	8.73	32.16	41.55	74.00	-32.45	Vertical
7440.00	32.27	36.59	11.79	31.78	48.87	74.00	-25.13	Vertical
9920.00	31.23	38.81	14.38	31.88	52.54	74.00	-21.46	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	31.72	31.93	8.73	32.16	40.22	74.00	-33.78	Horizontal
7440.00	37.19	36.59	11.79	31.78	53.79	74.00	-20.21	Horizontal
9920.00	26.82	38.81	14.38	31.88	48.13	74.00	-25.87	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal
Average val	ue:							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	24.07	31.93	8.73	32.16	32.57	54.00	-21.43	Vertical
7440.00	23.17	36.59	11.79	31.78	39.77	54.00	-14.23	Vertical
9920.00	23.02	38.81	14.38	31.88	44.33	54.00	-9.67	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	22.05	31.93	8.73	32.16	30.55	54.00	-23.45	Horizontal
7440.00	27.39	36.59	11.79	31.78	43.99	54.00	-10.01	Horizontal
9920.00	17.92	38.81	14.38	31.88	39.23	54.00	-14.77	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

^{1.} Final Level =Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

^{2. &}quot;*", means this data is the too weak instrument of signal is unable to test.



8 Test Setup Photo

Radiated Emission







Conducted Emission






9 EUT Constructional Details











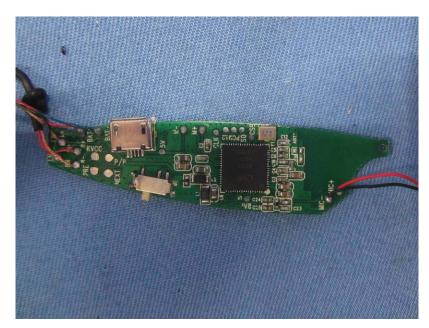




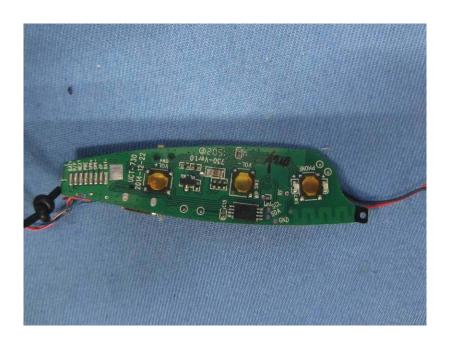

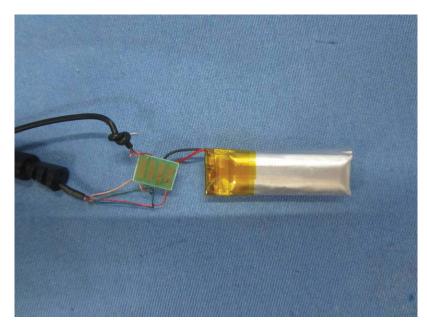



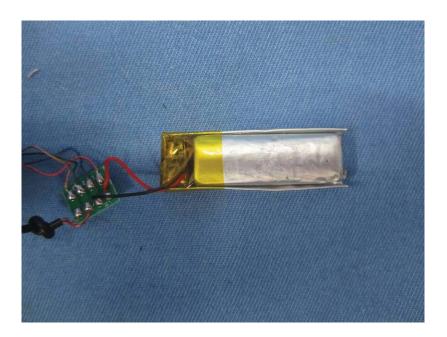

-----End-----