

# FCC TEST REPORT

**Test report  
On Behalf of  
Shenzhen YSX Eletronics Co., Ltd.  
For  
Camera  
Model No.: GA100B  
Series Models: GA100C, GD100G, GD200K, GE200H,  
GE200I, GF100J(C100)**

**FCC ID: 2AEY2-GA100B**

**Prepared for : Shenzhen YSX Eletronics Co., Ltd.  
Unit D, Donghaiwang Building, Yangmei Village, Bulong Rd., Bantian  
, Longgang Dist., Shenzhen, 518129, P.R. of China**

**Prepared By : WST Certification & Testing (HK) Limited  
12/F., San Toi Building, 137-139 Connaught Road Central, Hong  
Kong**

**Date of Test: May 27, 2015 ~ June 04, 2015  
Date of Report: June 04, 2015  
Report Number: WST1504145-E**

## TEST RESULT CERTIFICATION

**Applicant's name** ..... Shenzhen YSX Eletronics Co., Ltd.  
Address ..... Unit D, Donghaiwang Building, Yangmei Village, Bantian  
Longgang Dist., Shenzhen, 518129, P.R. of China

**Manufacturer's Name** ..... Shenzhen YSX Eletronics Co., Ltd.  
Address ..... Unit D, Donghaiwang Building, Yangmei Village, Bantian  
Longgang Dist., Shenzhen, 518129, P.R. of China

**Product description**

Trade Mark: /  
Product name ..... Camera  
Model and/or type  
reference ..... GA100B  
Series Models: GA100C, GD100G, GD200K, GE200H, GE200I, GF100J(C100)  
Model differences Just appearance is not the same as the color, the other no difference  
**Standards** ..... FCC Rules and Regulations Part 15 Subpart C Section 15.247  
ANSI C63.4: 2009

This publication may be reproduced in whole or in part for non-commercial purposes as long as the WST Certification & Testing (HK) Limited is acknowledged as copyright owner and source of the material. WST Certification & Testing (HK) Limited takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** .....

Date (s) of performance of tests ..... May 27, 2015 ~ June 04, 2015

Date of Issue ..... June 04, 2015

Test Result ..... **Pass**

Testing Engineer : Eric Xie

(Eric Xie)

Technical Manager : Dora Qin

(Dora Qin)

Authorized Signatory : Kait Chen

(Kait Chen)

Table of Contents	Page
1. . TEST SUMMARY	5
1.1. TEST FACILITY	6
1.2. MEASUREMENT UNCERTAINTY	6
2. . GENERAL INFORMATION	7
2.1. GENERAL DESCRIPTION OF EUT	7
2.2. Carrier Frequency of Channels	8
Operation of EUT during testing	8
2.3. DESCRIPTION OF TEST SETUP	8
OPERATION OF EUT DURING TESTING	8
2.4. MEASUREMENT INSTRUMENTS LIST	9
3. . 6DB BANDWIDTH MEASUREMENT	11
3.1. Block Diagram of Test Setup	11
4 Maximum Peak Output Power	17
4.2 Limits	17
2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.	17
4.3 Test Procedure	17
4.4 Test Result	18
5 Power Spectral Density Measurement	19
5.2 Limits	19
5.3 Test Procedure	19
5.4 Test Result	20
7 Band Edge Compliance Test	26
7.2 Limits	26
7.3 Test Procedure	26
7.4 Test Result	27
8 Radiated Spurious Emission Test	31
8.2 Limits	32
8.3 Restricted bands of operation	32
8.3 Test Procedure	33
8.4 Test Result	34
9 Conducted Spurious Emission Compliance Test	38
9.2 Limits	38
9.3 Test Procedure	38

<b>Table of Contents</b>	<b>Page</b>
9.4 Test Result	38
10 AC Power Line Conducted Emission For Part 15 Section 15.207(A)	42
10.2 Limits	42
10.3 Test Procedure	42
10.4 Test Result	42
11 Antenna Requirement	44
12 Photograph of Test	45

**1.. TEST SUMMARY**

FCC Rules	Description of Test	Result
Section 15.247(a)2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Tes	Compliant
Section 15.209)	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

## 1.1. TEST FACILITY

Test Firm : Shenzhen WST Testing Technology Co., Ltd.  
Certificated by FCC, Registration No.: 939433  
Address : 1F, No.9 Building, TGK Science & Technology Park, Yangtian Rd.,  
NO.72 Bao'an Dist., Shenzhen, Guangdong, China. 518101  
Tel : (86)755-33916437  
Fax : (86)755-27822175

## 1.2. MEASUREMENT UNCERTAINTY

### Measurement Uncertainty

Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2

## 2.. GENERAL INFORMATION

### 2.1. GENERAL DESCRIPTION OF EUT

Equipment	Camera
Model Name	GA100B
Series Models:	GA100C, GD100G, GD200K, GE200H, GE200I, GF100J(C100)
Model differences	Just appearance is not the same as the color, the other no difference
Serial No	/
FCC ID	2AEY2-GA100B
Modulation Type	BPSK/QPSK/16-QAM/64-QAM
Antenna Type	Internal Antenna
WLAN Operation frequency	2412-2462MHz
Number of Channels	11
Data Rate	802.11b: 11, 5.5, 2, 1 Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps 802.11n: up to 150Mbps
Modulation Type	CCK, OFDM
Power Source	AC Voltage
Power Rating	Input 100-240V, 50/60Hz, 0.15A Output DC 5V, 1A
Adapter Model	/

## 2.2. Carrier Frequency of Channels

**802.11b, 802.11g, 802.11n**

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	--	---

Operation of EUT during testing

Operating Mode

The mode is used: **802.11b Transmitting mode**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

**802.11g Transmitting mode**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

**802.11n Transmitting mode**


Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

## 2.3. DESCRIPTION OF TEST SETUP

### OPERATION OF EUT DURING TESTING

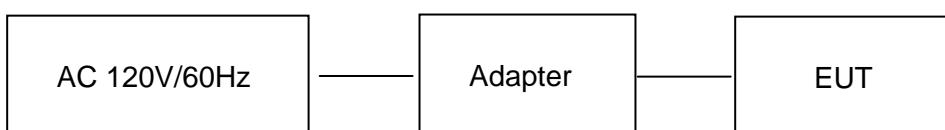


## 2.4. MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2015	1 Year
2.	LISN	SchwarzBeck	NSLK 8126	8126377	May 19, 2015	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2015	1 Year
4.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
5.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2015	1 Year
6.	Trilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 17, 2015	1 Year
7.	Pre-amplifier	Compliance Direction	PAP-0203	22008	May 19, 2015	1 Year
8.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
9.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2015	1 Year
10.	LISN	SchwarzBeck	NSLK 8126	8126377	May 19, 2015	1 Year
11.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2015	1 Year
12.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
13.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2015	1 Year
14.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2015	1 Year
15.	LISN	SchwarzBeck	NSLK 8126	8126377	May 19, 2015	1 Year
16.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2015	1 Year
17.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
18.	Programmable AC Power source	SOPH POWER	PAG-1050	630250	May 26, 2015	1 Year
19.	Harmonic and Flicker Analyzer	LAPLACE	AC2000A	272629	May 26, 2015	1 Year
20.	Harmonic and Flicker Test Software AC 2000A	LAPLACE	N/A	N/A	N/A	N/A
21.	ESD Simulators	KIKUSUI	KES4021	LJ003477	May 25, 2015	1 Year
22.	EFT Generator	EMPEK	EFT-4040B	0430928N	May 19, 2015	1 Year
23.	Shielding Room	ChangZhou ZhongYu	JB88	SEL0166	May 19, 2015	1 Year
24.	Signal Generator 9KHz~2.2GHz	R&S	SML02	SEL0143	May 19, 2015	1 Year
25.	Signal Generator 9KHz~1.1GHz	R&S	SML01	SEL0135	May 19, 2015	1 Year
26.	Power Meter	R&S	NRVS	SEL0144	May 19, 2015	1 Year
27.	RF Level Meter		URV35	SEL0137	May 19, 2015	1 Year
28.	Audio Analyzer	R&S	UPL	SEL0136	May 19, 2015	1 Year

29.	RF-Amplifier 150KHz~150MHz	BONN Elektronik	BSA1515-25	SEL0157	May 19, 2015	1 Year
30.	Stripline Test Cell	Erika Fiedler	VDE0872	SEL0167	N/A	N/A
31.	TV Test Transmitter	R&S	SFM	SEL0159	May 17, 2015	1 Year
32.	TV Generator PAL	R&S	SGPF	SEL0138	May 19, 2015	1 Year
33.	TV Generator Ntsc	R&S	SGMF	SEL0140	May 19, 2015	1 Year
34.	TV Generator Secam	R&S	SGSF	SEL0139	May 19, 2015	1 Year
35.	TV Test Transmitter 0.3MHz~3300MHz	R&S	SFQ	SEL0142	May 19, 2015	1 Year
36.	MPEG2 Measurement Generator	R&S	DVG	SEL0141	May 19, 2015	1 Year
37.	Spectrum Analyzer	R&S	FSP	SEL0177	May 19, 2015	1 Year
38.	Matching	R&S	RAM	SEL0146	N/A	N/A
39.	Matching	R&S	RAM	SEL0148	N/A	N/A
40.	Absorbing Clamp	R&S	MDS21	SEL0158	May 17, 2015	1 Year
41.	Coupling Set	Erika Fiedler	Rco, Rci, MC, AC, LC	SEL0149	N/A	N/A
42.	Filters	Erika Fiedler	Sr, LBS	SEL0150	N/A	N/A
43.	Matching Network	Erika Fiedler	MN, T1	SEL0151	N/A	N/A
44.	Fully Anechoic Room	ChangZhou ZhongYu	854	SEL0169	Jun. 10, 2014	1 Year
45.	Signal Generator	R&S	SML03	SEL0068	May 17, 2015	1 Year
46.	RF-Amplifier 30M~1GHz	Amplifier Reasearch	250W1000A	SEL0066	Oct. 24, 2014	1 Year
47.	RF-Amplifier 0.8~3.0GHz	Amplifier Reasearch	60S1G3	SEL0065	Oct. 24, 2014	1 Year
48.	Power Meter	R&S	NRVD	SEL0069	May 17, 2015	1 Year
49.	Power Sensor	R&S	URV5-Z2	SEL0071	May 17, 2015	1 Year
50.	Power Sensor	R&S	URV5-Z2	SEL0072	May 17, 2015	1 Year
51.	Software EMC32	R&S	EMC32-S	SEL0082	N/A	N/A
52.	Log-periodic Antenna	Amplifier Reasearch	AT1080	SEL0073	N/A	N/A
53.	Antenna Tripod	Amplifier Reasearch	TP1000A	SEL0074	N/A	N/A
54.	High Gain Horn Antenna(0.8-5G Hz)	Amplifier Reasearch	AT4002A	SEL0075	N/A	N/A

### 3.. 6DB BANDWIDTH MEASUREMENT

#### 3.1. Block Diagram of Test Setup



#### 3.2. Limits

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz

#### 3.3. Test Procedure

- 3.3.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.
- 3.3.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz
- 3.3.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

#### 3.4. Test Result

802.11b			
Channel	Frequency (MHz)	6DB Bandwidth(MHz)	Limit(MHz)
Low	2412	10.089	>0.5MHz
Middle	2437	10.057	>0.5MHz
High	2462	10.074	>0.5MHz


802.11g			
Channel	Frequency (MHz)	6DB Bandwidth(MHz)	Limit(MHz)
Low	2412	16.313	>0.5MHz
Middle	2437	16.337	>0.5MHz
High	2462	16.375	>0.5MHz

802.11n


Channel	Frequency (MHz)	6DB Bandwidth(MHz)	Limit(MHz)
Low	2412	17.349	>0.5MHz
Middle	2437	17.340	>0.5MHz
High	2462	17.570	>0.5MHz

The spectrum analyzer plots are attached as below.


802.11b Channel Low 2412MHz

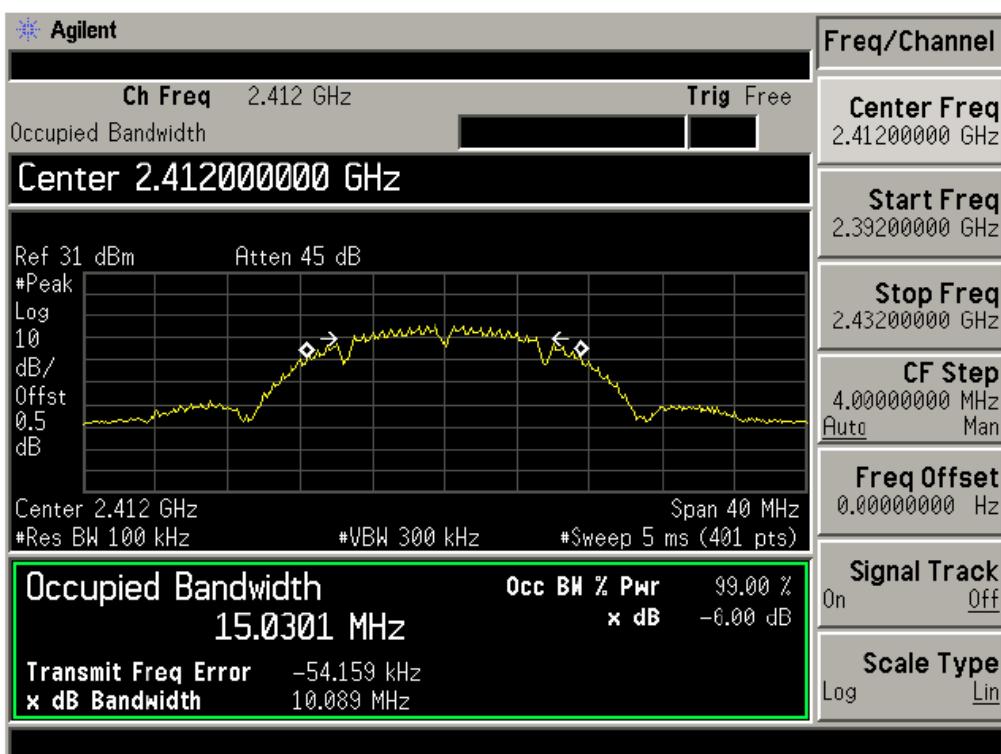


## 802.11b Channel Middle 2437MHz

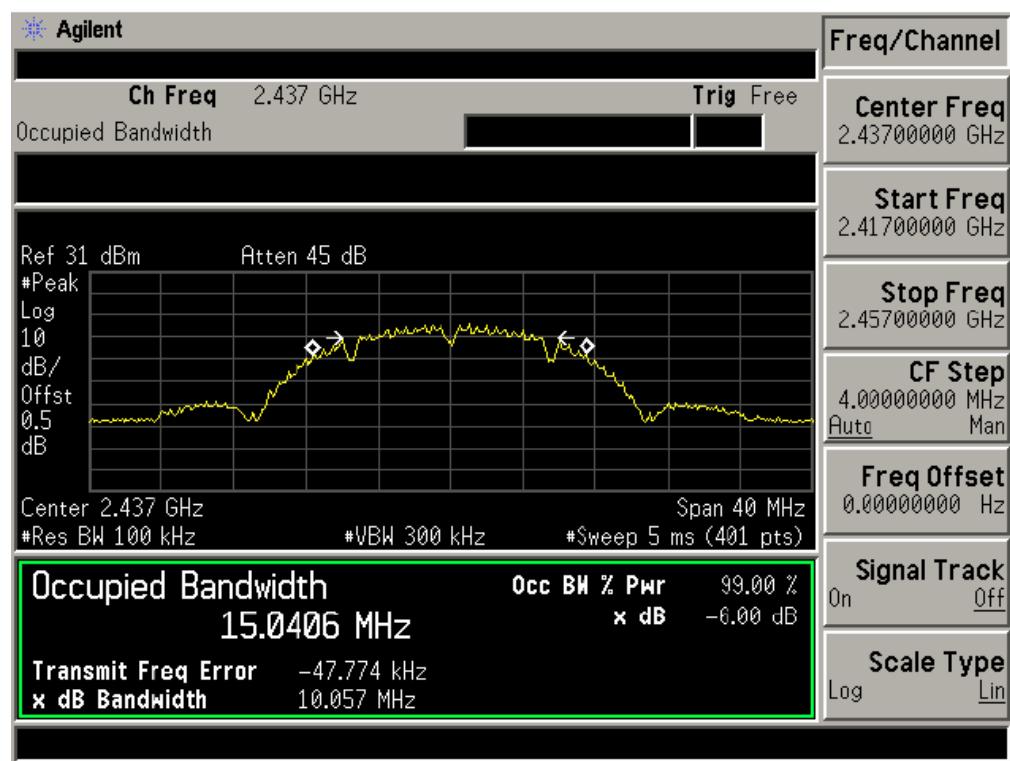


## 802.11b Channel High 2462MHz

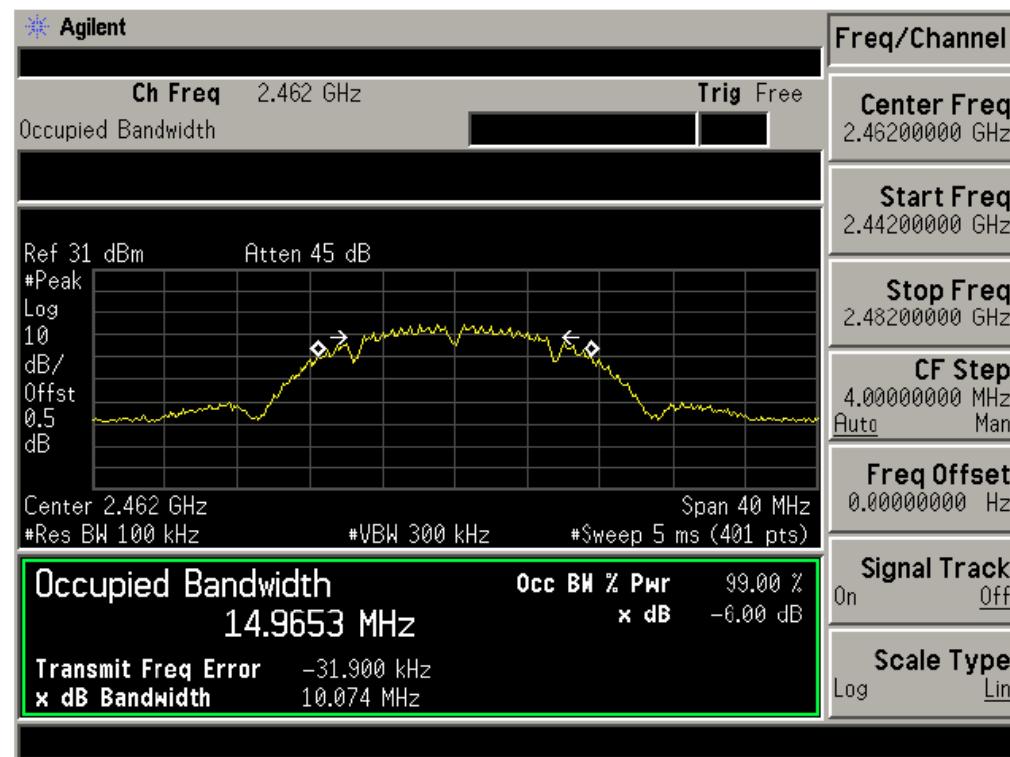


## 802.11g Channel Low 2412MHz

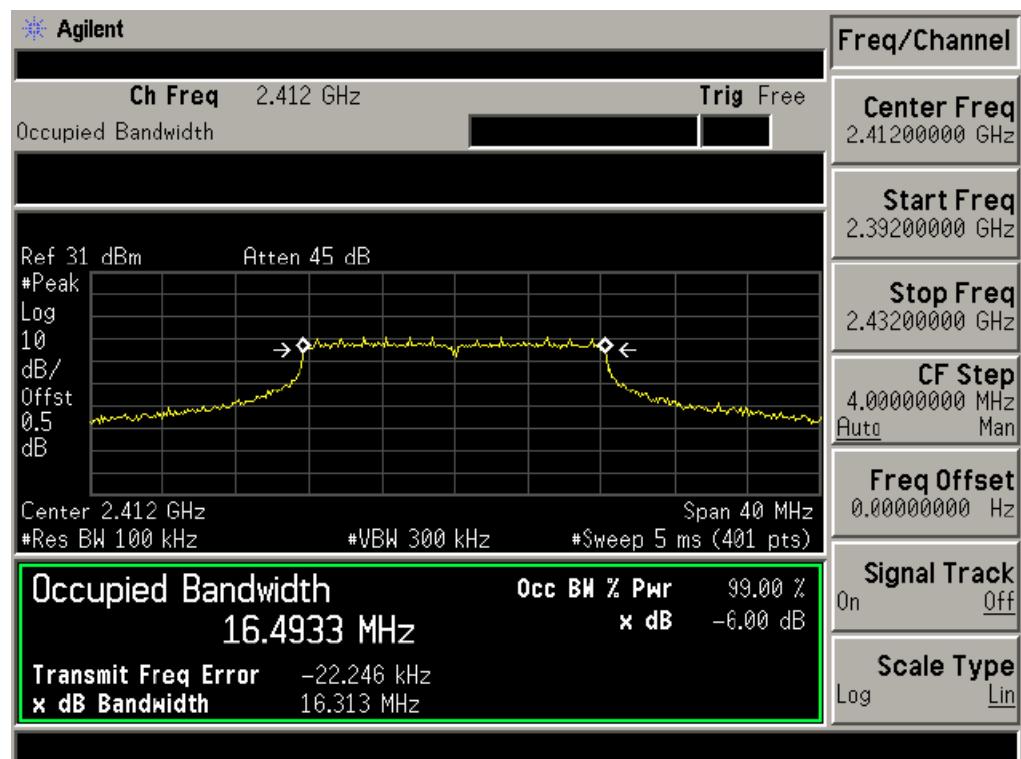


## 802.11g Channel Middle 2437MHz

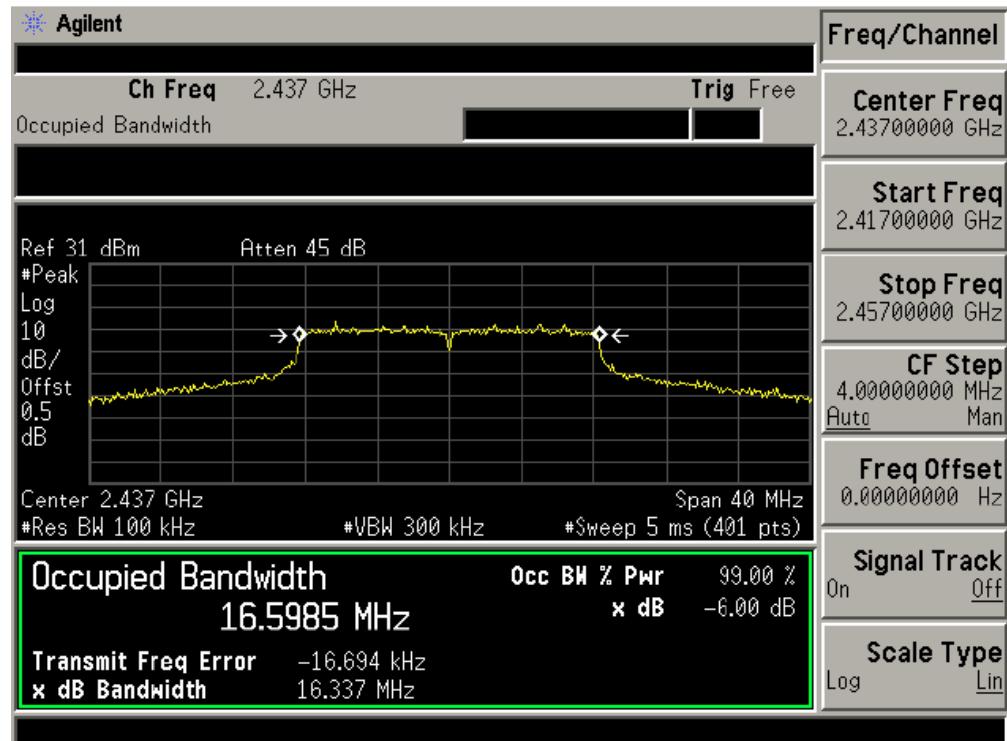


## 802.11g Channel High 2462MHz

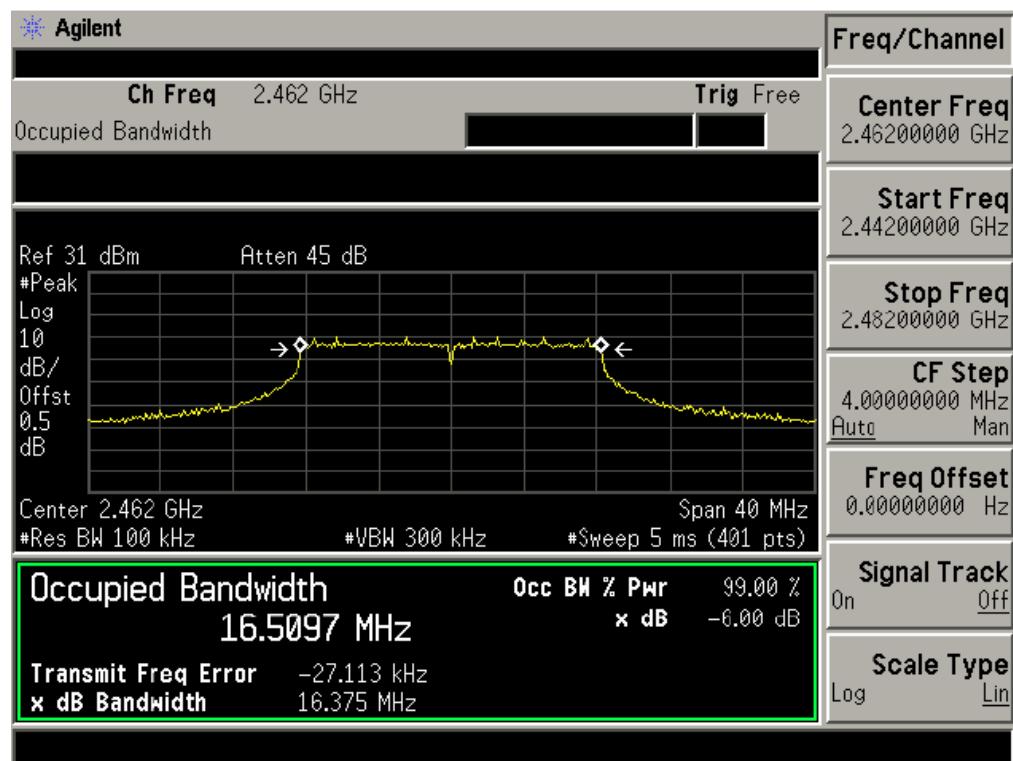


## 802.11n Channel Low 2412MHz

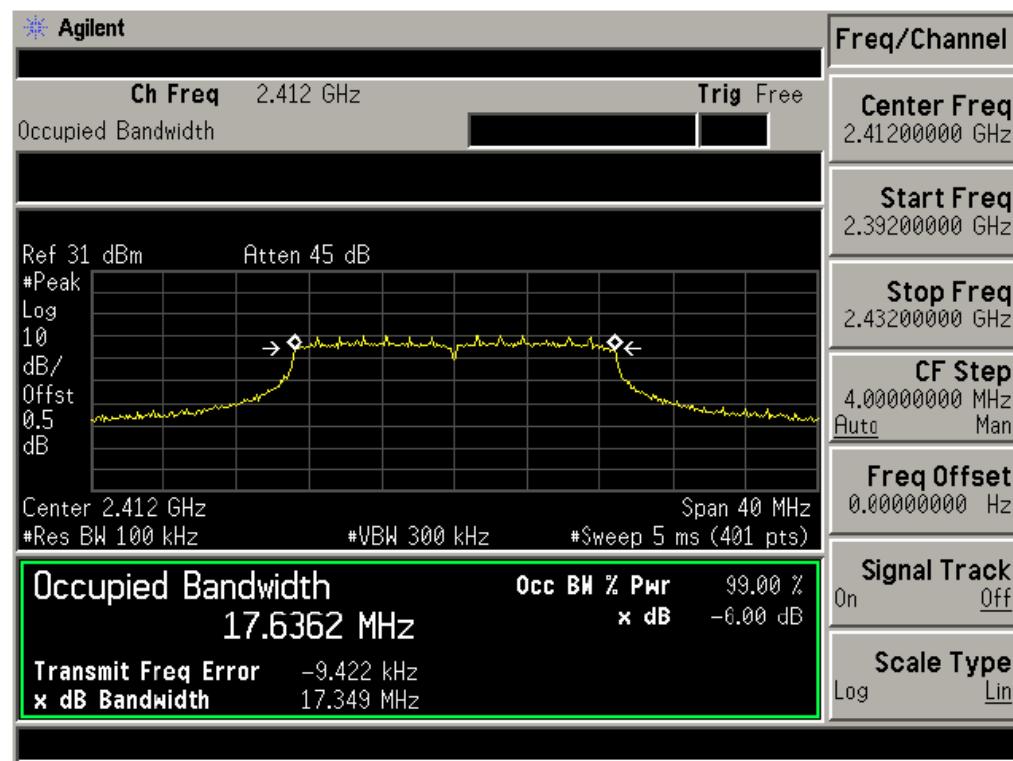

## 802.11n Channel Middle 2437MHz

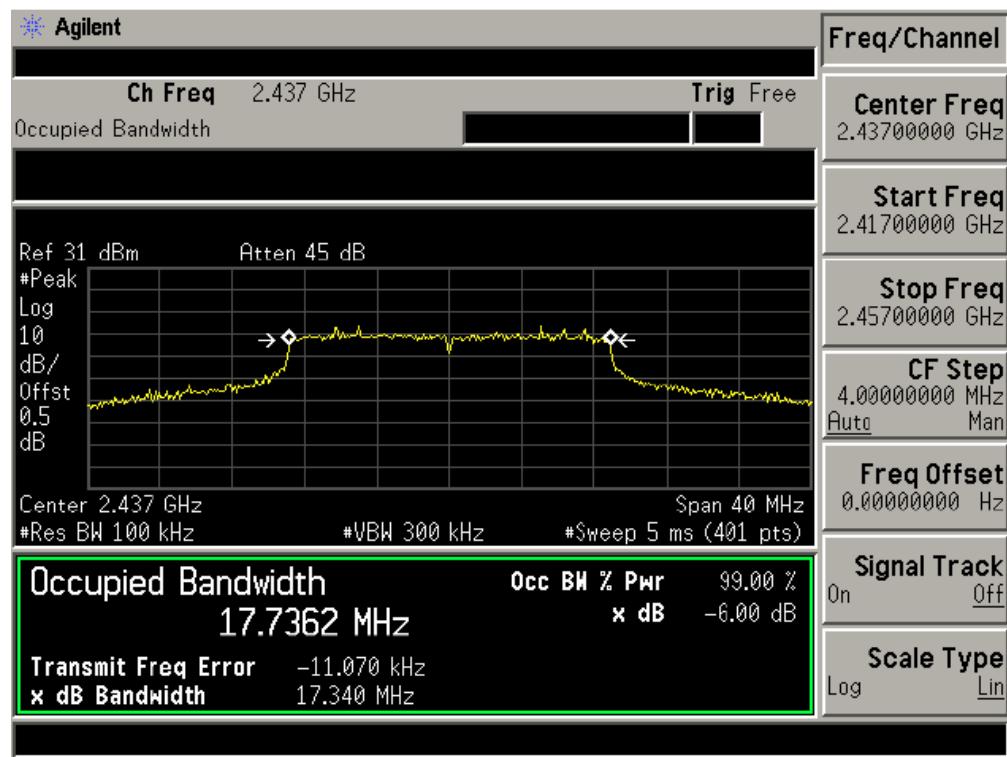


## 802.11n Channel High 2462MHz

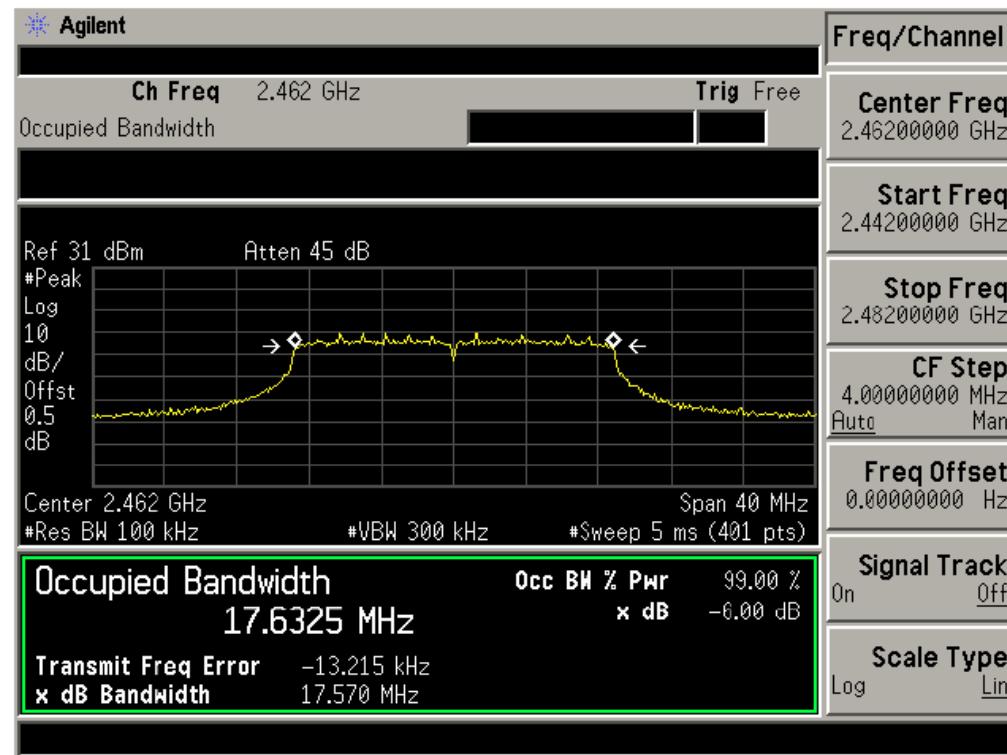

## 4 Maximum Peak Output Power

### 4.1 Block Diagram of Test Setup



### 4.2 Limits

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

### 4.3 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer through a low loss cable.
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz
- c. Measurement the maximum peak output power.

**4.4 Test Result****PASS****802.11b**

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Peak output power (dBm)</b>	<b>Limit (dBm)</b>
Low	2412	19.42	30
Middle	2437	19.42	30
High	2462	18.30	30

**802.11g**


<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Peak output power (dBm)</b>	<b>Limit (dBm)</b>
Low	2412	18.43	30
Middle	2437	18.41	30
High	2462	17.48	30

**802.11n (20MHz)**

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Peak output power (dBm)</b>	<b>Limit (dBm)</b>
Low	2412	17.26	30
Middle	2437	18.41	30
High	2462	16.70	30

## 5 Power Spectral Density Measurement

### 5.1 Block Diagram of Test Setup



### 5.2 Limits

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.3 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer through a low loss cable.
- b. Set RBW of spectrum analyzer to 3kHz and VBW to 10kHz, sweep time =Span/30kHz
- c. Measurement the maximum power spectral density.

## 5.4 Test Result

**PASS**


802.11b			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm)
Low	2412	-6.252	8
Middle	2437	-9.158	8
High	2462	-8.799	8

802.11g			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm)
Low	2412	-11.09	8
Middle	2437	-10.30	8
High	2462	-12.26	8


802.11n			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm)
Low	2412	-13.10	8
Middle	2437	-10.54	8
High	2462	-13.70	8

The spectrum analyzer plots are attached as below.


#### 802.11b Channel Low 2412MHz

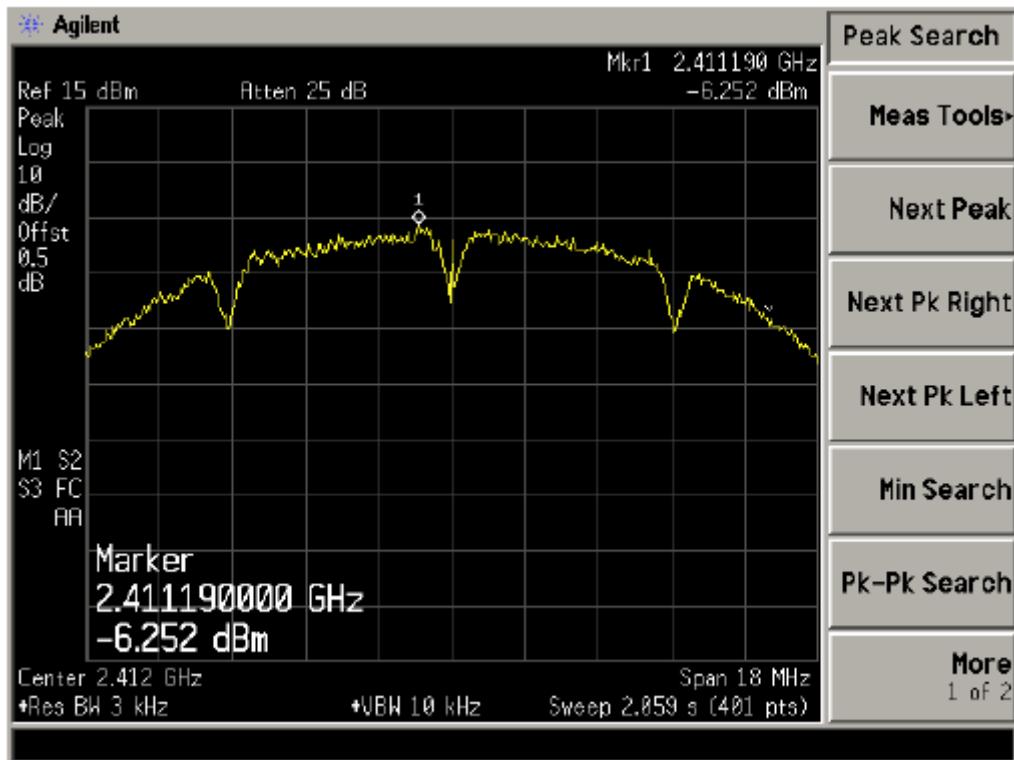


#### 802.11b Channel Middle 2437MHz

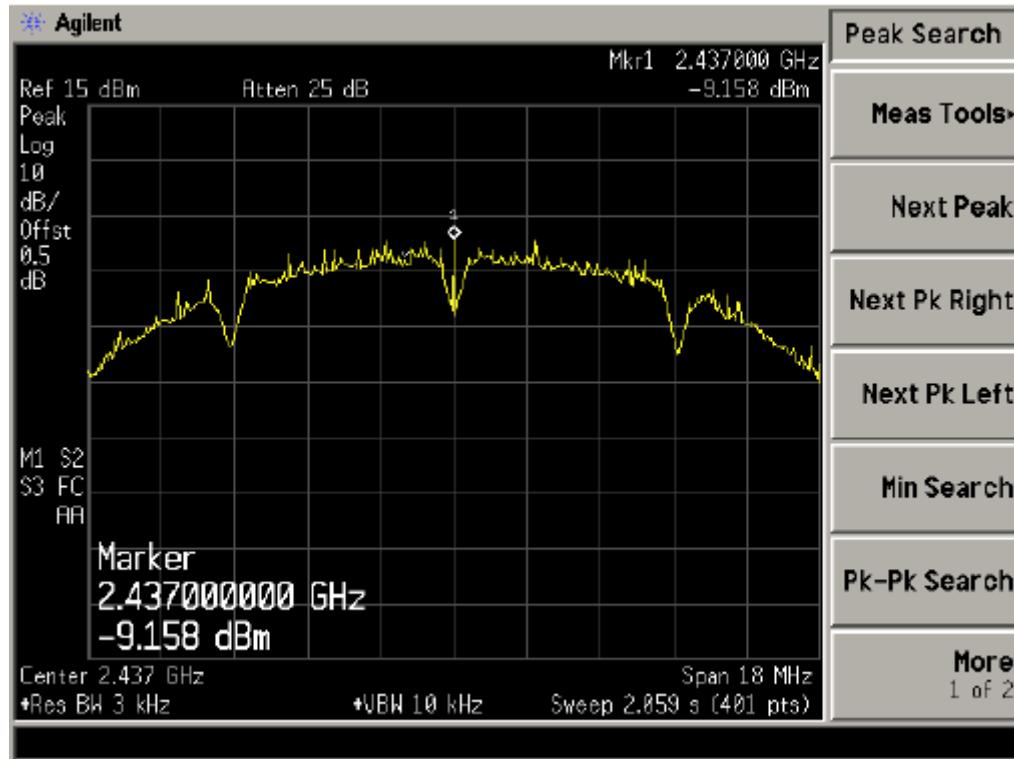


## 802.11b Channel High 2462MHz

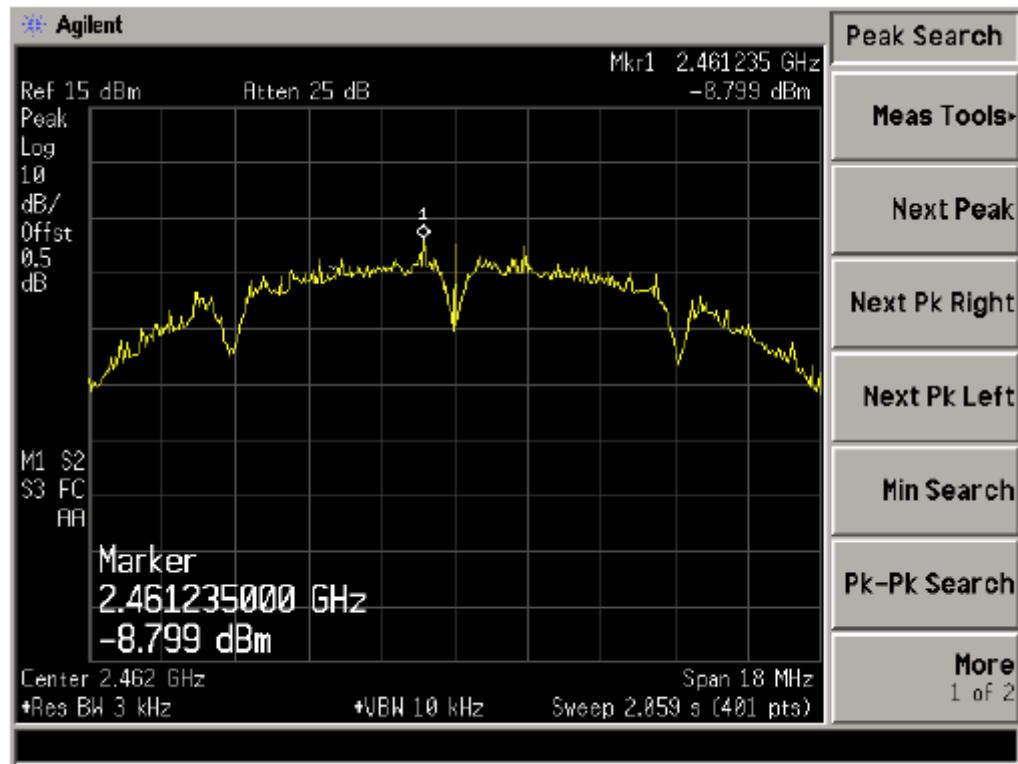


## 802.11g Channel Low 2412MHz

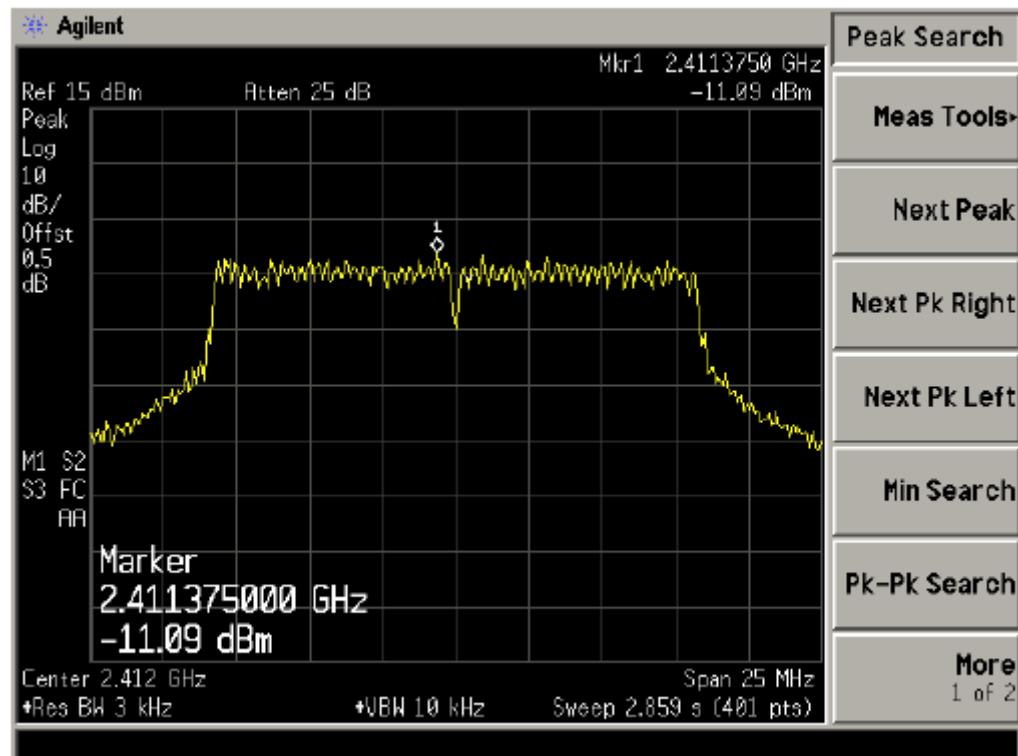


## 802.11g Channel Middle 2437MHz

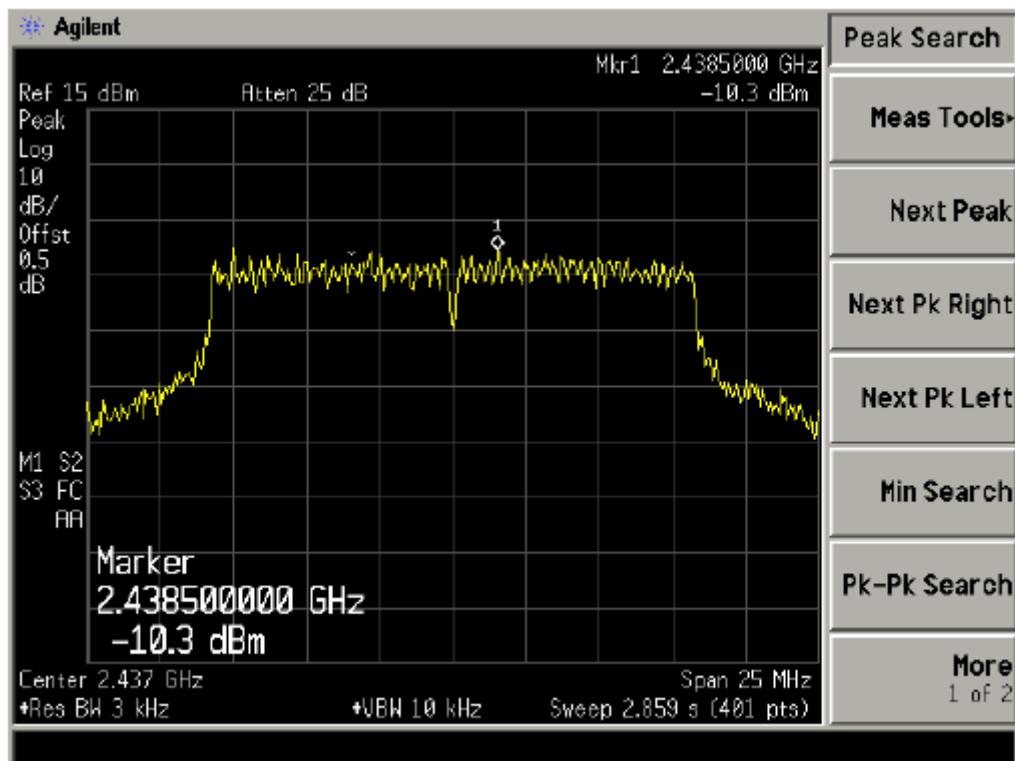


## 802.11g Channel High 2462MHz

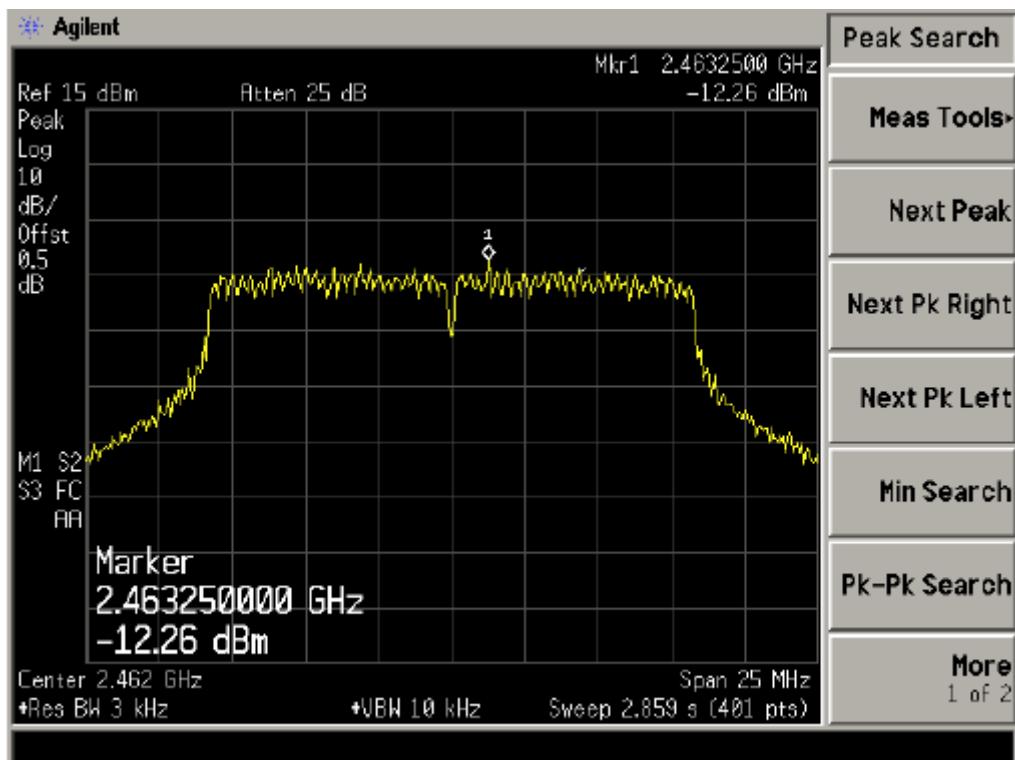


## 802.11n Channel High 2412MHz

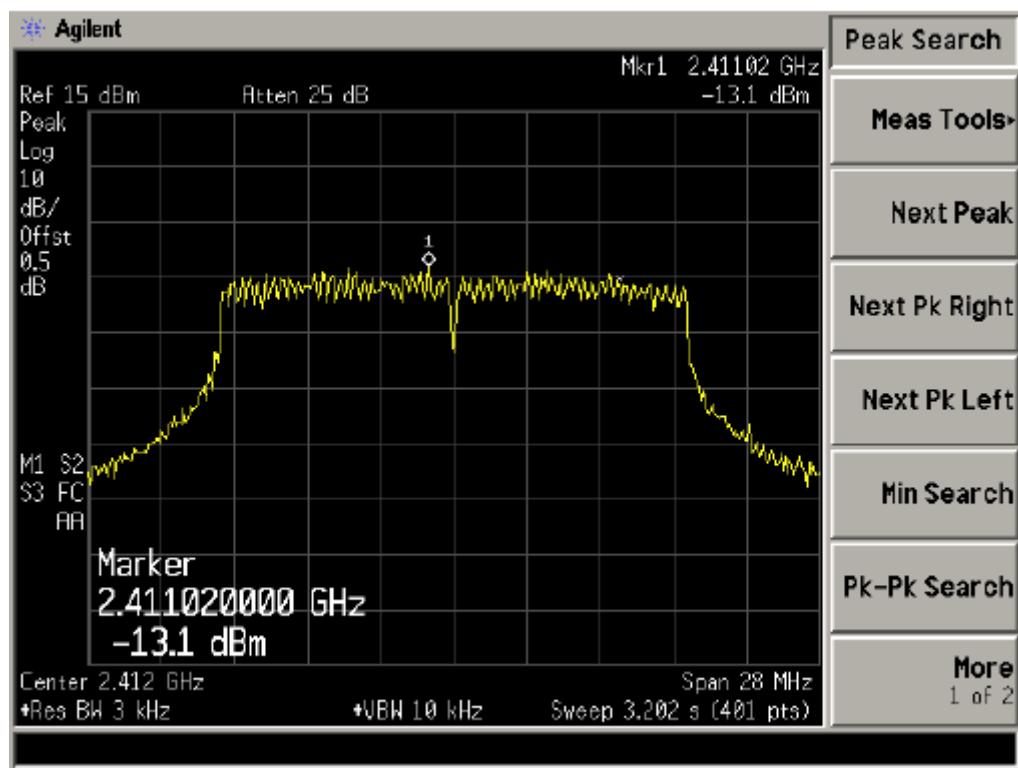

## 802.11n Channel High 2437MHz

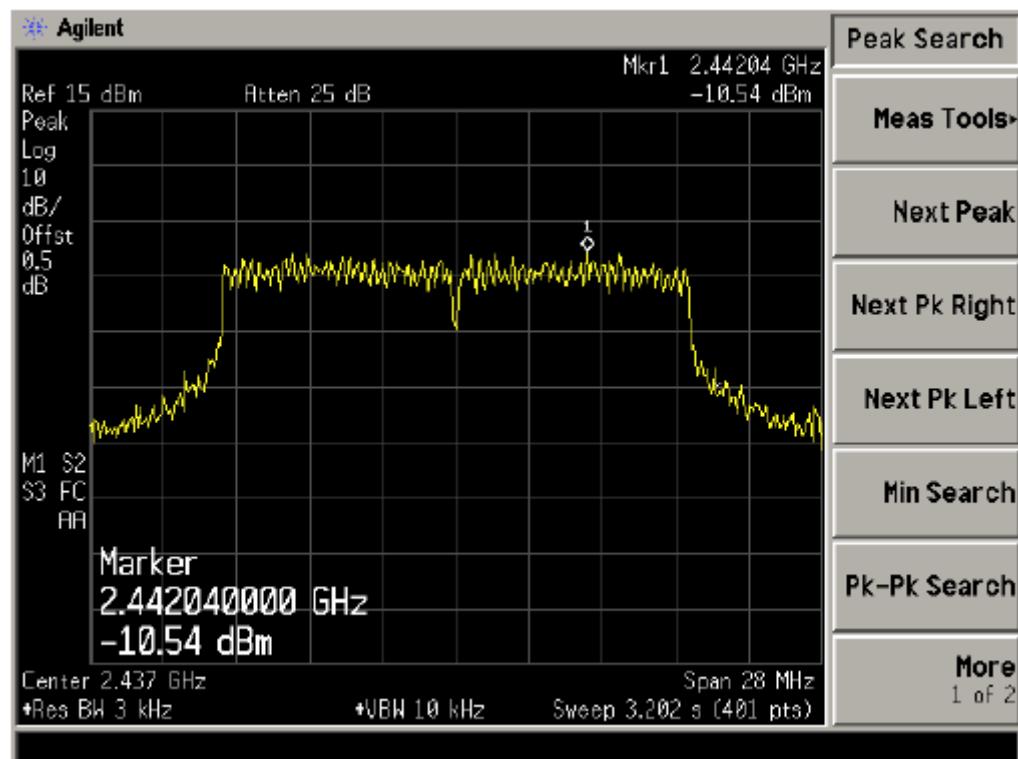


802.11n Channel High 2462MHz

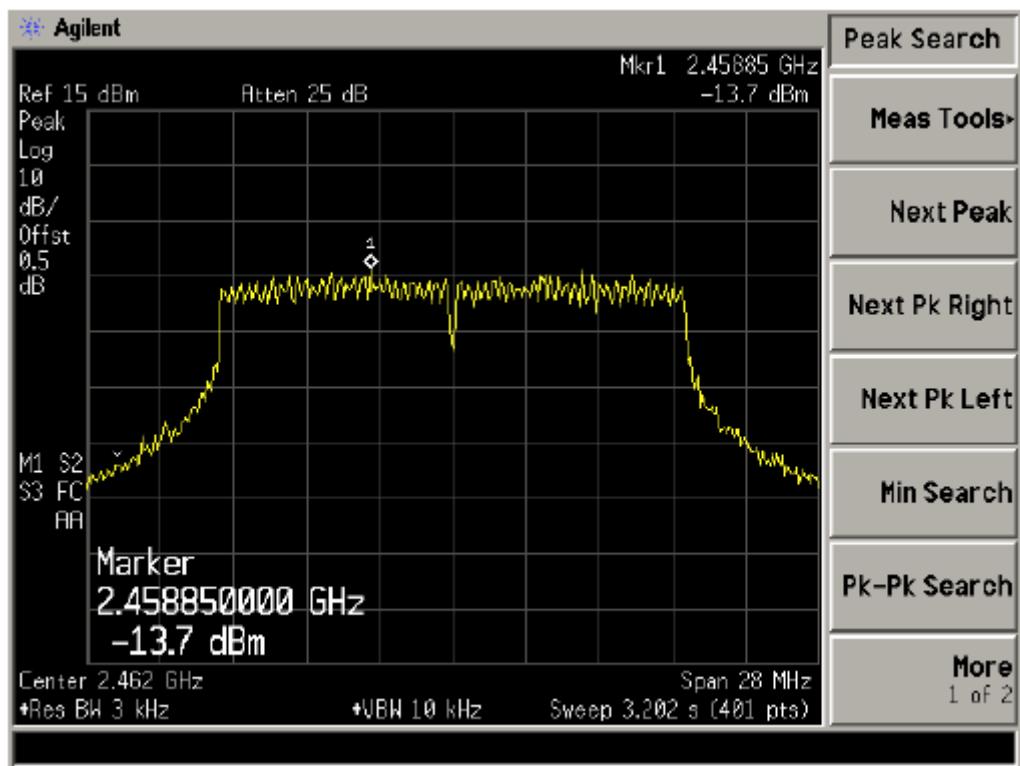

## 7 Band Edge Compliance Test

### 7.1 Block Diagram of Test Setup



### 7.2 Limits

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 7.3 Test Procedure

#### Conducted Band Edge:

- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.

#### Radiate Band Edge:

- The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
- The turntable was rotated for 360 degrees to determine the position of maximum emission level.
- EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: RBW=1MHz, VBW=1MHz
- The band edges was measured and recorded.


## 7.4 Test Result

**PASS**

All modes 2.4G 802.11b/g/n have been tested, and the worst 802.11b recorded as below


802.11b Channel Low 2412MHz

Antenna polarity: Hor.

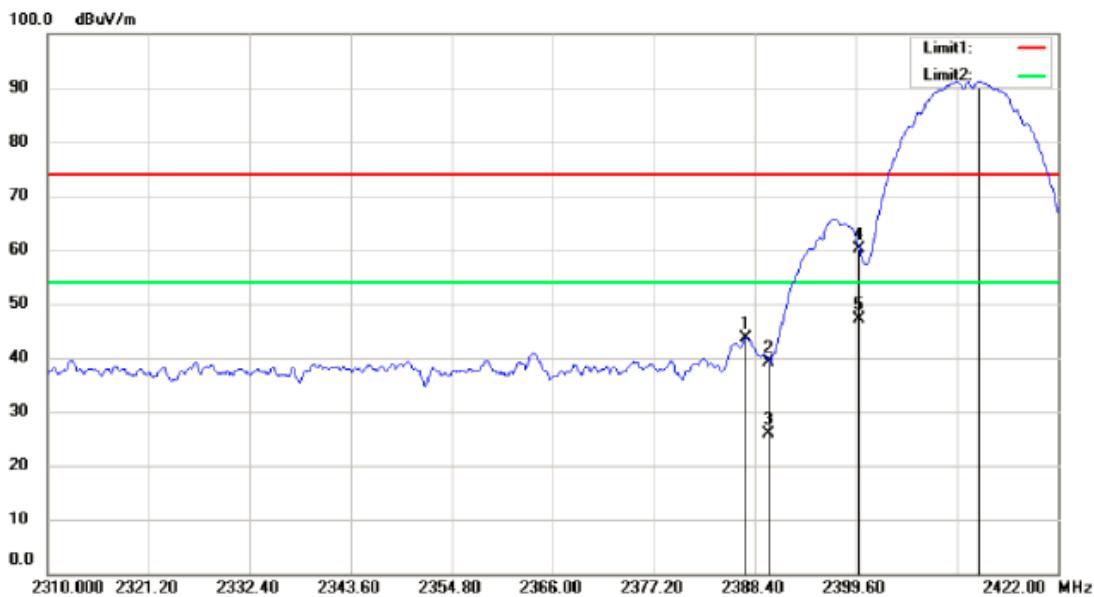


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment				Height	Degree	
		MHz	dBuV	dB		dBuV/m	dBuV/m	PK/AV	cm	degree	Comment
1		2387.392	66.83	-23.12	43.71	74.00	-30.29	peak			
2		2390.000	62.25	-23.11	39.14	74.00	-34.86	peak			
3		2390.000	49.01	-23.11	25.90	54.00	-28.10	AVG			
4		2400.000	83.09	-23.06	60.03	74.00	-13.97	peak			
5		2400.000	70.22	-23.06	47.16	54.00	-6.84	AVG			
6	*	2413.264	114.18	-22.98	91.20	74.00	17.20	peak			

Antenna polarity: Ver.

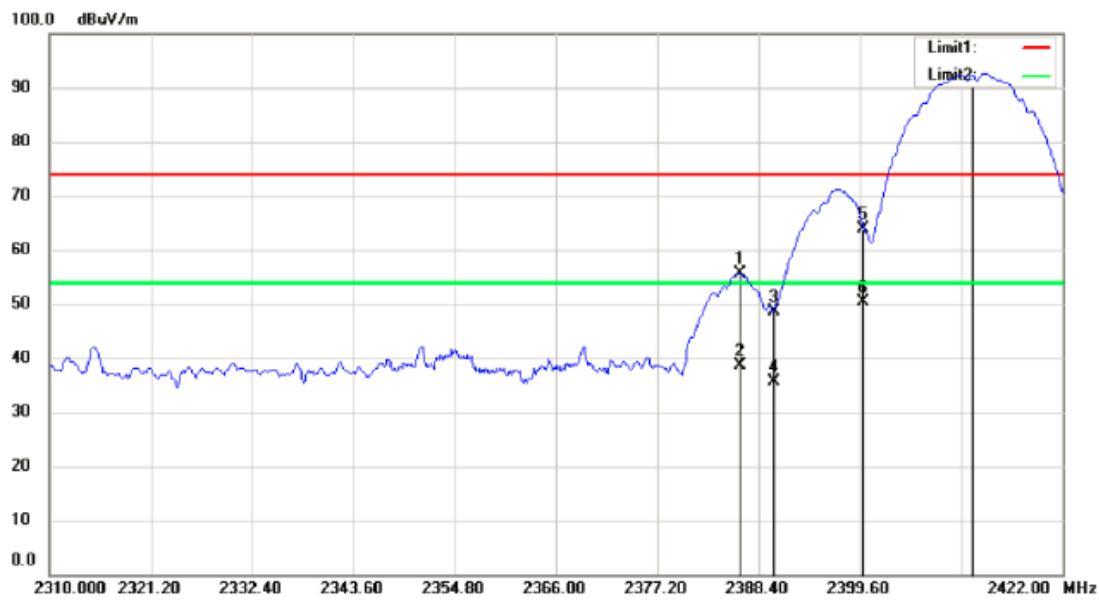


No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Antenna Height cm	Table Degree	Comment
			Level dBuV	Factor dB	ment dBuV/m					
1		2386.384	78.81	-23.13	55.68	74.00	-18.32	peak		
2		2386.384	61.83	-23.13	38.70	54.00	-15.30	AVG		
3		2390.000	71.63	-23.11	48.52	74.00	-25.48	peak		
4		2390.000	58.71	-23.11	35.60	54.00	-18.40	AVG		
5		2400.000	87.05	-23.06	63.99	74.00	-10.01	peak		
6		2400.000	73.34	-23.06	50.28	54.00	-3.72	AVG		
7	*	2412.000	115.36	-22.99	92.37	74.00	18.37	peak		

802.11b Channel High 2462MHz  
Antenna polarity: Hor.

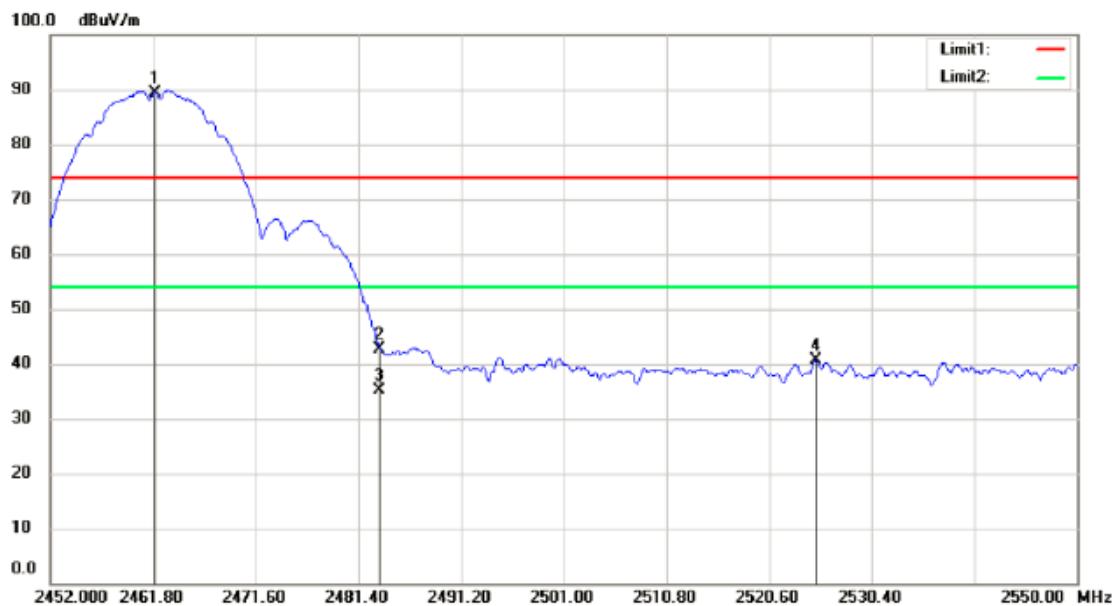

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/AV	cm	degree	Comment
1	*	2462.000	112.12	-22.73	89.39	74.00	15.39	peak			
2		2483.500	65.28	-22.62	42.66	74.00	-31.34	peak			
3		2483.500	57.72	-22.62	35.10	54.00	-18.90	AVG			
4		2525.108	63.05	-22.44	40.61	74.00	-33.39	peak			

Antenna polarity: Ver.

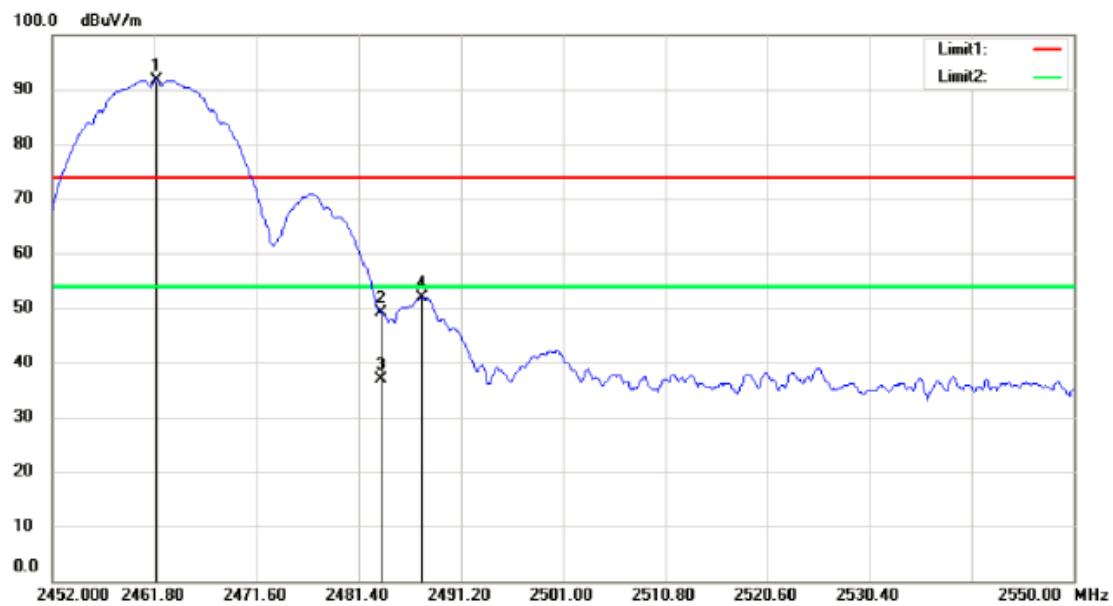


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/AV	cm	degree	Comment
1	*	2462.000	114.39	-22.73	91.66	74.00	17.66	peak			
2		2483.500	71.79	-22.62	49.17	74.00	-24.83	peak			
3		2483.500	59.52	-22.62	36.90	54.00	-17.10	AVG			
4		2487.476	74.54	-22.59	51.95	74.00	-22.05	peak			


## 8 Radiated Spurious Emission Test

### 8.1 Block Diagram of Test Setup


#### (1) Radiated Emission Test-Up Frequency Below 30MHz

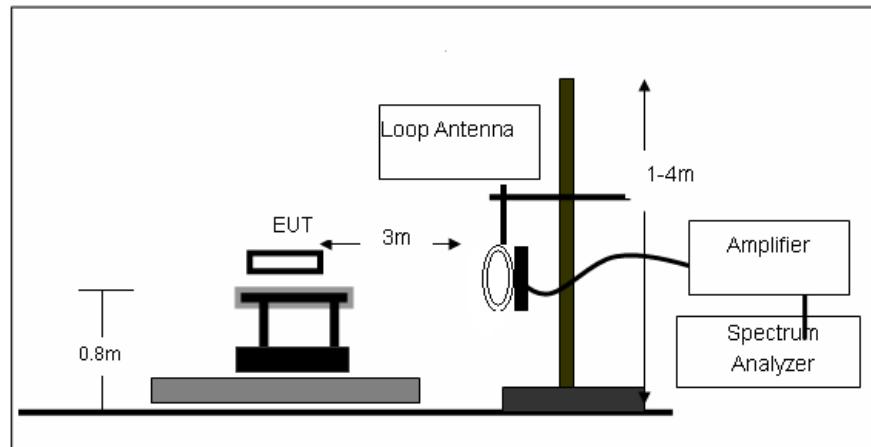

#### (2) Radiated Emission Test-Up Frequency 30MHz~1GHz

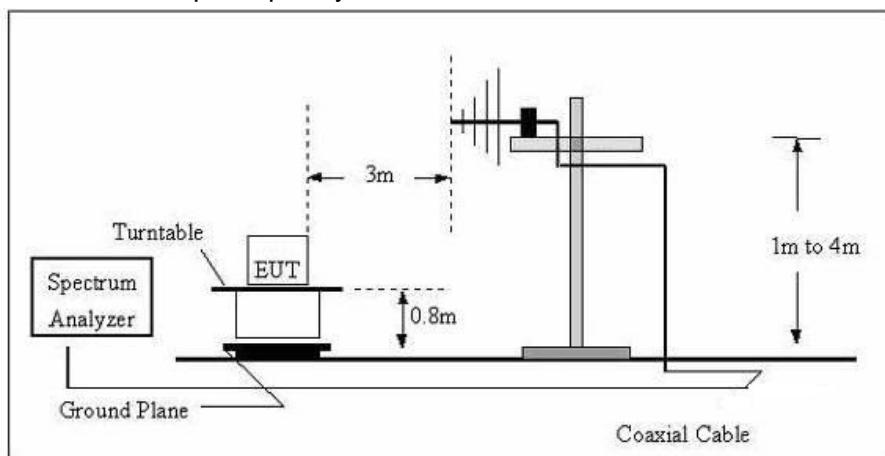

#### (3) Radiated Emission Test-Up Frequency Above 1GHz

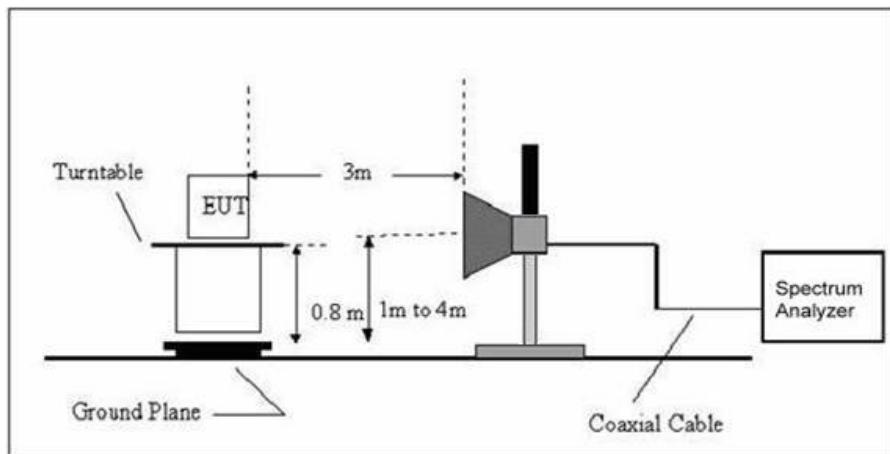

## 8.2 Limits

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

## 8.3 Restricted bands of operation

### 9.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	<sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510

<sup>2</sup>Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 8.3 Test Procedure

a. The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground.

The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The worst-case data rate for this channel to be 1Mbps for 802.11b mode and 6Mbps for 802.11g mode and 300Mbps for 802.11n mode, based on previous with 802.11 WLAN product design architectures.

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9kHz to 25GHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

## 8.4 Test Result

**PASS**

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded as below:

802.11b Channel Low 2412MHz  
For Below 30MHz

Freq.(MHz)	Reading (dBuV/m) (QP)	Factor(dB) Corr.	Result (dBuV/m)	Limit (dBuV/m)	Margin(dB)
/	/	/	/	/	/

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/ \text{test distance})(\text{ dB})$ ;  
Limit line=Specific limits(dBuV) + distance extrapolation factor.

For 30MHz-1000MHz  
Antenna polarity: Ver.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		30.0000	48.08	-14.42	33.66	40.00	-6.34	QP
2	*	45.5200	47.18	-12.25	34.93	40.00	-5.07	QP
3		80.4400	50.90	-18.87	32.03	40.00	-7.97	QP
4		82.3800	51.17	-18.40	32.77	40.00	-7.23	QP
5	!	86.2600	51.83	-17.30	34.53	40.00	-5.47	QP
6	!	143.4900	55.13	-17.25	37.88	43.50	-5.62	QP

Antenna polarity: Hor.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	30.0000	49.52	-14.42	35.10	40.00	-4.90	QP
2		88.2000	51.90	-16.63	35.27	43.50	-8.23	QP
3		93.0500	50.12	-14.93	35.19	43.50	-8.31	QP
4		95.9600	49.32	-14.12	35.20	43.50	-8.30	QP
5		143.4900	54.10	-17.25	36.85	43.50	-6.65	QP
6		683.7800	38.51	-4.95	33.56	46.00	-12.44	QP

## For 1GHz-25GHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
3701.06	V	45.29	28.36	74.00	54.00	-28.71	-25.64
5201.86	V	47.62	32.02	74.00	54.00	-26.38	-21.98
7052.01	V	51.65	36.39	74.00	54.00	-22.35	-17.61
3676.25	H	46.97	31.21	74.00	54.00	-27.03	-22.79
5199.37	H	46.43	30.22	74.00	54.00	-27.57	-23.78
7378.91	H	51.14	34.63	74.00	54.00	-22.86	-19.37

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Note: (1) All Readings are Peak Value and AV.

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) Data of measurement within this frequency range shown “--” in the table above means The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 802.11b Channel Middle 2437MHz

## For Below 30MHz

Freq.(MHz)	Reading (dBuV/m) (QP)	Factor(dB) Corr.	Result (dBuV/m)	Limit (dBuV/m)	Margin(dB)
/	/	/	/	/	/

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/\text{test distance})(\text{dB})$ ;

Limit line=Specific limits(dBuV) + distance extrapolation factor.

## For 30MHz-1000MHz

Antenna polarity: Ver.

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over
			Level dBuV	Factor dB	ment dBuV/m		
1	*	30.0000	49.58	-14.42	35.16	40.00	-4.84
2		33.8800	46.90	-13.31	33.59	40.00	-6.41
3	!	45.5200	47.18	-12.25	34.93	40.00	-5.07
4		79.4700	51.85	-19.01	32.84	40.00	-7.16
5		86.2600	50.33	-17.30	33.03	40.00	-6.97
6	!	143.4900	55.63	-17.25	38.38	43.50	-5.12

Antenna polarity: Hor.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	30.0000	49.52	-14.42	35.10	40.00	-4.90	QP
2		88.2000	51.40	-16.63	34.77	43.50	-8.73	QP
3		93.0500	49.62	-14.93	34.69	43.50	-8.81	QP
4		95.9600	48.82	-14.12	34.70	43.50	-8.80	QP
5		143.4900	53.60	-17.25	36.35	43.50	-7.15	QP
6		683.7800	38.51	-4.95	33.56	46.00	-12.44	QP

For 1GHz-25GHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
3676.31	V	45.47	29.04	74.00	54.00	-28.53	-24.96
5962.33	V	47.76	31.95	74.00	54.00	-26.24	-22.05
7217.95	V	50.98	34.97	74.00	54.00	-23.02	-19.03
3703.55	H	45.48	29.13	74.00	54.00	-28.52	-24.87
5281.26	H	46.98	30.96	74.00	54.00	-27.02	-23.04
7378.99	H	52.94	36.60	74.00	54.00	-21.06	-17.40

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Note: (1) All Readings are Peak Value and AV.

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) Data of measurement within this frequency range shown “--” in the table above means The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

802.11b Channel Middle 2462MHz

For Below 30MHz

Freq.(MHz)	Reading (dBuV/m) (QP)	Factor(dB) Corr.	Result (dBuV/m)	Limit (dBuV/m)	Margin(dB)
/	/	/	/	/	/

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/\text{test distance})(\text{dB})$ ;

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For 30MHz-1000MHz  
Antenna polarity: Ver.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	!	30.0000	50.08	-14.42	35.66	40.00	-4.34	QP
2	!	33.8800	48.40	-13.31	35.09	40.00	-4.91	QP
3	!	45.5200	47.68	-12.25	35.43	40.00	-4.57	QP
4	*	77.5300	54.86	-19.11	35.75	40.00	-4.25	QP
5	!	82.3800	53.17	-18.40	34.77	40.00	-5.23	QP
6	!	86.2600	52.83	-17.30	35.53	40.00	-4.47	QP

Antenna polarity: Hor.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	*	30.0000	49.52	-14.42	35.10	40.00	-4.90	QP
2		88.2000	51.40	-16.63	34.77	43.50	-8.73	QP
3		93.0500	49.62	-14.93	34.69	43.50	-8.81	QP
4		95.9600	48.82	-14.12	34.70	43.50	-8.80	QP
5		143.4900	53.60	-17.25	36.35	43.50	-7.15	QP
6		683.7800	38.51	-4.95	33.56	46.00	-12.44	QP

For 1GHz-25GHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
3703.47	V	45.77	30.11	74.00	54.00	-28.23	-23.89
5226.69	V	46.83	30.88	74.00	54.00	-27.17	-23.12
6588.79	V	49.39	33.11	74.00	54.00	-24.61	-20.89
3701.03	H	45.77	30.25	74.00	54.00	-28.23	-23.75
5828.47	H	46.38	30.83	74.00	54.00	-27.62	-23.17
6616.11	H	49.26	33.16	74.00	54.00	-24.74	-20.84


All emissions not reported were more than 20dB below the specified limit or in the noise floor.  
Note: (1) All Readings are Peak Value and AV.

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) Data of measurement within this frequency range shown “--” in the table above means  
The reading of emissions are attenuated more than 20dB below the permissible limits or the field  
strength is too small to be measured.

## 9 Conducted Spurious Emission Compliance Test

### 9.1 Block Diagram of Test Setup



### 9.2 Limits

Se Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 9.3 Test Procedure


- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.
- The Conducted Spurious Emission was measured and recorded.

### 9.4 Test Result


**PASS**

All modes 2.4G 802.11b/g/n have been tested, and the worst 802.11b recorded as below

## TX 802.11b Channel Low 2412MHz

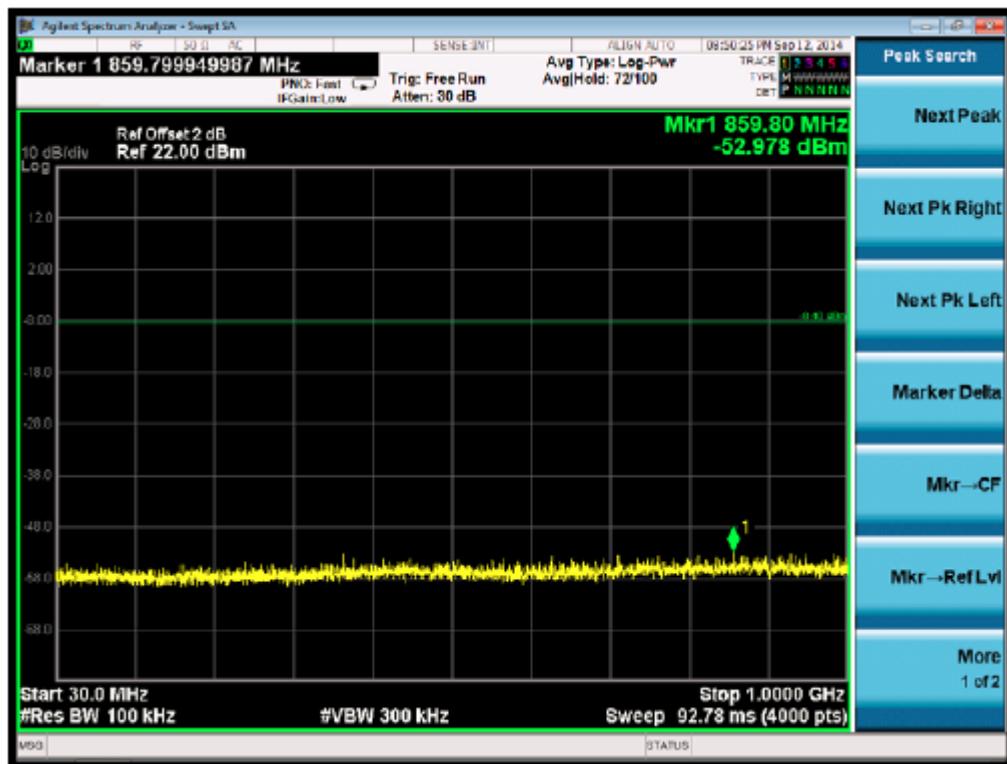

## TX 802.11b Channel Middle 2437MHz

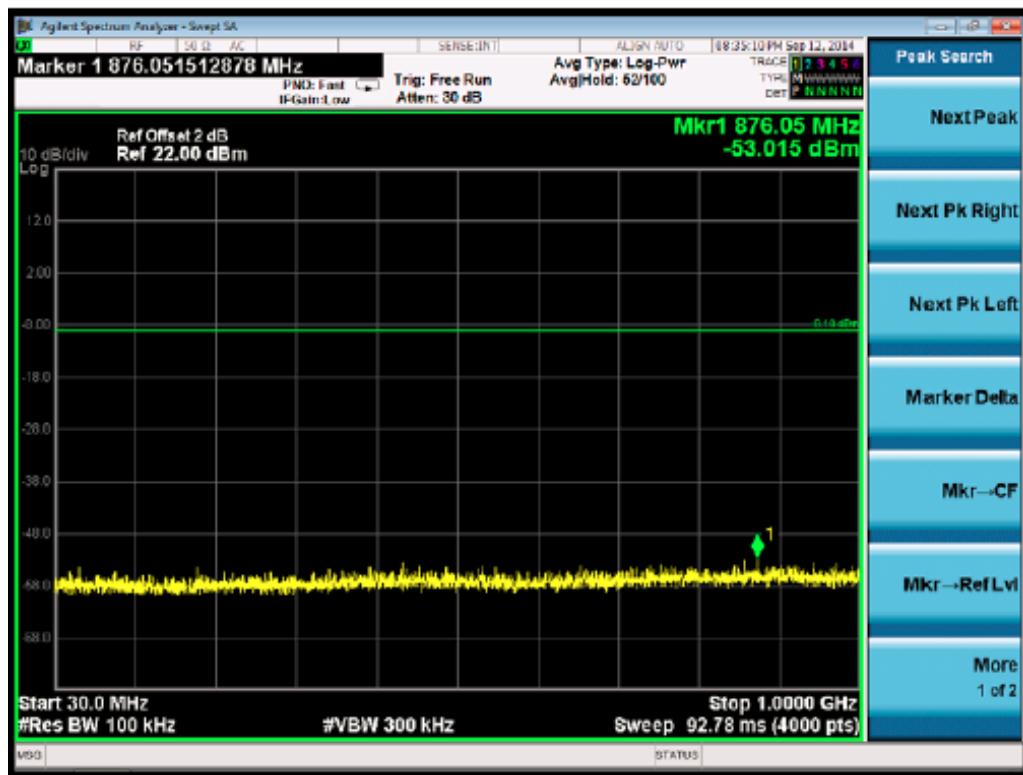


## TX 802.11b Channel High 2462MHz



## 10 AC Power Line Conducted Emission For Part 15 Section 15.207(A)

### 10.1 Block Diagram of Test Setup

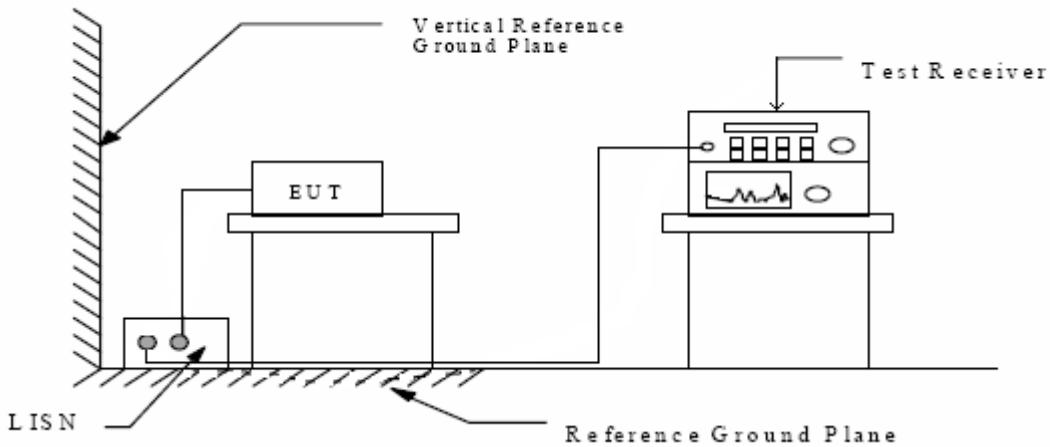

### 10.2 Limits

Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency MHz	Limits (dB $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

\* Decreases with the logarithm of the frequency.

### 10.3 Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Measurement.


The bandwidth of test receiver (R & S ESPI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 10.4 Test Result


**PASS**

N

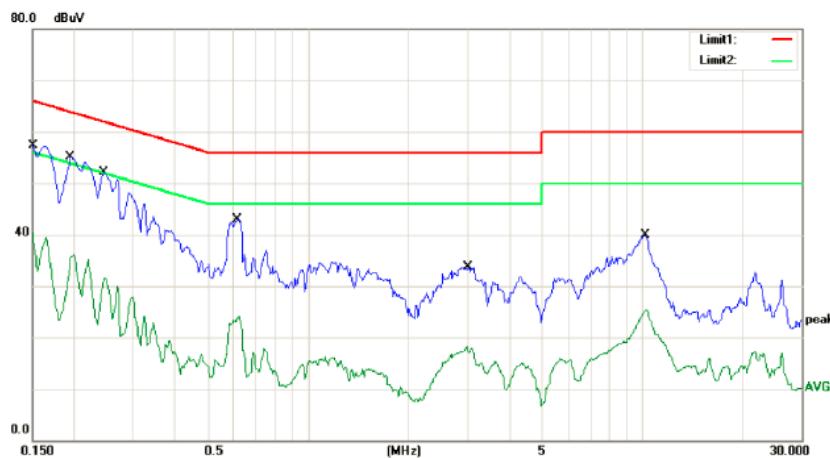

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1500	57.40	0.00	57.40	66.00	-8.60	QP	
2		0.1500	40.38	0.00	40.38	56.00	-15.62	AVG	
3		0.1950	55.05	0.00	55.05	63.82	-8.77	QP	
4		0.1950	36.14	0.00	36.14	53.82	-17.68	AVG	
5		0.2450	52.19	0.00	52.19	61.92	-9.73	QP	
6		0.2450	31.57	0.00	31.57	51.92	-20.35	AVG	
7		0.6150	42.96	0.00	42.96	56.00	-13.04	QP	
8		0.6150	24.06	0.00	24.06	46.00	-21.94	AVG	
9		3.0200	33.69	0.00	33.69	56.00	-22.31	QP	
10		3.0200	18.34	0.00	18.34	46.00	-27.66	AVG	
11		10.2250	39.94	0.00	39.94	60.00	-20.06	QP	
12		10.2250	25.31	0.00	25.31	50.00	-24.69	AVG	


L


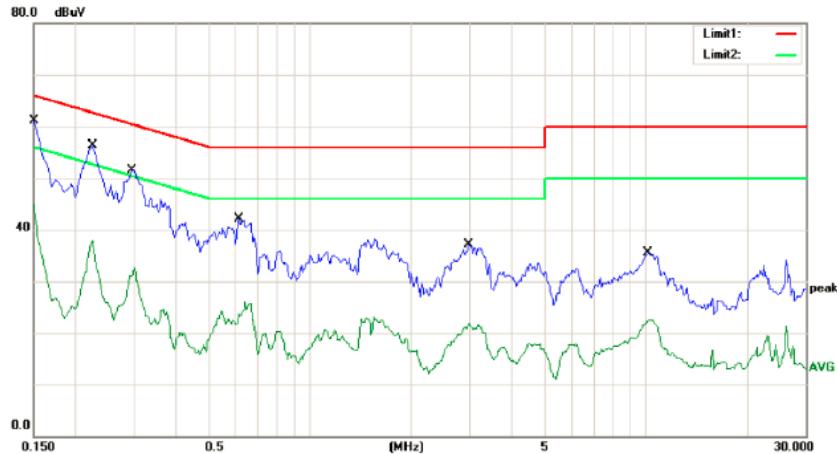


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1500	61.09	0.00	61.09	68.00	-4.91	QP	
2		0.1500	44.92	0.00	44.92	56.00	-11.08	AVG	
3		0.2250	56.23	0.00	56.23	62.63	-6.40	QP	
4		0.2250	37.99	0.00	37.99	52.63	-14.64	AVG	
5		0.2950	51.60	0.00	51.60	60.38	-8.78	QP	
6		0.2950	32.67	0.00	32.67	50.38	-17.71	AVG	
7		0.6150	42.18	0.00	42.18	56.00	-13.82	QP	
8		0.6150	26.17	0.00	26.17	46.00	-19.83	AVG	
9		2.9700	37.04	0.00	37.04	56.00	-18.96	QP	
10		2.9700	21.83	0.00	21.83	46.00	-24.17	AVG	
11		10.1750	35.51	0.00	35.51	60.00	-24.49	QP	
12		10.1750	22.56	0.00	22.56	50.00	-27.44	AVG	

## 11 Antenna Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. Antenna is fixed by enclosure, can not be changed except take apart the product.

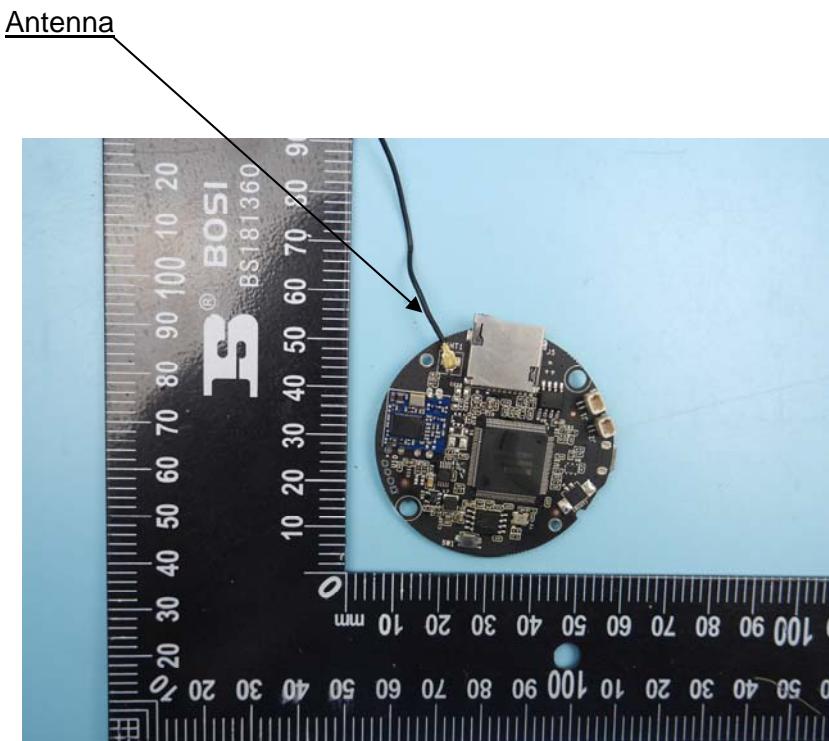

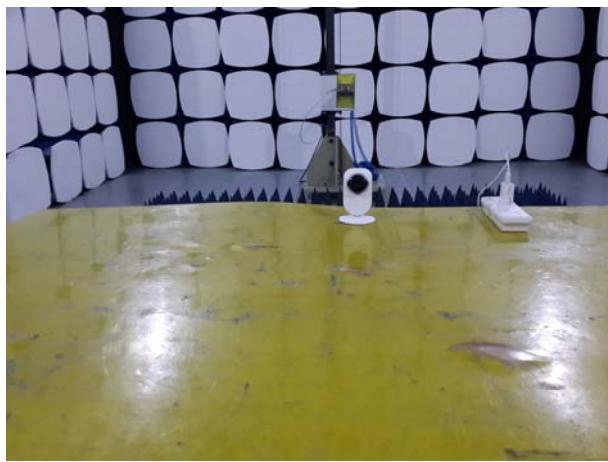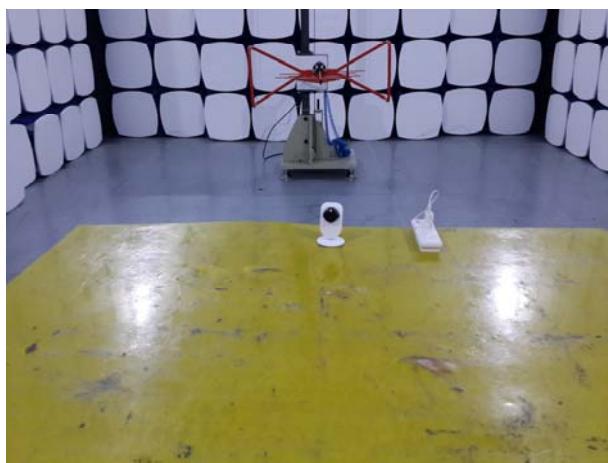**12 Photograph of Test****12.1 Radiated Emission**

## 12.2 AC Power Line Conducted Emission

