

## Global United Technology Services Co., Ltd.

Report No.: GTSE15050094503

# FCC Report (Bluetooth)

Applicant: PHILIPS

Address of Applicant: 14F.-5, No.258, Liancheng Rd., Zhonghe Dist., New Taipei City

235, Taiwan (R.O.C.)

**Equipment Under Test (EUT)** 

Product Name: mobile phone

Model No.: S616L

FCC ID: 2AEY6-S616L

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2014

Date of sample receipt: June 11, 2015

**Date of Test:** June 12-17, 2015

Date of report issued: June 18, 2015

Test Result: PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## 2 Version

Version No.	Date	Description
00	June 18, 2015	Original

Prepared By:	Edward.Pan	Date:	June 18, 2015
	Project Engineer	<u> </u>	
Check By:	hank. yan	Date:	June 18, 2015
	Reviewer		



## 3 Contents

		Page
1	COVER PAGE	1
2	2 VERSION	2
3	CONTENTS	3
4	TEST SUMMARY	4
5	GENERAL INFORMATION	5
	5.1 CLIENT INFORMATION	5
	5.2 GENERAL DESCRIPTION OF EUT	_
	5.3 Test mode	
	5.4 TEST FACILITY	
	5.5 TEST LOCATION	
	5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.7 DESCRIPTION OF SUPPORT UNITS	
6	TEST INSTRUMENTS LIST	8
7	TEST RESULTS AND MEASUREMENT DATA	9
	7.1 ANTENNA REQUIREMENT	9
	7.2 CONDUCTED EMISSIONS	
	7.3 CONDUCTED PEAK OUTPUT POWER	
	7.4 20DB EMISSION BANDWIDTH	
	7.5 CARRIER FREQUENCIES SEPARATION	
	7.6 HOPPING CHANNEL NUMBER	
	7.7 DWELL TIME	
	7.8 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	
	7.9 DAND EDGE	_
	7.9.1 Conducted Emission Method	
	7.10 Spurious Emission	
	7.10.1 Conducted Emission Method	
	7.10.2 Radiated Emission Method	
8	TEST SETUP PHOTO	43
9	EUT CONSTRUCTIONAL DETAILS	44



## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping	15.247(b)(4)&TCB Exclusion List	
Sequence	(7 July 2002)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.



## **5** General Information

## 5.1 Client Information

Applicant:	PHILIPS
Address of Applicant:	14F5, No.258, Liancheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)
Manufacturer:	New Flying
Address of Manufacturer:	10/F Block C, Tairan Building, Tairan 8 Road, Chegongmiao, District, Shenzhen City, Guangdong Province, China

## 5.2 General Description of EUT

Product Name:	mobile phone
Model No.:	S616L
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, Pi/4 QPSK, 8DPSK
Antenna Type:	PIFA antenna
Antenna gain:	2.5dBi (declare by Applicant)
Power supply:	Adapter:  Model No.: A31-3762-501000  Input: AC 100-240V, 50/60Hz, 0.2A  Output: DC 5.0V, 1.0A  or  DC 3.7V Li-ion Battery



Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz



#### 5.3 Test mode

Transmitting mode Turn off the WiFi and keep the Bluetooth in continuously transmitting mode

### 5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## • CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

## • FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fuly described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

### • Industry Canada (IC) —Registration No.: 9079A-2

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

## 5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: Room 301-309, 3th Floor, Block A, Huafeng Jinyuan Business Building, No. 300 Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen 518102

Tel: 0755-27798480 Fax: 0755-27798960

## 5.6 Other Information Requested by the Customer

None.

## 5.7 Description of Support Units

None.



## 6 Test Instruments list

Radi	Radiated Emission:								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)			
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 27 2015	Mar. 26 2016			
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A			
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Dec. 4 2014	Dec. 3 2015			
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	July 01 2014	June 30 2015			
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	July 01 2014	June 30 2015			
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 27 2014	June 26 2015			
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 27 2015	Mar. 26 2016			
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A			
9	Coaxial Cable	GTS	N/A	GTS213	Mar. 27 2015	Mar. 26 2016			
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 28 2015	Mar. 27 2016			
11	Coaxial cable	GTS	N/A	GTS210	Mar. 28 2015	Mar. 27 2016			
12	Coaxial Cable	GTS	N/A	GTS212	Mar. 28 2015	Mar. 27 2016			
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	July 01 2014	June 30 2015			
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	July 01 2014	June 30 2015			
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 27 2014	June 26 2015			
16	Band filter	Amindeon	82346	GTS219	Mar. 28 2015	Mar. 27 2016			

Cond	Conducted Emission:								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)			
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 07 2013	Sep. 06 2015			
2	<b>EMI Test Receiver</b>	Rohde & Schwarz	ESCS30	GTS223	July 01 2014	June 30 2015			
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	July 01 2014	June 30 2015			
4	4 Coaxial Switch	ANRITSU CORP	MP59B	GTS225	July 01 2014	June 30 2015			
5 LISN		SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	July 01 2014	June 30 2015			
6	Coaxial Cable	GTS	N/A	GTS227	July 01 2014	June 30 2015			
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A			

Gen	General used equipment:							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	Barometer	ChangChun	DYM3	GTS257	July 08 2014	July 07 2015		



## 7 Test results and Measurement Data

## 7.1 Antenna requirement

**Standard requirement:** FCC Part15 C Section 15.203 /247(c)

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

## 15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### **E.U.T Antenna:**

The antenna is PIFA antenna, the best case gain of the antenna is 2.5dBi






## 7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Limit (dRuV)					
	Quasi-peak   Average					
	0.5-5 56 46					
	5-30	60	50			
	* Decreases with the logarithm	n of the frequency.				
Test setup:	Reference Plane					
Test procedure:	AUX Equipment E.U.T  Test table/Insulation plane  Remark: E.U.T. Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0.8m  1. The E.U.T and simulators a	Filter AC pow				
rest procedure.	line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.  2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).  3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed					
	according to ANSI C63.10:2013 on conducted measurement.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.3 for details					
Test results:	Pass					

#### Measurement data:





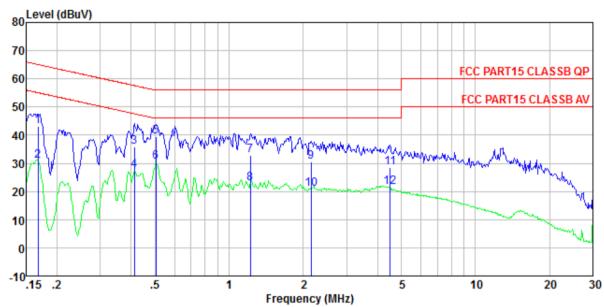

Site : Shielded room

Condition : FCC PART15 CLASSB QP LISN-2013 LINE

Job No. : 0945RF


Test mode : Bluetooth 3.0 mode

Test Engineer: Song

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.168	42.74	0.15	0.12	43.01	65.08	-22.07	QP
2	0.168	30.59	0.15	0.12	30.86	55.08	-24.22	Average
3	0.413	35.64	0.12	0.11	35.87	57.59	-21.72	QP
4	0.413	27.18	0.12	0.11	27.41	47.59	-20.18	Average
5	0.505	39.25	0.12	0.11	39.48	56.00	-16.52	QP
6	0.505	30.16	0.12	0.11	30.39	46.00	-15.61	Average
7	1.223	32.65	0.13	0.13	32.91	56.00	-23.09	QP
8	1.223	22.52	0.13	0.13	22.78	46.00	-23.22	Average
9	2.155	30.10	0.12	0.15	30.37	56.00	-25.63	QP
10	2.155	20.74	0.12	0.15	21.01	46.00	-24.99	Average
11	4.501	28.19	0.20	0.15	28.54	56.00	-27.46	QP
12	4.501	21.08	0.20	0.15	21.43	46.00	-24.57	Average



#### Neutral:

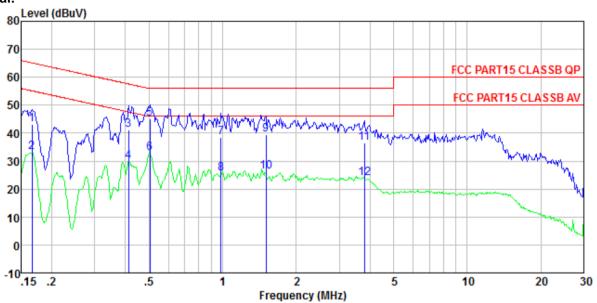

Site : Shielded room

Condition : FCC PART15 CLASSB QP LISN-2013 NEUTRAL

Job No. : 0945RF

Test mode : Bluetooth 3.0 mode

Test Engineer: Song

1050	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark	
	MHz	-dBuV	dB	dB	dBuV	dBuV	dB		
1	0.166	43.01	0.07	0.12	43.20		-21.96	-	
2	0.166	32.90	0.07	0.12	33.09	55.16	-22.07	Average	
2 3	0.413	41.05	0.06	0.11	41.22	57.59	-16.37	QP	
4	0.413	29.76	0.06	0.11	29.93	47.59	-17.66	Average	
5	0.505	44.92	0.06	0.11	45.09		-10.91		
6	0.505	32.75	0.06	0.11	32.92	46.00	-13.08	Average	
6 7	0.984	38.18	0.07	0.13	38.38	56.00	-17.62	QP	
8 9	0.984	25.20	0.07	0.13	25.40			Average	
9	1.503	39.38	0.09	0.14	39.61	56.00	-16.39	QP	
10	1.503	25.97	0.09	0.14	26.20	46.00	-19.80	Average	
11	3.799	36.09	0.14	0.15	36.38	56.00	-19.62	QP	
12	3.799	23.60	0.14	0.15	23.89			Average	

#### Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level = Receiver Read level + LISN Factor + Cable Loss



## 7.3 Conducted Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)		
Test Method:	ANSI C63.10:2013		
Limit:	30dBm(for GFSK),20.97dBm(for EDR)		
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		


## **Measurement Data**

Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
	Lowest	-0.13		
GFSK	Middle	1.71	30.00	Pass
	Highest	2.26		
Pi/4QPSK	Lowest	-0.83		Pass
	Middle	1.09	20.97	
	Highest	1.50		
	Lowest	-0.59		
8DPSK	Middle	1.26	20.97	Pass
	Highest	1.76		




## Test plot as follows:


Test mode: GFSK mode



#### Lowest channel




#### Middle channel




Highest channel




Test mode: Pi/4QPSK mode



#### Lowest channel




## Middle channel




Highest channel




Test mode: 8DPSK mode



#### Lowest channel



## Middle channel



Highest channel



## 7.4 20dB Emission Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane
Test Instruments:	Refer to section 6.0 for details
Test mode: Refer to section 5.3 for details	
Test results:	Pass


## **Measurement Data**

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
	Lowest	0.832	
GFSK	Middle	0.833	Pass
	Highest	0.834	
	Lowest	1.120	
Pi/4QPSK	Middle	1.113	Pass
	Highest	1.119	
	Lowest	1.167	
8DPSK	Middle	1.164	Pass
	Highest	1.168	




#### Test plot as follows:

Test mode: GFSK mode



#### Lowest channel



#### Middle channel




Highest channel




Test mode: Pi/4QPSK mode



#### Lowest channel



#### Middle channel




Highest channel




Test mode: 8DPSK mode



#### Lowest channel



#### Middle channel



Highest channel



## 7.5 Carrier Frequencies Separation

<del>-</del>	<u> </u>		
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2013		
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak		
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)		
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

## **Measurement Data**

measurement bata					
Mode	Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result	
	Lowest	1000	556	Pass	
GFSK	Middle	1000	556	Pass	
	Highest	1000	556	Pass	
Pi/4QPSK	Lowest	1000	747	Pass	
	Middle	1000	747	Pass	
	Highest	1000	747	Pass	
	Lowest	1000	779	Pass	
8DSK	Middle	1000	779	Pass	
	Highest	1000	779	Pass	

Note: According to section 7.4

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	834	556
Pi/4QPSK	1120	747
8DSK	1168	779

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960




## Test plot as follows:


Modulation mode: GFSK



#### Lowest channel




## Middle channel




Highest channel




Test mode: Pi/4QPSK mode



#### Lowest channel




## Middle channel




Highest channel




Test mode: 8DPSK mode



#### Lowest channel



## Middle channel



Highest channel




## 7.6 Hopping Channel Number

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2013		
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak		
Limit:	15 channels		
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

#### **Measurement Data:**

Mode	Hopping channel numbers	Limit	Result
GFSK	79	15	Pass
Pi/4QPSK	79	15	Pass
8DPSK	79	15	Pass





## 7.7 Dwell Time

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2013		
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak		
Limit:	0.4 Second		
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

### **Measurement Data**

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2402MHz	DH1/2-DH1/3-DH1	118.40	400	Pass
2441MHz	DH3/2-DH3/3-DH3	260.80	400	Pass
2480MHz	DH5/2-DH5/3-DH5	306.67	400	Pass

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

Test channel: 2402MHz/2441MHz/2480MHz as blow


DH1/2-DH1/3-DH1 time slot=0.370 (ms)\*(1600/(2\*79))\*31.6=118.40 ms DH3/2-DH3/3-DH3 time slot=1.630 (ms)\*(1600/(4\*79))\*31.6=260.80 ms DH5/2-DH5/3-DH5 time slot=2.875 (ms)\*(1600/(6\*79))\*31.6=306.67 ms

## Test plot as follows:




Test channel:


#### 2402MHz/2441MHz/2480MHz



DH1/2-DH1/3-DH1



DH3/2-DH3/3-DH3



DH5/2-DH5/3-DH5



## 7.8 Pseudorandom Frequency Hopping Sequence

## Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### **EUT Pseudorandom Frequency Hopping Sequence**


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 2<sup>9</sup> -1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



## 7.9 Band Edge


## 7.9.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)			
Test Method:	ANSI C63.10:2013			
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.3 for details			
Test results:	Pass			

## Test plot as follows:




#### **GFSK Mode:**

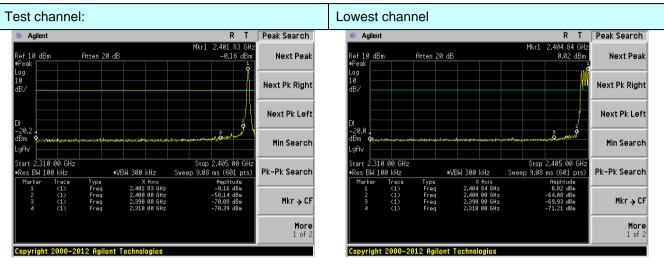

No-hopping mode

Hopping mode

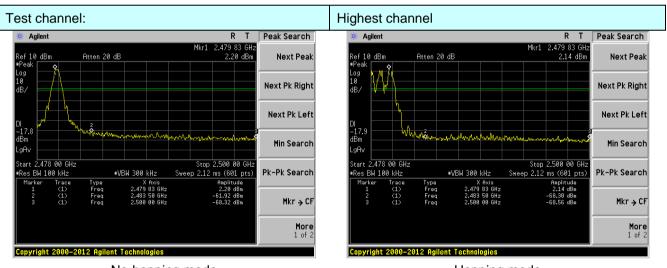


No-hopping mode

Hopping mode




#### Pi/4QPSK Mode:

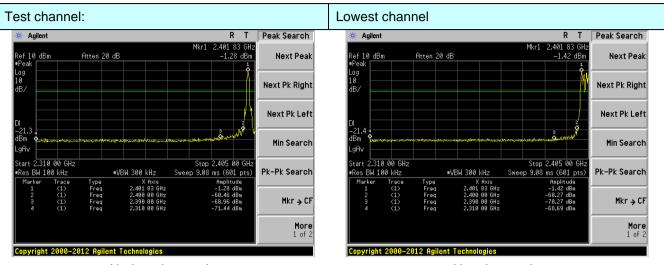

No-hopping mode

Hopping mode

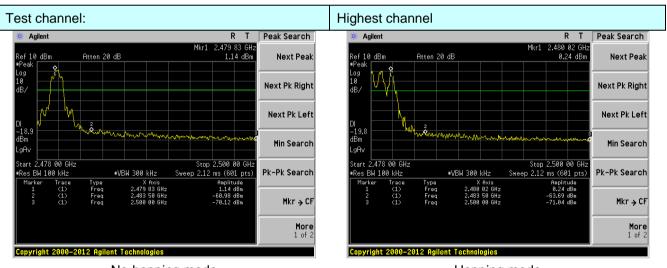


No-hopping mode

Hopping mode




#### **8DPSK Mode:**

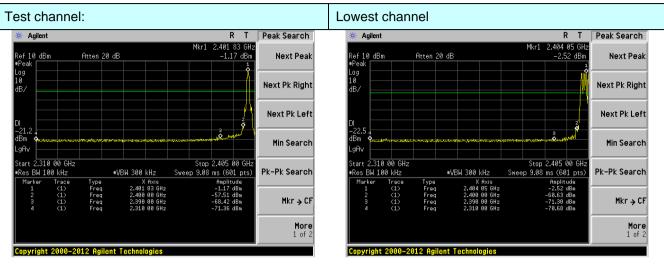

No-hopping mode

Hopping mode

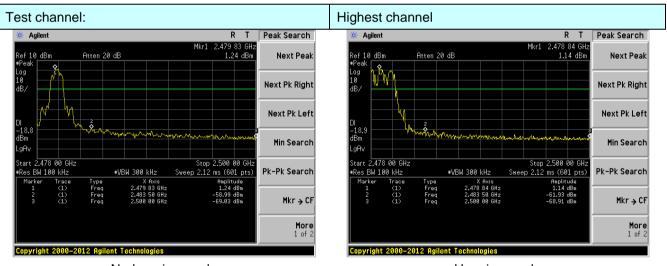

No-hopping mode

Hopping mode



## 7.9.2 Radiated Emission Method

Test Requirement:		FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:20	ANSI C63.10:2013				
Test Frequency Range:		All restriction band have been tested, and 2.3GHz to 2.5GHz band is the worse case				
Test site:	Measurement D	Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark	
rtocontor cotap.		Peak	1MHz	3MHz	Peak Value	
	Above 1GHz	Peak	1MHz	10Hz	Average Value	
Limit:	Freque	ency	Limit (dBuV/	/m @3m)	Remark	
	Above 2	ICH <sub>7</sub>	54.0	0	Average Value	
	Above	IGITZ	74.0	0	Peak Value	
Test setup:	Turn Table  V 1.5n	4m	H Sp	Antenna Tower  dorn Antenna ectrum nalyzer  Amplifier		
Test Procedure:	ground at a 3 determine the 2. The EUT was antenna, who tower.  3. The antennate ground to deshorizontal are measurement and then the and the rotal maximum received. Specified Base 6. If the emission limit specifie EUT would be determined to the rotal maximum of the rotal maximum o	<ol> <li>The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or</li> </ol>				
Test Instruments:	Refer to section	Refer to section 6.0 for details				
Test mode:	Refer to section	Refer to section 5.3 for details				
Test results:	Pass					
Global United Technology Service					2T2E150500045PE	

Global United Technology Services Co., Ltd.

Room 301-309, 3th Floor, Block A, Huafeng Jinyuan Business Building, No. 300 Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen 518102



#### Remark:

- 1. During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.
- 2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Test channel:	Lowest
---------------	--------

#### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	45.31	27.59	5.38	30.18	48.10	74.00	-25.90	Horizontal
2400.00	62.44	27.58	5.39	30.18	65.23	74.00	-8.77	Horizontal
2390.00	46.09	27.59	5.38	30.18	48.88	74.00	-25.12	Vertical
2400.00	64.74	27.58	5.39	30.18	67.53	74.00	-6.47	Vertical

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	35.31	27.59	5.38	30.18	38.10	54.00	-15.90	Horizontal
2400.00	46.69	27.58	5.39	30.18	49.48	54.00	-4.52	Horizontal
2390.00	35.43	27.59	5.38	30.18	38.22	54.00	-15.78	Vertical
2400.00	48.57	27.58	5.39	30.18	51.36	54.00	-2.64	Vertical

Test channel:	Highest
---------------	---------

#### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	47.70	27.53	5.47	29.93	50.77	74.00	-23.23	Horizontal
2500.00	46.41	27.55	5.49	29.93	49.52	74.00	-24.48	Horizontal
2483.50	48.95	27.53	5.47	29.93	52.02	74.00	-21.98	Vertical
2500.00	47.64	27.55	5.49	29.93	50.75	74.00	-23.25	Vertical

## Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	38.17	27.53	5.47	29.93	41.24	54.00	-12.76	Horizontal
2500.00	35.82	27.55	5.49	29.93	38.93	54.00	-15.07	Horizontal
2483.50	39.58	27.53	5.47	29.93	42.65	54.00	-11.35	Vertical
2500.00	35.94	27.55	5.49	29.93	39.05	54.00	-14.95	Vertical

### Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Global United Technology Services Co., Ltd.

Room 301-309, 3th Floor, Block A, Huafeng Jinyuan Business Building, No. 300 Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen 518102



## 7.10 Spurious Emission


## 7.10.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)		
Test Method:	ANSI C63.10:2013 and KDB558074 D01 Meas Guidance		
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.		
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

#### Remark:

During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.



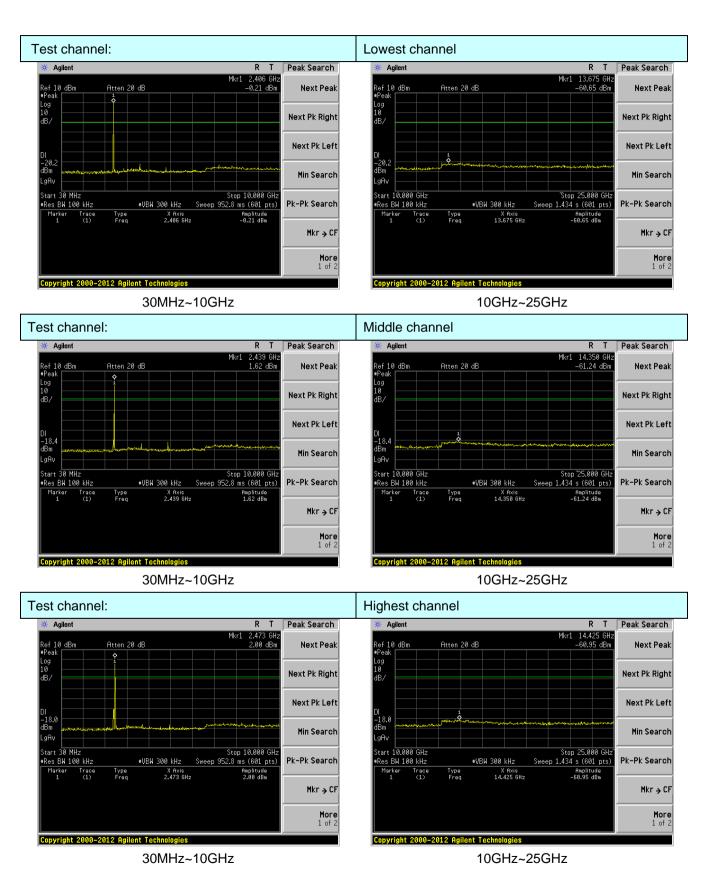

Global United Technology Services Co., Ltd.

Room 301-309, 3th Floor, Block A, Huafeng Jinyuan Business Building,

No. 300 Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen 518102

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



## 7.10.2 Radiated Emission Method

Test Requirement:	FCC Part15 C S	Section 15.209				
Test Method:	ANSI C63.10:20	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 25GH	·lz				
Test site:	Measurement D	Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark	
	30MHz- 1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	
	Above 1CHz	Peak	1MHz	3MHz	Peak Value	
	Above 1GHz	Peak	1MHz	10Hz	Average Value	
Limit:	Freque	ency	Limit (dBuV	/m @3m)	Remark	
	30MHz-8	88MHz	40.0	)	Quasi-peak Value	
	88MHz-2	16MHz	43.	5	Quasi-peak Value	
	216MHz-9	60MHz	46.0	)	Quasi-peak Value	
	960MHz-	-1GHz	54.0	)	Quasi-peak Value	
	About	ICH-	54.0	)	Average Value	
	Above 1GHz		74.0	)	Peak Value	
	Search Antenna  RF Test Receiver  Tum Table 0.8m Im Table Ground Plane					
	Above 1GHz  EUT  Turn Table	3m 4m		Antenna Towe Horn Antenna Spectrum Analyzer	T T	



Test Procedure:	The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
	The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

## Remark:

- 1. During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.
- 2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.



#### Measurement data:

#### ■ Below 1GHz

■ Below 1	GHZ							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
32.75	44.96	14.31	0.58	30.08	29.77	40.00	-10.23	Vertical
57.19	43.71	14.87	0.84	29.94	29.48	40.00	-10.52	Vertical
91.50	55.68	14.24	1.12	29.74	41.30	43.50	-2.20	Vertical
124.13	39.89	11.80	1.39	29.54	23.54	43.50	-19.96	Vertical
332.52	33.17	15.86	2.53	29.82	21.74	46.00	-24.26	Vertical
701.76	25.28	20.81	4.09	29.20	20.98	46.00	-25.02	Vertical
56.00	35.50	14.95	0.83	29.95	21.33	40.00	-18.67	Horizontal
93.44	49.19	14.58	1.14	29.73	35.18	43.50	-8.32	Horizontal
149.49	35.69	10.26	1.56	29.41	18.10	43.50	-25.40	Horizontal
204.24	33.09	12.70	1.86	29.25	18.40	43.50	-25.10	Horizontal
285.98	31.62	14.78	2.29	29.91	18.78	46.00	-27.22	Horizontal
682.35	26.57	20.75	4.02	29.22	22.12	46.00	-23.88	Horizontal



#### ■ Above 1GHz

#### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	39.21	31.78	8.60	32.09	47.50	74.00	-26.50	Vertical
7206.00	33.09	36.15	11.65	32.00	48.89	74.00	-25.11	Vertical
9608.00	32.59	37.95	14.14	31.62	53.06	74.00	-20.94	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	43.88	31.78	8.60	32.09	52.17	74.00	-21.83	Horizontal
7206.00	35.02	36.15	11.65	32.00	50.82	74.00	-23.18	Horizontal
9608.00	32.20	37.95	14.14	31.62	52.67	74.00	-21.33	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

## Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	27.66	31.78	8.60	32.09	35.95	54.00	-18.05	Vertical
7206.00	21.56	36.15	11.65	32.00	37.36	54.00	-16.64	Vertical
9608.00	20.52	37.95	14.14	31.62	40.99	54.00	-13.01	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	32.10	31.78	8.60	32.09	40.39	54.00	-13.61	Horizontal
7206.00	23.86	36.15	11.65	32.00	39.66	54.00	-14.34	Horizontal
9608.00	20.41	37.95	14.14	31.62	40.88	54.00	-13.12	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

## Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.



Test channe	:	Middle
rest channe	•	ivildale

#### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	37.50	31.85	8.67	32.12	45.90	74.00	-28.10	Vertical
7323.00	31.96	36.37	11.72	31.89	48.16	74.00	-25.84	Vertical
9764.00	31.58	38.35	14.25	31.62	52.56	74.00	-21.44	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	41.83	31.85	8.67	32.12	50.23	74.00	-23.77	Horizontal
7323.00	33.73	36.37	11.72	31.89	49.93	74.00	-24.07	Horizontal
9764.00	31.03	38.35	14.25	31.62	52.01	74.00	-21.99	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

## Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	26.29	31.85	8.67	32.12	34.69	54.00	-19.31	Vertical
7323.00	20.63	36.37	11.72	31.89	36.83	54.00	-17.17	Vertical
9764.00	19.70	38.35	14.25	31.62	40.68	54.00	-13.32	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	30.54	31.85	8.67	32.12	38.94	54.00	-15.06	Horizontal
7323.00	22.82	36.37	11.72	31.89	39.02	54.00	-14.98	Horizontal
9764.00	19.45	38.35	14.25	31.62	40.43	54.00	-13.57	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

## Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.



Test channel:	Highest
	3

#### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	36.60	31.93	8.73	32.16	45.10	74.00	-28.90	Vertical
7440.00	31.37	36.59	11.79	31.78	47.97	74.00	-26.03	Vertical
9920.00	31.05	38.81	14.38	31.88	52.36	74.00	-21.64	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	40.75	31.93	8.73	32.16	49.25	74.00	-24.75	Horizontal
7440.00	33.06	36.59	11.79	31.78	49.66	74.00	-24.34	Horizontal
9920.00	30.41	38.81	14.38	31.88	51.72	74.00	-22.28	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

## Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	25.62	31.93	8.73	32.16	34.12	54.00	-19.88	Vertical
7440.00	20.18	36.59	11.79	31.78	36.78	54.00	-17.22	Vertical
9920.00	19.29	38.81	14.38	31.88	40.60	54.00	-13.40	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	29.78	31.93	8.73	32.16	38.28	54.00	-15.72	Horizontal
7440.00	22.31	36.59	11.79	31.78	38.91	54.00	-15.09	Horizontal
9920.00	18.97	38.81	14.38	31.88	40.28	54.00	-13.72	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal


## Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.



## 8 Test Setup Photo

Radiated Emission

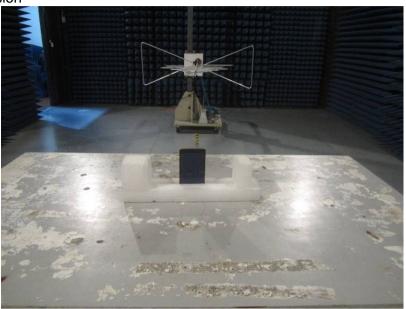





Conducted Emission



## 9 EUT Constructional Details

Reference to the test report No. GTSE15050094501

----end-----