



Report No.: HK1906181366E-1

FCC TEST REPORT

Test report
On Behalf of
SHENZHEN COMISO DIGITAL TECHNOLOGY LIMITED
For

Wireless speaker Model No.: M10 FCC ID: 2AEZG-M10

Prepared for: SHENZHEN COMISO DIGITAL TECHNOLOGY LIMITED

12/F,XinLong Technology Park,SongGang Town,BaoAn District,ShenZhen ,China

Prepared By: Shenzhen HUAK Testing Technology Co., Ltd.

1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,

Bao'an District, Shenzhen City, China



Page 2 of 49 Report No.: HK1906181366E-1

TEST REPORT

Applicant's name	SHENZHEN COMISO DIGITAL TECHNOLOGY LIMITED		
Address:	12/F,XinLong Technology Park,SongGang Town,BaoAn District,ShenZhen ,China		
Manufacture's Name	SHENZHEN COMISO DIGITAL TECHNOLOGY LIMITED		
Address	12/F,XinLong Technology Park,SongGang Town,BaoAn District,ShenZhen City,China		
Product description			
Trade Mark:			
Product name:	Wireless speaker		
Model and/or type reference:	M10		
Standards:	FCC Rules and Regulations Part 15 Subpart C Section 15.247 ANSI C63.10: 2013		
source of the material. Shenzho			
Date (s) of performance of tests	: Jun. 01, 2019 ~. Jun.18, 2019		
Date of Issue	: Jun.18, 2019		
Test Result	: Pass		
Testing Engine			
Technical Man	(Gary Qian) nager: Edan Mu		

Authorized Signatory:

(Eden Hu)

(Jason Zhou)



Page 3 of 49

Report No.: HK1906181366E-1

Contents

EUT operation Block Diagra Related Subr Modifications TEST EN TEST FACILI Environment Summary of	Inder Test Detion of the Equipment under Test (EUT) Den mode Im of Test Setup Mittal(s) / Grant (s) S VIRONMENT TY Tal conditions	5 5 5 6 7 7 7
Equipment U Short descrip EUT operatio Block Diagra Related Subr Modifications TEST EN TEST FACILI Environment Summary of	Inder Test Detion of the Equipment under Test (EUT) Den mode Im of Test Setup Mittal(s) / Grant (s) S VIRONMENT TY Tal conditions	5 5 6 7 7 7
Short descrip EUT operation Block Diagra Related Subr Modifications TEST EN TEST FACILI Environment Summary of	otion of the Equipment under Test (EUT) on mode Im of Test Setup mittal(s) / Grant (s) s VIRONMENT TY al conditions	5 6 7 7 7
EUT operation Block Diagra Related Subr Modifications TEST EN TEST FACILI Environment Summary of	on mode m of Test Setup mittal(s) / Grant (s) s VIRONMENT TY al conditions	6 7 7 7
Block Diagra Related Subr Modifications TEST EN TEST FACILI Environment Summary of	m of Test Setup mittal(s) / Grant (s) s VIRONMENT TY al conditions	8
Related Subr Modifications TEST EN TEST FACILI Environment Summary of	mittal(s) / Grant (s) VIRONMENT TY al conditions	7 7 8
TEST EN TEST FACILI Environment Summary of	TY ral conditions	<u>8</u>
TEST FACILI Environment Summary of	TY al conditions	
Environment Summary of	al conditions	0
Summary of		0
		8
	measurement results	8
	the measurement uncertainty	9
Equipments	Used during the Test	9
TEST CO	NDITIONS AND RESULTS	10
4.1.	AC Power Conducted Emission	10
4.2.	Radiated Emission	
4.3.	Maximum Peak Output Power	
4.4.	20dB Bandwidth	21
4.5.	Frequency Separation	
4.6.	Band Edge Compliance of RF Emission	27
4.7.	Spurious RF Conducted Emission	31
4.8.	Number of hopping frequency	
	Time Of Occupancy(Dwell Time)	
-	Pseudorandom Frequency Hopping Sequence	
4.10.		
4.9. 4.10. 4.11.	Antenna Requirement	44



Report No.: HK1906181366E-1



1. <u>TEST STANDARDS</u>

The tests were performed according to following standards:

<u>FCC Rules Part 15.247</u>: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

<u>ANSI C63.10-2013</u>: American National Standard for Testing Unlicensed Wireless Devices

<u>DA 00-705</u>: Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

Report No.: HK1906181366E-1



2. SUMMARY

2.1. Product Description

Name of EUT	Wireless speaker
Trade Mark:	1
Model Number	M10
List Model:	1
Power Rating	DC 3.7V and DC 5V From Adapter
Adapter(Auxiliary test Provided by the laborator)	Mode:EP-TA20CBC Input:AC100-240V-50/60Hz, 0.5A Output:DC 5V,2A
FCC ID	2AEZG-M10
Bluetooth FCC Operation frequency	2402MHz-2480MHz
Bluetooth Modulation	GFSK,8DPSK,π/4DQPSK
Antenna Type	PCB antenna
Antenna gain	0.0dBi

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage	0	230V / 50 Hz	\circ	120V / 60Hz
	0	12 V DC	0	24 V DC
	•	Other (specified in blank bel	ow	

DC 3.7V and DC 5V From Adapter

2.3. Short description of the Equipment under Test (EUT)

This is a Wireless speaker.

For more details, refer to the user's manual of the EUT.

Page 6 of 49 Report No.: HK1906181366E-1


2.4. EUT operation mode

The Applicant provides test software (AT directive) to control the EUT for staying in continuous transmitting and receiving mode for testing . There are 79 channels provided to the EUT. Channel 00/39/78 was selected to test.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
00	2402	40	2442
01	2403	41	2443
02	2404	42	2444
03	2405	43	2445
04	2406	44	2446
05	2407	45	2447
06	2408	46	2448
07	2409	47	2449
08	2410	48	2450
09	2411	49	2451
10	2412	50	2452
11	2413	51	2453
12	2414	52	2454
13	2415	53	2455
14	2416	54	2456
15	2417	55	2457
16	2418	56	2458
17	2419	57	2459
18	2420	58	2460
19	2421	59	2461
20	2422	60	2462
21	2423	2423 61	
22	2424	62	2463 2464
23	2425	63	2465
24	2426	64	2466
25	2427	65	2467
26	2428	66	2468
27	2429	67	2469
28	2430	68	2470
29	2431	69	2471
30	2432	70	2472
31	2433	71	2473
32	2434	72	2474
33	2435	73	2475
34	2436	74	2476
35	2437	75	2477
36	2438	76	2478
37	2439	77	2479
38	2440	78	2480
39	2441	<u>-</u>	

Page 7 of 49 Report No.: HK1906181366E-1

2.5. Block Diagram of Test Setup

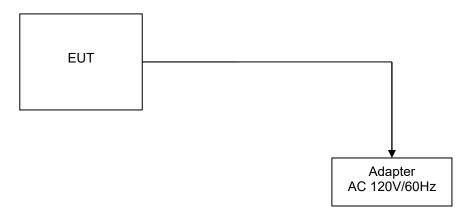

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AEZG-M10 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.7. Modifications

No modifications were implemented to meet testing criteria.



Page 8 of 49 Report No.: HK1906181366E-1

3. TEST ENVIRONMENT

3.1. TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai

Street, Bao'an District, Shenzhen City, China

3.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.3. Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Reco In Re		Pass	Fail	NA	NP	Remark
§15.247(a)(1)	Carrier Frequency separation	GFSK П/4DQPSK 8DPSK	 Lowest Middle Highest	GFSK П/4DQPSK 8DPSK	⊠ Middle	\boxtimes				complies
§15.247(a)(1)	Number of Hopping channels	GFSK П/4DQPSK 8DPSK	⊠ Full	GFSK 8DPSK	⊠ Full	\boxtimes				complies
§15.247(a)(1)	Time of Occupancy (dwell time)	GFSK П/4DQPSK 8DPSK	☑ Lowest☑ Middle☑ Highest	GFSK П/4DQPSK 8DPSK		\boxtimes				complies
§15.247(a)(1)	Spectrum bandwidth of a FHSS system 20dB bandwidth	GFSK П/4DQPSK 8DPSK	☑ Lowest☑ Middle☑ Highest	GFSK П/4DQPSK 8DPSK	☑ Lowest☑ Middle☑ Highest	\boxtimes				complies
§15.247(b)(1)	Maximum output power	GFSK П/4DQPSK 8DPSK	⊠ Lowest ⊠ Middle ⊠ Highest	GFSK П/4DQPSK 8DPSK	☑ Lowest☑ Middle☑ Highest	\boxtimes				complies
§15.247(d)	Band edge compliance conducted	GFSK П/4DQPSK 8DPSK		GFSK П/4DQPSK 8DPSK		\boxtimes				complies
§15.205	Band edge compliance radiated	GFSK П/4DQPSK 8DPSK		GFSK		\boxtimes				complies
§15.247(d)	TX spurious emissions conducted	GFSK П/4DQPSK 8DPSK	⊠ Lowest ⊠ Middle ⊠ Highest	GFSK П/4DQPSK 8DPSK	⊠ Lowest ⊠ Middle ⊠ Highest	\boxtimes				complies
§15.247(d)	TX spurious emissions radiated	GFSK П/4DQPSK 8DPSK	⊠ Lowest ⊠ Middle ⊠ Highest	GFSK	⊠ Lowest ⊠ Middle ⊠ Highest	\boxtimes				complies
§15.209(a)	TX spurious Emissions radiated Below 1GHz	GFSK П/4DQPSK 8DPSK	⊠ Lowest ⊠ Middle ⊠ Highest	GFSK	⊠ Middle	\boxtimes				complies
§15.107(a) §15.207	Conducted Emissions 9KHz-30 MHz	GFSK П/4DQPSK 8DPSK	☑ Lowest☑ Middle☑ Highest	GFSK	⊠ Middle	\boxtimes				complies

Remark:

- 1. The measurement uncertainty is not included in the test result.
- 2. NA = Not Applicable; NP = Not Performed
- 3. We tested all test mode and recorded worst case in report



Page 9 of 49 Report No.: HK1906181366E-1

3.4. Statement of the measurement uncertainty

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2 Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2 Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2 Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2

3.5. Equipments Used during the Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 28, 2018	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 28, 2018	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 28, 2018	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 28, 2018	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2018	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2018	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2018	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2018	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2018	1 Year
10.	Horn Antenna	Schewarzbeck	9120D	HKE-013	Dec. 28, 2018	1 Year
11.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Dec. 28, 2018	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2018	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	Dec. 28, 2018	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Dec. 28, 2018	1 Year
15	Power Sensor	R&S	NRP-Z4	HKE-091	Dec. 28, 2018	1 Year
16	Power Meter	R&S	NRVS	HKE-092	Dec. 28, 2018	1 Year
17	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2018	1 Year
18	Signal generator	Agilent	N5182A	HKE-029	Dec. 28, 2018	1 Year
19.	Signal Generator	Agilent	83630A	HKE-028	Dec. 28, 2018	1 Year
20.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 28, 2018	3 Year

Note: 1. The Cal.Interval was one year.


Report No.: HK1906181366E-1



4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

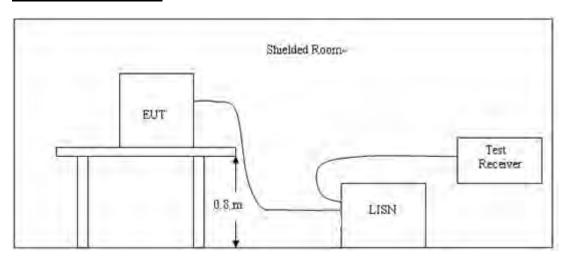

TEST PROCEDURE

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:

Frequency range (MHz)	Limit (dBuV)			
Frequency range (wiriz)	Quasi-peak	Average		
0.15-0.5	66 to 56*	56 to 46*		
0.5-5	56	46		
5-30	50			
* Decreases with the logarithm of the frequency.				

TEST RESULTS

Remark:

- 1. All modes of GFSK, Pi/4 DQPSK, and 8DPSK were test at Low, Middle, and High channel; only the worst result of GFSK Middle Channel was reported as below:
- 2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:.

2

3

0.6196

3.2284


10.05

10.23

41.27

41.07

Page 11 of 49 Report No.: HK1906181366E-1

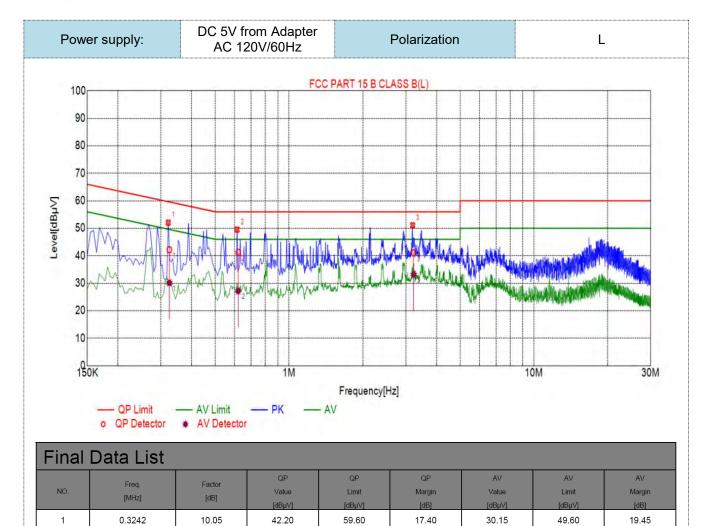

56.00

56.00

14.73

14.93

27.25

33.23

46.00


46.00

18.75

12.77

Page 12 of 49 R

Report No.: HK1906181366E-1

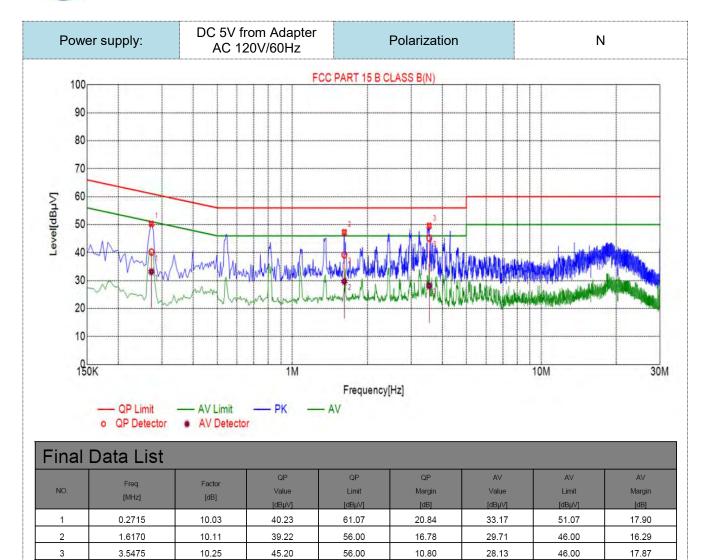




Report No.: HK1906181366E-1


TEST CONFIGURATION

4.2. Radiated Emission


Frequency range 9 KHz - 30MHz

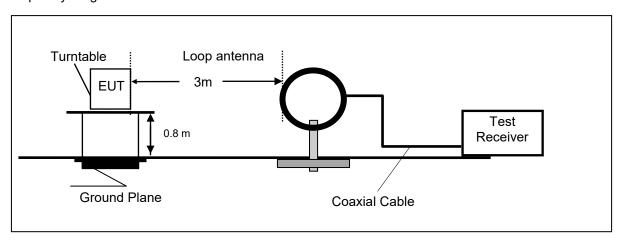

Frequency range 30MHz - 1000MHz

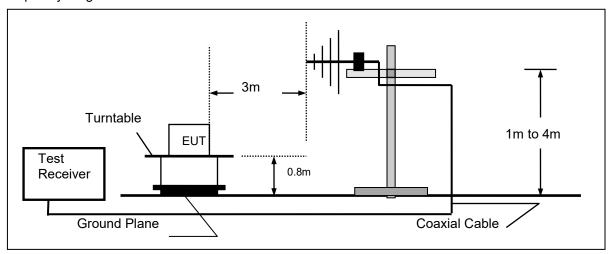

Frequency range above 1GHz-25GHz

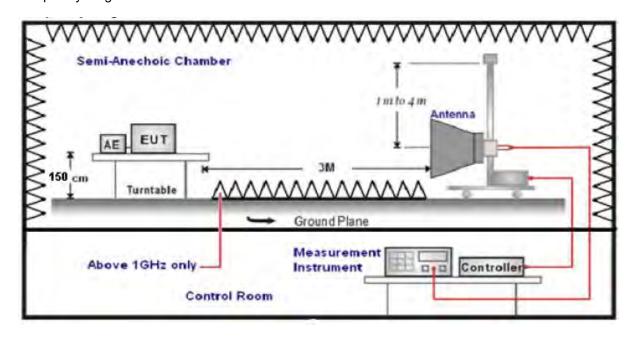

- 1. The EUT was placed on a turn table which is 12mm above ground plane when testing frequency range 9 KHz –25GHz.
- 2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° C to 360°C to acquire the highest emissions from EUT.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4. Repeat above procedures until all frequency measurements have been completed.
- 5. The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 2480MHz.so radiated emission test frequency band from 9KHz to 25GHz.

6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Anternna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz RBW=9KHz/VBW=100KHz,Sweep time=Auto		QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto	
1GHz-40GHz	Average Value: RBW=1MHz/VBW=10Hz,	Peak
	Sweep time=Auto	

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

Transd=AF +CL-AG

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500






Remark: For test below 1GHz all modes of GFSK, Pi/4 DQPSK, and 8DPSK were test at Low, Middle, and High channel; only the worst result of GFSK Middle Channel was reported as below:

For 9 KHz-30MHz


Frequency (MHz)	Corrected Reading (dBuV/m)@3m	FCC Limit (dBuV/m) @3m	Margin (dB)	Detector	Result
0.38	46.35	96.01	49.66	QP	PASS
1.55	52.19	63.80	11.61	QP	PASS
19.68	56.42	69.54	13.12	QP	PASS
24.62	40.79	69.54	28.75	QP	PASS

For 30MHz-1GHz

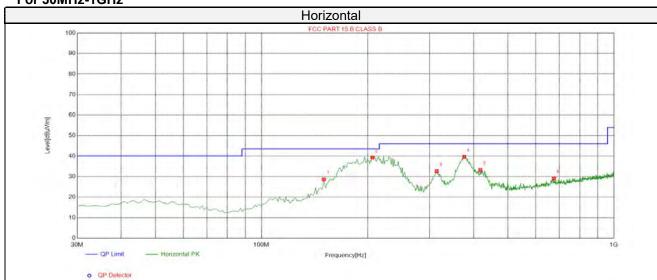

Suspected List Factor Freq. Level Limit Margin Height Angle NO. Polarity [dB] [MHz] [dBµV/m] [dBµV/m] [dB] [cm] [°] 150.280 28.70 43.50 14.80 100 1 -18.92 278 Horizontal 2 206.540 39.27 -14.89 43.50 4.23 100 334 Horizontal 3 314.210 32.63 -12.40 46.00 13.37 100 310 Horizontal 4 376.290 39.60 -10.89 46.00 6.40 100 11 Horizontal 418.000 5 33.21 -10.07 46.00 12.79 100 181 Horizontal 676.020 29.14 -4.76 46.00 16.86 100 11 Horizontal 6

Page 16 of 49 Report No.: HK1906181366E-1

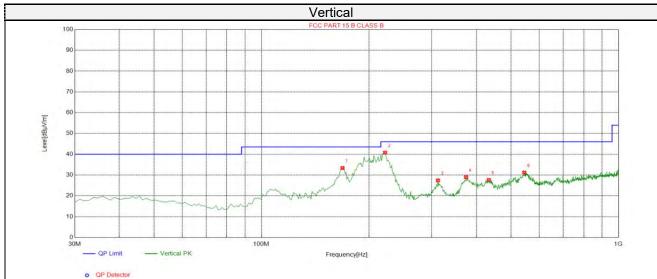

0		

Susp	Suspected List									
NO.	Freq.	Level	Factor	Limit	Margin	Height	Angle	Dolority		
NO.	[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity		
1	168.710	33.37	-17.42	43.50	10.13	100	292	Vertical		
2	222.060	40.80	-14.51	46.00	5.20	100	260	Vertical		
3	312.270	27.41	-12.49	46.00	18.59	100	90	Vertical		
4	374.350	28.99	-10.92	46.00	17.01	100	95	Vertical		
5	433.520	27.65	-9.70	46.00	18.35	100	252	Vertical		
6	545.070	31.21	-7.08	46.00	14.79	100	48	Vertical		

Page 17 of 49 Report No.: HK1906181366E-1

Remark: For test above 1GHz GFSK, Pi/4 DQPSK, and 8DPSK were test at Low, Middle, and High channel; only the worst result of GFSK was reported as below:

CH Low (2402MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
<i>(</i>)		= \				Detector
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4804	61.23	-3.64	57.59	74	-16.41	peak
4804	46.59	-3.64	42.95	54	-11.05	AVG
7206	56.47	-0.95	55.52	74	-18.48	peak
7206	43.38	-0.95	42.43	54	-11.57	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type
4804	62.58	-3.64	58.94	74	-15.06	peak
4804	48.19	-3.64	44.55	54	-9.45	AVG
7206	57.15	-0.95	56.2	74	-17.8	peak
7206	44.12	-0.95	43.17	54	-10.83	AVG

Page 18 of 49 Report No.: HK1906181366E-1

CH Middle (2441MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type	
4882	61.38	-3.51	57.87	74	-16.13	peak	
4882	45.12	-3.51	41.61	54	-12.39	AVG	
7326	56.63	-0.82	55.81	74	-18.19	peak	
7326	42.69	-0.82	41.87	54	-12.13	AVG	
Remark: Facto	Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

vertical.						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type
4882	63.18	-3.51	59.67	74	-14.33	peak
4882	47.13	-3.51	43.62	54	-10.38	AVG
7326	57.1	-0.82	56.28	74	-17.72	peak
7326	43.17	-0.82	42.35	54	-11.65	AVG
					-	

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Page 19 of 49 Repo

Report No.: HK1906181366E-1

CH High (2480MHz)

н	\sim	コマ	\sim	าta	١.
	v	14	VI.	па	Ι.

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	.
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type
4960	59.79	-3.43	56.36	74	-17.64	peak
4960	45.12	-3.43	41.69	54	-12.31	AVG
7440	55.37	-0.75	54.62	74	-19.38	peak
7440	41.91	-0.75	41.16	54	-12.84	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type
4960	61.27	-3.43	57.84	74	-16.16	peak
4960	48.02	-3.43	44.59	54	-9.41	AVG
7440	56.95	-0.75	56.2	74	-17.8	peak
7440	43.26	-0.75	42.51	54	-11.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Data of measurement within this frequency range shown "--- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed.

Page 20 of 49 Report No.: HK1906181366E-1

4.3. Maximum Peak Output Power

TEST CONFIGURATION

EUT	Power Sensor

TEST PROCEDURE

According to ANSI C63.10:2013 Maximum peak conducted output power for HFSS devices: The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the HFSS bandwidth and shall utilize a fast-responding diode detector.

<u>LIMIT</u>

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

TEST RESULTS

Туре	Channel	Peak Output power (dBm)	Limit (dBm)	Result	
	00	3.507			
GFSK	39	3.766	21	Pass	
	78	3.648			
	00	3.504		Pass	
π/4DQPSK	39	3.749	21		
	78	3.678			
8DPSK	00	2.804			
	39	3.077	21	Pass	
	78	2.969			

Note: 1.The test results including the cable lose.

Page 21 of 49 Report No.: HK1906181366E-1

TEST CONFIGURATION

EUT	SPECTRUM
	ANALYZER

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30 KHz and VBW=100KHz. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

<u>LIMIT</u>

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwith.

TEST RESULTS

Modulation	Channel	20dB bandwidth (MHz)	99% OBW (MHz)	Result
	CH00	0.9493	0.85029	
GFSK	CH39	0.9484	0.84547	
	CH78	0.9507	0.84804	
	CH00	1.310	1.1823	
π/4DQPSK	CH39	1.310	1.1898	Pass
	CH78	1.314	1.1902	
	CH00	1.310	1.1930	
8DPSK	CH39	1.308	1.1813	
	CH78	1.316	1.1776	



Page 22 of 49 Report No.: HK1906181366E-1

GFSK Modulation



CH00



CH39



CH78





π/4DQPSK Modulation



CH00



CH39



CH78





8DPSK Modulation



CH00



CH39



CH78

Page 25 of 49 Report No.: HK1906181366E-1

4.5. Frequency Separation

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30 KHz and VBW=100KHz.

LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

TEST RESULTS

4.5.1 GFSK Test Mode

Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result	
GFSK	CH38	1.059	2/3* 20dB BW or	Pass	
GFSK	CH39	1.059	20dB BW		
π/4DQPSK	CH38	1.021	2/3* 20dB BW or	Pass	
11/4DQFSK	CH39	1.021	20dB BW	F 435	
ODDCK	CH38	1.130	2/3* 20dB BW or	Pass	
8DPSK	CH39	1.130	20dB BW	rass	


Remark: We have tested all mode at high, middle and low channel, and recorded worst case at middle

Page 26 of 49 Report No.: HK1906181366E-1


GFSK Modulation



π/4DQPSK Modulation

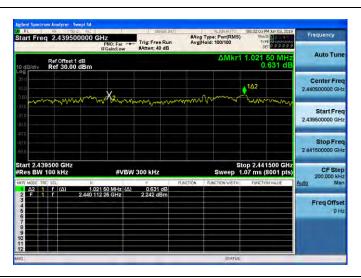

8DPSK Modulation

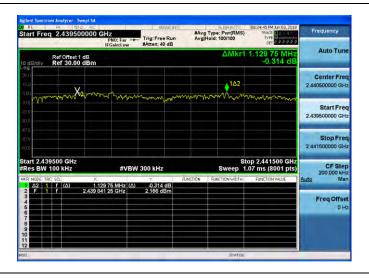

Report No.: HK1906181366E-1




4.6. Band Edge Compliance of RF Emission

TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

For Radiated

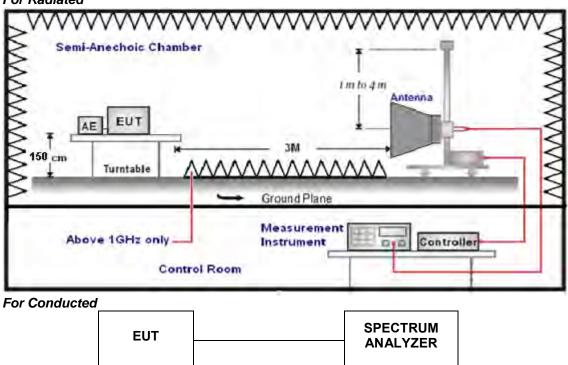

TEST PROCEDURE

- 1. The EUT was placed on a turn table which is 1.5m above ground plane.
- 2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360°C to acquire the highest emissions from EUT.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4. Repeat above procedures until all frequency measurements have been completed...
- 5. The distance between test antenna and EUT was 3 meter:

6. Setting test receiver/spectrum as following table states:

g						
Test Frequency range Test Receiver/Spectrum Setting		Detector				
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz,					
	Sweep time=Auto	Peak				
	Average Value: RBW=1MHz/VBW=10Hz,	reak				
	Sweep time=Auto					

LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

Page 28 of 49 Report No.: HK1906181366E-1

4.6.1 For Radiated Bandedge Measurement

Remark: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

Operation Mode: GFSK TX Low channel(2402MHz)

Horizontal (Worst case)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
2390	56.79	-5.81	50.98	74	-23.02	peak
2390	39.32	-5.81	33.51	54	-20.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре	
2390	59.12	-5.81	53.31	74	-20.69	peak	
2390 42.47 -5.81 36.66 54 -17.34 AVG							
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

Operation Mode: GFSK TX High channel (2480MHz)

Horizontal (Worst case)


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре	
2483.5	58.21	-5.65	52.56	74	-21.44	peak	
2483.5 42.91 -5.65 37.26 54 -16.74 AVG							
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
2483.5	60.18	-5.65	54.53	74	-19.47	peak
2483.5	44.52	-5.65	38.87	54	-15.13	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.


Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.






4.6.2 For Conducted Bandedge Measurement

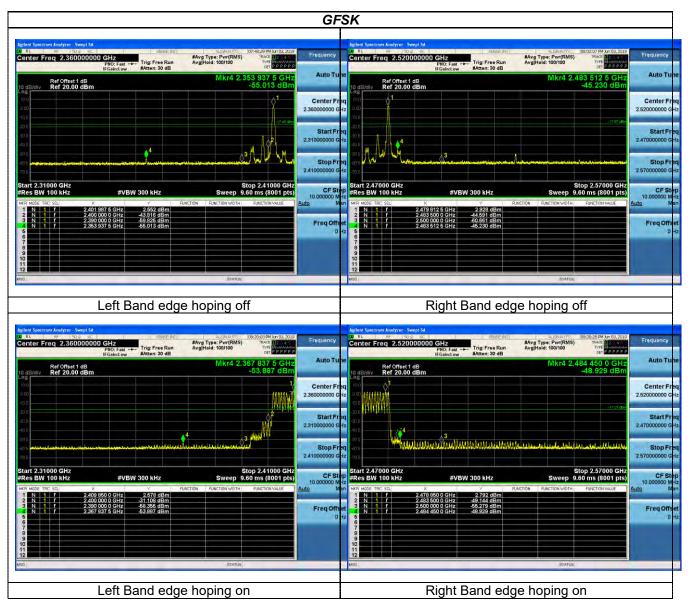

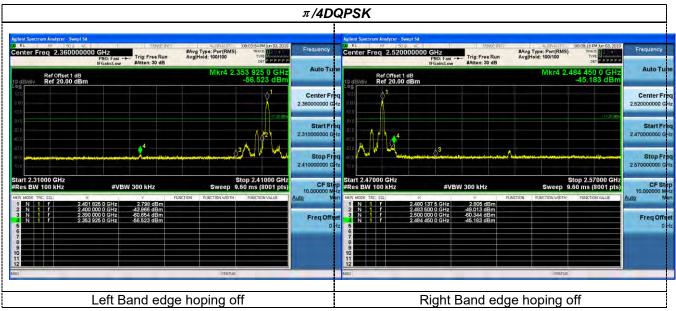

Page 30 of 49 Report No.: HK1906181366E-1



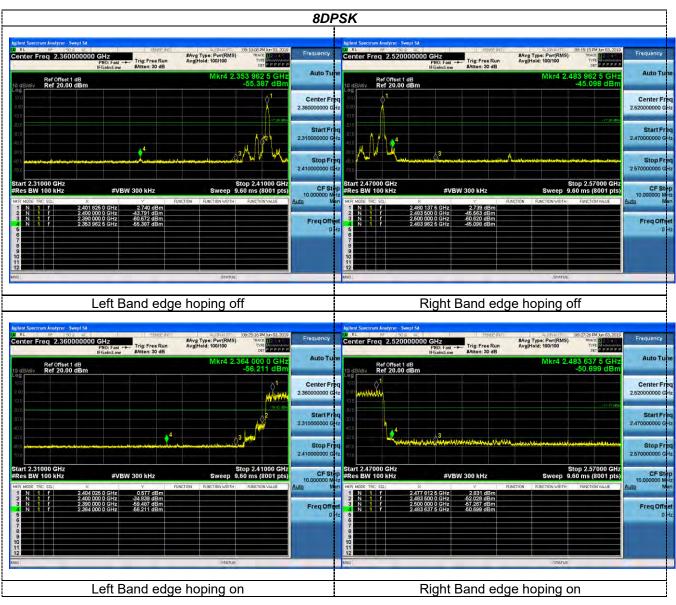

Page 31 of 49 Report No.: HK1906181366E-1

4.7. Spurious RF Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and mwasure frequeny range from 9KHz to 25GHz.

LIMIT

- 1. Below -20dB of the highest emission level in operating band.
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.


TEST RESULTS

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

Page 32 of 49 Report No.: HK1906181366E-1




Page 33 of 49 Report No.: HK1906181366E-1

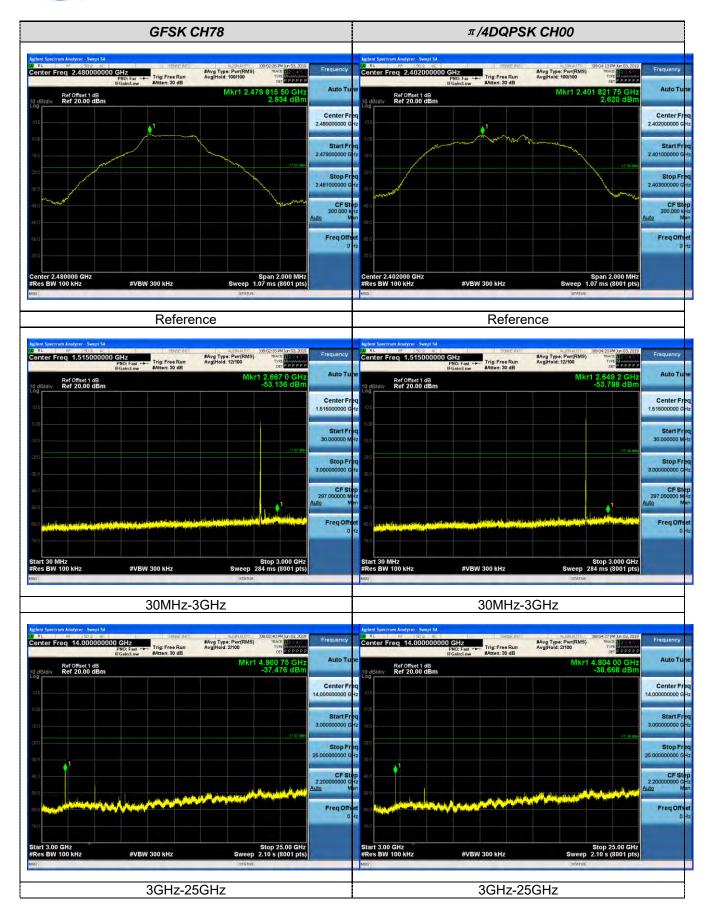


Page 34 of 49 Report No.: HK1906181366E-1



Page 35 of 49 Report No.: HK1906181366E-1

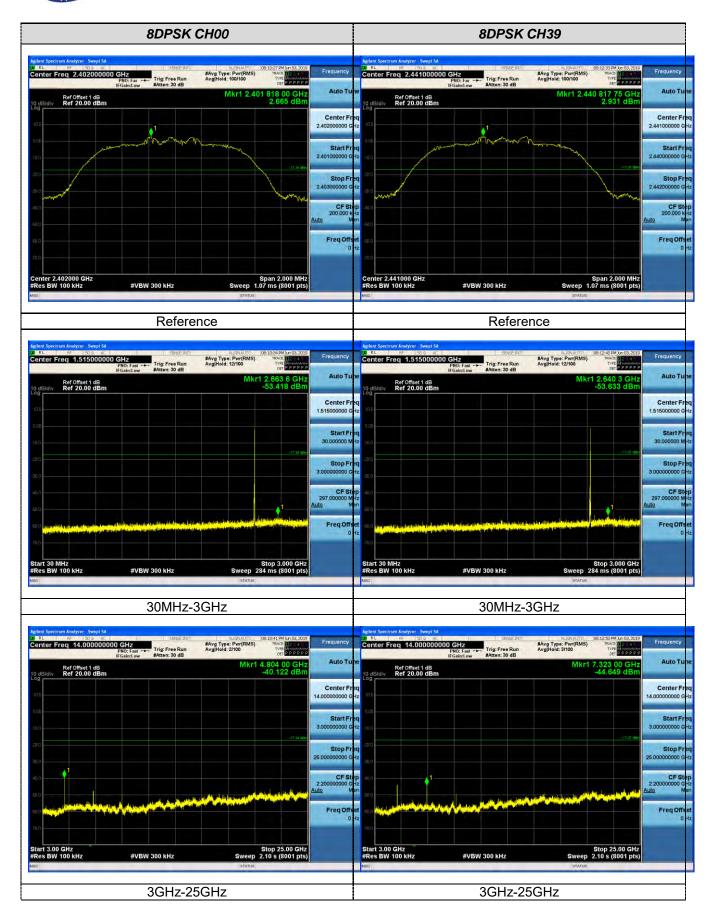

Page 36 of 49 Report No.: HK1906181366E-1

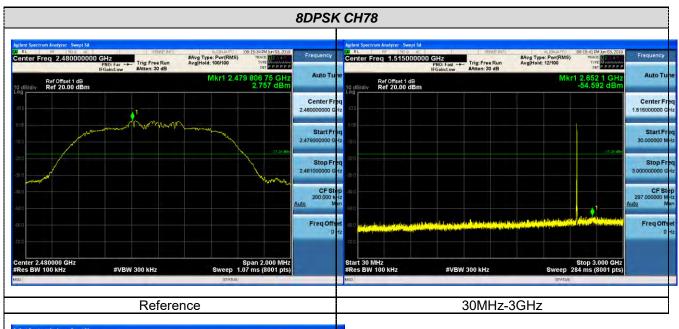





Page 37 of 49 Report No.: HK1906181366E-1

4.8. Number of hopping frequency

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with RBW=1MHz and VBW=3MHz.

LIMIT


Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

Modulation	Number of Hopping Channel	Limit	Result
GFSK	79		
π/4 DQPSK	79	≥15	Pass
8DPSK	79		







GFSK Modulation

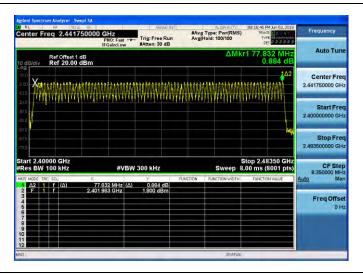

π/4DQPSK Modulation

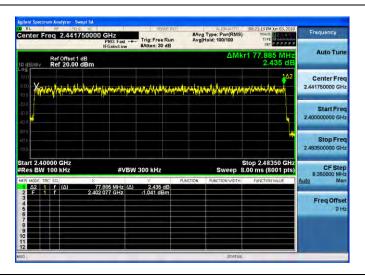

8DPSK Modulation

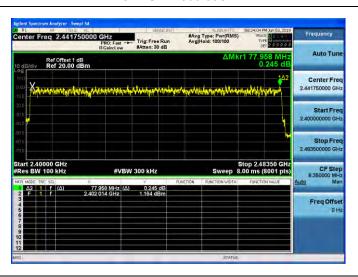


Report No.: HK1906181366E-1



4.9. Time Of Occupancy(Dwell Time)

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with RBW=1MHz and VBW=3MHz,Span=0Hz.

LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

TEST RESULTS

Modulation	Packet	Pulse time (ms)	Dwell time (second)	Limit (second)	Result
GFSK	DH1	0.377	0.121		
	DH3	1.631	0.261	0.40	Pass
	DH5	2.878	0.307		
π/4 DQPSK	DH1	0.387	0.124		
	DH3	1.637	0.262	0.40	Pass
	DH5	2.885	0.308		
8DSPSK	3-DH1	0.387	0.124		
	3-DH3	1.637	0.262	0.40	Pass
	3-DH5	2.885	0.308]	


Note:

- 1. We have tested all mode at high, middle and low channel, and recoreded worst case at middle channel.
- 2. Dwell time=Pulse time (ms) × $(1600 \div 2 \div 79)$ ×31.6 Second for DH1, 2-DH1, 3-DH1 Dwell time=Pulse time (ms) × $(1600 \div 4 \div 79)$ ×31.6 Second for DH3, 2-DH3, 3-DH3


Dwell time=Pulse time (ms) × $(1600 \div 6 \div 79)$ ×31.6 Second for DH5, 2-DH5, 3-DH5

Page 40 of 49 Report No.: HK1906181366E-1


GFSK Modulation

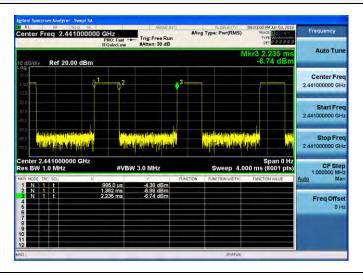

DH1

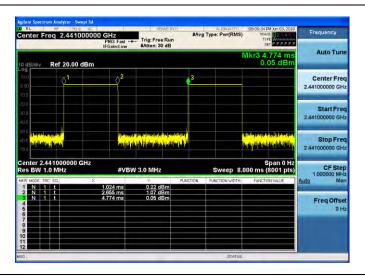

DH3

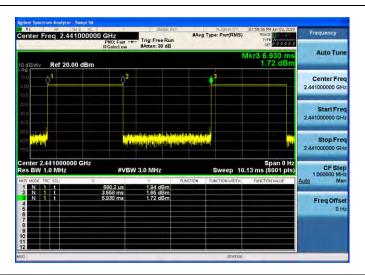


DH5







π/4DQPSK Modulation

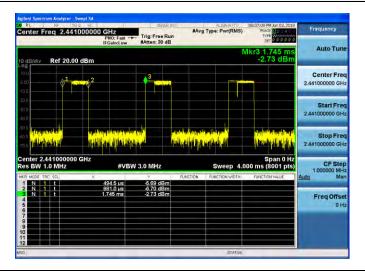

2-DH1

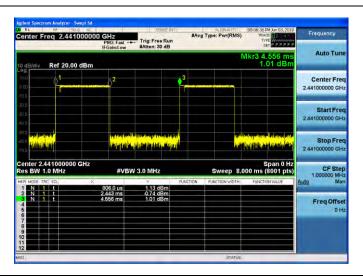

2-DH3

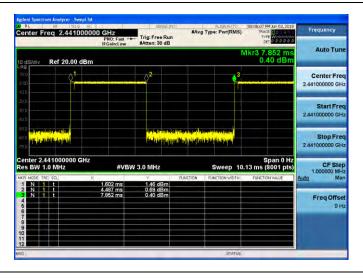


2-DH5







8DPSK Modulation

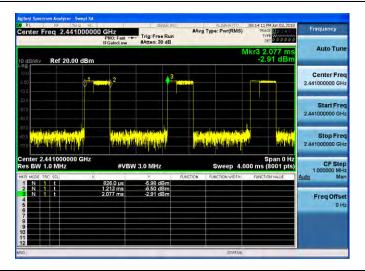

3-DH1

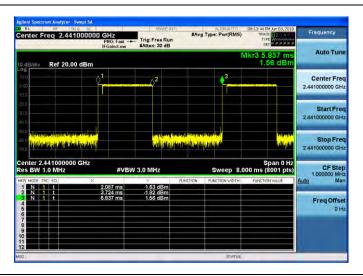

3-DH3

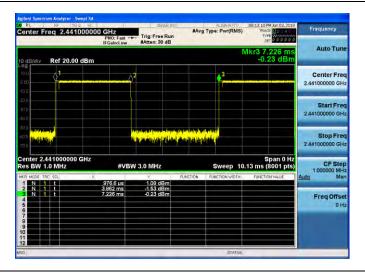

3-DH5



Report No.: HK1906181366E-1

4.10. Pseudorandom Frequency Hopping Sequence

TEST APPLICABLE


For 47 CFR Part 15C section 15.247 (a)(1) requirement:

Frequency hopping systems shall have hopping channel carrier fre-quencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Al-ternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier fre-guencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo ran-domly ordered list of hopping fre-quencies. Each frequency must be used equally on the average by each trans-mitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their cor-responding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nice-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the frist stage. The sequence begins with the frist one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An explame of pseudorandom frequency hopping sequence as follows:



Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

Page 44 of 49 Report No.: HK1906181366E-1

4.11. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Antenna Information


The antenna is PCB antenna, The directional gains of antenna used for transmitting is 0.00 dBi.



5. Test Setup Photos of the EUT





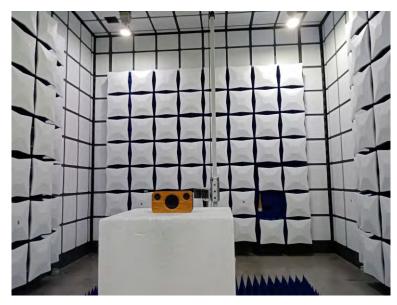

Report No.: HK1906181366E-1



6. Photos of the EUT









Page 47 of 49

Report No.: HK1906181366E-1











Page 48 of 49 Report No.: HK1906181366E-1

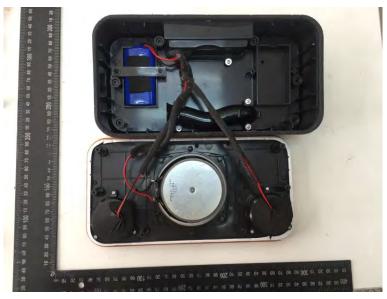


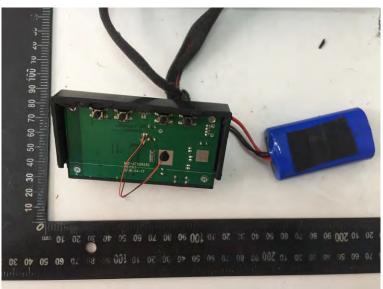





Page 49 of 49 Report No.: HK1906181366E-1

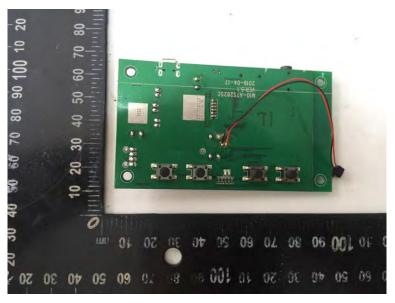



.....End of Report.....