

FCC PART 15.247


TEST REPORT

For

Signify North America Corporation

10275 W. Higgins Rd., Rosemont, Illinois 60018, United States

FCC ID: 2AF2N-929004631X

Report Type: Original Report	Product Name: LED Luminaire
Report Number: <u>RKSB241209003-00B</u>	
Report Date: <u>2025-05-06</u>	
Reviewed By:	<u>Bard Liu</u> 
Approved By:	<u>Oscar Ye</u> 
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S. Government.

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES.....	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	9
EXTERNAL I/O CABLE.....	9
BLOCK DIAGRAM OF TEST SETUP	9
TEST EQUIPMENT LIST	11
SUMMARY OF TEST RESULTS.....	12
FCC §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	13
FCC §15.203 – ANTENNA REQUIREMENT	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
TEST SYSTEM SETUP.....	15
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
TEST RESULTS SUMMARY	17
TEST DATA: SEE APPENDIX	17
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST DATA: SEE APPENDIX	18
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST DATA: SEE APPENDIX	19
FCC §15.247(d) – BAND EDGE.....	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST DATA: SEE APPENDIX	20
FCC §15.247(e) - POWER SPECTRAL DENSITY	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATA: SEE APPENDIX	21

EUT PHOTOGRAPHS	22
TEST SETUP PHOTOGRAPHS	23
APPENDIX - TEST DATA	24
ENVIRONMENTAL CONDITIONS & TEST INFORMATION	24
SPURIOUS EMISSIONS	25
6 dB EMISSION BANDWIDTH	33
MAXIMUM CONDUCTED OUTPUT POWER	34
BAND EDGE	35
POWER SPECTRAL DENSITY	36

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	RKSB241209003-00B	R1V1	2025-05-06	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Signify North America Corporation
Tested Model:	9290046315
Series Model:	9290046318
Model Difference:	Model name, Housing bracket
Product Name:	LED Luminaire
Power Supply:	DC 3.0~4.2V(typical DC 4V) powered by solar or DC 3.7V from battery
RF Function:	BLE
Operating Band/Frequency:	2402-2480MHz
Maximum Peak Output Power:	BLE (1 Mbps): 3.84 dBm
Channel Number:	40
Channel Separation:	2 MHz
Modulation Type	GFSK
Antenna Type:	PCB Antenna
★Maximum Antenna Gain:	0.68 dBi

Note:

1. The maximum antenna gain was provided by the applicant.
2. The EUT has two batteries that are only different in model. We used the 1# battery for the test.

All measurement and tested data in this report was gathered from production sample serial number: RKS241209003-1 (Assigned by BACL (Kunshan). The EUT supplied by the applicant was received on 2024-12-09.)

Objective

This report is prepared for *Signify North America Corporation* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communications Commission rules.

The tests were performed in order to determine Compliant with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 15.247 Meas Guidance v05r02.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9 dB
RF Output Power with Power meter		0.5 dB
Radiated emissions	9 kHz~150 kHz	3.8 dB
	150 kHz~30 MHz	3.4 dB
	30MHz~1GHz	6.11 dB
	1GHz~6GHz	4.45 dB
	6GHz~18GHz	5.23 dB
	18GHz~40GHz	5.65 dB
Occupied Bandwidth		0.5 kHz
Temperature		1.0 °C
Humidity		6 %

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu Province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No.: CN5055.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel List for BLE mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454	/	/
13	2428	27	2456	/	/

EUT was tested with channel 0, 19 and 39.

EUT Exercise Software

RF Test Tool: BK32xx RF Test_V2.1.0

★Power level: Default

Note: The power level was declared by the applicant.


Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Duty Cycle:
BLE (1 Mbps)

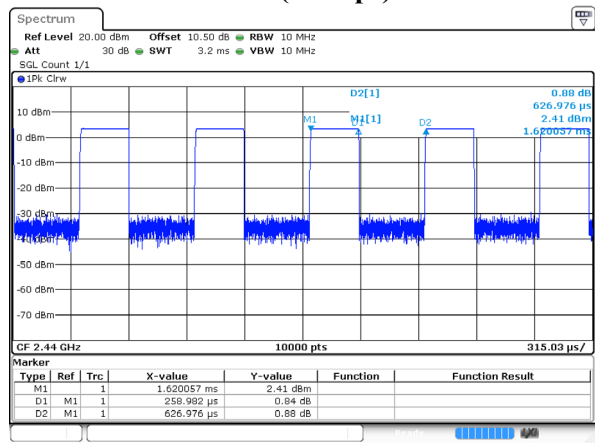

ProjectNo.: RKS241209003 Tester: Jason Lu
Date: 31 DEC 2024 17:12:33

Mode	Duty Cycle (%)	T _{on} (ms)	T _{on+off} (ms)	10log(1/x) (dB)
BLE (1 Mbps)	41.31	0.259	0.627	3.84

- Note:
- 1. “x” means the Duty Cycle.
 - 2. Offset(10.5dB) = Attenuator(10dB)+Cable loss(0.5dB)

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Notebook	Y700P	PF2B7PL5
/	Debug Board	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To Port
Data Cable	0.2	Debug Board	EUT

Block Diagram of Test Setup

For Radiated Emissions(Below 1GHz):

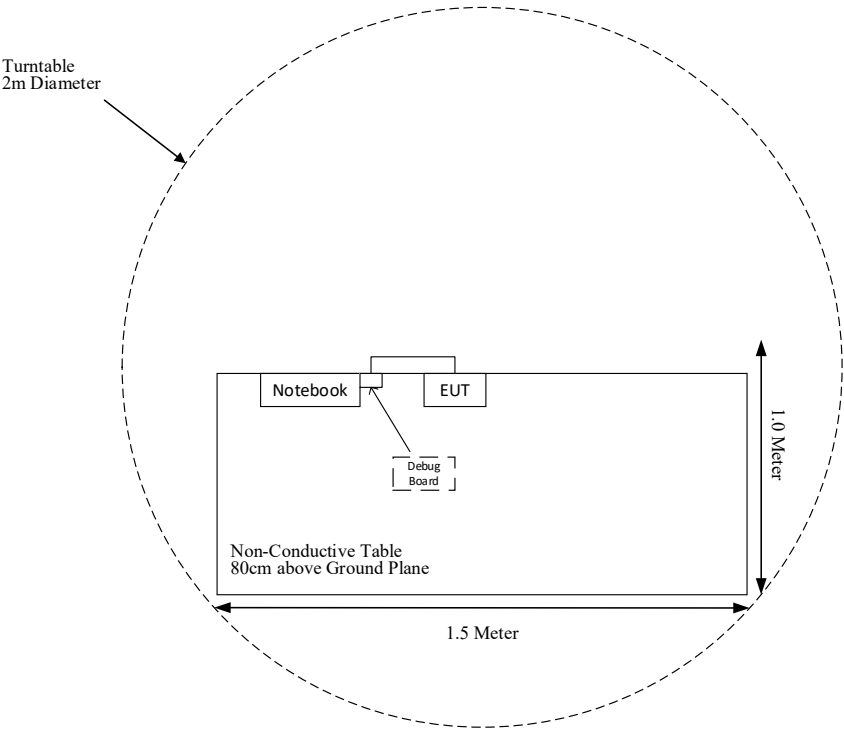

For Radiated Emissions(Above 1GHz):

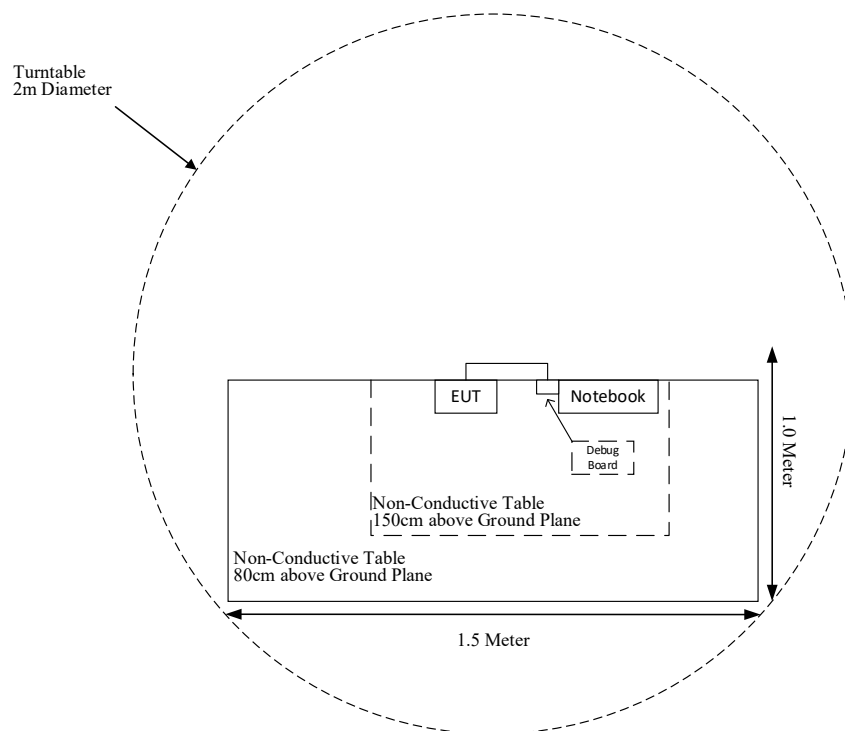

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber #1)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2024-04-23	2025-04-22
Sunol Sciences	Hybrid Antenna	JB3	A090314-2	2024-10-29	2027-10-28
ETS-LINDGREN	Loop Antenna	6512	108100	2024-11-03	2027-11-02
Narda	6 dB Attenuator	771-6	10690812-2-1	2024-10-29	2027-10-28
Sonoma Instrument	Pre-amplifier	310N	171205	2024-04-23	2025-04-22
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-9	009	2024-04-23	2025-04-22
Radiated Emission Test (Chamber #2)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2024-04-25	2025-04-24
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2025-04-09	2026-04-08
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2024-11-03	2027-11-02
ETS-LINDGREN	Horn Antenna	3116	2516	2024-12-12	2027-12-11
A.H.Systems,inc	Amplifier	PAM-0118P	512	2024-04-25	2025-04-24
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2024-04-23	2025-04-22
Narda	Attenuator	10dB	010	2024-04-23	2025-04-22
SELECTOR	Amplifier	EM18G40G	60726	2025-04-09	2026-04-08
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2024-04-25	2025-04-24
MICRO-COAX	Coaxial Cable	Cable-6	006	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-11	011	2024-04-25	2025-04-24
MICRO-COAX	Coaxial Cable	Cable-11	011	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-12	012	2024-04-25	2025-04-24
MICRO-COAX	Coaxial Cable	Cable-12	012	2025-04-09	2026-04-08
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	103298	2024-04-24	2025-04-23
Narda	Attenuator	10dB	010	2024-04-23	2025-04-22
XHFDZ	RG178 Coaxial Cable	SMA-178	XHF-1102	Each time	N/A

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307(b)(1)& §2.1091	RF EXPOSURE	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Not Applicable (See note)
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

Note: This product is powered by battery.

FCC §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		★Tune-up Output Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
BLE	2402~2480	0.68	1.17	4.0	2.51	20	0.0006	1.00

Note: For the above tune up power were declared by the manufacturer.

Result: The device meets MPE at distance 20cm.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.



Antenna Connector Construction


The EUT has a PCB antenna for BLE, and the antenna gain is 0.68 dBi, which is permanently attached to the unit, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

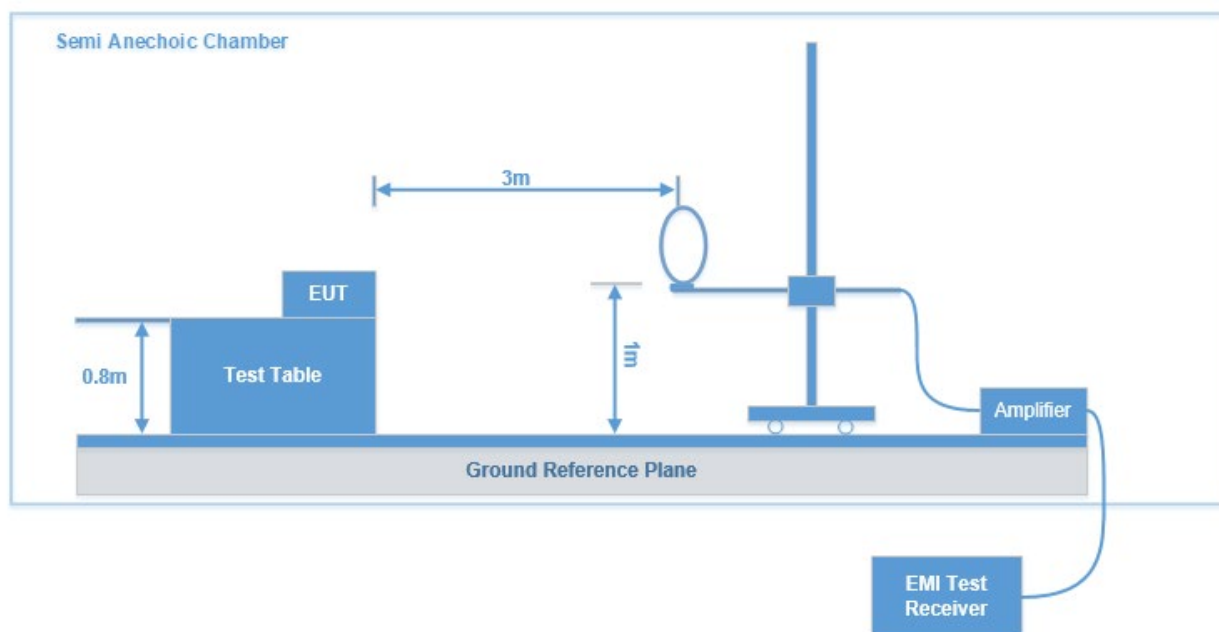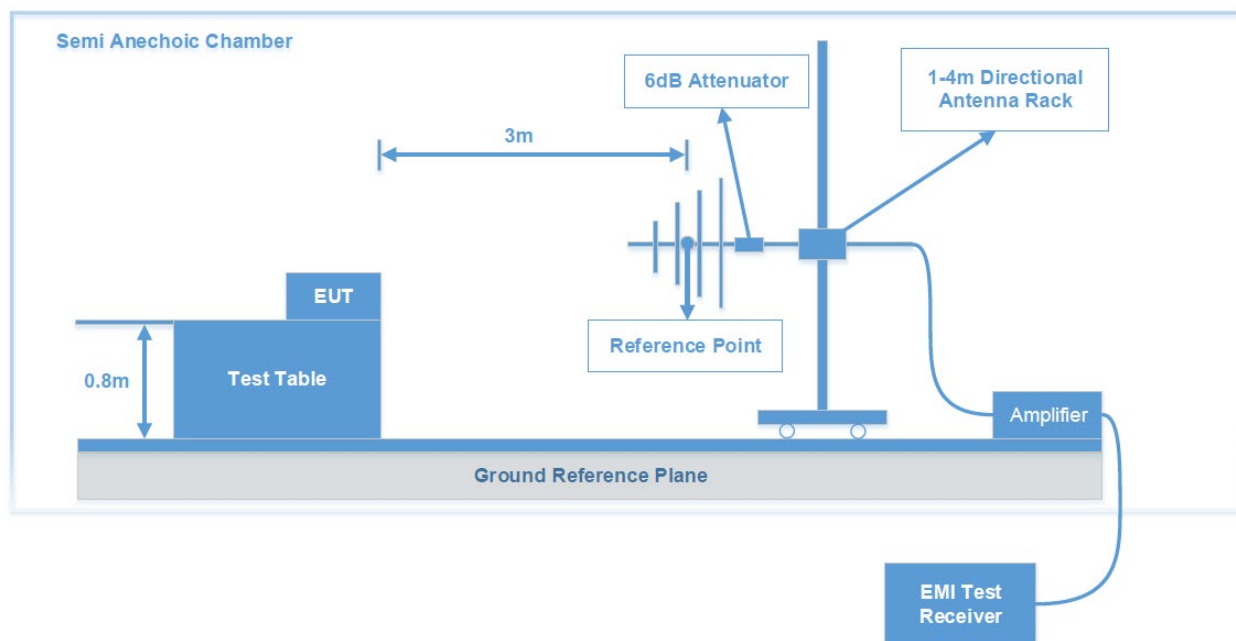Test System Setup**9 kHz - 30 MHz:****30 MHz - 1 GHz:**

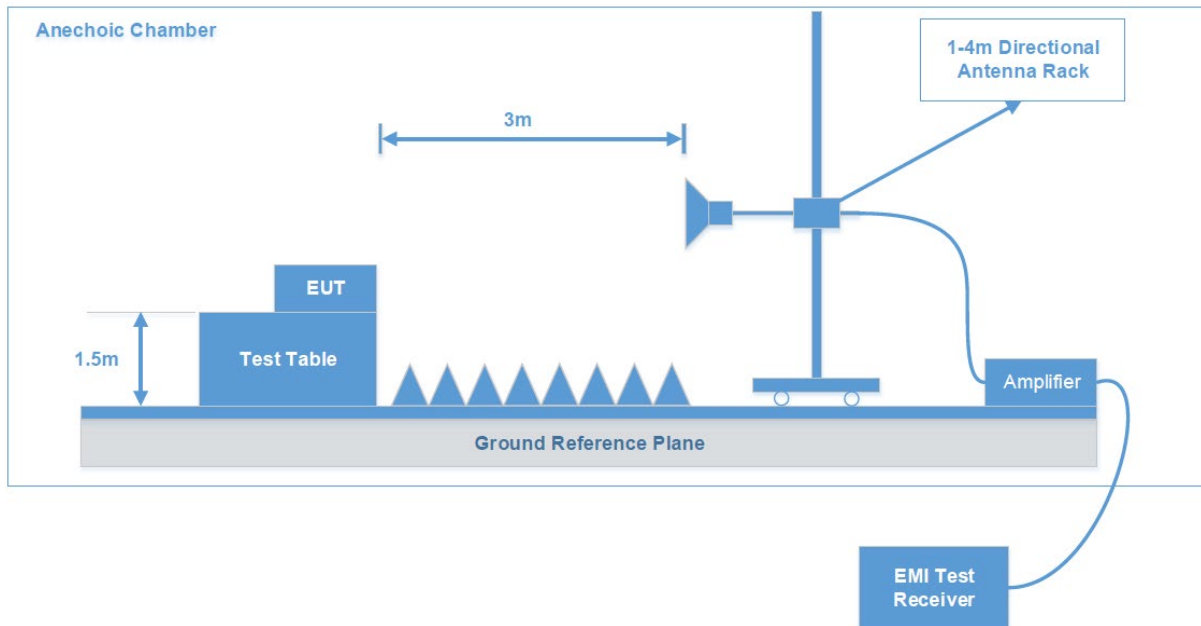Above 1 GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	VBW	IF B/W	Measurement
9 kHz - 150 kHz	200 Hz	1 kHz	200 Hz	QP/Average
150 kHz - 30 MHz	9 kHz	30 kHz	9 kHz	QP/ Average
30 MHz - 1000 MHz	100 kHz	300 kHz	/	Peak
	/	/	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	Peak
	1MHz	3 MHz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

For 9 kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dB μ V/m) = Meter Reading (dB μ V) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Note: The QuasiPeak (dB μ V/m), MaxPeak (dB μ V/m), Average (dB μ V/m) which shown in the data table are all Corrected Amplitude.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data: See Appendix

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Note: Offset (10.5dB) = Attenuator(10dB) + Cable loss(0.5dB)

Test Data: See Appendix

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.1

1. Set the RBW $\geq$ DTS bandwidth.
2. Set VBW $\geq 3 * \text{RBW}$.
3. Set span $\geq 3 * \text{RBW}$
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



Note: Offset (10.5dB) = Attenuator(10dB) + Cable loss(0.5dB)

Test Data: See Appendix

FCC §15.247(d) – BAND EDGE


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Test Data: See Appendix

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 * \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Test Data: See Appendix

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A-EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B_EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment EXHIBIT C-TEST SETUP PHOTOGRAPHS.

APPENDIX - TEST DATA

Environmental Conditions & Test Information

Test Item:	SPURIOUS EMISSIONS			DUTY CYCLE
	9kHz - 1GHz	1 GHz - 18 GHz	18 GHz - 25 GHz	
Test Date:	2024-12-18	2024-12-31	2025-05-06	2024-12-31
Temperature:	15.8 °C	25.7 °C	23.2 °C	25.7 °C
Relative Humidity:	43%	51 %	50 %	51 %
ATM Pressure:	103.1 kPa	102.8 kPa	101.6 kPa	102.8 kPa
Test Result:	Pass	Pass	Pass	/
Test Engineer:	Jerry Yan	Destine Hu	Hugh Wu	Jason Lu

Test Item:	6 DB EMISSION BANDWIDTH	MAXIMUM CONDUCTED OUTPUT POWER	BAND EDGE	POWER SPECTRAL DENSITY
Test Date:	2024-12-31	2024-12-31	2024-12-31	2024-12-31
Temperature:	25.7 °C	25.7 °C	25.7 °C	25.7 °C
Relative Humidity:	51 %	51 %	51 %	51 %
ATM Pressure:	102.8 kPa	102.8 kPa	102.8 kPa	102.8 kPa
Test Result:	Pass	Pass	Pass	Pass
Test Engineer:	Jason Lu	Jason Lu	Jason Lu	Jason Lu

SPURIOUS EMISSIONS

Test Result: Compliant.


EUT operation mode: Transmitting

After pre-scan in the X and Y axes of orientation, the worst case in the X axes of orientation is below:


9 kHz-30 MHz: (Transmitting in maximum output power BLE (1 Mbps) low channel)

Parallel(worst case)

9kHz-150kHz

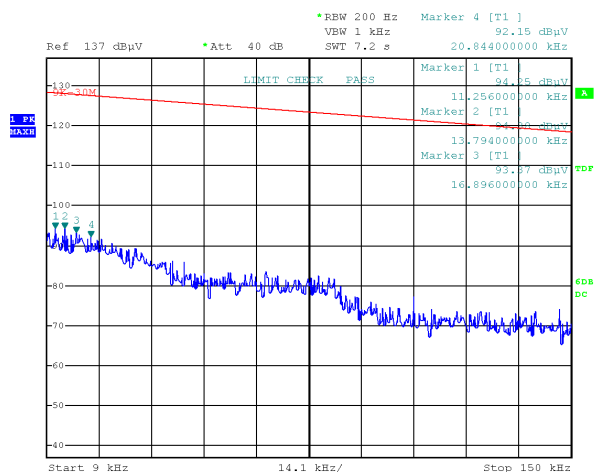

150kHz-30MHz

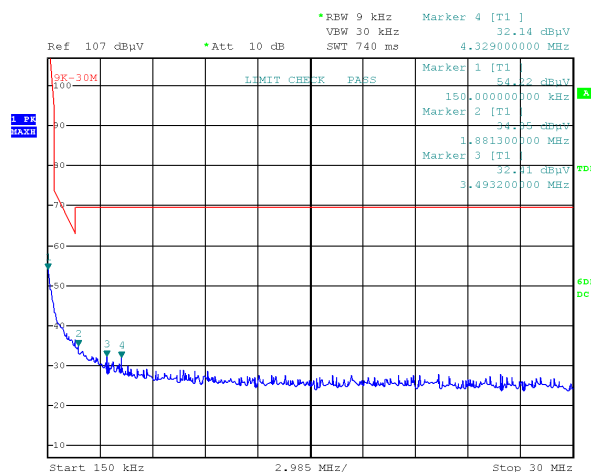

Project No.RKS241209003
Date: 18.DEC.2024 16:07:32

Tester:Jerry Yan

Project No.RKS241209003
Date: 18.DEC.2024 16:10:38

Tester:Jerry Yan

9kHz-150kHz

Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
0.011256	94.25	PK	55.56	126.58	32.33
0.013794	94.38	PK	53.95	124.81	30.43
0.016896	93.37	PK	51.98	123.05	29.68
0.020844	92.15	PK	49.76	121.23	29.08

150kHz-30MHz


Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
0.15000	54.22	PK	50.90	104.08	49.86
1.88130	34.35	PK	12.86	69.54	35.19
3.49320	32.41	PK	14.54	69.54	37.13
4.32900	32.14	PK	15.48	69.54	37.40

30 MHz - 1 GHz: (Transmitting in maximum output power BLE (1 Mbps) low channel)

Low Channel: 2402 MHz

Common Information

Project No: RKSB241209003
EUT Model: 9290046315
Test Mode: Transmitting in BLE-1M mode low channel
Standard: FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.247
Test Equipment: ESCI, JB3, 310N
Receiver Setting: RBW: 100 kHz, VBW: 300 kHz, Sweep Time: Auto
Temperature: 15.8°C
Humidity: 43%
Barometric Pressure: 103.1 kPa
Test Engineer: Jerry Yan
Test Date: 2024/12/18

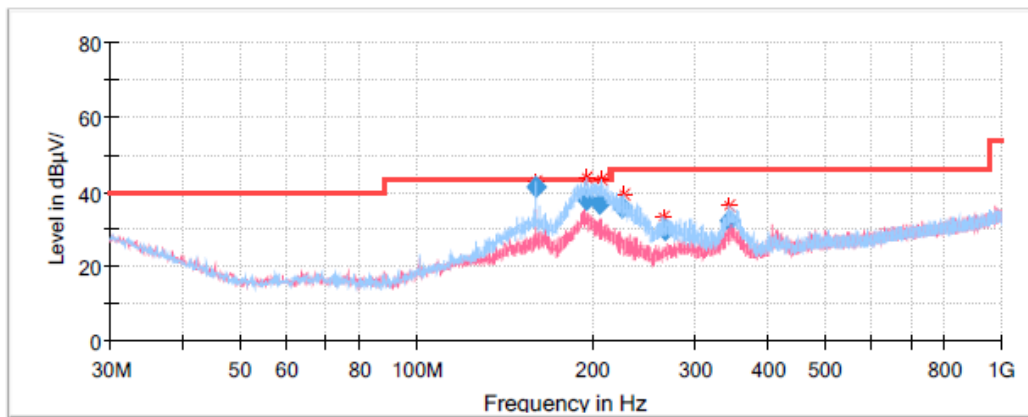

Final Result


Frequency (MHz)	QuasiPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Pol	Corr. (dB/m)
160.007600	41.30	43.50	2.20	H	-12.1
195.388100	37.97	43.50	5.53	H	-12.2
206.359800	36.88	43.50	6.62	H	-12.5
225.836850	35.64	46.00	10.36	H	-13.1
266.087750	29.77	46.00	16.23	H	-11.5
342.792450	32.34	46.00	13.66	H	-9.3

1 GHz-18 GHz:

Low Channel: 2402 MHz

Common Information

Project No.: RKSB241209003
 Test Mode: BLE 1M
 Standard: FCC Part 15.205& FCC Part 15.209& FCC Part 15.247
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Test Engineer: Destine Hu

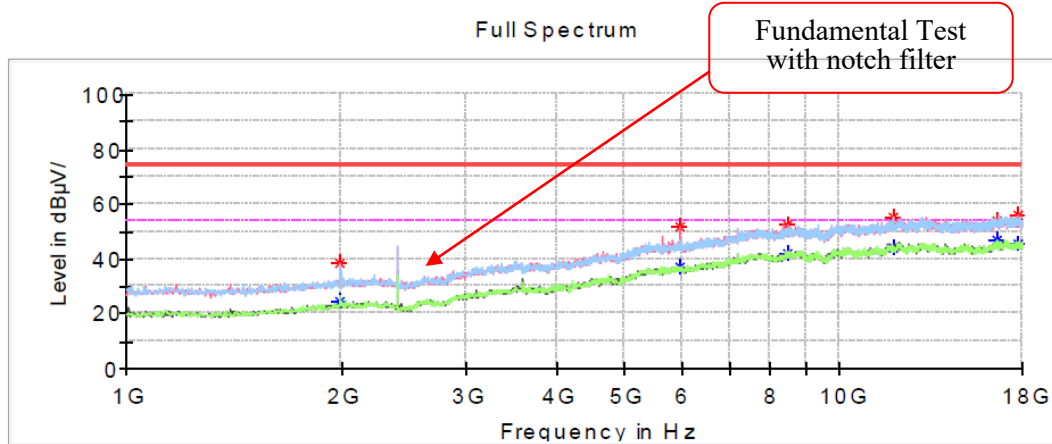


Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1996.200000	---	24.60	54.00	29.40	H	-11.8
1996.200000	38.69	---	74.00	35.31	H	-11.8
5974.200000	---	37.25	54.00	16.75	V	0.0
5974.200000	51.68	---	74.00	22.32	V	0.0
8429.000000	---	42.19	54.00	11.81	V	5.2
8429.000000	52.37	---	74.00	21.63	V	5.2
11849.400000	---	44.07	54.00	9.93	H	8.9
11849.400000	55.25	---	74.00	18.75	H	8.9
16572.000000	---	46.70	54.00	7.30	H	11.0
16572.000000	53.58	---	74.00	20.42	H	11.0
17785.800000	---	45.77	54.00	8.23	V	11.8
17785.800000	55.91	---	74.00	18.09	V	11.8

Middle Channel: 2440 MHz**Common Information**

Project No.:	RKS241209003
Test Mode:	BLE 1M
Standard:	FCC Part 15.205& FCC Part 15.209& FCC Part 15.247
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Test Engineer:	Destine Hu

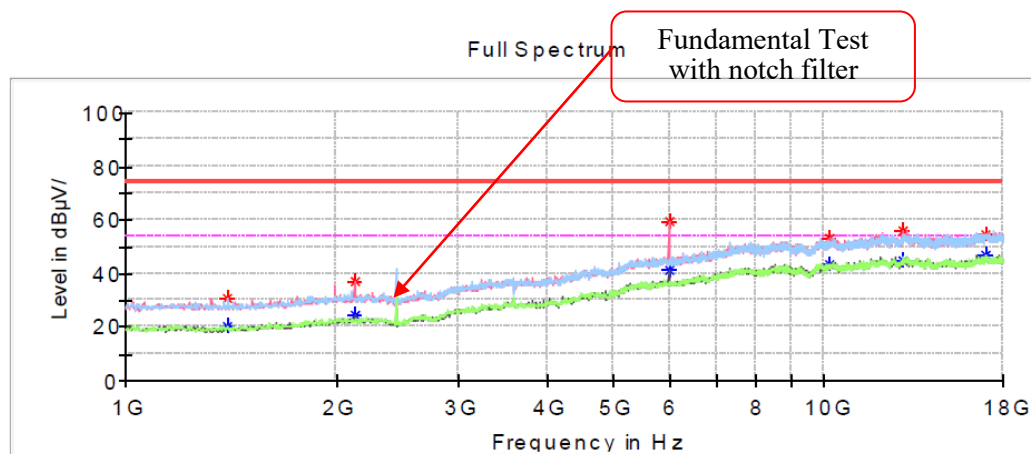
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1401.200000	30.72	---	74.00	43.28	H	-14.9
1401.200000	---	20.35	54.00	33.65	H	-14.9
2125.400000	36.87	---	74.00	37.13	V	-11.3
2125.400000	---	24.58	54.00	29.42	V	-11.3
5987.800000	---	41.39	54.00	12.61	V	0.0
5987.800000	59.13	---	74.00	14.87	V	0.0
10203.800000	---	43.69	54.00	10.31	V	7.1
10203.800000	53.21	---	74.00	20.79	V	7.1
12981.600000	---	44.63	54.00	9.37	H	9.7
12981.600000	55.84	---	74.00	18.16	H	9.7
17007.200000	---	47.18	54.00	6.82	H	12.3
17007.200000	54.38	---	74.00	19.62	H	12.3

High Channel: 2480 MHz**Common Information**

Project No.: RKS241209003
Test Mode: BLE 1M
Standard: FCC Part 15.205& FCC Part 15.209& FCC Part 15.247
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Test Engineer: Destine Hu


Full Spectrum

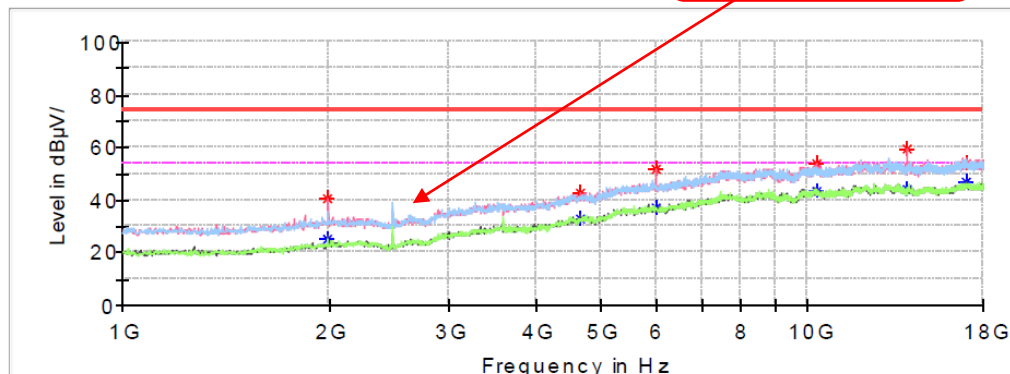Fundamental Test
with notch filter**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1996.200000	---	25.47	54.00	28.53	V	-11.8
1996.200000	40.69	---	74.00	33.31	V	-11.8
4658.400000	---	32.92	54.00	21.08	V	-3.7
4658.400000	42.85	---	74.00	31.15	V	-3.7
5994.600000	51.58	---	74.00	22.42	V	0.0
5994.600000	---	36.96	54.00	17.04	V	0.0
10319.400000	---	43.35	54.00	10.65	H	7.1
10319.400000	53.79	---	74.00	20.21	H	7.1
13977.800000	59.17	---	74.00	14.83	V	9.8
13977.800000	---	43.85	54.00	10.15	V	9.8
16986.800000	54.10	---	74.00	19.90	H	12.2
16986.800000	---	46.86	54.00	7.14	H	12.2

Restricted Bands Emission:**Left Side****Common Information**

Project No.: RKSB241209003
Test Mode: BLE 1M
Standard: FCC Part 15.205& FCC Part 15.209& FCC Part 15.247
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Test Engineer: Destine Hu

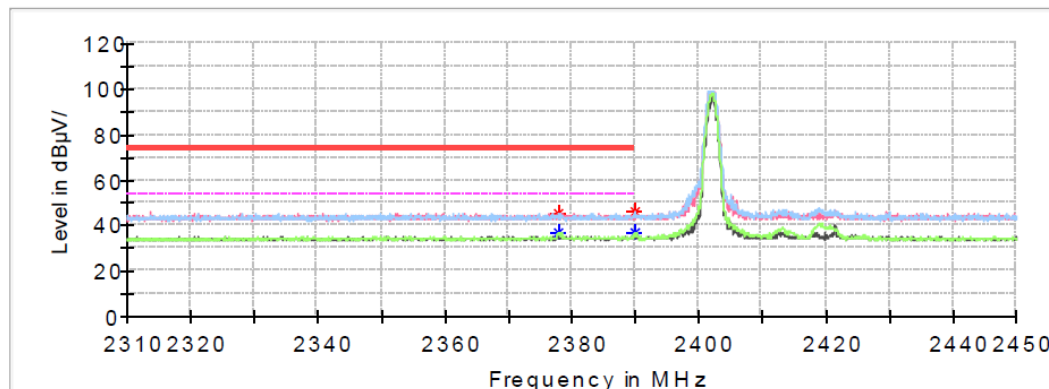Full Spectrum**Critical Freqs**


Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2377.984000	45.73	---	74.00	28.27	H	-0.6
2377.984000	---	37.26	54.00	16.74	H	-0.6
2389.856000	46.00	---	74.00	28.00	H	-0.6
2389.856000	---	37.07	54.00	16.93	H	-0.6

Right Side

Common Information


Project No.: RKSB241209003
Test Mode: BLE 1M
Standard: FCC Part 15.205& FCC Part 15.209& FCC Part 15.247
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Test Engineer: Destine Hu

Full Spectrum

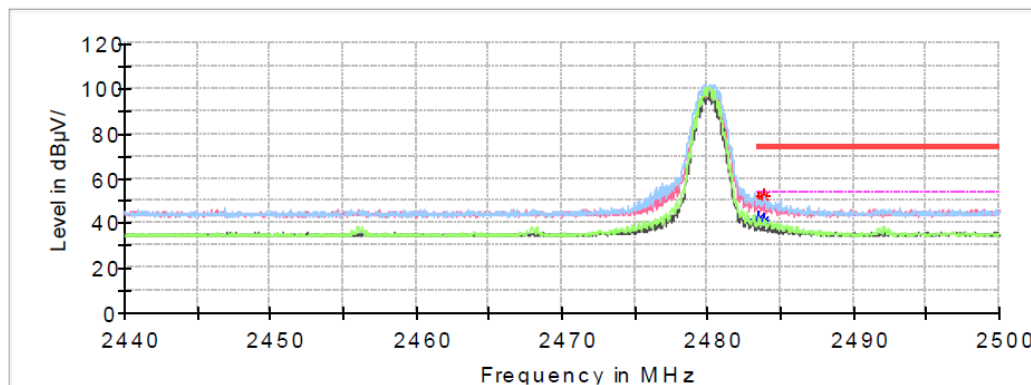


Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2483.512000	---	42.11	54.00	11.89	H	-0.3
2483.512000	50.63	---	74.00	23.37	H	-0.3
2483.896000	---	41.26	54.00	12.74	H	-0.3
2483.896000	52.18	---	74.00	21.82	H	-0.3

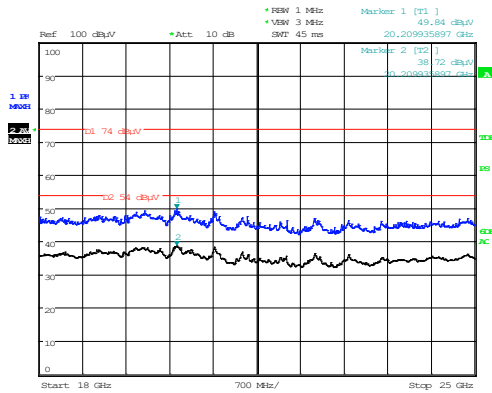18 GHz - 25 GHz (low channel was worst):**Horizontal**

Project No : RKSB241209003
 Date: 6.MAY.2025 10:13:43
 Tester :Rugh Wu

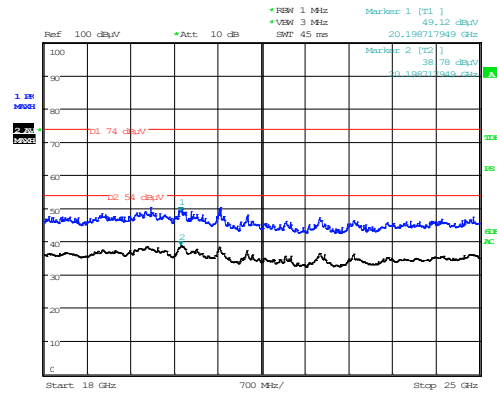Vertical

Project No : RKSB241209003
 Date: 6.MAY.2025 10:49:47
 Tester :Rugh Wu

Frequency	MaxPeak	Average	Limit	Margin	Pol	Corr.
(MHz)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)		(dB/m)
20198.72	---	38.78	54	15.22	V	12.46
20198.72	49.12	---	74	24.88	V	12.46
20209.94	---	38.72	54	15.28	H	12.47
20209.94	49.84	---	74	24.16	H	12.47


Note: The test distance is 3m. The limit is 74dBμV/m (Peak) and 54dBμV/m (Average)

6 dB EMISSION BANDWIDTH


Mode	Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
BLE (1 Mbps)	Low	2402	0.765	≥0.5
	Middle	2440	0.785	≥0.5
	High	2480	0.789	≥0.5

BLE (1 Mbps)


Low Channel

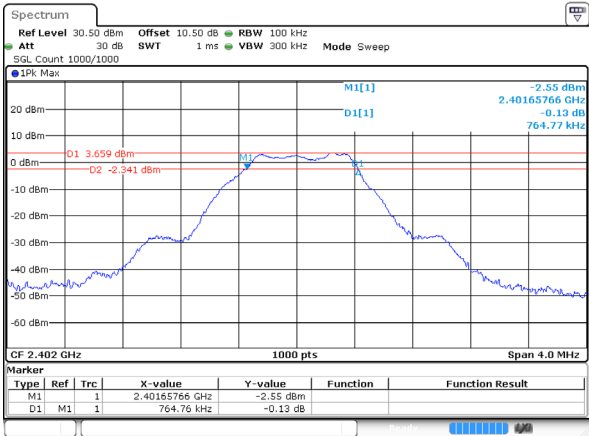

Middle Channel

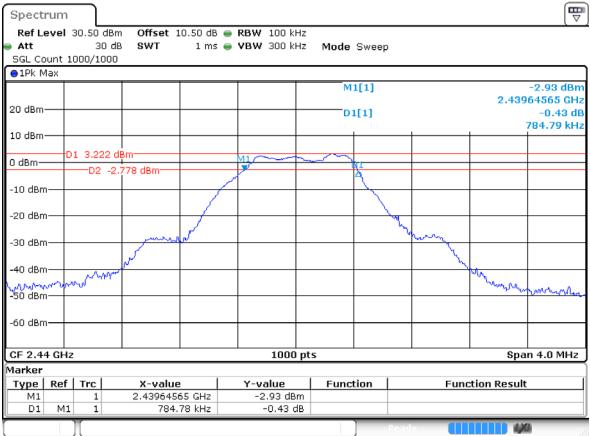


High Channel

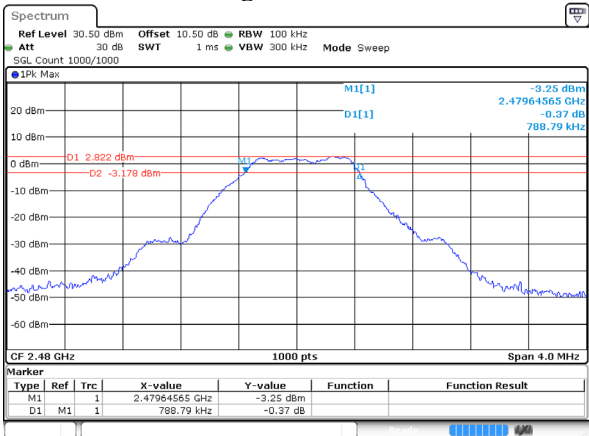


MAXIMUM CONDUCTED OUTPUT POWER**Test Result:** Compliant.*EUT operation mode: Transmitting*


Mode	Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
BLE (1 Mbps)	Low	2402	3.84	30	Pass
	Middle	2440	3.51	30	Pass
	High	2480	3.22	30	Pass

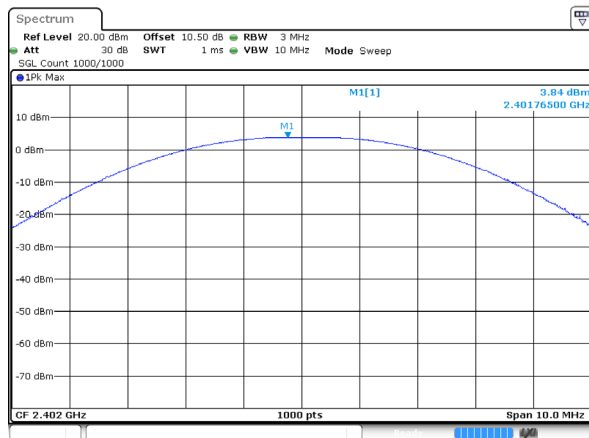BLE (1 Mbps)**Low Channel**

ProjectNo.: RKSB241209003 Tester: Jason Lu
Date: 31 DEC 2024 17:16:01

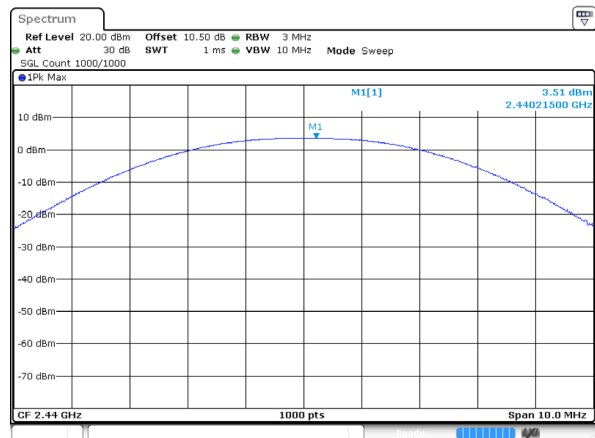Middle Channel

ProjectNo.: RKSB241209003 Tester: Jason Lu
Date: 31 DEC 2024 17:12:46

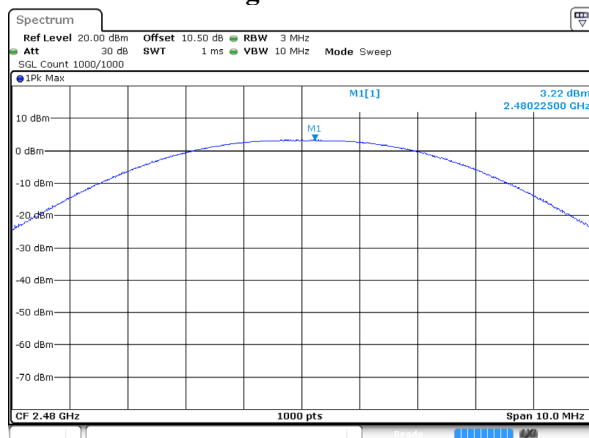High Channel

ProjectNo.: RKSB241209003 Tester: Jason Lu
Date: 31 DEC 2024 17:18:44


BAND EDGE

Test Result: Compliant.


EUT operation mode: Transmitting

Mode	Channel	Frequency (MHz)	Result (dBc)	Limit (dBc)
BLE (1 Mbps)	Low	2402	42.85	20
	High	2480	51.15	

BLE (1 Mbps)

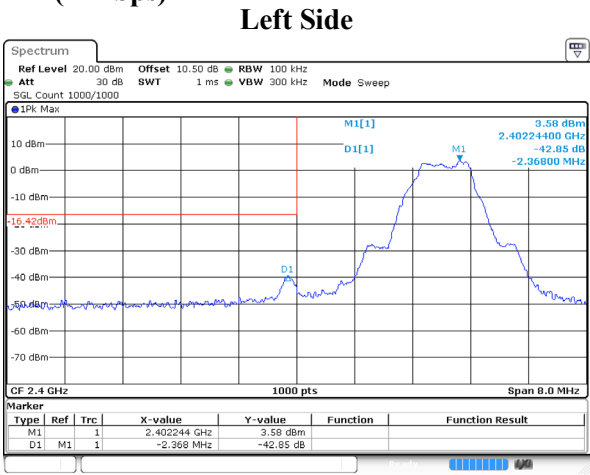


ProjectNo: RKSB241209003 Tester: Jason Lu
Date: 31 DEC 2024 17:13:59

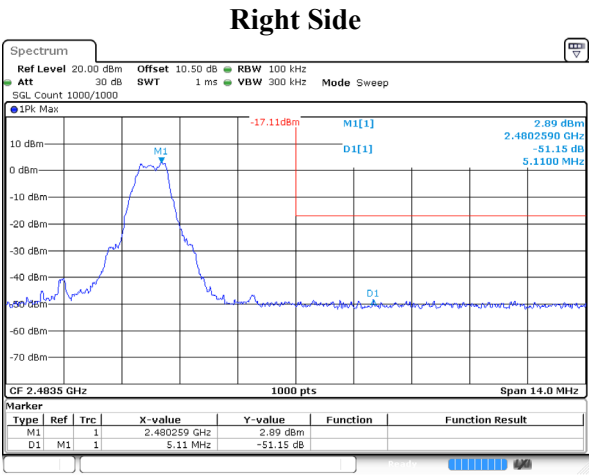


ProjectNo: RKSB241209003 Tester: Jason Lu
Date: 31 DEC 2024 17:16:58

POWER SPECTRAL DENSITY**Test Result:** Compliant.*EUT operation mode: Transmitting*


Mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
BLE (1 Mbps)	Low	2402	-11.36	≤8
	Middle	2440	-11.78	≤8
	High	2480	-11.39	≤8

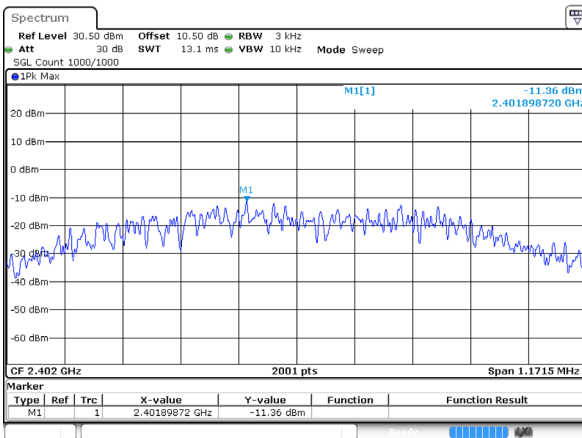BLE (1 Mbps)**Low Channel**

ProjectNo.: RKSB241209003 Tester: Jason Lu
Date: 31 DEC 2024 17:16:23

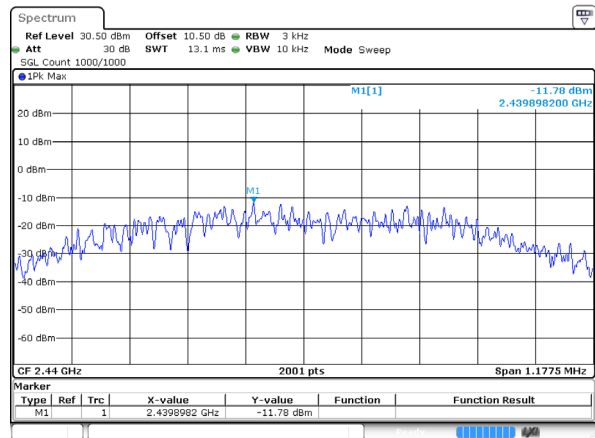Middle Channel

ProjectNo.: RKSB241209003 Tester: Jason Lu
Date: 31 DEC 2024 17:13:08

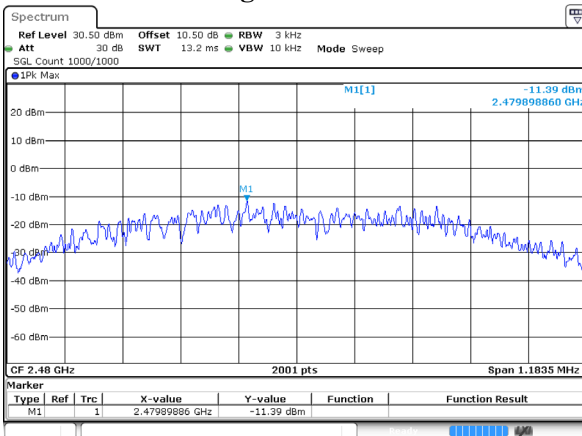High Channel

ProjectNo.: RKSB241209003 Tester: Jason Lu
Date: 31 DEC 2024 17:19:06

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95.45% confidence interval.

******* END OF REPORT *******