



PSD NVNT a 5745MHz Ant B

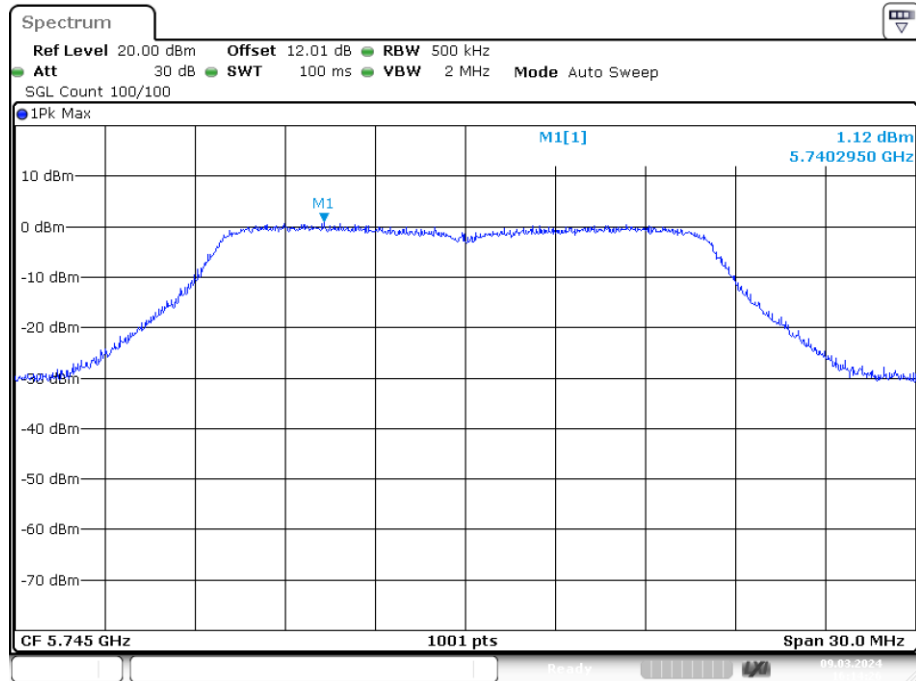


Date: 9.MAR.2024 16:14:26

PSD NVNT a 5785MHz Ant B

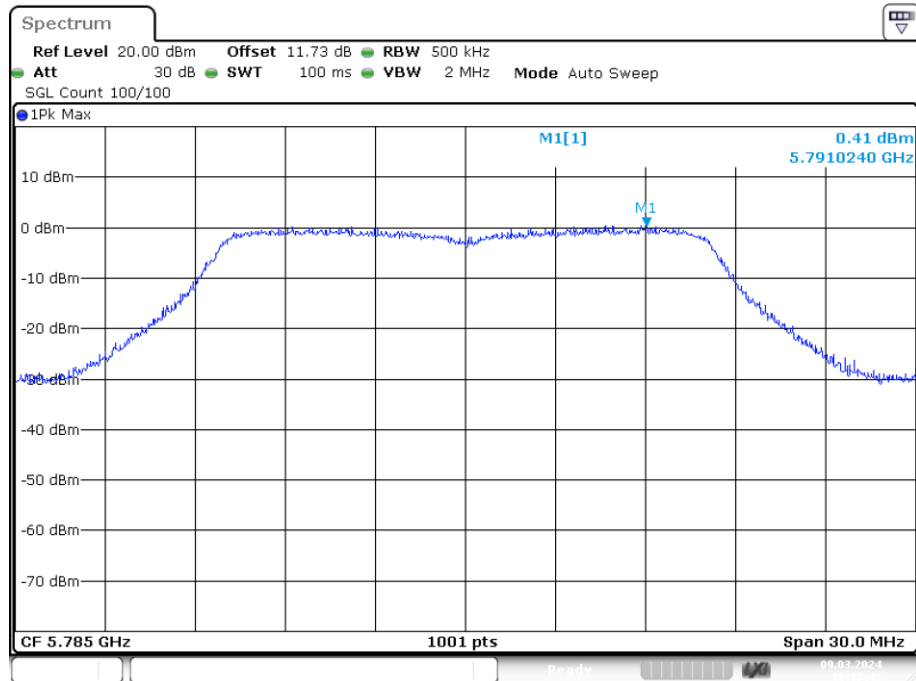


Date: 9.MAR.2024 16:17:43

PSD NVNT a 5825MHz Ant B

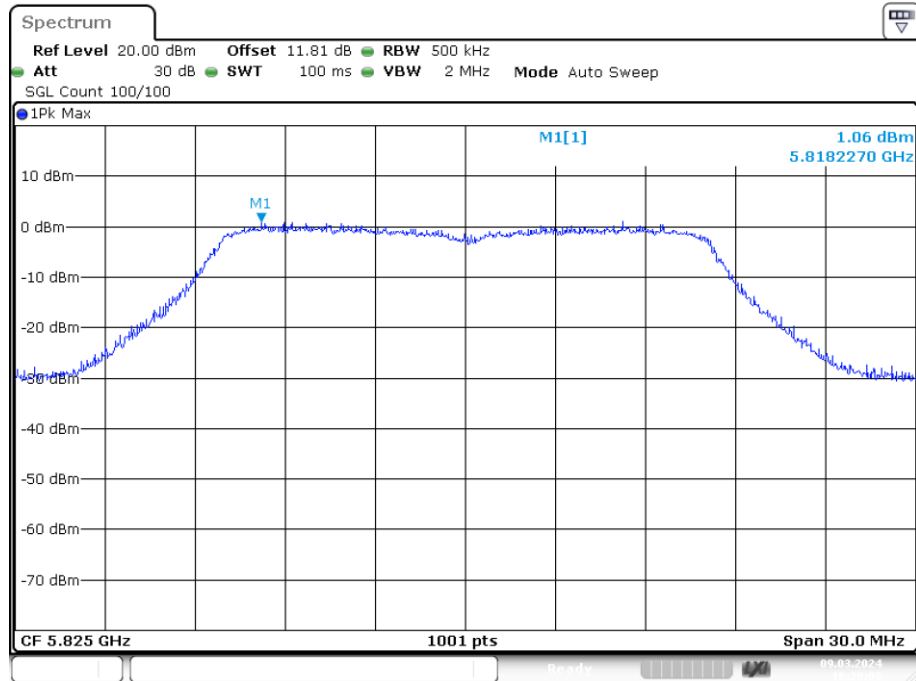


Date: 9.MAR.2024 16:20:08

PSD NVNT ac20 5745MHz Ant B

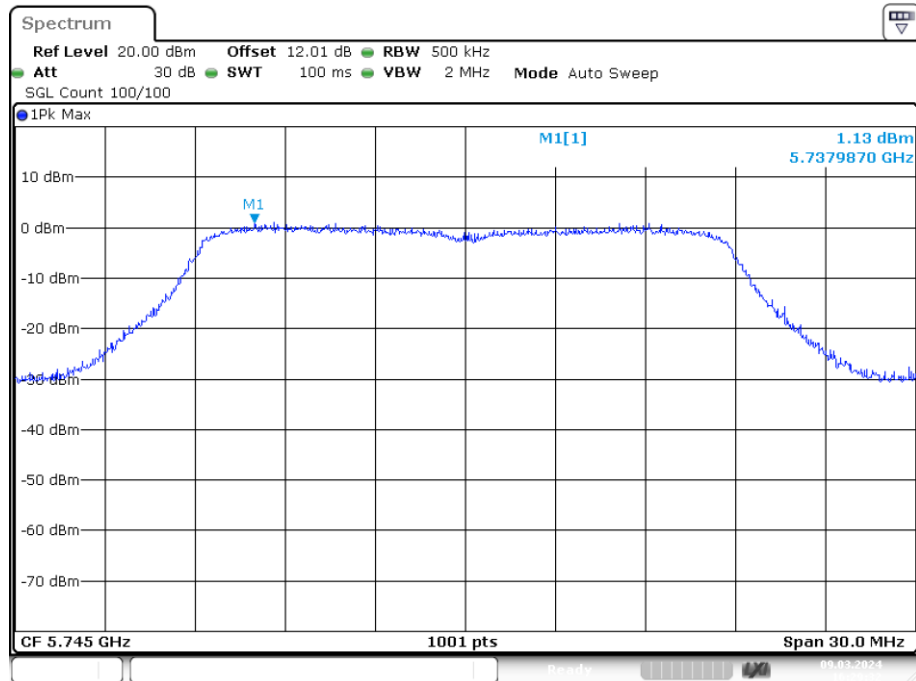


Date: 9.MAR.2024 16:29:32

PSD NVNT ac20 5785MHz Ant B

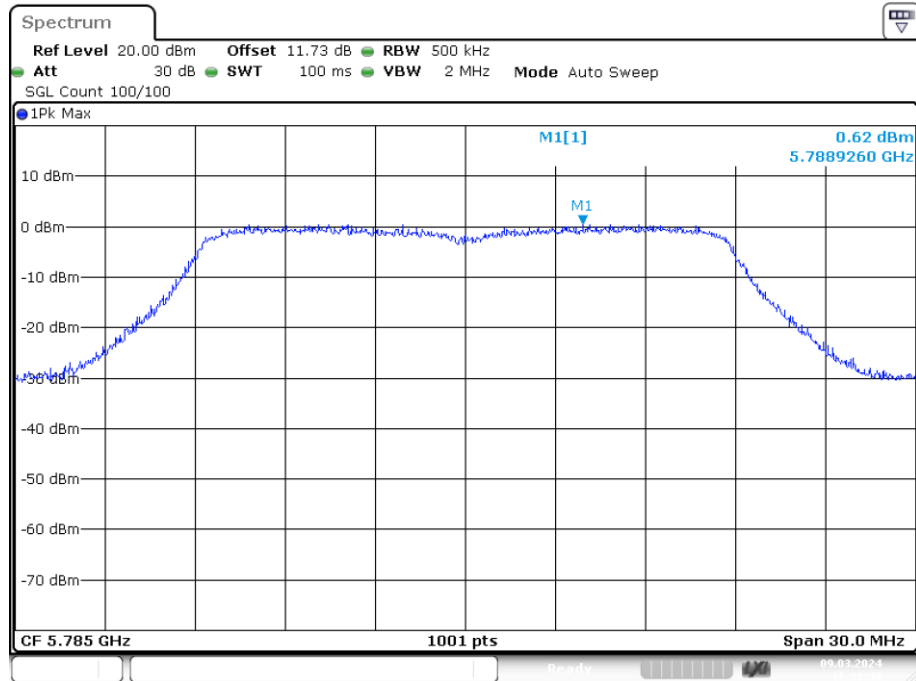


Date: 9.MAR.2024 16:31:40

PSD NVNT ac20 5825MHz Ant B

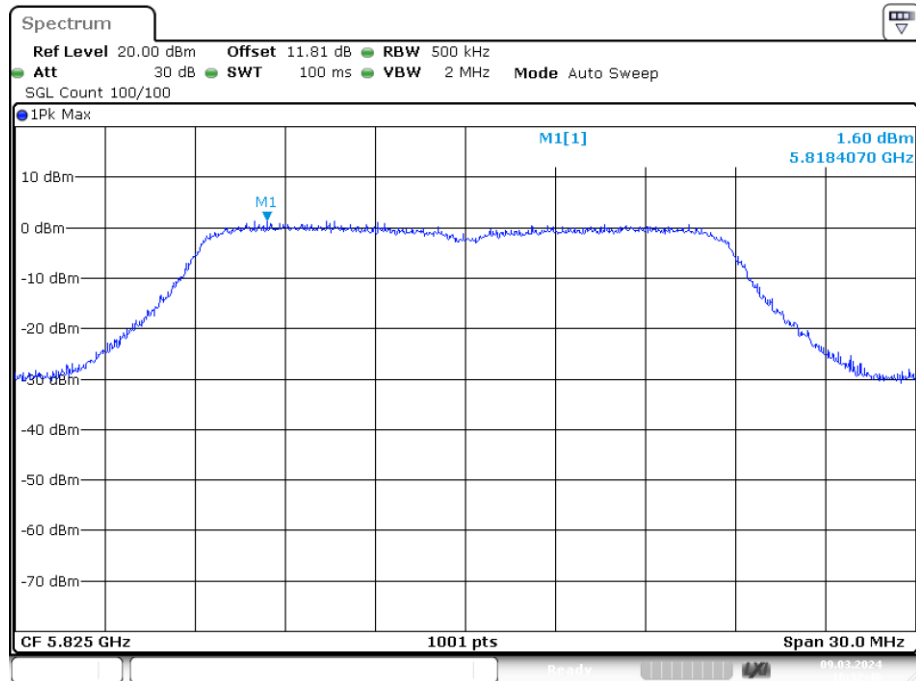


Date: 9.MAR.2024 16:32:46

PSD NVNT ac40 5755MHz Ant B

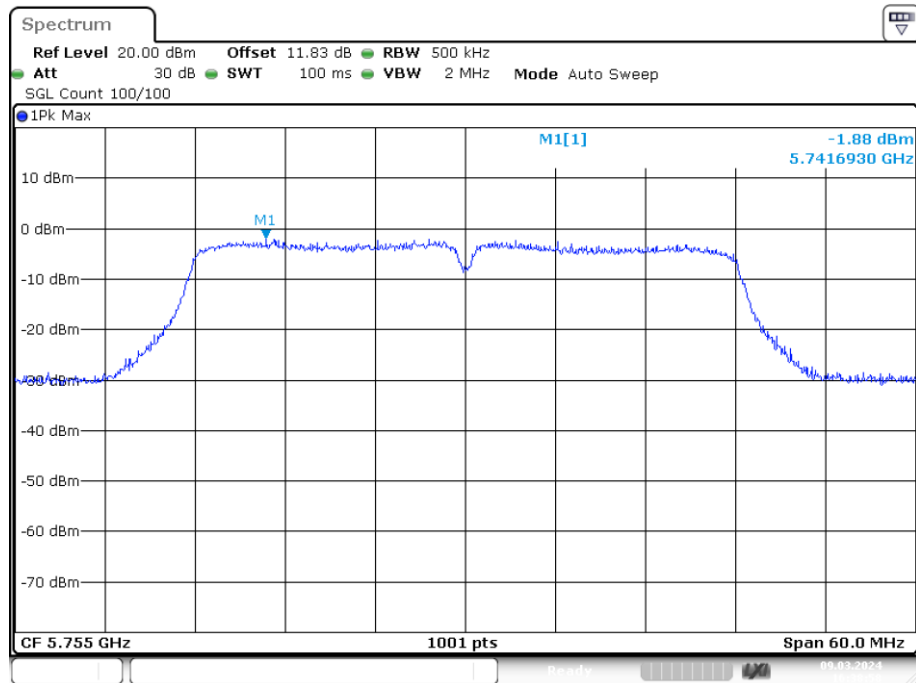


Date: 9.MAR.2024 16:38:57

PSD NVNT ac40 5795MHz Ant B

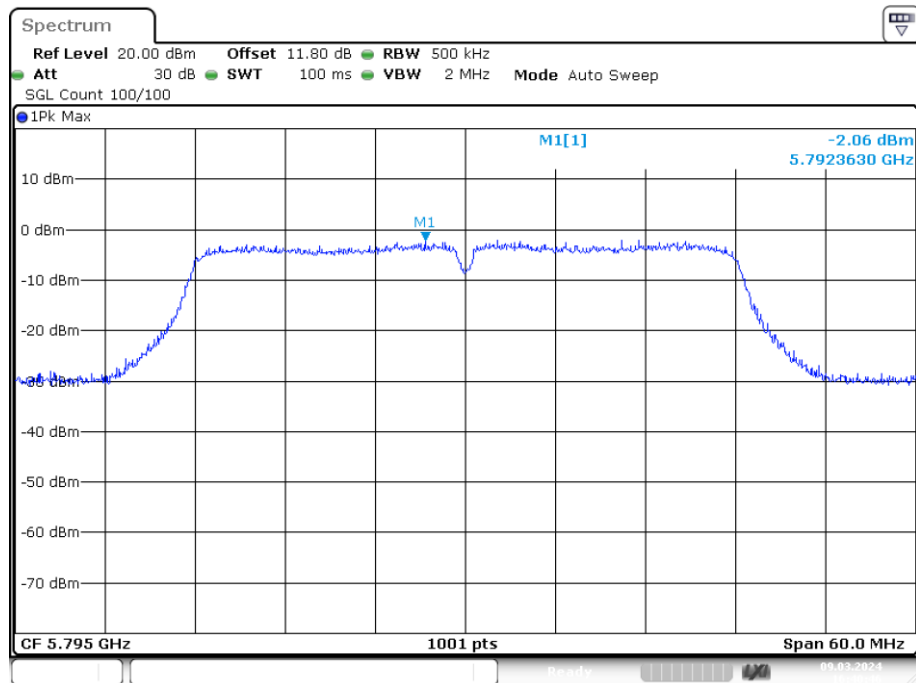


Date: 9.MAR.2024 16:40:45

PSD NVNT ac80 5775MHz Ant B

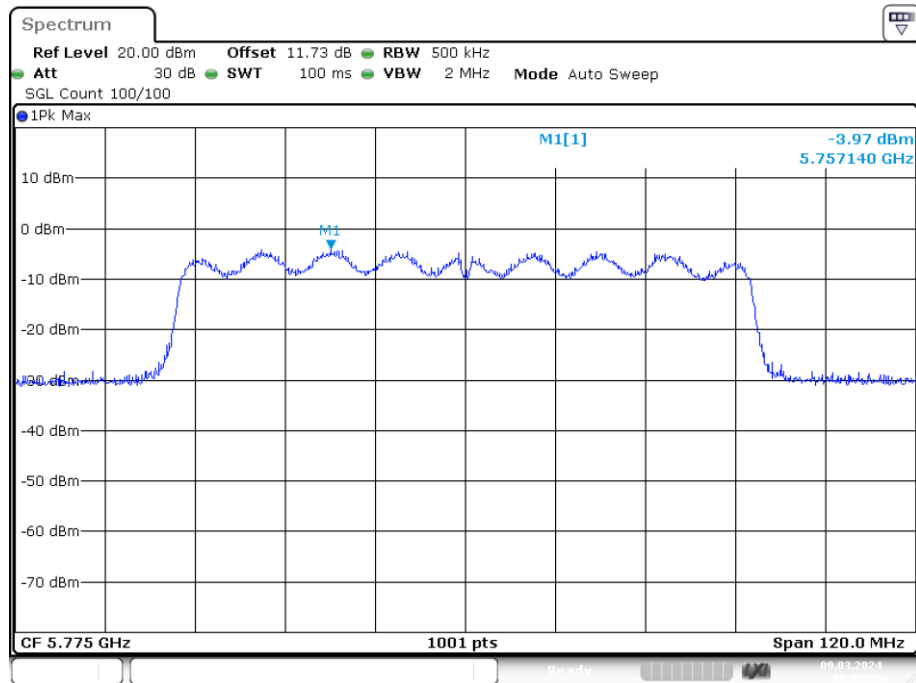


Date: 9.MAR.2024 16:42:36

PSD NVNT n20 5745MHz Ant B

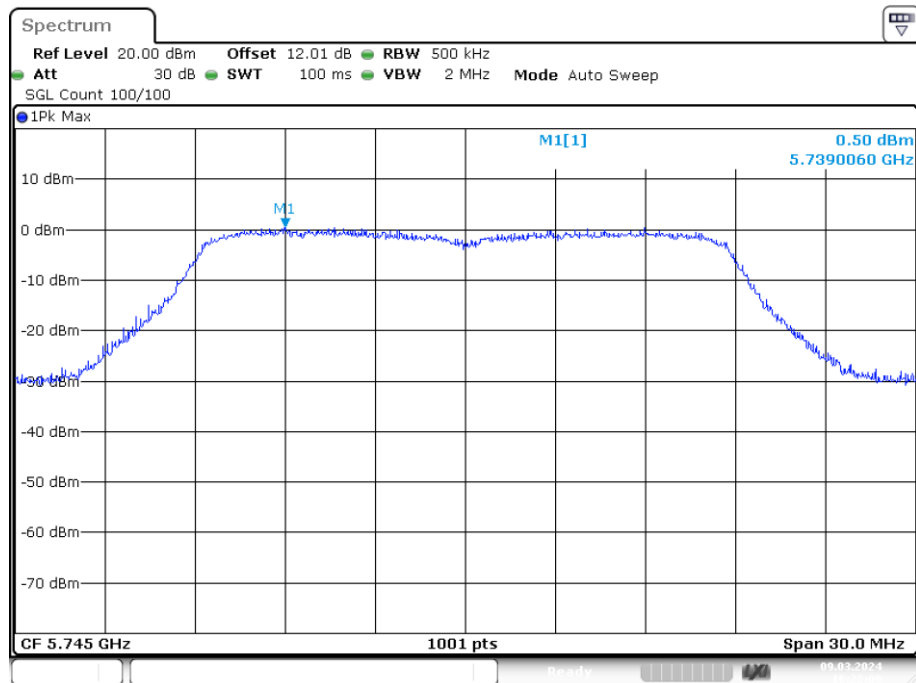


Date: 9.MAR.2024 16:22:09

PSD NVNT n20 5785MHz Ant B

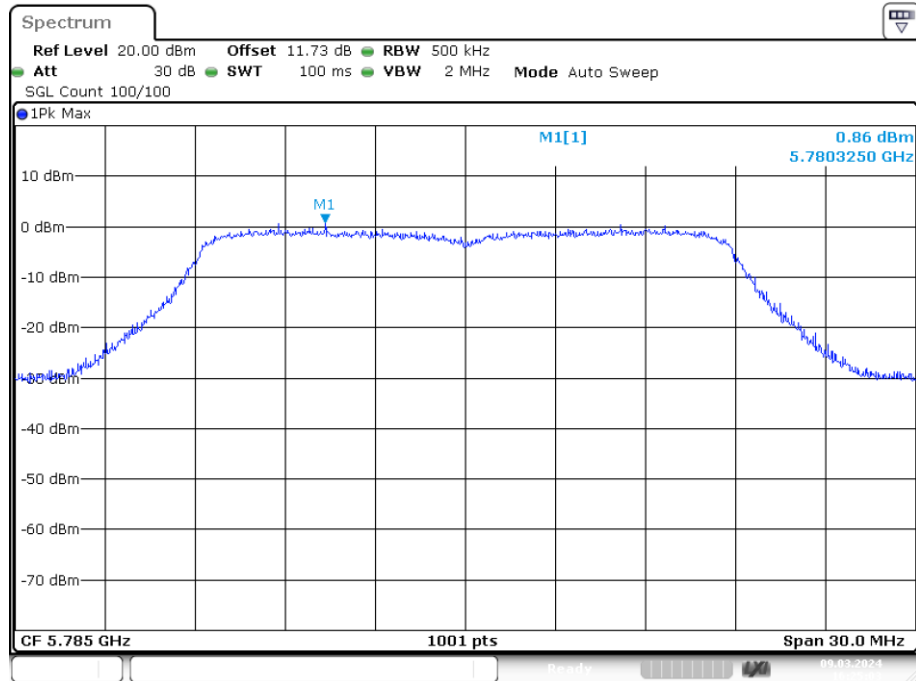


Date: 9.MAR.2024 16:25:03

PSD NVNT n20 5825MHz Ant B

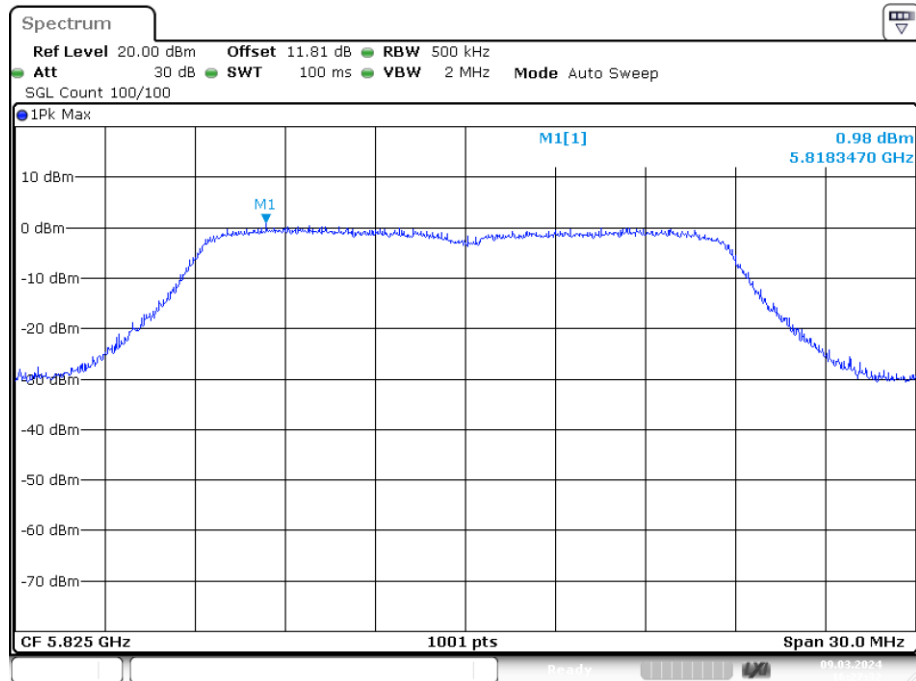


Date: 9.MAR.2024 16:27:32

PSD NVNT n40 5755MHz Ant B

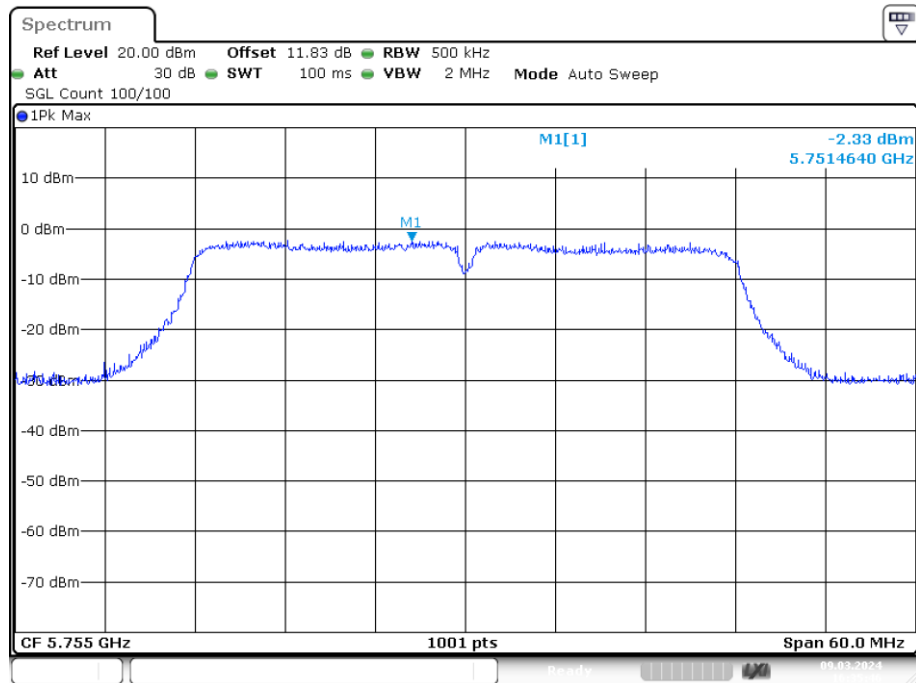

Date: 9.MAR.2024 16:35:46


PSD NVNT n40 5795MHz Ant B

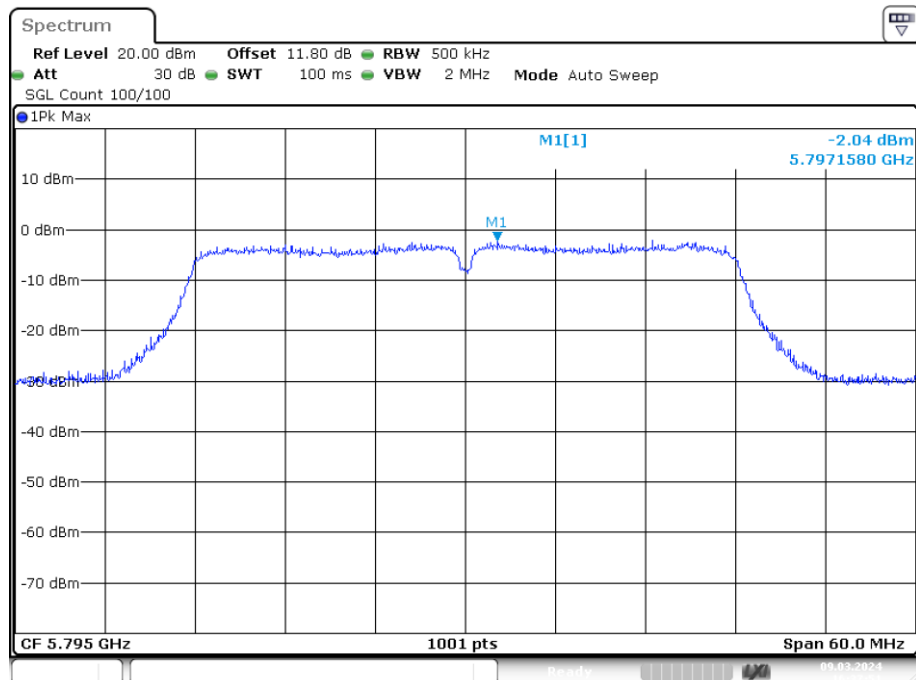

Date: 9.MAR.2024 16:37:51

4.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 and 15.205																								
Test Method:	ANSI C63.10:2013																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>AV</td><td>1MHz</td><td>3MHz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	AV	1MHz	3MHz	Average Value																					
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr><tr><td>68.2</td><td>Peak Value</td></tr></table> Undesirable emission limits: (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band. (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	68.2	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	68.2	Peak Value																							
Test Procedure:	a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																								
Test setup:	Above 1GHz																								

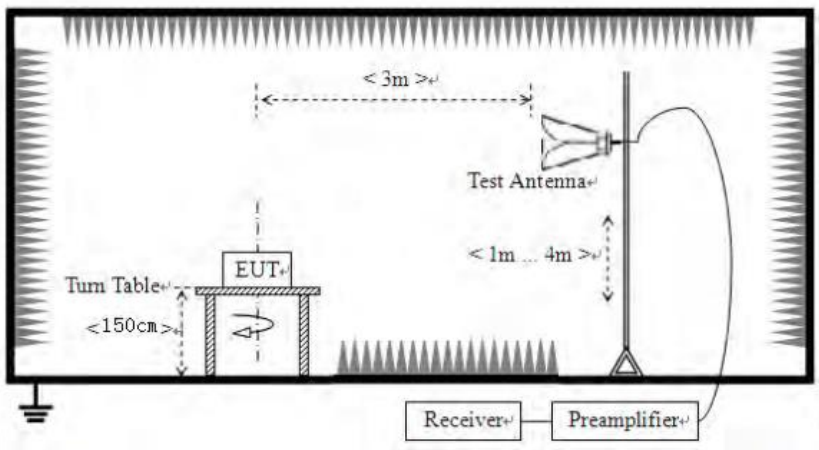	
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Remark:

According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2,$$

For example, if EIRP = -27dBm

$$E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$$

Measurement Data:**Band1**

Mode:		802.11a		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	38.74	17.18	55.92	68.20	-12.28	PK
V	5150.00	38.00	17.18	55.18	68.20	-13.02	PK
Mode:		802.11a		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.35	17.18	41.53	54.00	-12.47	AV
V	5150.00	26.81	17.18	43.99	54.00	-10.01	AV
Mode:		802.11a		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.28	17.18	51.46	68.20	-16.74	PK
V	5350.00	34.99	17.18	52.17	68.20	-16.03	PK
Mode:		802.11a		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	26.65	17.18	43.83	54.00	-10.17	AV
V	5350.00	24.12	17.18	41.30	54.00	-12.70	AV

Mode:		802.11n(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	35.75	17.18	52.93	68.20	-15.27	PK
V	5150.00	35.76	17.18	52.94	68.20	-15.26	PK
Mode:		802.11n(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.66	17.18	41.84	54.00	-12.16	AV
V	5150.00	26.01	17.18	43.19	54.00	-10.81	AV
Mode:		802.11n(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.20	17.18	51.38	68.20	-16.82	PK
V	5350.00	35.68	17.18	52.86	68.20	-15.34	PK
Mode:		802.11n(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	28.43	17.18	45.61	54.00	-8.39	AV
V	5350.00	25.31	17.18	42.49	54.00	-11.51	AV

Mode:		802.11ac(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	37.76	17.18	54.94	68.20	-13.26	PK
V	5150.00	37.86	17.18	55.04	68.20	-13.16	PK
Mode:		802.11ac(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	25.35	17.18	42.53	54.00	-11.47	AV
V	5150.00	25.12	17.18	42.30	54.00	-11.70	AV
Mode:		802.11ac(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.92	17.18	52.10	68.20	-16.10	PK
V	5350.00	34.11	17.18	51.29	68.20	-16.91	PK
Mode:		802.11ac(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	26.72	17.18	43.90	54.00	-10.10	AV
V	5350.00	25.12	17.18	42.30	54.00	-11.70	AV

Mode:		802.11n(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	38.61	17.18	55.79	68.20	-12.41	PK
V	5150.00	35.12	17.18	52.30	68.20	-15.90	PK
Mode:		802.11n(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	22.54	17.18	39.72	54.00	-14.28	AV
V	5150.00	26.09	17.18	43.27	54.00	-10.73	AV
Mode:		802.11n(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	36.52	17.18	53.70	68.20	-14.50	PK
V	5350.00	34.81	17.18	51.99	68.20	-16.21	PK
Mode:		802.11n(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	27.46	17.18	44.64	54.00	-9.36	AV
V	5350.00	25.00	17.18	42.18	54.00	-11.82	AV

Mode:		802.11ac(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	36.24	17.18	53.42	68.20	-14.78	PK
V	5150.00	35.87	17.18	53.05	68.20	-15.15	PK
Mode:		802.11ac(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.32	17.18	41.50	54.00	-12.50	AV
V	5150.00	26.87	17.18	44.05	54.00	-9.95	AV
Mode:		802.11ac(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.83	17.18	52.01	68.20	-16.19	PK
V	5350.00	34.39	17.18	51.57	68.20	-16.63	PK
Mode:		802.11ac(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	30.26	17.18	47.44	54.00	-6.56	AV
V	5350.00	25.00	17.18	42.18	54.00	-11.82	AV

Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	37.92	17.18	55.10	68.20	-13.10	PK
V	5150.00	35.59	17.18	52.77	68.20	-15.43	PK
Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.26	17.18	41.44	54.00	-12.56	AV
V	5150.00	26.14	17.18	43.32	54.00	-10.68	AV
Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	36.48	17.18	53.66	68.20	-14.54	PK
V	5350.00	34.26	17.18	51.44	68.20	-16.76	PK
Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	29.78	17.18	46.96	54.00	-7.04	AV
V	5350.00	22.44	17.18	39.62	54.00	-14.38	AV

Band2

Mode:		802.11a		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	36.24	17.19	53.43	68.20	-14.77	PK
V	5150.00	36.11	17.19	53.30	68.20	-14.90	PK
Mode:		802.11a		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	25.58	17.19	42.77	54.00	-11.23	AV
V	5150.00	26.71	17.19	43.90	54.00	-10.10	AV
Mode:		802.11a		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	37.46	17.19	54.65	68.20	-13.55	PK
V	5350.00	33.83	17.19	51.02	68.20	-17.18	PK
Mode:		802.11a		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	30.24	17.19	47.43	54.00	-6.57	AV
V	5350.00	23.24	17.19	40.43	54.00	-13.57	AV

Mode:		802.11n(HT20)		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	35.09	17.19	52.28	68.20	-15.92	PK
V	5150.00	36.58	17.19	53.77	68.20	-14.43	PK
Mode:		802.11n(HT20)		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	23.78	17.19	40.97	54.00	-13.03	AV
V	5150.00	25.23	17.19	42.42	54.00	-11.58	AV
Mode:		802.11n(HT20)		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	37.53	17.19	54.72	68.20	-13.48	PK
V	5350.00	34.24	17.19	51.43	68.20	-16.77	PK
Mode:		802.11n(HT20)		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	30.47	17.19	47.66	54.00	-6.34	AV
V	5350.00	24.54	17.19	41.73	54.00	-12.27	AV

Mode:		802.11ac(HT20)		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	36.08	17.19	53.27	68.20	-14.93	PK
V	5150.00	35.41	17.19	52.60	68.20	-15.60	PK
Mode:		802.11ac(HT20)		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	21.79	17.19	38.98	54.00	-15.02	AV
V	5150.00	25.56	17.19	42.75	54.00	-11.25	AV
Mode:		802.11ac(HT20)		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	36.50	17.19	53.69	68.20	-14.51	PK
V	5350.00	33.06	17.19	50.25	68.20	-17.95	PK
Mode:		802.11ac(HT20)		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	29.97	17.19	47.16	54.00	-6.84	AV
V	5350.00	24.97	17.19	42.16	54.00	-11.84	AV

Mode:		802.11n(HT40)		Frequency:		5270MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	35.17	17.19	52.36	68.20	-15.84	PK
V	5150.00	36.25	17.19	53.44	68.20	-14.76	PK
Mode:		802.11n(HT40)		Frequency:		5270MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.18	17.19	41.37	54.00	-12.63	AV
V	5150.00	23.68	17.19	40.87	54.00	-13.13	AV
Mode:		802.11n(HT40)		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	36.15	17.19	53.34	68.20	-14.86	PK
V	5350.00	35.61	17.19	52.80	68.20	-15.40	PK
Mode:		802.11n(HT40)		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	26.75	17.19	43.94	54.00	-10.06	AV
V	5350.00	25.08	17.19	42.27	54.00	-11.73	AV

Mode:		802.11ac(HT40)		Frequency:		5270MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	38.71	17.19	55.90	68.20	-12.30	PK
V	5150.00	36.91	17.19	54.10	68.20	-14.10	PK
Mode:		802.11ac(HT40)		Frequency:		5270MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	25.22	17.19	42.41	54.00	-11.59	AV
V	5150.00	25.71	17.19	42.90	54.00	-11.10	AV
Mode:		802.11ac(HT40)		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	35.69	17.19	52.88	68.20	-15.32	PK
V	5350.00	34.62	17.19	51.81	68.20	-16.39	PK
Mode:		802.11ac(HT40)		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	29.77	17.19	46.96	54.00	-7.04	AV
V	5350.00	23.72	17.19	40.91	54.00	-13.09	AV

Mode:		802.11ac(HT80)		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	38.06	17.19	55.25	68.20	-12.95	PK
V	5150.00	35.86	17.19	53.05	68.20	-15.15	PK
Mode:		802.11ac(HT80)		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.23	17.19	41.42	54.00	-12.58	AV
V	5150.00	25.25	17.19	42.44	54.00	-11.56	AV
Mode:		802.11ac(HT80)		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.17	17.19	51.36	68.20	-16.84	PK
V	5350.00	34.30	17.19	51.49	68.20	-16.71	PK
Mode:		802.11ac(HT80)		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	28.56	17.19	45.75	54.00	-8.25	AV
V	5350.00	25.71	17.19	42.90	54.00	-11.10	AV

Band3

Mode:		802.11a		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5470.00	35.96	17.21	53.17	68.20	-15.03	PK
V	5470.00	35.62	17.21	52.83	68.20	-15.37	PK
Mode:		802.11a		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5470.00	25.55	17.21	42.76	54.00	-11.24	AV
V	5470.00	26.98	17.21	44.19	54.00	-9.81	AV
Mode:		802.11a		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	34.81	17.21	52.02	68.20	-16.18	PK
V	5725.00	34.66	17.21	51.87	68.20	-16.33	PK
Mode:		802.11a		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	27.48	17.21	44.69	54.00	-9.31	AV
V	5725.00	24.65	17.21	41.86	54.00	-12.14	AV

Mode:		802.11n(HT20)		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5470.00	36.55	17.21	53.76	68.20	-14.44	PK
V	5470.00	36.89	17.21	54.10	68.20	-14.10	PK
Mode:		802.11n(HT20)		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5470.00	25.39	17.21	42.60	54.00	-11.40	AV
V	5470.00	25.45	17.21	42.66	54.00	-11.34	AV
Mode:		802.11n(HT20)		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	37.62	17.21	54.83	68.20	-13.37	PK
V	5725.00	34.09	17.21	51.30	68.20	-16.90	PK
Mode:		802.11n(HT20)		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	30.23	17.21	47.44	54.00	-6.56	AV
V	5725.00	23.53	17.21	40.74	54.00	-13.26	AV

Mode:		802.11ac(HT20)		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	38.00	17.21	55.21	68.20	-12.99	PK
V	5470.00	37.25	17.21	54.46	68.20	-13.74	PK
Mode:		802.11ac(HT20)		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	22.57	17.21	39.78	54.00	-14.22	AV
V	5470.00	25.76	17.21	42.97	54.00	-11.03	AV
Mode:		802.11ac(HT20)		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	37.22	17.21	54.43	68.20	-13.77	PK
V	5725.00	35.29	17.21	52.50	68.20	-15.70	PK
Mode:		802.11ac(HT20)		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	29.07	17.21	46.28	54.00	-7.72	AV
V	5725.00	26.21	17.21	43.42	54.00	-10.58	AV


Mode:		802.11n(HT40)		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	36.54	17.21	53.75	68.20	-14.45	PK
V	5470.00	35.47	17.21	52.68	68.20	-15.52	PK
Mode:		802.11n(HT40)		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	25.13	17.21	42.34	54.00	-11.66	AV
V	5470.00	26.07	17.21	43.28	54.00	-10.72	AV
Mode:		802.11n(HT40)		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	37.35	17.21	54.56	68.20	-13.64	PK
V	5725.00	33.04	17.21	50.25	68.20	-17.95	PK
Mode:		802.11n(HT40)		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	29.53	17.21	46.74	54.00	-7.26	AV
V	5725.00	23.82	17.21	41.03	54.00	-12.97	AV

Mode:		802.11ac(HT40)		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	36.34	17.21	53.55	68.20	-14.65	PK
V	5470.00	37.07	17.21	54.28	68.20	-13.92	PK
Mode:		802.11ac(HT40)		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	22.02	17.21	39.23	54.00	-14.77	AV
V	5470.00	23.98	17.21	41.19	54.00	-12.81	AV
Mode:		802.11ac(HT40)		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	35.21	17.21	52.42	68.20	-15.78	PK
V	5725.00	35.74	17.21	52.95	68.20	-15.25	PK
Mode:		802.11ac(HT40)		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	28.76	17.21	45.97	54.00	-8.03	AV
V	5725.00	24.45	17.21	41.66	54.00	-12.34	AV

Mode:		802.11ac(HT80)		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	37.96	17.21	55.17	68.20	-13.03	PK
V	5470.00	37.36	17.21	54.57	68.20	-13.63	PK
Mode:		802.11ac(HT80)		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	24.60	17.21	41.81	54.00	-12.19	AV
V	5470.00	24.02	17.21	41.23	54.00	-12.77	AV
Mode:		802.11ac(HT80)		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	35.90	17.21	53.11	68.20	-15.09	PK
V	5725.00	36.09	17.21	53.30	68.20	-14.90	PK
Mode:		802.11ac(HT80)		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	27.11	17.21	44.32	54.00	-9.68	AV
V	5725.00	22.75	17.21	39.96	54.00	-14.04	AV

Band4


802.11a

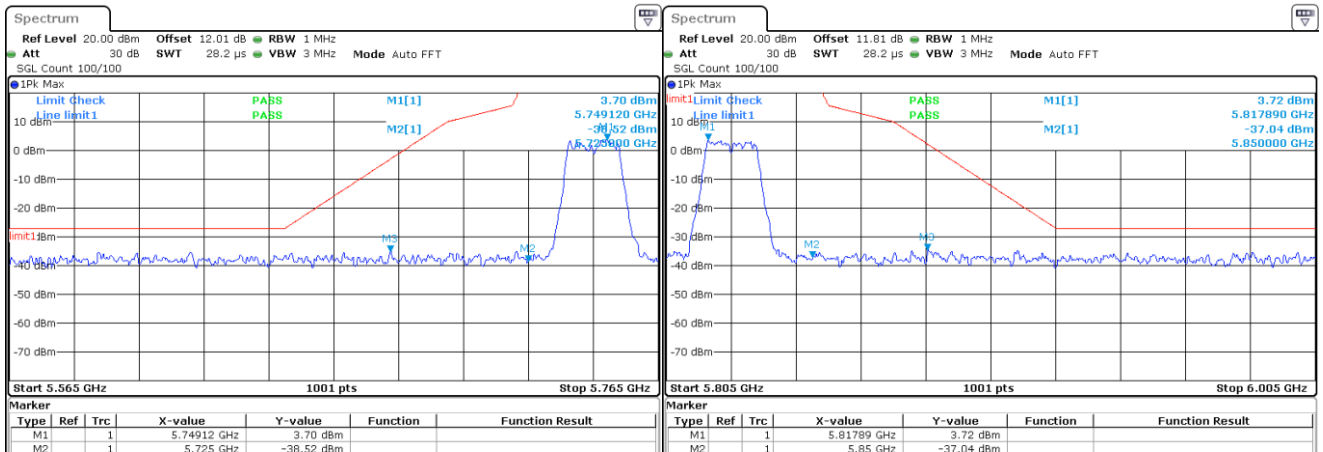

Low: 5745MHz

High: 5825MHz


802.11n(HT20)

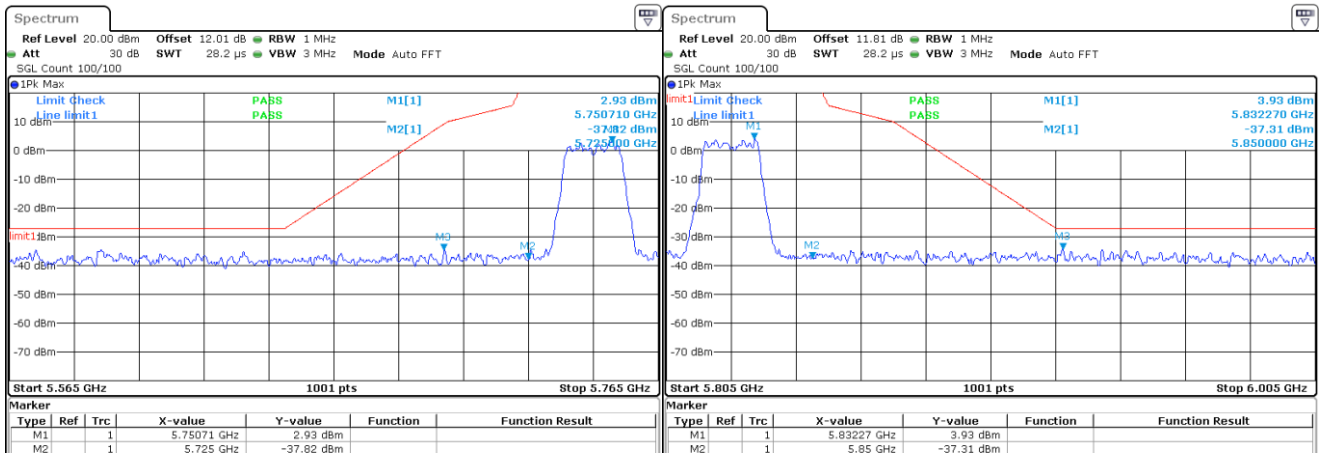

Low: 5745MHz

High: 5825MHz


802.11ac(HT20)

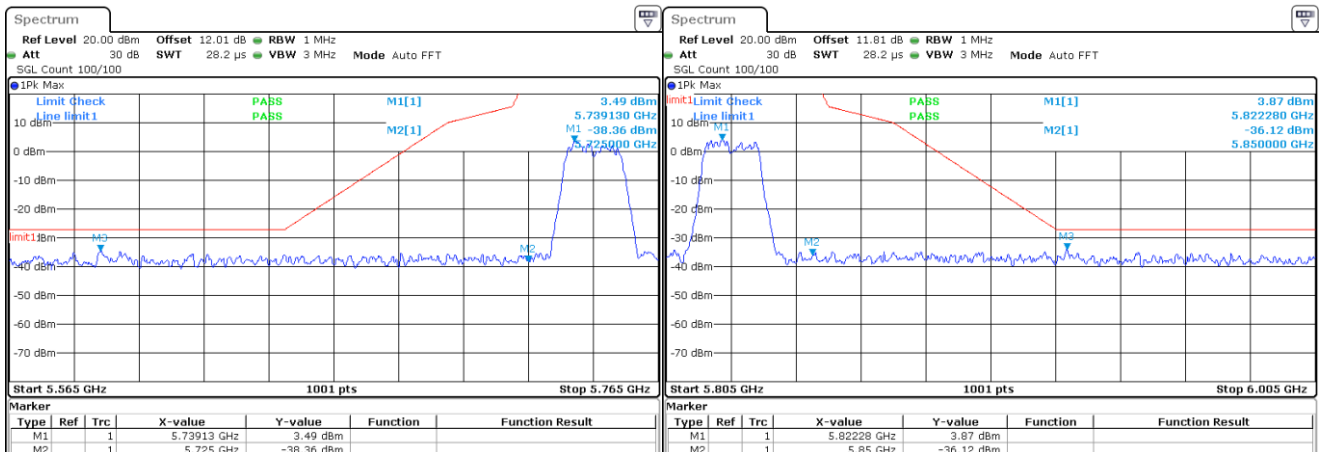

Low: 5745MHz

High: 5825MHz


802.11n(HT40)

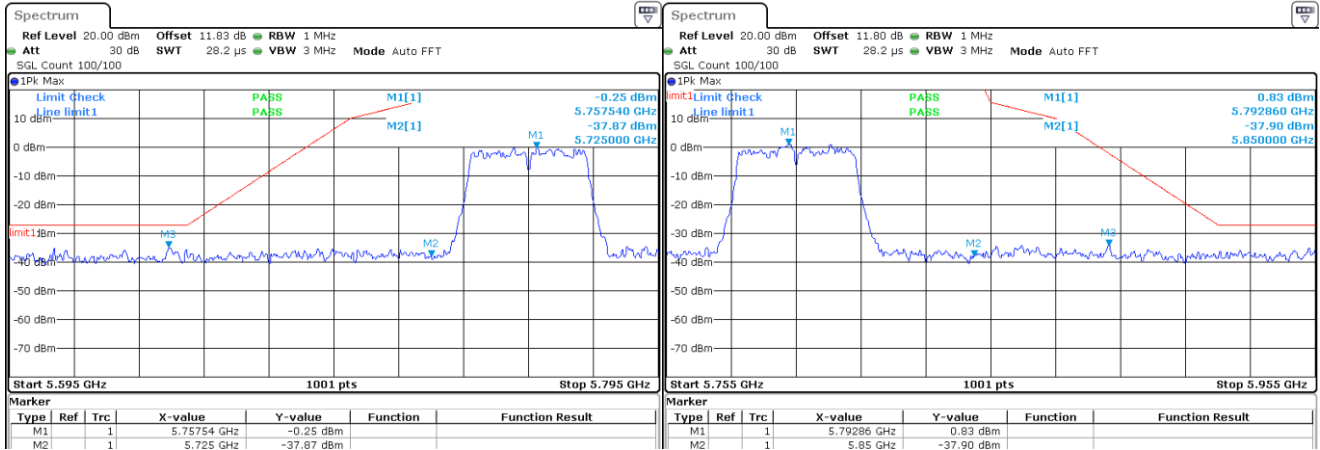

Low: 5755MHz

High: 5795MHz

802.11ac(HT40)

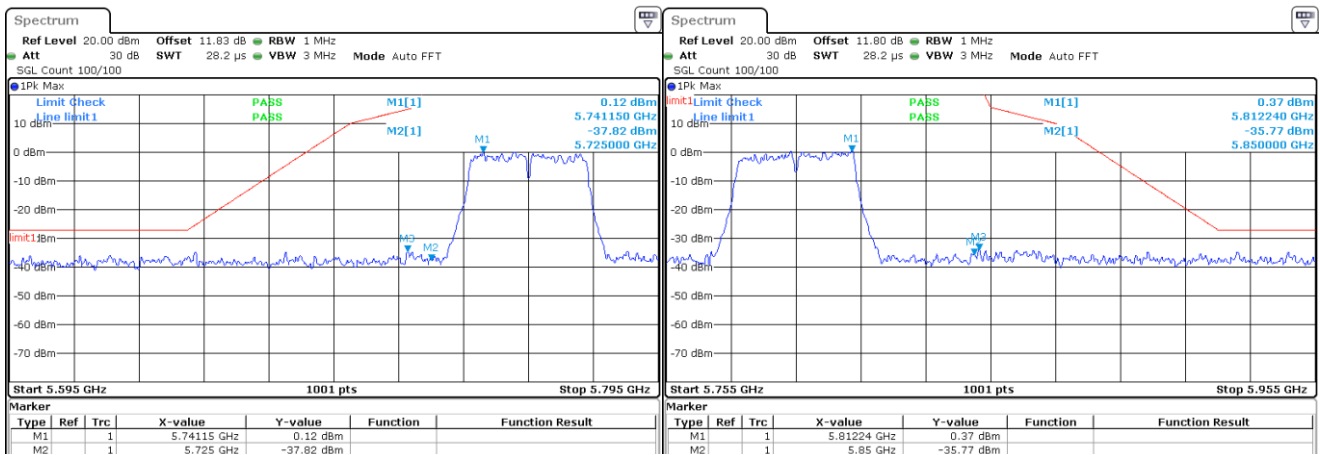


Low: 5755MHz

High: 5795MHz

802.11ac(HT80)

802.11ac(HT80)

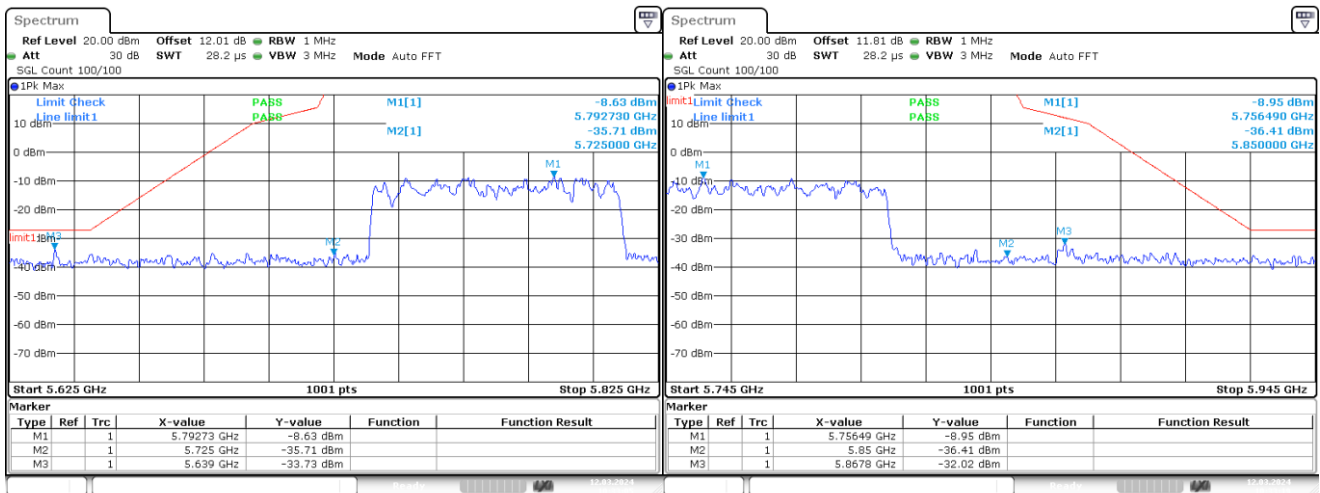

5775MHz

5775MHz

Note: 1. Except for mode a, other modes test the MIMO status.


2. All antennas have been tested, only the worst data of each pattern is reflected.


Date: 12.MAR.2024 10:33:05

Date: 12.MAR.2024 10:33:19

4.7 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		74.0		Peak Value
			54.0		Average Value
Test Procedure:	Substitution method was performed to determine the actual ERP emission levels of the EUT. The following test procedure as below: 1>.Below 1GHz test procedure: 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 2>.Above 1GHz test procedure: 1. On the test site as test setup graph above,the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.				

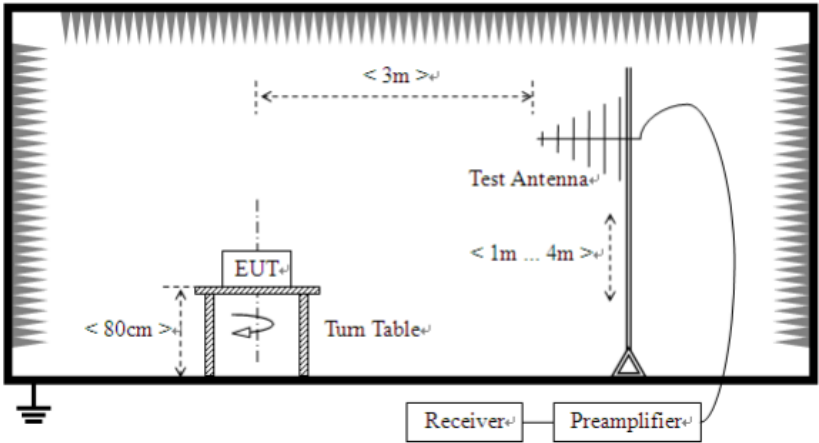	4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. 5. Repeat step 4 for test frequency with the test antenna polarized horizontally. 6. Remove the transmitter and replace it with a substitution antenna 7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. 8. Repeat step 7 with both antennas horizontally polarized for each test frequency. 9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where: Pg is the generator output power into the substitution antenna.
Test setup:	Below 1GHz  Above 1GHz

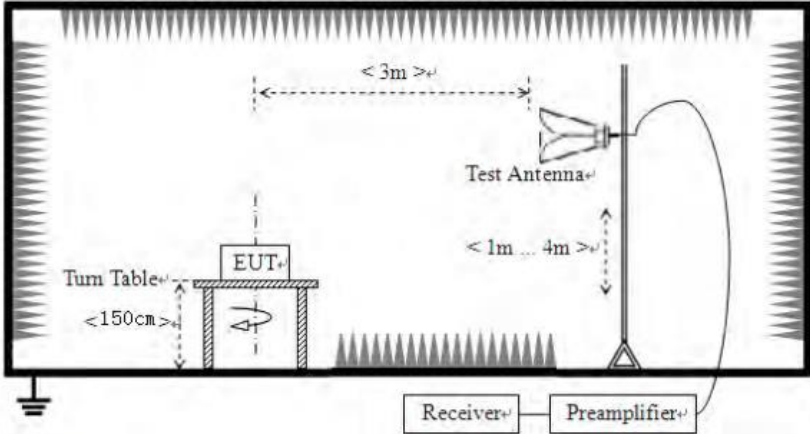	
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data:**Below 1GHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
33.73	47.71	11.25	0.59	30.08	29.47	40	-10.53	Vertical
54.43	41.08	11.93	0.81	29.96	23.86	40	-16.14	Vertical
122.72	46.60	9.4	1.36	29.57	27.79	43.5	-15.71	Vertical
171.12	43.27	8.5	1.7	29.31	24.16	43.5	-19.34	Vertical
439.38	37.59	16.29	3.05	29.41	27.52	46	-18.48	Vertical
861.13	32.92	21.83	4.69	29.14	30.30	46	-15.70	Vertical
63.00	35.56	8.73	0.9	29.89	15.30	40	-24.70	Horizontal
99.88	33.83	11.73	1.19	29.7	17.05	43.5	-26.45	Horizontal
271.48	45.11	12.53	2.22	29.79	30.07	46	-15.93	Horizontal
352.93	36.82	14.5	2.62	29.73	24.21	46	-21.79	Horizontal
626.99	35.79	19.43	3.83	29.27	29.78	46	-16.22	Horizontal
957.82	40.88	22.54	5.06	29.1	39.38	46	-6.62	Horizontal

Above 1GHz: Band 1**802.11a(HT20) 5180MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.53	48.68	11.25	14.62	32.65	41.90	74.00	-32.10	Vertical
15540.81	45.27	11.93	17.66	34.46	40.40	74.00	-33.60	Vertical
10360.21	56.13	9.4	14.62	32.65	47.50	74.00	-26.50	Horizontal
15540.71	48.71	8.5	17.66	34.46	40.41	74.00	-33.59	Horizontal

802.11a(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.34	46.09	16.29	17.66	34.46	45.58	74.00	-28.42	Vertical
15600.44	46.23	21.83	17.66	34.46	51.26	74.00	-22.74	Vertical
10400.73	44.83	8.73	17.66	34.46	36.76	74.00	-37.24	Horizontal
15600.62	56.77	11.73	17.66	34.46	51.70	74.00	-22.30	Horizontal

802.11a(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.54	47.62	11.25	14.62	32.65	40.84	74.00	-33.16	Vertical
15720.60	47.30	11.93	17.66	34.46	42.43	74.00	-31.57	Vertical
10480.67	54.85	9.4	14.62	32.65	46.22	74.00	-27.78	Horizontal
15720.14	46.57	8.5	17.66	34.46	38.27	74.00	-35.73	Horizontal

802.11n(HT20) 5180MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.33	46.64	16.29	17.66	34.46	46.13	74.00	-27.87	Vertical
15540.57	46.90	21.83	17.66	34.46	51.93	74.00	-22.07	Vertical
10360.71	46.26	8.73	17.66	34.46	38.19	74.00	-35.81	Horizontal
15540.91	56.19	11.73	17.66	34.46	51.12	74.00	-22.88	Horizontal

802.11n(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.96	49.24	11.25	14.62	32.65	42.46	74.00	-31.54	Vertical
15600.81	44.84	11.93	17.66	34.46	39.97	74.00	-34.03	Vertical
10400.40	54.15	9.4	14.62	32.65	45.52	74.00	-28.48	Horizontal
15600.99	46.81	8.5	17.66	34.46	38.51	74.00	-35.49	Horizontal

802.11n(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.21	48.54	16.29	17.66	34.46	48.03	74.00	-25.97	Vertical
15720.45	49.24	21.83	17.66	34.46	54.27	74.00	-19.73	Vertical
10480.20	45.88	8.73	17.66	34.46	37.81	74.00	-36.19	Horizontal
15720.09	56.69	11.73	17.66	34.46	51.62	74.00	-22.38	Horizontal

802.11ac(HT20) 5180MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.75	47.15	11.25	14.62	32.65	40.37	74.00	-33.63	Vertical
15540.49	45.05	11.93	17.66	34.46	40.18	74.00	-33.82	Vertical
10360.43	56.25	9.4	14.62	32.65	47.62	74.00	-26.38	Horizontal
15540.85	48.98	8.5	17.66	34.46	40.68	74.00	-33.32	Horizontal

802.11ac(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.21	49.14	16.29	17.66	34.46	48.63	74.00	-25.37	Vertical
15600.47	48.81	21.83	17.66	34.46	53.84	74.00	-20.16	Vertical
10400.88	46.37	8.73	17.66	34.46	38.30	74.00	-35.70	Horizontal
15600.91	54.98	11.73	17.66	34.46	49.91	74.00	-24.09	Horizontal

802.11ac(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.16	47.67	11.25	14.62	32.65	40.89	74.00	-33.11	Vertical
15720.97	46.93	11.93	17.66	34.46	42.06	74.00	-31.94	Vertical
10480.60	53.43	9.4	14.62	32.65	44.80	74.00	-29.20	Horizontal
15720.79	47.76	8.5	17.66	34.46	39.46	74.00	-34.54	Horizontal

802.11n(HT40) 5190MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.48	49.10	16.29	17.66	34.46	48.59	74.00	-25.41	Vertical
15570.32	46.88	21.83	17.66	34.46	51.91	74.00	-22.09	Vertical
10380.45	46.75	8.73	17.66	34.46	38.68	74.00	-35.32	Horizontal
15570.58	54.16	11.73	17.66	34.46	49.09	74.00	-24.91	Horizontal

802.11n(HT40) 5230MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.60	48.20	11.25	14.62	32.65	41.42	74.00	-32.58	Vertical
15690.32	44.82	11.93	17.66	34.46	39.95	74.00	-34.05	Vertical
10460.93	56.56	9.4	14.62	32.65	47.93	74.00	-26.07	Horizontal
15690.29	46.18	8.5	17.66	34.46	37.88	74.00	-36.12	Horizontal

802.11ac(HT40) 5190MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.05	46.02	16.29	17.66	34.46	45.51	74.00	-28.49	Vertical
15570.97	46.43	21.83	17.66	34.46	51.46	74.00	-22.54	Vertical
10380.27	47.02	8.73	17.66	34.46	38.95	74.00	-35.05	Horizontal
15570.25	57.40	11.73	17.66	34.46	52.33	74.00	-21.67	Horizontal

802.11ac(HT40) 5230MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.52	47.45	11.25	14.62	32.65	40.67	74.00	-33.33	Vertical
15690.91	45.72	11.93	17.66	34.46	40.85	74.00	-33.15	Vertical
10460.38	53.20	9.4	14.62	32.65	44.57	74.00	-29.43	Horizontal
15690.18	48.98	8.5	17.66	34.46	40.68	74.00	-33.32	Horizontal

802.11ac(HT80) 5210MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420.56	48.25	16.29	17.66	34.46	47.74	74.00	-26.26	Vertical
15630.23	47.29	21.83	17.66	34.46	52.32	74.00	-21.68	Vertical
10420.55	47.39	8.73	17.66	34.46	39.32	74.00	-34.68	Horizontal
15630.83	54.24	11.73	17.66	34.46	49.17	74.00	-24.83	Horizontal

Above 1GHz: Band 2**802.11a(HT20) 52600MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10520.31	46.79	11.25	14.62	32.65	40.01	74.00	-33.99	Vertical
15780.20	47.08	11.93	17.66	34.46	42.21	74.00	-31.79	Vertical
10520.31	56.90	9.4	14.62	32.65	48.27	74.00	-25.73	Horizontal
15780.17	47.24	8.5	17.66	34.46	38.94	74.00	-35.06	Horizontal

802.11a(HT20) 5280MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10560.04	47.61	16.29	17.66	34.46	47.10	74.00	-26.90	Vertical
15840.20	49.46	21.83	17.66	34.46	54.49	74.00	-19.51	Vertical
10560.01	45.46	8.73	17.66	34.46	37.39	74.00	-36.61	Horizontal
15840.06	55.60	11.73	17.66	34.46	50.53	74.00	-23.47	Horizontal

802.11a(HT20) 5320MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10640.19	47.34	11.25	14.62	32.65	40.56	74.00	-33.44	Vertical
15960.16	44.99	11.93	17.66	34.46	40.12	74.00	-33.88	Vertical
10640.06	54.38	9.4	14.62	32.65	45.75	74.00	-28.25	Horizontal
15960.20	49.34	8.5	17.66	34.46	41.04	74.00	-32.96	Horizontal

802.11n(HT20) 5260MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10520.25	45.68	16.29	17.66	34.46	45.17	74.00	-28.83	Vertical
15780.02	45.92	21.83	17.66	34.46	50.95	74.00	-23.05	Vertical
10520.10	44.52	8.73	17.66	34.46	36.45	74.00	-37.55	Horizontal
15780.19	56.92	11.73	17.66	34.46	51.85	74.00	-22.15	Horizontal

802.11n(HT20) 5280MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10560.07	49.33	11.25	14.62	32.65	42.55	74.00	-31.45	Vertical
15840.06	47.17	11.93	17.66	34.46	42.30	74.00	-31.70	Vertical
10560.29	54.26	9.4	14.62	32.65	45.63	74.00	-28.37	Horizontal
15840.25	47.64	8.5	17.66	34.46	39.34	74.00	-34.66	Horizontal

802.11n(HT20) 5320MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10640.10	47.61	16.29	17.66	34.46	47.10	74.00	-26.90	Vertical
15960.27	46.46	21.83	17.66	34.46	51.49	74.00	-22.51	Vertical
10640.24	46.90	8.73	17.66	34.46	38.83	74.00	-35.17	Horizontal
15960.22	56.43	11.73	17.66	34.46	51.36	74.00	-22.64	Horizontal

802.11ac(HT20) 5260MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10520.16	47.63	11.25	14.62	32.65	40.85	74.00	-33.15	Vertical
15780.16	44.59	11.93	17.66	34.46	39.72	74.00	-34.28	Vertical
10520.21	55.43	9.4	14.62	32.65	46.80	74.00	-27.20	Horizontal
15780.20	48.00	8.5	17.66	34.46	39.70	74.00	-34.30	Horizontal

802.11ac(HT20) 5280MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10560.29	47.77	16.29	17.66	34.46	47.26	74.00	-26.74	Vertical
15840.05	47.59	21.83	17.66	34.46	52.62	74.00	-21.38	Vertical
10560.23	46.51	8.73	17.66	34.46	38.44	74.00	-35.56	Horizontal
15840.25	57.04	11.73	17.66	34.46	51.97	74.00	-22.03	Horizontal

802.11ac(HT20) 5320MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10640.29	46.20	11.25	14.62	32.65	39.42	74.00	-34.58	Vertical
15960.18	43.76	11.93	17.66	34.46	38.89	74.00	-35.11	Vertical
10640.14	54.40	9.4	14.62	32.65	45.77	74.00	-28.23	Horizontal
15960.07	46.21	8.5	17.66	34.46	37.91	74.00	-36.09	Horizontal

802.11n(HT40) 5270MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10540.12	49.01	16.29	17.66	34.46	48.50	74.00	-25.50	Vertical
15810.32	48.42	21.83	17.66	34.46	53.45	74.00	-20.55	Vertical
10540.14	46.38	8.73	17.66	34.46	38.31	74.00	-35.69	Horizontal
15810.01	57.11	11.73	17.66	34.46	52.04	74.00	-21.96	Horizontal

802.11n(HT40) 5310MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10620.30	48.52	11.25	14.62	32.65	41.74	74.00	-32.26	Vertical
15930.16	47.58	11.93	17.66	34.46	42.71	74.00	-31.29	Vertical
10620.07	56.02	9.4	14.62	32.65	47.39	74.00	-26.61	Horizontal
15930.26	49.12	8.5	17.66	34.46	40.82	74.00	-33.18	Horizontal

Above 1GHz: Band 3**802.11a(HT20) 5500MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11000.04	48.75	11.25	14.62	32.65	41.97	74.00	-32.03	Vertical
16500.24	44.93	11.93	17.66	34.46	40.06	74.00	-33.94	Vertical
11000.04	53.63	9.4	14.62	32.65	45.00	74.00	-29.00	Horizontal
16500.25	47.46	8.5	17.66	34.46	39.16	74.00	-34.84	Horizontal

802.11a(HT20) 5580MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11160.04	47.74	16.29	17.66	34.46	47.23	74.00	-26.77	Vertical
16740.27	47.27	21.83	17.66	34.46	52.30	74.00	-21.70	Vertical
11160.25	44.08	8.73	17.66	34.46	36.01	74.00	-37.99	Horizontal
16740.02	54.50	11.73	17.66	34.46	49.43	74.00	-24.57	Horizontal

802.11a(HT20) 5700MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11400.24	46.35	11.25	14.62	32.65	39.57	74.00	-34.43	Vertical
17100.29	44.72	11.93	17.66	34.46	39.85	74.00	-34.15	Vertical
11400.09	54.86	9.4	14.62	32.65	46.23	74.00	-27.77	Horizontal
17100.11	48.42	8.5	17.66	34.46	40.12	74.00	-33.88	Horizontal

802.11n(HT20) 5500MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11000.27	48.40	16.29	17.66	34.46	47.89	74.00	-26.11	Vertical
16500.09	48.53	21.83	17.66	34.46	53.56	74.00	-20.44	Vertical
11000.31	46.30	8.73	17.66	34.46	38.23	74.00	-35.77	Horizontal
16500.06	57.35	11.73	17.66	34.46	52.28	74.00	-21.72	Horizontal

802.11n(HT20) 5580MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11160.10	49.31	11.25	14.62	32.65	42.53	74.00	-31.47	Vertical
16740.04	47.59	11.93	17.66	34.46	42.72	74.00	-31.28	Vertical
11160.24	53.29	9.4	14.62	32.65	44.66	74.00	-29.34	Horizontal
16740.23	49.42	8.5	17.66	34.46	41.12	74.00	-32.88	Horizontal

802.11n(HT20) 5700MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11400.26	46.15	16.29	17.66	34.46	45.64	74.00	-28.36	Vertical
17100.15	46.43	21.83	17.66	34.46	51.46	74.00	-22.54	Vertical
11400.16	44.76	8.73	17.66	34.46	36.69	74.00	-37.31	Horizontal
17100.17	54.77	11.73	17.66	34.46	49.70	74.00	-24.30	Horizontal

802.11ac(HT20) 5500MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11000.15	48.91	11.25	14.62	32.65	42.13	74.00	-31.87	Vertical
16500.20	46.03	11.93	17.66	34.46	41.16	74.00	-32.84	Vertical
11000.15	53.48	9.4	14.62	32.65	44.85	74.00	-29.15	Horizontal
16500.18	46.33	8.5	17.66	34.46	38.03	74.00	-35.97	Horizontal

802.11ac(HT20) 5580MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11160.16	48.89	16.29	17.66	34.46	48.38	74.00	-25.62	Vertical
16740.22	46.23	21.83	17.66	34.46	51.26	74.00	-22.74	Vertical
11160.01	47.51	8.73	17.66	34.46	39.44	74.00	-34.56	Horizontal
16740.06	57.02	11.73	17.66	34.46	51.95	74.00	-22.05	Horizontal

802.11ac(HT20) 5700MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11400.06	46.51	11.25	14.62	32.65	39.73	74.00	-34.27	Vertical
17100.18	44.21	11.93	17.66	34.46	39.34	74.00	-34.66	Vertical
11400.08	55.65	9.4	14.62	32.65	47.02	74.00	-26.98	Horizontal
17100.03	48.55	8.5	17.66	34.46	40.25	74.00	-33.75	Horizontal

802.11n(HT40) 5510MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11020.19	48.36	16.29	17.66	34.46	47.85	74.00	-26.15	Vertical
16530.30	46.89	21.83	17.66	34.46	51.92	74.00	-22.08	Vertical
11020.10	44.07	8.73	17.66	34.46	36.00	74.00	-38.00	Horizontal
16530.15	55.16	11.73	17.66	34.46	50.09	74.00	-23.91	Horizontal

802.11n(HT40) 5670MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11340.26	46.12	11.25	14.62	32.65	39.34	74.00	-34.66	Vertical
17010.06	44.36	11.93	17.66	34.46	39.49	74.00	-34.51	Vertical
11340.31	53.96	9.4	14.62	32.65	45.33	74.00	-28.67	Horizontal
17010.31	48.00	8.5	17.66	34.46	39.70	74.00	-34.30	Horizontal

802.11ac(HT40) 5510MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11020.15	47.64	16.29	17.66	34.46	47.13	74.00	-26.87	Vertical
16530.24	48.20	21.83	17.66	34.46	53.23	74.00	-20.77	Vertical
11020.11	44.12	8.73	17.66	34.46	36.05	74.00	-37.95	Horizontal
16530.24	55.82	11.73	17.66	34.46	50.75	74.00	-23.25	Horizontal

802.11ac(HT40) 5670MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11340.03	46.30	11.25	14.62	32.65	39.52	74.00	-34.48	Vertical
17010.11	46.89	11.93	17.66	34.46	42.02	74.00	-31.98	Vertical
11340.22	53.82	9.4	14.62	32.65	45.19	74.00	-28.81	Horizontal
17010.11	47.05	8.5	17.66	34.46	38.75	74.00	-35.25	Horizontal

802.11ac(HT80) 5530MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11060.17	48.16	16.29	17.66	34.46	47.65	74.00	-26.35	Vertical
16590.15	47.43	21.83	17.66	34.46	52.46	74.00	-21.54	Vertical
11060.02	45.07	8.73	17.66	34.46	37.00	74.00	-37.00	Horizontal
16590.25	55.88	11.73	17.66	34.46	50.81	74.00	-23.19	Horizontal

Above 1GHz: Band 4**802.11a(HT20) 5745MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.10	47.39	11.25	14.62	32.65	40.61	74.00	-33.39	Vertical
17235.04	45.38	11.93	17.66	34.46	40.51	74.00	-33.49	Vertical
11490.16	53.62	9.4	14.62	32.65	44.99	74.00	-29.01	Horizontal
17235.03	47.09	8.5	17.66	34.46	38.79	74.00	-35.21	Horizontal

802.11a(HT20) 5785MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.03	48.36	16.29	17.66	34.46	47.85	74.00	-26.15	Vertical
17355.20	47.51	21.83	17.66	34.46	52.54	74.00	-21.46	Vertical
11570.24	46.62	8.73	17.66	34.46	38.55	74.00	-35.45	Horizontal
17355.01	55.75	11.73	17.66	34.46	50.68	74.00	-23.32	Horizontal

802.11a(HT20) 5825MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.22	48.97	11.25	14.62	32.65	42.19	74.00	-31.81	Vertical
17475.00	47.06	11.93	17.66	34.46	42.19	74.00	-31.81	Vertical
11650.03	56.66	9.4	14.62	32.65	48.03	74.00	-25.97	Horizontal
17475.06	47.70	8.5	17.66	34.46	39.40	74.00	-34.60	Horizontal

802.11n(HT20) 5745MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.25	48.41	16.29	17.66	34.46	47.90	74.00	-26.10	Vertical
17235.03	45.63	21.83	17.66	34.46	50.66	74.00	-23.34	Vertical
11490.06	47.54	8.73	17.66	34.46	39.47	74.00	-34.53	Horizontal
17235.20	54.06	11.73	17.66	34.46	48.99	74.00	-25.01	Horizontal

802.11n(HT20) 5785MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.19	48.28	11.25	14.62	32.65	41.50	74.00	-32.50	Vertical
17355.09	43.80	11.93	17.66	34.46	38.93	74.00	-35.07	Vertical
11570.30	54.25	9.4	14.62	32.65	45.62	74.00	-28.38	Horizontal
17355.03	46.75	8.5	17.66	34.46	38.45	74.00	-35.55	Horizontal

802.11n(HT20) 5825MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.21	47.95	16.29	17.66	34.46	47.44	74.00	-26.56	Vertical
17475.05	48.60	21.83	17.66	34.46	53.63	74.00	-20.37	Vertical
11650.17	43.80	8.73	17.66	34.46	35.73	74.00	-38.27	Horizontal
17475.17	56.36	11.73	17.66	34.46	51.29	74.00	-22.71	Horizontal

802.11ac(HT20) 5745MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.05	49.00	11.25	14.62	32.65	42.22	74.00	-31.78	Vertical
17235.18	44.01	11.93	17.66	34.46	39.14	74.00	-34.86	Vertical
11490.11	56.43	9.4	14.62	32.65	47.80	74.00	-26.20	Horizontal
17235.08	48.70	8.5	17.66	34.46	40.40	74.00	-33.60	Horizontal

802.11ac(HT20) 5785MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Lev785el (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.11	49.43	16.29	17.66	34.46	48.92	74.00	-25.08	Vertical
17355.29	45.60	21.83	17.66	34.46	50.63	74.00	-23.37	Vertical
11570.31	44.95	8.73	17.66	34.46	36.88	74.00	-37.12	Horizontal
17355.14	55.04	11.73	17.66	34.46	49.97	74.00	-24.03	Horizontal

802.11ac(HT20) 5825MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.10	46.31	11.25	14.62	32.65	39.53	74.00	-34.47	Vertical
17475.14	45.69	11.93	17.66	34.46	40.82	74.00	-33.18	Vertical
11650.09	54.09	9.4	14.62	32.65	45.46	74.00	-28.54	Horizontal
17475.20	49.46	8.5	17.66	34.46	41.16	74.00	-32.84	Horizontal

802.11n(HT40) 5755MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.22	48.72	16.29	17.66	34.46	48.21	74.00	-25.79	Vertical
17265.10	46.74	21.83	17.66	34.46	51.77	74.00	-22.23	Vertical
11510.07	46.95	8.73	17.66	34.46	38.88	74.00	-35.12	Horizontal
17265.11	54.21	11.73	17.66	34.46	49.14	74.00	-24.86	Horizontal

802.11n(HT40) 5795MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.11	45.59	11.25	14.62	32.65	38.81	74.00	-35.19	Vertical
17385.23	44.01	11.93	17.66	34.46	39.14	74.00	-34.86	Vertical
11590.06	55.11	9.4	14.62	32.65	46.48	74.00	-27.52	Horizontal
17385.28	45.97	8.5	17.66	34.46	37.67	74.00	-36.33	Horizontal

802.11ac(HT40) 5755MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.09	48.09	16.29	17.66	34.46	47.58	74.00	-26.42	Vertical
17265.31	46.08	21.83	17.66	34.46	51.11	74.00	-22.89	Vertical
11510.25	47.05	8.73	17.66	34.46	38.98	74.00	-35.02	Horizontal
17265.07	56.68	11.73	17.66	34.46	51.61	74.00	-22.39	Horizontal

802.11ac(HT40) 5795MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.01	46.58	11.25	14.62	32.65	39.80	74.00	-34.20	Vertical
17385.32	46.34	11.93	17.66	34.46	41.47	74.00	-32.53	Vertical
11590.02	56.05	9.4	14.62	32.65	47.42	74.00	-26.58	Horizontal
17385.22	45.60	8.5	17.66	34.46	37.30	74.00	-36.70	Horizontal

802.11ac(HT80) 5775MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11550.09	46.18	16.29	17.66	34.46	45.67	74.00	-28.33	Vertical
17325.09	45.76	21.83	17.66	34.46	50.79	74.00	-23.21	Vertical
11550.32	43.82	8.73	17.66	34.46	35.75	74.00	-38.25	Horizontal
17325.16	55.14	11.73	17.66	34.46	50.07	74.00	-23.93	Horizontal

Note:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamplifier Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. Except for mode a, other modes test the MIMO status.
5. All antennas have been tested, only the worst data of each pattern is reflected.

-----END OF REPORT-----