


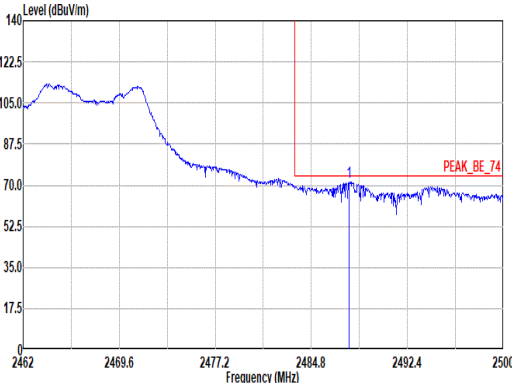
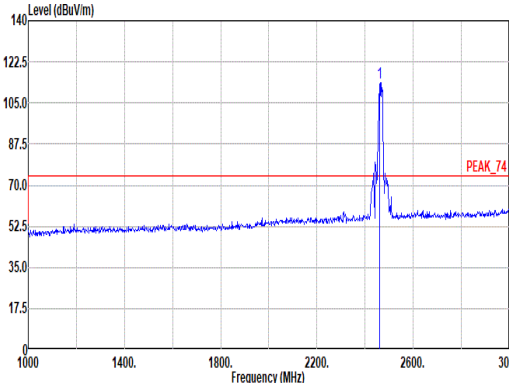
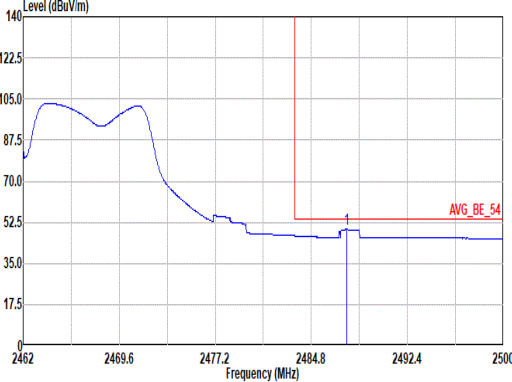
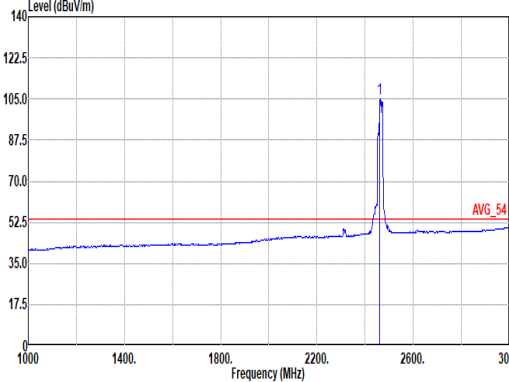
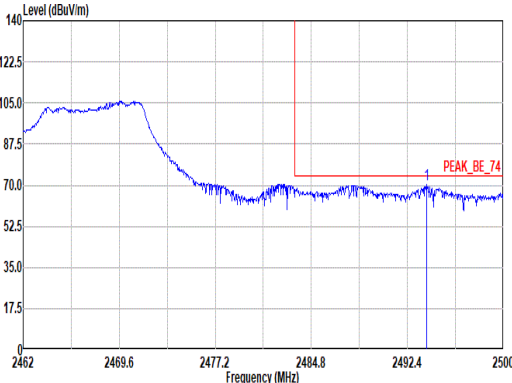





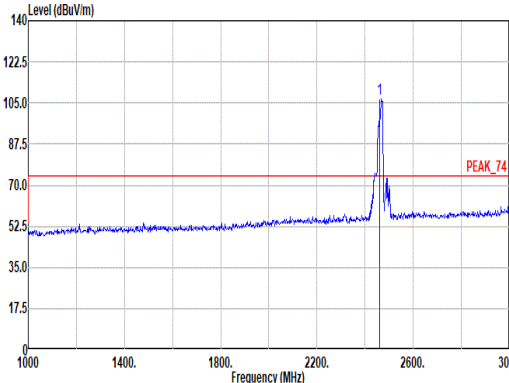


Mode	11																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11ax HE20_CH11_Partial RU 106/54_2462MHz																																																																																																		
ANT	1+2																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2487.76</td><td>71.35</td><td>74.00</td><td>-2.65</td><td>56.15</td><td>27.70</td><td>7.87</td><td>30.29</td><td>9.92</td><td>102</td><td>254 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2487.76	71.35	74.00	-2.65	56.15	27.70	7.87	30.29	9.92	102	254 PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>113.79</td><td>-----</td><td>-----</td><td>98.00</td><td>27.54</td><td>7.83</td><td>30.30</td><td>9.92</td><td>102</td><td>254 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	113.79	-----	-----	98.00	27.54	7.83	30.30	9.92	102	254 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2487.76	71.35	74.00	-2.65	56.15	27.70	7.87	30.29	9.92	102	254 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	113.79	-----	-----	98.00	27.54	7.83	30.30	9.92	102	254 PEAK																																																																																								
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2487.57</td><td>49.41</td><td>54.00</td><td>-4.59</td><td>34.21</td><td>27.70</td><td>7.87</td><td>30.29</td><td>9.92</td><td>102</td><td>254 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2487.57	49.41	54.00	-4.59	34.21	27.70	7.87	30.29	9.92	102	254 AVERAGE	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>104.89</td><td>-----</td><td>-----</td><td>89.90</td><td>27.54</td><td>7.83</td><td>30.30</td><td>9.92</td><td>102</td><td>254 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	104.89	-----	-----	89.90	27.54	7.83	30.30	9.92	102	254 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2487.57	49.41	54.00	-4.59	34.21	27.70	7.87	30.29	9.92	102	254 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	104.89	-----	-----	89.90	27.54	7.83	30.30	9.92	102	254 AVERAGE																																																																																								


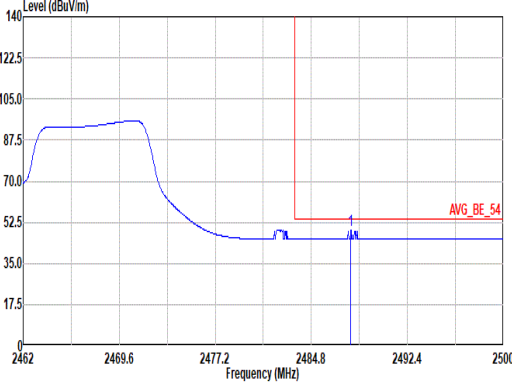


Mode	11																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11ax HE20_CH11_Partial RU 106/54_2462MHz																																																																																	
ANT	1+2																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2493.92</td><td>70.22</td><td>74.00</td><td>-3.78</td><td>55.01</td><td>27.70</td><td>7.88</td><td>30.29</td><td>9.92</td><td>400 96 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm deg	1 2493.92	70.22	74.00	-3.78	55.01	27.70	7.88	30.29	9.92	400 96 PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2462.00</td><td>106.73</td><td>-----</td><td>-----</td><td>91.69</td><td>27.58</td><td>7.84</td><td>30.30</td><td>9.92</td><td>400 96 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm deg	1 2462.00	106.73	-----	-----	91.69	27.58	7.84	30.30	9.92	400 96 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm deg																																																																									
1 2493.92	70.22	74.00	-3.78	55.01	27.70	7.88	30.29	9.92	400 96 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm deg																																																																									
1 2462.00	106.73	-----	-----	91.69	27.58	7.84	30.30	9.92	400 96 PEAK																																																																									
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2487.92</td><td>49.15</td><td>54.00</td><td>-4.85</td><td>33.95</td><td>27.70</td><td>7.87</td><td>30.29</td><td>9.92</td><td>400 96 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm deg	1 2487.92	49.15	54.00	-4.85	33.95	27.70	7.87	30.29	9.92	400 96 AVERAGE	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2462.00</td><td>97.44</td><td>-----</td><td>-----</td><td>82.38</td><td>27.60</td><td>7.84</td><td>30.30</td><td>9.92</td><td>400 96 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm deg	1 2462.00	97.44	-----	-----	82.38	27.60	7.84	30.30	9.92	400 96 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm deg																																																																									
1 2487.92	49.15	54.00	-4.85	33.95	27.70	7.87	30.29	9.92	400 96 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm deg																																																																									
1 2462.00	97.44	-----	-----	82.38	27.60	7.84	30.30	9.92	400 96 AVERAGE																																																																									




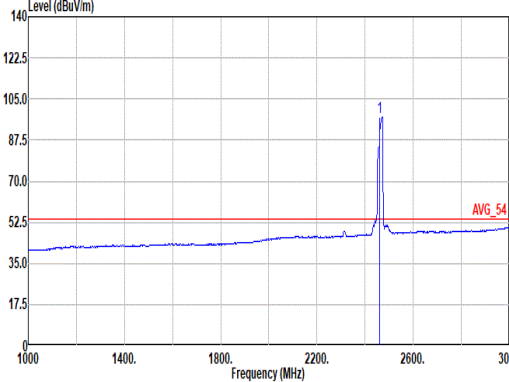


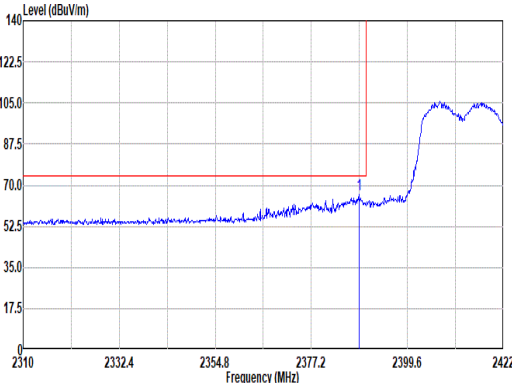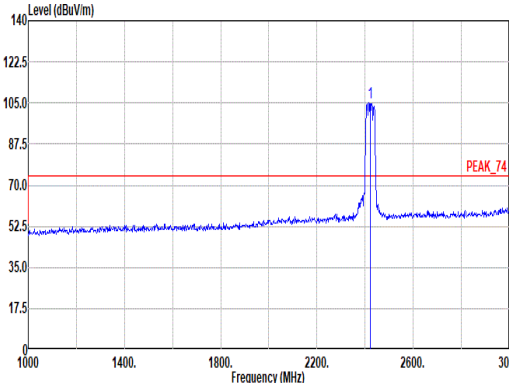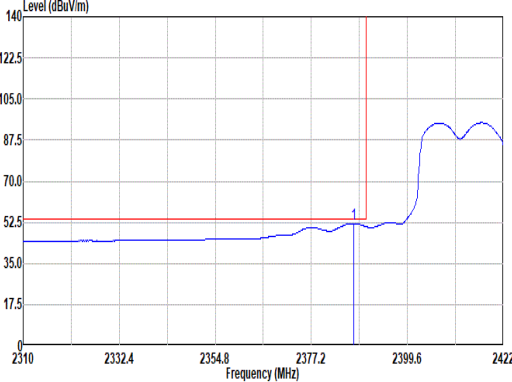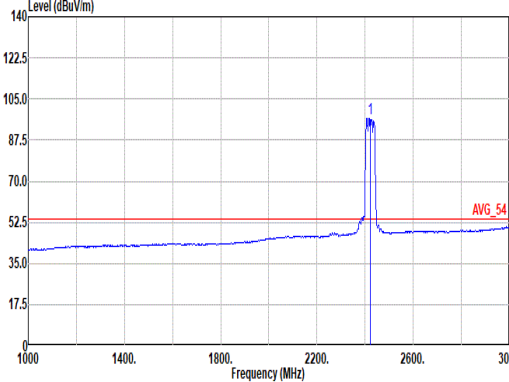Mode	12																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_802.11ax HE40_CH03_Full RU_2422MHz																																																																																								
ANT	1+2																																																																																								
Pol.	Horizontal						Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2388.29</td><td>65.87</td><td>74.00</td><td>-8.13</td><td>51.29</td><td>27.28</td><td>7.71</td><td>30.33</td><td>9.92</td><td>125</td><td>135</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2388.29	65.87	74.00	-8.13	51.29	27.28	7.71	30.33	9.92	125	135	PEAK	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>104.94</td><td>-----</td><td>-----</td><td>90.19</td><td>27.40</td><td>7.75</td><td>30.32</td><td>9.92</td><td>125</td><td>135</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2422.00	104.94	-----	-----	90.19	27.40	7.75	30.32	9.92	125	135
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2388.29	65.87	74.00	-8.13	51.29	27.28	7.71	30.33	9.92	125	135	PEAK																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2422.00	104.94	-----	-----	90.19	27.40	7.75	30.32	9.92	125	135	PEAK																																																																													
Avg.																																																																																									
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2387.06</td><td>52.04</td><td>54.00</td><td>-1.96</td><td>37.47</td><td>27.27</td><td>7.71</td><td>30.33</td><td>9.92</td><td>125</td><td>135</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2387.06	52.04	54.00	-1.96	37.47	27.27	7.71	30.33	9.92	125	135	AVERAGE	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>96.76</td><td>-----</td><td>-----</td><td>82.01</td><td>27.40</td><td>7.75</td><td>30.32</td><td>9.92</td><td>125</td><td>135</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2422.00	96.76	-----	-----	82.01	27.40	7.75	30.32	9.92	125	135
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2387.06	52.04	54.00	-1.96	37.47	27.27	7.71	30.33	9.92	125	135	AVERAGE																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2422.00	96.76	-----	-----	82.01	27.40	7.75	30.32	9.92	125	135	AVERAGE																																																																													

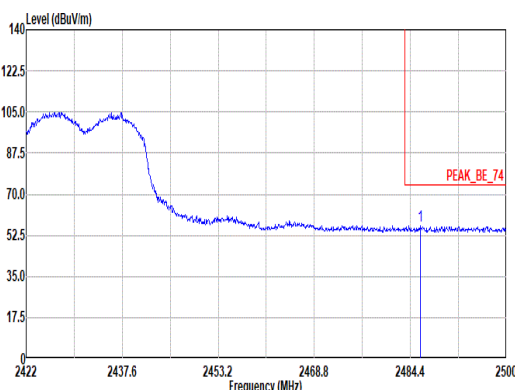
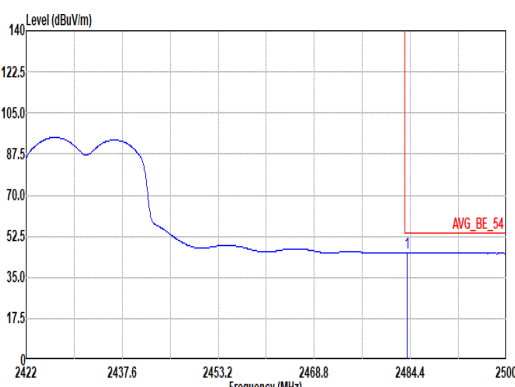


Mode	12																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11ax HE40_CH03_Full RU_2422MHz																																																						
ANT	1+2																																																						
Pol.	Horizontal						Fundamental																																																
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.04</td><td>56.54</td><td>74.00</td><td>-17.46</td><td>41.36</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td><td>125</td><td>135</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2486.04	56.54	74.00	-17.46	41.36	27.70	7.86	30.30	9.92	125	135	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																														
1	2486.04	56.54	74.00	-17.46	41.36	27.70	7.86	30.30	9.92	125	135	PEAK																																											
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.85</td><td>45.34</td><td>54.00</td><td>-8.66</td><td>30.16</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td><td>125</td><td>135</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.85	45.34	54.00	-8.66	30.16	27.70	7.86	30.30	9.92	125	135	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																														
1	2483.85	45.34	54.00	-8.66	30.16	27.70	7.86	30.30	9.92	125	135	AVERAGE																																											

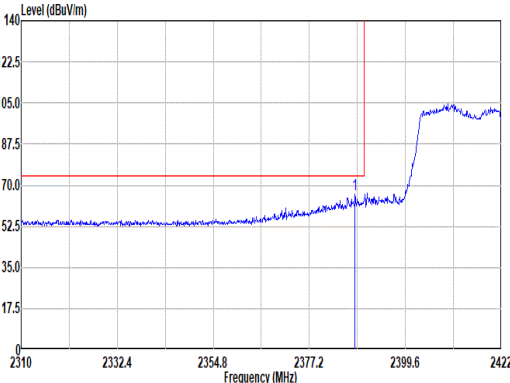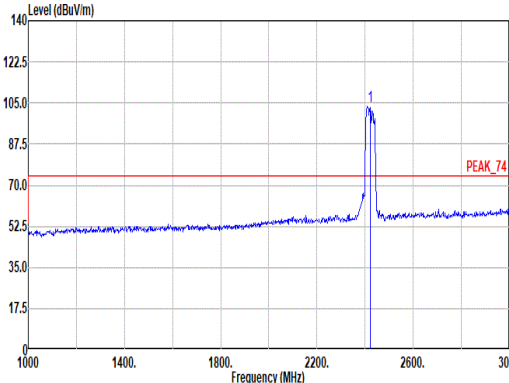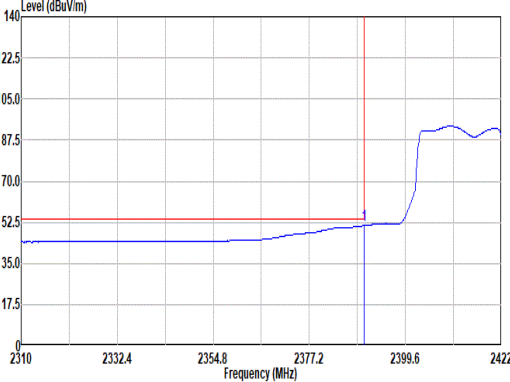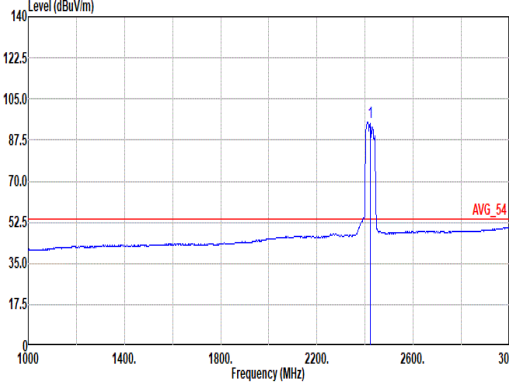

Mode	12																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_802.11ax HE40_CH03_Full RU_2422MHz																																																																																								
ANT	1+2																																																																																								
Pol.	Vertical						Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2387.04</td><td>66.05</td><td>74.00</td><td>-7.95</td><td>51.47</td><td>27.28</td><td>7.71</td><td>30.33</td><td>9.92</td><td>341</td><td>102</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2387.04	66.05	74.00	-7.95	51.47	27.28	7.71	30.33	9.92	341	102	PEAK	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>103.33</td><td>-----</td><td>-----</td><td>88.59</td><td>27.40</td><td>7.74</td><td>30.32</td><td>9.92</td><td>341</td><td>102</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2422.00	103.33	-----	-----	88.59	27.40	7.74	30.32	9.92	341	102
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2387.04	66.05	74.00	-7.95	51.47	27.28	7.71	30.33	9.92	341	102	PEAK																																																																													
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2422.00	103.33	-----	-----	88.59	27.40	7.74	30.32	9.92	341	102	PEAK																																																																													
Avg.																																																																																									
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.97</td><td>51.13</td><td>54.00</td><td>-2.87</td><td>36.53</td><td>27.30</td><td>7.71</td><td>30.33</td><td>9.92</td><td>341</td><td>102</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.97	51.13	54.00	-2.87	36.53	27.30	7.71	30.33	9.92	341	102	AVERAGE	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>95.22</td><td>-----</td><td>-----</td><td>80.47</td><td>27.40</td><td>7.75</td><td>30.32</td><td>9.92</td><td>341</td><td>102</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2422.00	95.22	-----	-----	80.47	27.40	7.75	30.32	9.92	341	102
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.97	51.13	54.00	-2.87	36.53	27.30	7.71	30.33	9.92	341	102	AVERAGE																																																																													
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2422.00	95.22	-----	-----	80.47	27.40	7.75	30.32	9.92	341	102	AVERAGE																																																																													



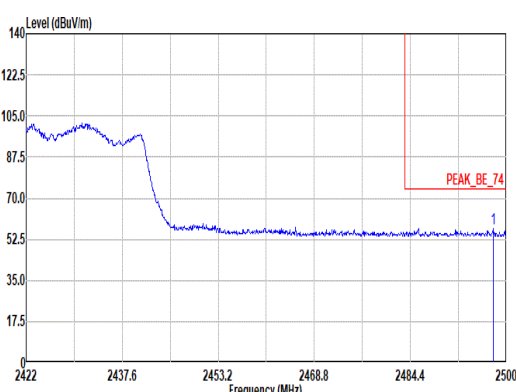
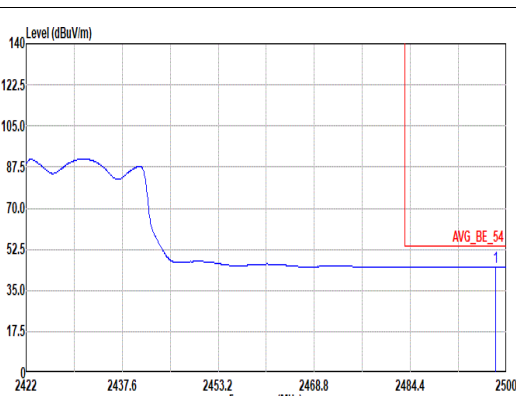


Mode	12																																					
	Band Edge - R																																					
	2400-2483.5_802.11ax HE40_CH03_Full RU_2422MHz																																					
ANT	1+2																																					
Pol.	Vertical	Fundamental																																				
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2497.09</td><td>57.12</td><td>74.00</td><td>-16.88</td><td>41.91</td><td>27.70</td><td>7.88</td><td>30.29</td><td>9.92</td><td>341</td><td>102</td><td>PEAK</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2497.09	57.12	74.00	-16.88	41.91	27.70	7.88	30.29	9.92	341	102	PEAK	Blank
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 2497.09	57.12	74.00	-16.88	41.91	27.70	7.88	30.29	9.92	341	102	PEAK																											
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2498.21</td><td>45.14</td><td>54.00</td><td>-8.86</td><td>29.93</td><td>27.70</td><td>7.88</td><td>30.29</td><td>9.92</td><td>341</td><td>102</td><td>AVERAGE</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2498.21	45.14	54.00	-8.86	29.93	27.70	7.88	30.29	9.92	341	102	AVERAGE	Blank
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 2498.21	45.14	54.00	-8.86	29.93	27.70	7.88	30.29	9.92	341	102	AVERAGE																											







Mode	12																																																																																																																																																																							
	Harmonic																																																																																																																																																																							
	2400-2483.5_802.11ax HE40_CH03_Full RU_2422MHz																																																																																																																																																																							
ANT	1+2																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																						
Peak Avg.	Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_240328 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2270.00</td><td>58.99</td><td>74.00</td><td>-15.01</td><td>44.75</td><td>27.20</td><td>7.51</td><td>30.38</td><td>9.91</td><td>100</td><td>303</td><td>PEAK</td></tr><tr><td>2</td><td>2270.00</td><td>49.01</td><td>54.00</td><td>-4.99</td><td>34.77</td><td>27.20</td><td>7.51</td><td>30.38</td><td>9.91</td><td>100</td><td>303</td><td>AVERAGE</td></tr><tr><td>3</td><td>4844.00</td><td>40.72</td><td>74.00</td><td>-33.28</td><td>63.08</td><td>32.48</td><td>11.04</td><td>66.37</td><td>0.49</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7266.00</td><td>44.94</td><td>74.00</td><td>-29.06</td><td>60.07</td><td>36.97</td><td>13.26</td><td>65.75</td><td>0.39</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2270.00	58.99	74.00	-15.01	44.75	27.20	7.51	30.38	9.91	100	303	PEAK	2	2270.00	49.01	54.00	-4.99	34.77	27.20	7.51	30.38	9.91	100	303	AVERAGE	3	4844.00	40.72	74.00	-33.28	63.08	32.48	11.04	66.37	0.49	--	--	PEAK	4	7266.00	44.94	74.00	-29.06	60.07	36.97	13.26	65.75	0.39	--	--	PEAK	Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_240328 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2270.00</td><td>58.19</td><td>74.00</td><td>-15.81</td><td>44.20</td><td>27.00</td><td>7.47</td><td>30.39</td><td>9.91</td><td>100</td><td>64</td><td>PEAK</td></tr><tr><td>2</td><td>2270.00</td><td>47.40</td><td>54.00</td><td>-6.60</td><td>33.16</td><td>27.20</td><td>7.51</td><td>30.38</td><td>9.91</td><td>100</td><td>64</td><td>AVERAGE</td></tr><tr><td>3</td><td>4844.00</td><td>40.20</td><td>74.00</td><td>-33.80</td><td>62.56</td><td>32.48</td><td>11.04</td><td>66.37</td><td>0.49</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7266.00</td><td>45.96</td><td>74.00</td><td>-28.04</td><td>61.09</td><td>36.97</td><td>13.26</td><td>65.75</td><td>0.39</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2270.00	58.19	74.00	-15.81	44.20	27.00	7.47	30.39	9.91	100	64	PEAK	2	2270.00	47.40	54.00	-6.60	33.16	27.20	7.51	30.38	9.91	100	64	AVERAGE	3	4844.00	40.20	74.00	-33.80	62.56	32.48	11.04	66.37	0.49	--	--	PEAK	4	7266.00	45.96	74.00	-28.04	61.09	36.97	13.26	65.75	0.39	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																														
1	2270.00	58.99	74.00	-15.01	44.75	27.20	7.51	30.38	9.91	100	303	PEAK																																																																																																																																																												
2	2270.00	49.01	54.00	-4.99	34.77	27.20	7.51	30.38	9.91	100	303	AVERAGE																																																																																																																																																												
3	4844.00	40.72	74.00	-33.28	63.08	32.48	11.04	66.37	0.49	--	--	PEAK																																																																																																																																																												
4	7266.00	44.94	74.00	-29.06	60.07	36.97	13.26	65.75	0.39	--	--	PEAK																																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																														
1	2270.00	58.19	74.00	-15.81	44.20	27.00	7.47	30.39	9.91	100	64	PEAK																																																																																																																																																												
2	2270.00	47.40	54.00	-6.60	33.16	27.20	7.51	30.38	9.91	100	64	AVERAGE																																																																																																																																																												
3	4844.00	40.20	74.00	-33.80	62.56	32.48	11.04	66.37	0.49	--	--	PEAK																																																																																																																																																												
4	7266.00	45.96	74.00	-28.04	61.09	36.97	13.26	65.75	0.39	--	--	PEAK																																																																																																																																																												

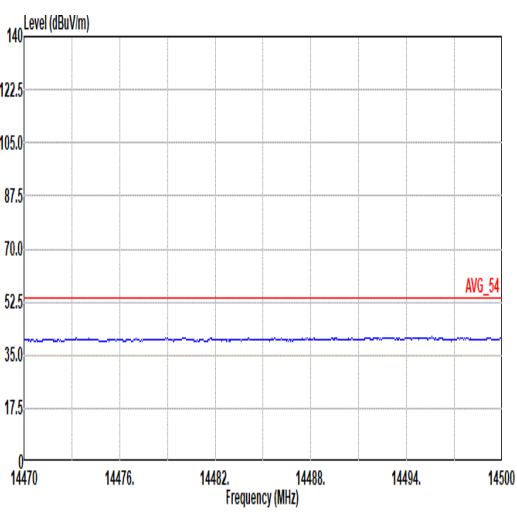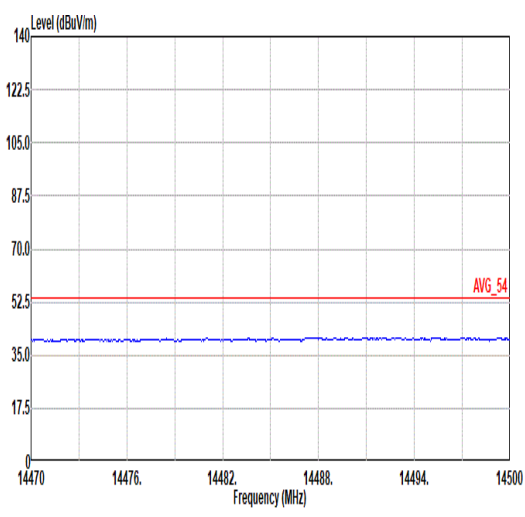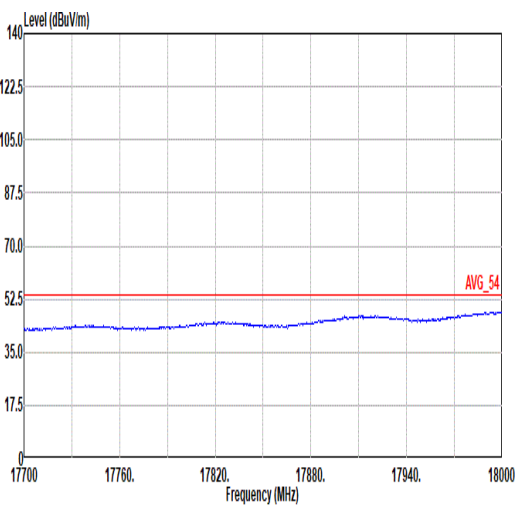
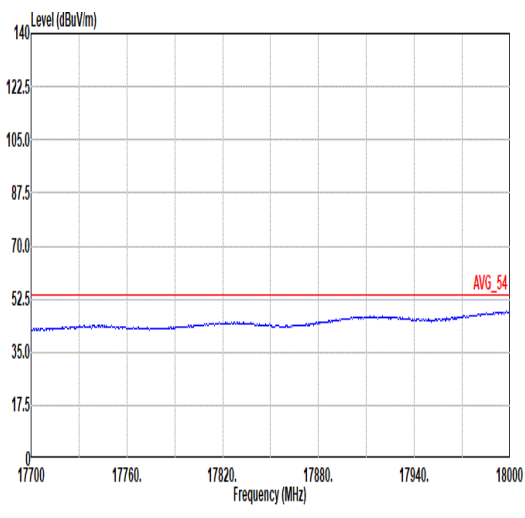


Mode	12	
	Harmonic	
	2400-2483.5_802.11ax HE40_CH03_Full RU_2422MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg.	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

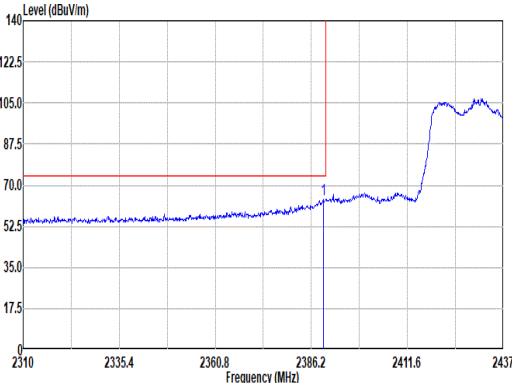
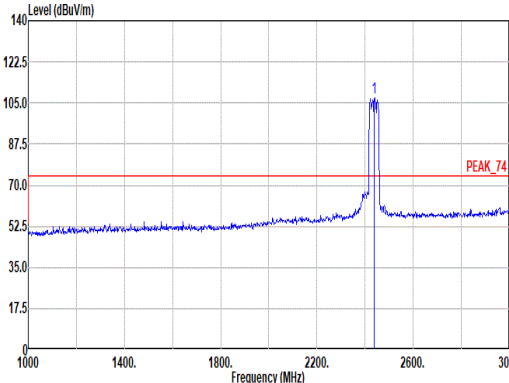
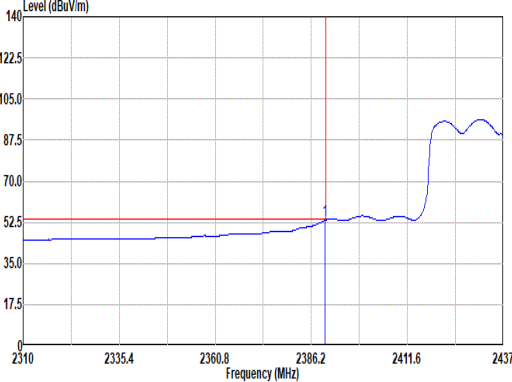
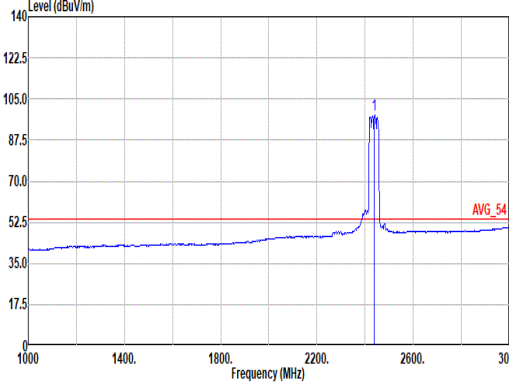


Mode	13																																																																																																	
	Band Edge - L																																																																																																	
	2400-2483.5_802.11ax HE40_CH06_Full RU_2437MHz																																																																																																	
ANT	1+2																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.38</td><td>63.66</td><td>74.00</td><td>-10.34</td><td>49.07</td><td>27.29</td><td>7.71</td><td>30.33</td><td>9.92</td><td>100</td><td>123</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2389.38	63.66	74.00	-10.34	49.07	27.29	7.71	30.33	9.92	100	123	PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>107.37</td><td>-----</td><td>-----</td><td>92.36</td><td>27.60</td><td>7.80</td><td>30.31</td><td>9.92</td><td>100</td><td>123</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2437.00	107.37	-----	-----	92.36	27.60	7.80	30.31	9.92	100	123	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2389.38	63.66	74.00	-10.34	49.07	27.29	7.71	30.33	9.92	100	123	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	107.37	-----	-----	92.36	27.60	7.80	30.31	9.92	100	123	PEAK																																																																																						
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.88</td><td>53.43</td><td>54.00</td><td>-0.57</td><td>38.83</td><td>27.30</td><td>7.71</td><td>30.33</td><td>9.92</td><td>100</td><td>123</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2389.88	53.43	54.00	-0.57	38.83	27.30	7.71	30.33	9.92	100	123	AVERAGE	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>98.20</td><td>-----</td><td>-----</td><td>83.19</td><td>27.60</td><td>7.80</td><td>30.31</td><td>9.92</td><td>100</td><td>123</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2437.00	98.20	-----	-----	83.19	27.60	7.80	30.31	9.92	100	123	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2389.88	53.43	54.00	-0.57	38.83	27.30	7.71	30.33	9.92	100	123	AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	98.20	-----	-----	83.19	27.60	7.80	30.31	9.92	100	123	AVERAGE																																																																																						

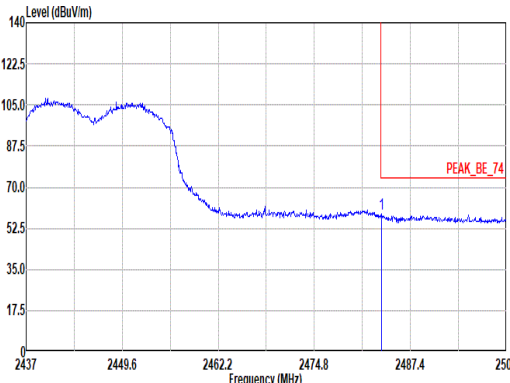
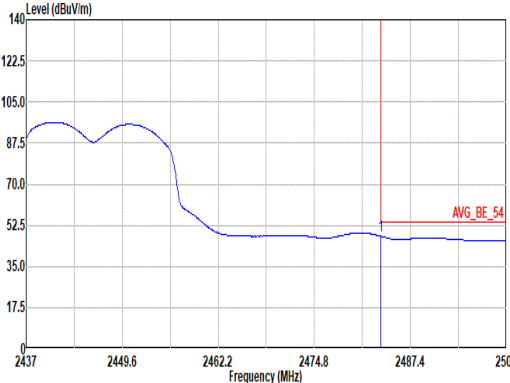


Mode	13																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11ax HE40_CH06_Full RU_2437MHz																																																							
ANT	1+2																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>58.50</td><td>74.00</td><td>-15.50</td><td>43.32</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td><td>100</td><td>123</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2483.62	58.50	74.00	-15.50	43.32	27.70	7.86	30.30	9.92	100	123	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																		
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																														
1	2483.62	58.50	74.00	-15.50	43.32	27.70	7.86	30.30	9.92	100	123	PEAK																																												
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>47.83</td><td>54.00</td><td>-6.17</td><td>32.65</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td><td>100</td><td>123</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2483.56	47.83	54.00	-6.17	32.65	27.70	7.86	30.30	9.92	100	123	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																		
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																														
1	2483.56	47.83	54.00	-6.17	32.65	27.70	7.86	30.30	9.92	100	123	AVERAGE																																												

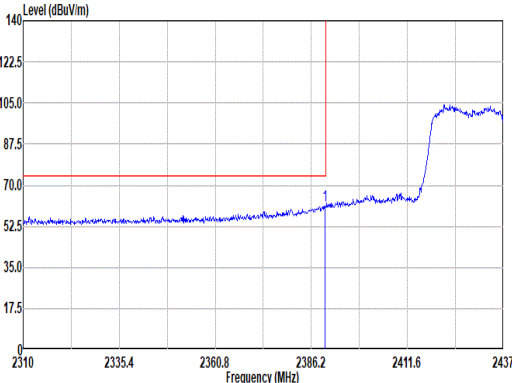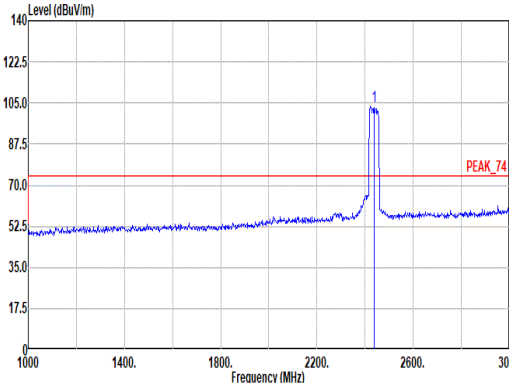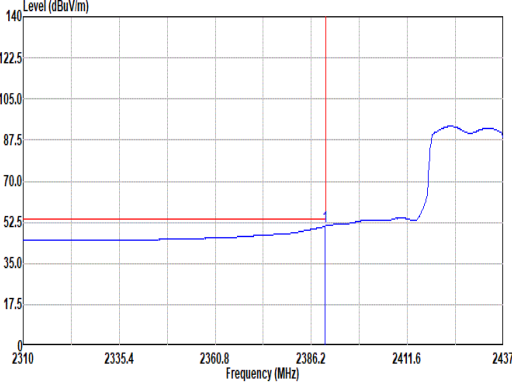
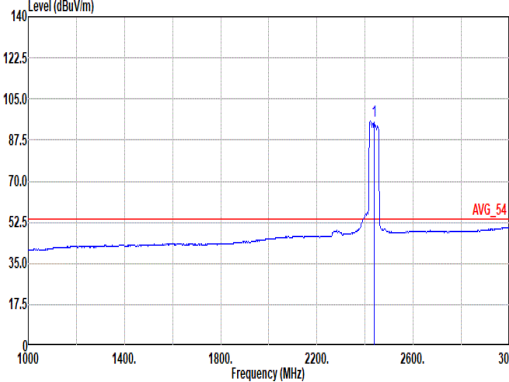


		13																																																																																																	
Mode	Band Edge - L																																																																																																		
	2400-2483.5_802.11ax HE40_CH06_Full RU_2437MHz																																																																																																		
ANT	1+2																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.76</td><td>61.54</td><td>74.00</td><td>-12.46</td><td>46.94</td><td>27.30</td><td>7.71</td><td>30.33</td><td>9.92</td><td>100</td><td>17</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	2389.76	61.54	74.00	-12.46	46.94	27.30	7.71	30.33	9.92	100	17	PEAK	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>103.57</td><td>-----</td><td>-----</td><td>88.79</td><td>27.42</td><td>7.76</td><td>30.32</td><td>9.92</td><td>100</td><td>17</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	2437.00	103.57	-----	-----	88.79	27.42	7.76	30.32	9.92	100	17
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2389.76	61.54	74.00	-12.46	46.94	27.30	7.71	30.33	9.92	100	17	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	103.57	-----	-----	88.79	27.42	7.76	30.32	9.92	100	17	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.88</td><td>50.92</td><td>54.00</td><td>-3.08</td><td>36.32</td><td>27.30</td><td>7.71</td><td>30.33</td><td>9.92</td><td>100</td><td>17</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	2389.88	50.92	54.00	-3.08	36.32	27.30	7.71	30.33	9.92	100	17	AVERAGE	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>95.36</td><td>-----</td><td>-----</td><td>80.58</td><td>27.42</td><td>7.76</td><td>30.32</td><td>9.92</td><td>100</td><td>17</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	2437.00	95.36	-----	-----	80.58	27.42	7.76	30.32	9.92	100	17
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2389.88	50.92	54.00	-3.08	36.32	27.30	7.71	30.33	9.92	100	17	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	95.36	-----	-----	80.58	27.42	7.76	30.32	9.92	100	17	AVERAGE																																																																																							



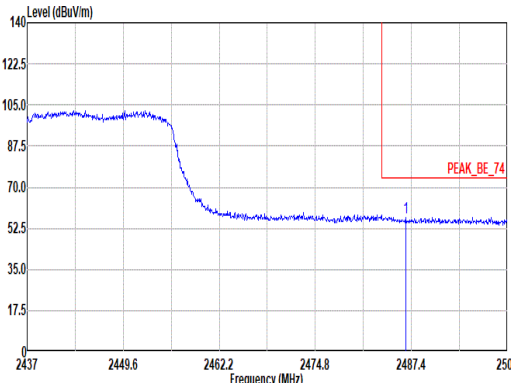
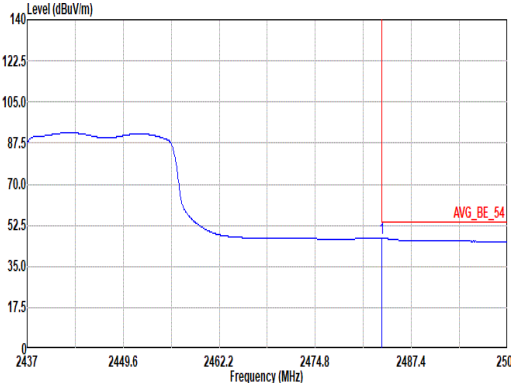


Mode	13																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11ax HE40_CH06_Full RU_2437MHz																																																							
ANT	1+2																																																							
Pol.	Vertical																																																							
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2486.64</td><td>57.30</td><td>74.00</td><td>-16.70</td><td>42.12</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td><td>100 17 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2486.64	57.30	74.00	-16.70	42.12	27.70	7.86	30.30	9.92	100 17 PEAK	Blank
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																														
1	2486.64	57.30	74.00	-16.70	42.12	27.70	7.86	30.30	9.92	100 17 PEAK																																														
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2483.56</td><td>47.03</td><td>54.00</td><td>-6.97</td><td>31.85</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td><td>100 17 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2483.56	47.03	54.00	-6.97	31.85	27.70	7.86	30.30	9.92	100 17 AVERAGE	Blank
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																														
1	2483.56	47.03	54.00	-6.97	31.85	27.70	7.86	30.30	9.92	100 17 AVERAGE																																														



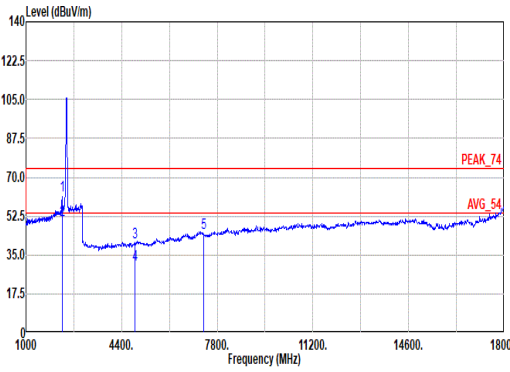
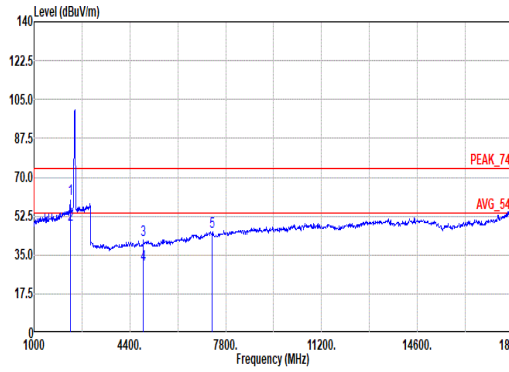


Mode	13										
	Harmonic										
	2400-2483.5_802.11ax HE40_CH06_Full RU_2437MHz										
ANT	1+2										
Pol.	Horizontal						Vertical				
Peak Avg.											
	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL				
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2280.00	61.60	74.00	-12.40	47.41	27.10	7.55	30.37	9.91	100	302 PEAK
2	2280.00	50.72	54.00	-3.28	36.45	27.20	7.53	30.37	9.91	100	302 AVERAGE
3	4874.00	40.86	74.00	-33.14	63.05	32.60	11.05	66.34	0.50	100	121 PEAK
4	4874.00	30.47	54.00	-23.53	52.66	32.60	11.05	66.34	0.50	100	121 AVERAGE
5	7311.00	45.09	74.00	-28.91	60.29	36.83	13.29	65.75	0.43	--	-- PEAK
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2280.00	60.07	74.00	-13.93	45.02	27.20	7.52	30.38	9.91	100	63 PEAK
2	2280.00	48.64	54.00	-5.36	34.37	27.20	7.53	30.37	9.91	100	63 AVERAGE
3	4874.00	41.72	74.00	-32.28	63.91	32.60	11.05	66.34	0.50	100	47 PEAK
4	4874.00	30.61	54.00	-23.39	52.80	32.60	11.05	66.34	0.50	100	47 AVERAGE
5	7311.00	45.20	74.00	-28.80	60.40	36.83	13.29	65.75	0.43	--	-- PEAK

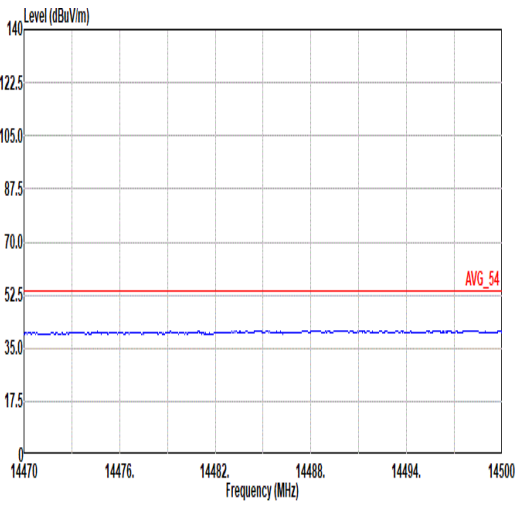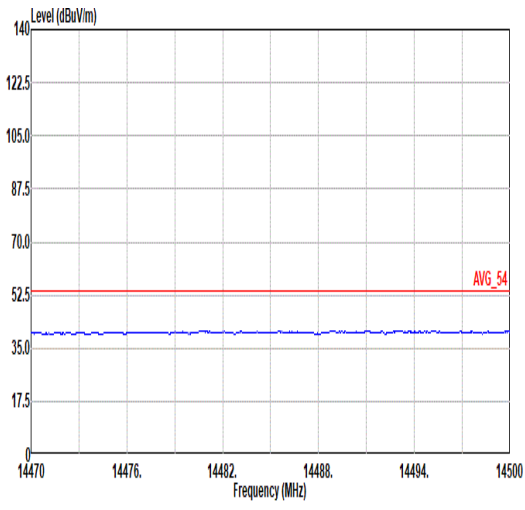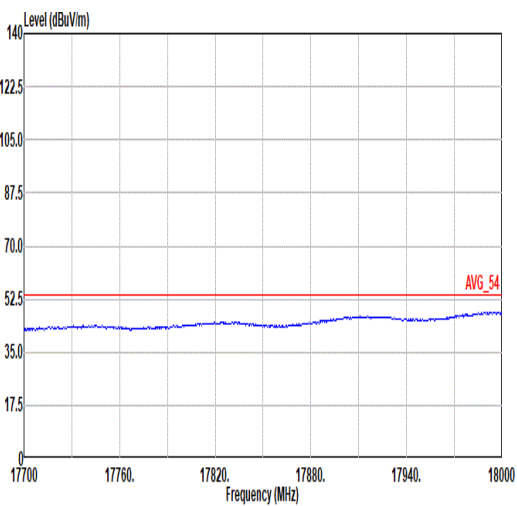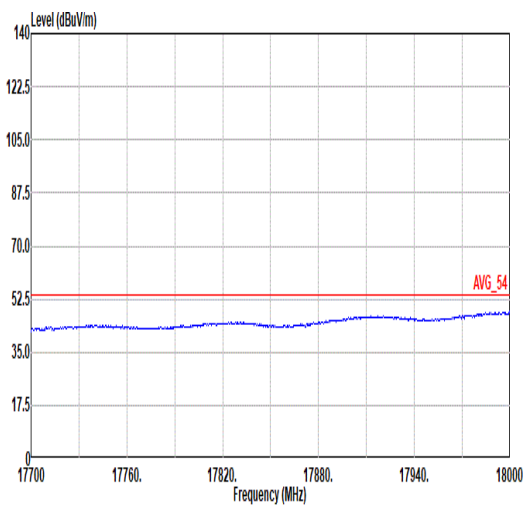

Mode	13	
	Harmonic	
	2400-2483.5_802.11ax HE40_CH06_Full RU_2437MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg.	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

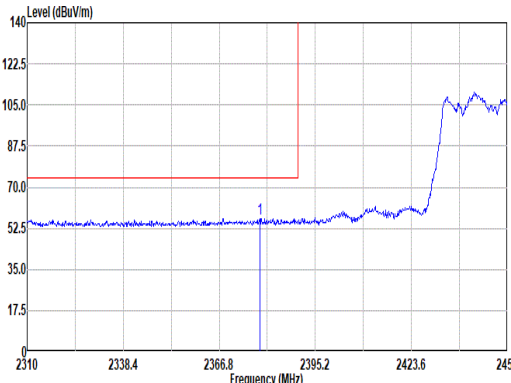
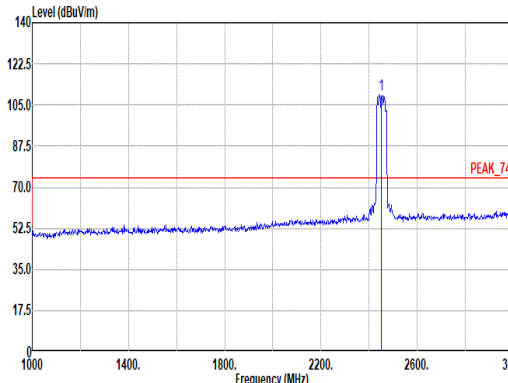
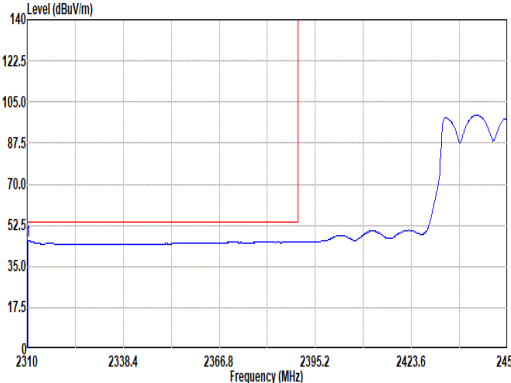
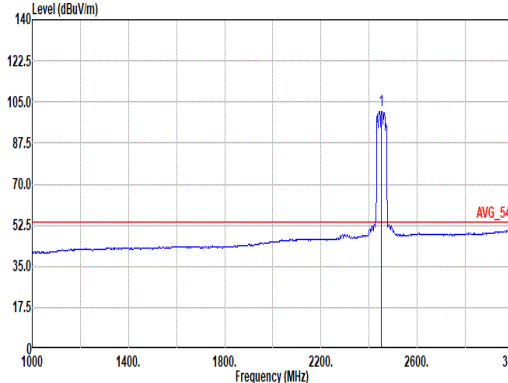


Mode	14																																																																																											
	Band Edge - L																																																																																											
	2400-2483.5_802.11ax HE40_CH09_Full RU_2452MHz																																																																																											
ANT	1+2																																																																																											
Pol.	Horizontal												Fundamental																																																																															
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2378.87</td><td>56.43</td><td>74.00</td><td>-17.57</td><td>41.96</td><td>27.20</td><td>7.69</td><td>30.34</td><td>9.92</td><td>115</td><td>251</td><td>PEAK</td></tr></table>														Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2378.87	56.43	74.00	-17.57	41.96	27.20	7.69	30.34	9.92	115	251	PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2452.00</td><td>109.14</td><td>74.00</td><td>35.14</td><td>94.14</td><td>27.58</td><td>7.81</td><td>30.31</td><td>9.92</td><td>115</td><td>251</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2452.00	109.14	74.00	35.14	94.14	27.58	7.81	30.31	9.92	115	251	PEAK
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	2378.87	56.43	74.00	-17.57	41.96	27.20	7.69	30.34	9.92	115	251	PEAK																																																																																
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	2452.00	109.14	74.00	35.14	94.14	27.58	7.81	30.31	9.92	115	251	PEAK																																																																																
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2310.14</td><td>45.92</td><td>54.00</td><td>-8.08</td><td>31.68</td><td>27.10</td><td>7.58</td><td>30.36</td><td>9.92</td><td>115</td><td>251</td><td>AVERAGE</td></tr></table>														Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2310.14	45.92	54.00	-8.08	31.68	27.10	7.58	30.36	9.92	115	251	AVERAGE	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2452.00</td><td>101.17</td><td>54.00</td><td>47.17</td><td>86.17</td><td>27.58</td><td>7.81</td><td>30.31</td><td>9.92</td><td>115</td><td>251</td><td>AVERAGE</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2452.00	101.17	54.00	47.17	86.17	27.58	7.81	30.31	9.92	115	251	AVERAGE
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	2310.14	45.92	54.00	-8.08	31.68	27.10	7.58	30.36	9.92	115	251	AVERAGE																																																																																
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	2452.00	101.17	54.00	47.17	86.17	27.58	7.81	30.31	9.92	115	251	AVERAGE																																																																																





Mode	14																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11ax HE40_CH09_Full RU_2452MHz																																																						
ANT	1+2																																																						
Pol.	Horizontal						Fundamental																																																
Peak	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.74</td><td>61.76</td><td>74.00</td><td>-12.24</td><td>46.58</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td><td>115</td><td>251</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.74	61.76	74.00	-12.24	46.58	27.70	7.86	30.30	9.92	115	251	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	2483.74	61.76	74.00	-12.24	46.58	27.70	7.86	30.30	9.92	115	251	PEAK																																											
Avg.	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>50.02</td><td>54.00</td><td>-3.98</td><td>34.04</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td><td>115</td><td>251</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.51	50.02	54.00	-3.98	34.04	27.70	7.86	30.30	9.92	115	251	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	2483.51	50.02	54.00	-3.98	34.04	27.70	7.86	30.30	9.92	115	251	AVERAGE																																											

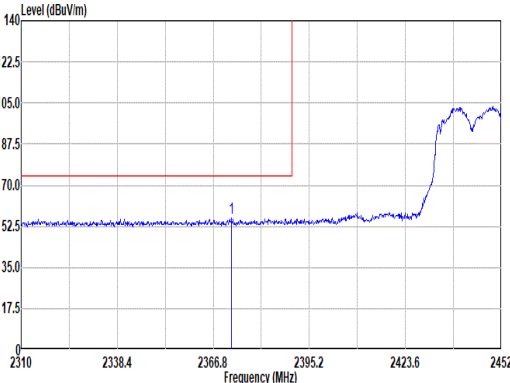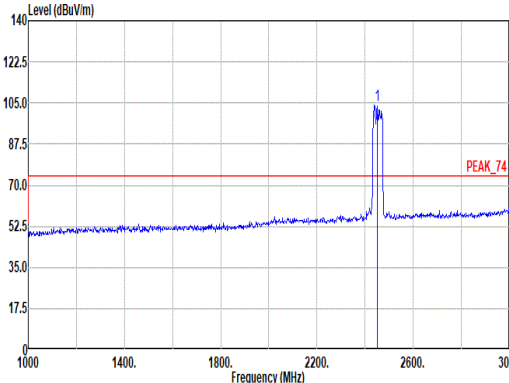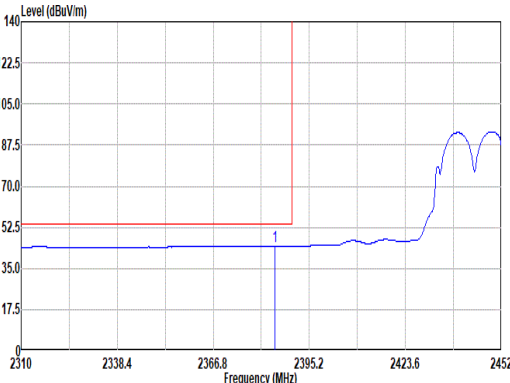
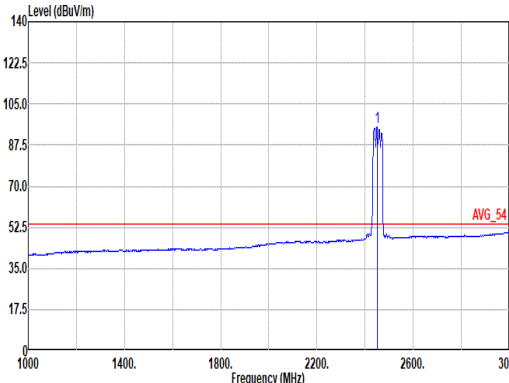


Mode	14																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11ax HE40_CH09_Full RU_2452MHz																																																																																																			
ANT	1+2																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2372.20</td><td>55.86</td><td>74.00</td><td>-18.14</td><td>41.40</td><td>27.20</td><td>7.68</td><td>30.34</td><td>9.92</td><td>100</td><td>306</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2372.20	55.86	74.00	-18.14	41.40	27.20	7.68	30.34	9.92	100	306	PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>103.91</td><td>-----</td><td>-----</td><td>88.93</td><td>27.58</td><td>7.79</td><td>30.31</td><td>9.92</td><td>100</td><td>306</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	103.91	-----	-----	88.93	27.58	7.79	30.31	9.92	100	306	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2372.20	55.86	74.00	-18.14	41.40	27.20	7.68	30.34	9.92	100	306	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2452.00	103.91	-----	-----	88.93	27.58	7.79	30.31	9.92	100	306	PEAK																																																																																								
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2384.98</td><td>44.52</td><td>54.00</td><td>-9.48</td><td>29.98</td><td>27.25</td><td>7.70</td><td>30.33</td><td>9.92</td><td>100</td><td>306</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2384.98	44.52	54.00	-9.48	29.98	27.25	7.70	30.33	9.92	100	306	AVERAGE	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>95.12</td><td>-----</td><td>-----</td><td>80.11</td><td>27.60</td><td>7.80</td><td>30.31</td><td>9.92</td><td>100</td><td>306</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	95.12	-----	-----	80.11	27.60	7.80	30.31	9.92	100	306	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2384.98	44.52	54.00	-9.48	29.98	27.25	7.70	30.33	9.92	100	306	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2452.00	95.12	-----	-----	80.11	27.60	7.80	30.31	9.92	100	306	AVERAGE																																																																																								



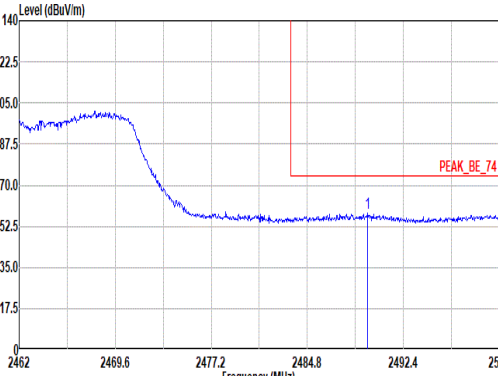
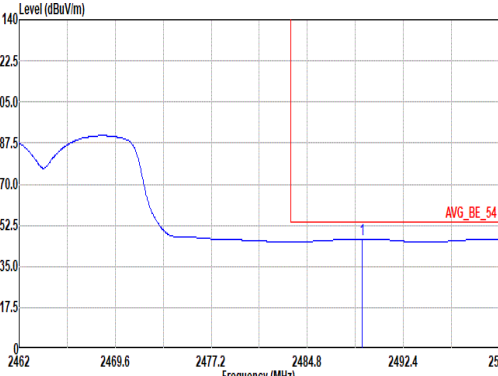


Mode	14																																											
	Band Edge - R																																											
	2400-2483.5_802.11ax HE40_CH09_Full RU_2452MHz																																											
ANT	1+2																																											
Pol.	Vertical						Fundamental																																					
Peak							Blank																																					
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2489.59</td><td>58.11</td><td>74.00</td><td>-15.89</td><td>42.91</td><td>27.70</td><td>7.87</td><td>30.29</td><td>9.92</td><td>100</td><td>306</td><td>PEAK</td></tr></tbody></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2489.59	58.11	74.00	-15.89	42.91	27.70
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																	
1	2489.59	58.11	74.00	-15.89	42.91	27.70	7.87	30.29	9.92	100	306	PEAK																																
Avg.							Blank																																					
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2489.13</td><td>46.70</td><td>54.00</td><td>-7.30</td><td>31.50</td><td>27.70</td><td>7.87</td><td>30.29</td><td>9.92</td><td>100</td><td>306</td><td>AVERAGE</td></tr></tbody></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2489.13	46.70	54.00	-7.30	31.50	27.70
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																	
1	2489.13	46.70	54.00	-7.30	31.50	27.70	7.87	30.29	9.92	100	306	AVERAGE																																



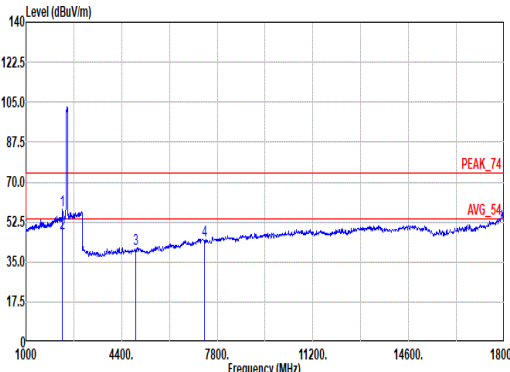
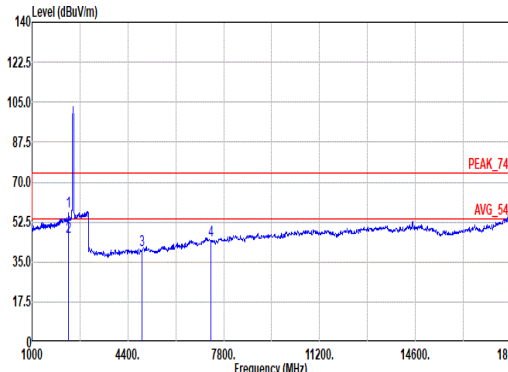


Mode	14																																																																																																																																																																									
	Harmonic																																																																																																																																																																									
	2400-2483.5_802.11ax HE40_CH09_Full RU_2452MHz																																																																																																																																																																									
ANT	1+2																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
Peak Avg.	 Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_240328 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2294.00</td><td>57.75</td><td>74.00</td><td>-16.25</td><td></td><td>43.56</td><td>27.10</td><td>7.55</td><td>30.37</td><td>9.91</td><td>100</td><td>110</td><td>PEAK</td></tr><tr><td>2</td><td>2294.00</td><td>47.38</td><td>54.00</td><td>-6.62</td><td></td><td>33.19</td><td>27.10</td><td>7.55</td><td>30.37</td><td>9.91</td><td>100</td><td>110</td><td>AVERAGE</td></tr><tr><td>3</td><td>4904.00</td><td>40.64</td><td>74.00</td><td>-33.36</td><td></td><td>62.68</td><td>32.72</td><td>11.05</td><td>66.32</td><td>0.51</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7356.00</td><td>44.34</td><td>74.00</td><td>-29.66</td><td></td><td>59.74</td><td>36.58</td><td>13.32</td><td>65.76</td><td>0.46</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2294.00	57.75	74.00	-16.25		43.56	27.10	7.55	30.37	9.91	100	110	PEAK	2	2294.00	47.38	54.00	-6.62		33.19	27.10	7.55	30.37	9.91	100	110	AVERAGE	3	4904.00	40.64	74.00	-33.36		62.68	32.72	11.05	66.32	0.51	--	--	PEAK	4	7356.00	44.34	74.00	-29.66		59.74	36.58	13.32	65.76	0.46	--	--	PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_240328 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2294.00</td><td>57.26</td><td>74.00</td><td>-16.74</td><td></td><td>43.04</td><td>27.14</td><td>7.54</td><td>30.37</td><td>9.91</td><td>100</td><td>110</td><td>PEAK</td></tr><tr><td>2</td><td>2294.00</td><td>46.15</td><td>54.00</td><td>-7.85</td><td></td><td>31.96</td><td>27.10</td><td>7.55</td><td>30.37</td><td>9.91</td><td>100</td><td>110</td><td>AVERAGE</td></tr><tr><td>3</td><td>4904.00</td><td>40.32</td><td>74.00</td><td>-33.68</td><td></td><td>62.36</td><td>32.72</td><td>11.05</td><td>66.32</td><td>0.51</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7356.00</td><td>44.61</td><td>74.00</td><td>-29.39</td><td></td><td>60.01</td><td>36.58</td><td>13.32</td><td>65.76</td><td>0.46</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2294.00	57.26	74.00	-16.74		43.04	27.14	7.54	30.37	9.91	100	110	PEAK	2	2294.00	46.15	54.00	-7.85		31.96	27.10	7.55	30.37	9.91	100	110	AVERAGE	3	4904.00	40.32	74.00	-33.68		62.36	32.72	11.05	66.32	0.51	--	--	PEAK	4	7356.00	44.61	74.00	-29.39		60.01	36.58	13.32	65.76	0.46	--	--	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																													
1	2294.00	57.75	74.00	-16.25		43.56	27.10	7.55	30.37	9.91	100	110	PEAK																																																																																																																																																													
2	2294.00	47.38	54.00	-6.62		33.19	27.10	7.55	30.37	9.91	100	110	AVERAGE																																																																																																																																																													
3	4904.00	40.64	74.00	-33.36		62.68	32.72	11.05	66.32	0.51	--	--	PEAK																																																																																																																																																													
4	7356.00	44.34	74.00	-29.66		59.74	36.58	13.32	65.76	0.46	--	--	PEAK																																																																																																																																																													
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																													
1	2294.00	57.26	74.00	-16.74		43.04	27.14	7.54	30.37	9.91	100	110	PEAK																																																																																																																																																													
2	2294.00	46.15	54.00	-7.85		31.96	27.10	7.55	30.37	9.91	100	110	AVERAGE																																																																																																																																																													
3	4904.00	40.32	74.00	-33.68		62.36	32.72	11.05	66.32	0.51	--	--	PEAK																																																																																																																																																													
4	7356.00	44.61	74.00	-29.39		60.01	36.58	13.32	65.76	0.46	--	--	PEAK																																																																																																																																																													

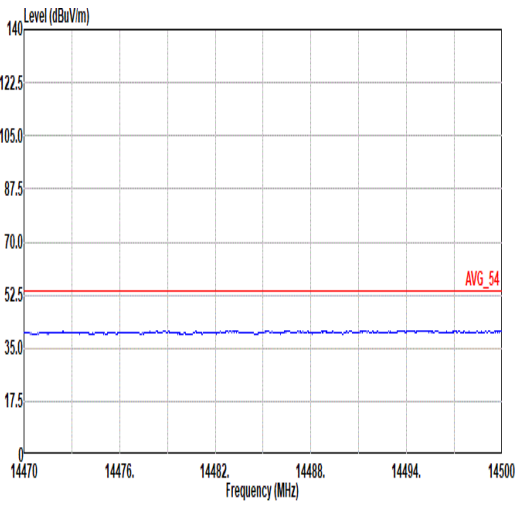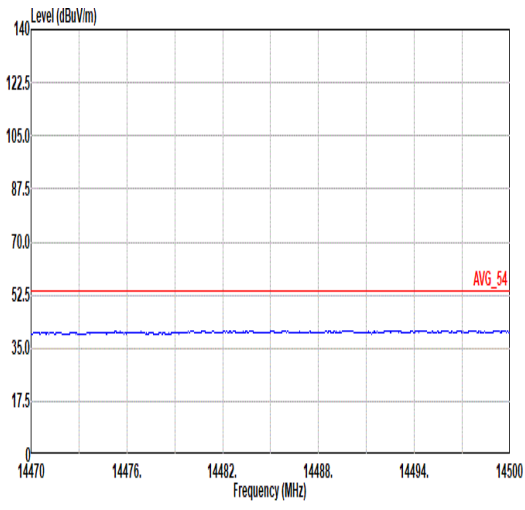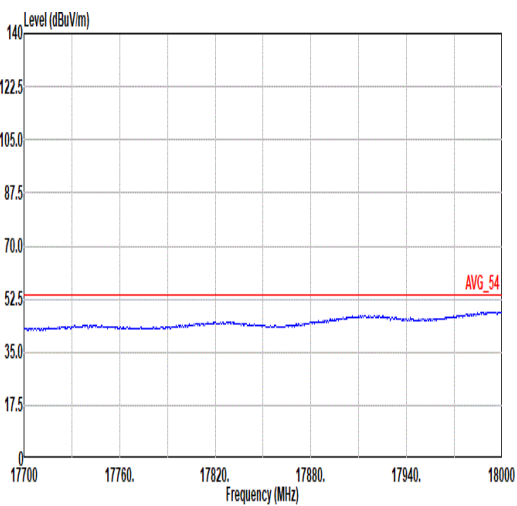
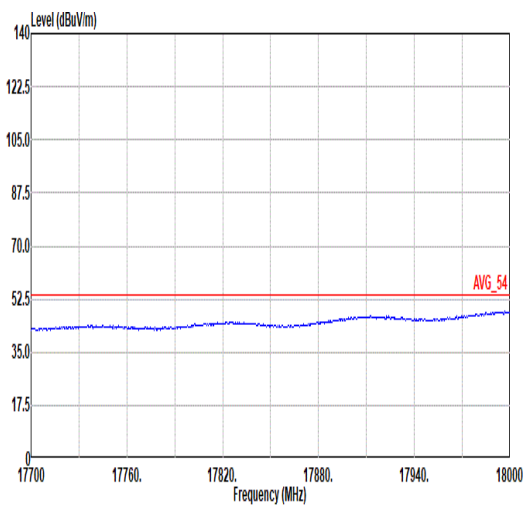


Mode	14	
	Harmonic	
	2400-2483.5_802.11ax HE40_CH09_Full RU_2452MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg.	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
17.7G ~18G Avg.	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

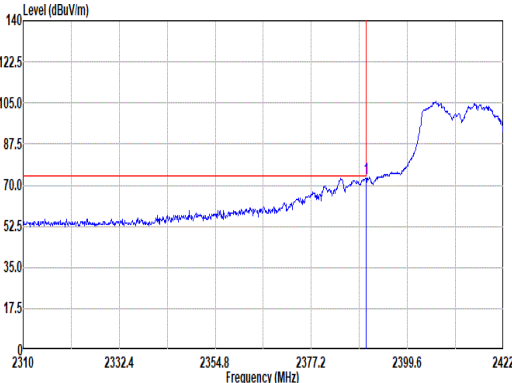
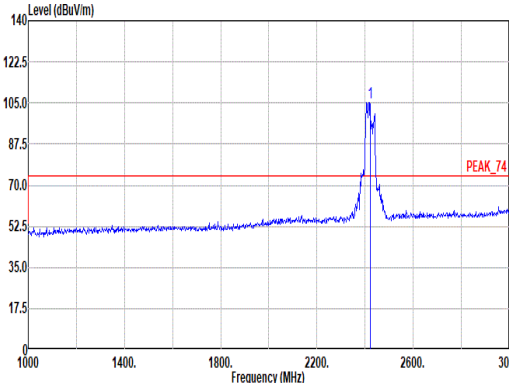
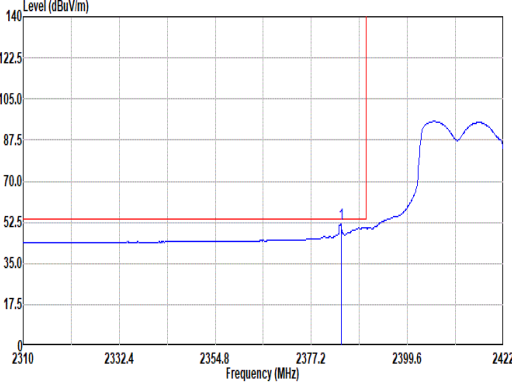
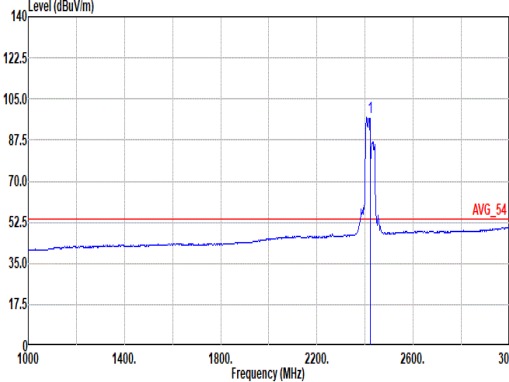


Mode	15																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_802.11ax HE40_CH03_Partial RU 242/61_2422MHz																																																																																								
ANT	1+2																																																																																								
Pol.	Horizontal						Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.97</td><td>73.08</td><td>74.00</td><td>-0.92</td><td>58.48</td><td>27.30</td><td>7.71</td><td>30.33</td><td>9.92</td><td>100</td><td>124</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.97	73.08	74.00	-0.92	58.48	27.30	7.71	30.33	9.92	100	124	PEAK	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>105.07</td><td>-----</td><td>-----</td><td>90.32</td><td>27.40</td><td>7.75</td><td>30.32</td><td>9.92</td><td>100</td><td>124</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2422.00	105.07	-----	-----	90.32	27.40	7.75	30.32	9.92	100	124
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.97	73.08	74.00	-0.92	58.48	27.30	7.71	30.33	9.92	100	124	PEAK																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2422.00	105.07	-----	-----	90.32	27.40	7.75	30.32	9.92	100	124	PEAK																																																																													
Avg.																																																																																									
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2384.14</td><td>51.55</td><td>54.00</td><td>-2.45</td><td>37.02</td><td>27.24</td><td>7.70</td><td>30.33</td><td>9.92</td><td>100</td><td>124</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2384.14	51.55	54.00	-2.45	37.02	27.24	7.70	30.33	9.92	100	124	AVERAGE	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>97.32</td><td>-----</td><td>-----</td><td>82.59</td><td>27.40</td><td>7.74</td><td>30.33</td><td>9.92</td><td>100</td><td>124</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2422.00	97.32	-----	-----	82.59	27.40	7.74	30.33	9.92	100	124
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2384.14	51.55	54.00	-2.45	37.02	27.24	7.70	30.33	9.92	100	124	AVERAGE																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2422.00	97.32	-----	-----	82.59	27.40	7.74	30.33	9.92	100	124	AVERAGE																																																																													

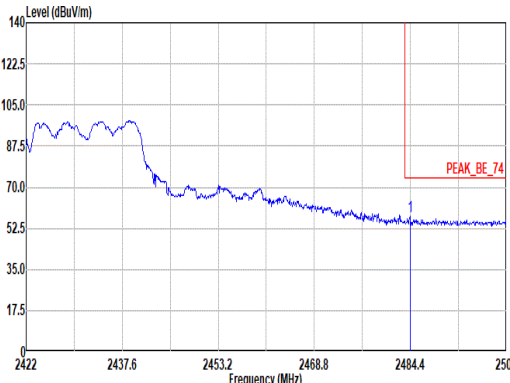
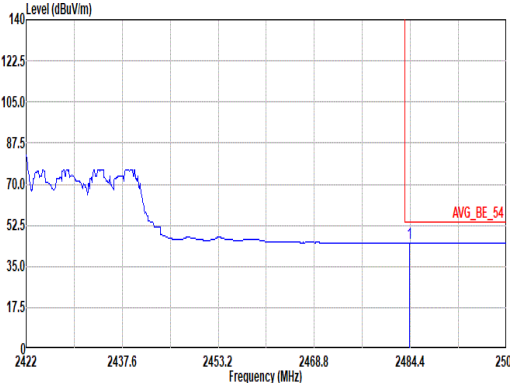


Mode	15																																																											
	Band Edge - R																																																											
	2400-2483.5_802.11ax HE40_CH03_Partial RU 242/61_2422MHz																																																											
ANT	1+2																																																											
Pol.	Horizontal						Fundamental																																																					
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.32</td><td>57.53</td><td>74.00</td><td>-16.47</td><td>42.35</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td><td>100</td><td>124 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2484.32	57.53	74.00	-16.47	42.35	27.70	7.86	30.30	9.92	100	124 PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																		
1	2484.32	57.53	74.00	-16.47	42.35	27.70	7.86	30.30	9.92	100	124 PEAK																																																	
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.24</td><td>45.05</td><td>54.00</td><td>-8.95</td><td>29.87</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td><td>100</td><td>124 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2484.24	45.05	54.00	-8.95	29.87	27.70	7.86	30.30	9.92	100	124 AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																		
1	2484.24	45.05	54.00	-8.95	29.87	27.70	7.86	30.30	9.92	100	124 AVERAGE																																																	

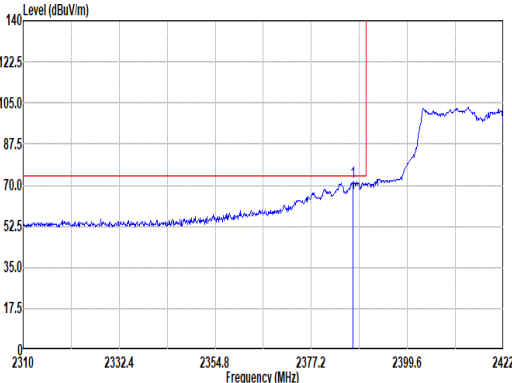
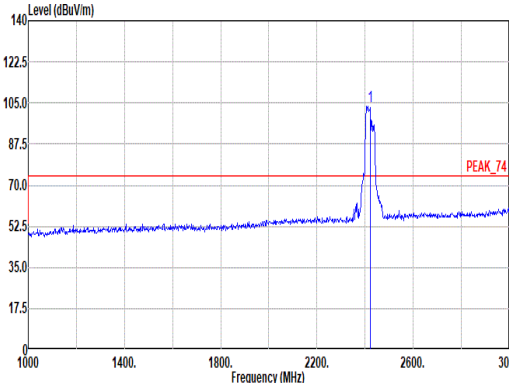
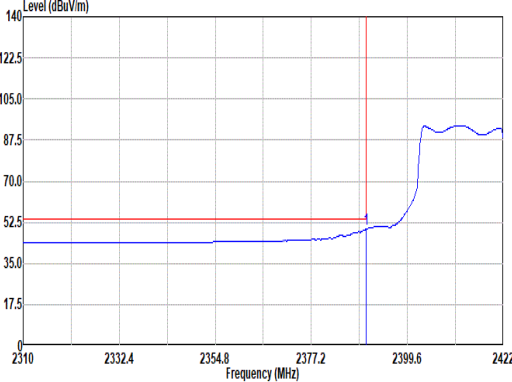
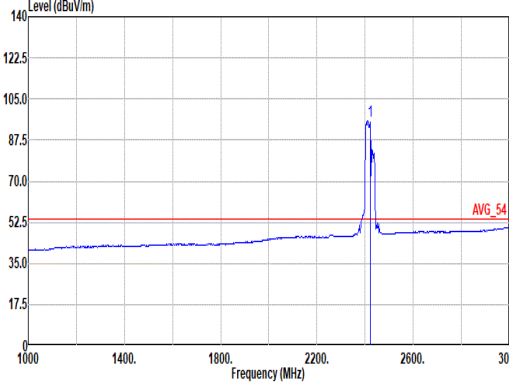


Mode	15																																																																																																														
	Band Edge - L																																																																																																														
	2400-2483.5_802.11ax HE40_CH03_Partial RU 242/61_2422MHz																																																																																																														
ANT	1+2																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																																								
Avg.																																																																																																															
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto						Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto																																																																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.94</td><td>71.33</td><td>74.00</td><td>-2.67</td><td>56.76</td><td>27.27</td><td>7.71</td><td>30.33</td><td>9.92</td><td>300</td><td>102</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.94	71.33	74.00	-2.67	56.76	27.27	7.71	30.33	9.92	300	102	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>103.62</td><td>-----</td><td>-----</td><td>88.09</td><td>27.40</td><td>7.74</td><td>30.33</td><td>9.92</td><td>300</td><td>102</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	103.62	-----	-----	88.09	27.40	7.74	30.33	9.92	300	102	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2386.94	71.33	74.00	-2.67	56.76	27.27	7.71	30.33	9.92	300	102	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2422.00	103.62	-----	-----	88.09	27.40	7.74	30.33	9.92	300	102	PEAK																																																																																																			
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.97</td><td>49.47</td><td>54.00</td><td>-4.53</td><td>34.87</td><td>27.30</td><td>7.71</td><td>30.33</td><td>9.92</td><td>300</td><td>102</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.97	49.47	54.00	-4.53	34.87	27.30	7.71	30.33	9.92	300	102	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>95.61</td><td>-----</td><td>-----</td><td>88.06</td><td>27.40</td><td>7.75</td><td>30.32</td><td>9.92</td><td>300</td><td>102</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	95.61	-----	-----	88.06	27.40	7.75	30.32	9.92	300	102	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2389.97	49.47	54.00	-4.53	34.87	27.30	7.71	30.33	9.92	300	102	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2422.00	95.61	-----	-----	88.06	27.40	7.75	30.32	9.92	300	102	AVERAGE																																																																																																			

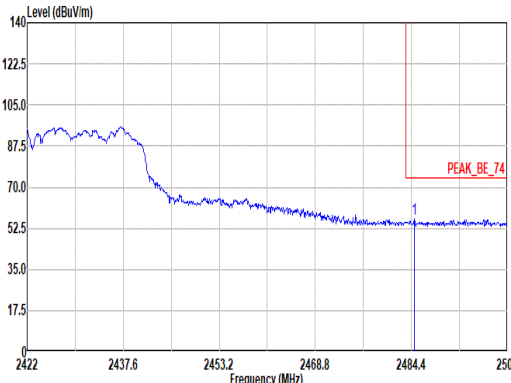
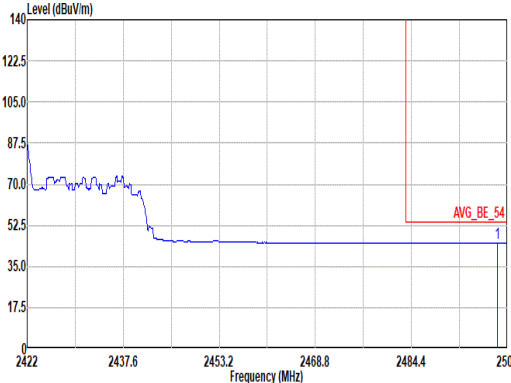


Mode	15																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11ax HE40_CH03_Partial RU 242/61_2422MHz																																																							
ANT	1+2																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.07</td><td>56.41</td><td>74.00</td><td>-17.59</td><td>41.23</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td><td>300</td><td>102</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2484.07	56.41	74.00	-17.59	41.23	27.70	7.86	30.30	9.92	300	102	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																		
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																														
1	2484.07	56.41	74.00	-17.59	41.23	27.70	7.86	30.30	9.92	300	102	PEAK																																												
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2498.36</td><td>44.96</td><td>54.00</td><td>-9.04</td><td>29.75</td><td>27.70</td><td>7.88</td><td>30.29</td><td>9.92</td><td>300</td><td>102</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2498.36	44.96	54.00	-9.04	29.75	27.70	7.88	30.29	9.92	300	102	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																		
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																														
1	2498.36	44.96	54.00	-9.04	29.75	27.70	7.88	30.29	9.92	300	102	AVERAGE																																												

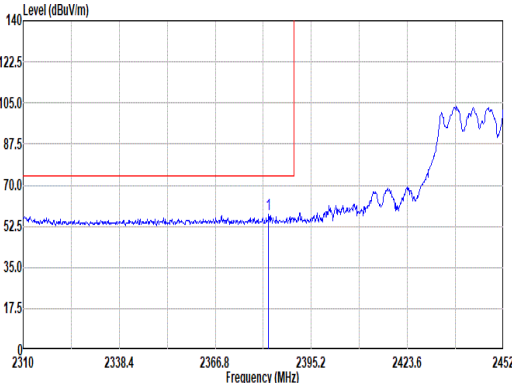
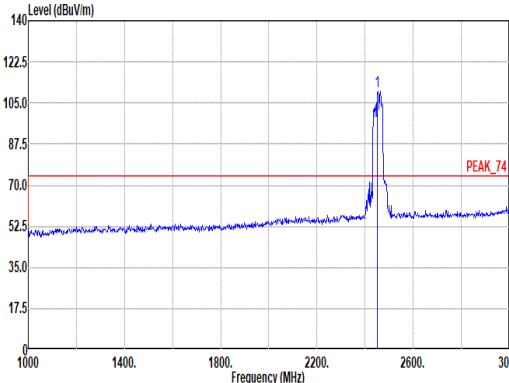
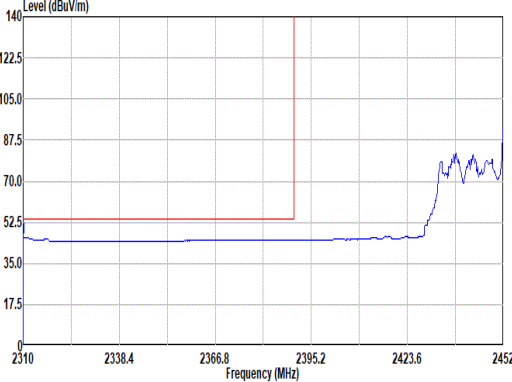
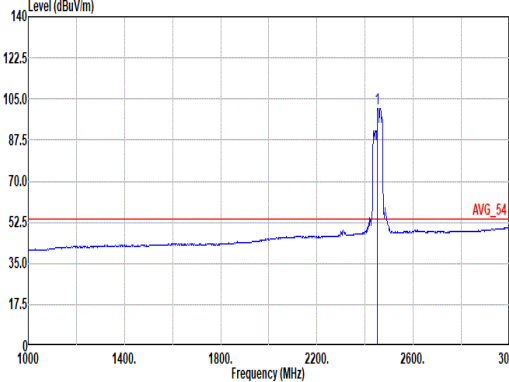


Mode	16																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_802.11ax HE40_CH09_Partial RU 242/62_2452MHz																																																																																								
ANT	1+2																																																																																								
Pol.	Horizontal						Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2382.56</td><td>57.79</td><td>74.00</td><td>-16.21</td><td>43.27</td><td>27.23</td><td>7.70</td><td>30.33</td><td>9.92</td><td>100</td><td>255</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2382.56	57.79	74.00	-16.21	43.27	27.23	7.70	30.33	9.92	100	255	PEAK	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>109.92</td><td>-----</td><td>-----</td><td>94.94</td><td>27.56</td><td>7.81</td><td>30.31</td><td>9.92</td><td>100</td><td>255</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2452.00	109.92	-----	-----	94.94	27.56	7.81	30.31	9.92	100	255
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2382.56	57.79	74.00	-16.21	43.27	27.23	7.70	30.33	9.92	100	255	PEAK																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2452.00	109.92	-----	-----	94.94	27.56	7.81	30.31	9.92	100	255	PEAK																																																																													
Avg.																																																																																									
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2310.00</td><td>46.19</td><td>54.00</td><td>-7.81</td><td>31.95</td><td>27.10</td><td>7.58</td><td>30.36</td><td>9.92</td><td>100</td><td>255</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2310.00	46.19	54.00	-7.81	31.95	27.10	7.58	30.36	9.92	100	255	AVERAGE	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>100.84</td><td>-----</td><td>-----</td><td>85.86</td><td>27.56</td><td>7.81</td><td>30.31</td><td>9.92</td><td>100</td><td>255</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2452.00	100.84	-----	-----	85.86	27.56	7.81	30.31	9.92	100	255
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2310.00	46.19	54.00	-7.81	31.95	27.10	7.58	30.36	9.92	100	255	AVERAGE																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2452.00	100.84	-----	-----	85.86	27.56	7.81	30.31	9.92	100	255	AVERAGE																																																																													

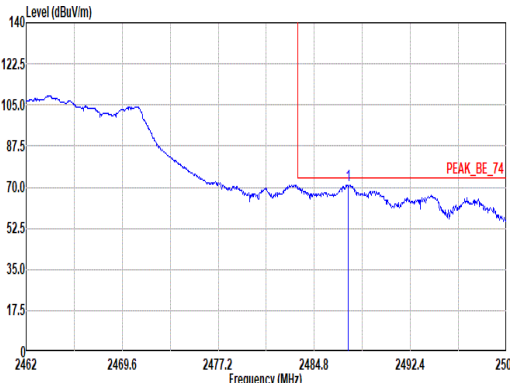
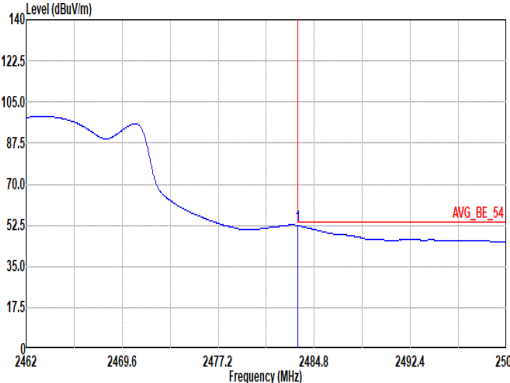


Mode	16																																													
	Band Edge - R																																													
	2400-2483.5_802.11ax HE40_CH09_Partial RU 242/62_2452MHz																																													
ANT	1+2																																													
Pol.	Horizontal	Fundamental																																												
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.46</td><td>71.02</td><td>74.00</td><td>-2.98</td><td>55.82</td><td>27.70</td><td>7.87</td><td>30.29</td><td>9.92</td><td>100</td><td>255</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.46	71.02	74.00	-2.98	55.82	27.70	7.87	30.29	9.92	100	255	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2487.46	71.02	74.00	-2.98	55.82	27.70	7.87	30.29	9.92	100	255	PEAK																																		
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>52.36</td><td>54.00</td><td>-1.64</td><td>37.18</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td><td>100</td><td>255</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	52.36	54.00	-1.64	37.18	27.70	7.86	30.30	9.92	100	255	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2483.51	52.36	54.00	-1.64	37.18	27.70	7.86	30.30	9.92	100	255	AVERAGE																																		

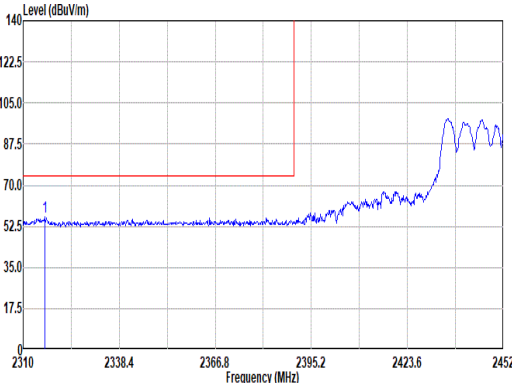
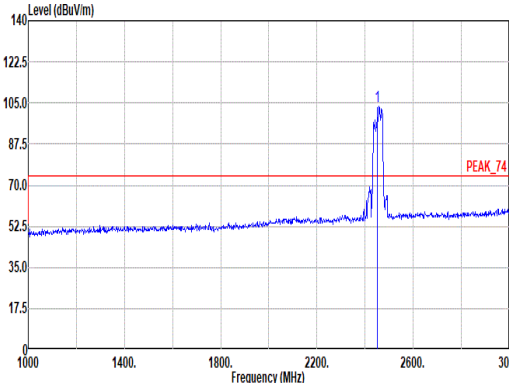
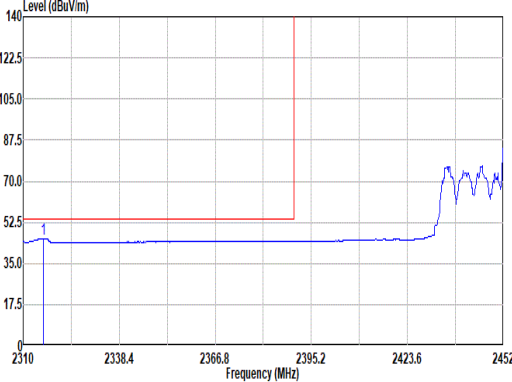
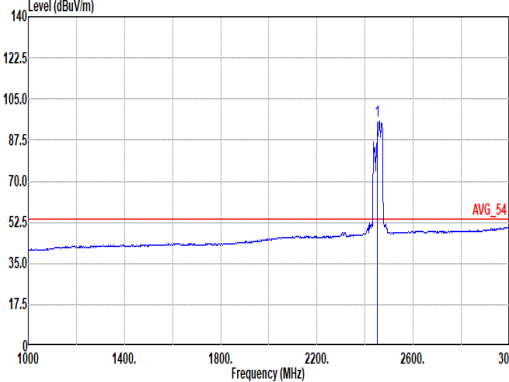


Mode	16																																																																																									
	Band Edge - L																																																																																									
	2400-2483.5_802.11ax HE40_CH09_Partial RU 242/62_2452MHz																																																																																									
ANT	1+2																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2316.39</td><td>56.28</td><td>74.00</td><td>-17.72</td><td>42.03</td><td>27.10</td><td>7.59</td><td>30.36</td><td>9.92</td><td>100</td><td>300</td><td>PEAK</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2316.39	56.28	74.00	-17.72	42.03	27.10	7.59	30.36	9.92	100	300	PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2452.00</td><td>103.53</td><td>-----</td><td>-----</td><td>88.58</td><td>27.52</td><td>7.82</td><td>30.31</td><td>9.92</td><td>100</td><td>300</td><td>PEAK</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2452.00	103.53	-----	-----	88.58	27.52	7.82	30.31	9.92	100	300	PEAK
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2316.39	56.28	74.00	-17.72	42.03	27.10	7.59	30.36	9.92	100	300	PEAK																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2452.00	103.53	-----	-----	88.58	27.52	7.82	30.31	9.92	100	300	PEAK																																																																														
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2315.96</td><td>45.56</td><td>54.00</td><td>-8.44</td><td>31.31</td><td>27.10</td><td>7.59</td><td>30.36</td><td>9.92</td><td>100</td><td>300</td><td>AVERAGE</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2315.96	45.56	54.00	-8.44	31.31	27.10	7.59	30.36	9.92	100	300	AVERAGE	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2452.00</td><td>95.37</td><td>-----</td><td>-----</td><td>80.44</td><td>27.50</td><td>7.82</td><td>30.31</td><td>9.92</td><td>100</td><td>300</td><td>AVERAGE</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2452.00	95.37	-----	-----	80.44	27.50	7.82	30.31	9.92	100	300	AVERAGE
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2315.96	45.56	54.00	-8.44	31.31	27.10	7.59	30.36	9.92	100	300	AVERAGE																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2452.00	95.37	-----	-----	80.44	27.50	7.82	30.31	9.92	100	300	AVERAGE																																																																														



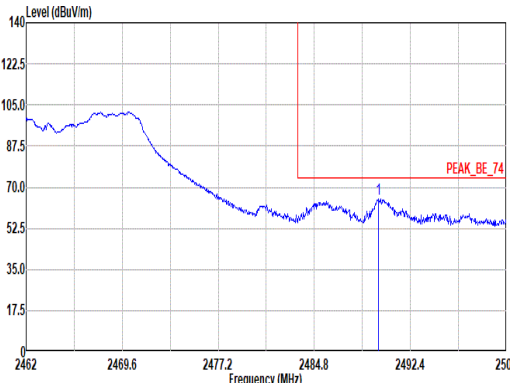
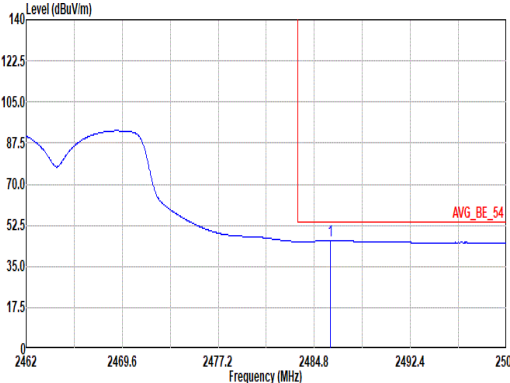


Mode	16																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11ax HE40_CH09_Partial RU 242/62_2452MHz																																																							
ANT	1+2																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.89</td><td>64.97</td><td>74.00</td><td>-9.03</td><td>49.77</td><td>27.70</td><td>7.87</td><td>30.29</td><td>9.92</td><td>100</td><td>300</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.89	64.97	74.00	-9.03	49.77	27.70	7.87	30.29	9.92	100	300	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2480.89	64.97	74.00	-9.03	49.77	27.70	7.87	30.29	9.92	100	300	PEAK																																												
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.05</td><td>46.01</td><td>54.00</td><td>-7.99</td><td>30.03</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td><td>100</td><td>300</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.05	46.01	54.00	-7.99	30.03	27.70	7.86	30.30	9.92	100	300	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2480.05	46.01	54.00	-7.99	30.03	27.70	7.86	30.30	9.92	100	300	AVERAGE																																												

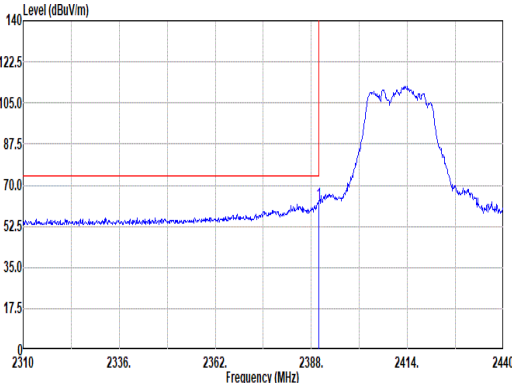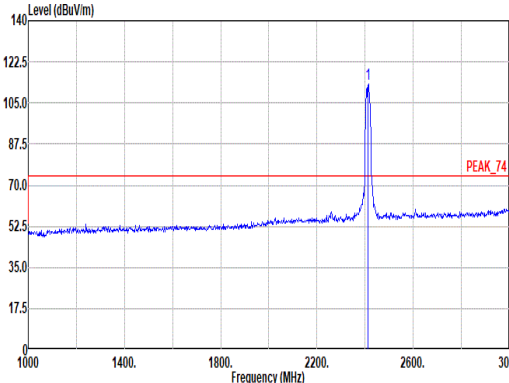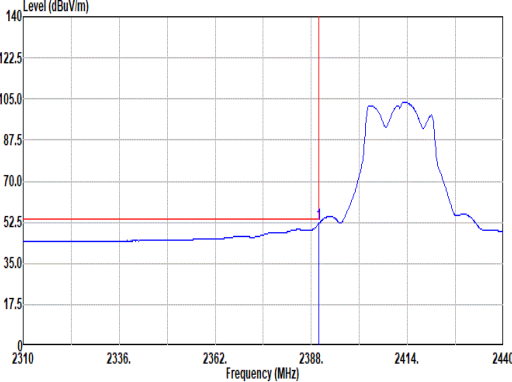
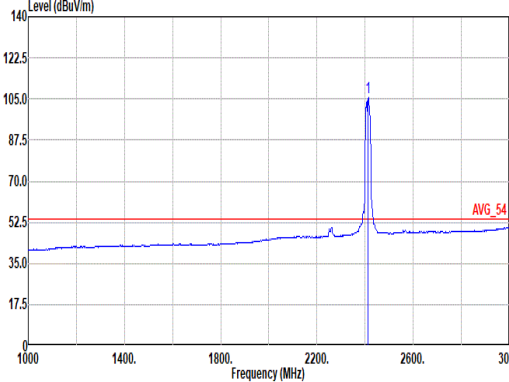


Mode	17																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																	
ANT	1+2																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>62.46</td><td>74.00</td><td>-11.54</td><td>47.86</td><td>27.30</td><td>7.71</td><td>30.33</td><td>9.92</td><td>100</td><td>73</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2389.95	62.46	74.00	-11.54	47.86	27.30	7.71	30.33	9.92	100	73	PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>113.26</td><td>-----</td><td>-----</td><td>98.51</td><td>27.40</td><td>7.75</td><td>30.32</td><td>9.92</td><td>100</td><td>73</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2412.00	113.26	-----	-----	98.51	27.40	7.75	30.32	9.92	100	73	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	62.46	74.00	-11.54	47.86	27.30	7.71	30.33	9.92	100	73	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	113.26	-----	-----	98.51	27.40	7.75	30.32	9.92	100	73	PEAK																																																																																						
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>51.79</td><td>54.00</td><td>-2.21</td><td>37.19</td><td>27.30</td><td>7.71</td><td>30.33</td><td>9.92</td><td>100</td><td>73</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2389.95	51.79	54.00	-2.21	37.19	27.30	7.71	30.33	9.92	100	73	AVERAGE	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>105.50</td><td>-----</td><td>-----</td><td>98.75</td><td>27.40</td><td>7.75</td><td>30.32</td><td>9.92</td><td>100</td><td>73</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2412.00	105.50	-----	-----	98.75	27.40	7.75	30.32	9.92	100	73	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	51.79	54.00	-2.21	37.19	27.30	7.71	30.33	9.92	100	73	AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	105.50	-----	-----	98.75	27.40	7.75	30.32	9.92	100	73	AVERAGE																																																																																						

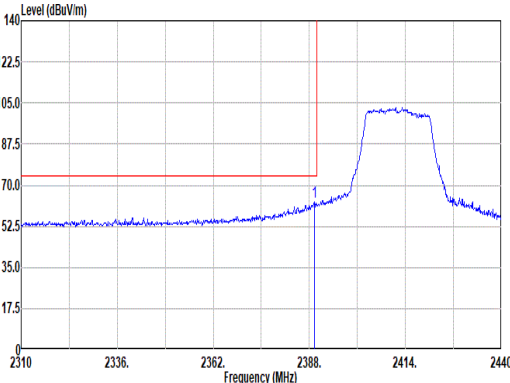
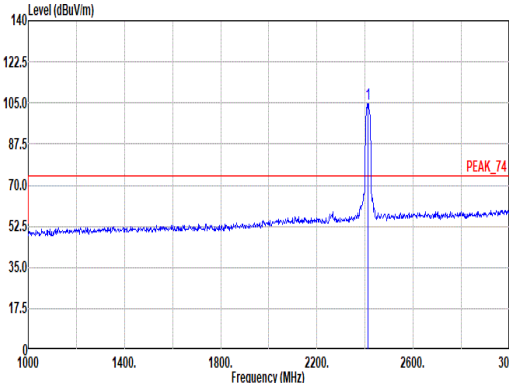
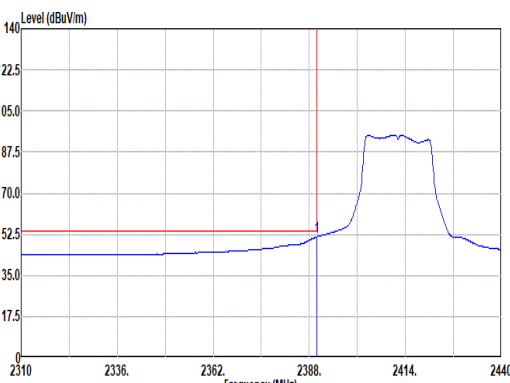
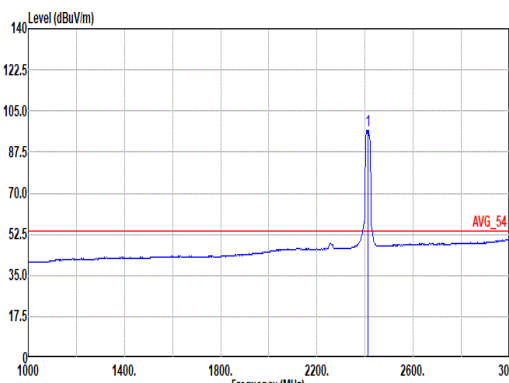


Mode	17																																																																																								
	Band Edge																																																																																								
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																								
ANT	1+2																																																																																								
Pol.	Vertical						Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.30</td><td>63.12</td><td>74.00</td><td>-10.88</td><td>48.53</td><td>27.29</td><td>7.71</td><td>30.33</td><td>9.92</td><td>400</td><td>270</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.30	63.12	74.00	-10.88	48.53	27.29	7.71	30.33	9.92	400	270	PEAK	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>104.65</td><td>-----</td><td>-----</td><td>89.90</td><td>27.40</td><td>7.75</td><td>30.32</td><td>9.92</td><td>400</td><td>270</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	104.65	-----	-----	89.90	27.40	7.75	30.32	9.92	400	270
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.30	63.12	74.00	-10.88	48.53	27.29	7.71	30.33	9.92	400	270	PEAK																																																																													
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2412.00	104.65	-----	-----	89.90	27.40	7.75	30.32	9.92	400	270	PEAK																																																																													
Avg.																																																																																									
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>51.39</td><td>54.00</td><td>-2.61</td><td>36.79</td><td>27.30</td><td>7.71</td><td>30.33</td><td>9.92</td><td>400</td><td>270</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.95	51.39	54.00	-2.61	36.79	27.30	7.71	30.33	9.92	400	270	AVERAGE	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>96.56</td><td>-----</td><td>-----</td><td>81.81</td><td>27.40</td><td>7.75</td><td>30.32</td><td>9.92</td><td>400</td><td>270</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	96.56	-----	-----	81.81	27.40	7.75	30.32	9.92	400	270
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.95	51.39	54.00	-2.61	36.79	27.30	7.71	30.33	9.92	400	270	AVERAGE																																																																													
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2412.00	96.56	-----	-----	81.81	27.40	7.75	30.32	9.92	400	270	AVERAGE																																																																													



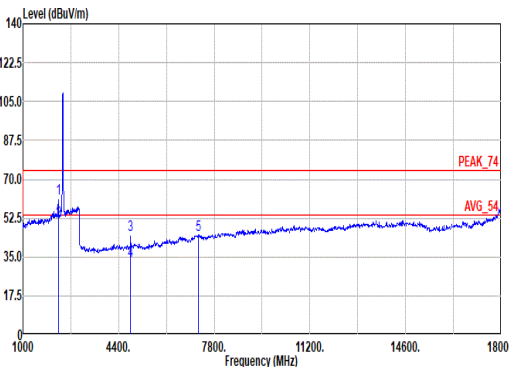
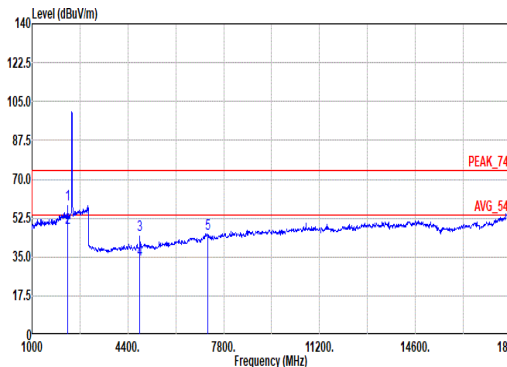


Mode	17											
	Harmonic											
	2400-2483.5_802.11n HT20_CH01_2412MHz											
ANT	1+2											
Pol.	Horizontal						Vertical					
Peak Avg.												
	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	Apos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2254.00	61.35	74.00	-12.65	47.30	27.04	7.48	30.38	9.91	100	262	PEAK
2	2254.00	51.50	54.00	-2.50	37.45	27.04	7.48	30.38	9.91	100	262	AVERAGE
3	4824.00	45.12	74.00	-28.88	67.57	32.40	11.04	66.38	0.49	100	253	PEAK
4	4824.00	33.33	54.00	-20.67	55.78	32.40	11.04	66.38	0.49	100	253	AVERAGE
5	7236.00	45.01	74.00	-28.99	60.21	36.94	13.24	65.75	0.37	--	--	PEAK
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	Apos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2254.00	58.50	74.00	-15.42	44.48	27.08	7.49	30.38	9.91	339	289	PEAK
2	2254.00	48.01	54.00	-5.99	33.96	27.04	7.48	30.38	9.91	339	289	AVERAGE
3	4824.00	45.13	74.00	-28.87	67.58	32.40	11.04	66.38	0.49	100	230	PEAK
4	4824.00	33.93	54.00	-20.07	56.38	32.40	11.04	66.38	0.49	100	230	AVERAGE
5	7236.00	45.29	74.00	-28.71	60.49	36.94	13.24	65.75	0.37	--	--	PEAK

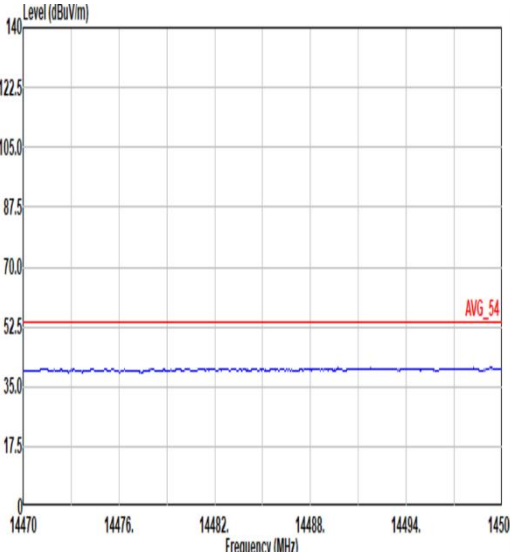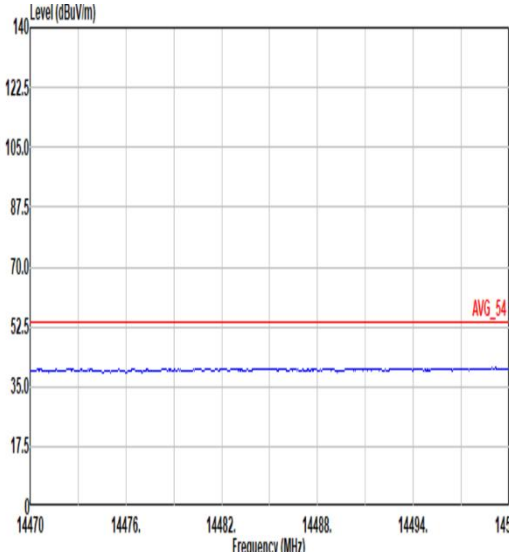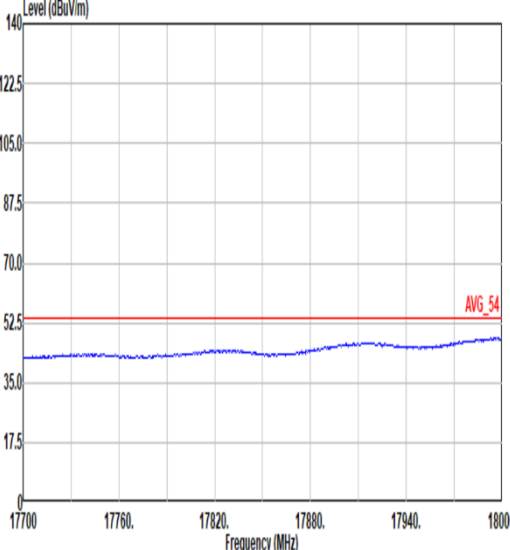
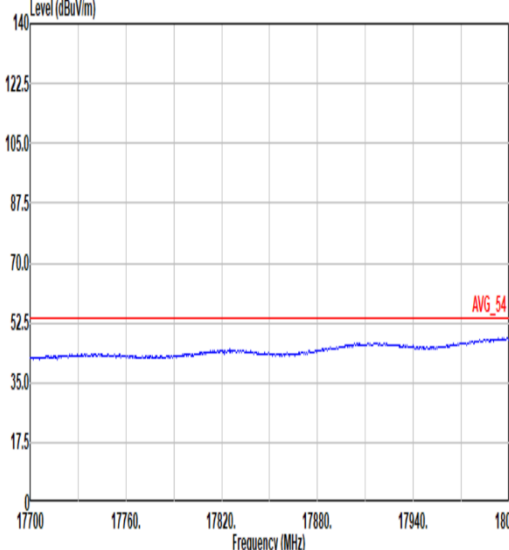


Mode	17	
	Harmonic	
	2400-2483.5_802.11n HT20_CH01_2412MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
17.7G ~18G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

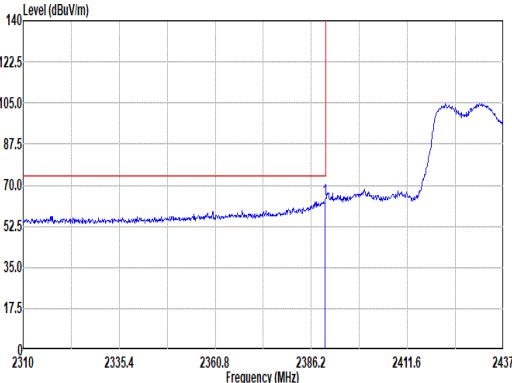
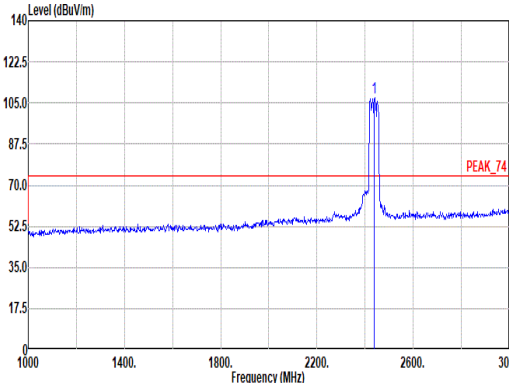
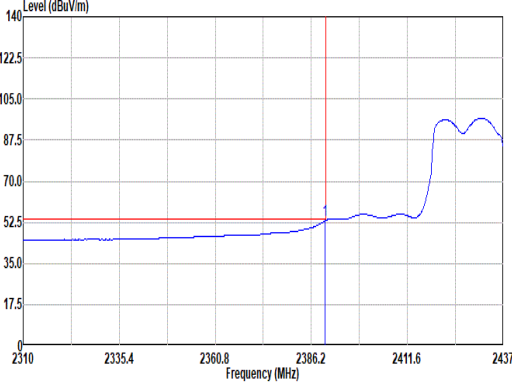
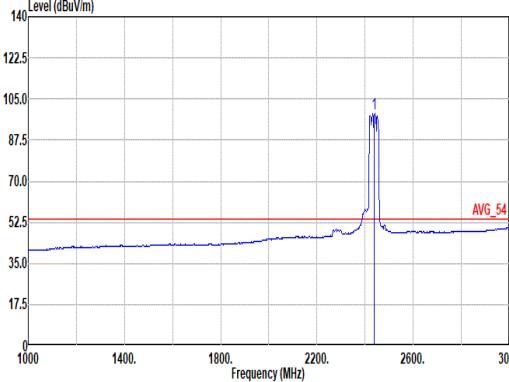


Mode	18																																																																																																	
	Band Edge - L																																																																																																	
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																																	
ANT	1+2																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2309.88</td><td>63.99</td><td>74.00</td><td>-10.01</td><td>49.39</td><td>27.30</td><td>7.71</td><td>30.33</td><td>9.92</td><td>100</td><td>312</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2309.88	63.99	74.00	-10.01	49.39	27.30	7.71	30.33	9.92	100	312	PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>107.18</td><td>-----</td><td>-----</td><td>92.18</td><td>27.60</td><td>7.79</td><td>30.31</td><td>9.92</td><td>100</td><td>312</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2437.00	107.18	-----	-----	92.18	27.60	7.79	30.31	9.92	100	312	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2309.88	63.99	74.00	-10.01	49.39	27.30	7.71	30.33	9.92	100	312	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	107.18	-----	-----	92.18	27.60	7.79	30.31	9.92	100	312	PEAK																																																																																						
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2309.88</td><td>53.12</td><td>54.00</td><td>-0.88</td><td>38.52</td><td>27.30</td><td>7.71</td><td>30.33</td><td>9.92</td><td>100</td><td>312</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2309.88	53.12	54.00	-0.88	38.52	27.30	7.71	30.33	9.92	100	312	AVERAGE	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>98.88</td><td>-----</td><td>-----</td><td>83.87</td><td>27.60</td><td>7.80</td><td>30.31</td><td>9.92</td><td>100</td><td>312</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2437.00	98.88	-----	-----	83.87	27.60	7.80	30.31	9.92	100	312	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2309.88	53.12	54.00	-0.88	38.52	27.30	7.71	30.33	9.92	100	312	AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	98.88	-----	-----	83.87	27.60	7.80	30.31	9.92	100	312	AVERAGE																																																																																						

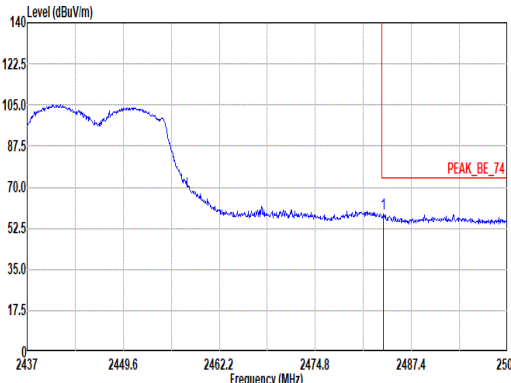
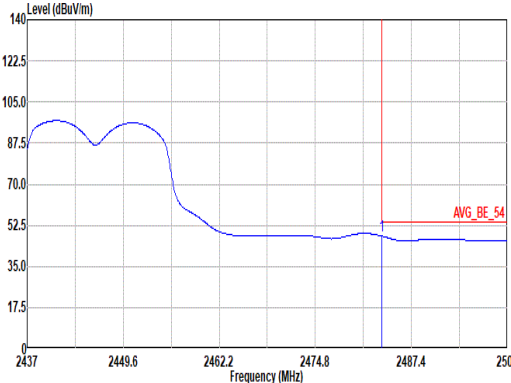


Mode	18																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																							
ANT	1+2																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.68</td><td>58.86</td><td>74.00</td><td>-15.14</td><td>43.68</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td><td>100</td><td>312</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2483.68	58.86	74.00	-15.14	43.68	27.70	7.86	30.30	9.92	100	312	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																		
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																														
1	2483.68	58.86	74.00	-15.14	43.68	27.70	7.86	30.30	9.92	100	312	PEAK																																												
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>47.91</td><td>54.00</td><td>-6.09</td><td>32.73</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td><td>100</td><td>312</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2483.56	47.91	54.00	-6.09	32.73	27.70	7.86	30.30	9.92	100	312	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																		
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																														
1	2483.56	47.91	54.00	-6.09	32.73	27.70	7.86	30.30	9.92	100	312	AVERAGE																																												

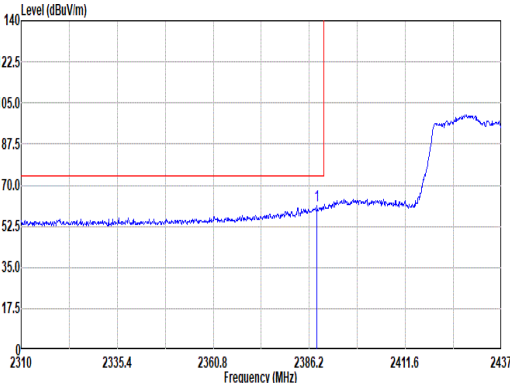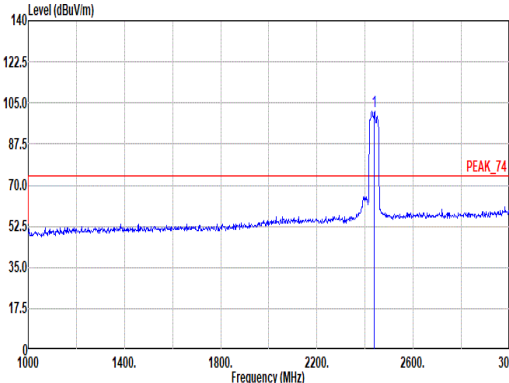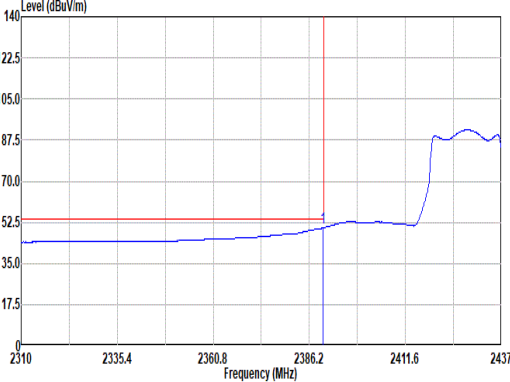
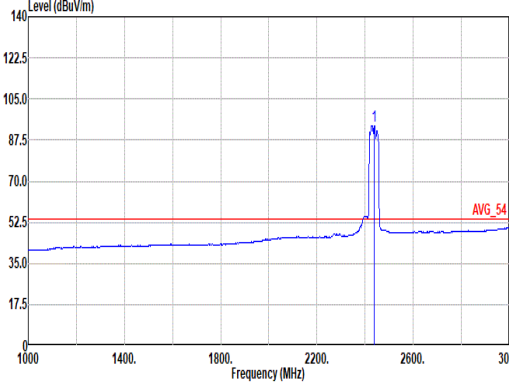


Mode	18																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																								
ANT	1+2																																																																																								
Pol.	Vertical						Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2388.23</td><td>61.03</td><td>74.00</td><td>-12.97</td><td>46.45</td><td>27.28</td><td>7.71</td><td>30.33</td><td>9.92</td><td>400</td><td>271</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2388.23	61.03	74.00	-12.97	46.45	27.28	7.71	30.33	9.92	400	271	PEAK	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>101.68</td><td>-----</td><td>-----</td><td>86.68</td><td>27.60</td><td>7.79</td><td>30.31</td><td>9.92</td><td>400</td><td>271</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2437.00	101.68	-----	-----	86.68	27.60	7.79	30.31	9.92	400	271
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2388.23	61.03	74.00	-12.97	46.45	27.28	7.71	30.33	9.92	400	271	PEAK																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2437.00	101.68	-----	-----	86.68	27.60	7.79	30.31	9.92	400	271	PEAK																																																																													
Avg.																																																																																									
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.88</td><td>50.15</td><td>54.00</td><td>-3.85</td><td>35.55</td><td>27.30</td><td>7.71</td><td>30.33</td><td>9.92</td><td>400</td><td>271</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.88	50.15	54.00	-3.85	35.55	27.30	7.71	30.33	9.92	400	271	AVERAGE	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>93.69</td><td>-----</td><td>-----</td><td>78.84</td><td>27.48</td><td>7.77</td><td>30.32</td><td>9.92</td><td>400</td><td>271</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2437.00	93.69	-----	-----	78.84	27.48	7.77	30.32	9.92	400	271
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.88	50.15	54.00	-3.85	35.55	27.30	7.71	30.33	9.92	400	271	AVERAGE																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2437.00	93.69	-----	-----	78.84	27.48	7.77	30.32	9.92	400	271	AVERAGE																																																																													



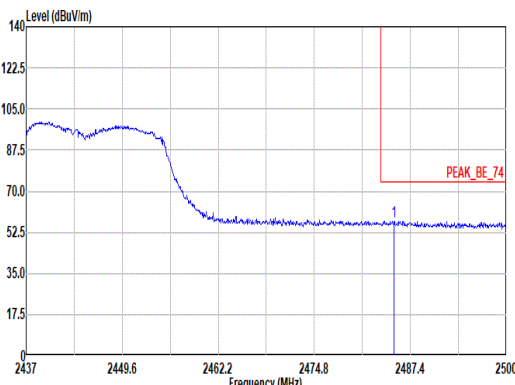
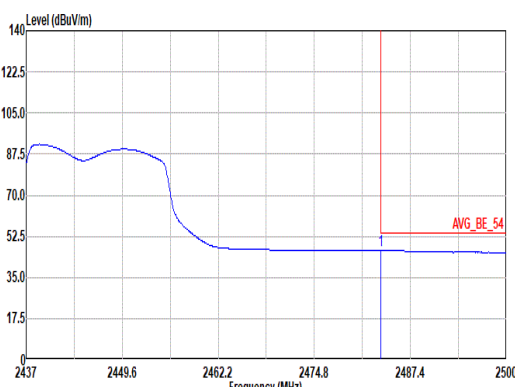


Mode	18																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																						
ANT	1+2																																																						
Pol.	Vertical						Fundamental																																																
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.26</td><td>57.30</td><td>74.00</td><td>-16.70</td><td>42.12</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td><td>400</td><td>271</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.26	57.30	74.00	-16.70	42.12	27.70	7.86	30.30	9.92	400	271	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2485.26	57.30	74.00	-16.70	42.12	27.70	7.86	30.30	9.92	400	271	PEAK																																											
Avg.	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>46.55</td><td>54.00</td><td>-7.45</td><td>31.37</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td><td>400</td><td>271</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	46.55	54.00	-7.45	31.37	27.70	7.86	30.30	9.92	400	271	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.56	46.55	54.00	-7.45	31.37	27.70	7.86	30.30	9.92	400	271	AVERAGE																																											

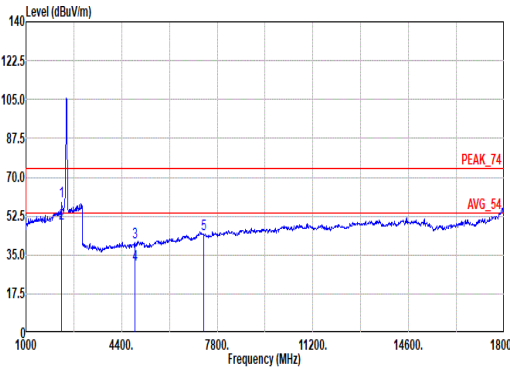
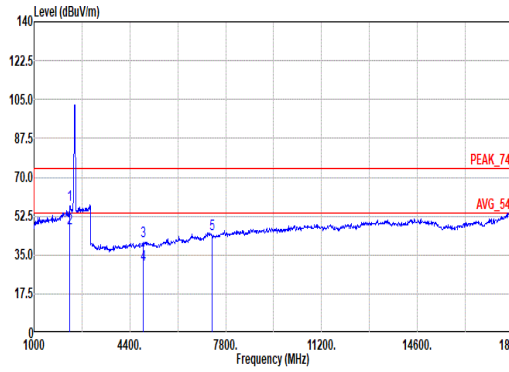


Mode	18																																																																																																																																																																																																										
	Harmonic																																																																																																																																																																																																										
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																																																																																																																																										
ANT	1+2																																																																																																																																																																																																										
Pol.	Horizontal						Vertical																																																																																																																																																																																																				
Peak Avg.																																																																																																																																																																																																											
	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL																																																																																																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2276.00</td><td>59.22</td><td>74.00</td><td>-14.78</td><td>44.97</td><td>27.20</td><td>7.52</td><td>30.38</td><td>9.91</td><td>100</td><td>266</td><td>PEAK</td></tr><tr><td>2</td><td>2276.00</td><td>49.31</td><td>54.00</td><td>-4.69</td><td>35.06</td><td>27.20</td><td>7.52</td><td>30.38</td><td>9.91</td><td>100</td><td>266</td><td>AVERAGE</td></tr><tr><td>3</td><td>4874.00</td><td>40.56</td><td>74.00</td><td>-33.44</td><td>62.75</td><td>32.60</td><td>11.05</td><td>66.34</td><td>0.50</td><td>100</td><td>65</td><td>PEAK</td></tr><tr><td>4</td><td>4874.00</td><td>30.69</td><td>54.00</td><td>-23.31</td><td>52.88</td><td>32.60</td><td>11.05</td><td>66.34</td><td>0.50</td><td>100</td><td>65</td><td>AVERAGE</td></tr><tr><td>5</td><td>7311.00</td><td>44.61</td><td>74.00</td><td>-29.39</td><td>59.81</td><td>36.83</td><td>13.29</td><td>65.75</td><td>0.43</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2276.00	59.22	74.00	-14.78	44.97	27.20	7.52	30.38	9.91	100	266	PEAK	2	2276.00	49.31	54.00	-4.69	35.06	27.20	7.52	30.38	9.91	100	266	AVERAGE	3	4874.00	40.56	74.00	-33.44	62.75	32.60	11.05	66.34	0.50	100	65	PEAK	4	4874.00	30.69	54.00	-23.31	52.88	32.60	11.05	66.34	0.50	100	65	AVERAGE	5	7311.00	44.61	74.00	-29.39	59.81	36.83	13.29	65.75	0.43	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2276.00</td><td>57.56</td><td>74.00</td><td>-16.44</td><td>43.31</td><td>27.20</td><td>7.52</td><td>30.38</td><td>9.91</td><td>400</td><td>143</td><td>PEAK</td></tr><tr><td>2</td><td>2276.00</td><td>47.17</td><td>54.00</td><td>-6.83</td><td>32.92</td><td>27.20</td><td>7.52</td><td>30.38</td><td>9.91</td><td>400</td><td>143</td><td>AVERAGE</td></tr><tr><td>3</td><td>4874.00</td><td>40.96</td><td>74.00</td><td>-33.04</td><td>63.15</td><td>32.60</td><td>11.05</td><td>66.34</td><td>0.50</td><td>100</td><td>54</td><td>PEAK</td></tr><tr><td>4</td><td>4874.00</td><td>30.86</td><td>54.00</td><td>-23.14</td><td>53.05</td><td>32.60</td><td>11.05</td><td>66.34</td><td>0.50</td><td>100</td><td>54</td><td>AVERAGE</td></tr><tr><td>5</td><td>7311.00</td><td>44.21</td><td>74.00</td><td>-29.79</td><td>59.41</td><td>36.83</td><td>13.29</td><td>65.75</td><td>0.43</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2276.00	57.56	74.00	-16.44	43.31	27.20	7.52	30.38	9.91	400	143	PEAK	2	2276.00	47.17	54.00	-6.83	32.92	27.20	7.52	30.38	9.91	400	143	AVERAGE	3	4874.00	40.96	74.00	-33.04	63.15	32.60	11.05	66.34	0.50	100	54	PEAK	4	4874.00	30.86	54.00	-23.14	53.05	32.60	11.05	66.34	0.50	100	54	AVERAGE	5	7311.00	44.21	74.00	-29.79	59.41	36.83	13.29	65.75	0.43	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																	
1	2276.00	59.22	74.00	-14.78	44.97	27.20	7.52	30.38	9.91	100	266	PEAK																																																																																																																																																																																															
2	2276.00	49.31	54.00	-4.69	35.06	27.20	7.52	30.38	9.91	100	266	AVERAGE																																																																																																																																																																																															
3	4874.00	40.56	74.00	-33.44	62.75	32.60	11.05	66.34	0.50	100	65	PEAK																																																																																																																																																																																															
4	4874.00	30.69	54.00	-23.31	52.88	32.60	11.05	66.34	0.50	100	65	AVERAGE																																																																																																																																																																																															
5	7311.00	44.61	74.00	-29.39	59.81	36.83	13.29	65.75	0.43	--	--	PEAK																																																																																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																	
1	2276.00	57.56	74.00	-16.44	43.31	27.20	7.52	30.38	9.91	400	143	PEAK																																																																																																																																																																																															
2	2276.00	47.17	54.00	-6.83	32.92	27.20	7.52	30.38	9.91	400	143	AVERAGE																																																																																																																																																																																															
3	4874.00	40.96	74.00	-33.04	63.15	32.60	11.05	66.34	0.50	100	54	PEAK																																																																																																																																																																																															
4	4874.00	30.86	54.00	-23.14	53.05	32.60	11.05	66.34	0.50	100	54	AVERAGE																																																																																																																																																																																															
5	7311.00	44.21	74.00	-29.79	59.41	36.83	13.29	65.75	0.43	--	--	PEAK																																																																																																																																																																																															

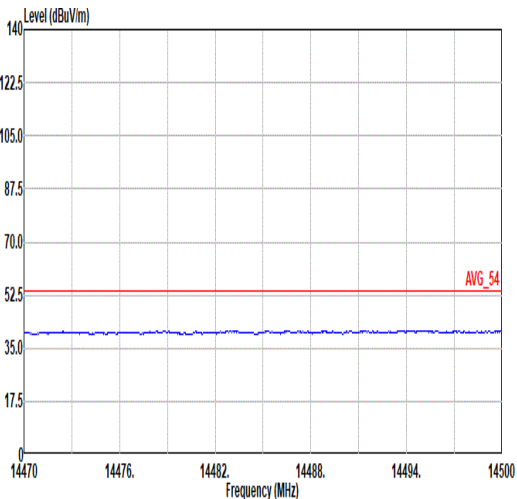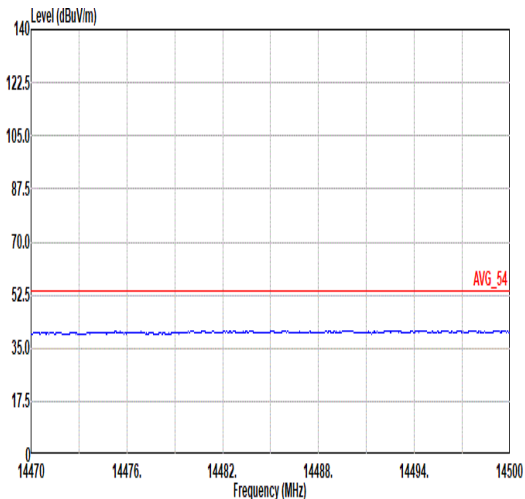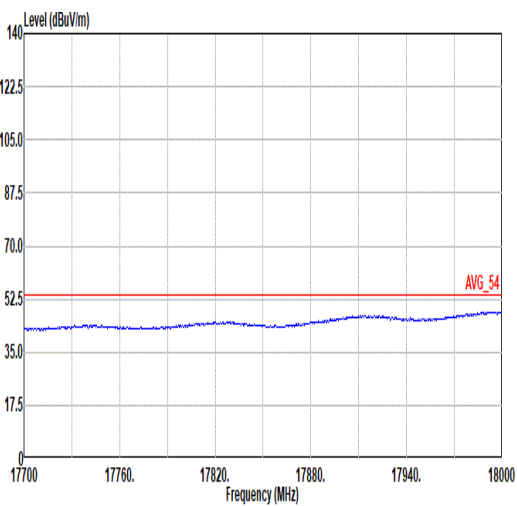
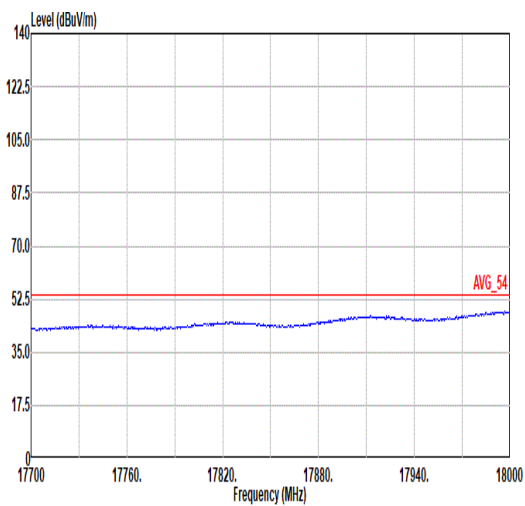


Mode	18	
	Harmonic	
	2400-2483.5_802.11n HT40_CH06_2437MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg.	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

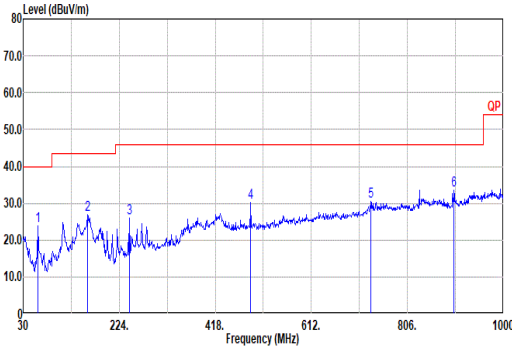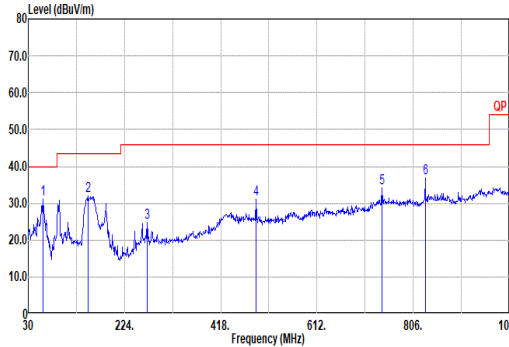

Mode	19																																																																																																																																																																																																														
	LF																																																																																																																																																																																																														
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																																																																																																														
ANT	1+2																																																																																																																																																																																																														
Pol.	Horizontal	Vertical																																																																																																																																																																																																													
QPI Peak																																																																																																																																																																																																															
	Site : 03CH16-HY Condition: QP 3m CBL6111D&00802N1D01N-06_47020 & 06_241005 HORIZONTAL	Site : 03CH16-HY Condition: QP 3m CBL6111D&00802N1D01N-06_47020 & 06_241005 VERTICAL																																																																																																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>59.10</td><td>23.87</td><td>40.00</td><td>-16.13</td><td>42.89</td><td>12.02</td><td>1.20</td><td>32.29</td><td>0.05</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>159.98</td><td>26.92</td><td>43.50</td><td>-16.58</td><td>40.66</td><td>16.63</td><td>1.97</td><td>32.45</td><td>0.11</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>245.34</td><td>26.03</td><td>46.00</td><td>-19.97</td><td>37.84</td><td>18.13</td><td>2.43</td><td>32.44</td><td>0.07</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>489.78</td><td>30.15</td><td>46.00</td><td>-15.85</td><td>35.77</td><td>23.60</td><td>3.43</td><td>32.80</td><td>0.15</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>732.28</td><td>30.56</td><td>46.00</td><td>-15.44</td><td>30.30</td><td>28.02</td><td>4.21</td><td>32.11</td><td>0.14</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>900.09</td><td>33.60</td><td>46.00</td><td>-12.40</td><td>31.79</td><td>29.25</td><td>4.67</td><td>32.27</td><td>0.16</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	59.10	23.87	40.00	-16.13	42.89	12.02	1.20	32.29	0.05	--	Peak	2	159.98	26.92	43.50	-16.58	40.66	16.63	1.97	32.45	0.11	--	Peak	3	245.34	26.03	46.00	-19.97	37.84	18.13	2.43	32.44	0.07	--	Peak	4	489.78	30.15	46.00	-15.85	35.77	23.60	3.43	32.80	0.15	--	Peak	5	732.28	30.56	46.00	-15.44	30.30	28.02	4.21	32.11	0.14	--	Peak	6	900.09	33.60	46.00	-12.40	31.79	29.25	4.67	32.27	0.16	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>60.07</td><td>31.21</td><td>40.00</td><td>-8.79</td><td>50.21</td><td>12.02</td><td>1.21</td><td>32.28</td><td>0.05</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>150.28</td><td>31.92</td><td>43.50</td><td>-11.58</td><td>45.03</td><td>17.38</td><td>1.91</td><td>32.48</td><td>0.08</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>269.59</td><td>24.74</td><td>46.00</td><td>-21.26</td><td>35.27</td><td>19.18</td><td>2.54</td><td>32.32</td><td>0.07</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>488.81</td><td>30.96</td><td>46.00</td><td>-15.04</td><td>36.59</td><td>23.59</td><td>3.43</td><td>32.80</td><td>0.15</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>742.95</td><td>34.06</td><td>46.00</td><td>-11.94</td><td>33.42</td><td>28.35</td><td>4.24</td><td>32.09</td><td>0.14</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>830.25</td><td>36.82</td><td>46.00</td><td>-9.18</td><td>35.49</td><td>28.84</td><td>4.48</td><td>32.19</td><td>0.20</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	60.07	31.21	40.00	-8.79	50.21	12.02	1.21	32.28	0.05	--	Peak	2	150.28	31.92	43.50	-11.58	45.03	17.38	1.91	32.48	0.08	--	Peak	3	269.59	24.74	46.00	-21.26	35.27	19.18	2.54	32.32	0.07	--	Peak	4	488.81	30.96	46.00	-15.04	36.59	23.59	3.43	32.80	0.15	--	Peak	5	742.95	34.06	46.00	-11.94	33.42	28.35	4.24	32.09	0.14	--	Peak	6	830.25	36.82	46.00	-9.18	35.49	28.84	4.48	32.19	0.20	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																					
1	59.10	23.87	40.00	-16.13	42.89	12.02	1.20	32.29	0.05	--	Peak																																																																																																																																																																																																				
2	159.98	26.92	43.50	-16.58	40.66	16.63	1.97	32.45	0.11	--	Peak																																																																																																																																																																																																				
3	245.34	26.03	46.00	-19.97	37.84	18.13	2.43	32.44	0.07	--	Peak																																																																																																																																																																																																				
4	489.78	30.15	46.00	-15.85	35.77	23.60	3.43	32.80	0.15	--	Peak																																																																																																																																																																																																				
5	732.28	30.56	46.00	-15.44	30.30	28.02	4.21	32.11	0.14	--	Peak																																																																																																																																																																																																				
6	900.09	33.60	46.00	-12.40	31.79	29.25	4.67	32.27	0.16	--	Peak																																																																																																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																					
1	60.07	31.21	40.00	-8.79	50.21	12.02	1.21	32.28	0.05	--	Peak																																																																																																																																																																																																				
2	150.28	31.92	43.50	-11.58	45.03	17.38	1.91	32.48	0.08	--	Peak																																																																																																																																																																																																				
3	269.59	24.74	46.00	-21.26	35.27	19.18	2.54	32.32	0.07	--	Peak																																																																																																																																																																																																				
4	488.81	30.96	46.00	-15.04	36.59	23.59	3.43	32.80	0.15	--	Peak																																																																																																																																																																																																				
5	742.95	34.06	46.00	-11.94	33.42	28.35	4.24	32.09	0.14	--	Peak																																																																																																																																																																																																				
6	830.25	36.82	46.00	-9.18	35.49	28.84	4.48	32.19	0.20	--	Peak																																																																																																																																																																																																				

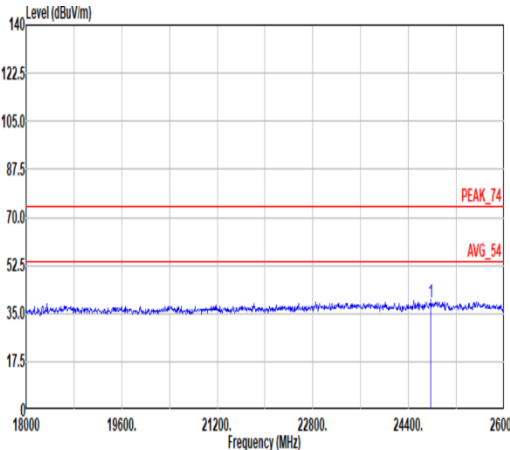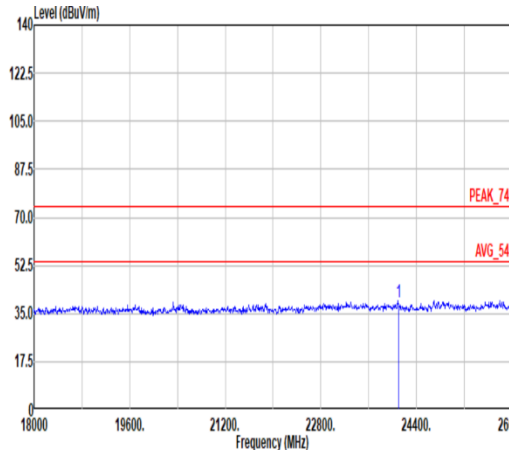


Mode	20																																																																																																	
	SHF																																																																																																	
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																	
ANT	1+2																																																																																																	
Pol.	Horizontal						Vertical																																																																																											
Peak																																																																																																		
	Site : 03CH16-HY Condition: PEAK_74 1m SHF_1230_241025 HORIZONTAL						Site : 03CH16-HY Condition: PEAK_74 1m SHF_1230_241025 VERTICAL																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>24774.60</td><td>38.95</td><td>74.00</td><td>-35.05</td><td>56.15</td><td>39.40</td><td>6.28</td><td>53.34</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24774.60	38.95	74.00	-35.05	56.15	39.40	6.28	53.34	-9.54	--	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>24099.11</td><td>38.86</td><td>74.00</td><td>-35.14</td><td>57.12</td><td>38.90</td><td>6.12</td><td>53.74</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	24099.11	38.86	74.00	-35.14	57.12	38.90	6.12	53.74	-9.54	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	24774.60	38.95	74.00	-35.05	56.15	39.40	6.28	53.34	-9.54	--	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1	24099.11	38.86	74.00	-35.14	57.12	38.90	6.12	53.74	-9.54	--	PEAK																																																																																							



Appendix D. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1+2	802.11b	98.96	-	-	10Hz
1+2	802.11g	99.29	-	-	10Hz
1+2	2.4GHz 802.11n HT20	99.55	-	-	10Hz
1+2	2.4GHz 802.11n HT40	99.52	-	-	10Hz
1+2	2.4GHz 802.11ax HE20 Full RU	99.48	-	-	10Hz
1+2	2.4GHz 802.11ax HE20 106 RU	99.50	-	-	10Hz
1+2	2.4GHz 802.11ax HE40 Full RU	99.52	-	-	10Hz
1+2	2.4GHz 802.11ax HE40 242 RU	98.91	-	-	10Hz

MIMO <Ant. 1+2>

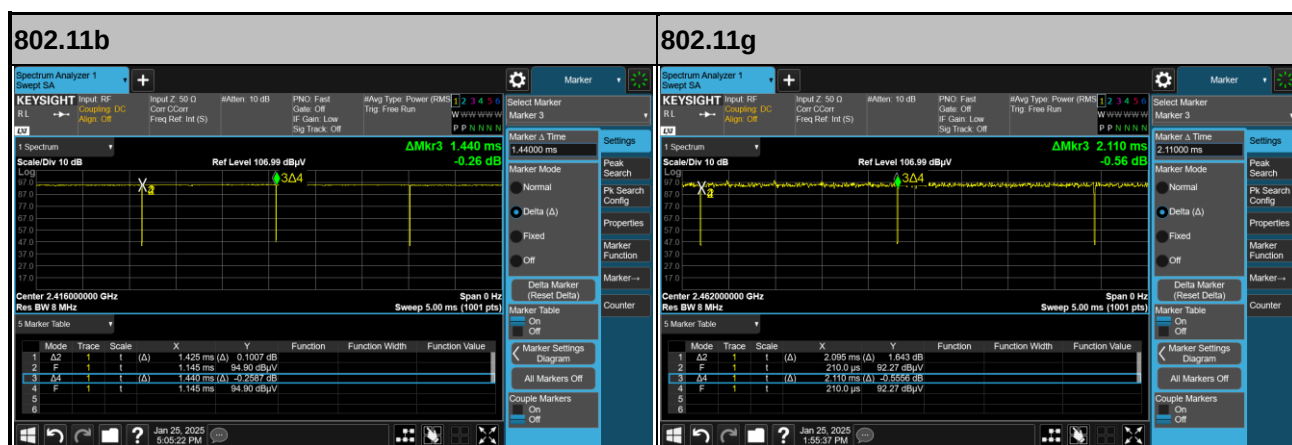





2.4GHz 802.11n HT20

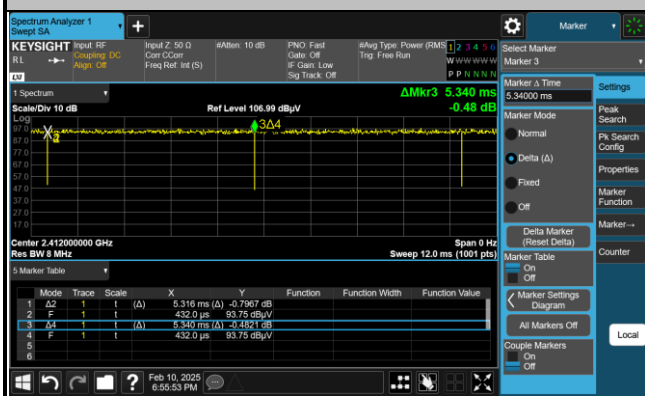


2.4GHz 802.11n HT40

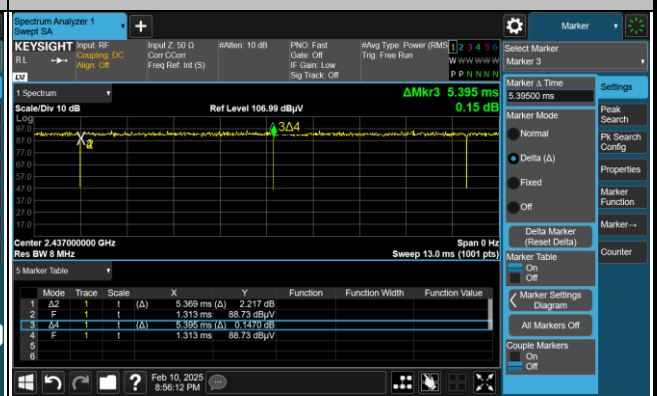


2.4GHz 802.11ax HE20 Full RU

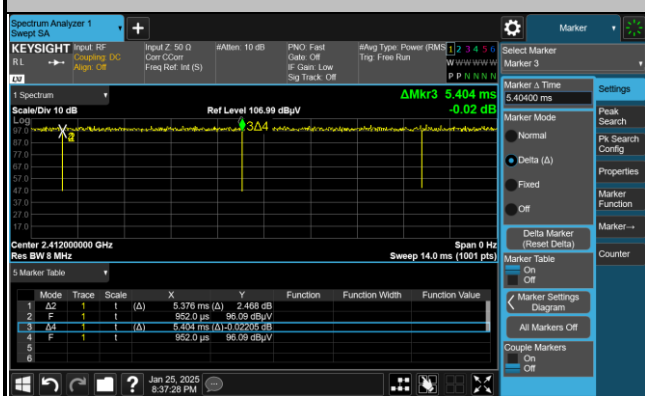

2.4GHz 802.11ax HE20 106 RU

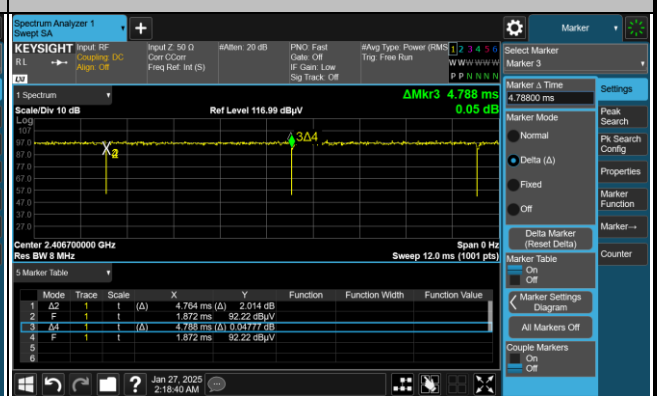

2.4GHz 802.11ax HE40 Full RU

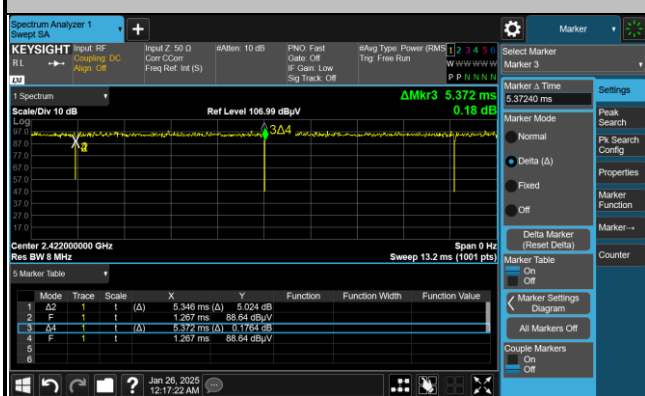

2.4GHz 802.11ax HE40 242 RU

