TEST REPORT

FCC ID: 2AF3PLUNA

Applicant : Spotspot Ltd (t/a Bouncepad).

Address : Unit 7, Lockwood Industrial Park, Mill Mead Road

London, N17 9QP, United Kingdom

Equipment Under Test (EUT):

Name Secure Tablet Enclosure

Model : Luna

Trademark : bouncepad™

In Accordance with: FCC CFR47 Part 15 Section 15C: 2014

Report No : C1850403 01

Date of Test : September 23, 2015- September 29, 2015

Date of Issue : September 30, 2015

Test Result: PASS

In the configuration tested, the EUT complied with the standards specified above

Authorized Signature

(Mark Zhu)

General Manager

The manufacture should ensure that all the products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of Shenzhen Certification Technology Service Co., Ltd. Or test done by Shenzhen Certification Technology Service Co., Ltd. Approvals in connection with, distribution or use of the product described in this report must be approved by Shenzhen Certification Technology Service Co., Ltd. Approvals in writing.

FCC ID: 2AF3PLUNA Page 1 of 31

Contents

1.	Gen	eral Information	3
	1.1.	Description of Device (EUT)	3
	1.2.	Accessories of device (EUT)	4
	1.3.	Test Lab information	4
2.	Sum	nmary of test	5
	2.1.	Summary of test result	5
	2.2.	Assistant equipment used for test	5
	2.3.	Block Diagram	5
	2.4.	Test mode	5
	2.5.	Test Conditions	5
	2.6.	Measurement Uncertainty (95% confidence levels, k=2)	6
	2.7.	Test Equipment	7
3.	Rad	iated emissions	8
	3.1.	Limit(FCC 15.209)	8
	3.2.	Block Diagram of Test setup	8
	3.3.	Test Procedure	9
	3.4.	Test Result	10
4.	20d1	B bandwidth	12
	4.1.	Limit	12
	4.2.	Test Procedure	12
	4.3.	Test Setup	12
	4.4.	Test Result	12
5.	Pow	ver Line Conducted Emissions	14
	5.1.	Block Diagram of Test Setup	14
	5.2.	Limit	14
	5.3.	Test Procedure	14
	5.4.	Test Result	15
6.	Anto	enna Requirements	17
	6.1.	Limit	
	6.2.	Result	
7.	Test	setup photo	
Q		tos of FUT	

1. General Information

1.1. Description of Device (EUT)

EUT : Secure Tablet Enclosure

Model No. : Luna DIFF : N/A

Trade mark : bouncepad™

Power supply : DC 9V from adapter.

Radio Technology : RFID

Operation frequency : 125KHz

Antenna Type and Gain : Integrated antenna, PK Gain: 0dBi

Applicant : Spotspot Ltd (t/a Bouncepad).

Address : Unit 7, Lockwood Industrial Park, Mill Mead Road

London, N17 9QP, United Kingdom

Manufacturer : Creation Technologies

Address : Building 2A, Jinton International Industrial Park, No.8 XiXu

Road, Wujin High-tech Industrial Zone, ChangZhou City, JiangSu

Province, P.R.China 213164

FCC ID: 2AF3PLUNA Page 3 of 31

1.2. Accessories of device (EUT)

Accessories 1 : N/A

M/N : N/A

1.3. Test Lab information

Shenzhen Certification Technology Service Co., Ltd. 2F, Building B, East Area of Nanchang Second Industrial Zone, Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China FCC Registered No.:197647

FCC ID: 2AF3PLUNA Page 4 of 31

2. Summary of test

2.1. Summary of test result

Description of Test Item	Standard	Results
Radiated Emission (9KHz-1.25MHz)	FCC Part 15: 209 ANSI C63.4 :2014	PASS
20dB Bandwidth	FCC Part 15.215	PASS
Power Line Conducted Emissions (150KHz-30MHz)	FCC Part 15: 15.207 ANSI C63.4 :2014	PASS
Antenna Requirement	FCC Part 15: 15.203	PASS

2.2. Assistant equipment used for test

N/A

2.3. Block Diagram



2.4. Test mode

Tested mode, channel, and data rate information							
Mode	Channel	Frequency (KHz)					
1	CH1	125					

Note: According exploratory test, EUT will have maximum output power in those data rate. so those data rate were used for all test.

2.5. Test Conditions

Temperature range	21-25℃
Humidity range	40-75%
Pressure range	86-106kPa

FCC ID: 2AF3PLUNA Page 5 of 31

2.6. Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.42dB	
Uncertainty for Radiation Emission test in 3m chamber	2.13 dB	Polarize: V
(below 30MHz)	2.57dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber	3.54dB	Polarize: V
(30MHz to 1GHz)	4.1dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber	2.08dB	Polarize: H
(1GHz to 25GHz)	2.56dB	Polarize: V
Uncertainty for radio frequency	1×10-9	
Uncertainty for conducted RF Power	0.65dB	
Uncertainty for temperature	0.2℃	
Uncertainty for humidity	1%	
Uncertainty for DC and low frequency voltages	0.06%	

FCC ID: 2AF3PLUNA Page 6 of 31

2.7. Test Equipment

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
3m Semi-Anechoic	ETS-LINDGREN	N/A	SEL0017	2015.01.19	1Year
Spectrum analyzer	Agilent	E4407B	MY46185649	2015.01.19	1Year
Receiver	R&S	ESCI	1166.5950K03-1 011	2015.01.19	1Year
Receiver	R&S	ESCI	101202	2015.01.19	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2015.01.21	1Year
Horn Antenna	EMCO	3115	640201028-06	2015.01.21	1Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	2015.01.21	1Year
Cable	Resenberger	N/A	No.1	2015.01.19	1Year
Cable	SCHWARZBECK	N/A	No.2	2015.01.19	1Year
Cable	SCHWARZBECK	N/A	No.3	2015.01.19	1Year
Pre-amplifier	Schwarzbeck	BBV9743	9743-019	2015.01.19	1Year
Pre-amplifier	R&S	AFS33-18002650 -30-8P-44	SEL0080	2015.01.19	1Year
Base station	Agilent	E5515C	GB44300243	2015.01.19	1 Year
Temperature controller	Terchy	MHQ	120	2015.01.19	1 Year
Power divider	Anritsu	K240C	020346	2015.01.19	1 Year
Signal Generator	НР	83732B	VS3449051	2015.01.19	1 Year
Power Meter	Anritsu	ML2487A	6K00001491	2015.01.19	1 Year
Power sensor	Anritsu	ML2491A	32516	2015.01.19	1 Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2015.01.19	1 Year
L.I.S.N.#2	ROHDE&SCHWAR Z	ENV216	101043	2015.01.19	1 Year

FCC ID: 2AF3PLUNA Page 7 of 31

3. Radiated emissions

3.1. Limit(FCC 15.209)

Г	Field Stre	ngth	Field Strength Limit at 3m Measurement Dist			
Frequency (MHz)	uV/m Distan		uV/m	dBuV/m		
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$		
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$		
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$		
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾		
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾		
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾		
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾		

Note:

a) The tighter limit applies at the band edges.

For example: F.S limit at 88MHz is 100uV/m

b) If measurement is made at 3m distance, then F.S Limit at 3m distance is adjusted by using the formula of $L_{d1} = L_{d2} * (d2/d1)^2$.

For example:


F.S Limit at 30m(d2) distance is $30\text{uV/m}(L_{d2})$, then F.S Limit at 3m(d1) distance is $L_{d1} = 30\text{uV/m} * (30/3)^2 = 100 * 30\text{uV/m} = 69.54 \text{ dBuV/m}$

3.2. Block Diagram of Test setup


In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

FCC ID: 2AF3PLUNA Page 8 of 31

4.2. Block diagram of test setup

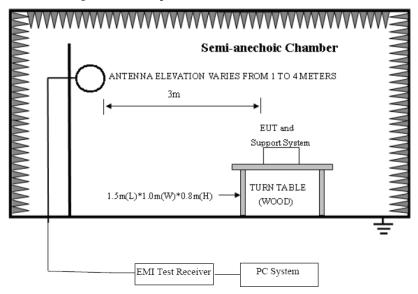

In 3m Anechoic Chamber Test Setup Diagram for frequency 30MHz-1GHz

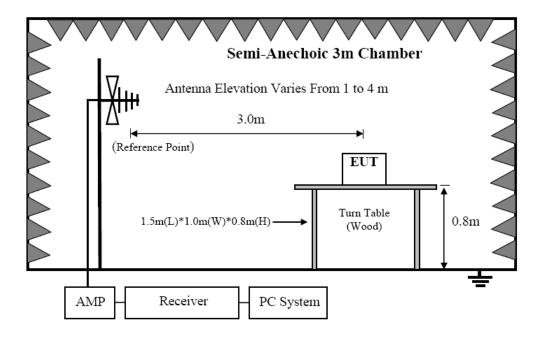

3.3. Test Procedure

Procedure of Preliminary Test

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 4.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4:2014.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable.

FCC ID: 2AF3PLUNA Page 9 of 31

No extension cords shall be used to mains receptacle.

The antenna was placed at 3 meter away from the EUT as stated in ANSI C63.10:2013. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Receiver quickly scanned from 9KHz to 30MHz and 30MHz to 1GHz The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

The test mode(s) described in clause 2.4 were scanned during the preliminary test:

After the preliminary scan, we found the test mode producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

Procedure of Final Test

EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.

The Receiver scanned from 9KHz to 30MHz and 30MHz to 1GHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 200Hz for 9 KHz to 150 KHz measure, 10 KHz for 150 KHz to 30MHz measure and 120 KHz for 30 MHz to 1GHz measure.

3.4. Test Result

PASS. (See below detailed test result)

Freq.	Ant. Pol	Peak	AV	Ant. / CL		1.5	Peak	AV	Margin			
(MHz)	H/V	Reading	Reading	CF	Actu	Actual Fs		Actual Fs		Limit	(dB)	Remark
		(dBuV)	(dBuV)	(dB)	Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)		Kemark		
0.090	Н	17.07		24.80	41.87		108.52		66.65	Peak		
0.110	Н	18.25		24.80	43.05		106.78		63.73	Peak		
0.125	Н	39.64		24.80	64.44		105.67		41.23	Peak		
0.495	Н	16.75		25.03	41.78		73.71		31.93	Peak		
0.600	Н	16.98		25.03	42.01		72.04		30.03	Peak		

Freq.	Ant. Pol	Peak	AV	Ant. / CL			Peak	AV	Margin																																																													
(MHz)	H/V	Reading	Reading	CF	Actu	Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Actual Fs		Limit	(dB)	Domani
		(dBuV)	(dBuV)	(dB)	Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)		Remark																																																												
0.090	V	16.66		24.80	41.46		108.52		67.06	Peak																																																												
0.110	V	17.51		24.80	42.31		106.78		64.47	Peak																																																												
0.125	V	37.38		24.80	62.18		105.67		43.49	Peak																																																												
0.375	V	16.42		25.03	41.45		96.12		54.67	Peak																																																												
0.600	V	16.87		25.03	41.90		72.04		30.14	Peak																																																												

FCC ID: 2AF3PLUNA Page 11 of 31

4. 20dB bandwidth

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 3KHz RBW and 10kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Setup



4.4. Test Result


EUT: Secure Tablet Enclosure M/N: Luna								
Test date: 20	15-09-25	Test site: RF site Tested by: Re		eak				
Mode Freq (MHz)		20dB Bandwidth (KHz)	Limit (kHz)	Conclusion				
Tx Mode 0.125		17. 85	/	PASS				

FCC ID: 2AF3PLUNA Page 12 of 31



5. Power Line Conducted Emissions

5.1. Block Diagram of Test Setup

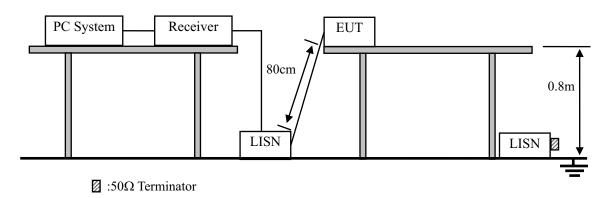

5.2. Limit

	Maximum RF Line Voltage				
Frequency	Quasi-Peak Level	Average Level			
	dB(µV)	$dB(\mu V)$			
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*			
500kHz ~ 5MHz	56	46			
5MHz ~ 30MHz	60	50			

Notes: 1. * Decreasing linearly with logarithm of frequency.

5.3. Test Procedure


- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N1), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4 2014 and ANSI C63.10:2013 on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

FCC ID: 2AF3PLUNA Page 14 of 31


^{2.} The lower limit shall apply at the transition frequencies.

5.4. Test Result

PASS. (See below detailed test data)

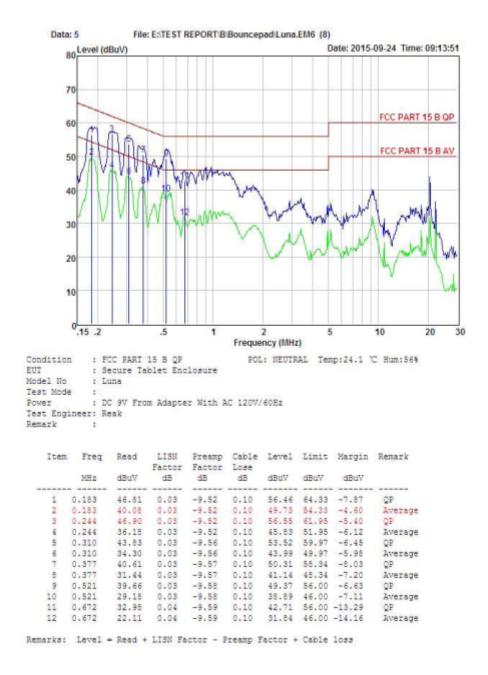

FCC ID: 2AF3PLUNA Page 15 of 31

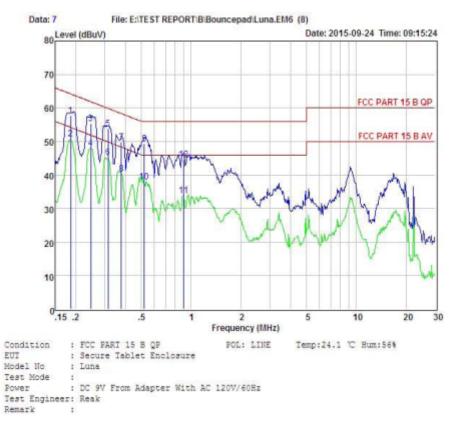

Item	Freq	Read	LISN Factor	Preamp Factor	Cable Lose	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	0.186	48.15	0.03	-9.52	0.10	57.80	64.20	-6.40	QP
2	0.186	41.15	0.03	-9.52	0.10	50.80	54.20	-3.40	Average
3	0.247	45.76	0.03	-9.52	0.10	55.41	61.86	-6.45	QP
4	0.247	38.38	0.03	-9.52	0.10	48.03	51.86	-3.83	Average
5	0.313	44.05	0.03	-9.56	0.10	53.74	59.88	-6.14	QP
6	0.313	35.49	0.03	-9.56	0.10	45.18	49.88	-4.70	Average
7	0.377	40.01	0.03	-9.57	0.10	49.71	58.34	-8.63	QP
8	0.377	30.69	0.03	-9.57	0.10	40.39	48.34	-7.95	Average
9	0.521	39.53	0.03	-9.58	0.10	49.24	56.00	-6.76	QP
10	0.521	28.35	0.03	-9.58	0.10	38.06	46.00	-7.94	Average
11	0.899	24.11	0.04	-9.62	0.10	33.87	46.00	-12.13	Average
12	0.899	34.77	0.04	-9.62	0.10	44.53	56.00	-11.47	QP

Remarks: Level = Read + LISN Factor - Freamp Factor + Cable loss

6. Antenna Requirements

6.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.209, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

6.2. Result

The antennas used for this product are integral Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 0dBi.

FCC ID: 2AF3PLUNA Page 17 of 31

7. Test setup photo

Photographs-Radiated Emission Test Setup in Chamber Below 30M



30M-1G



FCC ID: 2AF3PLUNA Page 18 of 31


Photographs-Conducted Emission Test Setup



FCC ID: 2AF3PLUNA Page 19 of 31

8. Photos of EUT



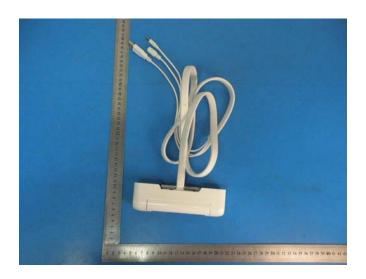

FCC ID: 2AF3PLUNA Page 20 of 31







FCC ID: 2AF3PLUNA Page 21 of 31






FCC ID: 2AF3PLUNA Page 22 of 31

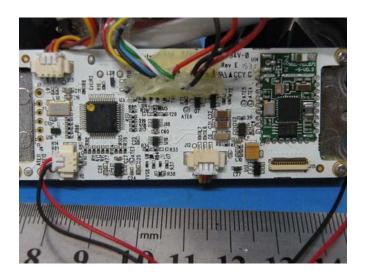

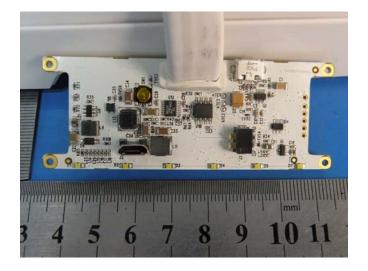

FCC ID: 2AF3PLUNA Page 23 of 31



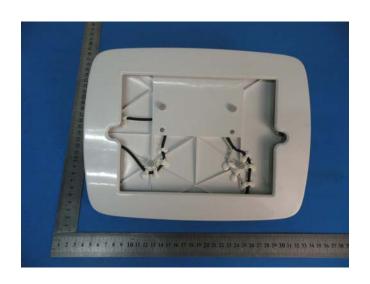


FCC ID: 2AF3PLUNA Page 24 of 31






FCC ID: 2AF3PLUNA Page 25 of 31



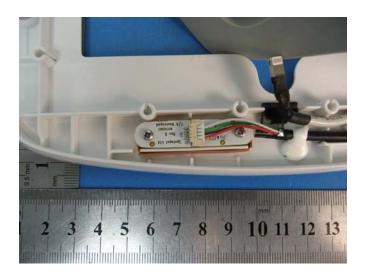


FCC ID: 2AF3PLUNA Page 26 of 31




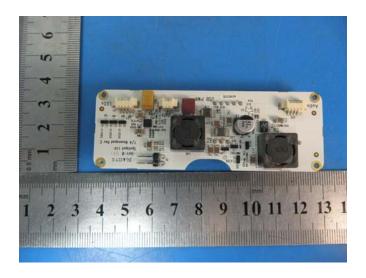



FCC ID: 2AF3PLUNA Page 27 of 31

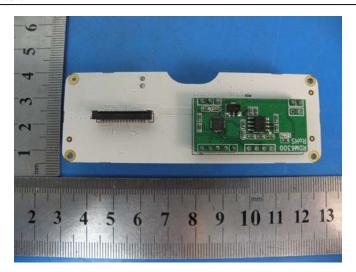




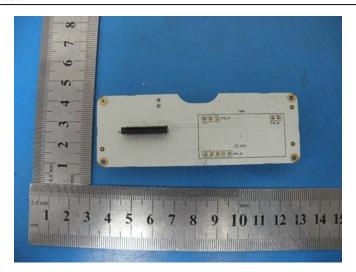


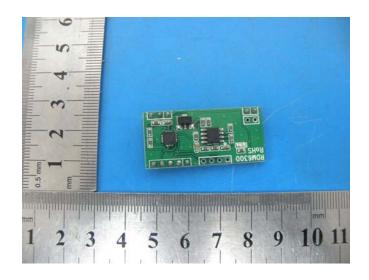

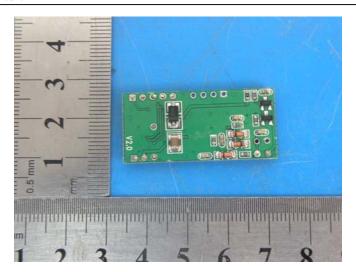



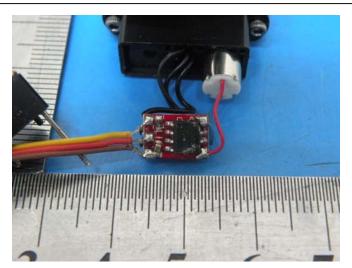

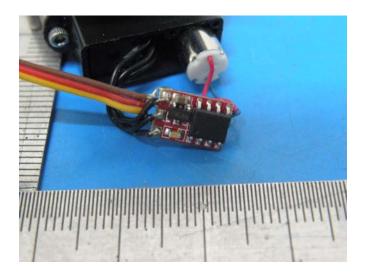

-----END OF THE REPORT-----

FCC ID: 2AF3PLUNA Page 31 of 31