

# TEST REPORT

## FCC ID: 2AF3W-1082250

Product Name: Electrical Powder Dropper  
Trademark: N/A  
Model Number: 1082250  
Prepared For: Battenfeld Acquisition Company Inc.&Subsidiary  
Address: 2501 LeMone Industrial Blvd. Columbia MO. 65201, USA  
Manufacturer: Fujian Henglong Plastic industrial Co.,Ltd  
Address: HengSiRoad, LongchiDevelopmentZone, JiaoMeiTown,  
LonghaiCity, Fujian, China, 363107  
Prepared By: Shenzhen BCTC Testing Co., Ltd.  
Address: BCTC Building & 1-2F, East of B Building, Pengzhou  
Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong  
Street, Bao'an District, Shenzhen, China  
Sample Received Date: Mar. 12, 2020  
Sample tested Date: Mar. 12, 2020-Mar. 16, 2020  
Issue Date: Mar. 16, 2020  
Report No.: BCTC2003000719E  
Test Standards: FCC Part15.247  
ANSI C63.10-2013  
Test Results: PASS

Prepared by(Engineer): Cai Fang Zhong

*Cai Fang Zhong*

Reviewer(Supervisor): Eric Yang

*Eric Yang*

Approved(Manager): Zero Zhou



*The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.*



## TABLE OF CONTENT

| Test Report Declaration                          | Page      |
|--------------------------------------------------|-----------|
| <b>1. VERSION</b>                                | <b>3</b>  |
| <b>2. TEST SUMMARY</b>                           | <b>4</b>  |
| <b>3. MEASUREMENT UNCERTAINTY</b>                | <b>5</b>  |
| <b>4. PRODUCT INFORMATION AND TEST SETUP</b>     | <b>6</b>  |
| 4.1 Product Information                          | 6         |
| 4.2 Test Setup Configuration                     | 6         |
| 4.3 Support Equipment                            | 6         |
| 4.4 Channel List                                 | 7         |
| 4.5 Test Mode                                    | 7         |
| <b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> | <b>8</b>  |
| 5.1 Test Facility                                | 8         |
| 5.2 Test Instrument Used                         | 8         |
| <b>6. CONDUCTED EMISSIONS</b>                    | <b>9</b>  |
| 6.1 Block Diagram Of Test Setup                  | 9         |
| 6.2 Limit                                        | 9         |
| 6.3 Test procedure                               | 9         |
| 6.4 Test Result                                  | 10        |
| <b>7. RADIATED EMISSIONS</b>                     | <b>12</b> |
| 7.1 Block Diagram Of Test Setup                  | 12        |
| 7.2 Limit                                        | 13        |
| 7.3 Test procedure                               | 13        |
| 7.4 Test Result                                  | 16        |
| <b>8. EUT PHOTOGRAPHS</b>                        | <b>19</b> |
| <b>9. EUT TEST SETUP PHOTOGRAPHS</b>             | <b>21</b> |

(Note: N/A means not applicable)



## 1. VERSION

| Report No.      | Issue Date    | Description | Approved |
|-----------------|---------------|-------------|----------|
| BCTC2003000719E | Mar. 16, 2020 | Revised     | Valid    |
|                 |               |             |          |

## 2. TEST SUMMARY



The Product has been tested according to the following specifications:

| No. | Test Parameter      | Clause No | Results |
|-----|---------------------|-----------|---------|
| 1   | Radiated Emissions  | 15.209    | PASS    |
| 2   | Conducted emissions | 15.207    | PASS    |


Remark: Based on the following changes in the product, the RF chip remains unchanged. So the report is only updated Conducted emissions and Radiated Emissions for the original report (BCTC-LH180802182E) .

Changes : PCB Layout just add and remove internal grounding through hole.

Original:

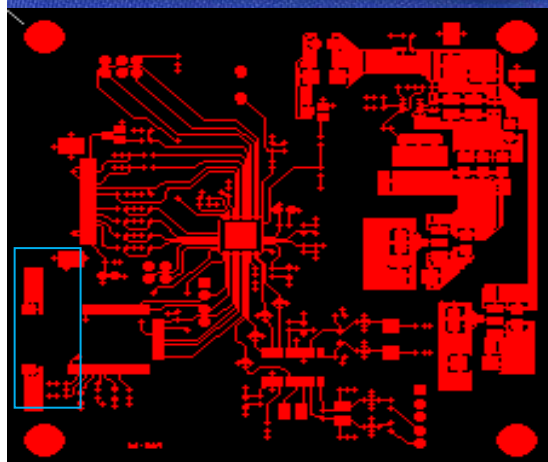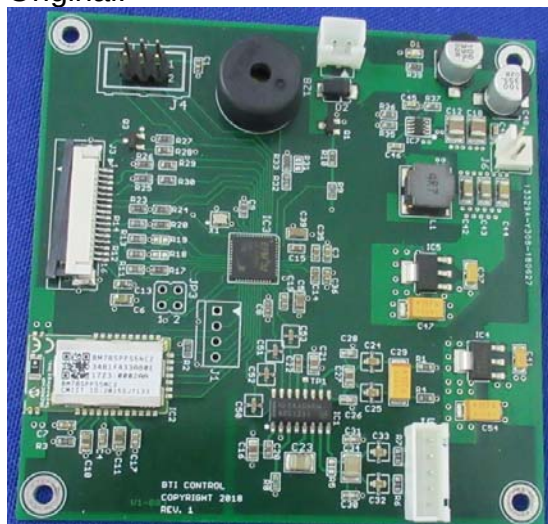

New:

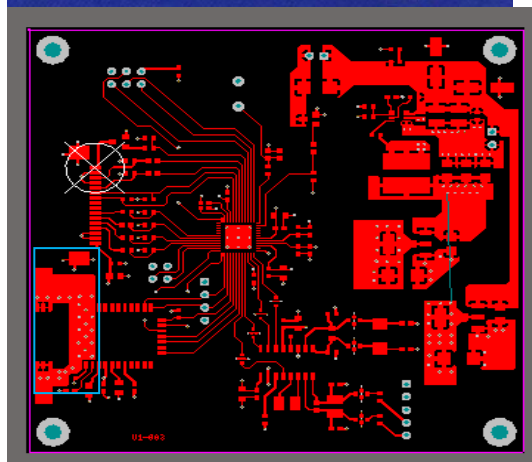



### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

| No. | Item                                | Uncertainty |
|-----|-------------------------------------|-------------|
| 1   | humidity uncertainty                | U=5.3%      |
| 2   | Temperature uncertainty             | U=0.59°C    |
| 3   | Conducted Emission (150kHz-30MHz)   | U=3.2dB     |
| 4   | Radiated disturbance(30MHz-1000MHz) | U=4.8dB     |
| 5   | Radiated disturbance(1GHz-6GHz)     | U=4.9dB     |
| 6   | Radiated disturbance(1GHz-18GHz)    | U=5.0dB     |



## 4. PRODUCT INFORMATION AND TEST SETUP


### 4.1 Product Information

Model(s): 1082250  
 Model Description: N/A  
 Operation Frequency: Bluetooth: 2402-2480MHz  
 Max. RF output power: Bluetooth :-2.62dBm  
 Type of Modulation: Bluetooth: GFSK  
 Antenna installation: Bluetooth: Ceramic Antenna  
 Antenna Gain: Bluetooth:0dBi  
 Power Source: DC 12V  
 Adapter: Input: 100-240V~50/60Hz 0.8A  
 Output: 12.0V-1.0A

### 4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

#### Conducted Emission/Radiated Emissions

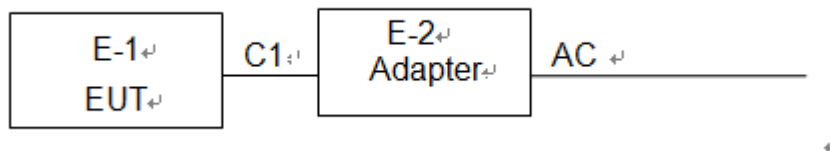

### 4.3 Support Equipment

| No. | Device Type               | Brand | Model         | Series No. | Data Cable |
|-----|---------------------------|-------|---------------|------------|------------|
| E-1 | Electrical Powder Dropper | ZAGG  | 1082250       | N/A        | EUT        |
| E-2 | Adapter                   | N/A   | TY1200100Z1mn | N/A        | EUT        |

| Item | Shielded Type | Ferrite Core | Length | Note                |
|------|---------------|--------------|--------|---------------------|
| C-1  | NO            | NO           | 1.2M   | DC cable unshielded |

#### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



#### 4.4 Channel List

| Channel List |                 |         |                 |         |                 |
|--------------|-----------------|---------|-----------------|---------|-----------------|
| Channel      | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 01           | 2402            | 11      | 2422            | 21      | 2442            |
| 02           | 2404            | 12      | 2424            | 22      | 2444            |
| 03           | 2406            | 13      | 2426            | 23      | 2446            |
| ~            | ~               | ~       | ~               | ~       | ~               |
| 09           | 2418            | 19      | 2438            | 39      | 2478            |
| 10           | 2420            | 20      | 2440            | 40      | 2480            |

#### 4.5 Test Mode

| Test mode | Test mode                                           | Low channel | Middle channel | High channel |
|-----------|-----------------------------------------------------|-------------|----------------|--------------|
| 1         | Link mode(conducted emission and Radiated emission) |             |                |              |

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used


| Conducted emissions Test |              |          |                |               |              |
|--------------------------|--------------|----------|----------------|---------------|--------------|
| Equipment                | Manufacturer | Model#   | Serial#        | Last Cal.     | Next Cal.    |
| Receiver                 | R&S          | ESR3     | 102075         | Jun. 13, 2019 | Jun.12, 2020 |
| LISN                     | R&S          | ENV216   | 101375         | Jun. 13, 2019 | Jun.12, 2020 |
| ISN                      | HPX          | ISN T800 | S1509001       | Jun. 13, 2019 | Jun.12, 2020 |
| Software                 | Frad         | EZ-EMC   | EMC-CON<br>3A1 | \             | \            |

| Radiated emissions Test (966 chamber) |                 |               |                  |               |               |
|---------------------------------------|-----------------|---------------|------------------|---------------|---------------|
| Equipment                             | Manufacturer    | Model#        | Serial#          | Last Cal.     | Next Cal.     |
| 966 chamber                           | ChengYu         | 966 Room      | 966              | Jun. 19, 2018 | Jun. 18, 2021 |
| Receiver                              | R&S             | ESR3          | 102075           | Jun. 13, 2019 | Jun. 12, 2020 |
| Receiver                              | R&S             | ESRP          | 101154           | Jun. 13, 2019 | Jun. 12, 2020 |
| Amplifier                             | Schwarzbeck     | BBV9718       | 9718-309         | Jun. 25, 2019 | Jun. 24, 2020 |
| Amplifier                             | Schwarzbeck     | BBV9744       | 9744-0037        | Jun. 25, 2019 | Jun. 24, 2020 |
| TRILOG<br>Broadband<br>Antenna        | schwarzbeck     | VULB 9163     | VULB9163-<br>942 | Jun. 22, 2019 | Jun. 21, 2020 |
| Horn<br>Antenna                       | SCHWARZBEC<br>K | BBHA9120<br>D | 1201             | Jun. 22, 2019 | Jun. 21, 2020 |
| Software                              | Frad            | EZ-EMC        | FA-03A2<br>RE    | \             | \             |



## 6. CONDUCTED EMISSIONS

### 6.1 Block Diagram Of Test Setup

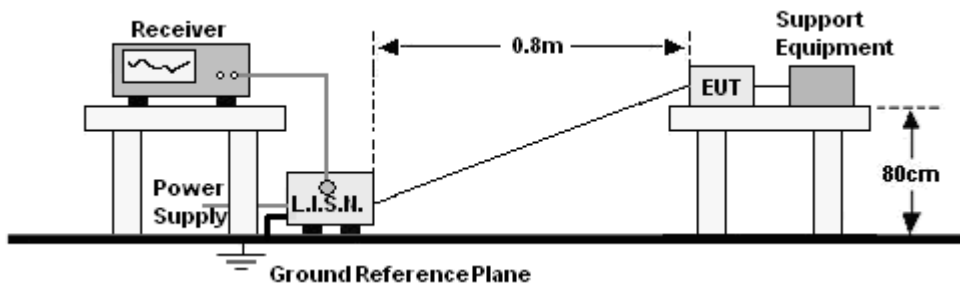

### 6.2 Limit

| FREQUENCY (MHz) | Limit (dBuV) |           |
|-----------------|--------------|-----------|
|                 | Quas-peak    | Average   |
| 0.15 -0.5       | 66 - 56 *    | 56 - 46 * |
| 0.50 -5.0       | 56.00        | 46.00     |
| 5.0 -30.0       | 60.00        | 50.00     |

Notes:  
 1. \*Decreasing linearly with logarithm of frequency.  
 2. The lower limit shall apply at the transition frequencies.

### 6.3 Test procedure


| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.



## 6.4 Test Result

|                |              |                     |        |
|----------------|--------------|---------------------|--------|
| Temperature :  | 25 °C        | Relative Humidity : | 54%    |
| Pressure :     | 1010hPa      | Phase :             | L      |
| Test Voltage : | AC 120V/60Hz | Test Mode :         | Mode 1 |

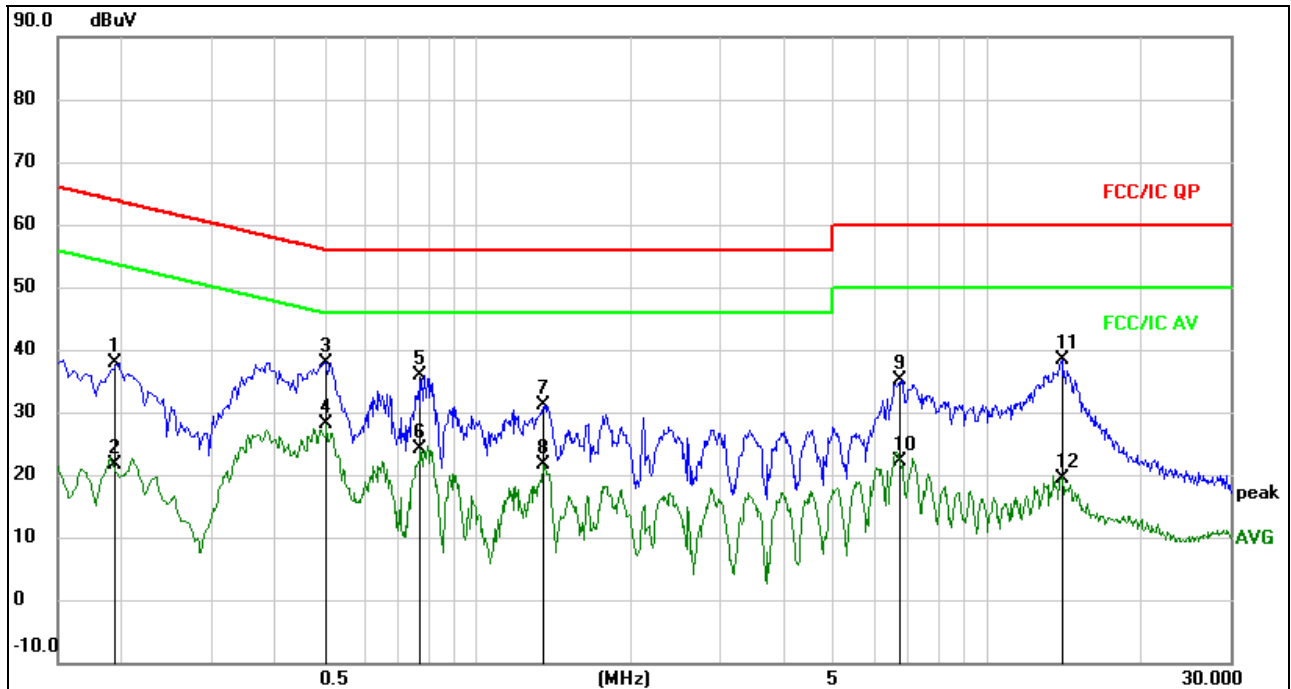


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------|--------------------------|---------------|------------|----------|---------|
| 1       | 0.1924       | 28.42                    | 9.47              | 37.89                    | 63.93         | -26.04     | QP       |         |
| 2       | 0.1924       | 12.21                    | 9.47              | 21.68                    | 53.93         | -32.25     | AVG      |         |
| 3       | 0.5020       | 28.37                    | 9.60              | 37.97                    | 56.00         | -18.03     | QP       |         |
| 4 *     | 0.5020       | 18.54                    | 9.60              | 28.14                    | 46.00         | -17.86     | AVG      |         |
| 5       | 0.7740       | 26.15                    | 9.64              | 35.79                    | 56.00         | -20.21     | QP       |         |
| 6       | 0.7740       | 14.39                    | 9.64              | 24.03                    | 46.00         | -21.97     | AVG      |         |
| 7       | 1.3460       | 21.61                    | 9.58              | 31.19                    | 56.00         | -24.81     | QP       |         |
| 8       | 1.3460       | 11.94                    | 9.58              | 21.52                    | 46.00         | -24.48     | AVG      |         |
| 9       | 6.7420       | 25.41                    | 9.73              | 35.14                    | 60.00         | -24.86     | QP       |         |
| 10      | 6.7420       | 12.46                    | 9.73              | 22.19                    | 50.00         | -27.81     | AVG      |         |
| 11      | 14.0180      | 28.76                    | 9.70              | 38.46                    | 60.00         | -21.54     | QP       |         |
| 12      | 14.0180      | 9.80                     | 9.70              | 19.50                    | 50.00         | -30.50     | AVG      |         |



|                |              |                     |        |
|----------------|--------------|---------------------|--------|
| Temperature :  | 25 °C        | Relative Humidity : | 54%    |
| Pressure :     | 1010hPa      | Phase :             | N      |
| Test Voltage : | AC 120V/60Hz | Test Mode :         | Mode 1 |

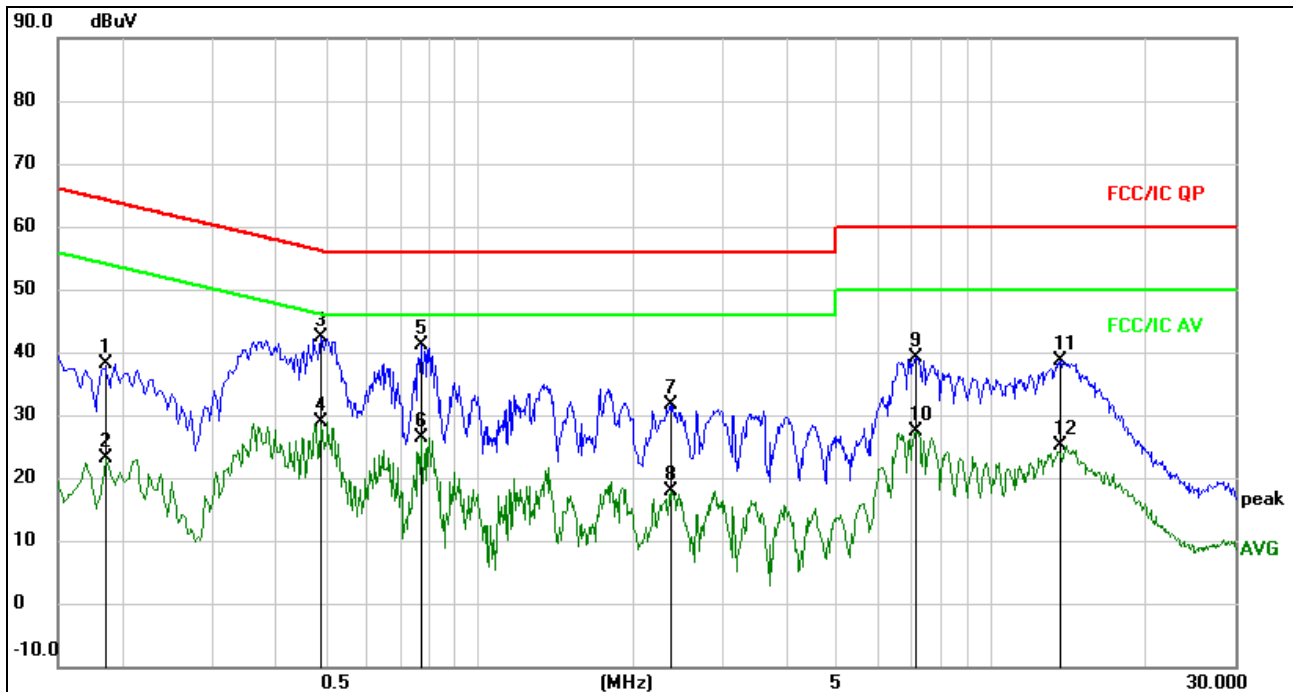

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------|--------------------------|---------------|------------|----------|---------|
| 1   |     | 0.1860       | 28.60                    | 9.48              | 38.08                    | 64.21         | -26.13     | QP       |         |
| 2   |     | 0.1860       | 13.62                    | 9.48              | 23.10                    | 54.21         | -31.11     | AVG      |         |
| 3   | *   | 0.4900       | 32.75                    | 9.58              | 42.33                    | 56.17         | -13.84     | QP       |         |
| 4   |     | 0.4900       | 19.31                    | 9.58              | 28.89                    | 46.17         | -17.28     | AVG      |         |
| 5   |     | 0.7700       | 31.42                    | 9.64              | 41.06                    | 56.00         | -14.94     | QP       |         |
| 6   |     | 0.7700       | 16.79                    | 9.64              | 26.43                    | 46.00         | -19.57     | AVG      |         |
| 7   |     | 2.3699       | 22.08                    | 9.62              | 31.70                    | 56.00         | -24.30     | QP       |         |
| 8   |     | 2.3699       | 8.29                     | 9.62              | 17.91                    | 46.00         | -28.09     | AVG      |         |
| 9   |     | 7.1220       | 29.52                    | 9.72              | 39.24                    | 60.00         | -20.76     | QP       |         |
| 10  |     | 7.1220       | 17.72                    | 9.72              | 27.44                    | 50.00         | -22.56     | AVG      |         |
| 11  |     | 13.6260      | 28.87                    | 9.70              | 38.57                    | 60.00         | -21.43     | QP       |         |
| 12  |     | 13.6260      | 15.50                    | 9.70              | 25.20                    | 50.00         | -24.80     | AVG      |         |


## 7. RADIATED EMISSIONS

### 7.1 Block Diagram Of Test Setup


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

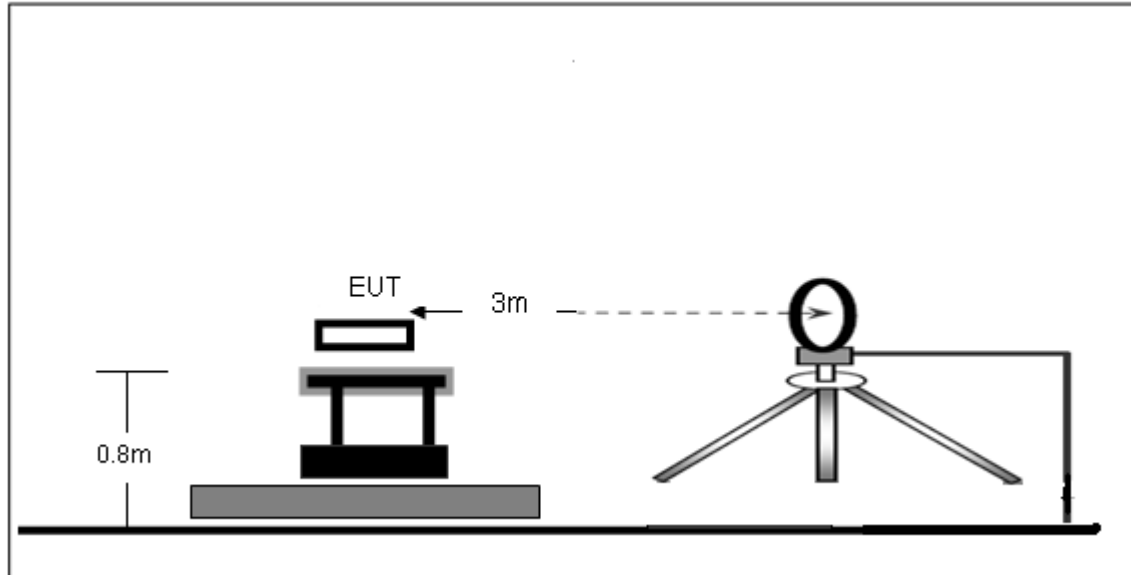

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

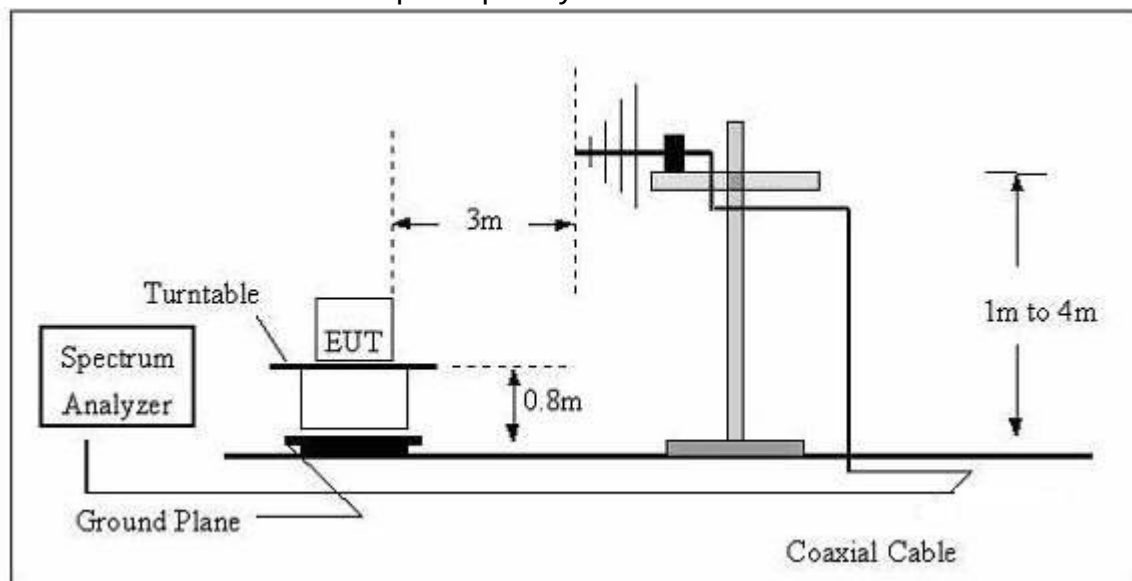

### (C) Radiated Emission Test-Up Frequency Above 1GHz

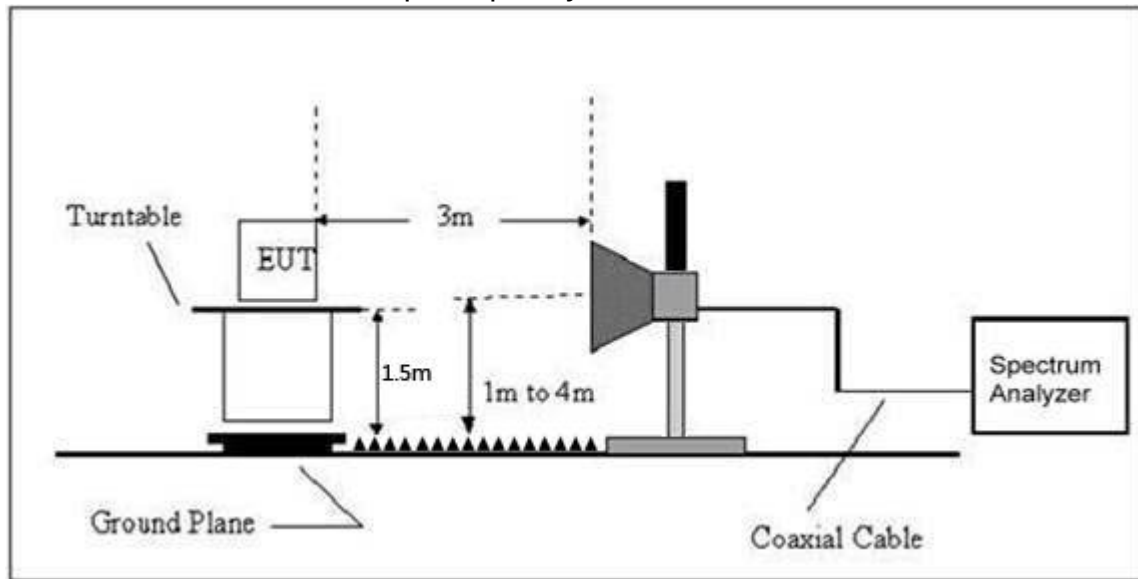

## 7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequency<br>(MHz) | Field Strength<br>uV/m | Distance<br>(m) | Field Strength Limit at 3m Distance |                                |
|--------------------|------------------------|-----------------|-------------------------------------|--------------------------------|
|                    |                        |                 | uV/m                                | dBuV/m                         |
| 0.009 ~ 0.490      | 2400/F(kHz)            | 300             | 10000 * 2400/F(kHz)                 | $20\log^{(2400/F(kHz))} + 80$  |
| 0.490 ~ 1.705      | 24000/F(kHz)           | 30              | 100 * 24000/F(kHz)                  | $20\log^{(24000/F(kHz))} + 40$ |
| 1.705 ~ 30         | 30                     | 30              | 100 * 30                            | $20\log^{(30)} + 40$           |
| 30 ~ 88            | 100                    | 3               | 100                                 | $20\log^{(100)}$               |
| 88 ~ 216           | 150                    | 3               | 150                                 | $20\log^{(150)}$               |
| 216 ~ 960          | 200                    | 3               | 200                                 | $20\log^{(200)}$               |
| Above 960          | 500                    | 3               | 500                                 | $20\log^{(500)}$               |

## 7.3 Test procedure

| Receiver Parameter | Setting           |
|--------------------|-------------------|
| Attenuation        | Auto              |
| 9kHz~150kHz        | RBW 200Hz for QP  |
| 150kHz~30MHz       | RBW 9kHz for QP   |
| 30MHz~1000MHz      | RBW 120kHz for QP |

| Spectrum Parameter | Setting                                                            |
|--------------------|--------------------------------------------------------------------|
| 1-25GHz            | RBW 1 MHz /VBW 1 MHz for Peak,<br>RBW 1 MHz / VBW 10Hz for Average |

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Above 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.



## 7.4 Test Result

Below 30MHz

|              |         |                    |              |
|--------------|---------|--------------------|--------------|
| Temperature: | 26℃     | Relative Humidity: | 24%          |
| Pressure:    | 101 hPa | Test Voltage :     | AC 120V/60Hz |
| Test Mode :  | Mode 1  | Polarization :     | --           |

| Freq. | Reading  | Limit    | Margin | State |
|-------|----------|----------|--------|-------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB)   | P/F   |
| --    | --       | --       | --     | PASS  |
| --    | --       | --       | --     | PASS  |

### Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})$ (dB);


Limit line = specific limits(dBuV) + distance extrapolation factor.





Between 30MHz – 1GHz

|              |         |                    |              |
|--------------|---------|--------------------|--------------|
| Temperature: | 26°C    | Relative Humidity: | 54%          |
| Pressure:    | 101 hPa | Test Voltage :     | AC 120V/60Hz |
| Test Mode :  | Mode 1  | Polarization :     | Horizontal   |

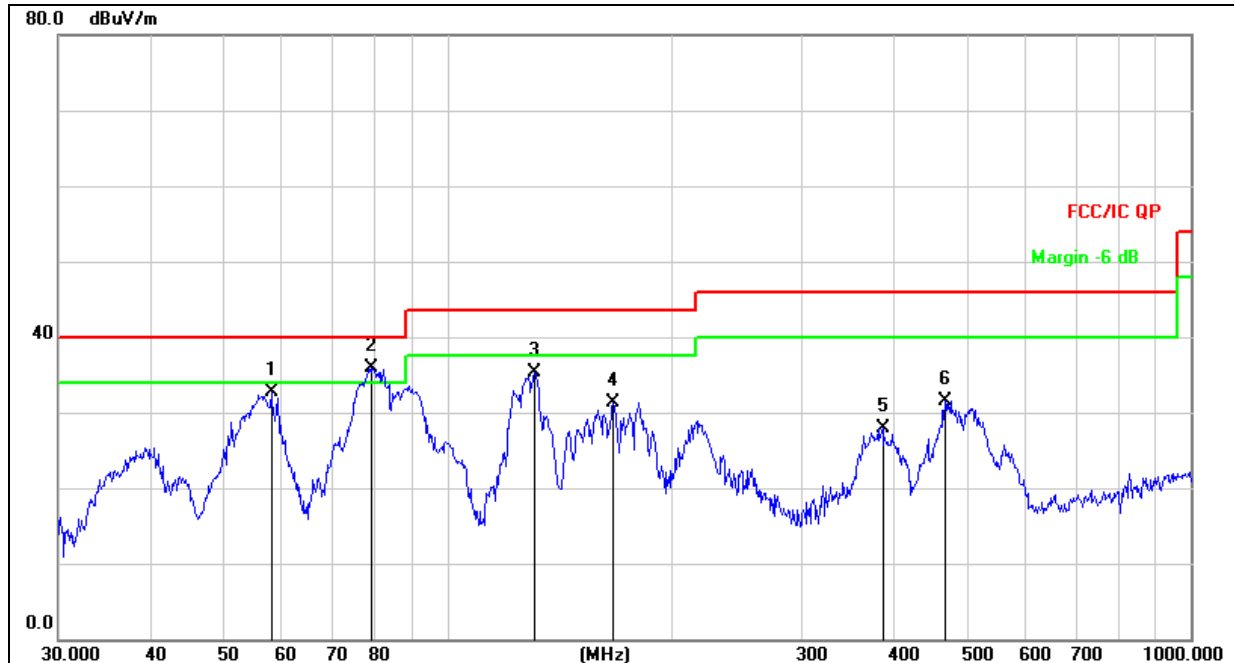


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit | Over   |          |
|-----|-----|----------|---------|---------|----------|-------|--------|----------|
|     |     | MHz      | Level   | Factor  | ment     |       |        | Detector |
|     |     |          | dBuV    | dB      | dBuV/m   | dB/m  | dB     |          |
| 1   |     | 57.9992  | 48.33   | -15.70  | 32.63    | 40.00 | -7.37  | QP       |
| 2   | *   | 79.2425  | 56.17   | -20.24  | 35.93    | 40.00 | -4.07  | QP       |
| 3   |     | 131.2965 | 53.67   | -18.30  | 35.37    | 43.50 | -8.13  | QP       |
| 4   |     | 167.2366 | 49.76   | -18.40  | 31.36    | 43.50 | -12.14 | QP       |
| 5   |     | 385.2805 | 39.31   | -11.43  | 27.88    | 46.00 | -18.12 | QP       |
| 6   |     | 467.2348 | 41.13   | -9.61   | 31.52    | 46.00 | -14.48 | QP       |



|              |         |                    |              |
|--------------|---------|--------------------|--------------|
| Temperature: | 26°C    | Relative Humidity: | 54%          |
| Pressure:    | 101 hPa | Test Voltage :     | AC 120V/60Hz |
| Test Mode :  | Mode 1  | Polarization :     | Vertical     |

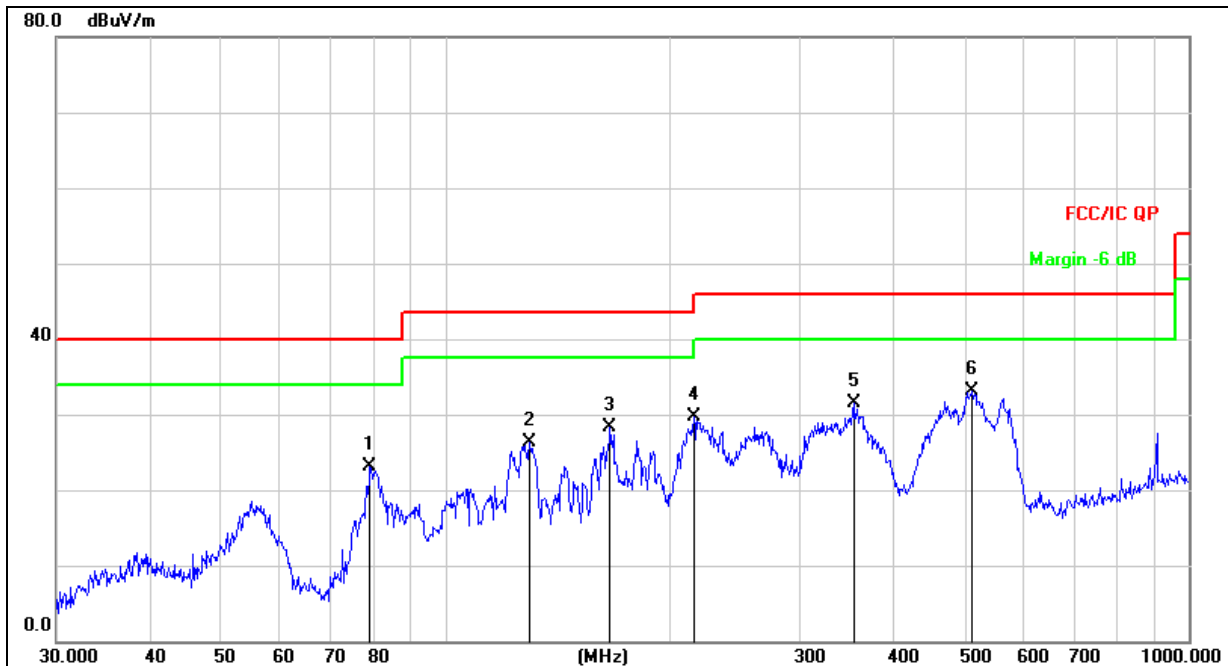

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|-------|--------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dB/m  | dB     | Detector |
| 1   |     | 79.2426  | 43.28         | -20.24         | 23.04        | 40.00 | -16.96 | QP       |
| 2   |     | 129.9226 | 44.43         | -18.21         | 26.22        | 43.50 | -17.28 | QP       |
| 3   |     | 166.6514 | 46.69         | -18.43         | 28.26        | 43.50 | -15.24 | QP       |
| 4   |     | 216.0240 | 45.54         | -15.93         | 29.61        | 46.00 | -16.39 | QP       |
| 5   |     | 354.1831 | 43.66         | -12.13         | 31.53        | 46.00 | -14.47 | QP       |
| 6   | *   | 511.8352 | 41.81         | -8.64          | 33.17        | 46.00 | -12.83 | QP       |

## 8. EUT PHOTOGRAPHS

EUT Photo 1




EUT Photo 2

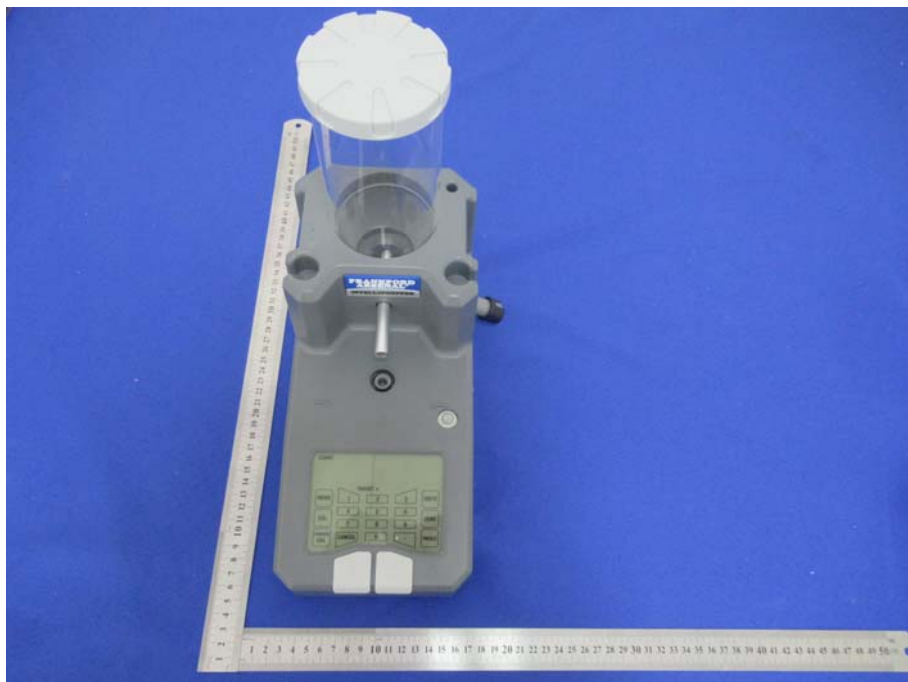

EUT Photo 3



EUT Photo 4

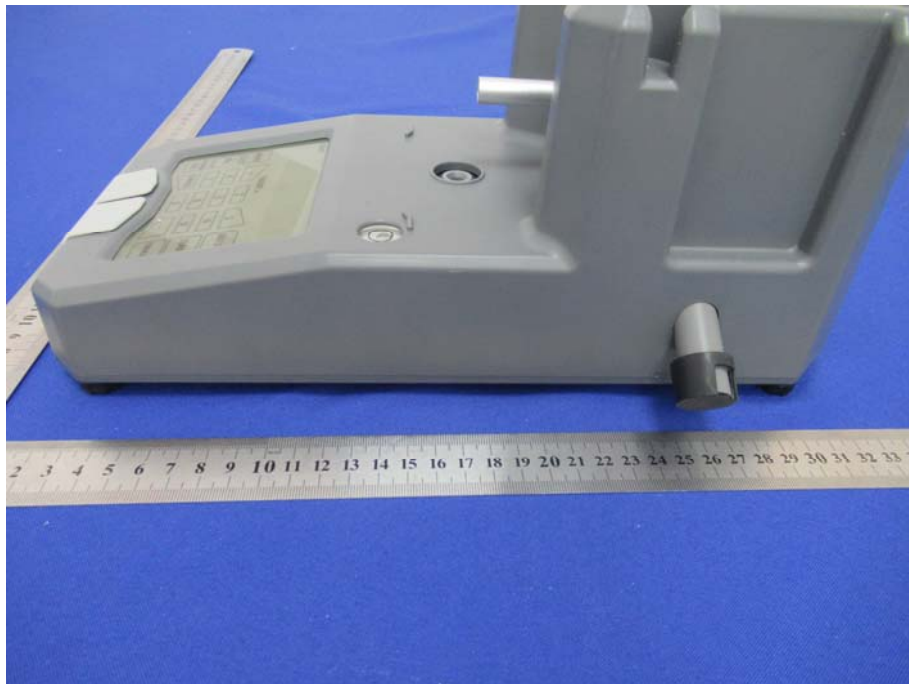

## 9. EUT TEST SETUP PHOTOGRAPHS

### Conducted emissions



### Radiated emission



\*\*\*\*\* END OF REPORT \*\*\*\*\*