

FCC-TEST REPORT

Report Number	:	68.910.15.018.01	Date of Issue:	Oct 15, 2015
Model _:	:	KPB02		
Product Type	:	Kid Power Band		
Applicant	:	United States Committee for	UNICEF	
Address _:	: 125 Maiden Lane 10th Floor, New York, United States			
Production Facility	: Joint Chinese Ltd			
Address	:	Building 6, Huafeng Tech Park, Luotian Industrial Area, Songgang		
_		Town, Baoan, Shenzhen, Ch	nina	
Test Result		■ Positive □ Negati	ve	
		_		
Total pages including				
Appendices	: _	23		

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.



1 Table of Contents

1	Ta	able of Contentsable	2
2	D	etails about the Test Laboratory	3
3		escription of the Equipment under Test	
4	S	ummary of Test Standards	5
5	S	ummary of Test Results	6
6	G	eneral Remarks	7
7	Т	est Setups	8
8		ystems test configuration	
9	Т	echnical Requirement	10
	9.1	Conducted peak output power	10
	9.2	6dB bandwidth	11
	9.3	Power spectral density	13
	9.4	Spurious RF conducted emissions	14
	9.5	Band edge	
	9.6	Spurious radiated emissions for transmitter	20
10		Test Equipment List	22
11		System Measurement Uncertainty	



2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen

Branch

Building 12&13, Zhiheng Wisdomland Business Park,

Nantou Checkpoint Road 2, Nanshan District,

Shenzhen City, 518052,

P. R. China

FCC Registration Number: 502708

Telephone: 86 755 8828 6998 Fax: 86 755 828 5299



3 Description of the Equipment under Test

Description of the Equipment Under Test

Product: Kid Power Band

Model no.: KPB02

FCC ID: 2AF4QKPB02-J083

Options and accessories: NIL

Rating: DC3.7V (supplied by Li-ion rechargeable battery)

DC5V (charged by USB port)

RF Transmission

Frequency:

2402-2480MHz

No. of Operated Channel: 40

Modulation: GFSK

Antenna Type: SMD Antenna

Antenna Gain: 0.5dBi

Description of the EUT: The Equipment Under Test (EUT) is a Kid Power Band with Bluetooth

4.0 function operating at 2.4GHz



4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C	PART 15 - RADIO FREQUENCY DEVICES
10-1-14 Edition	Subpart C - Intentional Radiators

All the test methods were according to KDB558074 D01 DTS Meas Guidance v03r03 and ANSI C63.10 (2013).



5 Summary of Test Results

Technical Requirements					
FCC Part 15 Subpart C					
Test Condition		Test	Test Result		
		Site	Pass	Fail	N/A
§15.207 Conducted emission AC power port					
§15.247 (b) (1) Conducted peak output power	10	Site 1	\boxtimes		
§15.247(a)(1) 20dB bandwidth					
§15.247(a)(1) Carrier frequency separation					
§15.247(a)(1)(iii) Number of hopping frequencies					
§15.247(a)(1)(iii) Dwell Time					
§15.247(a)(2) 6dB bandwidth	11	Site 1	\boxtimes		
§15.247(e) Power spectral density	13	Site 1	\boxtimes		
§15.247(d) Spurious RF conducted emissions	14	Site 1			
§15.247(d) Band edge	18	Site 1			
§15.247(d) & §15.209 Spurious radiated emissions for transmitter	20	Site 1			
§15.203 Antenna requirement	See n	ote 1			

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses a permanently SMD Antenna, which gain is 0.5dBi. According to §15.203, it is considered sufficiently to comply with the provisions of this section.



General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2AF4QKPB02-J083 complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C Rules.

SUMMARY:

All tests according to the regulations cited on page 5 were

- - Performed
- ☐ Not Performed

The Equipment under Test

- - Fulfills the general approval requirements.
- □ **Does not** fulfill the general approval requirements.

Sample Received Date: Oct 08, 2015

Testing Start Date: Oct 08, 2015

Testing End Date: Oct 15, 2015

- Jiangsu TÜV Product Service Ltd. - Shenzhen Branch -

Reviewed by: Prepared by:

Phoebe Hu

Calvin Weng EMC Project Manager EMC Project Engineer


Leon Zhang **EMC Test Engineer**

Tested by:




7 Test Setups

7.1 Radiated test setups

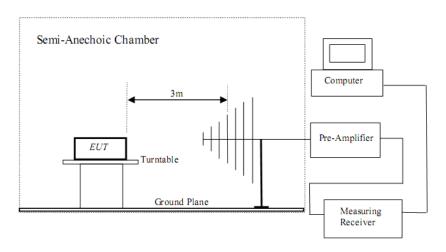

7.2 Conducted RF test setups





8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
NoteBook	LENOVO	X240	

Test software: N/A.

The system was configured to channel 0, 19, and 39 for the test.



9 Technical Requirement

9.1 Conducted peak output power

Test Method

- Use the following spectrum analyzer settings:
 RBW > the 6 dB bandwidth of the emission being measured, VBW≥3RBW, Span≥3RBW
 Sweep = auto, Detector function = peak, Trace = max hold.
- 2. Add a correction factor to the display.
- 3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

Limits

According to §15.247 (b) (1), conducted peak output power limit as below:

Frequency Range	Limit	Limit
MHz	W	dBm
2400-2483.5	≤1	≤30

Test result as below table

	Conducted Peak	
Frequency	Output Power	Result
MHz	dBm	
Top channel 2402MHz	-4.01	Pass
Middle channel 2440MHz	-3.32	Pass
Bottom channel 2480MHz	-3.67	Pass



9.2 6dB bandwidth

Test Method

- Use the following spectrum analyzer settings: RBW=100K, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
- 2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.
- 3. Allow the trace to stabilize, record the X dB Bandwidth value.

Limit

Limit [kHz]	
≥500	_

Test result


Frequency MHz	6dB bandwidth kHz	Result
Top channel 2402MHz	659.9	Pass
Middle channel 2440MHz	664.3	Pass
Bottom channel 2480MHz	672.9	Pass

2402MHz




Date: 12.OCT.2015 19:00:46



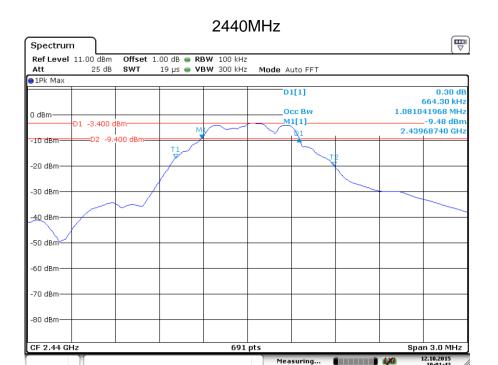

Date: 12.OCT.2015 19:01:42

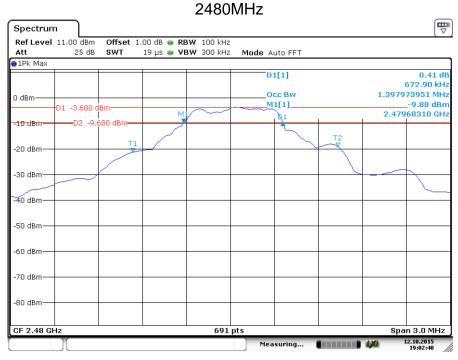

Date: 12.OCT.2015 19:02:40



9.3 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

- Set analyzer center frequency to DTS channel center frequency.
 RBW=3kHz,VBW≥3RBW,Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
- 2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
- 3. Repeat above procedures until other frequencies measured were completed.

Limit

Limit [dBm]	
≤8	

Test result

		Power spectral	
	Frequency	density	Result
_	MHz	dBm	
	Top channel 2402MHz	-17.88	Pass
	Middle channel 2440MHz	-17.58	Pass
	Bottom channel 2480MHz	-18.67	Pass



9.4 Spurious RF conducted emissions


Test Method

- 1. Establish a reference level by using the following procedure:
 - a. Set RBW=100 kHz. VBW≥3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.
 - b. Allow trace to fully stabilize, use the peak marker function to determine the maximum PSD level.
- 2. Use the maximum PSD level to establish the reference level.
 - a. Set the center frequency and span to encompass frequency range to be measured.
 - b. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements, report the three highest emissions relative to the limit.
- 3. Repeat above procedures until other frequencies measured were completed.

Limit


Frequency Range MHz	Limit (dBc)
30-25000	-20

Spurious RF conducted emissions

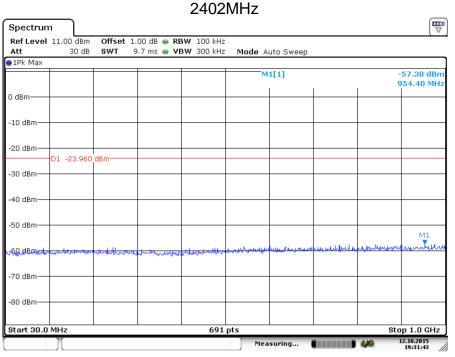


Date: 12.OCT.2015 19:31:43



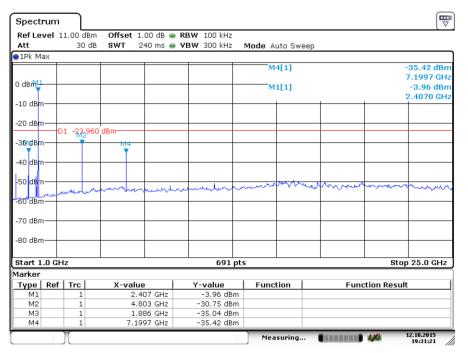


Date: 12.OCT.2015 19:31:22

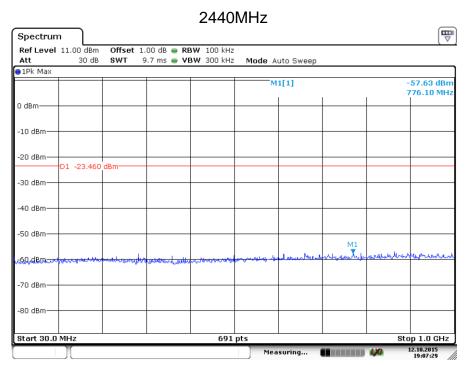


Date: 12.OCT.2015 19:07:29



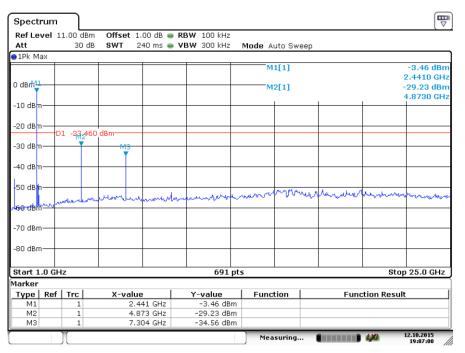


Date: 12.OCT.2015 19:07:00

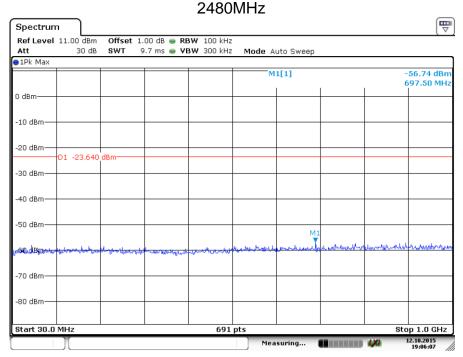

Date: 12.OCT.2015 19:06:07



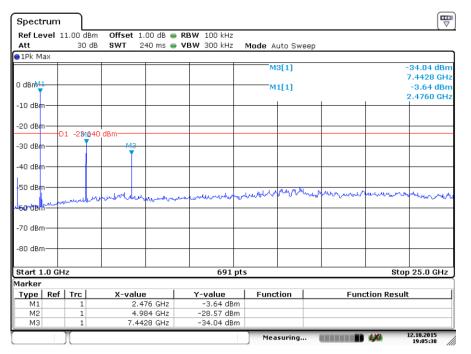

Date: 12.OCT.2015 19:05:39



9.5 Band edge


Test Method

- 1 Use the following spectrum analyzer settings: Span = wide enough to capture the peak level of the in-band emission and all spurious RBW = 100 kHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold.
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section.

Limit


Frequency Range MHz	Limit (dBc)
30-25000	-20

Test result

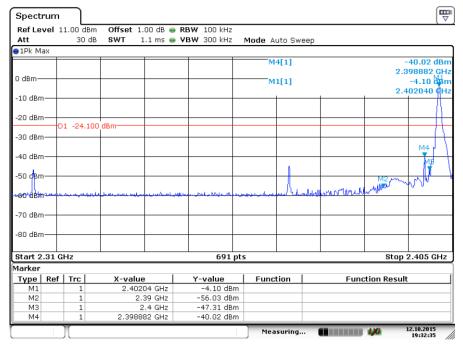

Date: 12.OCT.2015 19:32:36



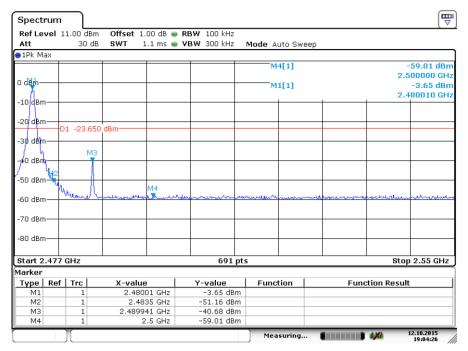

Date: 12.OCT.2015 19:04:26



9.6 Spurious radiated emissions for transmitter

Test Method

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 3. Use the following spectrum analyzer settings: Span = wide enough to fully capture the emission being measured, RBW = 1 MHz for f ≥ 1GHz, 100 kHz for f < 1 GHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold</p>
- 4. Follow the guidelines in ANSI C63.4-2009 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 5. Set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the duty cycle per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log(duty cycle/100 ms), in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Limit

According to part 15.247(d), the radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dBµV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK



Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Transmitting spurious emission test result as below:

_...!aa!a..

2402MHz

Frequency	Emission Level	Polarization	Limit	Detector	Result
MHz	dBuV/m		dBμV/m		
68.9	16.85	Horizontal	40	QP	Pass
48.7	17.00	Vertical	40	QP	Pass
*4804	46.33	Horizontal	74	PK	Pass
*4804	45.34	Vertical	74	PK	Pass

2440MHz

Frequency	Emission Level	Polarization	Limit	Detector	Result
MHz	dBuV/m		dBμV/m		
*4880	45.55	Horizontal	74	PK	Pass
*4880	44.77	Vertical	74	PK	Pass

2480MHz

Frequency	Emission Level	Polarization	Limit	Detector	Result
MHz	dBuV/m		dBμV/m		
*4960	45.50	Horizontal	74	PK	Pass
*4960	43.33	Vertical	74	PK	Pass

Remark:

- (1) QP Emission Level= Antenna Factor +Cable Loss + Reading
 PK Emission Level= Antenna Factor +Cable Loss Amp. Factor + Reading
 AV Emission Level= PK Emission Level+20log (dutycycle)
- (2) Data of measurement within 30-1000MHz frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (3) "*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.



10 Test Equipment List

List of Test Instruments

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE	
EMI Test Receiver	Rohde & Schwarz	ESR 3	101782	2016-7-24	\boxtimes
LISN	Rohde & Schwarz	ENV4200	100249	2016-7-24	
LISN	Rohde & Schwarz	ENV216	100326	2016-7-24	\boxtimes
ISN	Rohde & Schwarz	ENY81	100177	2016-7-24	
ISN	Rohde & Schwarz	ENY81- CAT6	101664	2016-7-24	
High Voltage Proble	Rohde & Schwarz	TK9420(VT9 420)	9420-58	2016-7-24	
RF Current probe	Rohde & Schwarz	EZ-17	100816	2016-7-24	
Signal Analyzer	Rohde & Schwarz	FSV40	101030	2016-7-24	\boxtimes
EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2016-7-24	\boxtimes
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2016-8-14	
Horn Antenna	Rohde & Schwarz	HF907	102294	2016-7-24	\boxtimes
Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2016-7-24	\boxtimes
Pre-amplifier	Rohde & Schwarz	SCU 40A	100432	2016-7-24	\boxtimes
3m Semi-anechoic chamber	TDK	9X6X6		2019-5-29	



11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty

Items	Extended Uncertainty
Radiated spurious emission(30MHz-1000MHz)	Horizontal: 4.83dB; Vertical: 4.91dB;
Radiated spurious emission(1GHz-18GHz)	Horizontal: 4.89dB; Vertical: 4.88dB;
Output power test	2.04 dB
Power density test	2.04 dB
Bandwidth	1.1x10-7