

#### Shenzhen Huatongwei International Inspection Co., Ltd.

Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China Phone:86-755-26748019 Fax:86-755-26748089 http://www.szhtw.com.cn



# **TEST REPORT**

Report Reference No:	TRE1509010403	R/C 44681		
FCC ID:	2AF54-COMPLEX11T			
Applicant's name:	FY International LLC.			
Address	548 Donald St. Ste. 3, Bedford, NH 0	3110 USA		
Manufacturer	Shenzhen AlldoCube Technology & Science Co., Ltd			
Address:	Building No.1,Sunwang Industrial Par District,Shenzhen, China	k, Xiahenglang Dalang, Longhua		
Test item description:	2 In 1 Tablet PC			
Trade Mark:	Cytrix			
Model/Type reference:	Complex 11t			
Listed Model(s):	i8			
Standard:	FCC CFR Title 47 Part 15 Subpart C	Section 15.247		
Date of receipt of test sample:	Sept 28, 2015			
Date of testing	Sept 29, 2015-Oct 22, 2015			
Date of issue:	Oct 22, 2015			
Result:	PASS			
Compiled by		Showno Zhu		
( position+printedname+signature):	File administrators Shayne Zhu	Shayre Zhu		
Supervised by		Cary Juo		
(position+printedname+signature):	Project Engineer Cary Luo			
Approved by		Hours ru		
(position+printedname+signature):	RF Manager Hans Hu	flours ru		
Testing Laboratory Name:	Shenzhen Huatongwei Internationa	Il Inspection Co., Ltd		
Address:	Bldg3, Hongfa Hi-tech Industrial Park	, Genyu Road, Shenzhen, China		

### Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Report No: TRE1509010403 Page: 2 of 30 Issued: 2015-10-22

## Contents

<u>1.</u>	APPLICABLE STANDARDS ANDTEST DESCRIPTION	3
	Annikashia Otandanda	2
1.1. 1.2.	Applicable Standards	3 3
1.2.	Test Description	3
<u>2.</u>	SUMMARY	4
2.4	Client Information	4
2.1. 2.2.	Client Information Product Description	4 4
2.2.	Operation state	5
2.3. 2.4.	EUT configuration	5 5
2.4. 2.5.	Modifications	5
<u>3.</u>	TEST ENVIRONMENT	6
<u></u>	. = 0 : = 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 :	
3.1.	Address of the test laboratory	6
3.2.	Test Facility	6
3.3.	Equipments Used during the Test	7
3.4.	Environmental conditions	8
3.5.	Statement of the measurement uncertainty	8
<u>4.</u>	TEST CONDITIONS AND RESULTS	9
4.1.	Antenna requirement	9
4.2.	Conducted Emission (AC Main)	10
4.3.	Conducted Peak Output Power	13
4.4.	Power Spectral Density	14
4.5.	6dB bandwidth	16
4.6.	Restricted band (Conducted)	18
4.7.	Band edge and Spurious Emission (conducted)	20
4.8.	Spurious Emission (radiated)	24
<u>5.</u>	TEST SETUP PHOTOS OF THE EUT	29
6.	EXTERNAL AND INTERNAL PHOTOS OF THE EUT	30
<u> </u>	EXTERNAL AND INTERNAL PROTOCOL THE EQ.	30

Report No: TRE1509010403 Page: 3 of 30 Issued: 2015-10-22

## 1. APPLICABLE STANDARDS ANDTEST DESCRIPTION

## 1.1. Applicable Standards

The tests were performed according to following standards: FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices

<u>KDB558074 D01 V03R02:</u> Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS)

## 1.2. Test Description

ReportSection	Test Item	FCC Rule	Result
4.1	Antenna requirement	15.203/15.247 (c)	Pass
4.2	Line Conducted Emission (AC Main)	15.207	Pass
4.3	Conducted Peak Output Power	15.247 (b)(3)	Pass
4.4	Power Spectral Density	15.247 (e)	Pass
4.5	6dB Bandwidth	15.247 (a)(2)	Pass
4.6	Restricted band	15.247(d)/15.205	Pass
4.7/4.8	Spurious Emission	15.247(d)/15.209	Pass

Remark: The measurement uncertainty is not included in the test result.

Report No: TRE1509010403 Page: 4 of 30 Issued: 2015-10-22

# 2. **SUMMARY**

# 2.1. Client Information

Applicant:	FY International LLC.
Address:	548 Donald St. Ste. 3, Bedford, NH 03110 USA
Manufacturer:	Shenzhen AlldoCube Technology & Science Co., Ltd
Address:	Building No.1, Sunwang Industrial Park, Xiahenglang Dalang, Longhua District, Shenzhen, China

## 2.2. Product Description

Name of EUT	2 In 1 Tablet PC
Trade Mark:	Cytrix
Model No.:	Complex 11t
Listed Model(s):	i8
Power supply:	DC 7.4V From internal battery
Adapter information:	Model name:FJ-SW1202000N Input:100-240Va.c.~50/60Hz,0.6Amax Output:12Vd.c., 2000mA
Bluetooth	
Version:	Supported BT4.0+BLE
Modulation:	GFSK
Operation frequency:	2402MHz~2480MHz
Channel number:	40
Channel number: Channel separation:	40 2MHz

Report No: TRE1509010403 Page: 5 of 30 Issued: 2015-10-22

## 2.3. Operation state

#### **♦** Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
01	2404
i i	i:
19	2440
:	÷
38	2478
39	2480

#### ◆ Test mode

For RF test items:

the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions:

the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- O supplied by the lab

_			
0	PowerCable	Length (m):	1
		Shield :	1
		Detachable :	1
0	Multimeter	Manufacturer :	1
		Model No. :	1

#### 2.5. Modifications

No modifications were implemented to meet testing criteria.

Report No: TRE1509010403 Page: 6 of 30 Issued: 2015-10-22

## 3. TEST ENVIRONMENT

#### **3.1.** Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd. (Gongming) Address: Bldg3, Hongfa Hi-tech Industrial Park, Genyu Road, Shenzhen, China Phone: 86-755-26748019 Fax: 86-755-26748089

#### **3.2.** Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: Mar. 01, 2012. Valid time is until February 28, 2015.

#### A2LA-Lab Cert. No. 2243.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until Sept 30, 2015.

#### FCC-Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal dateApril. 24,2015, valid time is until April. 24,2018

#### FCC-Registration No.: 317478

Shenzhen Huatongwei International Inspection Co., Ltd. (Gongming EMC Laboratory) has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 317478, Renewal date July 18, 2014, valid time is until July. 18, 2017.

#### IC-Registration No.: 5377A

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Dec. 31, 2013, valid time is until Dec. 31, 2016.

#### IC-Registration No.: 5377B

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. (Gongming EMC Laboratory) has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B on September 3, 2014, valid time is until September 3, 2017.

#### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

#### VCCI

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.:R-2484. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 29, 2015.

Radiated disturbance above 1GHz measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2013. Valid time is until Dec. 23, 2016.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 19, 2015.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2013. Valid time is until May 06, 2016.

#### DNV

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2016.

Report No: TRE1509010403 Page: 7 of 30 Issued: 2015-10-22

## 3.3. Equipments Used during the Test

Cond	ucted Emission (AC Main)				
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2014/11/01
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	100038	2014/11/01
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2014/11/01
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A

Radia	ted Emission				
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2014/11/01
2	EMI TEST RECEIVER	Rohde&Schwarz	ESI 26	100009	2014/11/01
3	EMI TEST Software	Audix	E3	N/A	N/A
4	TURNTABLE	ETS	2088	2149	N/A
5	ANTENNA MAST	ETS	2075	2346	N/A
6	EMI TEST Software	Rohde&Schwarz	ESK1	N/A	N/A
7	HORNANTENNA	ShwarzBeck	9120D	1011	2014/11/01
8	Amplifer	Sonoma	310N	E009-13	2014/11/01
9	JS amplifer	Rohde&Schwarz	JS4-00101800- 28-5A	F201504	2014/11/01
10	High pass filter	Compliance Direction systems	BSU-6	34202	2014/11/01
11	HORNANTENNA	ShwarzBeck	9120D	1012	2014/11/01
12	Amplifer	Compliance Direction systems	PAP1-4060	120	2014/11/01
13	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2014/11/01
14	TURNTABLE	MATURO	TT2.0		N/A
15	ANTENNA MAST	MATURO	TAM-4.0-P		N/A
16	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2014/11/01
17	ULTRA-BROADBAND ANTENNA	Rohde&Schwarz	HL562	100015	2014/11/01

	Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF							
Emis	Emission / Spurious RF Conducted Emission							
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal			
1	1 Spectrum Analyzer Rohde&Schwarz FSP 1164.4391.40 2014/11/01							

The Cal.Interval was one year

Report No: TRE1509010403 Page: 8 of 30 Issued: 2015-10-22

#### 3.4. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
lative Humidity:	30~60 %
Air Pressure:	950~1050mba

### 3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01"Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1"and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	MeasurementUncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-40 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emissio 1~18GHz	5.16 dB	(1)
Radiated Emissio 18-40GHz	5.54 dB	(1)
Occupied Bandwidth		(1)

<sup>(1)</sup> This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

Report No: TRE1509010403 Page: 9 of 30 Issued: 2015-10-22

## 4. TEST CONDITIONS AND RESULTS

## 4.1. Antenna requirement

#### Requirement

## FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of anantenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

## FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### **Test Result:**

The antenna is integralantenna, the best case gain of the antenna is 2.69dBi



BT/WIFI Antenna

Report No: TRE1509010403 Page: 10 of 30 Issued: 2015-10-22

## 4.2. Conducted Emission (AC Main)


#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)				
	Quasi-peak	Average			
0.15-0.5	66 to 56*	56 to 46*			
0.5-5	56	46			
5-30	60	50			

<sup>\*</sup> Decreases with the logarithm of the frequency.

#### **TEST CONFIGURATION**

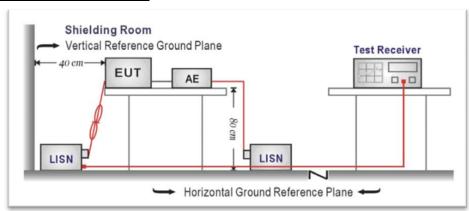


#### **TEST PROCEDURE**

- 1. The EUT tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above theconducting ground plane. The vertical conducting plane was located 40 cm to the rear of theEUT. All other surfaces of EUT were at least 80 cm from any other grounded conductingsurface.
- 3. The EUT and simulators are connected to the main power through a line impedancestabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for themeasuring equipment.
- 4. The peripheral devices are also connected to the main power through aLISN. (Please refer to the block diagram of the test setup and photographs)
- 5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
- 6. The excess length of the power cord between the EUT and the LISN receptacle were foldedback and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- 7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHzusing a receiver bandwidth of 9 kHz.

#### **TEST RESULTS**

Report No: TRE1509010403 Page: 11 of 30 Issued: 2015-10-22


Test mode:	BT	Polarization	L1

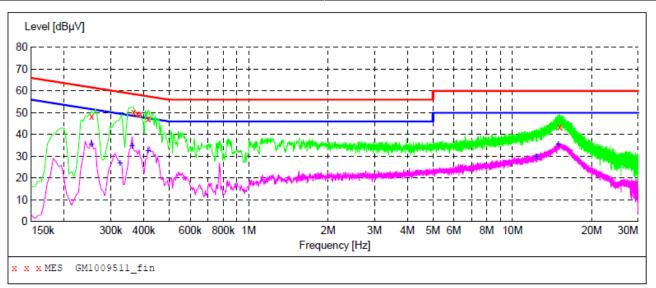

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.253500 0.366000 0.379500 0.388500 0.415500 15.130500	48.40 50.30 49.60 49.50 47.30 43.40	10.2 10.2 10.2 10.2 10.2 10.8	62 59 58 58 58	13.2 8.3 8.7 8.6 10.2 16.6	QP QP QP QP QP QP	L1 L1 L1 L1 L1	GND GND GND GND GND GND
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
				_	Detector	Line	PE GND
MHZ	dΒμV	dB	dΒμV	dB			
MHz 0.253500	dВµV 35.50	dB 10.2	dΒμV 52	dB 16.1	AV	L1	GND
MHz 0.253500 0.325500	dBμV 35.50 26.80	dB 10.2 10.2	dВµV 52 50	dB 16.1 22.8	AV AV	L1 L1	GND GND
MHz 0.253500 0.325500 0.361500	dBµV 35.50 26.80 34.70	dB 10.2 10.2 10.2	dBμV 52 50 49	dB 16.1 22.8 14.0	AV AV AV	L1 L1 L1	GND GND GND

Report No: TRE1509010403 Page: 12 of 30 Issued: 2015-10-22

Test mode:	RT	Polarization	N
rest mode.	D1	1 Olalization	IV

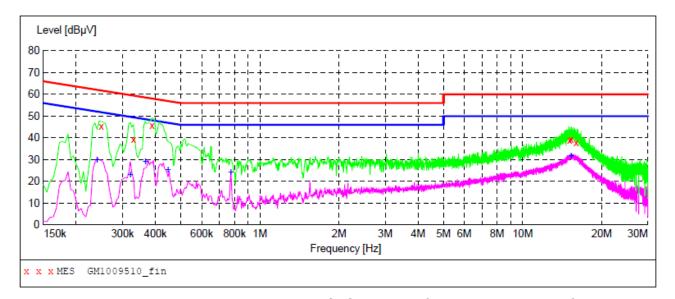

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.249000	45.30	10.2	62	16.5	QP	N	GND
0.330000	39.40	10.2	60	20.1	QP	N	GND
0.388500	45.60	10.2	58	12.5	QP	N	GND
15.072000	38.90	10.8	60	21.1	QP	N	GND
15.301500	39.40	10.8	60	20.6	QP	N	GND
15.981000	38.00	10.8	60	22.0	QP	N	GND
Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
				_	Detector AV	Line N	PE GND
MHz	dΒμV	dB	dΒμV	dB			
MHz 0.240000	dВµV 29.80	dB 10.2	dBμV 52	dB 22.3	AV	N	GND
MHz 0.240000 0.321000	dBμV 29.80 23.20	dB 10.2 10.2	dВµV 52 50	dB 22.3 26.5	AV AV	N N	GND GND
MHZ 0.240000 0.321000 0.366000	dBμV 29.80 23.20 29.30	dB 10.2 10.2 10.2	dBµV 52 50 49	dB 22.3 26.5 19.3	AV AV AV	N N N	GND GND GND


Report No: TRE1509010403 Page: 13 of 30 Issued: 2015-10-22

## 4.3. Conducted Peak Output Power

#### <u>LIMIT</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

#### **TEST CONFIGURATION**

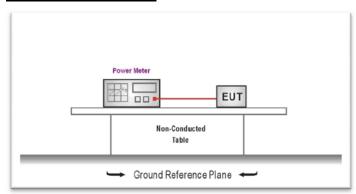

#### **TEST PROCEDURE**

- 1. The EUT was tested according to ANSI C63.10: 2013and KDB 558074 D01 V03R02for compliance to FCC 47CFR 15.247requirements.
- 2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
- 3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector
- 4. Record the measurement data.

## **TEST RESULTS**

Туре	Channel	Output power (dBm)	Limit (dBm)	Result
	00	2.16		
BT-BLE	19	2.17	30.00	Pass
	39	1.57		

Report No: TRE1509010403 Page: 14 of 30 Issued: 2015-10-22


## 4.4. Power Spectral Density

#### **LIMIT**

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e): 8dBm/3KHz

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### **TEST CONFIGURATION**

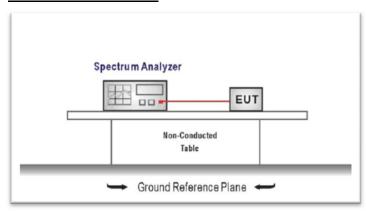

#### **TEST PROCEDURE**

- 1. Connect the antenna port(s) to the spectrum analyzer input,
- 2. Configurethe spectrum analyzer as shown below:

Center frequency=DTS channel center frequency

Span =1.5 times the DTS bandwidth

 $RBW = 3 \text{ kHz} \le RBW \le 100 \text{ kHz}, VBW \ge 3 \times RBW$ 

Sweep time = auto couple

Detector = peak


Trace mode = max hold

- 3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
- 4. Use the peak marker function to determine the maximum amplitude level within the RBW.
- 5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### **TEST RESULTS**

Туре	Channel	Power Spectral Density(dBm/3KHz)	Limit (dBm/3KHz)	Result
	00	-15.84		
BT-BLE	19	-16.10	8.00	Pass
	38	-16.81		

Test plot as follows:

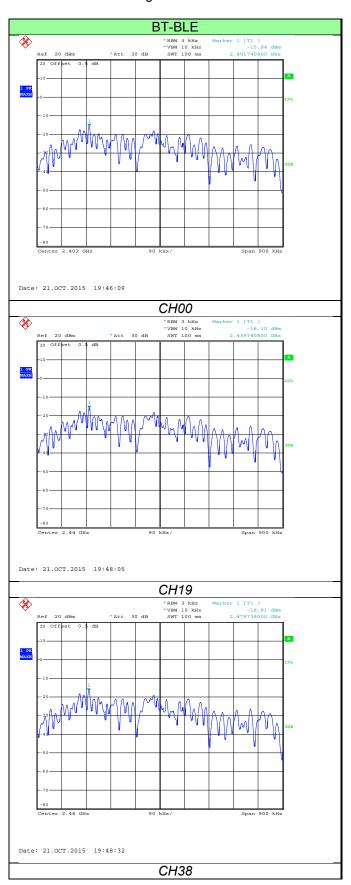

Report No: TRE1509010403 Page: 16 of 30 Issued: 2015-10-22


#### 4.5. 6dB bandwidth

#### **LIMIT**

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2): at least 500KHz

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### **TEST CONFIGURATION**

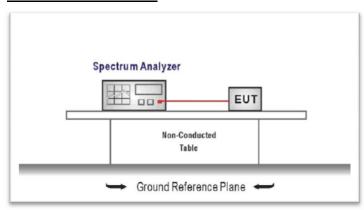

## **TEST PROCEDURE**

- 1. Connect the antenna port(s) to the spectrum analyzer input.
- Configure the spectrum analyzer as shown below (enter all losses between the transmitter output andthe spectrum analyzer).

Center Frequency =DTS channel center frequency

Span=2 x DTS bandwidth

 $RBW = 100 \text{ kHz}, VBW \ge 3 \times RBW$ 

Sweep time= auto couple

Detector = Peak


Trace mode = max hold

- 3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, andrecord the pertinent measurements.

#### **TEST RESULTS**

Туре	Channel	6dB Bandwidth(KHz)	Limit (KHz)	Result
00	550.00			
BT-BLE	19	560.00	≥500	Pass
	38	600.00		

Test plot as follows:

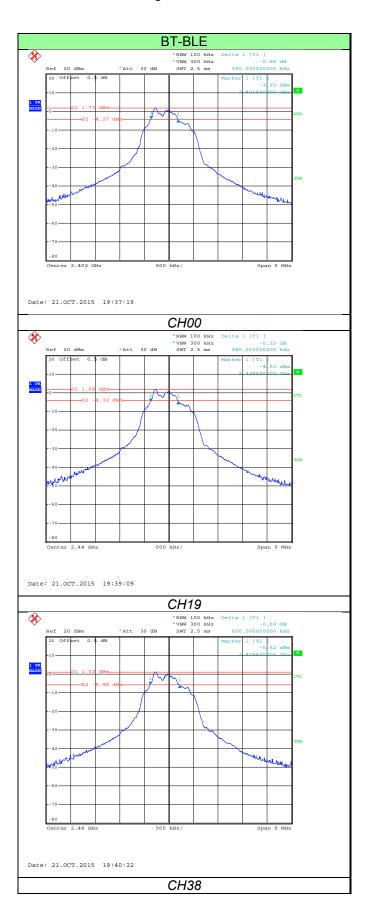

Report No: TRE1509010403 Page: 18 of 30 Issued: 2015-10-22


## 4.6. Restricted band (Conducted)

#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### **TEST CONFIGURATION**

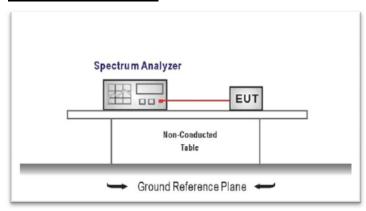

#### **TEST PROCEDURE**

According to KDB 558074 D01 V03R02 for Antenna-port conducted measurement.
 Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands.

- 1) Measure the conducted output power (in dBm) using the Peak /averagedetector
- Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level
- 3) Add the appropriate maximum ground reflection factor to the EIRP level 6 dB for frequencies ≤ 30 MHz
  - 4.7 dB for frequencies between 30 MHz and 1000 MHz
  - 0 dB for frequencies > 1000 MHz
- For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms
- 5) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

E = EIRP - 20log D + 104.8

where:

 $E = electric field strength in dB\mu V/m$ ,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

6) Compare the resultant electric field strength level to the applicable limit

#### 2. Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows

RBW = 1MHz,  $VBW \ge 3 \times RBW$ 

Detector = Peak, Sweep time = auto

Trace mode = max hold

Allow sweeps to continue until the trace stabilizes.

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement

#### 3. Average power measurement procedure

Duty cycle <98 percent, but the duty cycle is not constant


- a) RBW = 1 MHz, VBW ≥ 1/T.
- b) Video bandwidth mode or display mode
  - 1) The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).
  - 2) As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some

Report No: TRE1509010403 Page: 19 of 30 Issued: 2015-10-22

instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode.

- c) Detector = Peak, Sweep time = auto.
- d) Trace mode = max hold.
- e) Allow max hold to run for at least 50 times (1/duty cycle) traces.

#### **TEST RESULTS**

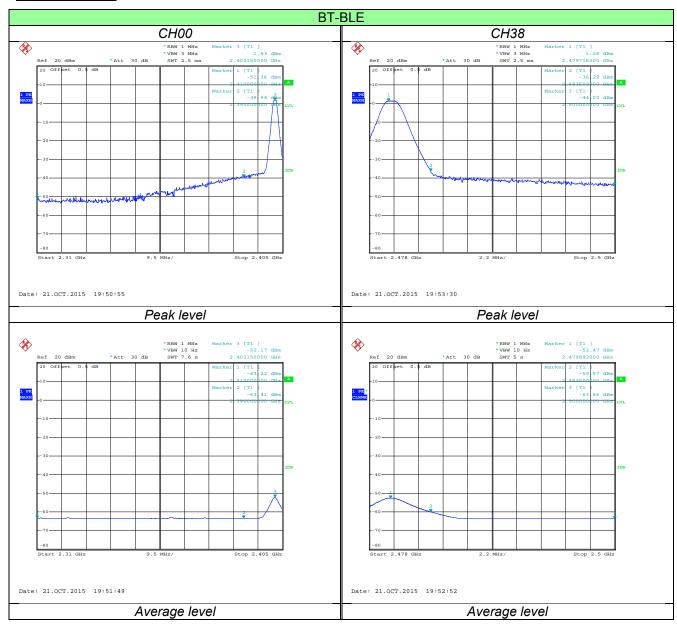

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level at 3m (dBuV/m)	Limit (dBuV/m)	Result	Test Value
2310.00	-51.36	2.69	0.00	46.59	74.00	Pass	
2390.00	-39.54	2.69	0.00	58.41	74.00	Pass	Peak
2483.50	-36.29	2.69	0.00	61.66	74.00	Pass	reak
2500.00	-44.02	2.69	0.00	53.93	74.00	Pass	
2310.00	-63.22	2.69	0.00	34.73	54.00	Pass	
2390.00	-63.41	2.69	0.00	34.54	54.00	Pass	Average
2483.50	-59.97	2.69	0.00	37.98	54.00	Pass	Average
2500.00	-63.66	2.69	0.00	34.29	54.00	Pass	

#### Note:

Report No: TRE1509010403 Page: 20 of 30 Issued: 2015-10-22


### 4.7. Band edge and Spurious Emission (conducted)

#### **LIMIT**

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

#### **TEST CONFIGURATION**

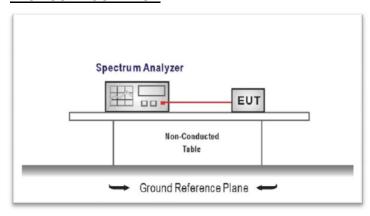

#### **TEST PROCEDURE**

- 1. Connect the antenna port(s) to the spectrum analyzer input.
- 2. Establish a reference level by using the following procedure

Center frequency=DTS channel center frequency

The span = 1.5 times the DTS bandwidth.

 $RBW = 100 \text{ kHz}, VBW \ge 3 \text{ x } RBW$ 

Detector = peak, Sweep time = auto couple, Trace mode = max hold

Allow trace to fully stabilize

Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

#### 3. Emission level measurement

Set the center frequency and span to encompass frequency range to be measured

RBW = 100 kHz, VBW ≥ 3 x RBW

Detector = peak, Sweep time = auto couple, Trace mode = max hold

Allow trace to fully stabilize


Use the peak marker function to determine the maximum amplitude level.

- 4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
- 5. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emissions relative to the limit.


#### **TEST RESULTS**

Test plot as follows:


Report No: TRE1509010403 Page: 21 of 30 Issued: 2015-10-22

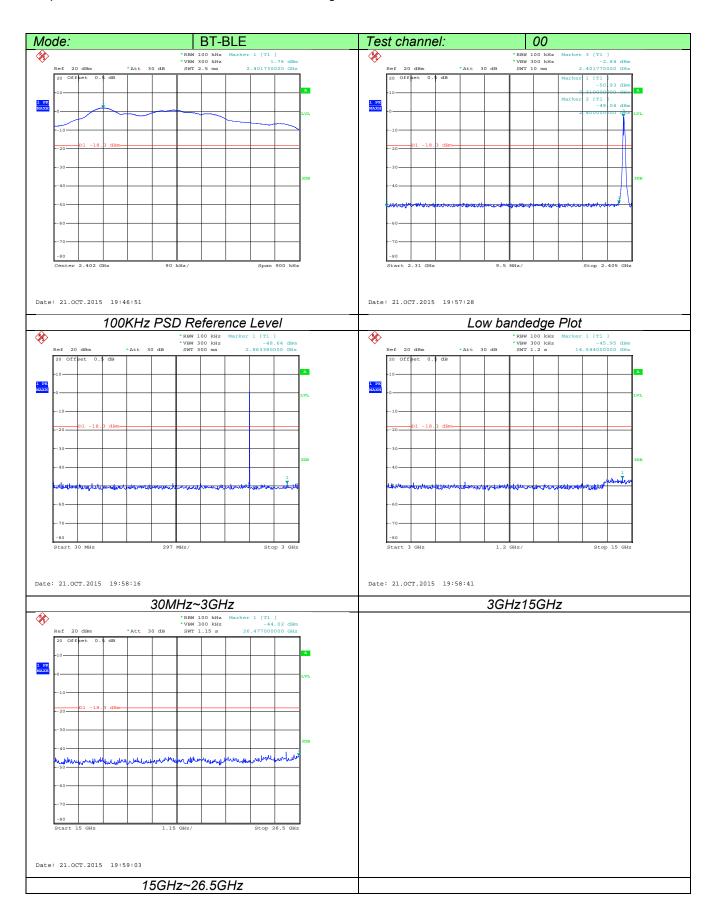

Report No: TRE1509010403 Page: 22 of 30 Issued: 2015-10-22

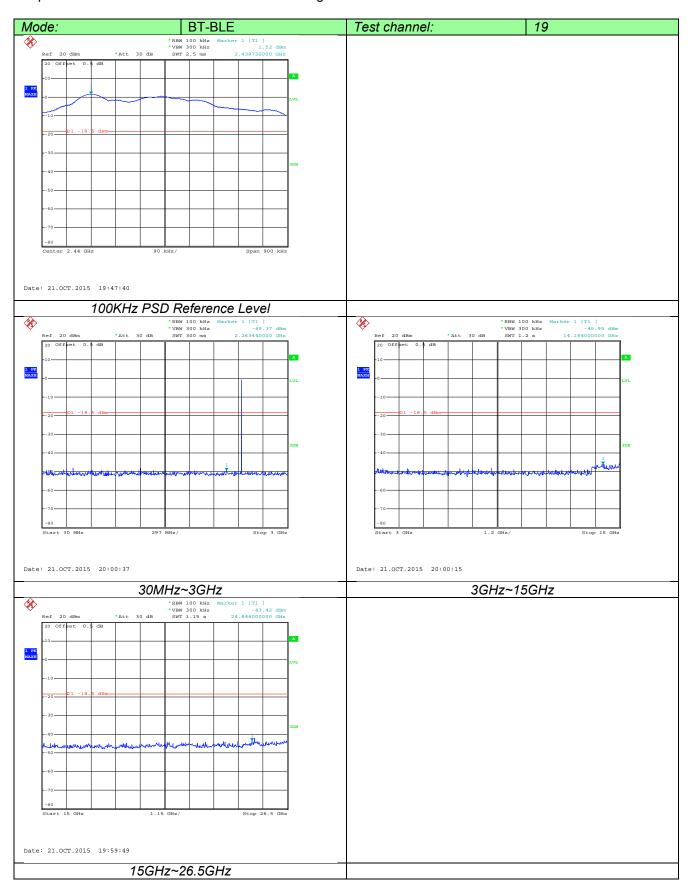

Report No: TRE1509010403 Page: 23 of 30 Issued: 2015-10-22

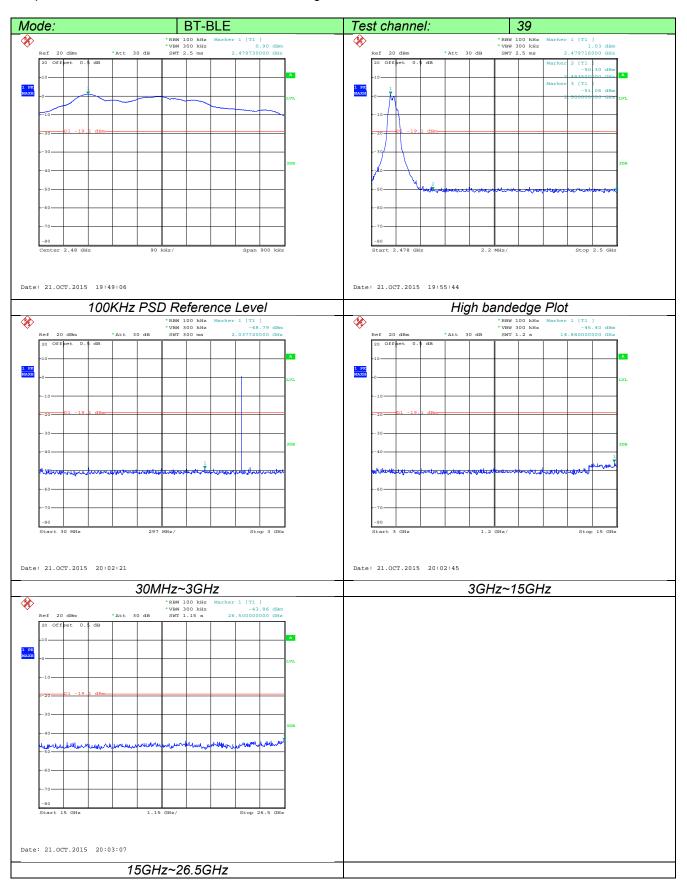

Report No: TRE1509010403 Page: 24 of 30 Issued: 2015-10-22

## 4.8. Spurious Emission (radiated)


## **LIMIT**

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
Above IGHZ	74.00	Peak

## TEST CONFIGURATION


#### ● 9KHz ~30MHz

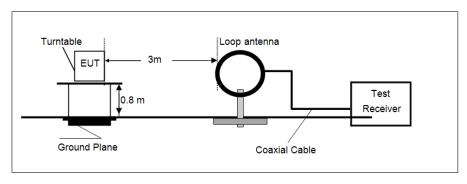

## ● 30MHz ~ 1GHz

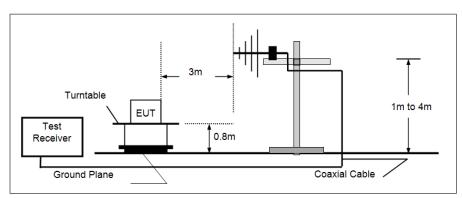

## Above 1GHz

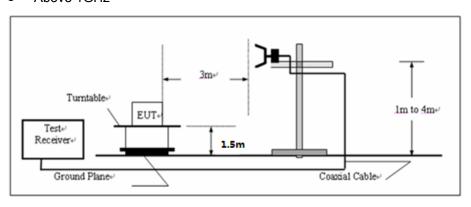

Report No: TRE1509010403 Page: 25 of 30 Issued: 2015-10-22

#### **TEST PROCEDURE**

- 1. The EUT tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2. The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated360 degrees to determine the position of the maximum emission level.
- 3. The EUT waspositioned such that the distance from antenna to the EUT was 3 meters.
- 4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. Thisis repeated for both horizontal and vertical polarization of the antenna, In order to find themaximum emission.
- 5. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured:
  - (2) Below 1GHz, RBW=120KHz, VBW=300KHz, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, theemission measurement will be repeated using the quasi-peak detector and reported.
  - (3) Above 1GHz, RBW=1MHz, VBW=3MHz for Peak value

RBW=1MHz, VBW=10Hz for Average value.

#### **TEST RESULTS**

#### Measurement data:

#### ■ 9kHz ~ 30MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

#### ■ 30MHz ~ 1GHz

120.210000

131.850000

134.760000

139.610000

146.400000

34.70

34.00

36.00

35.00

36.70

-15.9

-17.3

-17.7

-18.2

-18.0


43.5

43.5

43.5

43.5

43.5

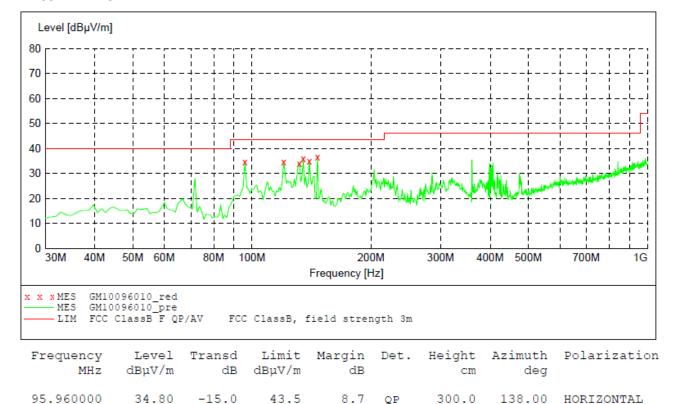

8.8

9.5

7.5

8.5

6.8

QP

OP

QP

QP

QP

300.0

100.0

300.0

300.0

300.0

153.00

134.00

187.00

172.00

172.00

HORIZONTAL


HORIZONTAL

HORIZONTAL

HORIZONTAL

HORIZONTAL

Report No: TRE1509010403 Page: 26 of 30 Issued: 2015-10-22

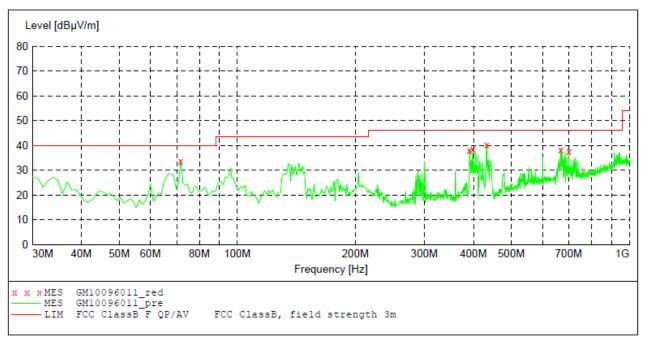

Frequency MHz	Level dBµV/m		Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
71.710000	33.70	-17.2	40.0	6.3	QP	100.0	290.00	VERTICAL
390.840000	38.10	-11.0	46.0	7.9	QP	100.0	173.00	VERTICAL
398.600000	38.40	-10.8	46.0	7.6	QP	100.0	193.00	VERTICAL
432.550000	40.10	-9.6	46.0	5.9	QP	100.0	255.00	VERTICAL
667.290000	38.30	-2.1	46.0	7.7	QP	100.0	355.00	VERTICAL
700.270000	37.70	-1.7	46.0	8.3	QP	100.0	75.00	VERTICAL

Report No: TRE1509010403 Page: 27 of 30 Issued: 2015-10-22

#### ■ Above 1GHz

	CH00 for BT-BLE											
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value			
4804	37.6	31.28	5.66	35.29	39.25	74	-34.75	Vertical				
7206	35.71	36.22	6.87	35.15	43.65	74	-30.35	Vertical				
9608	35.75	37.85	8.8	35.55	46.85	74	-27.15	Vertical				
12010	*							Vertical	Dook			
4804	38.6	31.28	5.66	35.29	40.25	74	-33.75	Horizontal	Peak			
7206	35.8	36.22	6.87	35.15	43.74	74	-30.26	Horizontal				
9608	36.75	37.85	8.8	35.55	47.85	74	-26.15	Horizontal				
12010	*							Horizontal				
4804	33.11	31.28	5.66	35.29	34.76	54	-19.24	Vertical				
7206	28.64	36.22	6.87	35.15	36.58	54	-17.42	Vertical				
9608	27.55	37.85	8.8	35.55	38.65	54	-15.35	Vertical				
12010	*							Vertical	Average			
4804	33.2	31.28	5.66	35.29	34.85	54	-19.15	Horizontal	Average			
7206	28.91	36.22	6.87	35.15	36.85	54	-17.15	Horizontal				
9608	27.64	37.85	8.8	35.55	38.74	54	-15.26	Horizontal				
12010	*							Horizontal				

CH19 for BT-BLE										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value	
4880	38.21	31.26	5.65	35.27	39.85	74	-34.15	Vertical	- Peak	
7320	35.32	36.2	6.86	35.13	43.25	74	-30.75	Vertical		
9760	36.77	37.83	8.79	35.53	47.86	74	-26.14	Vertical		
12205.6	*							Vertical		
4880	38.61	31.26	5.65	35.27	40.25	74	-33.75	Horizontal		
7320	35.54	36.2	6.86	35.13	43.47	74	-30.53	Horizontal		
9760	36.43	37.83	8.79	35.53	47.52	74	-26.48	Horizontal		
12205.6	*							Horizontal		
4880	32.74	31.26	5.65	35.27	34.38	54	-19.62	Vertical	- Average	
7320	28.31	36.2	6.86	35.13	36.24	54	-17.76	Vertical		
9760	27.43	37.83	8.79	35.53	38.52	54	-15.48	Vertical		
12205.6	*							Vertical		
4880	33.21	31.26	5.65	35.27	34.85	54	-19.15	Horizontal		
7320	28.85	36.2	6.86	35.13	36.78	54	-17.22	Horizontal		
9760	27.85	37.83	8.79	35.53	38.94	54	-15.06	Horizontal		
12205.6	*							Horizontal		

#### Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Report No: TRE1509010403 Page: 28 of 30 Issued: 2015-10-22

CH39 for BT-BLE										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value	
4960	37.9	31.44	5.87	35.46	39.75	74	-34.25	Vertical	Peak	
7440	35.51	36.38	7.08	35.32	43.65	74	-30.35	Vertical		
9920	36.18	38.01	9.01	35.72	47.48	74	-26.52	Vertical		
12400	*							Vertical		
4960	38.4	31.44	5.87	35.46	40.25	74	-33.75	Horizontal		
7440	35.72	36.38	7.08	35.32	43.86	74	-30.14	Horizontal		
9920	36.54	38.01	9.01	35.72	47.84	74	-26.16	Horizontal		
12400	*							Horizontal		
4960	32.85	31.42	5.87	35.46	34.68	54	-19.32	Vertical	Average	
7440	28.73	36.36	7.08	35.32	36.85	54	-17.15	Vertical		
9920	27.41	37.99	9.01	35.72	38.69	54	-15.31	Vertical		
12400	*							Vertical		
4960	33.05	31.42	5.87	35.46	34.88	54	-19.12	Horizontal		
7440	28.42	36.36	7.08	35.32	36.54	54	-17.46	Horizontal		
9920	27.5	37.99	9.01	35.72	38.78	54	-15.22	Horizontal		
12400	*							Horizontal		

#### Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Report No: TRE1509010403 Page: 29 of 30 Issued: 2015-10-22

# 5. Test Setup Photos of the EUT

Radiated Emission 30MHz-1GHz:



Above 1GHz:



Conducted Emission (AC Mains)



Report No: TRE1509010403 Page: 30 of 30 Issued: 2015-10-22

# 6. External and Internal Photos of the EUT

Reference to Test Report TRE1509010401.

.....End of Report.....