Notes:,

- 1) Material: Black Text on White Polyester or equivalent with permanent adhesive
- 2) All dimensions are in mm
- 3)The serial number will be of the Format


DDDY-MX1200-CC-####, where:

DDD = the Julian date of the day manufacture. Example January 1 is 001, Feb 1 is 032, December 31 = 365. Tolerance = +/- 3 days Y= the significant digit of the Year of manufacture. Example 2010 = 0, 2011=1, 2017=7.


MX1200-CC= the exact Model Number of the Product with 2-character CC country code (US=10, EU=70, UK=72)

= a sequential number from 0001 to 9999 that indicates the number of the unit produced of that type, on that day.

- 4) Printing and material must meet UL Rub Test requirements
- 5) All fonts, font sizes, styles, positions and character spacing are to be exactly as shown and as embedded in this document.
- 6) All barcodes are code 128, height should fit the space as shown
- 7) Label Size is 43 mm x 33 mm, three 1mm radiused corners and one wedge-cut corner as shown
- 8) IMPORTANT NOTE: "XXXX" text under the BV safety logo must be changed to the BV-issued 4-letter factory code prior to mass production!



PROPRIETARY AND CONFIDENTIAL			SPECIFIED:		NAME	DATE		oom Teler			
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Zoom Telephonics, Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Zoom Telephonics, Inc IS PROHIBITED.			DIMENSIONS ARE IN MM TOLERANCES:	DRAWN			99	99 High Street, Boston MA 02110 US/			
			FRACTIONAL +/-	CHECKED			TITLE:	TITLE:			
			ANGULAR: MACH +/- BEND +/- TWO PLACE DECIMAL	ENG APPR.			-	Label, MX1200 Compliance, Pre-			
			+/-	MFG APPR.							
			+/-	Q.A.			Production Version				
			INTERPRET GEOMETRIC TOLERANCING PER:	COMMENTS:	:		SIZE	DWG. NO.		REV	
			MATERIAL:			A	3641	7_1	PO		
	NEXT ASSY	USED ON	FINISH:					0011			
			DO NOT SCALE DRAWING				SCALE				
	APPLICATION						1:1	WEIGHT:	SH	EET 1 OF 1	

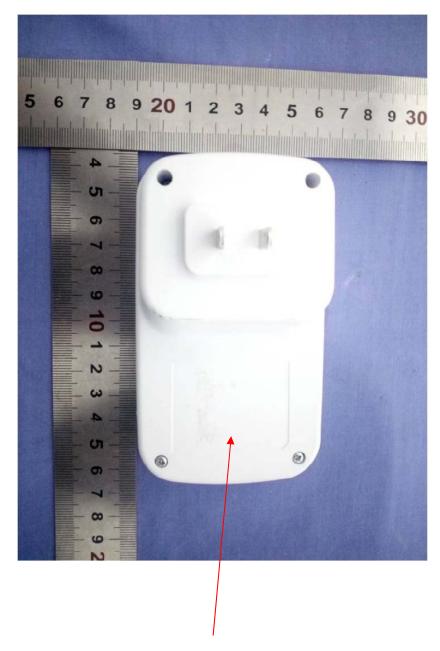

label location