

No. 1 Workshop, M-10, Middle section, Science & Technology Park,

Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM161100971901

Email: ee.shenzhen@sgs.com Page: 1 of 87

### **FCC REPORT**

Application No.: SZEM1611009719CR

Applicant:BRAGI GMBHManufacturer:BRAGI GMBH

**Factory:** VTech (Dongguan) Communications Ltd.

**Product Name:** The Headphone

Model No.(EUT): H1001-01
Trade Mark: Bragi

FCC ID: 2AF5TH1001R

Standards: 47 CFR Part 15, Subpart C (2015)

 Date of Receipt:
 2016-11-17

 Date of Test:
 2016-11-21

 Date of Issue:
 2016-12-08

Test Result: PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

#### Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/rems-and-Condi



Report No.: SZEM161100971901

Page: 2 of 87

### 2 Version

Revision Record						
Version Chapter Date Modifier Remark						
00		2016-12-08		Original		

Authorized for issue by:		
Tested By	Peter Gene	2016-11-21
	(Peter Geng) /Project Engineer	Date
Checked By	Eric Fu	2016-12-08
	(Eric Fu) /Reviewer	Date



Report No.: SZEM161100971901

Page: 3 of 87

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS



Report No.: SZEM161100971901

Page: 4 of 87

#### 4 Contents

			Page
1	CC	OVER PAGE	1
2	VE	ERSION	2
3	TE	EST SUMMARY	3
4		ONTENTS	
		ENERAL INFORMATION	
5	GE		
	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8 5.9	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.10	EQUIPMENT LIST	
6		EST RESULTS AND MEASUREMENT DATA	
	6.1	Antenna Requirement	
	6.2	CONDUCTED EMISSIONS	
	6.3	CONDUCTED PEAK OUTPUT POWER	
	6.4	20DB OCCUPY BANDWIDTH.	
	6.5	Carrier Frequencies Separation	
	6.6	HOPPING CHANNEL NUMBER	
	6.7	DWELL TIME	
	6.8	BAND-EDGE FOR RF CONDUCTED EMISSIONS	47
	6.9	Spurious RF Conducted Emissions	
	6.10	OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM	
	6.11	RADIATED SPURIOUS EMISSION	
		11.1 Radiated Emission below 1GHz	
		11.2 Transmitter Emission above 1GHz	
	6.12	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
7	PH	HOTOGRAPHS - EUT TEST SETUP	86
	7.1	CONDUCTED EMISSION	86
	7.2	RADIATED EMISSION	86
	7.3	RADIATED SPURIOUS EMISSION	87
8	PH	HOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	87



Report No.: SZEM161100971901

Page: 5 of 87

#### 5 General Information

### **5.1** Client Information

Applicant:	BRAGI GMBH				
Address of Applicant:	Sendlinger Strasse 7 / Angerblock 2. OG, 80331 München, Germany				
Manufacturer:	BRAGI GMBH				
Address of Manufacturer:	Sendlinger Strasse 7 / Angerblock 2. OG, 80331 München, Germany				
Factory:	VTech (Dongguan) Communications Ltd.				
Address of Factory:	Xia Ling Bei Management Zone, Liaobu Town, Dongguan City, Guangdong Province, China				

#### 5.2 General Description of EUT

Product Name:	The Headphone	
Model No.:	H1001-01	
Trade Mark:	Bragi	
Operation Frequency:	2402MHz~2480MHz	
Bluetooth Version:	Bluetooth 4.0 dual, this report is for Bluetooth classic	
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)	
Modulation Type:	GFSK, π/4DQPSK, 8DPSK	
Number of Channel:	79	
Hopping Channel Type:	Adaptive Frequency Hopping systems	
Antenna Type:	LDS Antenna	
Antenna Gain:	-6dBi	
Power Supply	Left headphone: DC 3.7V, 50mAh rechargeable battery;	
	Right headphone: DC 3.7V, 100mAh rechargeable battery	
	Which both charged by the docking(Charged from Adapter via USB cable)	
Product details:	H1001-01 consists of a left earplug, a right earplug, a USB charging line and a charging case.	



Report No.: SZEM161100971901

Page: 6 of 87

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency		
The Lowest channel	2402MHz		
The Middle channel	2441MHz		
The Highest channel	2480MHz		



Report No.: SZEM161100971901

Page: 7 of 87

#### 5.3 Test Environment

Operating Environment:				
Temperature:	25.0 °C			
Humidity:	55 % RH			
Atmospheric Pressure:	1010 mbar			

### 5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	
Adapter	Apple	A1357 W010A051	

#### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM161100971901

Page: 8 of 87

#### 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

#### • FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

#### 5.7 Deviation from Standards

None.

#### 5.8 Abnormalities from Standard Conditions

None.

#### 5.9 Other Information Requested by the Customer

None.



Report No.: SZEM161100971901

Page: 9 of 87

### 5.10 Equipment List

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2016-05-13	2017-05-13	
2	LISN	Rohde & Schwarz	ENV216	SEM007-01	2016-10-09	2017-10-09	
3	LISN	ETS-LINDGREN	3816/2	SEM007-02	2016-04-25	2017-04-25	
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8- 02	EMC0120	2016-09-28	2017-09-28	
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4- 02	EMC0121	2016-09-28	2017-09-28	
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2- 02	EMC0122	2016-09-28	2017-09-28	
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2016-04-25	2017-04-25	
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2016-10-09	2017-10-09	

	RF connected test					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
2	Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
3	Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25
4	Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2016-05-13	2017-05-13
2	EMI Test Receiver (9k-7GHz)	Rohde & Schwarz	ESR	SEM004-03	2016-04-25	2017-04-25
3	Trilog-Broadband Antenna(30M-1GHz)	Schwarzbeck	VULB9168	SEM003-18	2016-06-29	2019-06-29
4	Pre-amplifier	Sonoma Instrument Co	310N	SEM005-03	2016-07-06	2017-07-06
5	Loop Antenna	ETS-Lindgren	6502	SEM003-08	2015-08-14	2018-08-14



Report No.: SZEM161100971901

Page: 10 of 87

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13
2	EXA Spectrum Analyzer	Agilent Technologies Inc	N9010A	SEM004-09	2016-07-19	2017-07-19
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2016-10-09	2017-10-09
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
6	Horn Antenna (18-26GHz)	ETS-Lindgren	3160	SEM003-12	2014-11-24	2017-11-24
7	Horn Antenna(26GHz- 40GHz)	A.H.Systems, inc.	SAS-573	SEM003-13	2015-02-12	2018-02-12
8	Low Noise Amplifier	Black Diamond Series	BDLNA-0118- 352810	SEM005-05	2016-10-09	2017-10-09
9	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A



Report No.: SZEM161100971901

Page: 11 of 87

#### 6 Test results and Measurement Data

#### 6.1 Antenna Requirement

**Standard requirement:** 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

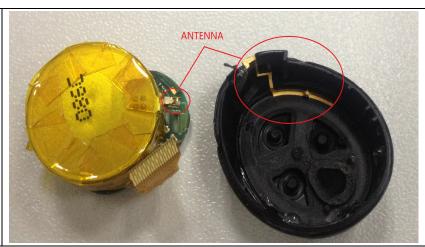

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -6dBi.



Report No.: SZEM161100971901

Page: 12 of 87


#### 6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.2	207			
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	150kHz to 30MHz				
Limit:	Limit (dBuV)				
	Frequency range (MHz)	Quasi-peak	Average		
	0.15-0.5	66 to 56*	56 to 46*		
	0.5-5	56	46		
	5-30	60	50		
	* Decreases with the logarithm	n of the frequency.			
Test Procedure:	The mains terminal disturble room.	oance voltage test was	s conducted in a shie	elded	
	<ul> <li>room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to</li> </ul>				



Report No.: SZEM161100971901

Page: 13 of 87

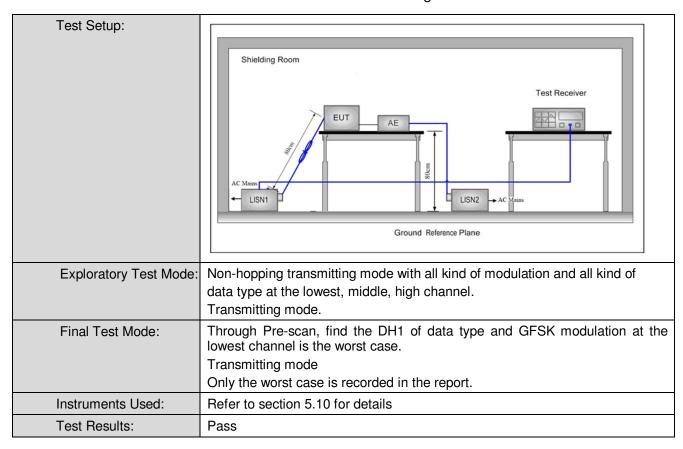



Report No.: SZEM161100971901


Page: 14 of 87

#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

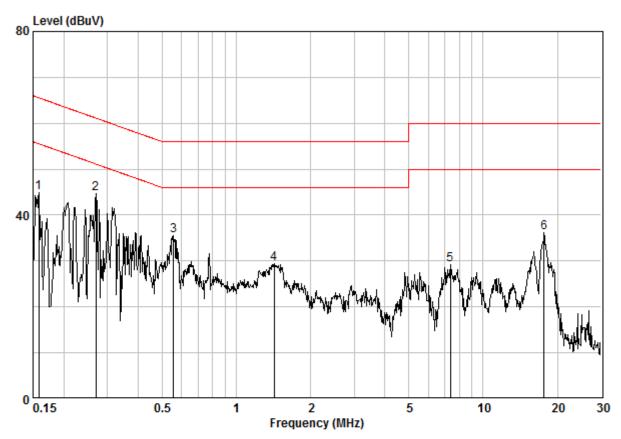

Site : Shielding Room Condition : CE LINE Job No. : 9719CR Mode : TX(BT)


	Freq		LISN Factor					Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15816	0.02	9.59	35.19	44.80	55.56	-10.76	Peak
2 @	0.27009	0.02	9.60	34.97	44.59	51.12	-6.53	Peak
3	0.55520	0.02	9.60	25.94	35.57	46.00	-10.43	Peak
4	1.426	0.03	9.59	19.79	29.41	46.00	-16.59	Peak
5	7.368	0.09	9.68	19.35	29.12	50.00	-20.88	Peak
6	17.661	0.16	9.77	26.34	36.27	50.00	-13.73	Peak



Report No.: SZEM161100971901

Page: 15 of 87

#### Neutral line:

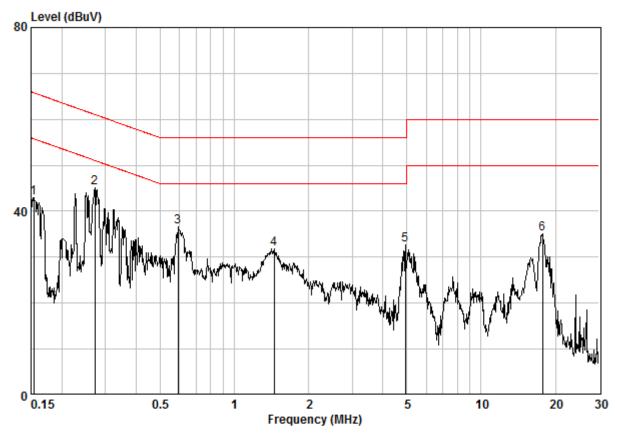

Site : Shielding Room Condition : CE NEUTRAL Job No. : 9719CR Mode : TX(BT)

			LISN					D
	rreq	ross	Factor	revel	revel	Line	Limit	Kemark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15403	0.02	9.62	33.37	43.00	55.78	-12.78	Peak
2 @	0.27152	0.02	9.61	35.46	45.09	51.07	-5.98	Peak
3	0.59164	0.02	9.63	27.05	36.70	46.00	-9.30	Peak
4	1.449	0.03	9.64	22.21	31.88	46.00	-14.12	Peak
5	4.926	0.02	9.72	23.00	32.74	46.00	-13.26	Peak
6	17.755	0.16	9.95	25.07	35.19	50.00	-14.81	Peak

#### Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM161100971901

Page: 16 of 87

#### 6.3 Conducted Peak Output Power

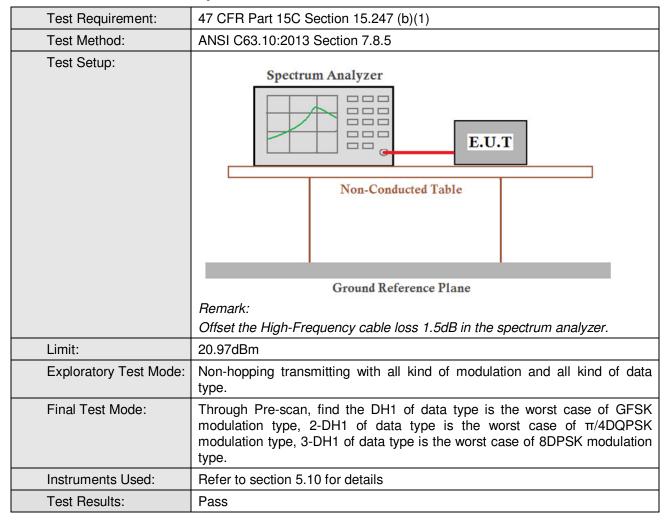



Report No.: SZEM161100971901

Page: 17 of 87

#### **Measurement Data**

Measurement Data					
GFSK mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	3.57	20.97	Pass		
Middle	3.78	20.97	Pass		
Highest	3.57	20.97	Pass		
	π/4DQPSK mo	ode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	2.54	20.97	Pass		
Middle	2.93	20.97	Pass		
Highest	2.85	20.97	Pass		
	8DPSK mod	le			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	2.94	20.97	Pass		
Middle	3.36	20.97	Pass		
Highest	3.27	20.97	Pass		




Report No.: SZEM161100971901


Page: 18 of 87

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

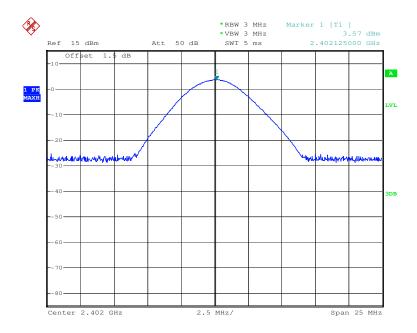

Test mode: GFSK Test channel: Middle

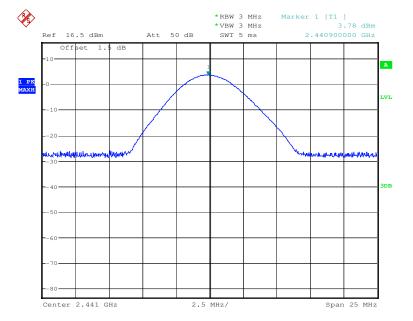





Report No.: SZEM161100971901

Page: 19 of 87

Test mode: GFSK Test channel: Highest

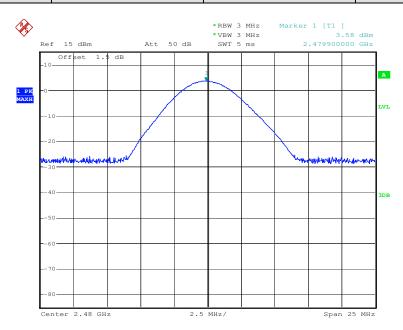



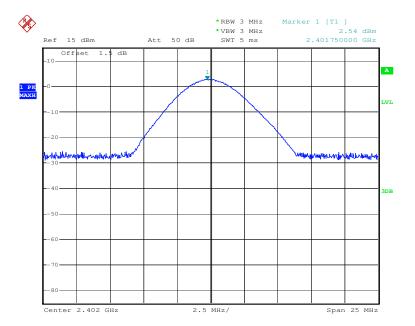





Report No.: SZEM161100971901

Page: 20 of 87

Test mode:  $\pi/4DQPSK$  Test channel: Middle

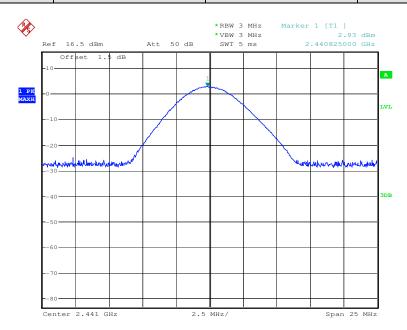

Test mode: π/4DQPSK Test channel: Highest

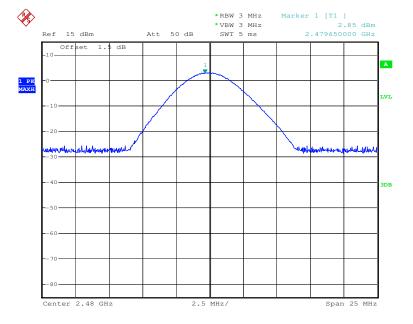





Report No.: SZEM161100971901

Page: 21 of 87

Test mode: 8DPSK Test channel: Lowest

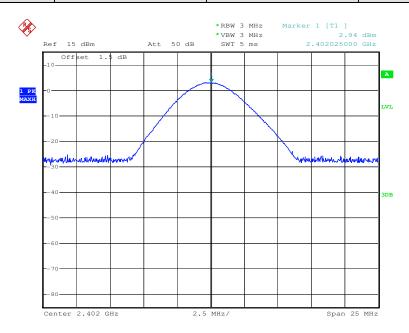



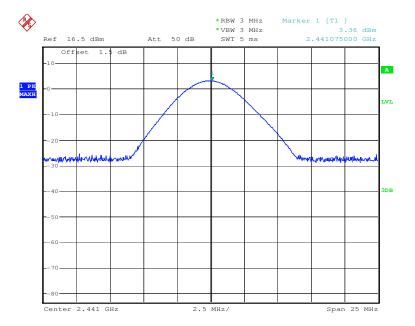




Report No.: SZEM161100971901

Page: 22 of 87

Test mode: 8DPSK Test channel: Highest

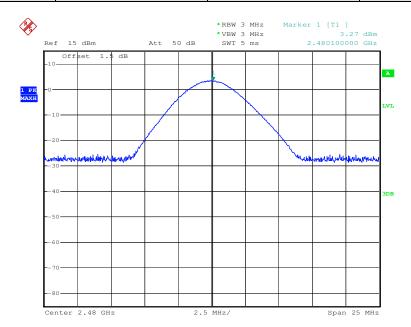




Report No.: SZEM161100971901

Page: 23 of 87

#### 6.4 20dB Occupy Bandwidth

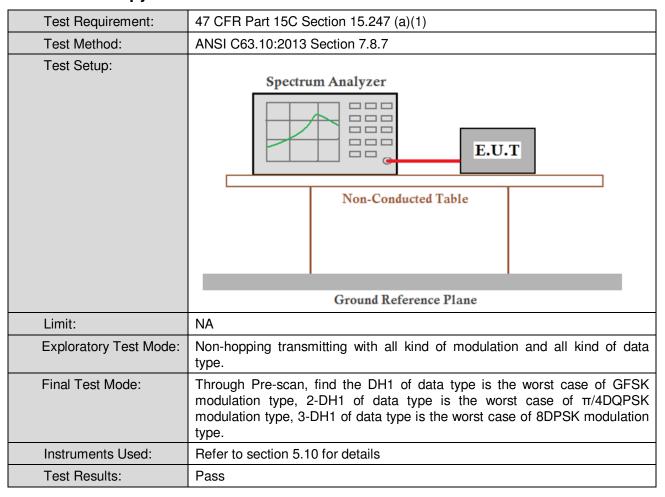

#### **Measurement Data**

	20dB Occupy Bandwidth (kHz)			
Test channel	GFSK	π/4DQPSK	8DPSK	
Lowest	948	1239	1269	
Middle	948	1242	1269	
Highest	879	1245	1272	




Report No.: SZEM161100971901


Page: 24 of 87

Test plot as follows:

Test mode: GFSK Test channel: Lowest

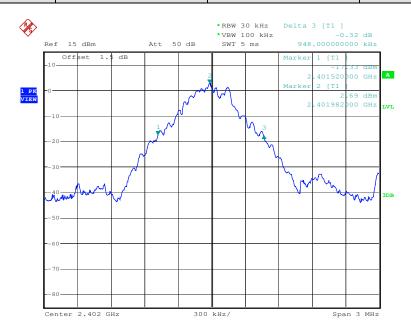



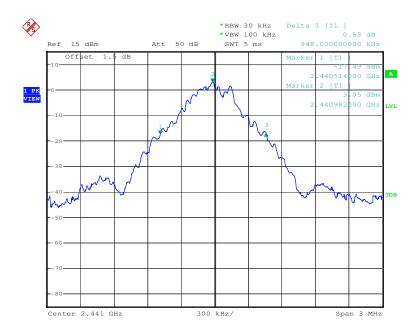





Report No.: SZEM161100971901

Page: 25 of 87

Test mode: GFSK Test channel: Highest

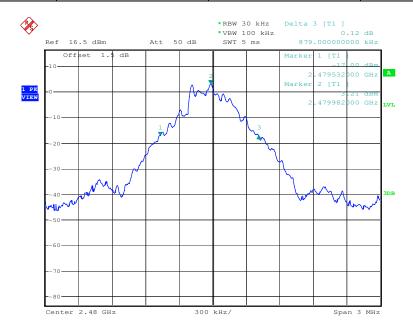

Test mode: π/4DQPSK Test channel: Lowest

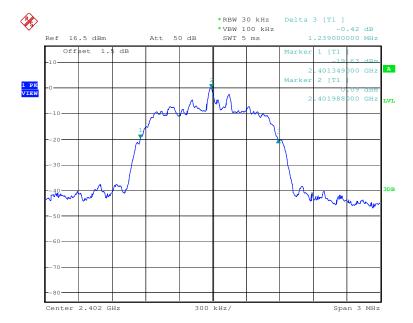





Report No.: SZEM161100971901

Page: 26 of 87

Test mode: π/4DQPSK Test channel: Middle

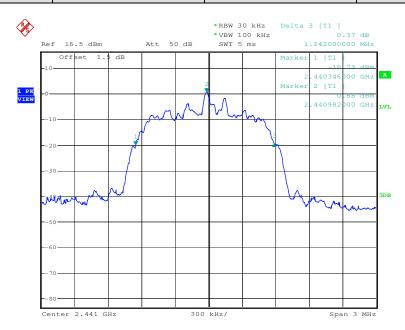

Test mode: π/4DQPSK Test channel: Highest

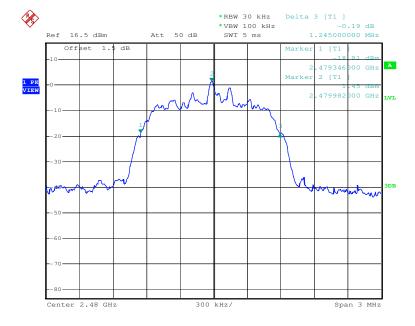





Report No.: SZEM161100971901

Page: 27 of 87

Test mode: 8DPSK Test channel: Lowest

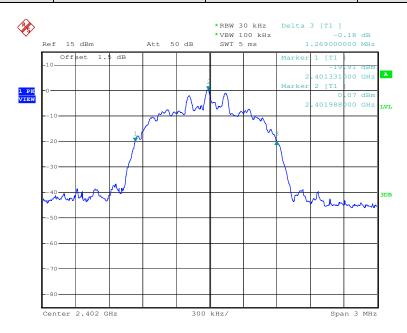

Test mode: 8DPSK Test channel: Middle

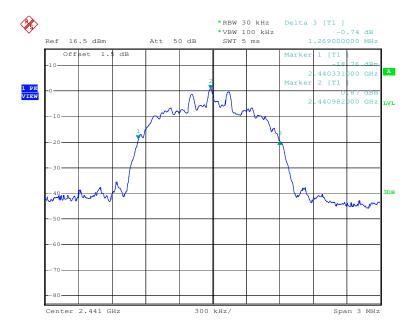




Report No.: SZEM161100971901

Page: 28 of 87

Test mode: 8DPSK Test channel: Highest

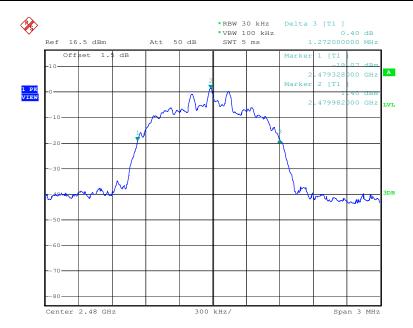




Report No.: SZEM161100971901

Page: 29 of 87

#### 6.5 Carrier Frequencies Separation

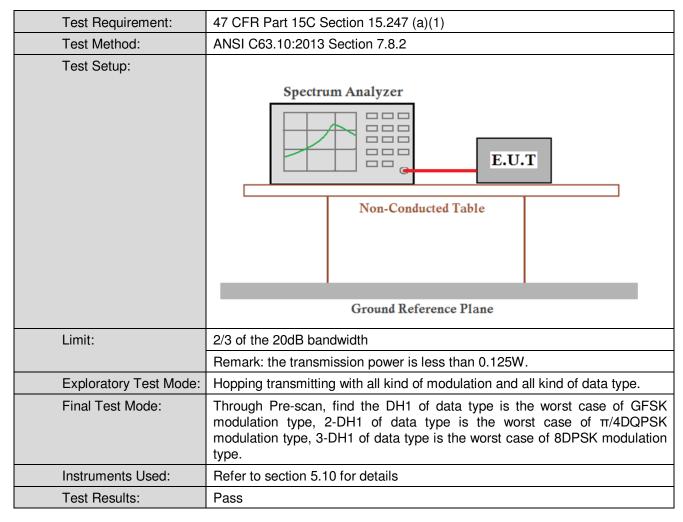



Report No.: SZEM161100971901

Page: 30 of 87

	GFSK mode					
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result			
Middle	993	632	Pass			
	π/4DQPSK mode					
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result			
Middle	996	830	Pass			
	8DPSK mode					
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result			
Middle	1020	848	Pass			

Note: According to section 6.4,

Mode	20dB bandwidth (kHz)	Limit (kHz)
	(worse case)	(Carrier Frequencies Separation)
GFSK	948	632
π/4DQPSK	1245	830
8DPSK	1272	848




Report No.: SZEM161100971901


Page: 31 of 87

#### Test plot as follows:

Test mode: GFSK Test channel: Middle

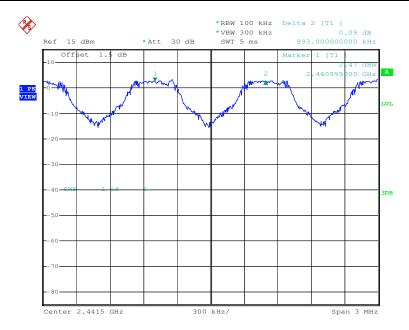

Test mode: π/4DQPSK Test channel: Middle

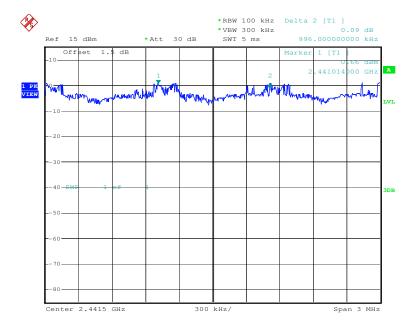




Report No.: SZEM161100971901

Page: 32 of 87

Test mode: 8DPSK Test channel: Middle

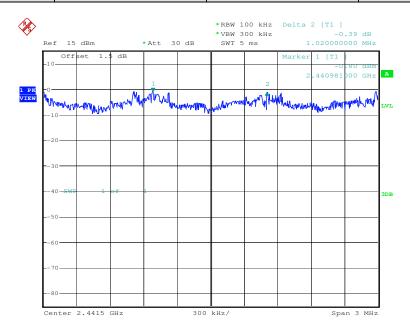




Report No.: SZEM161100971901

Page: 33 of 87

### 6.6 Hopping Channel Number

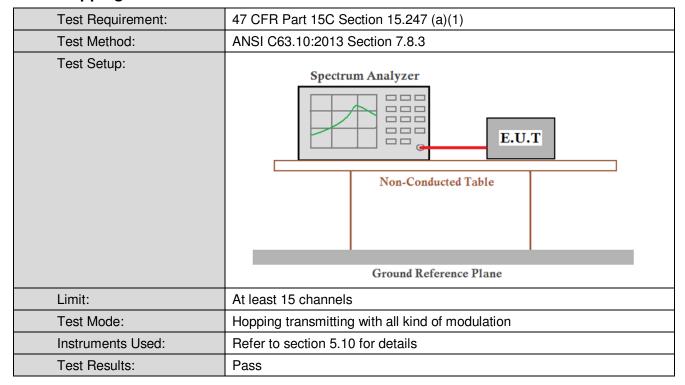

#### **Measurement Data**


Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15





Report No.: SZEM161100971901


Page: 34 of 87

Test plot as follows



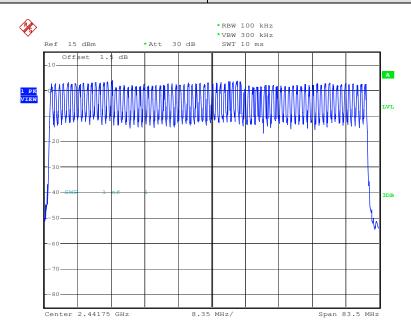




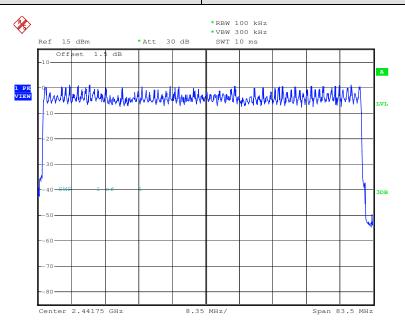



Report No.: SZEM161100971901

Page: 35 of 87

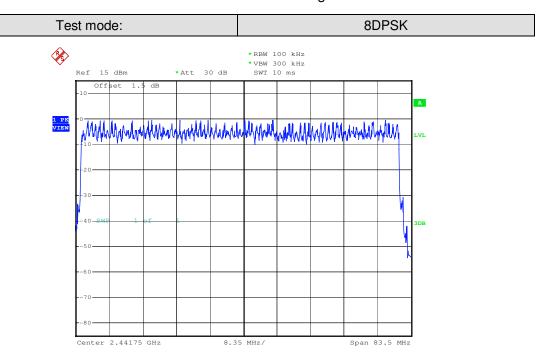




Report No.: SZEM161100971901

Page: 36 of 87

#### 6.7 Dwell Time

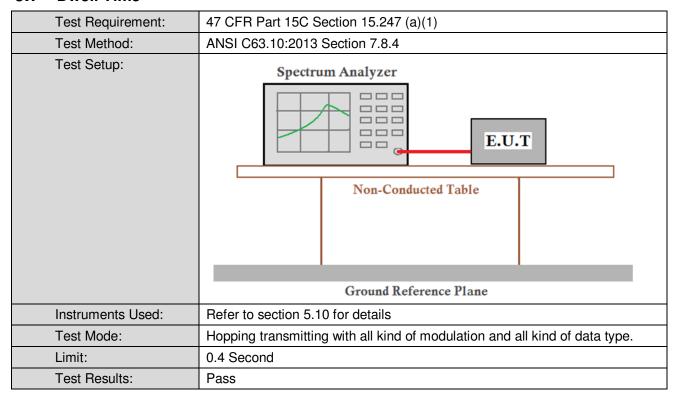

#### **Measurement Data**

Mode	Packet	Dwell time (second)	Limit (second)
	DH1	0.13	≤0.4
GFSK	DH3	0.25	≤0.4
	DH5	0.32	≤0.4
	2-DH1	0.13	≤0.4
π/4DQPSK	2-DH3	0.25	≤0.4
	2-DH5	0.29	≤0.4
	3-DH1	0.13	≤0.4
8DPSK	3-DH3	0.25	≤0.4
	3-DH5	0.29	≤0.4



Report No.: SZEM161100971901

Page: 37 of 87

#### Remark:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

On (ms)\*total number=dwell time (ms)

The Middle channel (2441MHz), as below:

DH1 time slot=0.404 (ms)\*total number=129.28 (ms)

DH3 time slot=1.662 (ms)\* total number = 249.30 (ms)

DH5 time slot= $2.916 \text{ (ms)}^*$  total number = 320.76 (ms)

2-DH1 time slot=0.415 (ms)\*total number=132.80 (ms)

2-DH3 time slot=1.668 (ms)\* total number = 250.20 (ms)

2-DH5 time slot=2.924 (ms)\* total number = 292.40 (ms)

3-DH1 time slot=0.415 (ms)\*total number=132.80 (ms)

3-DH3 time slot=1.668 (ms)\* total number = 250.20 (ms)

3-DH5 time slot=2.924 (ms)\* total number = 292.40 (ms)





Report No.: SZEM161100971901

Page: 38 of 87

#### Test plot as follows:

Test Packet: DH1

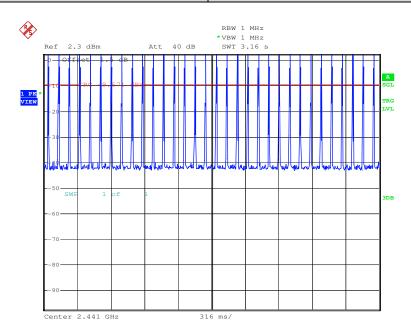

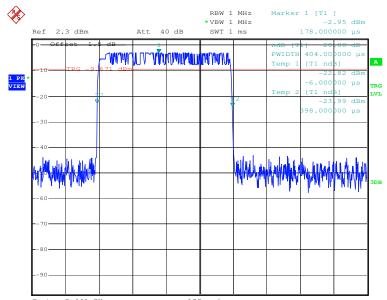





Report No.: SZEM161100971901

Page: 39 of 87



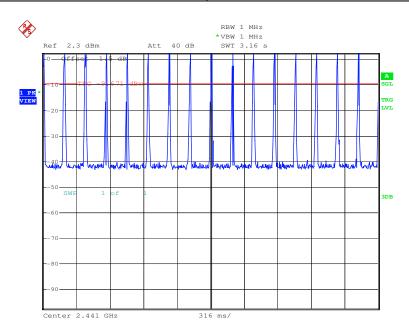

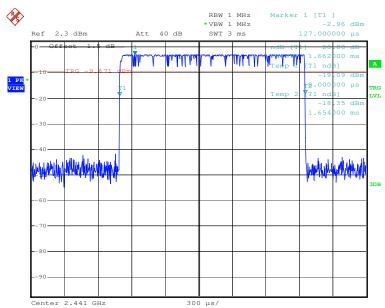





Report No.: SZEM161100971901

Page: 40 of 87



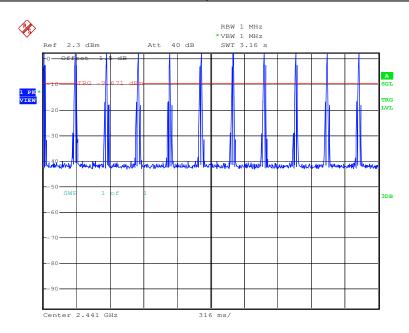

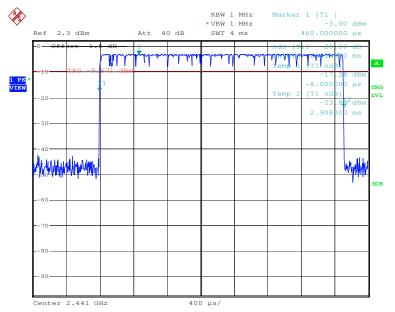





Report No.: SZEM161100971901

Page: 41 of 87



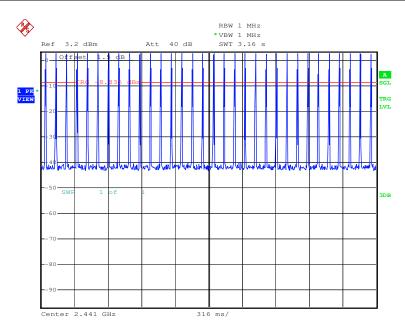


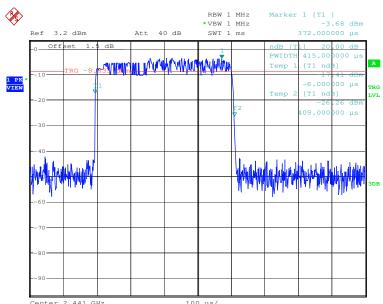





Report No.: SZEM161100971901

Page: 42 of 87



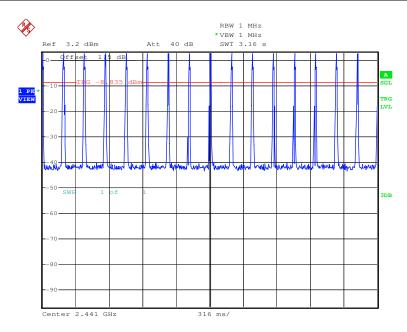

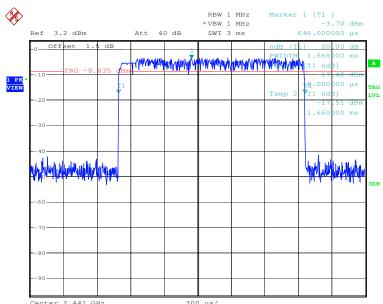





Report No.: SZEM161100971901

Page: 43 of 87

Test Packet: 2-DH5

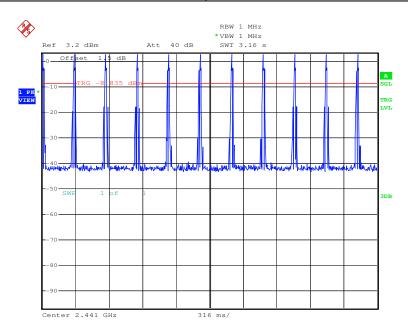

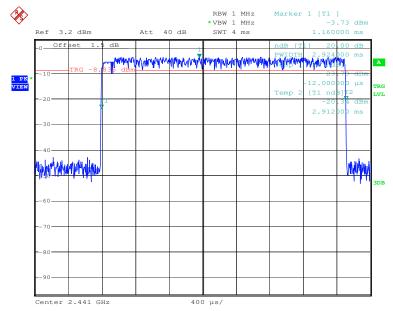





Report No.: SZEM161100971901

Page: 44 of 87



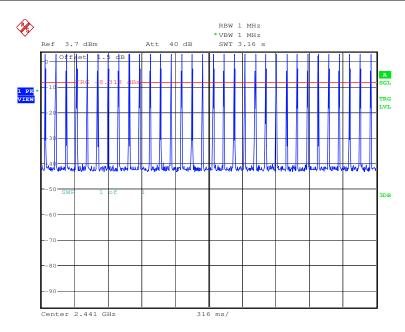

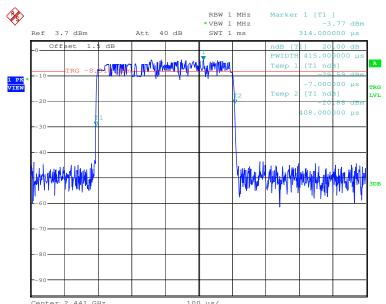





Report No.: SZEM161100971901

Page: 45 of 87



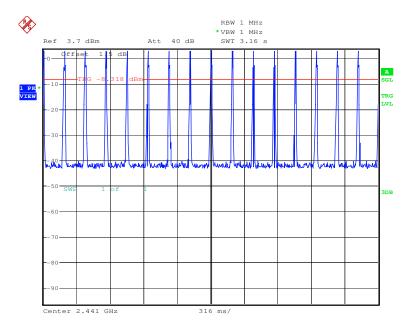


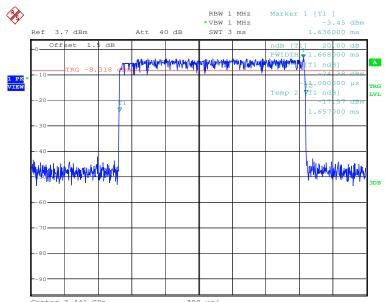





Report No.: SZEM161100971901

Page: 46 of 87



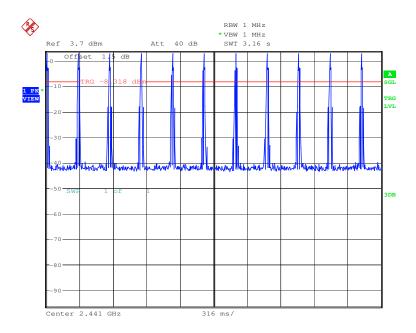

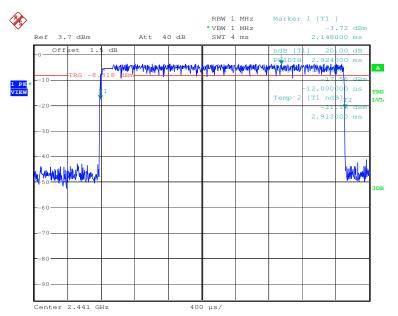




Report No.: SZEM161100971901

Page: 47 of 87

#### 6.8 Band-edge for RF Conducted Emissions

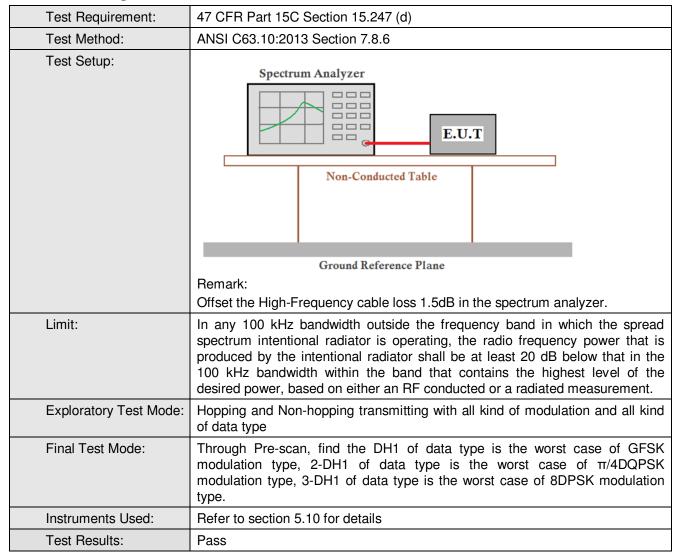





Report No.: SZEM161100971901

Page: 48 of 87

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

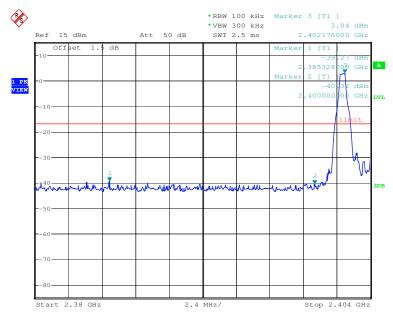

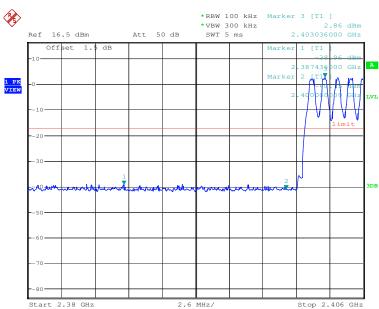





Report No.: SZEM161100971901

Page: 49 of 87

Test mode: GFSK Test channel: Highest

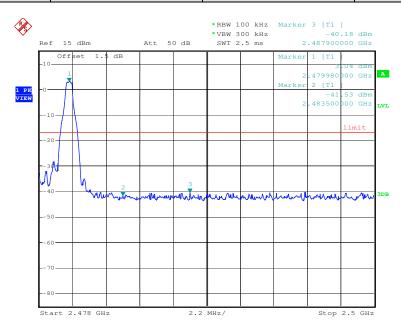

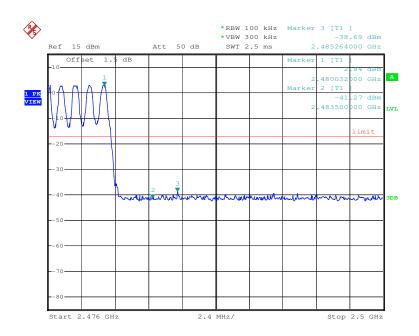





Report No.: SZEM161100971901

Page: 50 of 87

Test mode:  $\pi/4DQPSK$  Test channel: Lowest

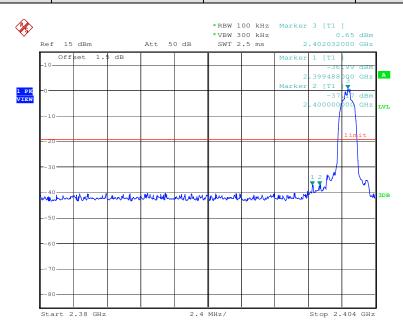

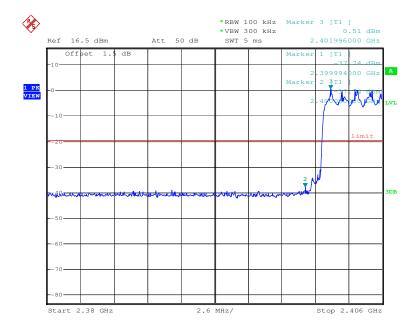





Report No.: SZEM161100971901

Page: 51 of 87

Test mode:  $\pi/4DQPSK$  Test channel: Highest

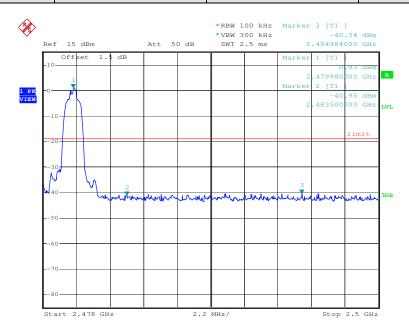

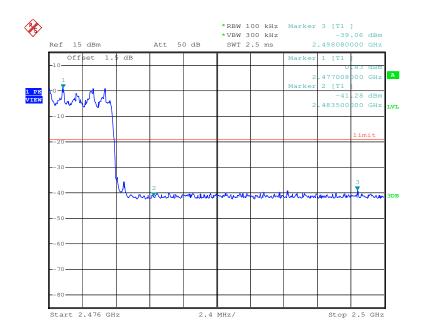





Report No.: SZEM161100971901

Page: 52 of 87

Test mode: 8DPSK Test channel: Lowest

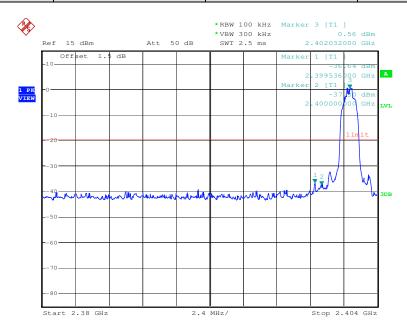

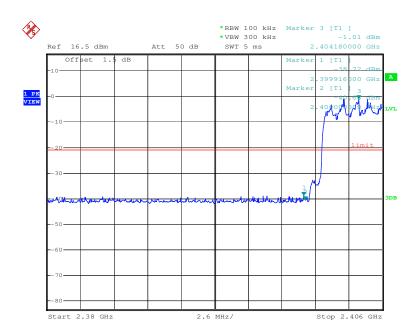





Report No.: SZEM161100971901

Page: 53 of 87

Test mode: 8DPSK Test channel: Highest

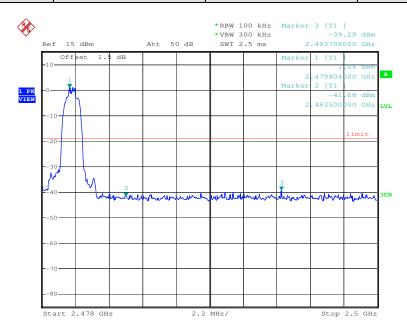

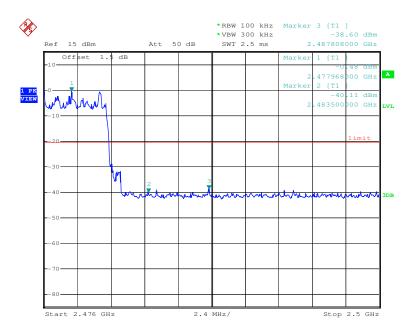



Report No.: SZEM161100971901

Page: 54 of 87

#### 6.9 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)			
Test Method:	ANSI C63.10:2013 Section 7.8.8			
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane			
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type			
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.			
Instruments Used:	Refer to section 5.10 for details			
Test Results:	Pass			





Report No.: SZEM161100971901

Page: 55 of 87

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

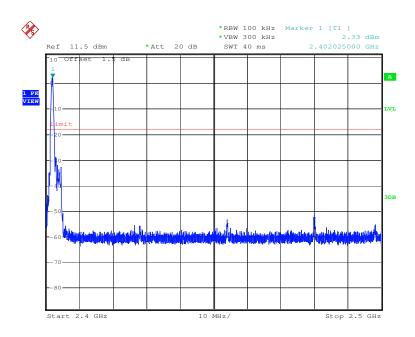


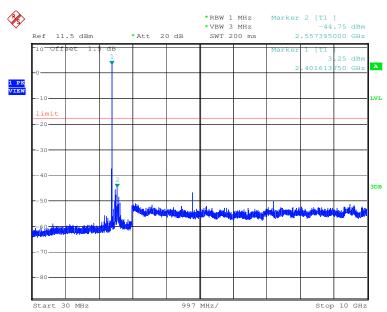





Report No.: SZEM161100971901

Page: 56 of 87

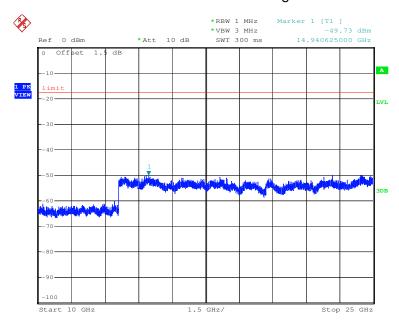




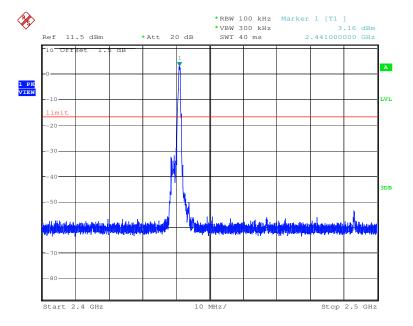




Report No.: SZEM161100971901

Page: 57 of 87

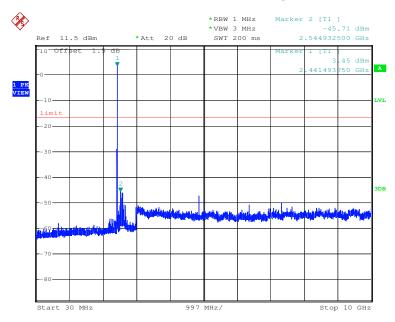

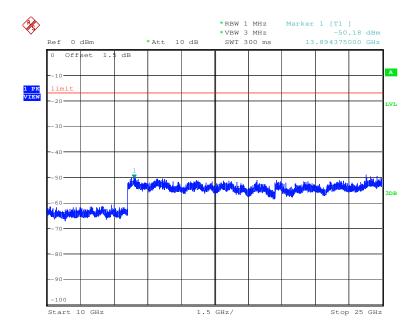




Report No.: SZEM161100971901

Page: 58 of 87

Test mode: GFSK Test channel: Highest

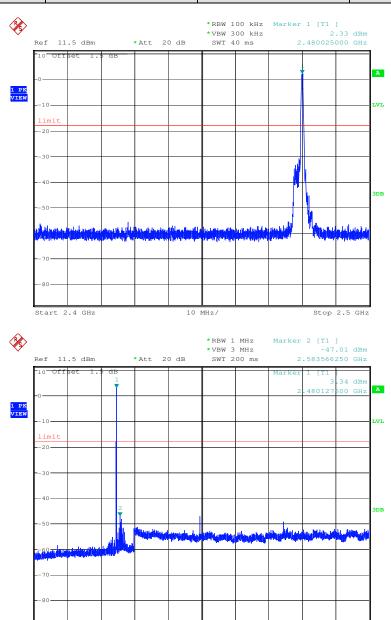

997 MHz/


Stop 10 GHz

Start 30 MHz




Report No.: SZEM161100971901

Page: 59 of 87

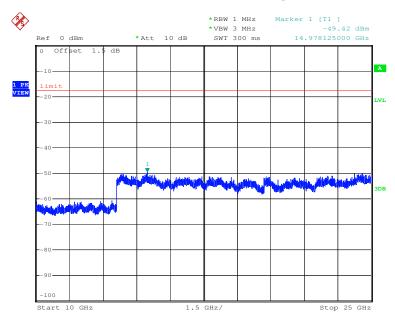


Test mode:	π/4DQPSK	Test channel:	Lowest
------------	----------	---------------	--------

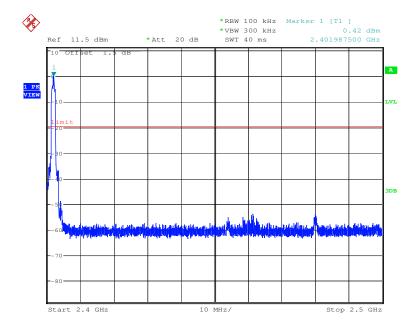




Report No.: SZEM161100971901

Page: 60 of 87

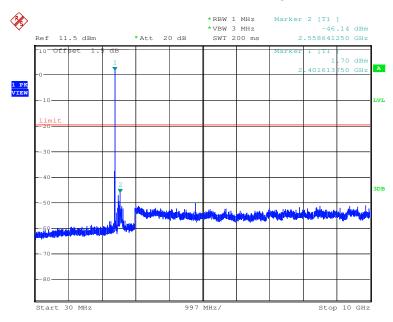

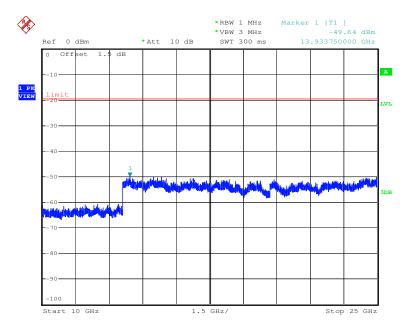





Report No.: SZEM161100971901

Page: 61 of 87

Test mode:  $\pi/4DQPSK$  Test channel: Middle

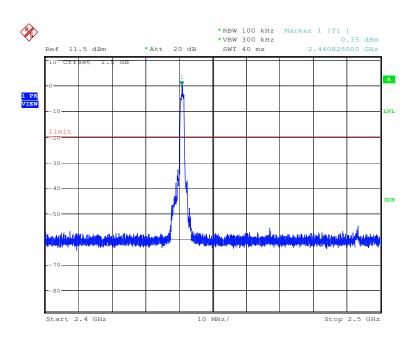


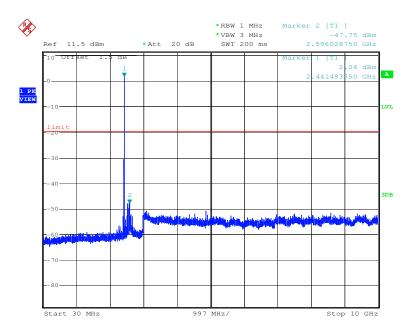




Report No.: SZEM161100971901

Page: 62 of 87

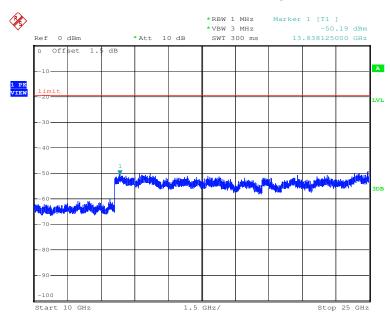


Test mode:	π/4DQPSK	Test channel:	Highest
i est illoue.	וו/דטעו טוג	i est chamile.	riignest

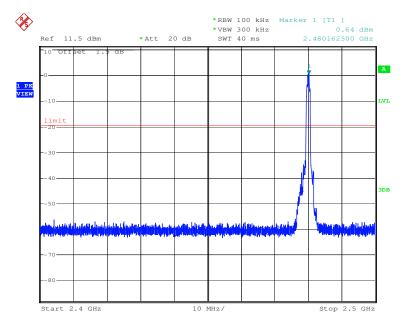




Report No.: SZEM161100971901

Page: 63 of 87

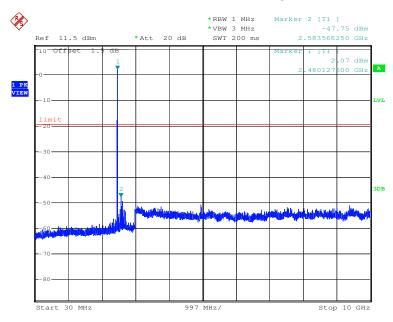

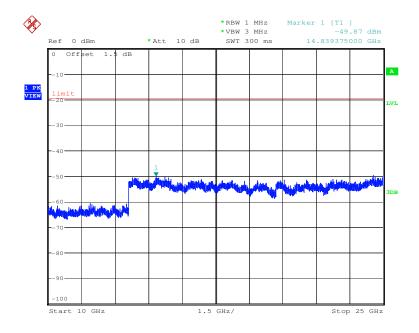





Report No.: SZEM161100971901

Page: 64 of 87

Test mode: 8DPSK Test channel: Lowest

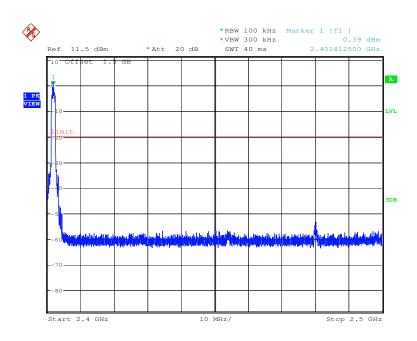


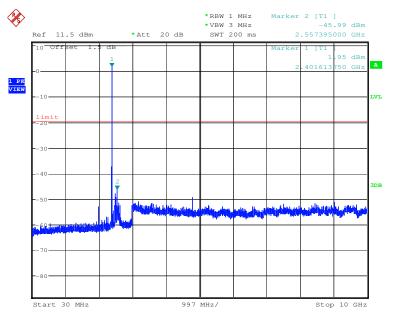




Report No.: SZEM161100971901

Page: 65 of 87

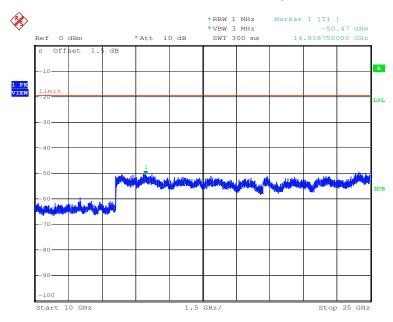


Test mode: 8DPSK Test channel: Middle

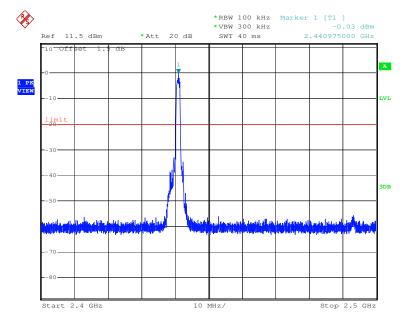




Report No.: SZEM161100971901

Page: 66 of 87

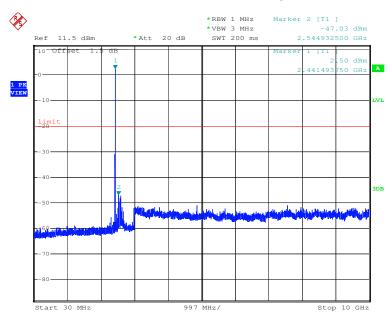

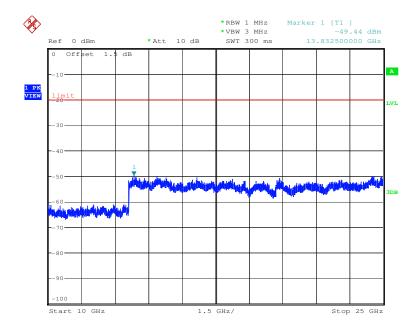





Report No.: SZEM161100971901

Page: 67 of 87

Test mode: 8DPSK Test channel: Highest

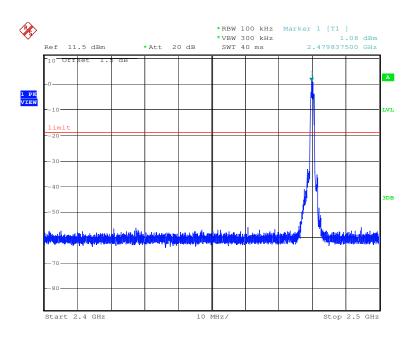


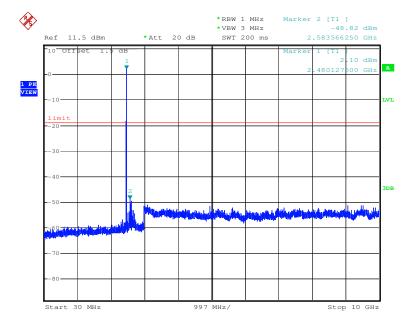



Report No.: SZEM161100971901

Page: 68 of 87

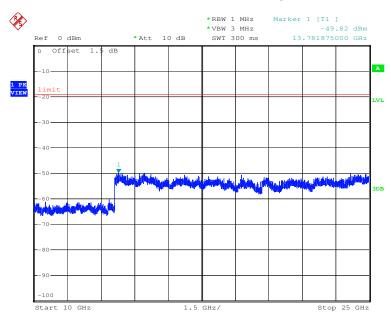

#### Remark:

Use 100kHz RBW to determine the relative limit in the band 2.4GHz to 2.5GHz, and Use 1MHz RBW to measure spurious emissions in the band 30MHz to 10GHz and 10GHz to 25GHz. The sweep points set to 30001.



Report No.: SZEM161100971901

Page: 69 of 87

#### 6.10 Other requirements Frequency Hopping Spread Spectrum System

#### Test Requirement: 47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

#### Compliance for section 15.247(a)(1)

According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage

outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

20 62 46 77 7 64 8 73 16 75 1

Each frequency used equally on the average by each transmitter.

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.

#### Compliance for section 15.247(g)



Report No.: SZEM161100971901

Page: 70 of 87

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

#### Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.



Report No.: SZEM161100971901

Page: 71 of 87

#### **6.11 Radiated Spurious Emission**


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205						
Test Method:	ANSI C63.10: 2013						
Test Site:	Below 1GHz: Measurement Distance: 10m (Semi-Anechoic Chamber) Above 1GHz: Measurement Distance: 3m (Full-Anechoic Chamber)						
Receiver Setup:	Frequency Detector RBW VBW Remark						
	0.009MHz-0.090MHz		Peak	10kHz	30kHz	Peak	
	0.009MHz-0.090MHz		Average	10kHz	30kHz	Average	
	0.090MHz-0.110MHz		Quasi-peak	10kHz	30kHz	Quasi-peak	
	0.110MHz-0.490MHz		Peak	10kHz	30kHz	Peak	
	0.110MHz-0.490MHz		Average	10kHz	30kHz	Average	
	0.490MHz -30MHz		Quasi-peak	10kHz	30kHz	Quasi-peak	
	30MHz-1GHz		Quasi-peak	100 kHz	300kHz	Quasi-peak	
	Above 1GHz		Peak	1MHz	3MHz	Peak	
	Above Idiiz		Peak	1MHz	10Hz	Average	
Limit:	Frequency Field strength (microvolt/meter)  0.009MHz-0.490MHz 2400/F(kHz)  0.490MHz-1.705MHz 24000/F(kHz)  1.705MHz-30MHz 30  30MHz-88MHz 100  88MHz-216MHz 150		-	Limit (dBuV/m)	Remark	Measurement distance (m)	
			-	-	300		
			-	-	30		
			-	-	30		
			40.0	Quasi-peak	3		
			150	43.5	Quasi-peak	3	
	216MHz-960MHz		200	46.0	Quasi-peak	3	
	960MHz-1GHz	500		54.0	Quasi-peak	3	
	Above 1GHz		500	54.0	Average	3	
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.						



Report No.: SZEM161100971901

Page: 72 of 87

#### Test Setup:






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

#### Test Procedure:

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 and 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Report No.: SZEM161100971901

Page: 73 of 87

Exploratory Test Mode:	EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.  h. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)  i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.  j. Repeat above procedures until all frequencies measured was complete.  Non-hopping transmitting mode with all kind of modulation and all kind of data type
	Transmitting mode
Final Test Mode:	Through Pre-scan, find the DH1 of data type and GFSK modulation is the worst case.  Pretest the EUT at Transmitting mode and found it is worse case  For below 1GHz part, through pre-scan, the worst case is the lowest channel.  Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Report No.: SZEM161100971901

Page: 74 of 87

### 6.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

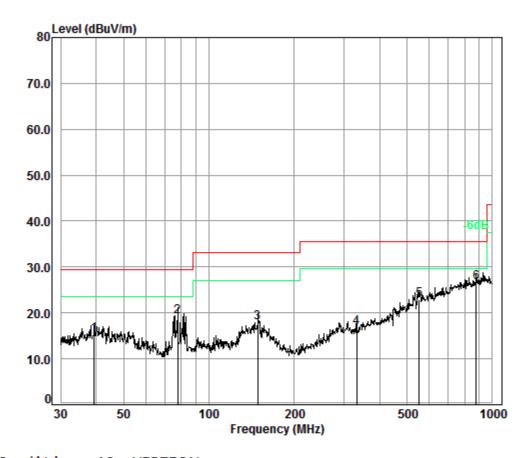

Condition: 10m VERTICAL

Job No. : 9719CR Test Mode: BT Mode


				Preamp				0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	39.44	6.79	13.25	32.99	28.24	15.29	29.50	-14.21
2	77.59	7.05	8.89	32.87	36.10	19.17	29.50	-10.33
3	148.96	7.45	13.34	32.74	29.86	17.91	33.10	-15.19
4	332.52	8.17	13.52	32.60	27.60	16.69	35.60	-18.91
5	552.88	8.78	17.78	32.60	28.83	22.79	35.60	-12.81
6 pp	878.32	9.49	21.93	32.52	27.61	26.51	35.60	-9.09



Report No.: SZEM161100971901

Page: 75 of 87

Test mode: Transmitting Horizontal

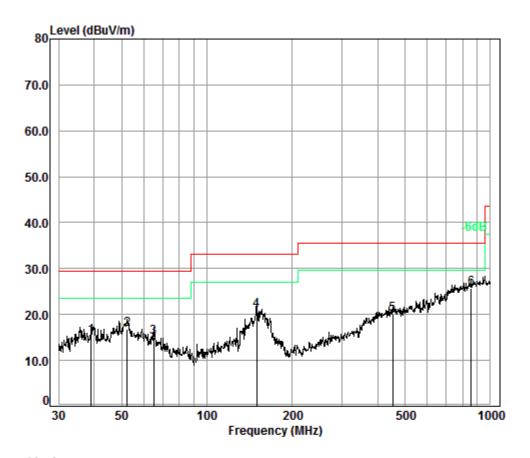

Condition: 10m HORIZONTAL

Job No. : 9719CR Test Mode: BT Mode

	Freq			Preamp Factor				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	39.16	6.78	13.21	32.98	28.29	15.30	29.50	-14.20
2	52.39	6.95	12.58	32.99	30.34	16.88	29.50	-12.62
3	64.89	7.00	11.02	32.92	30.03	15.13	29.50	-14.37
4	150.01	7.45	13.41	32.74	32.90	21.02	33.10	-12.08
5	452.72	8.43	16.21	32.60	28.07	20.11	35.60	-15.49
6 рр	857.02	9.39	21.68	32.54	27.16	25.69	35.60	-9.91



Report No.: SZEM161100971901

Page: 76 of 87

#### **Below 1GHz**

The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

 $L_3 / L_{10} = D_{10} / D_3$ 

Note:

 $L_3$ : Level @ 3m distance. Unit: uV/m;  $L_{10}$ : Level @ 10m distance. Unit: uV/m;

D<sub>3</sub>: 3m distance. Unit: m
D<sub>10</sub>: 10m distance. Unit: m
The level at 3m test distance is below:

The level at oil test distance is below.									
Frequency (MHz)	Level @ 10m (dBuV/m)	Level @ 10m (uV/m)	Level @ 3m (uV/m)	Level @ 3m (dBuV/m)	Limit @ 3m (dBuV/m)	Margin (dB)	Ant. Polarization		
39.44	15.29	5.81	19.38	25.75	40.00	-14.25	V		
77.59	19.17	9.09	30.30	29.63	40.00	-10.37	V		
148.96	17.91	7.86	26.20	28.37	43.50	-15.13	V		
332.52	16.69	6.83	22.77	27.15	46.00	-18.85	V		
552.88	22.79	13.79	45.96	33.25	46.00	-12.75	V		
878.32	26.51	21.16	70.53	36.97	46.00	-9.03	V		
39.16	15.30	5.82	19.40	25.76	40.00	-14.24	Н		
52.39	16.88	6.98	23.27	27.34	40.00	-12.66	Н		
64.89	15.13	5.71	19.03	25.59	40.00	-14.41	Н		
150.01	21.02	11.25	37.49	31.48	43.50	-12.02	Н		
452.72	20.11	10.13	33.76	30.57	46.00	-15.43	Н		
857.02	25.69	19.25	64.18	36.15	46.00	-9.85	Н		



Report No.: SZEM161100971901

Page: 77 of 87

### 6.11.2 Transmitter Emission above 1GHz

Test mode:	(	GFSK(DH1)	Test	channel:	Lowest	Rema	rk:	Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3615.625	32.54	7.67	38.52	45.09	46.78	74.00	-27.22	Vertical
4804.000	34.16	8.87	39.03	52.55	56.55	74.00	-17.45	Vertical
5778.052	34.57	9.94	39.02	45.21	50.70	74.00	-23.30	Vertical
7206.000	36.42	10.68	38.18	43.22	52.14	74.00	-21.86	Vertical
9608.000	37.52	12.50	36.99	39.37	52.40	74.00	-21.60	Vertical
12226.070	38.74	14.37	38.53	38.49	53.07	74.00	-20.93	Vertical
4006.813	33.60	7.82	38.70	44.23	46.95	74.00	-27.05	Horizontal
4804.000	34.16	8.87	39.03	51.89	55.89	74.00	-18.11	Horizontal
6016.949	34.71	10.54	38.99	44.39	50.65	74.00	-23.35	Horizontal
7206.000	36.42	10.68	38.18	42.49	51.41	74.00	-22.59	Horizontal
9608.000	37.52	12.50	36.99	39.79	52.82	74.00	-21.18	Horizontal
12033.020	38.62	14.53	38.33	38.41	53.23	74.00	-20.77	Horizontal

Test mode:	(	GFSK(DH1)	Test	channel:	Lowest	st Remark:		Average
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.000	34.16	8.87	39.03	46.98	50.98	54.00	-3.02	Vertical
4804.000	34.16	8.87	39.03	46.25	50.25	54.00	-3.75	Horizontal



Report No.: SZEM161100971901

Page: 78 of 87

Test mode:	G	GFSK(DH1)		t channel:	Middle	Rema	ırk:	Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Cable Loss (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over limit (dB)	Polarization
3579.190	32.43	7.66	38.51	44.79	46.37	74.00	-27.63	Vertical
4882.000	34.30	8.98	39.06	52.63	56.85	74.00	-17.15	Vertical
6016.949	34.71	10.54	38.99	44.65	50.91	74.00	-23.09	Vertical
7325.499	36.37	10.73	38.06	42.72	51.76	74.00	-22.24	Vertical
9769.821	37.55	12.59	36.91	39.56	52.79	74.00	-21.21	Vertical
12297.040	38.78	14.31	38.61	43.05	57.53	74.00	-16.47	Vertical
3579.190	32.43	7.66	38.51	44.60	46.18	74.00	-27.82	Horizontal
4882.000	34.30	8.98	39.06	51.01	55.23	74.00	-18.77	Horizontal
6113.481	34.79	10.41	38.93	44.57	50.84	74.00	-23.16	Horizontal
7323.000	36.37	10.72	38.06	41.39	50.42	74.00	-23.58	Horizontal
9764.000	37.55	12.58	36.91	38.86	52.08	74.00	-21.92	Horizontal
11808.790	38.41	14.36	38.12	41.03	55.68	74.00	-18.32	Horizontal

Test mode:		GFSK(DH1)	Test	channel:	Middle	Rema	ırk:	Average
Frequency (MHz)	Antenna factors (dB/m)	Loss	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.000	34.30	8.98	39.06	46.29	50.51	54.00	-3.49	Vertical
4882.000	34.30	8.98	39.06	45.58	49.80	54.00	-4.20	Horizontal



Report No.: SZEM161100971901

Page: 79 of 87

Test mode:		GFSK	(DH1)		Test	channel:	Highest	Rema	rk:	Peak
Frequency (MHz)	Antenn factors (dB/m)	S L	able .oss dB)		amp tor B)	Reading Level (dBµV)	Emissio Level (dBµV/n	 Limit dBμV/m)	Over limit (dB)	Polarization
3584.372	32.45	7	7.66	38.	.51	44.92	46.52	74.00	-27.48	Vertical
4960.000	34.43	g	0.09	39.	.09	52.24	56.67	74.00	-17.33	Vertical
6113.481	34.79	10	0.41	38.	.93	44.57	50.84	74.00	-23.16	Vertical
7440.000	36.32	10	0.77	37.	94	42.81	51.96	74.00	-22.04	Vertical
9920.000	37.58	1:	2.67	36.	.84	40.18	53.59	74.00	-20.41	Vertical
12243.770	38.75	1	4.36	38.	.55	43.08	57.64	74.00	-16.36	Vertical
3831.060	33.15	7	7.75	38.	.62	44.13	46.41	74.00	-27.59	Horizontal
4960.000	34.43	9	0.09	39.	.09	51.49	55.92	74.00	-18.08	Horizontal
6069.413	34.76	10	0.47	38.	96	43.71	49.98	74.00	-24.02	Horizontal
7440.000	36.32	10	0.77	37.	94	39.72	48.87	74.00	-25.13	Horizontal
9920.000	37.58	1:	2.67	36.	84	37.56	50.97	74.00	-23.03	Horizontal
12261.500	38.76	1	4.34	38.	57	41.69	56.22	74.00	-17.78	Horizontal

Test mode:	(	SFSK(DH1)	Test	channel:	Highest	Highest Remark:		Average
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.000	34.43	9.09	39.09	46.19	50.62	54.00	-3.38	Vertical
4960.000	34.43	9.09	39.09	45.76	50.19	54.00	-3.81	Horizontal

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the above measurement data were shown in the report.



Report No.: SZEM161100971901

Page: 80 of 87

### 6.12 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Sectio	n 15.209 and 15.205						
Test Method:	ANSI C63.10: 2013							
Test Site:	Measurement Distance:	Measurement Distance: 3m (Full-Anechoic Chamber)						
Limit:	Frequency	Limit (dBuV/m @3m)	Remark					
	30MHz-88MHz	40.0	Quasi-peak Value					
	88MHz-216MHz	43.5	Quasi-peak Value					
	216MHz-960MHz	46.0	Quasi-peak Value					
	960MHz-1GHz	54.0	Quasi-peak Value					
	Above 1GHz	54.0	Average Value					
	Above IGI12	74.0	Peak Value					
Test Setup:								
Test Setup:  Test Setup:  Test Setup:  Test Receiver  Test Receiver								
Figure 1. 30Mł	Hz to 1GHz	Figure 2. Abov	/e 1 GHz					



Report No.: SZEM161100971901

Page: 81 of 87

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.  d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.  e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.  f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.  g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel  h. Test the EUT in the lowest channel , the Highest channel  i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.  j. Repeat above procedures until all frequencies measured was complete.  Exploratory Test Mode:  Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case.  Pretest the EUT at Transmitting mode and found it is worse case.  Pretest the EUT at Transmitting mode and found it is worse case.  Pretest the EUT as in the first pass.		
j. Repeat above procedures until all frequencies measured was complete.  Exploratory Test Mode:  Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode  Final Test Mode:  Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Transmitting mode and found it is worse case Only the worst case is recorded in the report.  Instruments Used:  Refer to section 5.10 for details	Test Procedure:	<ul> <li>The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> <li>Test the EUT in the lowest channel, the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis</li> </ul>
which it is the worst case.  j. Repeat above procedures until all frequencies measured was complete.  Exploratory Test Mode:  Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode  Final Test Mode:  Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case.  Pretest the EUT at Transmitting mode and found it is worse case Only the worst case is recorded in the report.  Instruments Used:  Refer to section 5.10 for details		transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel  h. Test the EUT in the lowest channel, the Highest channel
Exploratory Test Mode:  Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode  Final Test Mode:  Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Transmitting mode and found it is worse case Only the worst case is recorded in the report.  Instruments Used:  Refer to section 5.10 for details		which it is the worst case.
data type Transmitting mode  Final Test Mode:  Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Transmitting mode and found it is worse case Only the worst case is recorded in the report.  Instruments Used:  Refer to section 5.10 for details		•
the worst case.  Pretest the EUT at Transmitting mode and found it is worse case Only the worst case is recorded in the report.  Instruments Used: Refer to section 5.10 for details	Exploratory Test Mode:	data type
	Final Test Mode:	the worst case.  Pretest the EUT at Transmitting mode and found it is worse case
Test Results: Pass	Instruments Used:	Refer to section 5.10 for details
	Test Results:	Pass




Report No.: SZEM161100971901

82 of 87 Page:

Test plot as follows:

GFSK (DH5) Test channel: Peak Worse case mode: Lowest Remark: Vertical

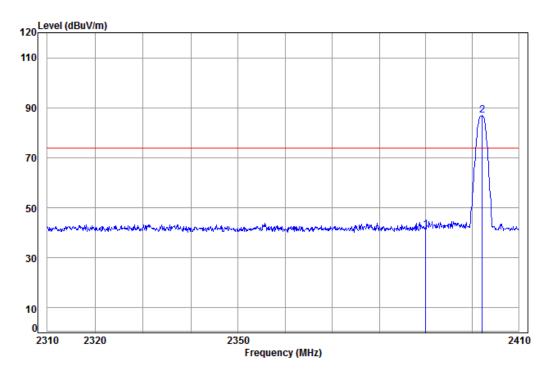

Condition: 3m Vertical Job No: : 9719CR

Mode: : 2402 Band edge

: BT


Fr	Cable eq Loss	Ant Factor					
M	Hz dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2390.0 2 pp 2402.1							



Report No.: SZEM161100971901

Page: 83 of 87

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Peak Horizontal

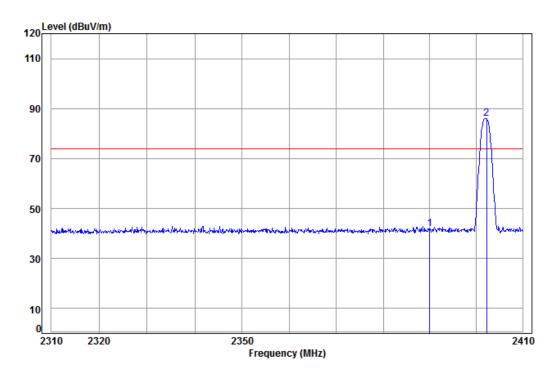

Condition: 3m HORIZONTAL

Job No: : 9719CR

Mode: : 2402 Band edge

: BT


	Freq			Factor				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
	2390.000 2402.250							



Report No.: SZEM161100971901

Page: 84 of 87

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Peak Vertical

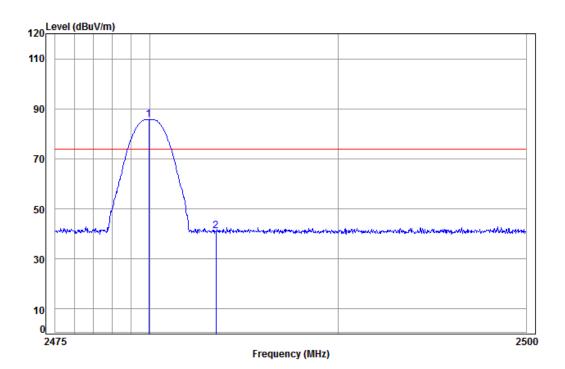

Condition: 3m VERTICAL

Job No: : 9719CR

Mode: : 2480 Band edge

: BT


	Freq			Preamp Factor				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	——dB
	2479.955 2483.500							



Report No.: SZEM161100971901

Page: 85 of 87

Worse case mode: GFSK(DH5) Test channel: Highest Remark: Peak Horizontal

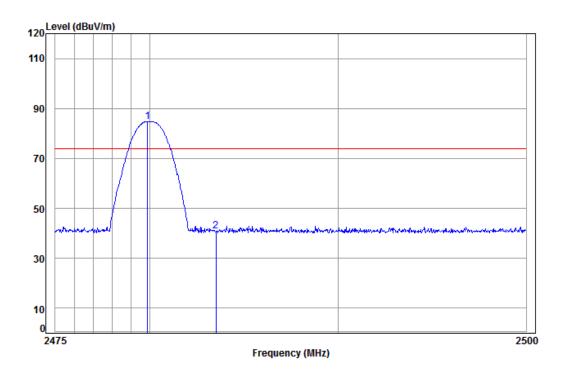

Condition: 3m Horizontal

Job No: : 8962CR

Mode: : 2480 Band edge

: BT

	Cable	Ant	Preamp	Read		Limit	0ver
Frea	Loss	Factor	Factor	Level	Level	Line	Limit
MII-		-ID /			JD. 377	JD: 377	
MHZ	ав	aB/m	dB	abuv	aBuv/m	aBuv/m	ав
1 pp 2479.880	5.41	29.34	38.15	88.15	84.75	74.00	10.75
2 2483.500							
2 2403.300	J.41	25.33	30.13	44.24	40.00	74.00	-55.15

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: SZEM161100971901

Page: 86 of 87


### 7 Photographs - EUT Test Setup

Test Model No.: H1001-01

### 7.1 Conducted Emission



### 7.2 Radiated Emission

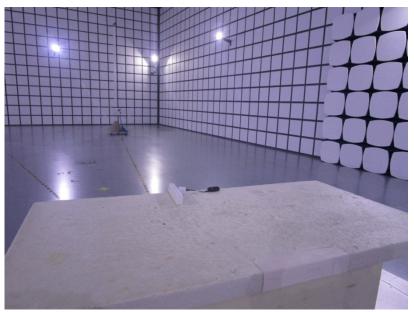




Report No.: SZEM161100971901

Page: 87 of 87

### 7.3 Radiated Spurious Emission

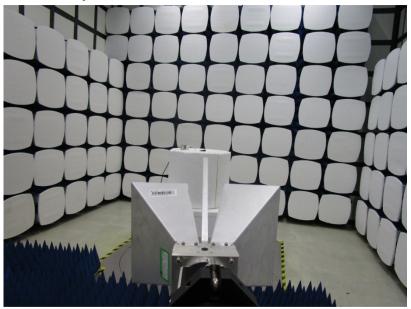

### 8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1611009719CR.