




Shenzhen UnionTrust Quality and Technology Co., Ltd.

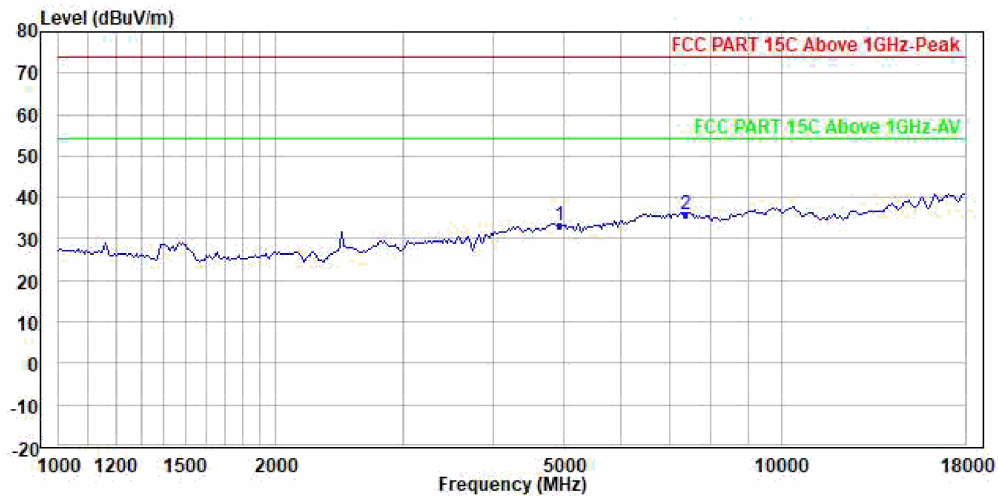


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	33.16	35.19	34.48	0.00	9.37	45.88	54.00	-20.84	Average
2 PP	7386.000	35.77	34.46	36.50	0.00	10.39	45.58	54.00	-18.23	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

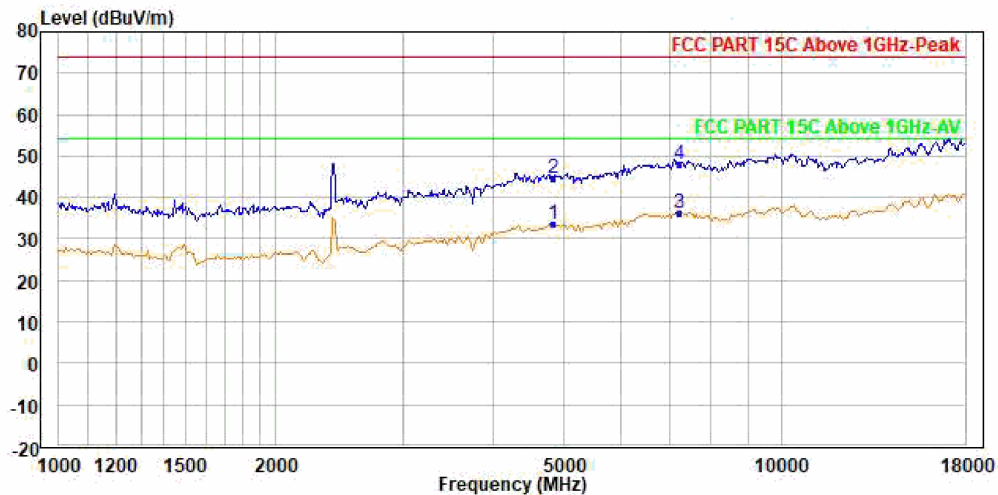

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2412
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	33.57	35.64	34.46	0.00	9.33	45.86	54.00	-20.43	Average
2	4824.000	44.63	46.70	34.46	0.00	9.33	45.86	74.00	-29.37	Peak
3 PP	7236.000	36.13	34.83	36.50	0.00	10.35	45.55	54.00	-17.87	Average
4 PK	7236.000	48.01	46.71	36.50	0.00	10.35	45.55	74.00	-25.99	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1	4824.000	33.57	35.64	34.46	0.00	9.33	45.86	54.00	-20.43	Average
2	4824.000	44.63	46.70	34.46	0.00	9.33	45.86	74.00	-29.37	Peak
3 PP	7236.000	36.13	34.83	36.50	0.00	10.35	45.55	54.00	-17.87	Average
4 PK	7236.000	48.01	46.71	36.50	0.00	10.35	45.55	74.00	-25.99	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

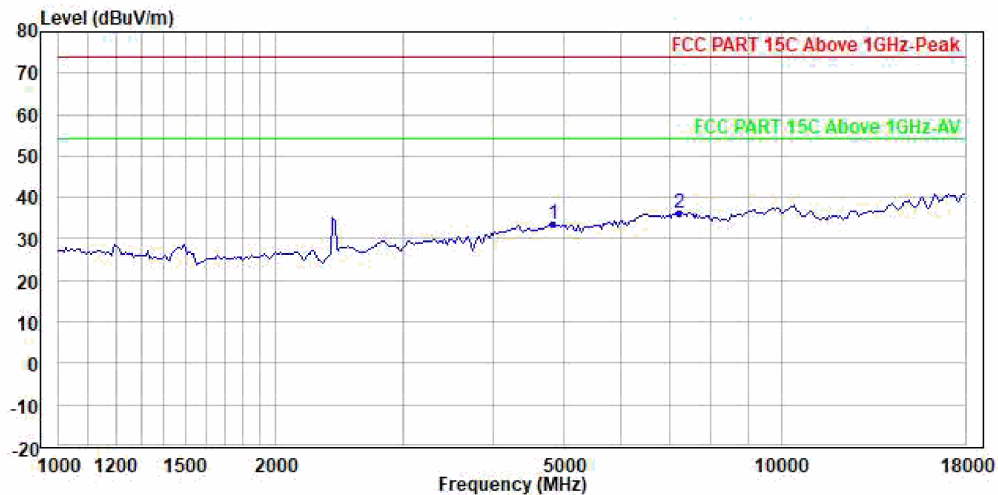


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	33.57	35.64	34.46	0.00	9.33	45.86	54.00	-20.43	Average
2 PP	7236.000	36.13	34.83	36.50	0.00	10.35	45.55	54.00	-17.87	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

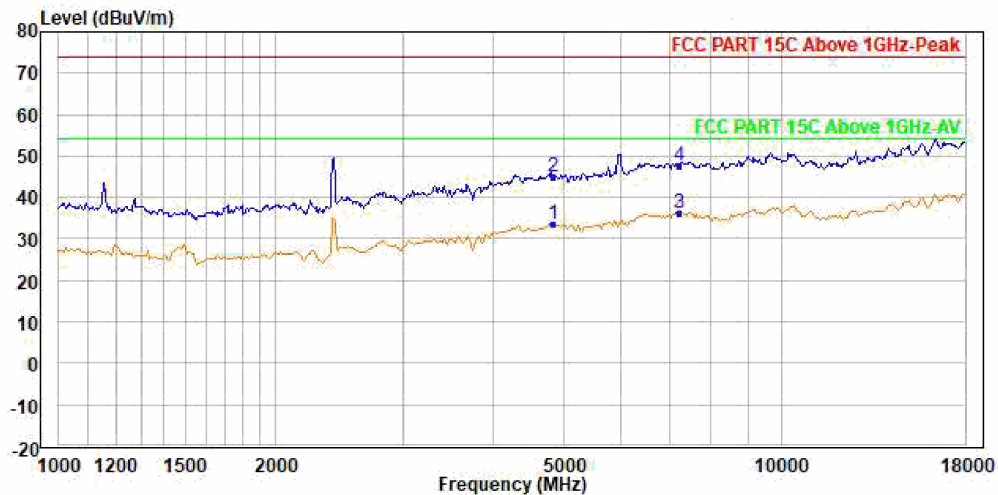

Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2412
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	33.57	35.64	34.46	0.00	9.33	45.86	54.00	-20.43	Average
2	4824.000	45.13	47.20	34.46	0.00	9.33	45.86	74.00	-28.87	Peak
3	PP 7236.000	36.13	34.83	36.50	0.00	10.35	45.55	54.00	-17.87	Average
4	PK 7236.000	47.78	46.48	36.50	0.00	10.35	45.55	74.00	-26.22	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1	4824.000	33.57	35.64	34.46	0.00	9.33	45.86	54.00	-20.43	Average
2	4824.000	45.13	47.20	34.46	0.00	9.33	45.86	74.00	-28.87	Peak
3	PP 7236.000	36.13	34.83	36.50	0.00	10.35	45.55	54.00	-17.87	Average
4	PK 7236.000	47.78	46.48	36.50	0.00	10.35	45.55	74.00	-26.22	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

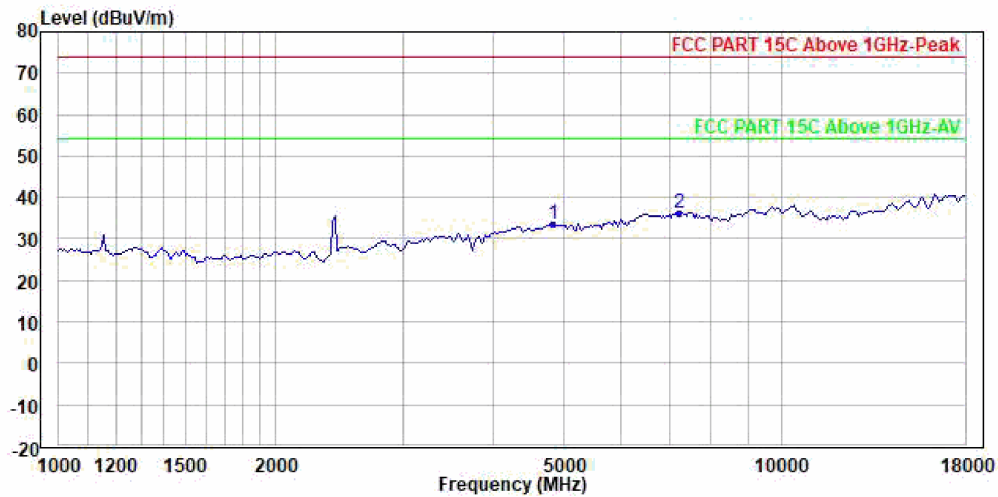


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	33.47	35.54	34.46	0.00	9.33	45.86	54.00	-20.53	Average
2 PP	7236.000	36.18	34.88	36.50	0.00	10.35	45.55	54.00	-17.82	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

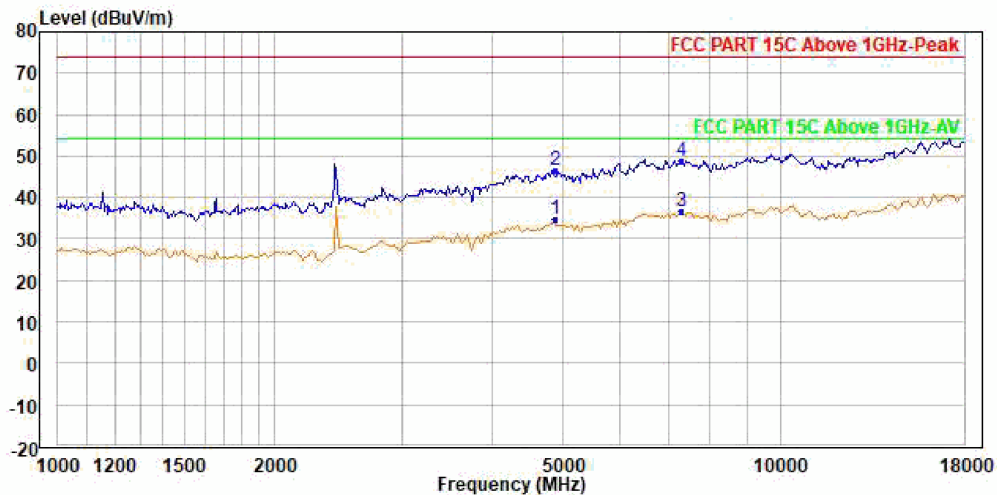

Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2437
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	34.93	36.98	34.47	0.00	9.35	45.87	54.00	-19.07	Average
2	4874.000	46.42	48.47	34.47	0.00	9.35	45.87	74.00	-27.58	Peak
3 PP	7311.000	36.57	35.26	36.50	0.00	10.37	45.56	54.00	-17.43	Average
4 PK	7311.000	48.72	47.41	36.50	0.00	10.37	45.56	74.00	-25.28	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1	4874.000	34.93	36.98	34.47	0.00	9.35	45.87	54.00	-19.07	Average
2	4874.000	46.42	48.47	34.47	0.00	9.35	45.87	74.00	-27.58	Peak
3 PP	7311.000	36.57	35.26	36.50	0.00	10.37	45.56	54.00	-17.43	Average
4 PK	7311.000	48.72	47.41	36.50	0.00	10.37	45.56	74.00	-25.28	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

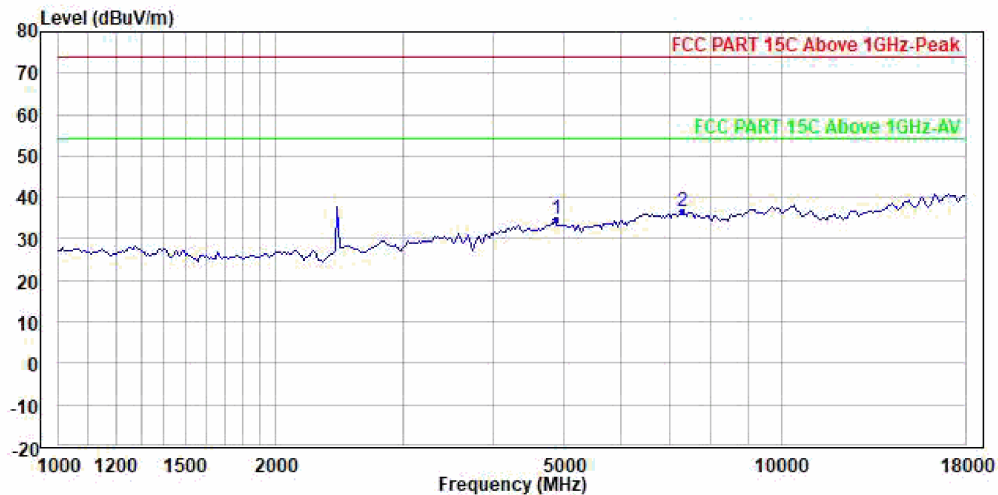


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	34.93	36.98	34.47	0.00	9.35	45.87	54.00	-19.07	Average
2 PP	7311.000	36.57	35.26	36.50	0.00	10.37	45.56	54.00	-17.43	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

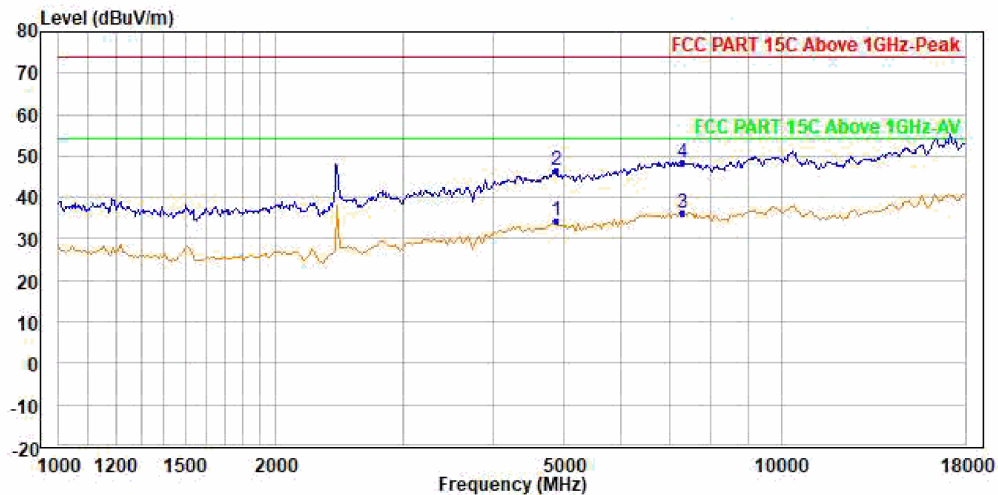

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2437
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	34.33	36.38	34.47	0.00	9.35	45.87	54.00	-19.67	Average
2	4874.000	46.45	48.50	34.47	0.00	9.35	45.87	74.00	-27.55	Peak
3 PP	7311.000	36.24	34.93	36.50	0.00	10.37	45.56	54.00	-17.76	Average
4 PK	7311.000	48.37	47.06	36.50	0.00	10.37	45.56	74.00	-25.63	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1	4874.000	34.33	36.38	34.47	0.00	9.35	45.87	54.00	-19.67	Average
2	4874.000	46.45	48.50	34.47	0.00	9.35	45.87	74.00	-27.55	Peak
3 PP	7311.000	36.24	34.93	36.50	0.00	10.37	45.56	54.00	-17.76	Average
4 PK	7311.000	48.37	47.06	36.50	0.00	10.37	45.56	74.00	-25.63	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

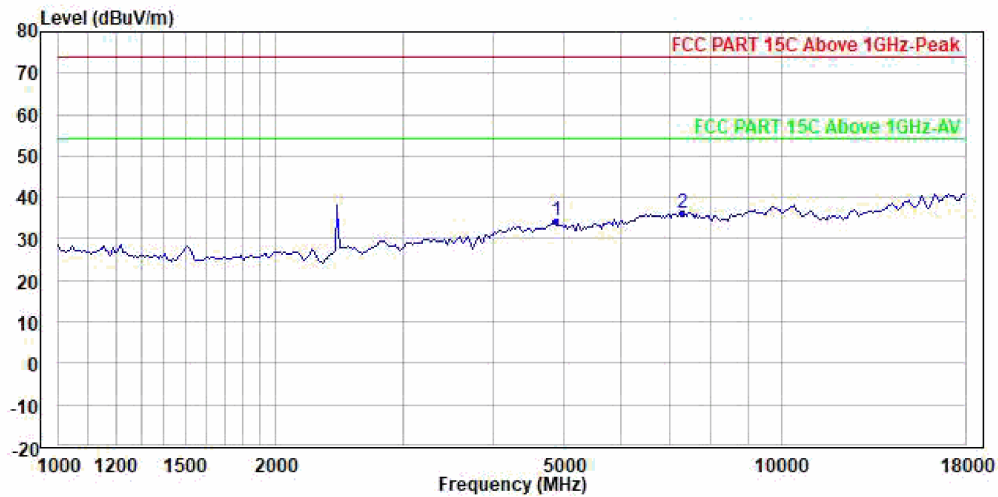


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	34.33	36.38	34.47	0.00	9.35	45.87	54.00	-19.67	Average
2 PP	7311.000	36.24	34.93	36.50	0.00	10.37	45.56	54.00	-17.76	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

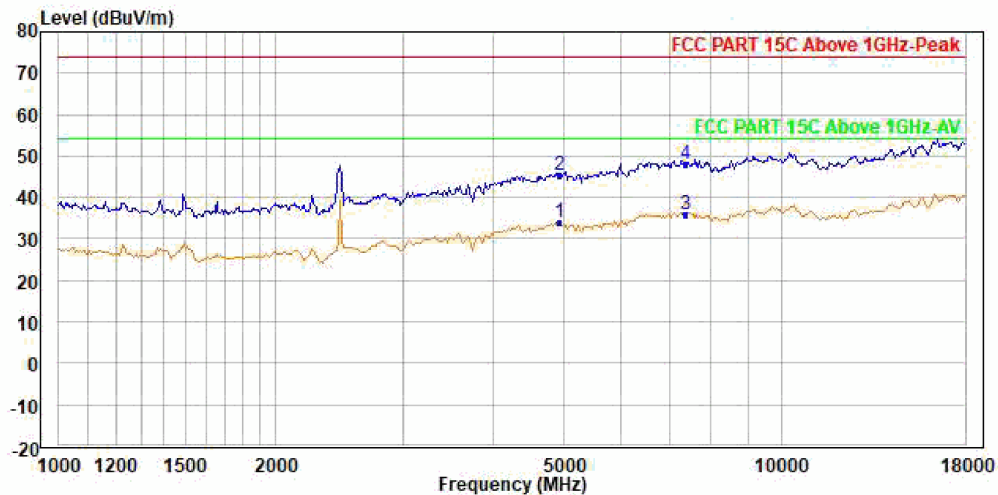

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2462
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	33.86	35.89	34.48	0.00	9.37	45.88	54.00	-20.14	Average
2	4924.000	45.44	47.47	34.48	0.00	9.37	45.88	74.00	-28.56	Peak
3 PP	7386.000	35.80	34.49	36.50	0.00	10.39	45.58	54.00	-18.20	Average
4 PK	7386.000	48.14	46.83	36.50	0.00	10.39	45.58	74.00	-25.86	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1	4924.000	33.86	35.89	34.48	0.00	9.37	45.88	54.00	-20.14	Average
2	4924.000	45.44	47.47	34.48	0.00	9.37	45.88	74.00	-28.56	Peak
3 PP	7386.000	35.80	34.49	36.50	0.00	10.39	45.58	54.00	-18.20	Average
4 PK	7386.000	48.14	46.83	36.50	0.00	10.39	45.58	74.00	-25.86	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

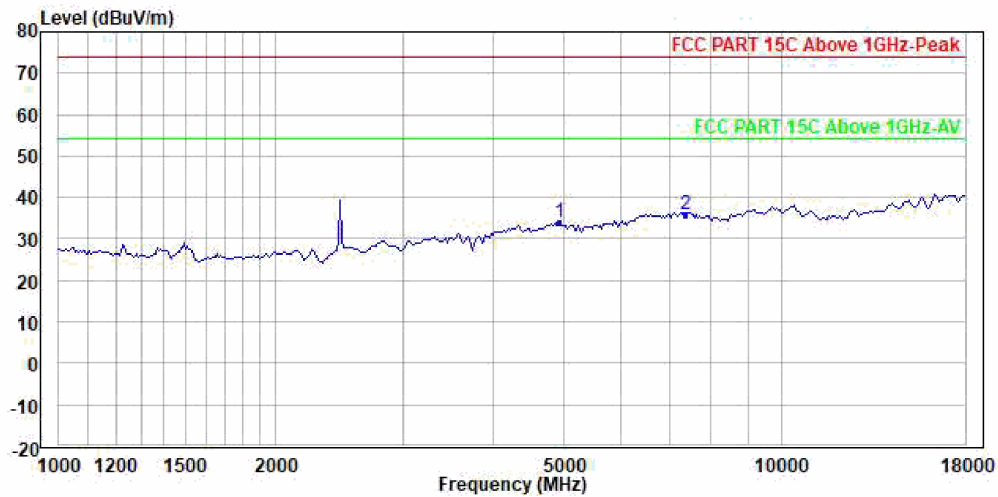


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	33.86	35.89	34.48	0.00	9.37	45.88	54.00	-20.14	Average
2 PP	7386.000	35.80	34.49	36.50	0.00	10.39	45.58	54.00	-18.20	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

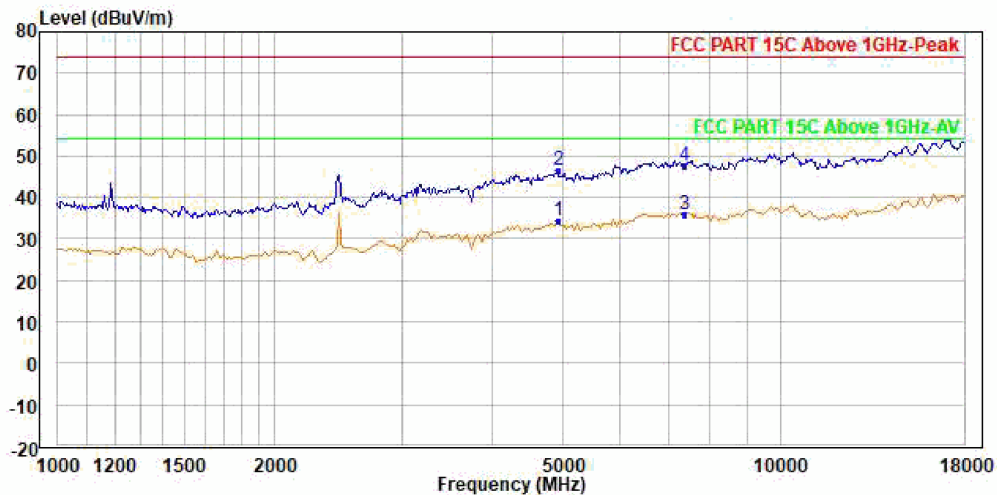

Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2462
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	34.22	36.25	34.48	0.00	9.37	45.88	54.00	-19.78	Average
2	4924.000	46.40	48.43	34.48	0.00	9.37	45.88	74.00	-27.60	Peak
3 PP	7386.000	35.93	34.62	36.50	0.00	10.39	45.58	54.00	-18.07	Average
4 PK	7386.000	47.63	46.32	36.50	0.00	10.39	45.58	74.00	-26.37	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1	4924.000	34.22	36.25	34.48	0.00	9.37	45.88	54.00	-19.78	Average
2	4924.000	46.40	48.43	34.48	0.00	9.37	45.88	74.00	-27.60	Peak
3 PP	7386.000	35.93	34.62	36.50	0.00	10.39	45.58	54.00	-18.07	Average
4 PK	7386.000	47.63	46.32	36.50	0.00	10.39	45.58	74.00	-26.37	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

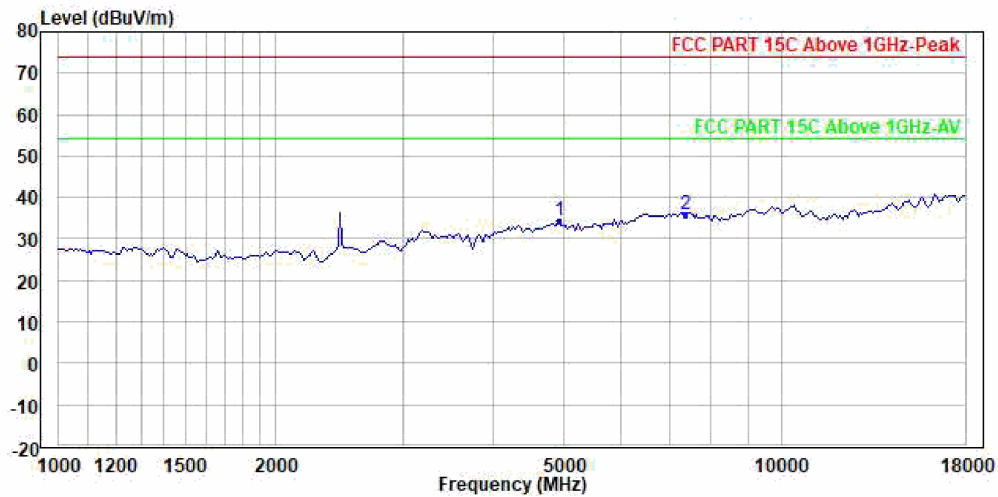


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	34.22	36.25	34.48	0.00	9.37	45.88	54.00	-19.78	Average
2 PP	7386.000	35.93	34.62	36.50	0.00	10.39	45.58	54.00	-18.07	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

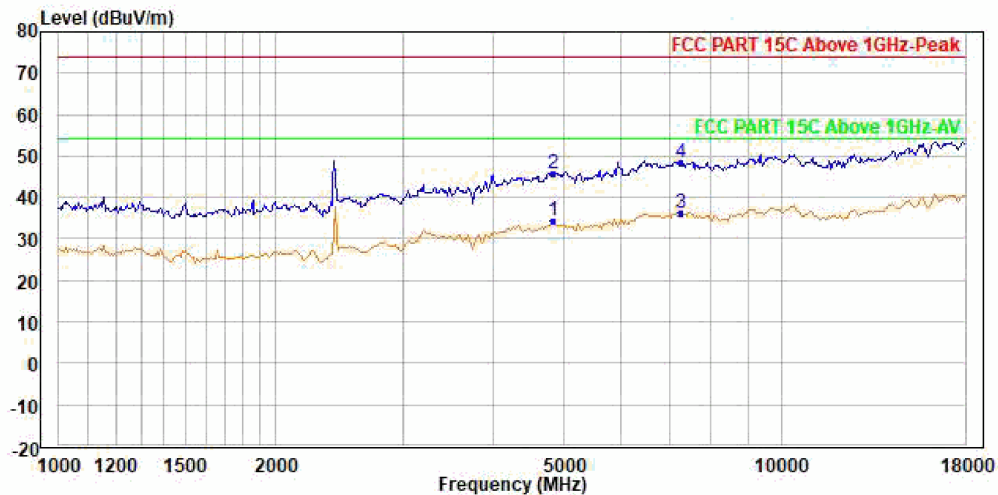

Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2422
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4844.000	34.21	36.27	34.47	0.00	9.34	45.87	54.00	-19.79	Average
2	4844.000	45.61	47.67	34.47	0.00	9.34	45.87	74.00	-28.39	Peak
3 PP	7266.000	36.29	34.98	36.50	0.00	10.36	45.55	54.00	-17.71	Average
4 PK	7266.000	48.46	47.15	36.50	0.00	10.36	45.55	74.00	-25.54	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1	4844.000	34.21	36.27	34.47	0.00	9.34	45.87	54.00	-19.79	Average
2	4844.000	45.61	47.67	34.47	0.00	9.34	45.87	74.00	-28.39	Peak
3 PP	7266.000	36.29	34.98	36.50	0.00	10.36	45.55	54.00	-17.71	Average
4 PK	7266.000	48.46	47.15	36.50	0.00	10.36	45.55	74.00	-25.54	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

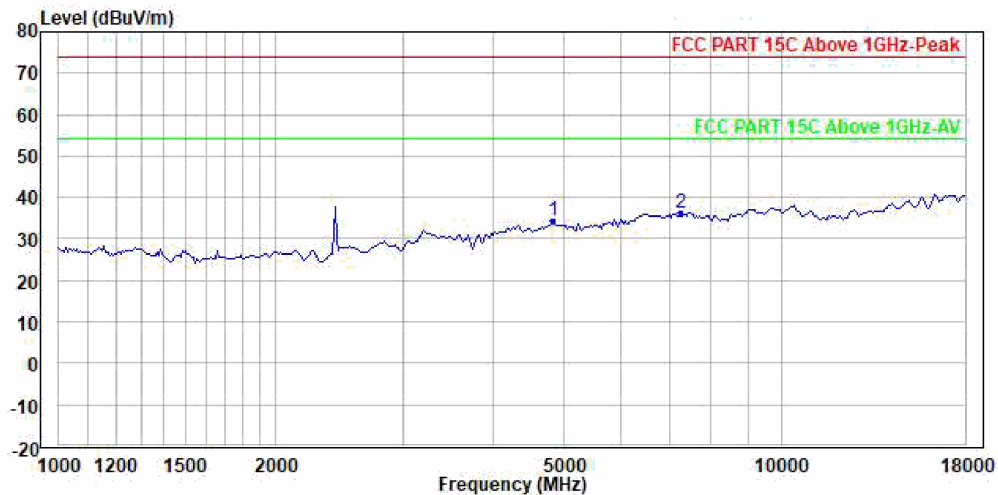


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2422
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4844.000	34.21	36.27	34.47	0.00	9.34	45.87	54.00	-19.79	Average
2 PP	7266.000	36.29	34.98	36.50	0.00	10.36	45.55	54.00	-17.71	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

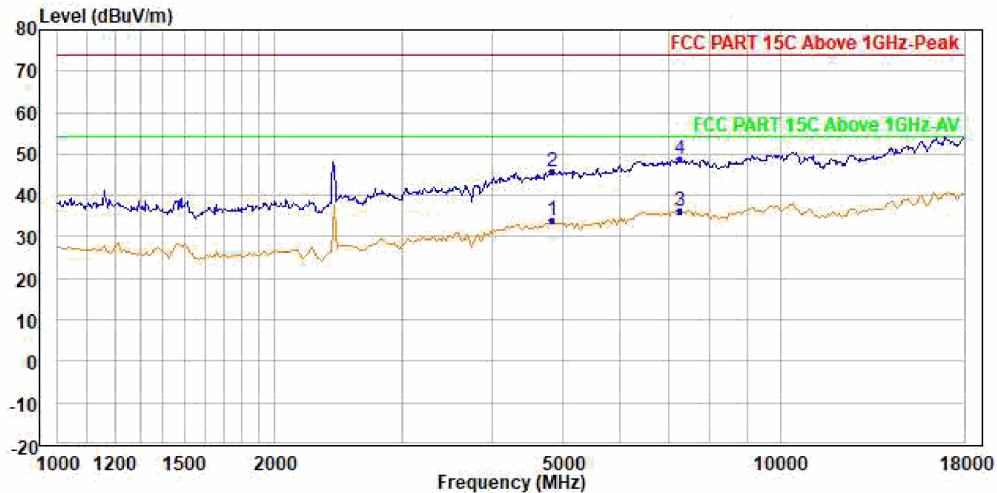

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2422
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4844.000	33.83	35.89	34.47	0.00	9.34	45.87	54.00	-20.17	Average
2	4844.000	45.60	47.66	34.47	0.00	9.34	45.87	74.00	-28.40	Peak
3 PP	7266.000	36.21	34.90	36.50	0.00	10.36	45.55	54.00	-17.79	Average
4 PK	7266.000	48.64	47.33	36.50	0.00	10.36	45.55	74.00	-25.36	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1	4844.000	33.83	35.89	34.47	0.00	9.34	45.87	54.00	-20.17	Average
2	4844.000	45.60	47.66	34.47	0.00	9.34	45.87	74.00	-28.40	Peak
3 PP	7266.000	36.21	34.90	36.50	0.00	10.36	45.55	54.00	-17.79	Average
4 PK	7266.000	48.64	47.33	36.50	0.00	10.36	45.55	74.00	-25.36	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

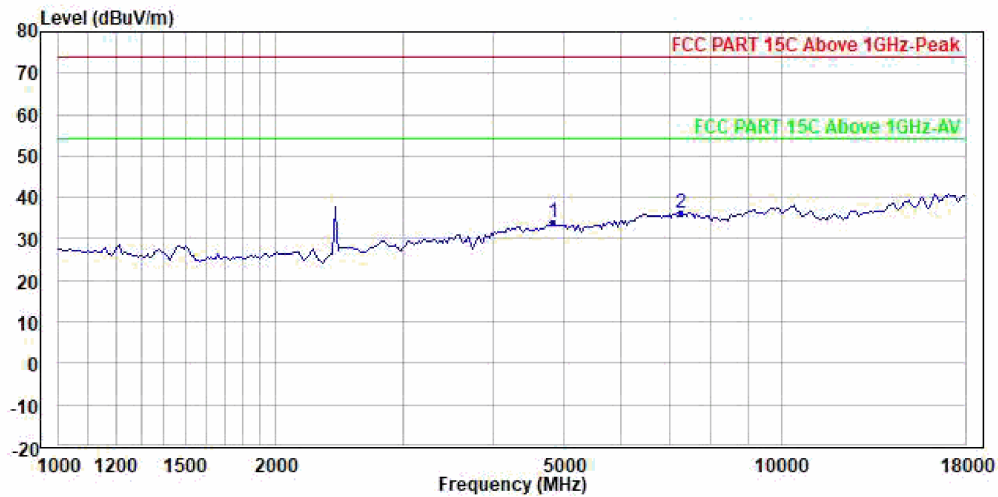


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2422
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4844.000	33.83	35.89	34.47	0.00	9.34	45.87	54.00	-20.17	Average
2 PP	7266.000	36.21	34.90	36.50	0.00	10.36	45.55	54.00	-17.79	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

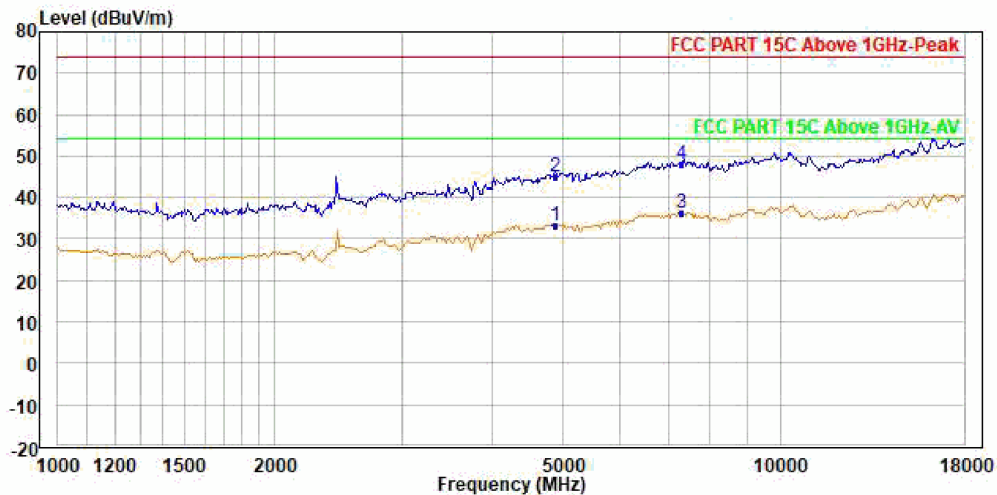

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2437
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	33.36	35.41	34.47	0.00	9.35	45.87	54.00	-20.64	Average
2	4874.000	44.92	46.97	34.47	0.00	9.35	45.87	74.00	-29.08	Peak
3 PP	7311.000	36.32	35.01	36.50	0.00	10.37	45.56	54.00	-17.68	Average
4 PK	7311.000	48.09	46.78	36.50	0.00	10.37	45.56	74.00	-25.91	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1	4874.000	33.36	35.41	34.47	0.00	9.35	45.87	54.00	-20.64	Average
2	4874.000	44.92	46.97	34.47	0.00	9.35	45.87	74.00	-29.08	Peak
3 PP	7311.000	36.32	35.01	36.50	0.00	10.37	45.56	54.00	-17.68	Average
4 PK	7311.000	48.09	46.78	36.50	0.00	10.37	45.56	74.00	-25.91	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

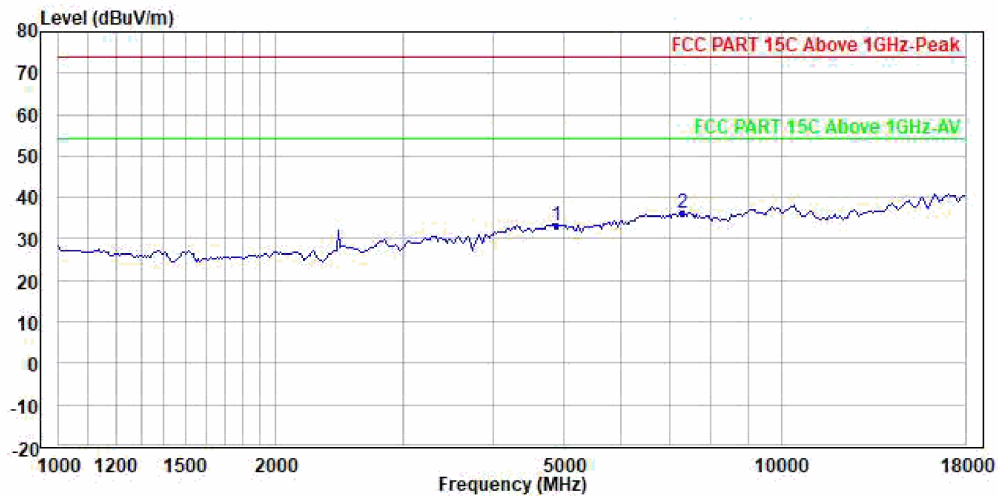


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	33.36	35.41	34.47	0.00	9.35	45.87	54.00	-20.64	Average
2 PP	7311.000	36.32	35.01	36.50	0.00	10.37	45.56	54.00	-17.68	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

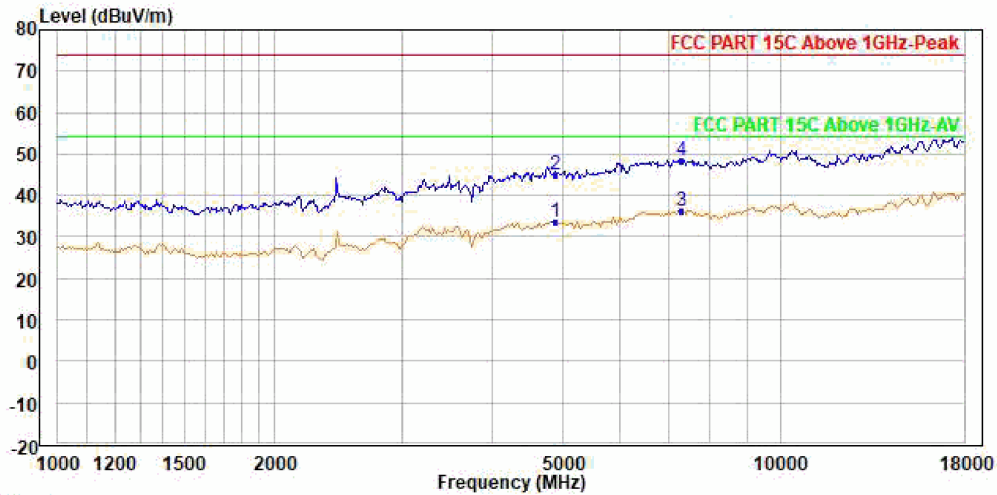

Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2437
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	33.51	35.56	34.47	0.00	9.35	45.87	54.00	-20.49	Average
2	4874.000	45.00	47.05	34.47	0.00	9.35	45.87	74.00	-29.00	Peak
3 PP	7311.000	36.32	35.01	36.50	0.00	10.37	45.56	54.00	-17.68	Average
4 PK	7311.000	48.42	47.11	36.50	0.00	10.37	45.56	74.00	-25.58	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1	4874.000	33.51	35.56	34.47	0.00	9.35	45.87	54.00	-20.49	Average
2	4874.000	45.00	47.05	34.47	0.00	9.35	45.87	74.00	-29.00	Peak
3 PP	7311.000	36.32	35.01	36.50	0.00	10.37	45.56	54.00	-17.68	Average
4 PK	7311.000	48.42	47.11	36.50	0.00	10.37	45.56	74.00	-25.58	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

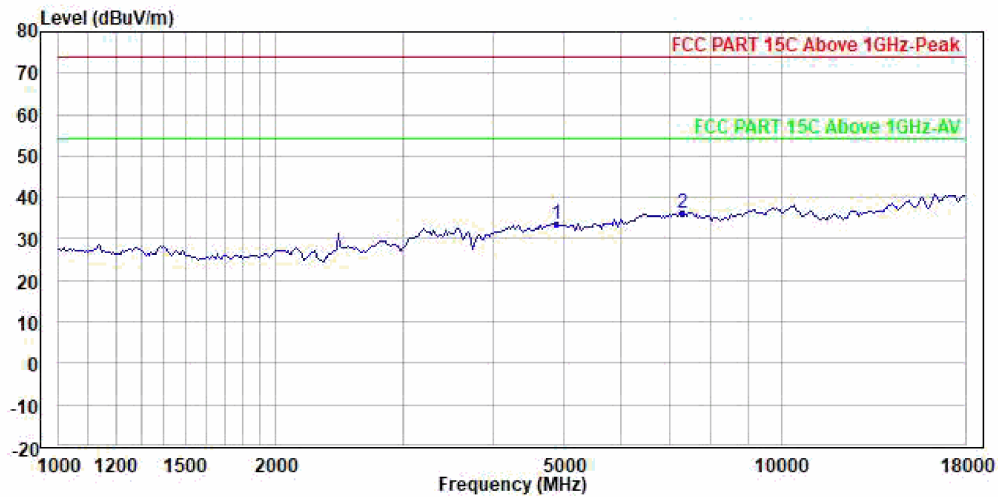


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	33.51	35.56	34.47	0.00	9.35	45.87	54.00	-20.49	Average
2 PP	7311.000	36.32	35.01	36.50	0.00	10.37	45.56	54.00	-17.68	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

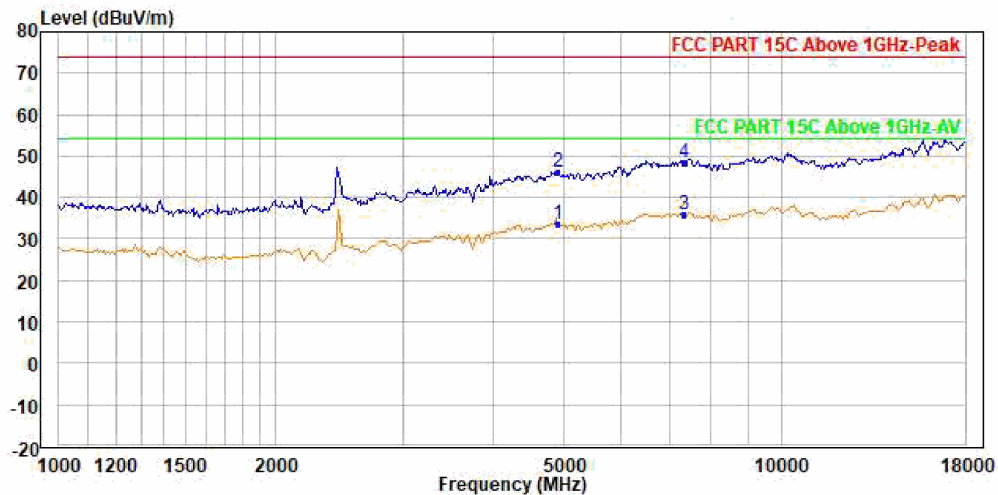

Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2452
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4904.000	33.72	35.76	34.48	0.00	9.36	45.88	54.00	-20.28	Average
2	4904.000	46.05	48.09	34.48	0.00	9.36	45.88	74.00	-27.95	Peak
3 PP	7356.000	35.93	34.62	36.50	0.00	10.38	45.57	54.00	-18.07	Average
4 PK	7356.000	48.41	47.10	36.50	0.00	10.38	45.57	74.00	-25.59	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1	4904.000	33.72	35.76	34.48	0.00	9.36	45.88	54.00	-20.28	Average
2	4904.000	46.05	48.09	34.48	0.00	9.36	45.88	74.00	-27.95	Peak
3 PP	7356.000	35.93	34.62	36.50	0.00	10.38	45.57	54.00	-18.07	Average
4 PK	7356.000	48.41	47.10	36.50	0.00	10.38	45.57	74.00	-25.59	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

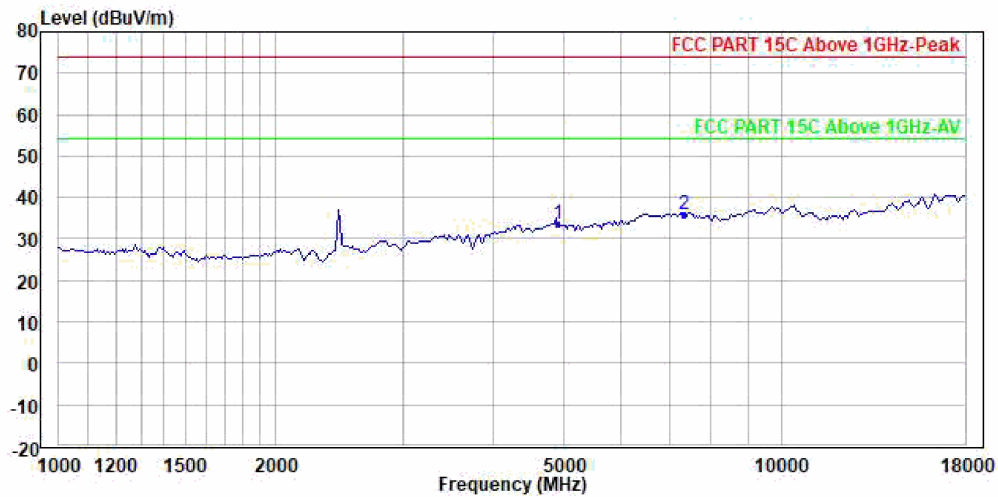


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2452
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4904.000	33.72	35.76	34.48	0.00	9.36	45.88	54.00	-20.28	Average
2 PP	7356.000	35.93	34.62	36.50	0.00	10.38	45.57	54.00	-18.07	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

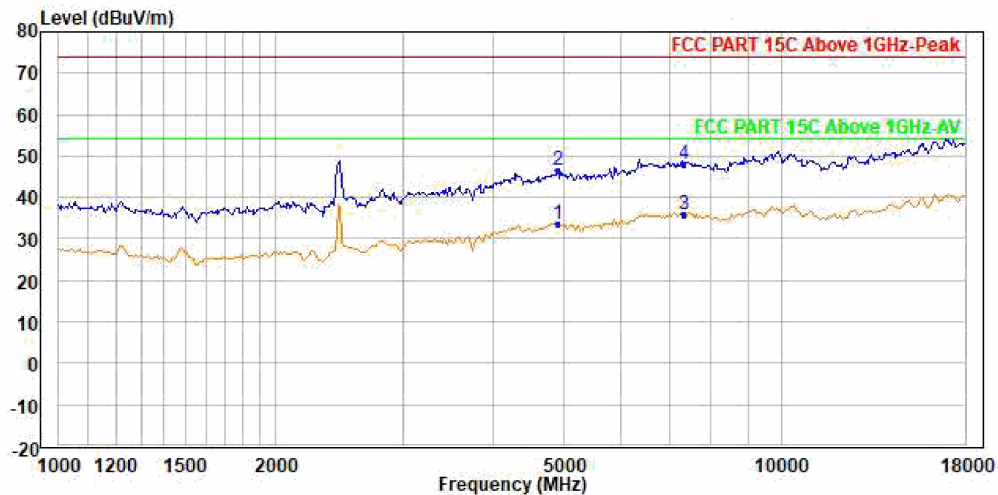

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2452
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4904.000	33.46	35.50	34.48	0.00	9.36	45.88	54.00	-20.54	Average
2	4904.000	46.65	48.69	34.48	0.00	9.36	45.88	74.00	-27.35	Peak
3 PP	7356.000	35.83	34.52	36.50	0.00	10.38	45.57	54.00	-18.17	Average
4 PK	7356.000	47.89	46.58	36.50	0.00	10.38	45.57	74.00	-26.11	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1	4904.000	33.46	35.50	34.48	0.00	9.36	45.88	54.00	-20.54	Average
2	4904.000	46.65	48.69	34.48	0.00	9.36	45.88	74.00	-27.35	Peak
3 PP	7356.000	35.83	34.52	36.50	0.00	10.38	45.57	54.00	-18.17	Average
4 PK	7356.000	47.89	46.58	36.50	0.00	10.38	45.57	74.00	-26.11	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

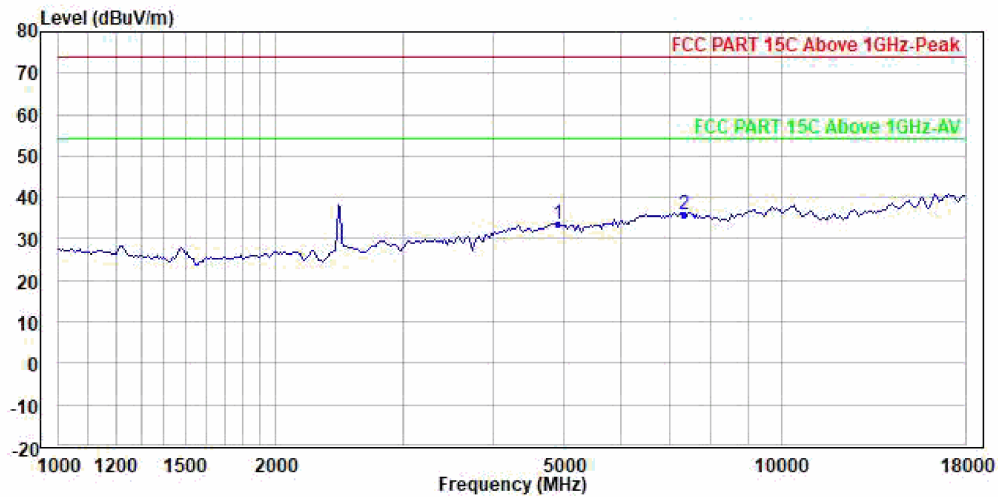


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2452
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4904.000	33.46	35.50	34.48	0.00	9.36	45.88	54.00	-20.54	Average
2 PP	7356.000	35.83	34.52	36.50	0.00	10.38	45.57	54.00	-18.17	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

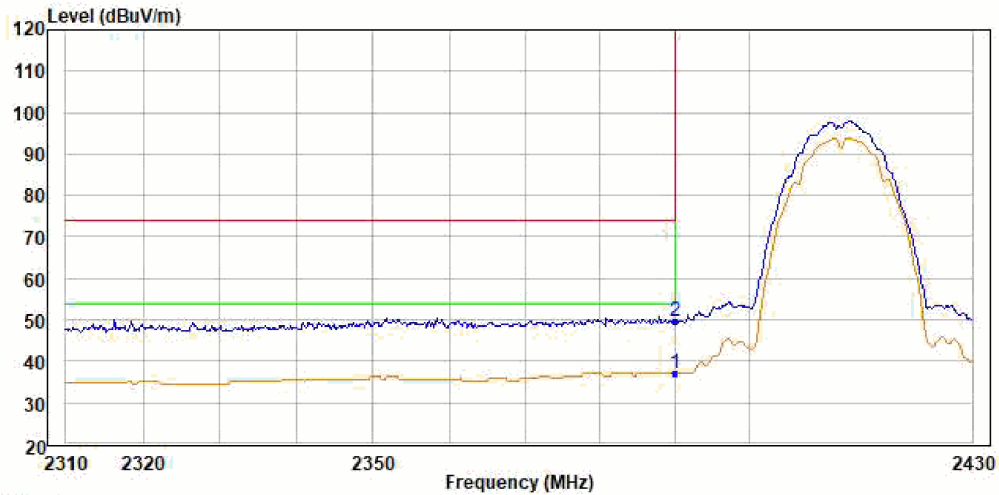

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%) : 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_ANT1_2412
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	37.02	35.52	31.55	10.00	7.35	47.40	54.00	-16.98	Average
2 PK	2390.000	49.73	48.23	31.55	10.00	7.35	47.40	74.00	-24.27	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1 PP	2390.000	37.02	35.52	31.55	10.00	7.35	47.40	54.00	-16.98	Average
2 PK	2390.000	49.73	48.23	31.55	10.00	7.35	47.40	74.00	-24.27	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

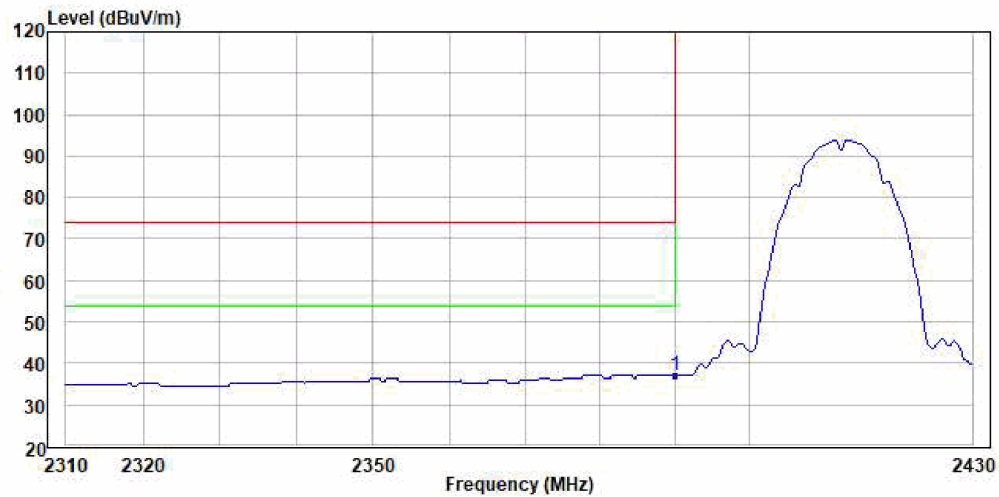


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_ANT1_2412
Remark :

Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP 2390.000	37.02	35.52	31.55	10.00	7.35	47.40	54.00	-16.98	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

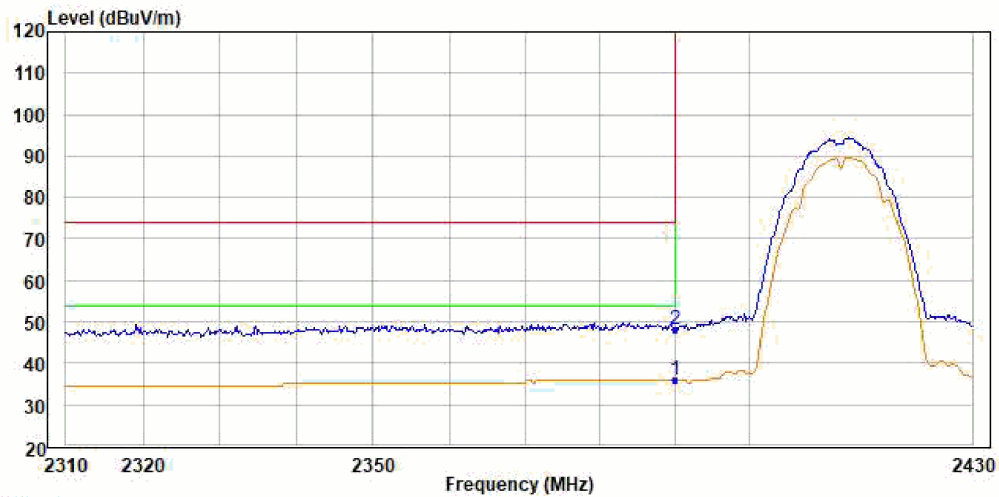

Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%) : 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_ANT1_2412
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	35.86	34.36	31.55	10.00	7.35	47.40	54.00	-18.14	Average
2 PK	2390.000	48.10	46.60	31.55	10.00	7.35	47.40	74.00	-25.90	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1 PP	2390.000	35.86	34.36	31.55	10.00	7.35	47.40	54.00	-18.14	Average
2 PK	2390.000	48.10	46.60	31.55	10.00	7.35	47.40	74.00	-25.90	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

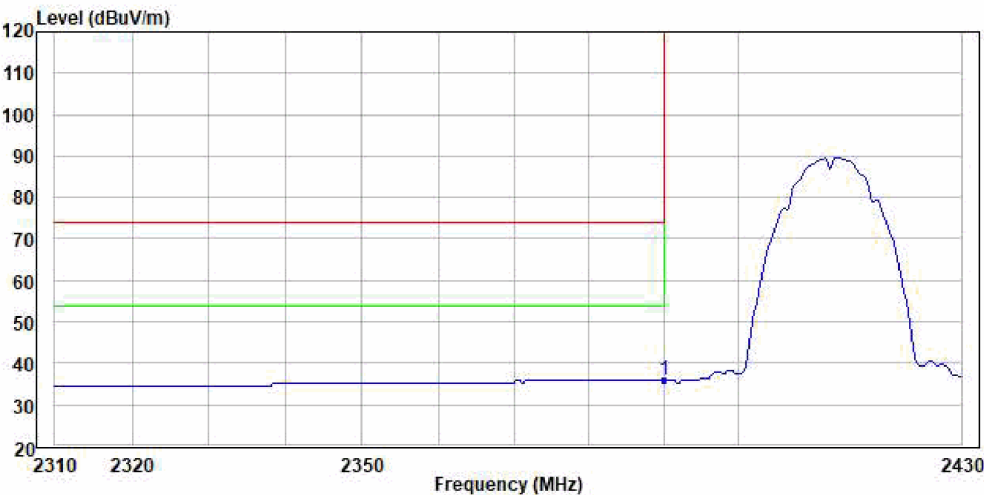


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_ANT1_2412
Remark :

Freq	Level	Read	Ant	Aux	Cable	Preamp	Limit	Over	Remark
		Level	Factor	Factor	Loss	Factor	Line	Limit	
MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP 2390.000	35.86	34.36	31.55	10.00	7.35	47.40	54.00	-18.14	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

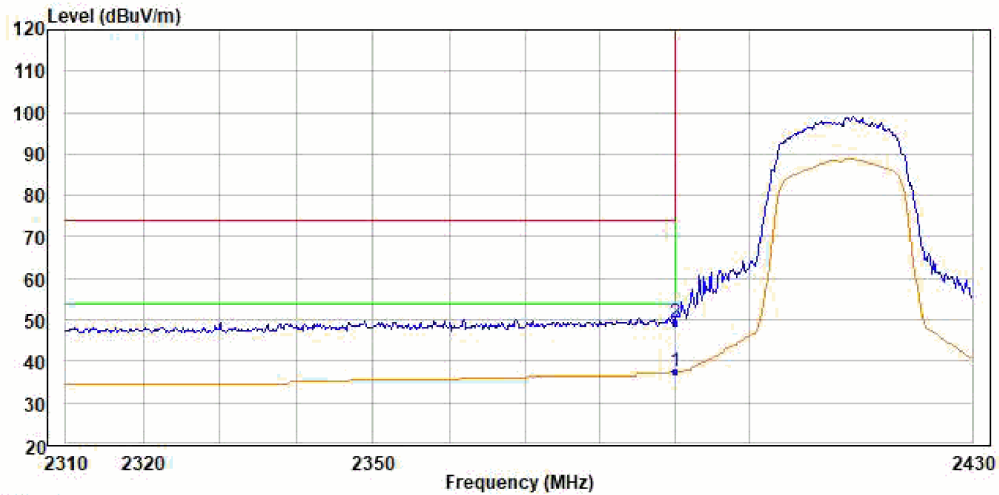

Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%) : 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_ANT2_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	37.54	36.04	31.55	10.00	7.35	47.40	54.00	-16.46	Average
2 PK	2390.000	49.35	47.85	31.55	10.00	7.35	47.40	74.00	-24.65	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1 PP	2390.000	37.54	36.04	31.55	10.00	7.35	47.40	54.00	-16.46	Average
2 PK	2390.000	49.35	47.85	31.55	10.00	7.35	47.40	74.00	-24.65	Peak